2025 Catalog

CANADA

Grey Goat Hardware

Frameless Shower Door | Railing Hardware | Storefront & Entrances | Door Rails & Architectural Hardware | Glazing Supplies | **goatobject** 3D Models

GGH GLAZING SUPPLY COMPANY

www.ggshardware.com

Grey Goat Hardware is a leading Canadian supplier of premium glass and architectural hardware. With over 5,500 products and nationwide distribution, we deliver innovative solutions for shower systems, glass railings, and commercial glazing—trusted by glaziers, architects, and designers across the country.

TORONTO | MONTREAL | CALGARY

Volume 2.0

Our Locations

Canada's Trusted Glazing Hardware Distributor

With distribution centers in Toronto, Montreal, and Calgary, Grey Goat Hardware ensures fast and efficient service - wherever your project takes you.

Contact Us

Trusted by **2,000+ glazing contractors** across North America

TORONTO WAREHOUSE

606 Rivermede Rd, UNIT #1 & 2, Concord, ON L4K 2H6

📞 Phone: 1-905-264-1600

📱 Textline: 1-877-999-4628

✉ Email: cs.toronto@ggshardware.com

🌐 Website: www.ggshardware.com

MONTREAL WAREHOUSE

8145 Avenue Marco-Polo, Montreal, QC H1E 5Y8

📞 Phone: 1-514-547-3422

📱 Textline: 1-877-999-4628

✉ Email: cs.montreal@ggshardware.com

🌐 Website: www.ggshardware.com

CALGARY WAREHOUSE

2880 45 Ave SE, Unit # 248, Calgary, AB T2B 3M1

📞 Phone: 1-905-264-1600

📱 Textline: 1-877-999-4628

✉ Email: cs.calgary@ggshardware.com

🌐 Website: www.ggshardware.com

---

www.ggshardware.com

Scan For Real-Time

Get instant access to key tools and info — right from your phone.

Scan to Order | Real-Time Inventory | Custom Pricing | Volume Discounts | Orders Tracking | 3D CAD Models | Technical Drawings | Factory Order Programs | Full Product Catalog

---

GGH GLAZING SUPPLY COMPANY

TORONTO • MONTREAL • CALGARY

GGH PRODUITS VERRIERS

TORONTO • MONTREAL • CALGARY

Table Of
Contents

Who We Are?

Grey Goat Hardware is a leading supplier of premium glass and architectural hardware solutions across North America. Built on a foundation of reliability, precision, and performance, we've become the trusted partner for glaziers, contractors, and designers who demand both form and function in every detail.

With decades of industry knowledge and hands-on experience, our team curates and delivers high-quality hardware—from shower hinges and sliding systems to railing components, door rails, patch fittings, and more. Every product we offer is carefully selected to meet the highest standards of durability, ease of installation, and design appeal.

We don't just sell hardware—we support your build from start to finish. Our focus is on providing dependable solutions, responsive service, and the technical expertise you need to complete your projects smoothly and successfully.

Driven by innovation, powered by partnership, and dedicated to craftsmanship—GGH Hardware is Built for the Job.

Introducing Grey Goat Hardware │ Faster Shipping

Premium glass hardware meets better pricing and faster shipping. Get the quality you trust, delivered with speed and value that keeps your projects moving.

Check Our Website

Check our website at www.ggshardware.com for live inventory, product specs, and easy online ordering — available 24/7.

NATIONWIDE DISTRIBUTION

CALGARY

MONTREAL

TORONTO (HQ)

GGH In-house Fabrication

At GGH, we specialize in delivering premium glass hardware solutions—engineered and fabricated in-house to meet the demands of modern architectural systems. With full control over fabrication, Grey Goat Hardware ensures precision, consistency, and faster turnaround times. Every product is crafted with installers and end users in mind, offering durable performance, ease of installation, and seamless integration into today's design standards.

GGH – Your Partner

We proudly collaborate with fabricators, OEMs, and project managers to source custom hardware solutions tailored to unique builds and site requirements. Whether it's recommending an optimized standard product or finding specialized components, GGH helps bring your project to life.

Quality You Can Trust

At Grey Goat Hardware, quality is at the core of everything we do. Our products are engineered and professionally stamped to meet Canadian building standards. Trusted by thousands of installers across North America, our hardware is designed for ease of installation, backed by in-house support and continuous innovation.

TORONTO Location

606 Rivermede Rd UNIT #1 & 2, Concord, ON L4K 2H6
📞 Phone: 1-905-264-1600
📱 Textline: 1-877-999-4628
📧 Email: cs.toronto@ggshardware.com
🌐 Website: www.ggshardware.com
Hours of Operation:
Monday to Friday: 8:00 AM – 5:00 PM
Saturday: 9:00 AM – 1:00 PM
Sunday: Closed

MONTREAL Location

8145 Avenue Marco-Polo, Montreal, QC H1E 5Y8
📞 Phone: 1-514-547-3422
📱 Textline: 1-877-999-4628
📧 Email: cs.montreal@ggshardware.com
🌐 Website: www.ggshardware.com
Hours of Operation:
Monday to Friday: 7:30 AM – 4:00 PM
Saturday: Closed
Sunday: Closed

CALGARY Location

2880 45 Ave SE, Unit # 248 Calgary, AB T2B 3M1
📞 Phone: 1-905-264-1600
📱 Textline: 1-877-999-4628
📧 Email: cs.calgary@ggshardware.com
🌐 Website: www.ggshardware.com
Hours of Operation:
Monday to Friday: 8:00 AM – 5:00 PM
Saturday: Closed
Sunday: Closed

GGH **Professional Industry Partners**

GGH GLAZING SUPPLY COMPANY

At the heart of Grey Goat Hardware is GGH—our in-house family of brands created specifically to meet the evolving needs of today's glazing and architectural professionals. Developed from years of on-site experience, customer feedback, and a relentless pursuit of better, smarter hardware, GGH's Brands represent more than just product lines—they embody our commitment to craftsmanship, reliability, and innovation across every application.

Engineered for the Real World

GGH products are thoughtfully designed with the installer in mind. Every detail—from material selection to finish options and installation ease—is engineered for real-world performance and durability. Whether it's a frameless shower hinge, a sliding kit, or a railing component, our hardware is made to meet the demands of daily use while maintaining its clean, architectural appearance.

GGH (Grey Goat Hardware)

Our exclusive line of high-quality architectural and glass hardware. Designed with professionals in mind, GGH® products are engineered for durability, ease of installation, and refined aesthetics—trusted by glaziers, contractors, and designers alike.

Wood's Powr-Grip®

A world leader in vacuum lifting tools, Wood's Powr-Grip® delivers powerful, reliable solutions for handling glass and other materials safely and efficiently. A must-have for any serious installer.

Arch-Loc™

Combining style and strength, Arch-Loc™ offers a comprehensive range of fittings and locks for glass doors and partitions. Precision-made and performance-tested, Arch-Loc is known for quality without compromise.

TREMCO®

products are engineered for durability, flexibility, and long-term protection—making them the go-to choice for glass and glazing applications, façade systems, curtain walls, and structural joints.

ASSA ABLOY

ASSA ABLOY is synonymous with security, innovation, and precision. From mechanical locks and door closers to automated entrance systems and electronic access control, ASSA ABLOY offers comprehensive solutions trusted across industries worldwid

Horton Automatics®

A leader in automated entrance systems, Horton Automatics specializes in sliding, swinging, and revolving door solutions that enhance both convenience and accessibility.

Parmer®

Parmer delivers a robust range of door hardware and accessories built for demanding environments. Known for combining simplicity with strength, Parmer products are perfect for high-traffic commercial spaces where function and form must go hand in hand.

goatobject 3D Models

Goatobject is our 3D modeling tool, giving you detailed views of GGH products for accurate planning and presentation. Rotate, inspect, and download visual assets — right from our site.

GGH **Customer Service**

At Grey Goat Hardware, customer service is our priority. We know reliable support matters just as much as product quality, so we work hard to make your experience smooth, efficient, and hassle-free.

What We Offer?

Technical Support

From product installation guidance to troubleshooting, our team of experts is here to help you with the technical details of every product we offer.

Product Recommendations

Not sure which product best suits your project? We provide in-depth consultations and expert recommendations to help you choose the right hardware for your needs.

Order Assistance

Need to place an order or track your shipment? Our team ensures a seamless ordering experience and can provide updates on inventory, delivery, and lead times.

Custom Solutions

For unique projects or specific needs, our team works directly with you to deliver customized hardware solutions—tailored to meet your exact specifications.

Tech Sales and Estimating Department

- Fast and accurate quotations for standard and custom hardware
- Review of drawings to recommend the right products
- Hardware guidance to ensure code compliance and performance
- Custom solutions for challenging site conditions or unique designs
- Responsive technical support to keep your job moving smoothly

Business Development Department

- Tailored partnership programs for dealers, resellers, and project clients
- Product and market insights to support your business growth
- Collaboration on large-scale or multi-phase projects
- Opportunities for co-marketing, training, and regional expansion

7

GGH **Ordering Information**

We make ordering simple, transparent, and efficient—because getting the right hardware, on time, should never be complicated. Whether you're placing a one-time order or managing a multi-phase project, Grey Goat Hardware provides the tools and support you need for a seamless experience from quote to delivery.

---

01 Account Setup

To streamline your orders and access online pricing, we encourage all professional customers to set up an account online at www.ggshardware.com/register.

To apply for an account:
- Visit: www.ggshardware.com/account
- Accounts typically activate within 30mins.
- Payment terms available with submission and approval of credit application (contact customer support for more details).

---

02 Placing an Order

You can place orders through any of the following channels:

Online:
- Browse our full catalog and shop 24/7 at www.ggshardware.com
- Fastest order entry, with real-time stock availability and shipping estimates

Email:
- Send purchase orders or inquiries to: orders@ggshardware.com
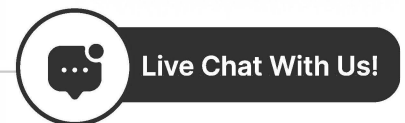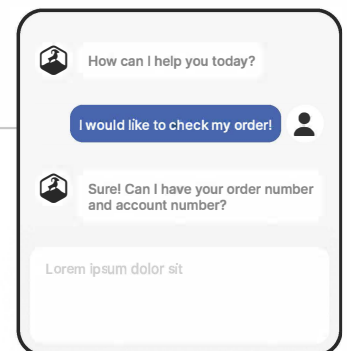- Please include: company name, product SKUs, quantities, shipping address, and requested delivery timeline

Phone:
- Call our Sales Team directly at +1 905-264-1600
- Available Monday–Friday, 8:00 AM–5:00 PM (PST)
- Perfect for urgent orders, special requests, or personalized assistance

---

03 Payment Options

We accept the following payment methods:
- Credit Terms (Net 30) – for approved accounts
- Major Credit Cards – Visa, MasterCard, AMEX
- E-Transfers / ACH / Bank Wire – banking info available upon request
- Checks – Accepted for established accounts

---

04 Shipping & Delivery

We ship across North America with a variety of delivery options to meet your schedule:

Carriers:
- UPS, FedEx, DHL, Local Freight
- Dedicated LTL or courier for large shipments or glass/oversized items

Shipping Options:
- Standard Ground (2–5 business days)
- Express & Overnight (available upon request)
- Will Call / Local Pickup (for nearby customers – call to schedule)

Cut-off Time for Same-Day Shipping:
- Orders placed by 2:00 PM PST (in-stock items) usually ship same day

Tracking:
- Tracking numbers and delivery updates are emailed as soon as the order ships

How can I help you today?

I would like to check my order!

Sure! Can I have your order number and account number?

Lorem ipsum dolor sit

Live Chat With Us!

GGH **Finishes**

At Grey Goat Hardware, we believe the finish is more than just surface-level—it's the final touch that defines the look, feel, and performance of your space. That's why GGH offers a curated selection of premium finishes across our product lines, designed to complement a wide range of architectural styles and applications.

The following finishes were available at the time this catalog was printed:
Chrome, Brushed Nickel, Matte Black, Satin Brass, Polished Nickel, Brushed Bronze, Gun Metal, Oil Rubbed Bronze, White, Antique Brass, Polish Brass, Brushed Stainless Steel, Polished Stainless Steel, Satin Anodized, and Custom Finishes.

Frameless Shower Hardware

CH Chrome	BN Brushed Nickel	MBL Matte Black	SB Satin Brass	PN Polished Nickel	BBRZ Brushed Bronze
GM Gun Metal	ORB Oil Rubbed Bronze	W White	AB Antique Brass	PB Polish Brass	Custom Finishes

This color tower was created for one-time distribution only. For the most up-to-date selection of available finishes, please visit our website at ggshardware.com.

Railing Hardware

BSS Brushed Stainless Steel	MBL Matte Black	SB Satin Brass	W White	PSS Polished Stainless Steel	Custom Finishes

Commercial Finishes

SA Satin Anodized	MBL Matte Black	BSS Brushed Stainless Steel	PSS Polished Stainless Steel	SB Satin Brass	Custom Finishes

Future Colors

ABC Antique Brushed Copper	BRG Brushed Rose Gold	SC Satin Chrome	RG Rose Gold	LSB Lacquered Satin Brass	PB Polish Brass	PVDB PVD Black

*These finishes aren't listed on our website yet — but they're available in our color chain. If you're interested, we'd be happy to provide upon request!

Check **Our Website**

www.ggshardware.com

Step 1: Visit https://ggshardware.com/

Please click on the **"Login" or "Register"** button located in the top right corner.

Step 2: Login or Sign-up

Enter your login credentials or register for a new account. If you have just registered, your account will be approved by a representative within the same business day, allowing you to make purchases.

Step 3: Search for your items and review the PDF / CAD Drawing

If you know the item SKU, please enter it into the search bar. Once your account is approved, you will also be able to access the CAD Drawing on the product page. Please remember to select your desired finish and then **click "Add to Cart."**

Step 4: Enter your PO# and NOTES and Special Instructions

If you know the item SKU, please enter it into the search bar. Once your account is approved, you will also be able to access the CAD Drawing on the product page. Please remember to select your desired finish and then **click "Add to Cart."**

Step 5: Confirm if delivery or pickup

Please choose whether you'd like to pick up your order or have it delivered from the nearest warehouse (Toronto or Montreal). After making your selection and updating your address details, just click **"Complete order."** We'll take care of everything from there!

Explore GGH 3D Models on goatobject™
3D Models

Visualize Before You Buy

Take the guesswork out of your next project. With **goatobject**, you can preview our shower doors and glass systems as **2D and 3D models**—perfect for architects, designers, and contractors.

Visit Us on GOATOBJECT

Explore our product library online: 👉 www.ggshardware.com/goatobject
Search for GGH products and see how they'll integrate into your plans before making a purchase.

3D Preview	3D Preview

Frameless Shower Door Hinges & Pivots

5 YEAR WARRANTY

USE ONLY MONOLITHIC TEMPERED GLASS

Jennifer Series
Shower Hinges - Square

USE ONLY MONOLITHIC TEMPERED GLASS

INSTALLER'S FAVORITE! GOAT Drill & Spade Bits, Refer Page Number: 272

Faster & Easier Installation! Pre Glued Gaskets

2" (50.80mm)

2-3/16" (56mm)

Square Profile

3 1/2" (90.00mm)

Includes: Hinge, Glazing Gaskets, Wall Mounting Screws, Allen Head/Phillips Head Cover Plate Screws, and View Fabrication Template Online

Key Features

Designers Selected

- **Material:** Durable, high-strength brass
- **Glass Fit:** 5/16" to 1/2" (8–12 mm)
- **Grip:** Pre-glued anti-slip gaskets for secure hold
- **Adjustability:** 5° reversible pin for easy alignment
- **Install:** Quick install with standard tools

Specification

NO. Hinges	Thickness	MAX. Door Width	MAX. Weight
2 Hinges	5/16" to 1/2"	28" (711mm)	80lbs. (36kg)
3 Hinges	(8 to 12 mm)	32" (813mm)	120lbs. (54kg)

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

JEN037
Full Plate
Wall to Glass

JENH037
H Back Plate
Wall to Glass

JEN044
Offset Plate
Wall to Glass

Heavy Duty

FOR TIGHTER WALL CLEARANCE

JEN074
Short Back Plate
Wall to Glass

FOR TIGHTER WALL CLEARANCE

JEN280
Pony Plate
Wall to Glass

JEN180
Glass Mount 180°
Glass to Glass

JEN092
Glass Mount 90°
Glass to Glass

JEN045
Glass Mount 135°
Glass to Glass

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

01 Frameless Shower Door

JENT092

Glass to Glass 90° - T Shape

(!) Note: Visit ggshardware.com
For Glass Fabrication & Product Information.

Adjustable – Jennifer Series

Our **NEW Adjustable Hinges** provide flexibility for setting any closed angle up to 90 degrees. Once the door is installed, simply loosen the Allen Set Screws, adjust the door to the desired closed position, and then tighten the screws to lock it in place. The door will automatically self-center to the new angle. These versatile hinges allow for smooth operation, swinging both inwards and outwards.

JENH337

H Plate
Wall to Glass / Adjustable

Adjustable Set Screws
Backside of Hinge

JEN345

Neo Angle 135°
Glass to Glass / Adjustable

JEN380

Adjustable Glass Mount 180°
Glass to Glass / Adjustable

JEN344 *

Adjustable Offset Plate
Wall to Glass

* For the most up-to-date product availability, visit our website.

■ **P13** Frameless Shower Door	■ **P163** Storefront & Entrance System	■ **P261** Stock Glass Doors
■ **P85** Railing Hardware	■ **P223** Door Rails & Architectural Hardware	■ **P271** Glazing Supplies

01 Frameless Shower Door

Beverly Series
Beveled Shower Hinges - Round

USE ONLY MONOLITHIC TEMPERED GLASS

INSTALLER'S FAVORITE! GOAT Drill & Spade Bits, Refer Page Number: 272

Faster & Easier Installation! Pre Glued Gaskets

2" (50.80mm)

2-1/8" (56mm)

3 1/2" (90.00mm)

Round Profile

Key Features

- **Material:** Durable, high-strength brass
- **Glass Fit:** 5/16" to 1/2" (8–12 mm)
- **Grip:** Pre-glued anti-slip gaskets for secure hold
- **Adjustability:** 5° reversible pin for easy alignment
- **Install:** Quick install with standard tools

Specification

NO. Hinges	Thickness	MAX. Door Width	MAX. Weight
2 Hinges	5/16" to 1/2"	28" (711mm)	80lbs. (36kg)
3 Hinges	(8 to 12 mm)	32" (813mm)	120lbs. (54kg)

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

Includes: Hinge, Glazing Gaskets, Wall Mounting Screws, Allen Head/Phillips Head Cover Plate Screws, and View Fabrication Template Online

BEV037
Beveled Full Plate
Wall to Glass

BEVH037
Beveled H Back Plate
Wall to Glass

BEV044
Beveled Offset Plate
Wall to Glass

FOR TIGHTER WALL CLEARANCE

BEV074
Beveled Short Back
Plate / Wall to Glass

FOR TIGHTER WALL CLEARANCE

BEV280
Beveled Pony Plate
Wall to Glass

BEV180
Beveled Glass Mount
180°/ Glass to Glass

BEV092
Beveled Glass Mount
90° / Glass to Glass

BEV045
Beveled Glass Mount
135° / Glass to Glass

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

01 Frameless Shower Door

Adjustable – Beverly Series

Round Profile

BEVH337 *
Adjustable Beveled H Back Plate / Wall to Glass

BEV345 *
Adjustable Beveled Neo Angle 135° / Glass to Glass

* For the most up-to-date product availability, visit our website.

17

www.ggshardware.com

P13 Frameless Shower Door | P163 Storefront & Entrance System | P261 Stock Glass Doors
P85 Railing Hardware | P223 Door Rails & Architectural Hardware | P271 Glazing Supplies

01 Frameless Shower Door

Vivian Series

Shower Hinges - Square Heavy Duty

USE ONLY MONOLITHIC TEMPERED GLASS

FOR HEAVIER AND WIDER DOORS

2 1/8" (54.00mm)

2-3/8" (59mm)

Square Profile

3-7/8" (100mm)

Key Features

- **Material:** Durable, corrosion-resistant brass
- **GlassFit:** 3/8" to 1/2" (10–12 mm)
- **Grip:** Anti-slip, pre-glued gaskets for secure hold
- **Adjustability:** 5° reversible pin for easy alignment
- **Install:** Fast setup with standard tools

Specification

NO. Hinges	Thickness	MAX. Door Width	MAX. Weight
2 Hinges	3/8" to 1/2"	36" (914mm)	110lbs. (50kg)
3 Hinges	(10 to 12 mm)	36" (914mm)	140lbs. (63kg)

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

Includes: Hinge, Glazing Gaskets, Wall Mounting Screws, Allen Head/Phillips Head Cover Plate Screws, and View Fabrication Template Online

FOR TIGHTER WALL CLEARANCE

VIV037

Square HD Full Plate
Wall to Glass

VIVH037

Square HD H Back
Plate / Wall to Glass

VIV044

Square HD Offset Plate
Wall to Glass

VIV074

Square HD Short
Back Plate / Wall to glass

VIV180

Square HD 180°
Glass to Glass

VIV092

Square HD 90°
Glass to Glass

VIV045

Square HD Neo Angle 135°
Glass to Glass

* For the most up-to-date product availability, visit our website.

18

www.ggshardware.com

Adjustable – Vivian Series

Overview

Our **NEW Adjustable Hinges** provide flexibility for setting any closed angle up to 90 degrees. Once the door is installed, simply loosen the Allen Set Screws, adjust the door to the desired closed position, and then tighten the screws to lock it in place. The door will automatically self-center to the new angle. These versatile hinges allow for smooth operation, swinging both inwards and outwards.

VIV337 ✳

Adjustable Full Plate HD / Wall to Glass

VIV374 ✳

Adjustable Short Plate HD / Wall to Glass

VIV345 ✳

Adjustable Square 135° HD / Glass to Glass

VIV344 ✳

Adjustable Offset Plate HD / Wall to Glass

VIV380 ✳

Adjustable 180° HD / Glass to Glass

P13 Frameless Shower Door	**P163** Storefront & Entrance System	**P261** Stock Glass Doors
P85 Railing Hardware	**P223** Door Rails & Architectural Hardware	**P271** Glazing Supplies

01 Frameless Shower Door

Colette Series
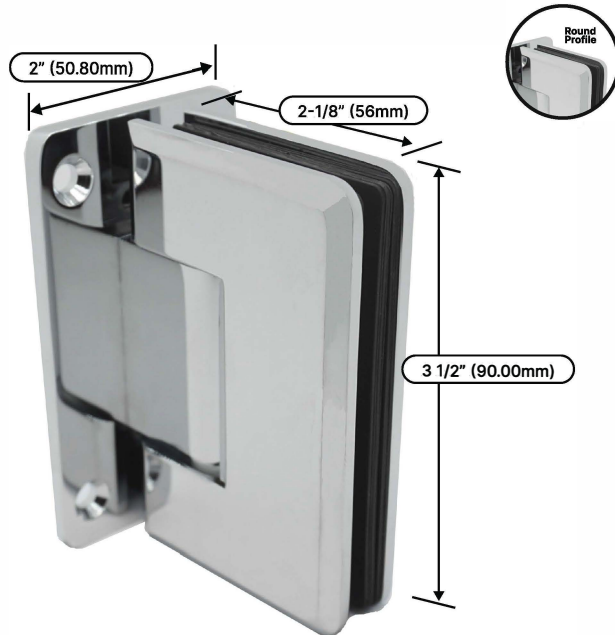## Shower Hinges - Beveled Heavy Duty

USE ONLY MONOLITHIC TEMPERED GLASS

INSTALLER'S FAVORITE! GOAT Drill & Spade Bits, Refer Page Number: 272

Faster & Easier Installation! Pre Glued Gaskets

2-1/4" (57mm)

2-1/4" (57mm)

3-7/8" (100mm)

Round Profile

FOR HEAVIER AND WIDER DOORS

KG

Key Features

- **Material:** High-strength, corrosion-resistant brass
- **Glass Fit:** Compatible with 3/8" to 1/2" (10–12 mm) glass
- **Grip:** Pre-glued Anti-Slip Gaskets for Secure Hold
- **Adjustability:** 5° Reversible Pin for Precise Alignment
- **Installation:** Quick and easy with standard tools

Specification

NO. Hinges	Thickness	MAX. Door Width	MAX. Weight
2 Hinges	3/8" to 1/2"	36" (914mm)	110 lbs (50 kg)
3 Hinges	(10 to 12mm)	36" (914mm)	140 lbs (63 kg)

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

Includes: Hinge, Glazing Gaskets, Wall Mounting Screws, Allen Head/Phillips Head Cover Plate Screws, and View Fabrication Template Online

COLEH037
Beveled HD H Plate
Wall to Glass

COLE180
Beveled HD 180°
Glass to Glass

COLE092
Beveled HD 90°
Glass to Glass

COLE045
Beveled HD 135°
Glass to Glass

P13 Frameless Shower Door	P163 Storefront & Entrance System	P261 Stock Glass Doors
P85 Railing Hardware	P223 Door Rails & Architectural Hardware	P271 Glazing Supplies

01 Frameless Shower Door

Adjustable – Colette Series

FOR HEAVIER AND WIDER DOORS

FOR 1/2" GLASS

Overview

Our **NEW Adjustable Hinges** provide flexibility for setting any closed angle up to 90 degrees. Once the door is installed, simply loosen the Allen Set Screws, adjust the door to the desired closed position, and then tighten the screws to lock it in place. The door will automatically self-center to the new angle. These versatile hinges allow for smooth operation, swinging both inwards and outwards.

FOR TIGHTER WALL CLEARANCE

COLEH337 ✱

Adjustable - Beveled HD H Back Plate
Wall to Glass

COLE374 ✱

Adjustable - Beveled HD Short Back Plate
Wall to Glass

COLE345 ✱

Adjustable - Beveled HD 135°
Glass to Glass

COLE344 ✱

Adjustable - Beveled HD Offset Plate
Wall to Glass

Note: Visit ggshardware.com
For Glass Fabrication &
Product Information.

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

01 Frameless Shower Door

Valerie Series

Shower Hinges - Square Extra Heavy Duty

NEW

Faster & Easier Installation! Pre Glued Gaskets

Finishes

Chrome   Brushed Nickel   Matte Black   Satin Brass   Custom Finishes

Includes: Hinge, Glazing Gaskets, Wall Mounting Screws, Allen Head/Phillips Head Cover Plate Screws, and View Fabrication Template Online

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Key Features

- **Material:** Solid brass for durability and corrosion resistance
- **Glass Fit:** 5/16" to 1/2" (8–12 mm)
- **Weight Capacity:** Up to 140 lbs (64 kg) with two hinges
- **Max Door Width:** Suitable for doors up to 39" (1000 mm)
- **Installation:** Easy setup using standard tools

Square Profile

2-1/2" (64mm)   2-1/2" (65mm)

4-3/8" (111mm)

VAL037

Square Full Plate Wall to Glass

FOR EXTRA HEAVY DUTY WEIGHT AND WIDTH — KG

FOR 1/2" GLASS

Adjustable – Valerie Series

USE ONLY MONOLITHIC TEMPERED GLASS

Overview

Our **NEW Adjustable Hinges** provide flexibility for setting any closed angle up to 90 degrees. Once the door is installed, simply loosen the Allen Set Screws, adjust the door to the desired closed position, and then tighten the screws to lock it in place. The door will automatically self-center to the new angle. These versatile hinges allow for smooth operation, swinging both inwards and outwards.

Extra HD

VAL344 ✱

Adjustable - Shower Offset Plate Wall to Glass

Extra HD

VAL380 ✱

Adjustable - Square 180° HD Glass to Glass

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

01 Frameless Shower Door

Betty Series
Shower Hinges - Round Extra Heavy Duty

Faster & Easier Installation! Pre Glued Gaskets

NEW

Finishes

Chrome   Brushed Nickel   Matte Black   Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.
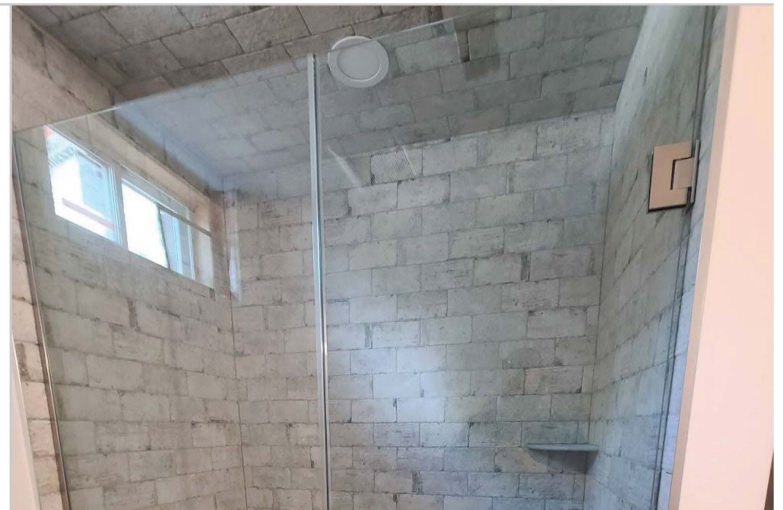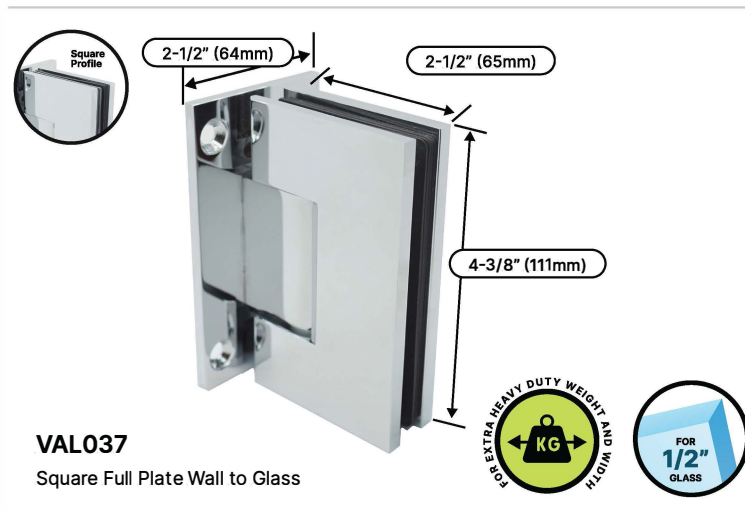
Includes: Hinge, Glazing Gaskets, Wall Mounting Screws, Allen Head/Phillips Head Cover Plate Screws, and View Fabrication Template Online

Key Features

- **Material:** Solid brass for strength and corrosion resistance
- **Glass Fit:** 5/16" to 1/2" (8–12 mm)
- **Weight Capacity:** Holds up to 140 lbs (64 kg) with two hinges
- **Max Door Width:** Recommended up to 39" (1000 mm)
- **Installation:** Quick and easy with standard tools

Round Profile

2-1/8" (54mm)

2-1/4" (57mm)

3-15/16" (100mm)

BETH037
Beveled H Plate Wall to Glass

FOR EXTRA HEAVY DUTY WEIGHT AND WIDTH

FOR 1/2" GLASS

Adjustable – Betty Series

USE ONLY MONOLITHIC TEMPERED GLASS
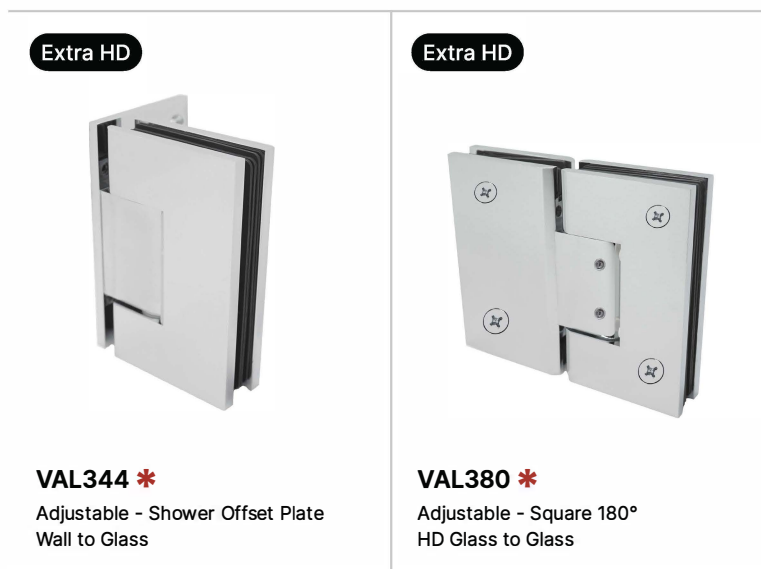
Overview

Our **NEW Adjustable Hinges** provide flexibility for setting any closed angle up to 90 degrees. Once the door is installed, simply loosen the Allen Set Screws, adjust the door to the desired closed position, and then tighten the screws to lock it in place. The door will automatically self-center to the new angle. These versatile hinges allow for smooth operation, swinging both inwards and outwards.

Extra HD

BET344 ✳
Adjustable - Beveled Offset Plate Wall to Glass

Extra HD

BET380 ✳
Adjustable - Beveled Glass Mount 180° / Wall to Glass

Cara Series
Square Pivot

USE ONLY MONOLITHIC TEMPERED GLASS

Faster & Easier Installation! Pre Glued Gaskets

3-5/8" (92mm)

2" (50.80mm)

13/16" (21mm)

Square Profile

Key Features

- **Materials:** Solid brass construction with stainless steel pins and spring for enhanced durability.
- **Glass Compatibility:** Suitable for glass thicknesses of 5/16" to 3/8" (8 to 10 mm).
- **Pivot Mechanism:** Smooth, reliable pivot action for easy door operation.
- **Installation:** Easy installation with standard tools.

Specification

NO. Hinges	Thickness	MAX. Door Width	MAX. Weight
2 x Regular Duty	5/16" to 1/2" (8 to 12mm)	31" (787mm)	100lbs. (45kg)
2 x Heavy Duty		36"(914mm)	145 lbs. (66 kg)

Note: Do not exceed either maximum weight or width when choosing proper quantity of hinges.

Finishes

Chrome · Satin Brass · Gun Metal · Polished Brass · Brushed Nickel · Polished Nickel · Brushed Bronze · White · Matte Black · Oil Rubbed Bronze · Antique Brass · Custom Finishes
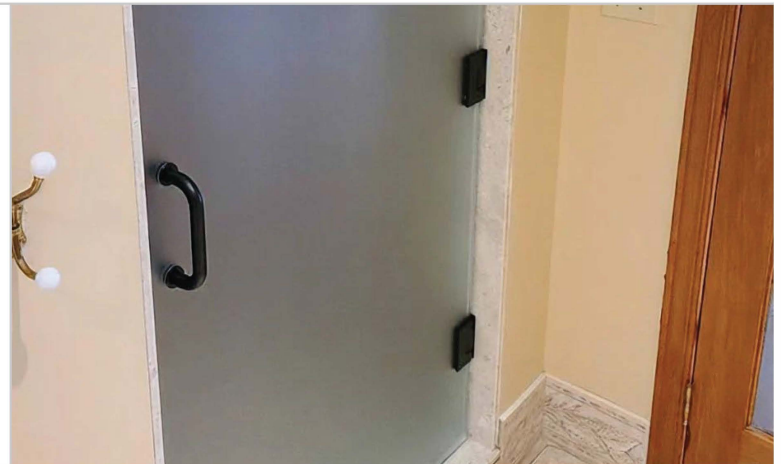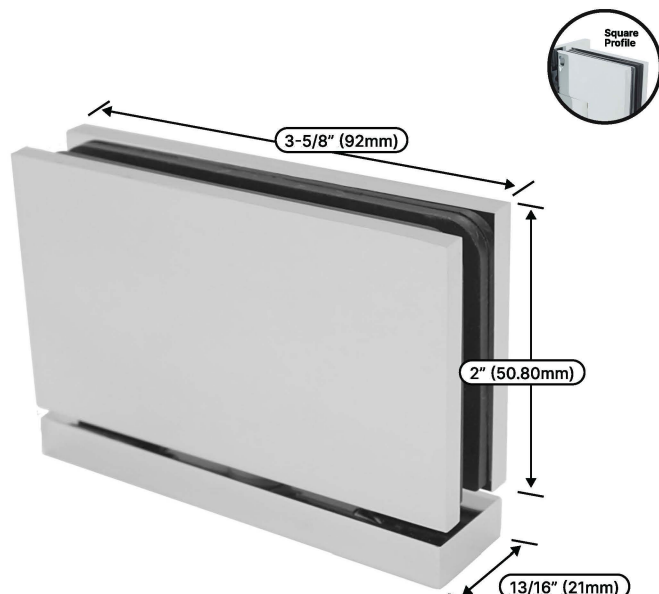
For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

CARA01 — Square Pivot Floor / Ceiling to Glass

NEW **CARA02** — Square Pivot Glass to Glass

CARA05L — Square Offset Pivot / Left Hand Wall to Glass

CARA05R — Square Offset Pivot Right Hand / Wall to Glass

NEW **CARA06 **** — Adjustable Square Header to Glass

NEW **CARA07** — Top or Bottom Pivot with Attached U-Clamp Hinge

PIV5PIN — Cara Series Pivot Pin Set

P13 Frameless Shower Door **P163** Storefront & Entrance System **P261** Stock Glass Doors
P85 Railing Hardware **P223** Door Rails & Architectural Hardware **P271** Glazing Supplies

01 Frameless Shower Door

Cara Series – Heavy Duty
Shower Hinges - Round Extra Heavy Duty

FOR 1/2" GLASS

FOR HEAVIER AND WIDER DOORS

Heavy Duty

4-3/4" (121mm)

2-5/8" (66mm)

1" (25mm)

HDCARA01

Square HD Pivot - Floor/ Ceiling to Glass

Heavy Duty

HDCARA02

Square HD Pivot - Glass to Glass

NEW

Heavy Duty

HDCARA05L

Square Offset Top or Bottom Pivot / Left Hand

Heavy Duty

HDCARA05R

Square Offset Top or Bottom Pivot / Right Hand

Heavy Duty

HDPIV5PIN

Heavy Duty Cara Hinges Pivot Pin

Note: Visit ggshardware.com
For Glass Fabrication & Product Information.

* For the most up-to-date product availability, visit our website.

25

www.ggshardware.com

P13 Frameless Shower Door | P163 Storefront & Entrance System | P261 Stock Glass Doors
P85 Railing Hardware | P223 Door Rails & Architectural Hardware | P271 Glazing Supplies

01 Frameless Shower Door

Piper Series
Beveled Pivot
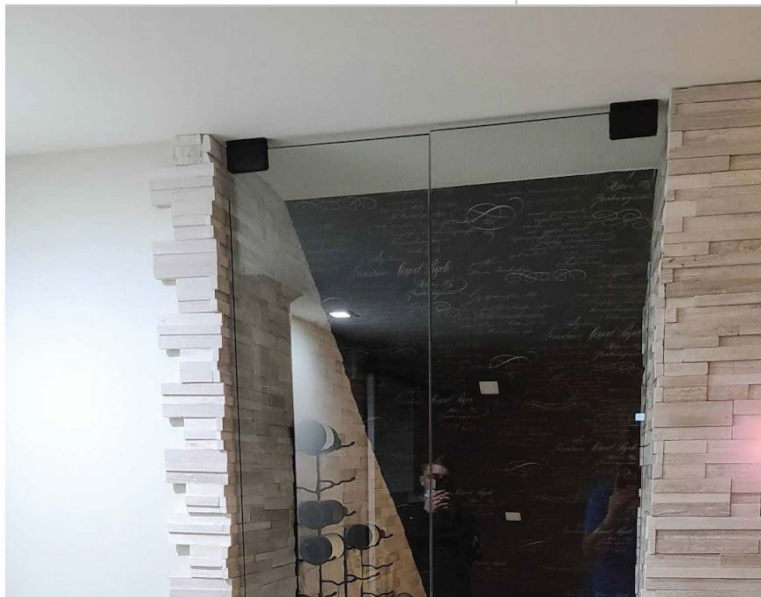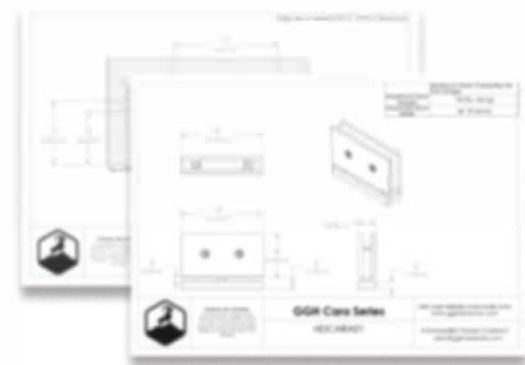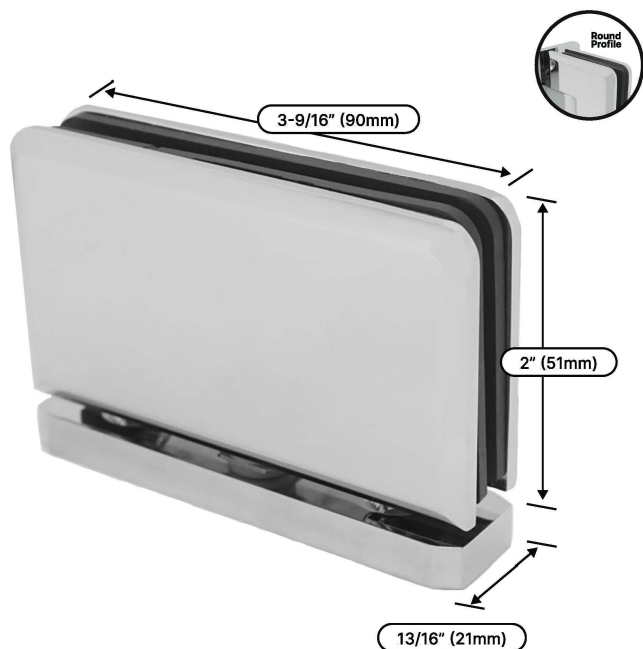
USE ONLY MONOLITHIC TEMPERED GLASS

Faster & Easier Installation! Pre Glued Gaskets

Round Profile

3-9/16" (90mm)

2" (51mm)

13/16" (21mm)

Key Features

- **Materials:** Solid brass construction with stainless steel pins and spring for enhanced durability.
- **Glass Compatibility:** Suitable for glass thicknesses of 5/16" to 3/8" (8 to 10 mm).
- **Pivot Mechanism:** Smooth, reliable pivot action for easy door operation.
- **Installation:** Easy installation with standard tools.

Specification

NO. Hinges	Thickness	MAX. Door Width	MAX. Weight
2 x Regular Duty	5/16" to 1/2" (8 to 12mm)	31" (787mm)	100lbs. (45kg)
2 x Heavy Duty		36"(914mm)	145 lbs. (66 kg)

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

PIPJR01
Beveled Pivot
Floor / Ceiling to Glass

PIP01
Beveled Pivot
Floor / Ceiling to Glass

PIP02
Beveled Pivot
Glass to Glass

NEW

PIP06
Adjustable Beveled
Header to Glass

PIP05L
Beveled Offset Pivot
Left Hand / Wall to Glass

PIP05R
Beveled Offset Pivot
Right Hand / Wall to Glass

Piper Series – Heavy Duty

FOR 1/2" GLASS   FOR HEAVIER AND WIDER DOORS

Heavy Duty

4-3/4" (120mm)

2-5/8" (67mm)

1" (25mm)

HDPIP01

Beveled Pivot - Floor / Ceiling to Glass

Heavy Duty   **NEW**

HDPIP05R

HD Offset Pivot / Right Hand Wall to Glass

Heavy Duty

HDPIP05L

HD Offset Pivot / Left Hand Wall to Glass

■ **P13** Frameless Shower Door	■ **P163** Storefront & Entrance System	■ **P261** Stock Glass Doors
■ **P85** Railing Hardware	■ **P223** Door Rails & Architectural Hardware	■ **P271** Glazing Supplies

01 Frameless Shower Door

Junior Jenifer Series

Shower Hinges - Square - Light Duty

FEATURE PRODUCTS

NEW

1-3/4" (45mm)
1-3/4" (46mm)
3" (75mm)

Specification

NO. Hinges	Thickness	MAX. Door Width	MAX. Weight
2 Hinges	1/4" to 5/16"	28" (711mm)	62lbs. (28kg)
3 Hinges	(6 to 8mm)	32" (813mm)	92lbs. (42kg)

Finishes

Chrome	Brushed Nickel	Matte Black	Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.
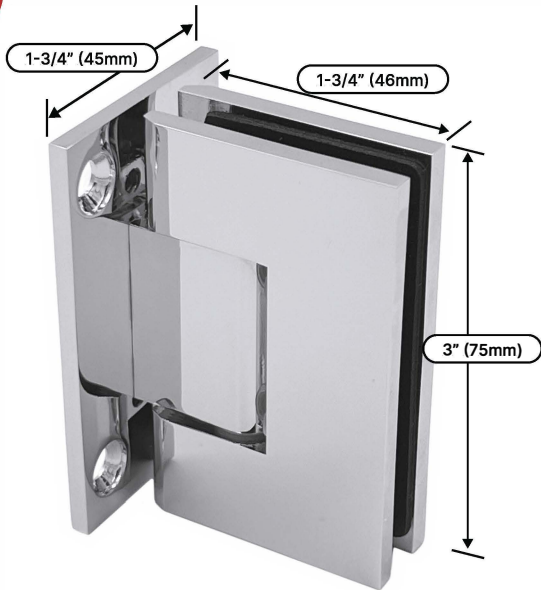
FOR LIGHT WEIGHT AND SMALLER DOORS — KG

FOR 1/4" GLASS — USE ONLY MONOLITHIC TEMPERED GLASS

JEN037JR

Square Full Plate Wall to Glass

JEN044JR

Square Offset Plate Wall to Glass

JEN180JR ✱

Glass Mount 180° / Glass to Glass

JEN092JR ✱

Glass Mount 90° / Glass to Glass

✱ For the most up-to-date product availability, visit our website.

www.ggshardware.com

P13 Frameless Shower Door P163 Storefront & Entrance System P261 Stock Glass Doors
P85 Railing Hardware P223 Door Rails & Architectural Hardware P271 Glazing Supplies

01 Frameless Shower Door

Shower Hinge Accessories & Back Plates

Junior / Regular / Heavy Duty

GASKET-JRHINGE, GASKET-HINGE & GASKET-HDHINGE
Junior Shower Hinge Gaskets
1 mm Thick - Replacement Gaskets

GASKET-PIVOTHINGE ✳
Shower Pivot Hinge
1 mm Thick - Replacement Gaskets

HA01
Shower Header Adapter Block

Heavy Duty

HDHA01
HD Shower Header
Adapter Block / Wall to Glass

SCREW-HINGE
Set Screws For Shower Hinges

Regular / Heavy Duty

**SCREW-WALL
HDSCREW-WALL** ✳
Wall Mount Screws For Shower Hinges

SCRAN
Screws Anchors

5DPIN
5° Reversal Pin

Regular / Heavy Duty

**PIV5PIN
HDPIV5PIN**
5° Reversal Pin

BPJEN037 ✳
Jennifer Replacement Full Back Plate

BPJENH037 ✳
Jennifer Replacement "H" Back Plate

BPJEN074 ✳
Jennifer Replacement Short Back Plate

BPVIV037 ✳
Vivian Replacement Full Back Plate

BPVIVH037 ✳
Vivian Replacement "H" Back Plate

BPVIV074 ✳
Vivian Replacement Short Back Plate

BPVIV044 ✳
Vivian Replacement Offset Back Plate

BPBEVH037 ✳
Beverly Replacement "H" Back Plate

BPBEV074 ✳
Beverly Replacement Short Back Plate

BPCOLEH037 ✳
Colette Replacement "H" Back Plate

**"H" Notch Allows for Tighter
Wall Clearance of Glass Panel**

✳ For the most up-to-date product availability, visit our website.

www.ggshardware.com

P13 Frameless Shower Door P163 Storefront & Entrance System P261 Stock Glass Doors
P85 Railing Hardware P223 Door Rails & Architectural Hardware P271 Glazing Supplies

01 Frameless Shower Door

Shower Sweeps – Ultra Clear
3/8" (10mm) Glass

FOR 3/8" GLASS

SWPBWDR
Bottom Wipe with Drip Rail
For 3/8" Glass - 95" Length

Clear Black

SWPH
H Seal
For 3/8" Glass - 95" Length

Clear Black

SWPL
L Seal
For 3/8" Glass - 95" Length

Clear Black

SWPHS
Side/Bottom Seal
For 3/8" Glass - 95" Length

SWPY
Y Seal
For 3/8" Glass - 95" Length

Clear Black

SWPS
Slide Seal
For 3/8" Glass - 95" Length

1" Long

Clear Black

SWPB
Bulb Seal
For 3/8" Glass - 95" Length

Clear Black

SWP90 ✱
90° Side-Strike Seal
For 3/8" Glass - 95" Length

Clear Black

GAPSWPB
Bulb Side Gap Seal
For 3/8" Glass - 95" Length

Pre applied tape

SWPT
T Seal - 2 Piece Sweep
For 3/8" Glass - 95" Length

Clear Black

GAPSWPFIN
Double Fin Gap Seal
For 3/8" Glass - 95" Length

GAPSWPG2G
Clear Copolymer Strip - 180°
For 3/8" Glass - 95" Length

Pre applied tape

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

Shower Sweeps – Ultra Clear
1/2" (12mm) Glass

FOR 1/2" GLASS

SWPBWDR12
Bottom Wipe With Drip Rail
For 1/2" Glass - 95" Length

Clear   Black

SWPH12
H Seal
For 1/2" Glass - 95" Length

Clear   Black

SWPL12
L Seal
For 1/2" Glass - 95" Length

Clear   Black

SWPY12
Y Seal
For 1/2" Glass - 95" Length

Clear   Black

Pre applied tape

GAPSWPG2G12
Clear Copolymer Strip - 180°
For 1/2" Glass - 95" Length

SWPB12
Bulb Seal
For 1/2" Glass - 95" Length

Clear   Black

SWPT12
T Seal - 2 Piece Sweep
For 1/2" Glass - 95" Length
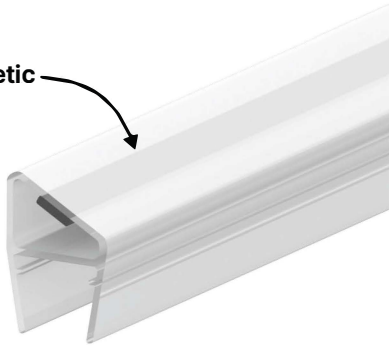
Clear   Black

SWPMWS
Weather Strip Sweep
For 1/2" Glass - 95" Length

Use Grey Goat Hi-Bond Clear Adhesive Tape

For Sweeps Installation Page Number: ____

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

01 Frameless Shower Door

Shower Sweeps – Ultra Clear
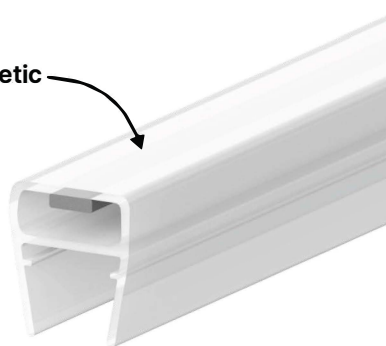# Magnetic Sweeps – 3/8" & 1/2" (10–12mm) Glass

Magnetic

Magnetic

Magnetic

SWPM10A ✳
45° Left Hand Magnetic Profile
For Glass-to-Glass Fits 3/8" to 1/2" Glass

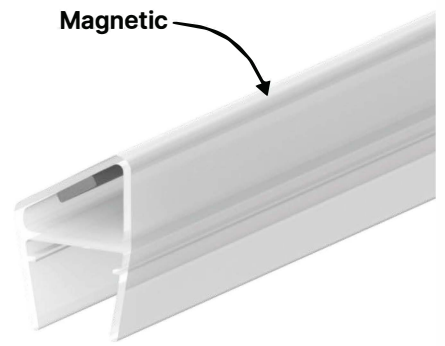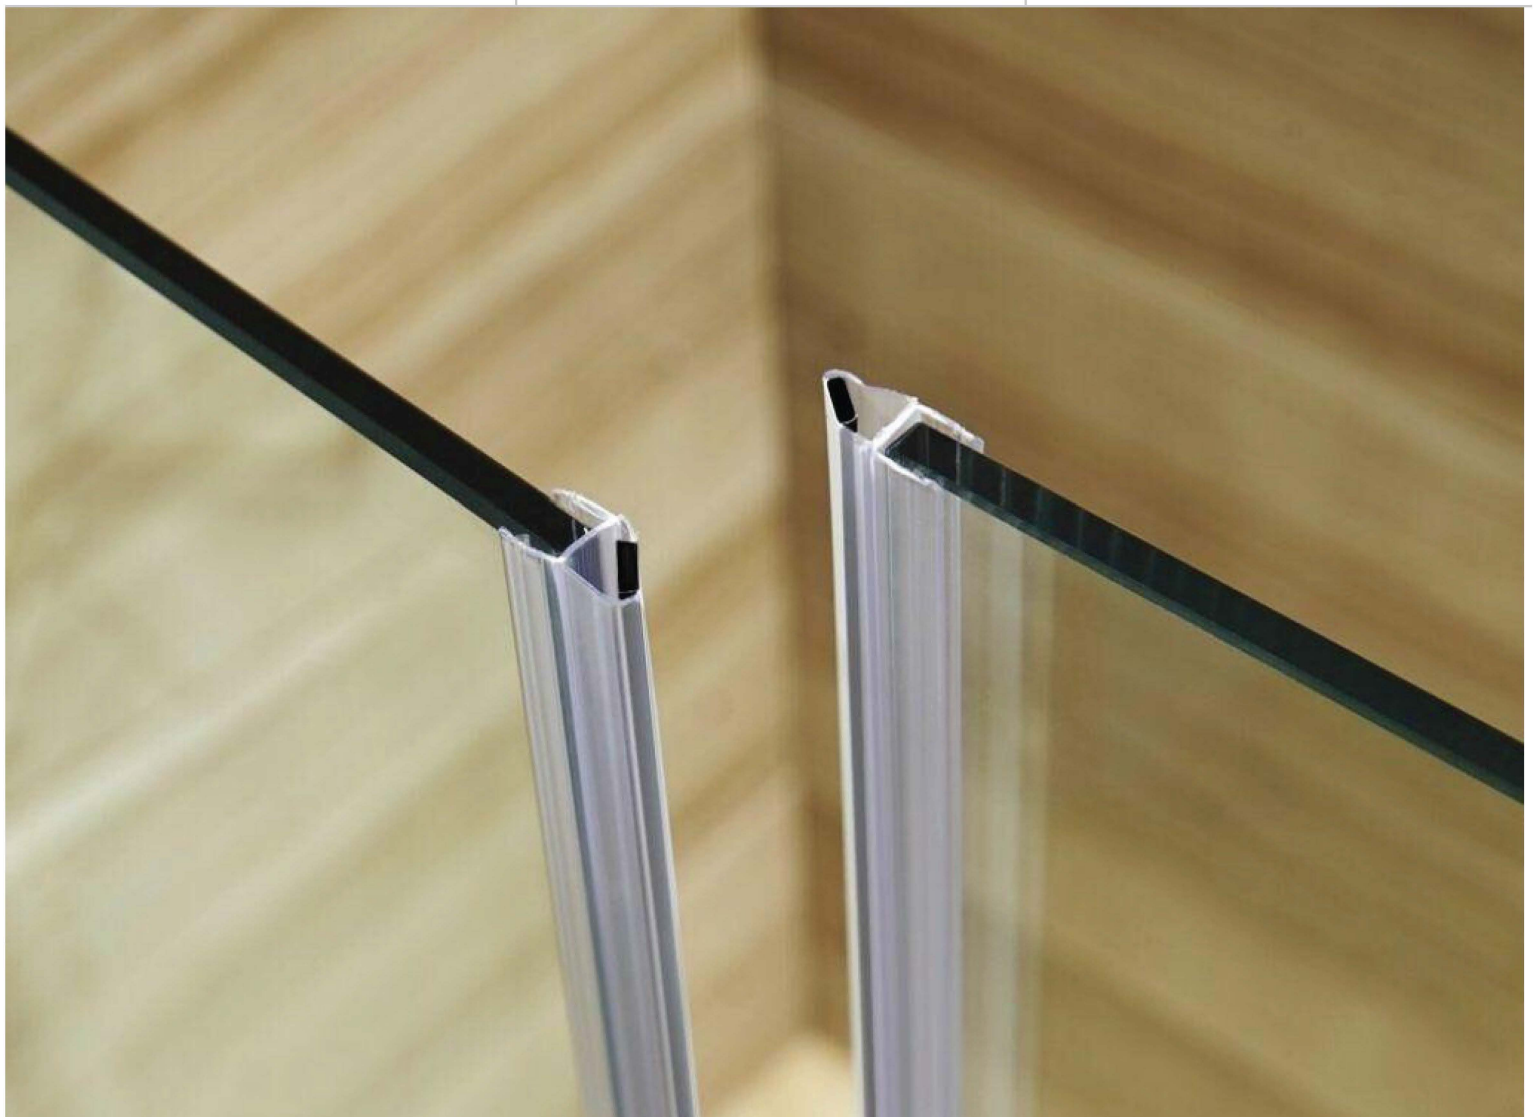**SWPM10C** ✳
90° Magnetic Profile
For Glass-to-Glass fits 3/8" to 1/2" Glass

SWPM10B ✳
45° Right Hand Magnetic Profile
For Glass-to-Glass fits 3/8" to 1/2" Glass

* For the most up-to-date product availability, visit our website.

32

www.ggshardware.com

01 FRAMELESS SHOWER DOOR

Shower Glass Clamps

*Anti slip line from Jennifer Hinges

USE ONLY MONOLITHIC TEMPERED GLASS

5 YEAR WARRANTY

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

01 Frameless Shower Door
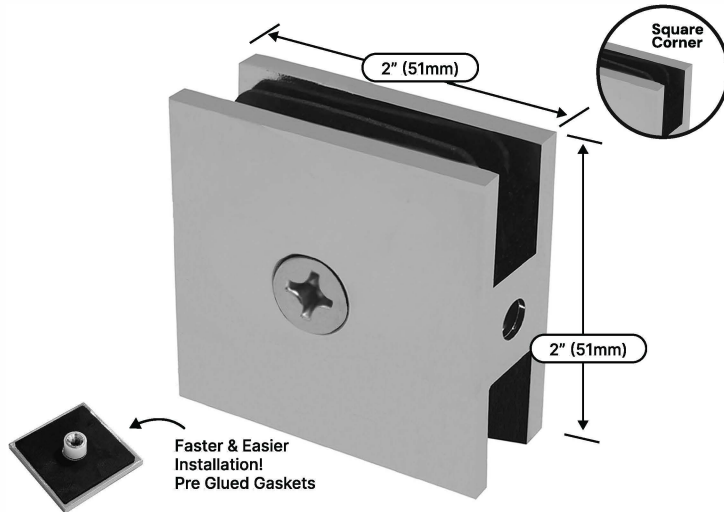
2"x2" Glass Clamps
Square Fixed Panel U-Clamp

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

FOR **3/8"** GLASS

FOR **1/2"** GLASS

Square Corner

2" (51mm)

2" (51mm)

Faster & Easier Installation!
Pre Glued Gaskets

Key Features

- **Material:** Solid brass for strength and durability
- **Glass Fit:** 3/8" to 1/2" (10–12 mm) tempered glass
- **Hole Size:** Requires 5/8" to 3/4" (16–19 mm) diameter
- **Installation:** Easy with standard tools
- **Adjustment:** Fixed (non-adjustable)
- **Warranty:** 5-year limited warranty

Finishes

- Chrome
- Brushed Nickel
- Matte Black
- Satin Brass
- Polished Nickel
- Oil Rubbed Bronze
- Gun Metal
- Brushed Bronze
- Antique Brass
- Polished Brass
- White
- Custom Finishes

Heavy Duty

SQU4
Hole-in-Glass Style
Wall Mount Clamp

SQU2H
Hole-in-Glass Style
Wall Mount Clamp - 2 Holes

SQC037
Short Offset Hole-in-Glass
Style Wall Mount Clamp

SQC039
Offset Hole-in-Glass Style
Wall Mount Clamp

SQC135
Hole-in-Glass Style
135° Glass to Glass

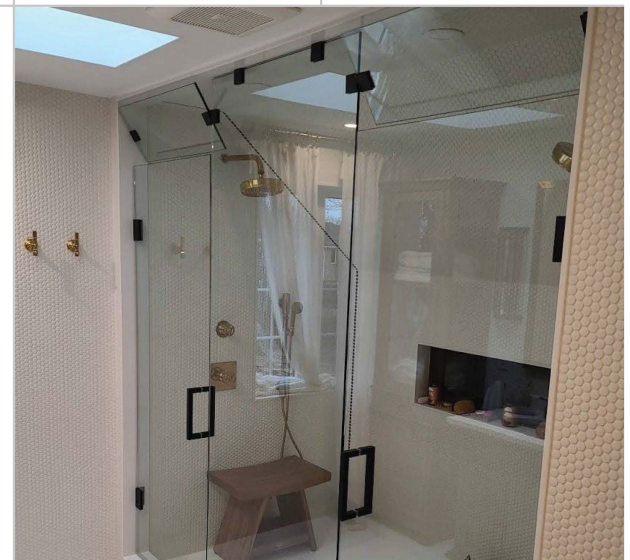**SQC90**
Hole-in-Glass Style
90° Glass to Glass

NEW

SQC225
Hole-in-Glass Style
Neo Angle 225° Glass to Glass

SQUT90 *
Hole-in-Glass Style
90° Transom Clamp

| P13 Frameless Shower Door | P163 Storefront & Entrance System | P261 Stock Glass Doors |
| P85 Railing Hardware | P223 Door Rails & Architectural Hardware | P271 Glazing Supplies |

01 Frameless Shower Door

2"x2" Glass Clamps
Beveled Fixed Panel U-Clamp

For glass fabrication details, CAD files, and the latest product information, please visit our website.
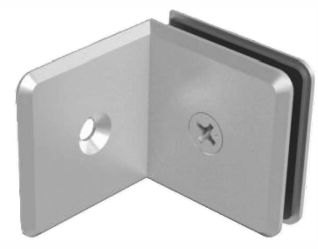Stock and finish availability may vary by product.

Round Corner

BEVU4
Beveled Hole-in-Glass Style Wall Mount Clamp

BEVU2H
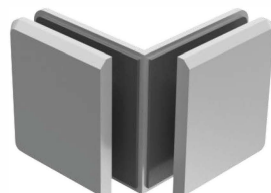Beveled Hole-in-Glass Style Wall Mount Clamp -2 Holes

BEVU037 ✳
Beveled Short Offset Hole-in-Glass Style Wall Mount Clamp

BEVU039 ✳
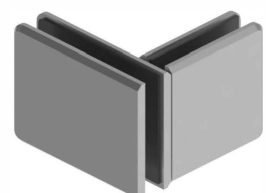Beveled Offset Hole-in-Glass Style Wall Mount Clamp

BEVU90 ✳
Beveled Hole-in-Glass Style 90° Glass to Glass

BEVU270 ✳
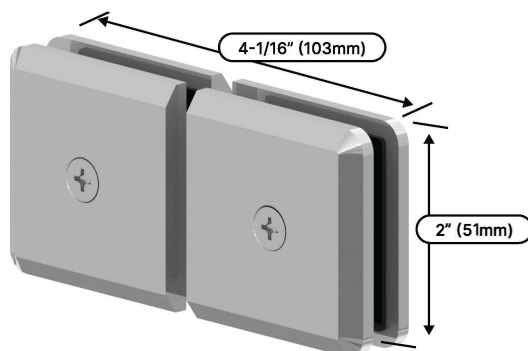Beveled Hole-in-Glass Style 90° Glass to Glass

BEVU225 ✳
Beveled Hole-in-Glass Style 135° Glass to Glass

BEVUT90 ✳
Beveled Hole-in-Glass Style 90° Transom Clamp

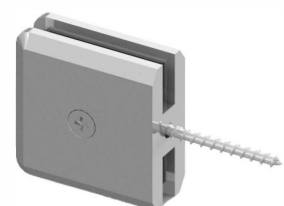# Beveled Transom Glass Clamps
Beveled Movable Panel Clamp

4-1/16" (103mm)
2" (51mm)

NEW

INSTALLER'S FAVORITE!
GOAT Drill & Spade Bits, Refer Page Number: 272

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	More Finishes Online

Key Features
- **Materials:** Constructed from durable solid brass for long-lasting performance.
- **Glass Thickness Compatibility:** Suitable for 3/8" to 1/2" (10 to 12 mm) tempered glass.
- **Design:** Allows for 180° movement, offering flexibility for various glass panel arrangements.
- **Installation:** Easy installation with standard tools.

BEVC188
Beveled 180° Movable Glass to Glass

BEVC186
Beveled 180° Movable Transom Wall to Glass

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

01 Frameless Shower Door

SQ-Transom Glass Clamps
Square Fixed Panel Clamp

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.
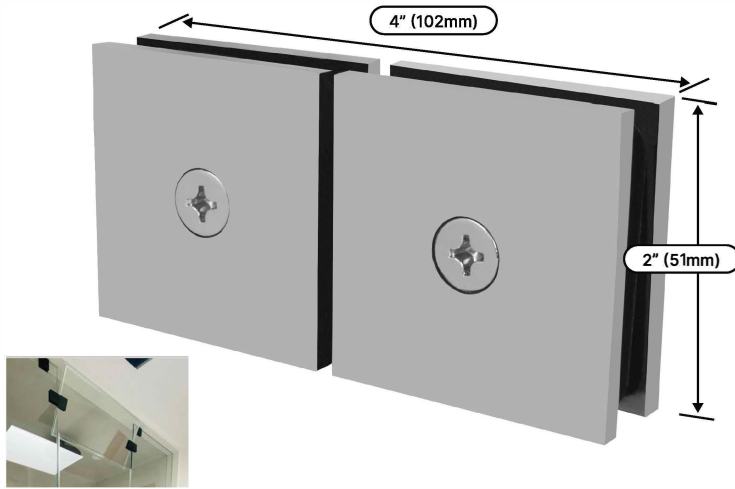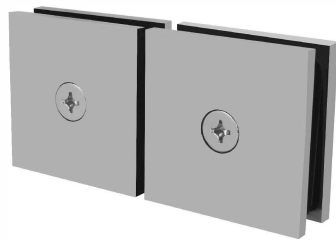
4" (102mm)

2" (51mm)

Key Features

- **Materials:** Constructed from durable solid brass for long-lasting performance.
- **Glass Thickness Compatibility:** Suitable for 3/8" to 1/2" (10 to 12 mm) tempered glass.
- **Design:** Allows for 180° movement, offering flexibility for various glass panel arrangements.
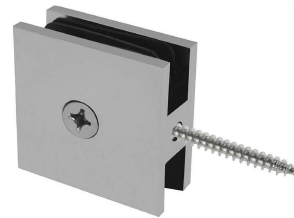- **Installation:** Easy installation with standard tools.

Finishes

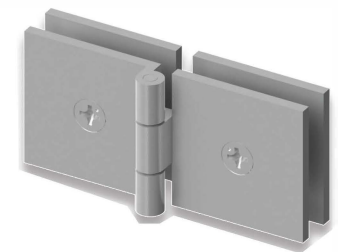|			
Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

SQC188
180° Movable Transom Glass to Glass

SQC180
180° Fixed Transom Glass to Glass

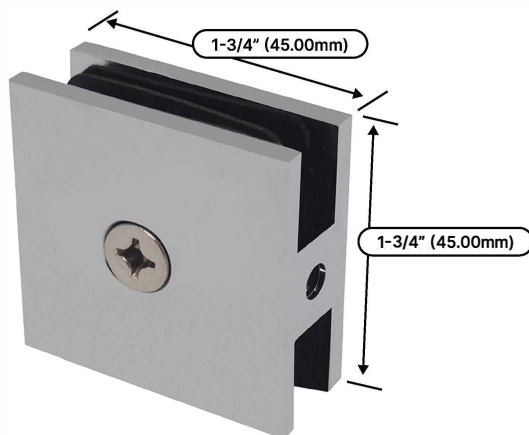**SQC186**
180° Movable Transom Wall to Glass

SQCADJ188 ✱
Square Adjustable Glass to Glass Clamp with Hinge

1.75"x1.75" Glass Clamps
Square Fixed Panel U-Clamp

- **Materials:** Made from solid brass for exceptional durability and strength.
- **Glass Thickness Compatibility:** Suitable for 5/16" to 1/2" (8 to 12 mm) tempered glass.
- **Installation:** Easy installation with standard tools.

1-3/4" (45.00mm)

1-3/4" (45.00mm)

Finishes

Chrome	Brushed Nickel	Matte Black	Satin Brass	Future Finishes Available

SQU77
Square Hole-in-Glass Style Wall Mount Clamp

RDU77
Round Corner Hole-in-Glass Style Wall Mount Clamp

* For the most up-to-date product availability, visit our website.
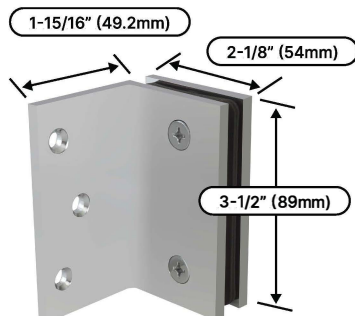
36

www.ggshardware.com

Wall & Glass Mount Bracket

- **Materials:** Made from solid brass for superior durability and strength.
- **Glass Thickness Compatibility:** Suitable for 5/16" to 1/2" (8 to 12 mm) tempered glass.
- **Design:** Available in Square & Beveled shape for a clean, modern look.
- **Installation:** Easy installation with standard tools

Chrome	Satin Brass	Polished Nickel	Gun Metal	Polished Brass	White	
Brushed Nickel	Matte Black	Oil Rubbed Bronze	Brushed Bronze	Antique Brass	More Finishes Online	

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

WMB90
Square Wall Mount Bracket - 90°

1-15/16" (49.2mm)
2-1/8" (54mm)
3-1/2" (89mm)

NEW

BEVWMB90
Beveled Wall Mount Bracket - 90°

BEVGMB90 ✳
Beveled Glass Mount Bracket - 90°

GMB90 ✳
Square Glass Mount Bracket - 90°

Sleeve Over Glass Clamps
Fixed & Adjustable

- **Material:** Solid brass for durability and corrosion resistance.
- **Glass Compatibility:** Fits 3/8"–1/2" (10–12mm) tempered glass.
- **Design:** Square, sleek design that complements modern shower enclosures.
- **Installation:** Easy to install with standard tools.

Chrome	Satin Brass	Polished Nickel	Gun Metal	Polished Brass	White	
Brushed Nickel	Matte Black	Oil Rubbed Bronze	Brushed Bronze	Antique Brass	Custom Finishes	

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

SLOV092
Sleeve Over Glass Clamp
90° Fixed - Square

SLOV345
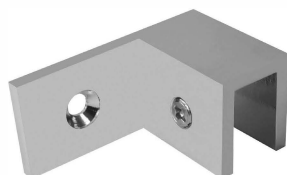Sleeve Over Glass Clamp
90° Adjustable - Square

SLOV045
Sleeve Over Glass Clamp
135° Fixed - Square

SLOVT ✳
Sleeve Over Glass Clamp
90° "T" Glass Clamp

SLOV044R
Sleeve Over Glass Clamp
Wall to Glass 90° - Offset Right

SLOV044L
Sleeve Over Glass Clamp
Wall to Glass 90° - Offset Left

✳ For the most up-to-date product availability, visit our website.

37

www.ggshardware.com

* For the most up-to-date product availability, visit our website.

38

www.ggshardware.com

01 FRAMELESS SHOWER DOOR

Handles & Towel Bars

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

01 Frameless Shower Door

6"x6" Shower Handles

Tubular / Square / Mitered / Ladder Pull

FOR **1/4"** GLASS   FOR **3/8"** GLASS   FOR **1/2"** GLASS

3/4" (19mm)

6" (152mm)

2-3/8" (60mm)

Key Features

- **Material:** Brass and Plated with anti corrosion
- **Glass Thickness:** 1/4" and 1/2" (6 to 12 mm)
- **Fabrication Required:** 2 X (Hole Size 1/2" (12 mm))
- **Installation:** Allen Key Provided in Box
- **Threading:** M6 X 1.0
- **Warranty:** 5 years

1" Decorative Metal washer

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

R6X6
Tubular Handle
Back to Back

S6X6
Square Handle
Back to Back
← Metal & Vinyl Gaskets Included

M6X6
Mitered Handle
Back to Back

L6X6
Ladder Pull Handle
Back to Back

LSQ6X6
Square Ladder Pull Handle
Back to Back

RNW6X6
Tubular Handle / No Washers
Back to Back

SSP6
Round Pull Handle
Single Sided

INSTALLER'S FAVORITE!
GOAT Drill & Spade Bits,
Refer Page Number: 272

Use Only Monolithic Tempered Glass

8"x8" Shower Handles

Tubular / Square / Mitered / Ladder Pull

FOR **1/4"** GLASS   FOR **3/8"** GLASS   FOR **1/2"** GLASS

3/4" (19mm)

8" (203mm)

2-3/8" (60mm)

Key Features

- **Material:** Brass and Plated with anti corrosion
- **Glass Thickness:** 1/4" and 1/2" (6 to 12 mm)
- **Fabrication Required:** 2 X (Hole Size 1/2" (12 mm))
- **Installation:** Allen Key Provided in Box
- **Threading:** M6 X 1.0
- **Warranty:** 5 years

1" Decorative Metal washer

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

R8X8
Tubular Handle
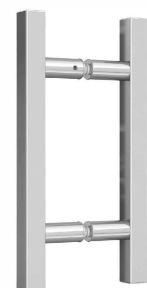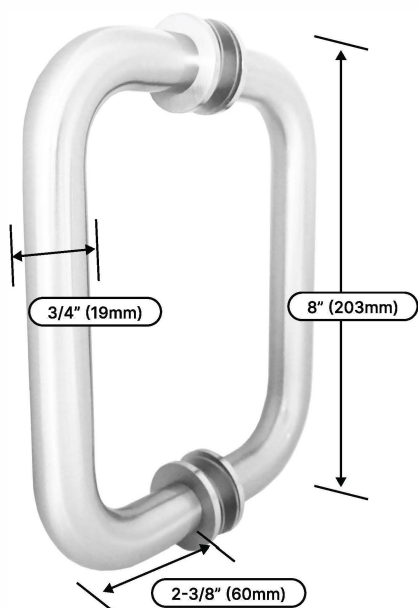Back to Back

S8X8
Square Handle
Back to Back

↖ Metal & Vinyl Gaskets Included

M8X8
Mitered Handle
Back to Back

L8X8
Ladder Pull Handle
Back to Back

LSQ8X8
Square Ladder Pull Handle
Back to Back
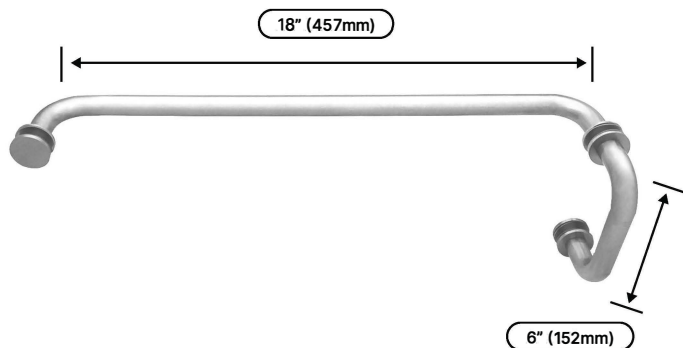
RNW8X8
Tubular Handle / No Washers
Back to Back

SSP8
Round Pull Handle
Single Sided

1" Decorative Metal Washer

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

01 Frameless Shower Door

6"x18" & 8"x18" Shower Handle Towel Bar Combo
Tubular / Square / Mitered

18" (457mm)

6" (152mm)

USE ONLY MONOLITHIC TEMPERED GLASS

FOR 1/4" GLASS

FOR 3/8" GLASS

FOR 1/2" GLASS

Key Features

- **Material:** High-quality 1.5mm thick tubular brass construction for durability and corrosion resistance.
- **Dual Functionality:** 6" handle with 18" towel bar for added use.
- **Glass Compatibility:** Fits 6–12 mm (1/4"–1/2") glass panels.
- **Protective Design:** Plastic washers prevent metal-to-glass contact.

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

R6X18
R8X18

Tubular Handle / Towel Bar Combo Back to Back

S6X18
S8X18

Metal & Vinyl Gaskets Included

Square Handle / Towel Bar Combo Back to Back
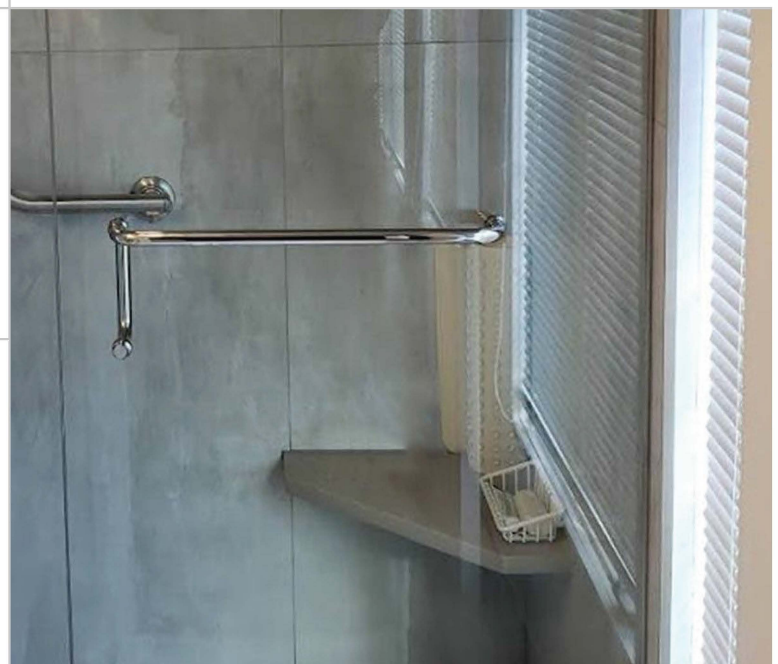
M6X18
M8X18

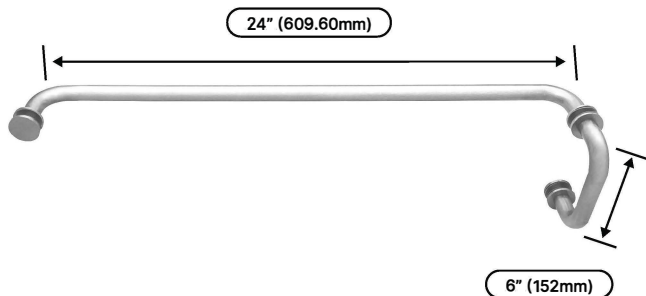Mitered Handle / Towel Bar Combo Back to Back

No Washer **NEW**

RNW6X18
RNW8X18

Tubular Handle / No washer Towel Bar Combo Back to Back

6"x24" Shower Handle Towel Bar Combo

Tubular / Square / Mitered

24" (609.60mm)

6" (152mm)

USE ONLY MONOLITHIC TEMPERED GLASS

FOR 1/4" GLASS

FOR 3/8" GLASS

FOR 1/2" GLASS

Key Features

- **Material:** 1.5mm thick tubular brass for durability and corrosion resistance.
- **Dual Functionality:** 6" handle with 24" towel bar for added use.
- **Glass Compatibility:** Fits 6–12 mm (1/4"–1/2") glass panels.
- **Protective Design:** Plastic washers prevent metal-to-glass contact.

Finishes

- Chrome
- Matte Black
- Polished Nickel
- Gun Metal
- Custom Finishes
- Brushed Nickel
- Satin Brass
- Brushed Bronze
- Oil Rubbed Bronze

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

R6X24
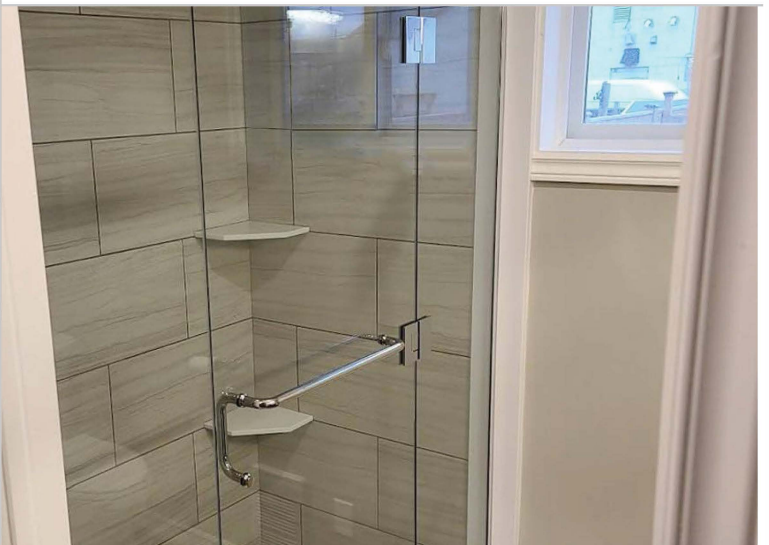
Tubular Handle / Towel Bar Combo Back to Back

S6X24

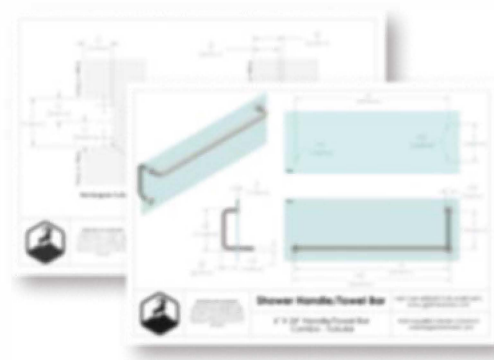Square Handle / Towel Bar Combo Back to Back

M6X24 ✳✳
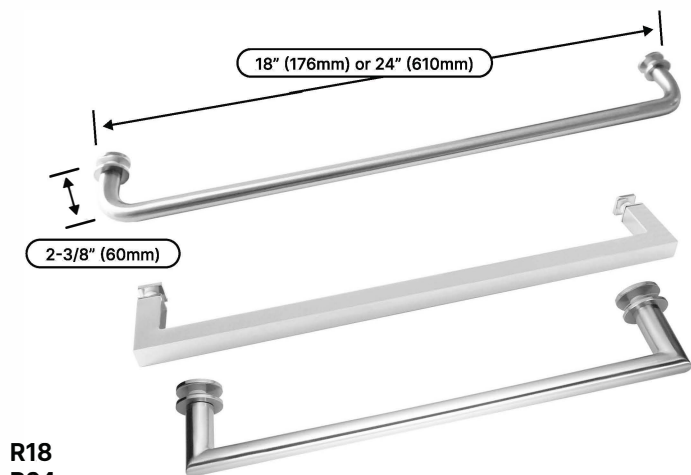
Mitered Handle / Towel Bar Combo Back to Back

Note: Visit ggshardware.com For Glass Fabrication & Product Information.

Single Sided Towel Bars
Tubular / Square / Mitered

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

18" (176mm) or 24" (610mm)

2-3/8" (60mm)

R18
R24
Tubular Single Sided Towel Bar 18" or 24"

Key Features

- **Material:** Made from 3/4" (19 mm) diameter heavy brass tubing with a 1.5 mm thickness for enhanced durability.
- **Glass Compatibility:** Designed to fit glass thicknesses ranging from 1/4" to 1/2" (6 to 12 mm).
- **Hole Diameter Required:** Requires 2x (1/2" (12 mm)⌀ hole) for installation.
- **Protective Design:** Includes 1-1/4" (32 mm) diameter metal washers and plastic washers to protect against glass-to-metal contact.

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

Product	SKU
Tubular Single Sided Towel Bar 18" With No Washers	RNW18 / RNW30*
Square Single Sided Towel Bar 18"	S18
Mitered Single Sided Towel Bar 18"	M18
Square Single Sided Towel Bar 24"	S24
Mitered Single Sided Towel Bar 24"	M24
Tubular Single Sided Towel Bar 24"	R24 / R30*

12"x12" Shower Handles

Round / Square / Mitered

For glass fabrication details, CAD files, and the latest product information, please visit our website.
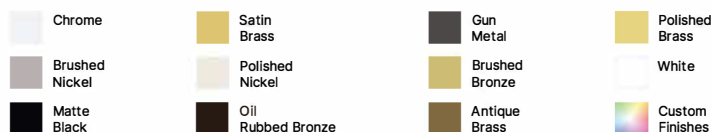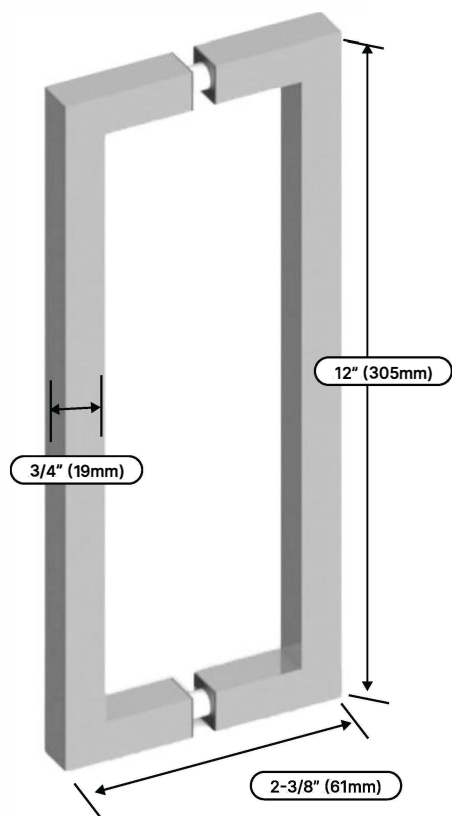Stock and finish availability may vary by product.

12" (305mm)

3/4" (19mm)

2-3/8" (61mm)

R12X12

Tubular Handle Back to Back

BEST SELLER

S12X12

Square Handle Back to Back

Key Features

- **Materials:** High-quality brass construction for strength and corrosion resistance.
- **Design:** Tubular design with a decorative metal washer for a sleek and modern look.
- **Glass Compatibility:** Designed for 1/4" to 1/2" (6 to 12 mm) glass thickness.
- **Protection:** Includes plastic washers to prevent metal-to-glass contact, enhancing durability.

Finishes

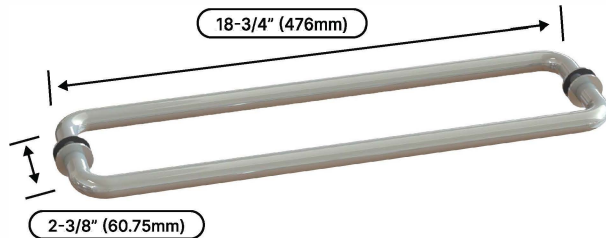|			
Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

Grey Goat Color Sample Tower
Available at ggshardware.com

18" X 18" Shower Towel Bars
Tubular / Square / Mitered / No Washer

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Chrome	Brushed Nickel	Matte Black	Satin Brass	Polished Nickel	Oil Rubbed Bronze	Gun Metal	Brushed Bronze	Antique Brass	Polished Brass	White	Custom Finishes

18-3/4" (476mm)

2-3/8" (60.75mm)

- **Construction:** 3/4" (19 mm) diameter brass tubing (1.5 mm thick) for maximum strength
- **Design:** Back-to-back towel bar, ideal for both residential and commercial use
- **Glass Compatibility:** Fits glass thicknesses from 1/4" to 1/2" (6 to 12 mm)
- **Hole Diameter:** Requires a 2x (1/2" (12 mm)) hole diameter for installation
- **Protection:** Includes metal washers and plastic washers to protect against glass-to-metal contact

R18X18

Tubular Towel Bar Combo Back to Back

S18X18

Square Towel Bar Back to Back

M18X18

Mitered Towel Bar Combo Back to Back

NEW

RNW18X18

Tubular Towel Bar With No Washers Back to Back

24" x 24" Shower Towel Bar
Tubular / Square / Mitered / No Washer

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

24-3/4" (629mm)

2-3/8" (60.75mm)

- **Construction:** 3/4" (19 mm) diameter brass tubing (1.5 mm thick) for maximum strength
- **Design:** Back-to-back towel bar, ideal for both residential and commercial use
- **Glass Compatibility:** Fits glass thicknesses from 1/4" to 1/2" (6 to 12 mm)
- **Hole Diameter:** Requires a 2x (1/2" (12 mm)) hole diameter for installation
- **Protection:** Includes metal washers and plastic washers to protect against glass-to-metal contact
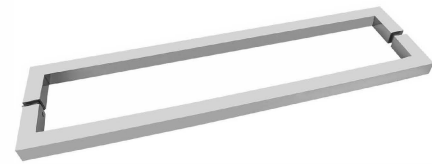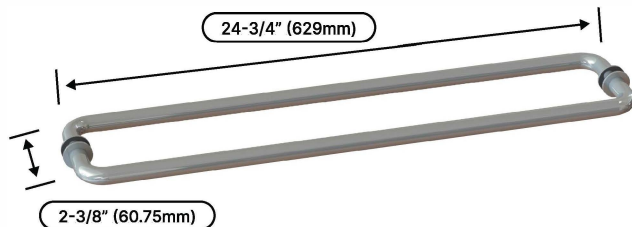
BEST SELLER

R24X24

Tubular Towel Bar With Washers - Back to Back

S24X24   Square Towel Bar - Back to Back

M24X24   Mitered Towel Bar - Back to Back

Sauna Handle

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

FEATURE PRODUCTS

Key Features

- **Heat and Moisture Resistant:** Constructed from materials designed to thrive in sauna conditions.
- **Grip:** Ergonomic design for a secure, comfortable hold.
- **Sleek Design:** Perfectly suited for modern and traditional sauna aesthetics.
- **Hustle Free Installation:** Includes all necessary mounting hardware for easy installation.

Finishes

Satin Wood

Don't Burn Your Hand! Use Grey Goat Sauna Handles.

SAUN19LP12

Sauna Handle 12" - Square Ladder Pull Style

SAUN25LP12

Sauna Handle 12" Tubular Ladder Pull Handle

SAUN33R17

Sauna Handle 17" Tubular Ladder Pull Handle

SAUN30S19

Sauna Handle 19" Square Handle

SAUN19LP24

Sauna Handle 24" Square Ladder Pull Handle

SAUN25LP24

Sauna Handle 24" Tubular Ladder Pull Handle

SAUN38S31

Sauna Handle 31" Square Handle

SAUN39R31

Sauna Handle 31" Tubular Ladder Pull Handle

SAUN39R47

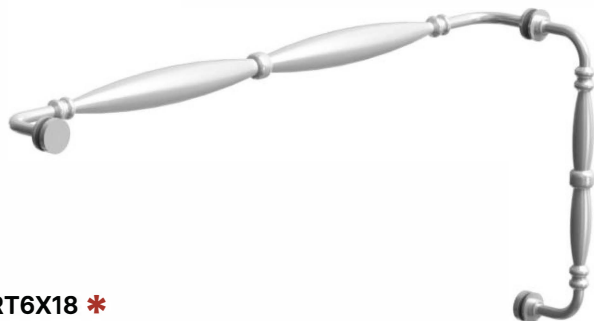Sauna Handle 47" Tubular Ladder Pull Handle

Tartarian & Atlantis Series – Towel Bar

Please note that these handles are not currently in stock.
For real-time inventory updates and availability, please refer to our website ggshardware.com.
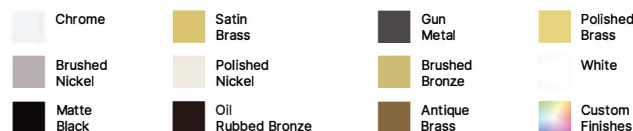
Check our website

TART6X18 ✳
TART6X24 ✳
TART8X18 ✳
TART8X24 ✳

Tubular Handle Back to Back

Product Overview

- Decorative Design
- Available 6" or 8" Pull Handles, with 18" or 24" Towel Bars
- For Use with 1/4" to 1/2" Tempered Glass
- Requires Three 1/2" Diameter Holes for Installation
- Includes Decorative Metal Washers
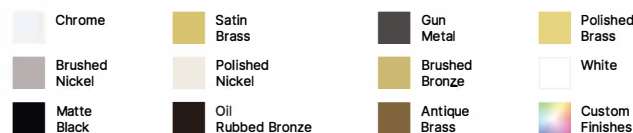- Solid Brass Material, with High Quality Plating

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

Check our website

ATLA6X18 ✳
ATLA6X24 ✳
ATLA8X18 ✳
### ATLA8X24 ✳

Square Handle Back to Back

Product Overview

- Heavy Duty 3/4" Diameter Tubular Construction
- For Use with 1/2" to 1/2" Tempered Glass
- Requires Three 1/2" Diameter Holes for Installation
- Available in Seven Popular Finishes
- No Metal Washers for a Seamless Look
- M6-1.0 Thread

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

USE ONLY MONOLITHIC TEMPERED GLASS

Tartarian Series

Please note that these handles are not currently in stock.
For real-time inventory updates and availability, please refer to our website ggshardware.com.

Product Overview

- Designed for 1/4" to 1/2" (6 mm to 12 mm) Tempered Glass
- Includes Decorative Metal Washers
- Available in Seven Popular Finishes
- Requires Two 1/2" Diameter Holes for Installation

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

TART8X8 ✳✳
Ornate Back to Back
Pull Handles

Atlantis Series – Handle

Please note that these handles are not currently in stock.
For real-time inventory updates and availability, please refer to our website ggshardware.com.
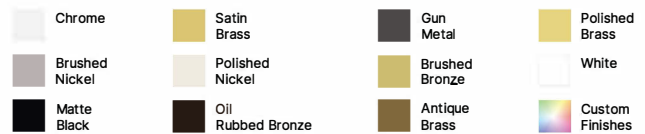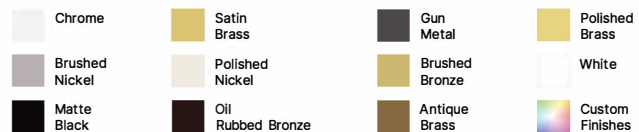
Product Overview

- Unique Arched Design Adds Flair to Frameless Shower
- Designed for use with 1/4"- 1/2" (6 mm to 12 mm) Tempered Glass
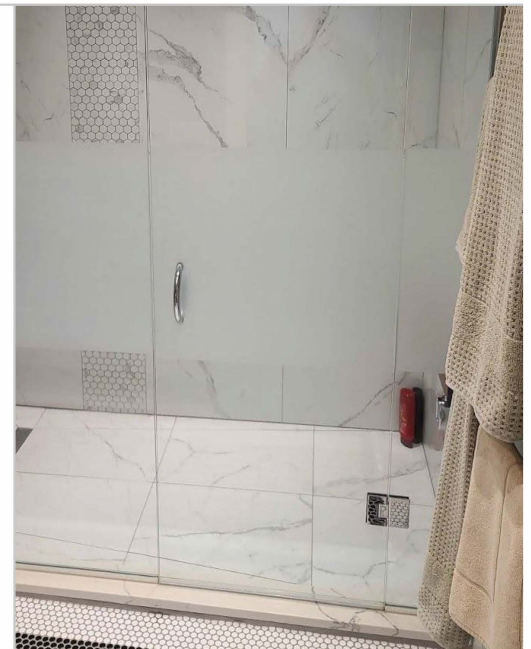- 2x (1/2" Diameter Holes) required ; 6" or 8" CTC

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

ATLA6X6 ✳✳
Tubular Style
Back to Back Pull Handle

ATLA8X8 ✳✳
Tubular Style
Back to Back Pull Handle

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

01 Frameless Shower Door
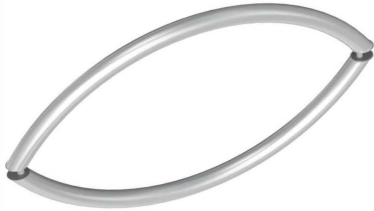
Tartarian Series – Towel Bar

Atlantis Series – Towel Bar

Please note that these handles are not currently in stock.
For real-time inventory updates and availability, please refer to our website ggshardware.com.
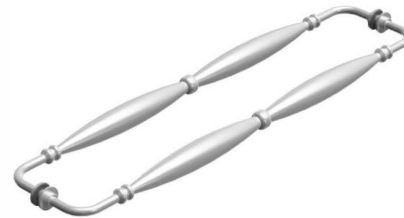
- Sleek, Washer-Free Design for a Clean, Minimalist Look
- Durable 3/4" (19 mm) Diameter Tubular Brass – 1.5 mil Wall Thickness
- Available in Several Popular Finishes – Custom Finishes Upon Request
- Offered in Two Standard Sizes

| Chrome | Satin Brass | Matte Black | Gun Metal | Antique Brass | White |
| Brushed Nickel | Polished Nickel | Oil Rubbed Bronze | Brushed Bronze | Polished Brass | Custom Finishes |

TART18X18 / TART24X24 ✳
Tubular Handle Back to Back

ATLA18X18 / ATLA24X24 ✳
Tubular Handle Back to Back

Single Sided Towel Bars

Please note that these handles are not currently in stock.
For real-time inventory updates and availability, please refer to our website ggshardware.com.

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

- **Construction:** Made from 3/4" (19 mm) diameter heavy brass tubing with a 1.5 mm thickness for enhanced durability.
- **Glass Compatibility:** Designed to fit glass thicknesses ranging from 1/4" to 1/2" (6 to 12 mm).
- **Hole Diameter Required:** Requires a 1/2" (12 mm) hole for installation.

SLIM24 ✳✳
Single-Sided Slim Style Towel Bar

TART24 ✳✳
Single-Sided Tartarian Style Towel Bars

ATLA24 ✳✳
Single-Sided Atlantis Style Towel Bars

SSLP18 & SSLP24 ✳✳
Single-Sided Ladder Pull Style Towel Bars

Stylish Series Handles

Please note that these handles are not currently in stock.
For real-time inventory updates and availability, please refer to our website ggshardware.com.

- **Materials:** High-quality brass construction for strength and corrosion resistance.
- **Design:** Tubular design with a 1" rounded decorative metal washer for a sleek and modern look.
- **Glass Compatibility:** Designed for 1/4" to 1/2" (6 to 12 mm) glass thickness.
- **Protection:** Includes plastic washers to prevent metal-to-glass contact, enhancing durability.

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

STY6X6 ✳
Stylish Series
Back to Back Pull Handles

STY8X8 ✳
Stylish Series
Back to Back Offset Pull Handles

STYOS6X6 ✳
Ladder Pull Handle
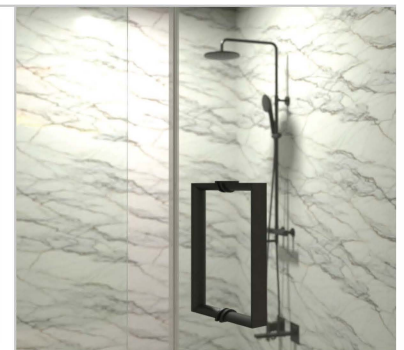Back to Back

STYOS8X8 ✳
Ladder Pull Handle
Back to Back

Slim Series Handles

Please note that these handles are not currently in stock.
For real-time inventory updates and availability, please refer to our website ggshardware.com.

SLIM6X6 ✳
SLIM8X8 ✳
Pull Handle
Back to Back

D–Miter Series Handles

Please note that these handles are not currently in stock.
For real-time inventory updates and availability, please refer to our website ggshardware.com.

DMIT6X6 ✳
DMIT8X8 ✳
Flat Round Mitered Series
Back to Back Pull Handles

Champion Series

Please note that these handles are not currently in stock.
For real-time inventory updates and availability, please refer to our website ggshardware.com.

CHAM6X6 ✳
Tubular Handle Back to Back

CHAM8X8 ✳
Tubular Handle Back to Back

Key Features

- Design Enhances the Elegance of Any Shower
- 1-1/2" Decorative Rosettes Provide Additional Detail
- 6" or 8" CTC Hole Spacing (2) 1/2" Diameter Holes in Glass
- Heavy Duty 3/4" Diameter Tubular Construction
- Popular Finishes Available
- Custom Finishes Also Available

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

Shower Door Knobs & Combo & Robe Hooks

Chrome	Brushed Nickel	Satin Brass	Gun Metal	Polished Brass	White
Matte Black	Brushed Bronze	Polished Nickel	Oil Rubbed Bronze	Antique Brass	Custom Finishes

- **Material:** Solid Brass for superior strength and corrosion resistance
- **Glass Thickness Range:** Fits 1/4" - 1/2" (6mm - 12mm) glass for versatile applications
- **Height:** 1" overall height for a sleek, minimalist design

BEST SELLER

DK100
100 Style Back to Back Knob

NEW

DK106
106 Style Back to Back Knob

DK140
140 Style Back to Back Knob

DKSQ
SQ Style Back to Back Knob

DK160
160 Style Back to Back Knob

DK180
180 Style Back to Back Knob

DKSQ2
SQ2 Style Back to Back Knob

DK118 ✳
Back-to-Back
RoundShower Knobs

DK053 ✳
Back-to-Back
Fluted Shower Knobs

DK046 ✳
Back-to-Back
Funnel Shower knobs

DK109 ✳
Back-to-Back
Bongo Shower Knobs

NEW

R18KNOB
Door Knob with 18" Towel Bar Combo / Towel Bar Combo
Back to Back

R18DK100 / R24DK100 ✳
Shower Towel Bar With DK100 Knob

GRH01
Shower Robe Hooks
Round Trunk Style

RHRD
Shower Robe Hooks
Round Style

RH7SQ ✳
Shower Robe Hooks
Square Style

RH6SO ✳
Shower Robe Hooks
Sleeve Over Style

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

01 Frameless Shower Door

Handle Accessories

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

Finishes

- Chrome
- Matte Black
- Brushed Nickel
- Satin Brass
- Polished Nickel
- Brushed Bronze
- Gun Metal
- Oil Rubbed Bronze
- Antique Brass
- Polished Brass
- White
- Custom Finishes

Key Features

- **Complete Kit:** Includes washer and stud for secure handle mounting
- **Application:** Perfect for replacements or upgrades on frameless shower doors

---

RSPACCLR ✱

Spacer For Shower Handles & Towel Bar

RGAS1CLR

Gasket For Shower Handles & Towel Bar

1-1/4" Dia · Commercial

LPHS

Cap For Single Sided Handles

1-1/4" Ø · Shower

RLMHS

Cap With Washer For Single Sided Handles

THM6X1 ✱

1-9/16" Long Threaded Connecting Rod

1-1/4" Ø · Shower

RWRH

Round Washer/Stud Kit - 1-1/4" Diameter

1"x1" · Commercial

SWSLLP

Square Washer/Stud Kit - 1"X1"

1"x1" / Upto 2" · Commercial

2SWSLLP

Square Washer/Stud Kit - Upto 2" Thick Door

1"x1" · Commercial

SLPSLHS

Washer Kit - Square Leg

13/16" x 13/16" · Shower

SWSH

Square Washer/Stud Kit

13/16" x 13/16" · Commercial

SHS

Washer Kit

1-1/4" Ø · Commercial

2RWRLLP

Round Washer/Stud Kit - Upto 2" Thick Door

1-1/4" Ø · Commercial

RWRLLP

Round Washer/Stud Kit - 1-1/4" Diameter

1-1/4" Ø · Commercial

LPHS

Washer Kit for Round and Mitered Shower Ladder Pull Series

1-1/4" Ø · Shower

RLMHS

Washer Kit for Round and Mitered Shower Ladder Pull Series

---

* For the most up-to-date product availability, visit our website.

53

www.ggshardware.com

Shower U Channels

Shower U-Channel	**55**
Shower End Cap & Threshold	**55**

6mm to 12mm / 98"

3/4" (19mm)

1/16" (2mm)

UC9810
98" Long Shower U Channel
For 6 to 12mm Glass

10.5mm Gap For 3/8" (10mm)

14.5mm Gap For 1/2" (12mm)

6mm to 12mm / 144"

UC14412
144" Long Shower U Channel
For 6 to 12mm Glass

U Channel Length	Glass Thickness	SKU
98"	6mm	UC986
	10mm	UC9810
	12mm	UC9812
144"	6mm	UC1446
	10mm	UC14410
	10mm - 1"	UCH14410
	12mm	UC14412
	12mm - 1"	UCH14412

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

01 Frameless Shower Door

Shower U-Channel

Finishes

Chrome
Brushed Nickel
Matte Black
Satin Brass
Polished Nickel
Oil Rubbed Bronze
Gun Metal
Brushed Bronze
Antique Brass
Polished Brass
White
Custom Finishes

Product Overview

- **Glass Compatibility:** Exclusively designed for 6mm, 10mm or 12mm (1/4", 3/8" or 1/2") glass panels.
- **Depth:** 3/4" to 1" depth enhances glass visibility and creates a clean, low-profile look.
- **Length:** Stocked in convenient 98" or 144" lengths, ideal for a variety of installations.
- **Durability:** Manufactured with corrosion-resistant materials, ensuring longevity and performance.
- **Versatile Installation:** Can be mounted on floors, walls, or ceilings, adapting to your design needs.
- **Ease of Use:** Designed for quick and straightforward installation, making it ideal for residential projects.

6mm / 98" or 144"

1/16"(1.6mm)
5/16"(8.0mm)
3/8"(9.6mm)

UC986
UC1446
98" / 144" Long Shower U-Channel
For 6mm Glass

10mm or 12mm / 144"

1" (25.40mm)
1/32" (1.19mm)
1/2"(13.28mm)

UCH14410
1" Height Shower U-Channel
For 10 - 12mm Glass

Shower End Cap & Threshold

Finishes

Chrome
Matte Black
Brushed Nickel
Satin Brass
Custom Finishes

Product Overview

- **Glass Compatibility:** Suitable for 3/8" (10mm) & 1/2" (12mm) glass
- **Material:** Constructed from 6063-T5 Aluminum Alloy for strength and longevity
- **Easy Fit:** Simple and efficient to install for a quality finish

UCEND10 / UCEND12
End Cap For 10mm / 12mm Glass

Clear Plastic
Aluminum

TH98 / TH98CLR
Half Moon Anodized Aluminum & Clear Thresholds

* For the most up-to-date product availability, visit our website.

55

www.ggshardware.com

Mirror L & J Channels

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

01 Frameless Shower Door

Mirror L & J Channels

Finishes

Chrome
Brushed Nickel
Matte Black
Satin Brass
Polished Nickel
Brushed Bronze
Gun Metal
Oil Rubbed Bronze

Product Overview

- Mirror Channels are designed for precision, durability, and a sleek finish.
- Deep Nosed J-Molding is usually used for top mirror installation
- 12FT (144") Length
- 40 Per Case

BEST SELLER

1-3/16" (30mm)
5/8" (16mm)
3/8" (10mm)

JCD144
5/8" Mirror J-Molding
Deep Nose Profile 144" Length

7/8" (22mm)
3/8" (10mm)
3/8" (10mm)

JCS144
3/8" Mirror J-Molding
Standard Profile 144" Length

5/8"(16mm)
1/4"(7mm)

LC1/4-144
1/4" Mirror L-Molding
Deep Nose Profile 144" Length

1/4" (7mm)
1-1/4" (31mm)

DIV144
Aluminum Divider Bar
144" Length

1/2" (12mm)
1/2" (12mm)

LC1/2-144
1/2" Mirror L-Channel
144" Length

3/4" (19mm)
3/4" (19mm)

LC3/4-144
3/4" Mirror L-Channel
144" Length

1" (25mm)
1" (25mm)

LC1-144
1" Mirror L-Channel
144" Length

Shower Van Mirror Clip Sets

5mm / 6mm

NEW

1-1/4" (31.8mm)
2" (50.8mm)

Product Overview

The GGH VAN Clips are a reliable and durable solution for mounting 5mm mirrors with ease and precision. Finished with a zinc plating, these clips offer superior corrosion resistance, ensuring longevity in both residential and commercial settings. The slotted design enables smooth vertical adjustments, making installation quick and hassle-free.

VMC5Z (4X Pack)
VMC6Z (4X Pack)
VAN-MIRROR Clips - 5mm or 6mm
Product Type: Zinc Plated

FEATURE PRODUCTS

* For the most up-to-date product availability, visit our website.

57

www.ggshardware.com

P13 Frameless Shower Door **P163** Storefront & Entrance System **P261** Stock Glass Doors
P85 Railing Hardware **P223** Door Rails & Architectural Hardware **P271** Glazing Supplies

02 Railing Hardware

LED Mirrors

Overview

Voltage: 120 – 277V AC
Lumens: 3300 LM
Wattage Specs: 29W @ 120V AC
Certifications: UL Listed
Grey Goat Hardware - Outer Etched LED Mirror

Specification

Elevate your interior with Grey Goat's premium Outer Etched LED Mirror—engineered for high performance, ambient lighting, and visual appeal. Designed with outer-etched side lighting, this mirror delivers consistent brightness and reduced shadowing across its crystal-clear rectangular surface. The soft halo illumination creates a relaxing and elegant atmosphere, making it ideal for use in bathrooms, hotel lobbies, salons, residential vanities, and upscale commercial spaces.

Key Features

Outer-edge etched LED light for uniform illumination Sleek, modern frame adds style and depth to any room
Energy-efficient and built for long-term use. Easy installation for both residential and commercial applications

LEDM2BSF- Two Bar With Shelf ✱

LEDMOER - Outer Etched - Rectangular ✱

LEDM2B - Two Bar ✱

LEDMIER - Inner Etched ✱

LEDMOES - Outer Etched - Square ✱

LEDMNE - Backlit - No Etch ✱

Shower Header Kits

Shower Header Kit

FOR 3/8" GLASS   FOR 1/2" GLASS

Remember To Purchase GOAT 6" Shank For Easy Header Installation! Page: 272

## Key Features

- **Glass Compatibility:** Suitable for 3/8", and 1/2" (10, and 12 mm) glass.
- **Material:** Constructed from 6063-T5 aluminum alloy for superior strength and durability.
- **Design:** Features a 1-1/4" (32 mm) face for an enhanced, more visible sightline.

Included Components

- 1×66", 98" or 144" Piece of Aluminum Header Extrusion
- 1×36" (914mm) Piece of Aluminum Snap-In Filler for Door Pocket
- 2x Brass Wall Mounting Brackets
- 1x Clear Vinyl Gasket

Header Length	SKU NO.
66"	HK66
98"	HK98
144"	HK144

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

HK66, HK98, HK144

Adjustable Header Kit

NEW

Adjustable Pivot Page No. 26

Key Features

- **Glass Compatibility:** Suitable for 5/16", 3/8", and 1/2" (8, 10, and 12 mm) glass.
- **Material:** Constructed from 6063-T5 aluminum alloy for superior strength and durability.
- **Design:** Features a 1-1/4" (32 mm) face for an enhanced, more visible sightline.

Included Components

- 144" pieces of aluminum header extrusion
- 36" (914 mm) piece of aluminum snap-in filler for door pocket
- One pack of two Brass Wall Mounting Brackets [HWMB]
- Clear vinyl for 5/16" (8 mm) and 3/8" (10 mm) glass

Finishes

Chrome	Satin Brass	Gun Metal	Polished Brass
Brushed Nickel	Polished Nickel	Brushed Bronze	White
Matte Black	Oil Rubbed Bronze	Antique Brass	Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

HK144ADJ

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

01 Frameless Shower Door

Header Kit Accessories

Regular Duty	Heavy Duty	48" Piece / 500' Length Roll	3FT (36 inches)

Available in all finishes

HA01
Shower Header Adapter Block

HDHA01
Shower Header Adapter Block

HGAS48 / HGAS500
Clear Vinyl Gasket

HF09
Shower Header Filler

HC90
Shower Header Corner - 90° Fixed

HC135
Shower Header Corner - 135° Fixed

HCADJ
Shower Header Corner - Adjustable

HWMB
Brass Wall Mounting Brackets

* For the most up-to-date product availability, visit our website.

61

www.ggshardware.com

Flat Bar For Grid Showers

Aluminum Flat Bars - Grid Showers   **63**

Aluminum Flat Bars – Grid Showers

Finishes

Chrome	Matte Black	Satin Anodized	Satin Brass	Gold	Custom Finishes

FB98
3/4" Flat Bar For Grid Showers - 98" Length
3/4" Wide X 1/16" Thick

BEST SELLER

FB144
3/4" Flat Bar For Grid Showers - 144" Length
3/4" Wide X 1/16" Thick

Black Foam Tape

Dimension	SKU
1/2" W - 32.8FT L - 1/4" Thick	FT1412BL
3/4" W - 32.8FT L - 1/4" Thick	FT1434BL
1/2" W - 65.6FT L - 1/8" Thick	FT1812BL
1/2" W - 131.2FT L - 1/16" Thick	FT11612BL

3M Clear Adhesive Tape

Dimension	SKU
1/2" W - 108FT L - 0.040" Thick	AHB04012
1/4" W - 108FT L - 0.040" Thick	AHB04014
1/2" W - 32FT L - 0.040" Thick	AHB04012-32
1/4" W - 32 FT L - 0.040" Thick	AHB04014-32
3/4" W - 108FT L - 0.050" Thick	AHB05034

---

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

01 FRAMELESS SHOWER DOOR

Shower Support Bar

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

01 Frameless Shower Door

Shower Support Bar – Round – Adjustable

Finishes

Chrome
Brushed Nickel
Matte Black
Satin Brass
Polished Nickel
Brushed Bronze
Gun Metal
Oil Rubbed Bronze
Custom Finishes

Product Overview

- **Adjustable Length:** 30"–42" bar for flexible fit across shower setups
- **Material & Finish:** 3/4" brass tubular bar with solid end caps for strength and polish
- **Installation Type:** For glass-to-glass setups, supporting frameless shower panels
- **Glass Compatibility:** Fits 3/8" (10 mm) tempered glass

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Glass to Glass

From 30" to 42"
(750mm to 1050mm)

*Telescoping Adjustability upto 7 inches

SUPG2G
Shower Support Bar Glass to Glass - Adjustable

Wall to Glass

SUPG2W
Shower Support Bar Glass to Wall - Adjustable

Ceiling to Glass

SUPG2C
Shower Support Bar Ceiling to Glass - Adjustable

SUPC
Support Bar Connector 90°

SUPB22 ✳
Support Bar Bracket 22°

Shower Support Bar – Square – Adjustable

Please note that these handles are not currently in stock.
For real-time inventory updates and availability, please refer to our website ggshardware.com.

Finishes

Chrome
Brushed Nickel
Matte Black
Satin Brass
Polished Nickel
Oil Rubbed Bronze
Gun Metal
Brushed Bronze
Antique Brass
Polished Brass
White
Custom Finishes

Product Overview

- **Materials:** High-quality brass construction for strength and corrosion resistance.
- **Design:** Square design with a decorative metal washer for a sleek and modern look.
- **Glass Compatibility:** Designed for 1/4" to 1/2" (6 to 12 mm) glass thickness.
- **Protection:** Includes plastic washers to prevent metal-to-glass contact, enhancing durability.

SQSUP ✳
Square Support Bar Only

SQSUP180 ✳
Square Support Bar Wall Mount Bracket

SQSUPT ✳
Square Support Bar Slide Bracket

SQSUP90 ✳
Square Support Bar Swivel U-Bracket

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

01 Frameless Shower Door

Glass Shower Door Stoppers

Finishes

Chrome   Matte Black   Custom Finishes

Brushed Nickel   Satin Brass

Product Overview

- **Glass Compatibility:** Designed for 10 mm tempered glass
- **Product Type:** Shower door stop for secure panel positioning
- **Easy Installation:** No glass fabrication required
- **Design Options:** Available in both square and beveled profiles

SQDS10

Square Glass Mount Swinging Shower Door Stop

BVDS10 ✱

Beveled Glass Mount Swinging Shower Door Stop

Privacy Glass Door Lock with Indicator

FEATURE PRODUCTS

Finishes

Chrome   Matte Black

Brushed Nickel   Custom Finishes

Product Overview

- **Glass Compatibility:** Designed for monolithic tempered glass thicknesses of 5/16" to 1/2" (8 to 12 mm).
- **Versatile Applications:** Suitable for glass-to-wall or 180º glass-to-glass installations with an optional matching keeper.
- **Indicator Functionality:** Displays Red when locked and Green when open for easy status identification.
- **Emergency Access:** Includes a low-profile screw on the exterior for added safety upon emergency to open from exterior.
- **Comprehensive Kit:** Comes with screws, anchors, gaskets, and glass mount keeper.

GTDLGM

Privacy Glass Door Lock for Washroom - Thumbturn

---

* For the most up-to-date product availability, visit our website.

* For the most up-to-date product availability, visit our website.

68

www.ggshardware.com

01 FRAMELESS SHOWER DOOR

Sliding Door Kits

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

01 Frameless Shower Door

Stainless Steel / Single Door Slide
Tranquility Series

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

TQ78

Tranquility Series

Kit Includes

1 x Header Bar (78")
2 x Track Holders
2 x Door Stopper
1 x L-Seal Jamb
4 x Roller
1 x Thru-Glass Pull
2 x Track Fittings
1 x Floor Guide

Key Features

- **Materials:** Made from high-quality stainless steel for long-lasting durability.
- **Configuration:** One sliding door and one fixed panel, suitable for use with 5/16" to 3/8" (8-10mm) tempered safety glass (glass not included).
- **Smooth Door Operation:** Equipped with 4 anti-lift rollers for quiet, smooth sliding, ensuring easy opening and closing.

Specification

SKU NO.	Glass Thickness	MAX. Door Size	MAX. Door Weight
TQ78	5/16" to 1/2" (8mm to 12mm)	Up to 30"(762mm)	Up to 88lbs (40kg)
HDTQ78		Up to 30"(762mm)	Up to 100lbs (50kg)

Finishes

Polished Stainless	Matte Black	Red Copper	Gun Metal	White
Brushed Nickel	Satin Brass	Oil Rubbed Bronze	Antique Brass	Custom Finishes

---

Included in Kit

TQH78
TQH120
Header Bar (78" & 120" Length)

Included in Kit

*Good for Lever adjustment

TQTH
Track Holder

Included in Kit

TQDS
Door Stopper

Included in Kit

*Pre applied Hi-bond tape

LJAMB
Multi-Purpose L-Jamb

Included in Kit

TQRO
Roller

Included in Kit

GLASSPULL
Thru Glass Pull

Included in Kit

TQTF
Track Fittings

Included in Kit

TQFG
Floor Guide

Sold Separate

TQB092
90° Corner Bracket

Sold Separate

TH98
Threshold (98" Length)

Sold Separate

TQ90R
90° Glass Return

Order Online Sample Kit

TRANQ78-SAMPLE
Tranquility Kit Sample

Brass / Double Door Slide
CAMI Series

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

CAMI73

CAM Series

*Premium Double bypass system

Kit Includes

1 x Stainless Steel Header(73")
8 x Stainless Rollers
2 x Door Stoppers
2 x Track Holder Fittings
1 x Bottom Guide
2 x Towel Bar(24" Single-Sided)
2 x Clear L-Jambs
1 x Bottom Sweeps
1 x Tool Kit

Key Features

- **Premium Material:** Crafted from brass for durability and corrosion resistance.
- **Glass Compatibility:** Designed for 5/16" to 3/8" (8 mm to 10 mm) tempered safety glass (glass not included).
- **Elegant Design:** Combines sleek style with functional precision for modern frameless showers.

Specification

SKU NO.	Glass Thickness	MAX. Door Weight	MAX. Door Size
CAMI73	5/16" to 1/2" (8mm to 12mm)	Up to 84lbs (38 kg)	Up to 37" (940 mm)

Finishes

Polished Stainless   Brushed Stainless   Matte Black   Satin Brass   Custom Finishes

---

Included in Kit

CAMIH73
Header Bar (73" Length)

Included in Kit

CAMIRO
Rollers

Included in Kit

CAMIDS
Door Stoppers

Included in Kit

CAMITH
Track Holder

Included in Kit

CAMIFG
Bottom Guide

Included in Kit

R24
24" Tubular Single Sided Towel Bar

Included in Kit
*Pre applied Hi-bond tape

LJAMB
Multi-Purpose L-Jamb

Included in Kit

CAMIBSWP
Bottom Sweep

Included in Kit

CAMI-TOOL
Tool Kit

Sold Separate

CAMI90R
90° Glass Return

USE ONLY MONOLITHIC TEMPERED GLASS

INSTALLER'S FAVORITE!
GOAT Drill & Spade Bits, Refer Page Number: 272

Single Door Slide
HYDRO Series

ARCHITECTS RECOMMEND

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

HYDRO84

HYDRO Series

Kit Includes
1 x Header Bar (84")
1 x Bottom Door Guide
1 x Drill Guide
2 x Fixed Plate Fittings
2 x Hangers Set
1 x L-Seal
2 x Wall Mount & Stopper

Key Features
- **Material:** Made from high-quality stainless steel for durability and resistance to corrosion.
- **Configuration:** 84" long sliding door kit designed for seamless installations.
- **Smooth and Quiet Operation:** Equipped with 2 rollers for quiet door movement, ensuring effortless opening and closing.

Specification

SKU NO.	Glass Thickness	MAX. Door Weight	MAX. Door Width
HYDRO84	5/16" to 3/8" (8mm to 10mm)	Up to 88lbs (40kg)	Up to 30" (762mm)

Finishes
Polished Stainless | Brushed Stainless | Matte Black | Satin Brass | Custom Finishes

---

Included in Kit — **HYDROH84** ✱ — Header Bar - 84" Length

Included in Kit — **HYDRODG** ✱ — Drill Guide

Included in Kit — **HYDROFPF** ✱ — Fixed Plate Fitting

Included in Kit — **HYDROHANGER** ✱ — Hanger

Included in Kit — **HYDROFG** ✱ — Bottom Door Guide

Included in Kit *Pre applied Hi-bond tape* — **LJAMB** — Multi-Purpose L-Jamb

Included in Kit — **HYDRODS** ✱ — Wall Mount & Stopper

Sold Separate — **TH98** — Threshold - 98" Length

Sold Separate — **HYDRO05** — 90° Wall-to-Glass Bracket

Sold Separate — **HYDRO90** — 90° Glass-to-Sliding Track

USE ONLY MONOLITHIC TEMPERED GLASS

INSTALLER'S FAVORITE! GOAT Drill & Spade Bits, Refer Page Number: 272

P13 Frameless Shower Door P85 Railing Hardware P163 Storefront & Entrance System P223 Door Rails & Architectural Hardware P261 Stock Glass Doors P271 Glazing Supplies

01 Frameless Shower Door

Single Door Slide
LUNA Series

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

LUNA78

LUNA Series

Kit Includes

- 1x Header Bar
- 4x Stainless Rollers
- 1x Door Stopper
- 2x Wall Mount Fittings
- 2x Track Holder Fitting
- 1x Bottom Floor Guide
- 1x Clear L-Seal Jamb
- 1x Bottom Sweep

Key Features

- **Materials and Dimensions:** Made from high-quality stainless steel for durability and resistance to corrosion.
- **Configuration:** 78" long sliding door kit designed for seamless installations.
- **Smooth and Quiet Operation:** Equipped with 4 rollers for quiet door movement, ensuring effortless opening and closing.

Specification

SKU NO.	Glass Thickness	MAX. Door Weight	Material
LUNA78	3/8" to 1/2" (10mm to 12mm)	Do not exceed 100lbs (45 kg) in weight	Stainless Steel

Finishes

- Chrome
- Matte Black
- Polished Nickel
- Gun Metal
- Custom Finishes
- Brushed Nickel
- Satin Brass
- Brushed Bronze
- Oil Rubbed Bronze

Included in Kit

LUNAH78

Header Bar - 78" Length

Included in Kit

LUNARO

Roller

Included in Kit

LUNADS

Door Stopper

Included in Kit

LUNAWM

Wall Mount

Included in Kit

LUNATF

Track Holder Fitting

Included in Kit

LAGFG

Floor Guide

Included in Kit

*Pre applied Hi-bond tape

LJAMB

Multi-Purpose L-Jamb

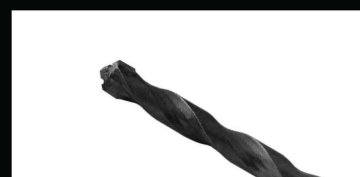**Sold Separate**

CAMIBSWP

Bottom Sweep

Sold Separate

LUNA90R

90° Glass Return Kit

USE ONLY MONOLITHIC TEMPERED GLASS

INSTALLER'S FAVORITE!

GOAT Drill & Spade Bits, Refer Page Number: 272

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

01 Frameless Shower Door

Double Door Slide
Tranquility Series – Heavy Duty

HDTQ78
Heavy Duty Tranquility Series

Kit Includes
1 x Header Bar
2 x Track Holders
2 x Door Stopper
1 x L-Seal Jamb
4 x Roller
1 x Thru-Glass Pull
2 x Track Fittings
1 x Floor Guide

Key Features
- **Materials and Dimensions:** Constructed from high-grade stainless steel for exceptional durability and corrosion resistance.
- **Configuration:** One sliding door and one fixed panel, designed for use with 12mm tempered safety glass (glass not included).
- **Smooth and Quiet Operation:** Includes 4 anti-lift rollers for quiet, easy door movement and effortless operation.

Specification

SKU NO.	Glass Thickness	MAX. Door Size	MAX. Door Weight
HDTQ78	1/2" (12mm)	Up to 30"(762mm)	Up to 100lbs (50kg)

Finishes
Polished Stainless, Matte Black, Polished Nickel, Gun Metal, Polished Brass, Custom Finishes, Brushed Nickel, Satin Brass, Oil Rubbed Bronze, Antique Brass, White

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Included in Kit
TQH78 TQH120 — Header Bar - 78" Length

Included in Kit *Good for Lever adjustment
TQTH — Track Holder

Included in Kit
TQDS — Door Stopper

Included in Kit *Pre applied Hi-bond tape
LJAMB — Multi-Purpose L-Jamb

Included in Kit
TQRO — Roller

Included in Kit
GLASSPULL — Thru Glass Pull

Included in Kit
TQTF — Track Fittings

Included in Kit
TQFG — Floor Guide

Sold Separate
TQB092 — 90° Corner Bracket

Sold Separate
TH98 — Threshold (98" Length)

Sold Separate
TQ90R — 90° Glass Return

Order online sample kit
TRANQ78-SAMPLE — Tranquility Kit Sample

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

01 Frameless Shower Door

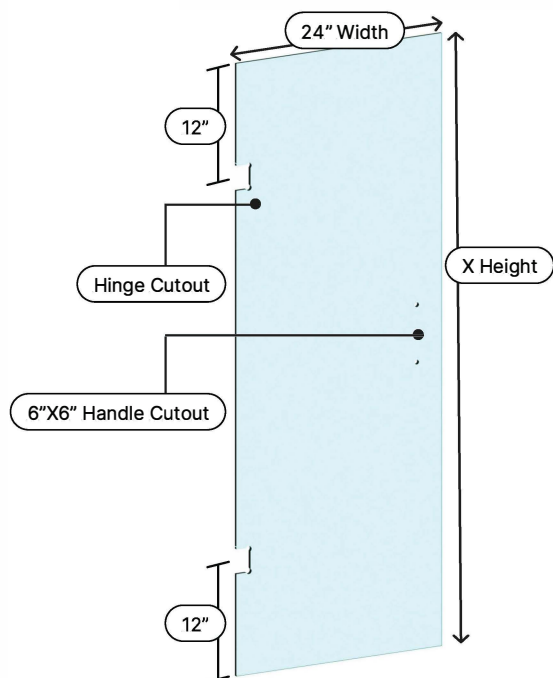01 FRAMELESS SHOWER DOOR

Stock Glass Doors

Shower Stock Door – 24" Width

Glass Thickness: 3/8" (10mm) Tempered Safety Glass.
Beveled and Polished Edges, Prefabricated for either 6" or 6×18" handle combinations

24inches Width 2H

24" Width · 12" · Hinge Cutout · 6"X6" Handle Cutout · X Height · 12"

X Height	SKU
64-2H	SD24X64-2H
66-2H	SD24X66-2H
68-2H	SD24X68-2H
70-2H	SD24X70-2H
72-1H	SD24X72-1H
72-2H	SD24X72-2H
74-2H	SD24X74-2H
76-2H	SD24X76-2H
78-2H	SD24X78-2H
80-2H	SD24X80-2H
82-2H	SD24X82-2H
84-2H	SD24X84-2H

24inches Width 3H

24" Width · 12" · Hinge Cutout · 6"X18" Handle Cutout · X Height · 12"

X Height	SKU
64-3H	SD24X64-3H
66-3H	SD24X66-3H
68-3H	SD24X68-3H
70-3H	SD24X70-3H
72-3H	SD24X72-3H
74-3H	SD24X74-3H
76-3H	SD24X76-3H
78-3H	SD24X78-3H
80-3H	SD24X80-3H
82-3H	SD24X82-3H
84-3H	SD24X84-3H

P13 Frameless Shower Door P163 Storefront & Entrance System P261 Stock Glass Doors
P85 Railing Hardware P223 Door Rails & Architectural Hardware P271 Glazing Supplies

01 Frameless Shower Door

Shower Stock Door – 26" Width

Glass Thickness: 3/8" (10mm) Tempered Safety Glass.
Beveled and Polished Edges, Prefabricated for either 6" or 6×18" handle combinations
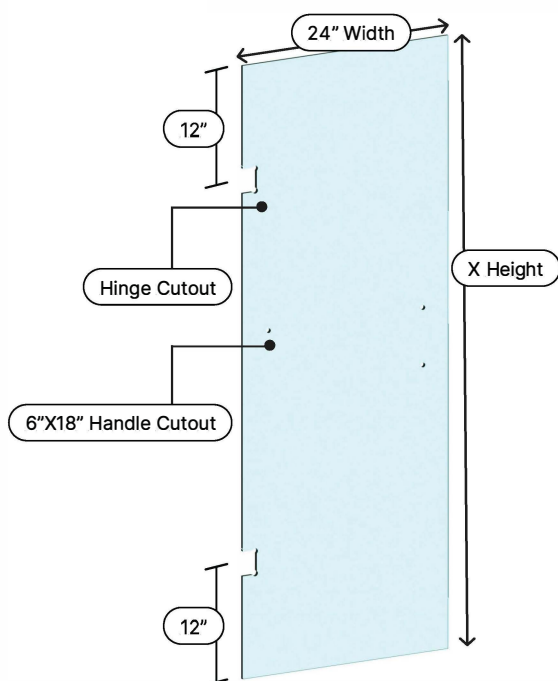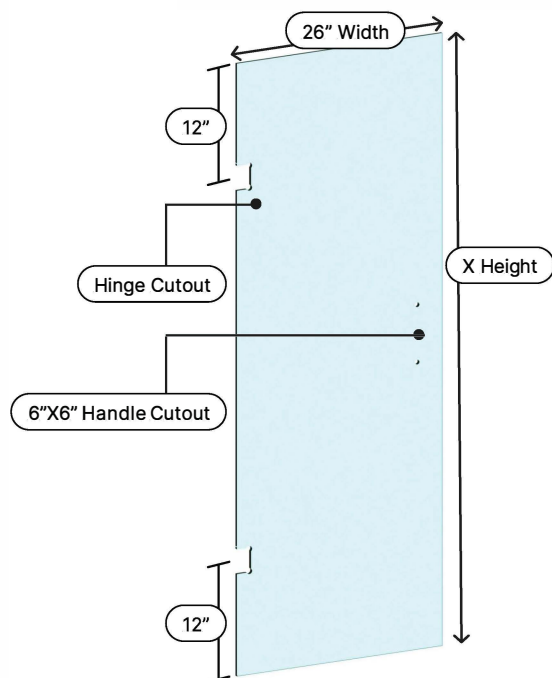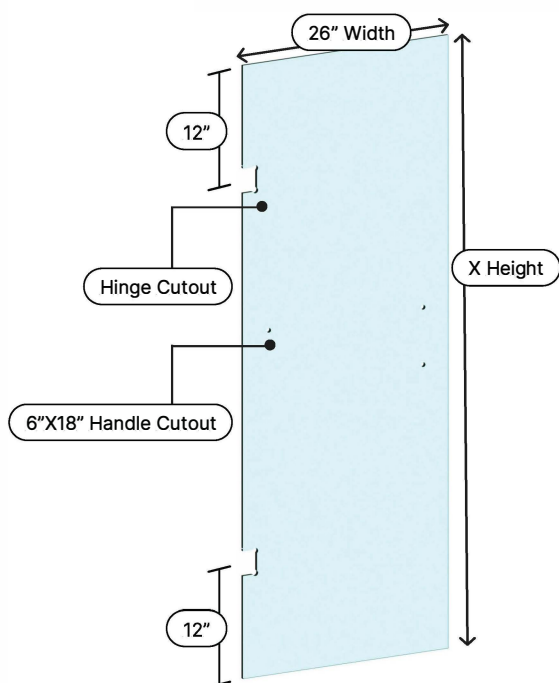
26inches Width 2H

26" Width · 12" · Hinge Cutout · 6"X6" Handle Cutout · X Height · 12"

X Height	SKU
64-2H	SD26X64-2H
66-2H	SD26X66-2H
68-2H	SD26X68-2H
70-2H	SD26X70-2H
72-2H	SD26X72-2H
74-2H	SD26X74-2H
76-2H	SD26X76-2H
78-2H	SD26X78-2H
80-2H	SD26X80-2H
82-2H	SD26X82-2H
84-2H	SD26X84-2H

26inches Width 3H

26" Width · 12" · Hinge Cutout · 6"X18" Handle Cutout · X Height · 12"

X Height	SKU
64-3H	SD26X64-3H
66-3H	SD26X66-3H
68-3H	SD26X68-3H
70-3H	SD26X70-3H
72-3H	SD26X72-3H
74-3H	SD26X74-3H
76-3H	SD26X78-3H
78-3H	SD26X78-3H
80-3H	SD26X80-3H
82-3H	SD26X82-3H
84-3H	SD26X84-3H

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

01 Frameless Shower Door

Shower Stock Door – For Sliding Door

For Tranquility Stock Doors

30inches Fixed Panel	X Height	SKU	30inches Width 1H Sliding Panel	X Height	SKU
	60-PANEL	SD30X60PANEL		60-1H	SD24X64-2H
	62-PANEL	SD30X62PANEL		62-1H	SD30X62DOOR-1H
	66-PANEL	SD30X66PANEL		66-1H	SD30X66DOOR-1H
	76-PANEL	SD30X76PANEL		76-1H	SD30X76DOOR-1H
				76-2H	SD30X76DOOR-2H

30" Width — Tranquility Kit Cutout — X Height — Fixed Panel

30" Width — Tranquility Kit Cutout — X Height — Sliding Panel — Thru Pull Cutout

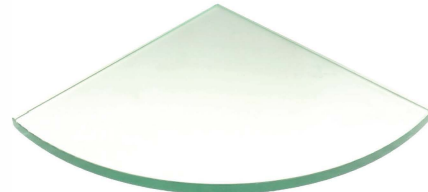| P13 Frameless Shower Door	P163 Storefront & Entrance System	P261 Stock Glass Doors
P85 Railing Hardware	P223 Door Rails & Architectural Hardware	P271 Glazing Supplies

01 Frameless Shower Door

Shower Glass Shelves (3/8")

SGS10X10
Stock Glass Shelves
10" X 10" - Round (Quarter Circle)

SGS9X9
Stock Glass Shelves
9" X 9" - Round (Quarter Circle)

Shower Shelf Clamps

- **Material:** Solid Brass for exceptional strength and resistance to corrosion
- **Glass Thickness Range:** 1/4" to 3/8" (6 to 10 mm) to accommodate a variety of glass shelf thicknesses
- **No Glass Fabrication Required:** Clamps tighten easily using nylon-tipped screws, streamlining installation without the need for custom glass fabrication

Finishes

Chrome	Brushed Nickel	Polished Nickel	Gun Metal	Antique Brass	White
Matte Black	Satin Brass	Brushed Bronze	Oil Rubbed Bronze	Polished Brass	Custom Finishes

SCSQ
Shower Shelf Clamp - Square
Glass Thickness Range: 1/4" to 3/8" (6mm to 10mm)

SCRD
Shower Shelf Clamp - Round
Glass Thickness Range: 1/4" to 3/8" (6mm to 10mm)

SCFL ✳
Shower Shelf Clamp - Falcon
Glass Thickness Range: 1/4" to 3/8" (6mm to 10mm)

Factory Order Program

Secure your supply, scale your savings.

If you have recurring demand or are planning a large project rollout, our Factory Order Program is built to serve your timeline and your bottom line.

Program Highlights:

- Direct-from-factory pricing for large-scale commitments
- Flexible order forecasting and inventory planning
- Custom labeling and product configurations
- Scheduled shipments based on your project phases
- MOQ (Minimum Order Quantity) applies – ask us for details

Ideal for:

- OEM partners
- Large-scale distributors
- International buyers
- Developers managing multiple sites

Contact us to enroll: **sales@ggshardware.com**

Speak with our program manager: **1-905-264-1600**

Ask about our MOQ charts, lead time options, and program perks.

Do you have large projects?

- Condominiums
- High-Rise Buildings
- Residential Developments
- Sub-Divisions

Want to Save Money?

Our program helps you cut costs on large builds without compromising on product quality or logistics.

GGH Extra Value

- Volume Discounts
- Consistent Lead Times
- Reliable Product Quality
- Dedicated Project Support

* For the most up-to-date product availability, visit our website.

82

www.ggshardware.com

Grey Goat Color Sample Kit

Grey Goat Color Samples Kit   **84**

P13 Frameless Shower Door P163 Storefront & Entrance System P261 Stock Glass Doors
P85 Railing Hardware P223 Door Rails & Architectural Hardware P271 Glazing Supplies

01 Frameless Shower Door

Grey Goat Color Samples Kit
Explore upcoming color finishes on our website.

Frameless Shower Hardware

CH Chrome | **BN** Brushed Nickel | **MBL** Matte Black | **SB** Satin Brass | **PN** Polished Nickel | **BBRZ** Brushed Bronze

GM Gun Metal | **ORB** Oil Rubbed Bronze | **W** White | **AB** Antique Brass | **PB** Polish Brass | Custom Finishes

This color tower was created for one-time distribution only. For the most up-to-date selection of available finishes, please visit our website at ggshardware.com.
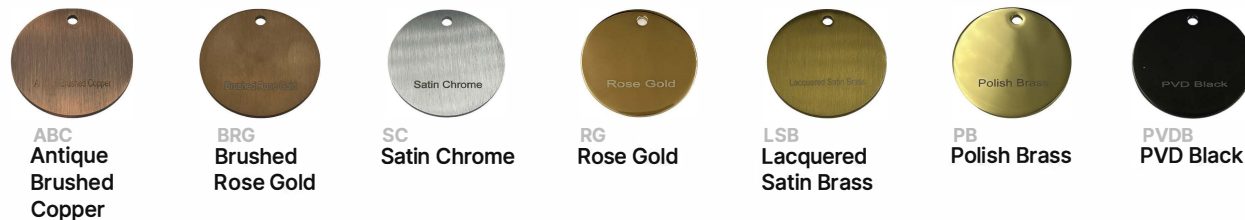
Railing Hardware

BSS Brushed Stainless Steel | **MBL** Matte Black | **SB** Satin Brass | **W** White | **PSS** Polished Stainless Steel | Custom Finishes

Commercial Finishes

SA Satin Anodized | **MBL** Matte Black | **BSS** Brushed Stainless Steel | **PSS** Polished Stainless Steel | **SB** Satin Brass | Custom Finishes

Future Colors

ABC Antique Brushed Copper | **BRG** Brushed Rose Gold | **SC** Satin Chrome | **RG** Rose Gold | **LSB** Lacquered Satin Brass | **PB** Polish Brass | **PVDB** PVD Black

*These finishes aren't listed on our website yet — but they're available in our color chain. If you're interested, we'd be happy to provide upon request!

Don't have an account?
Sign up now at GGSHARDWARE.COM and get approved by one of our representatives same day! Check Page #4 for more info!

Need Help ?
Call our office today and speak to one of our friendly specialist

* For the most up-to-date product availability, visit our website.

ARCH-LOC™
ADJUSTABLE BASE SHOE SYSTEM

FEATURE PRODUCTS

INNOVATIVE GUARANTEE

STAMPED ENGINEERED STAMPED

2° Tilt Adjustment

Quick & Easy Installation

Save Time and Money

Canadian Patent Number: 2962407
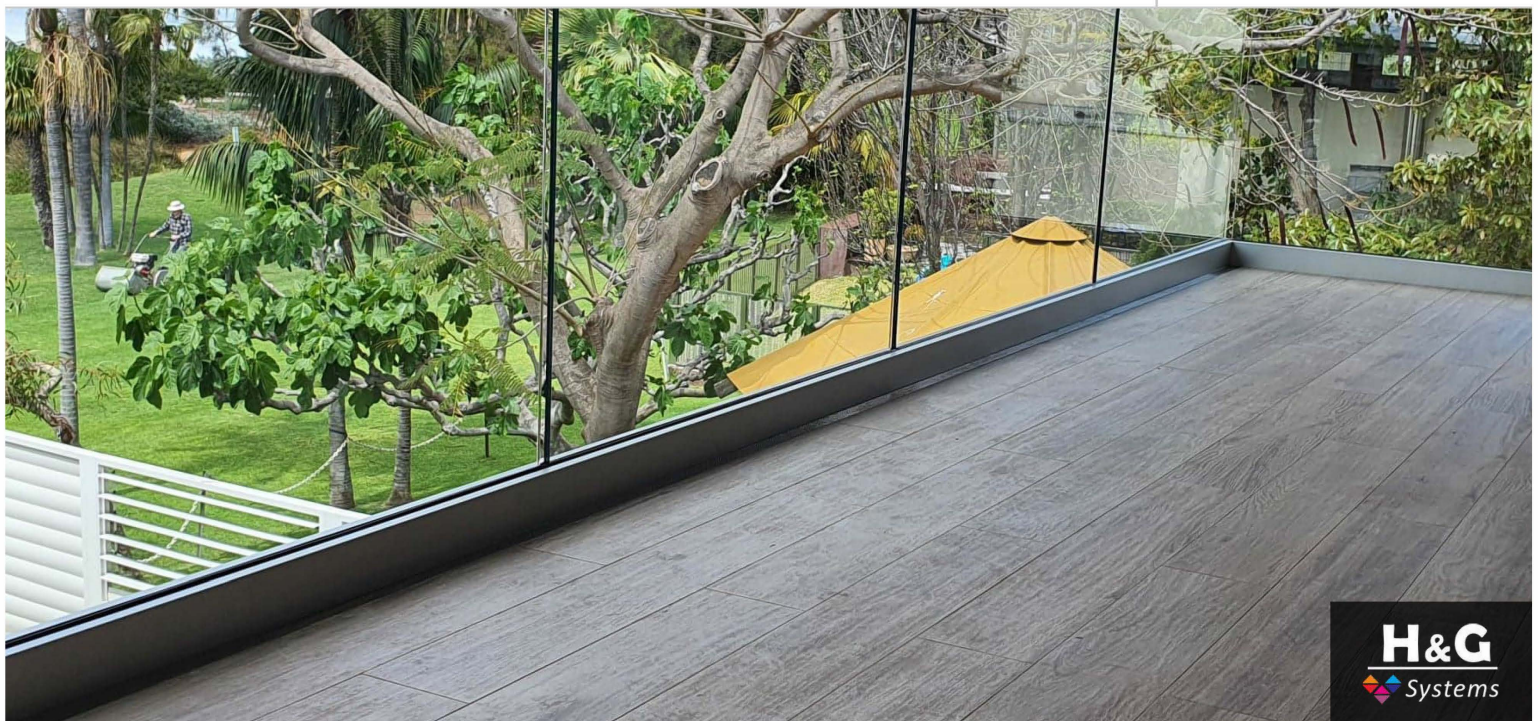**Engineered & Stamped - Canadian National Building Code (Per Province)**

Manufactured by

H&G Systems

Distributed by

GGH GLAZING SUPPLY COMPANY

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

02 Railing Hardware

ARCH-LOC™
ADJUSTABLE BASE SHOE SYSTEM

1/2"-27/32" Glass

FEATURE PRODUCTS   INNOVATIVE GUARANTEE   ENGINEERED STAMPED

FAST • EASY • ENGINEERED

Revolutionize Your Installations with our ARCH-LOC™ System. Our ARCH-LOC™ Base Rail Systems are **engineered** to deliver unmatched **ease of installation, superior precision, and reliable durability.** With **2° tilt adjustment** in each direction, achieved entirely from the inside of the balcony, this innovative system simplifies alignment and reduces installation time by up to threefold compared to traditional methods.

2° Tilt Adjustment

Quick & Easy Installation

Save Time and Money

H&G Systems

Features and Benefits

Engineered: Engineered and Stamped to meet **National Building Code & Miami-Dade County NOA's.**

Glass Thickness: Suitable for glass from 1/2" - 27/32" (12mm-21.4 mm) thickness.

Available Length: 10FT & 20FT.

Premium Quality Materials: Constructed from high-strength, pure aluminum for exceptional durability.

Height From Ground: 1-1/2" above ground level.

Flexible Applications: Top-mounted, side-fixed, or recessed installations to suit diverse needs.

Faster Installations: Patented rotating pressure plate system ensures a smooth and efficient setup.

Canadian Patent: 2962407

ARCH-LOC™
FULL KIT DETAILS

ENGINEERED STAMPED STAMPED

Brushed Anodized Aluminum | Matte Black Anodized Aluminum | Brushed Stainless Steel | Polished Stainless Steel | Custom Finishes

Residential & Commercial Applications	69 Series - Top Mount 1/2" (12 mm)		69 Series - Side Mount 1/2" (12 mm)	86 Series - Top Mount 19/32" - 11/16" (15mm-17mm) 3/4" - 27/32" (19mm-21mm)
Base Shoe Type • Top Mount • Side Mount • Recessed Mount	Tilt Adjust			
Technical Drawing	5" [125.81mm], 1 1/2" [38.00mm], 2 5/8" [68.00mm], 2 7/8" [73.00mm]		Stainless Steel — 5 1/8" [129.00mm], 3 1/2" [88.87mm], 1 5/8" [40.12mm], 2 5/8" [68.00mm], 2 3/4" [69.00mm]	KG FOR EXTRA HEAVY DUTY WEIGHT AND WIDTH — 5" [125.84mm], 1 1/2" [38.00mm], 3 3/8" [86.00mm], 3 5/8" [91.00mm]

Kit Includes   FAST • EASY • ENGINEERED

Shoe Length	10 FT	20 FT	10 FT	10 FT
Glass Thickness	1/2" (12 mm)			19/32" - 11/16" (15mm-17mm) 3/4" - 27/32" (19mm-21mm)
Height From Ground	1 - 1/2"	1 - 1/2"	1 - 5/8"	1 - 1/2"
No. of Claddings	2 X 10 FT	4 X 10 FT	2 X 10 FT	2 X 10 FT
Glass Kits	10 pcs	20 pcs	10 pcs	10 pcs
Joining Pins	4 pcs	8 pcs	4 pcs	4 pcs
Stabilizing Washers	10 pcs	20 pcs	10 pcs	10 pcs
Gap Rubber	1 X 3.94"	2 X 3.94"	1 X 3.94"	1 X 3.94"
Flat Washers	10 pcs	20 pcs	10 pcs	10 pcs
End Caps	2	2	2	2

P13 Frameless Shower Door | P163 Storefront & Entrance System | P261 Stock Glass Doors
P85 Railing Hardware | P223 Door Rails & Architectural Hardware | P271 Glazing Supplies

02 Railing Hardware

69 Series – Components & Accessories
Suitable for glass from 3/8" - 1/2" (10mm-12 mm) thickness

H&G Systems

Finishes & Specification

Brushed Anodized Aluminum | Matte Black Anodized Aluminum | Brushed Stainless Steel | Polished Stainless Steel | Custom Finishes

Canadian Patent Number: 2962407
Engineered and Stamped - National / Ontario Building Code

- Engineered and stamped **National and Ontario Building Codes & Miami-Dade County NOA's**.
- **Material:** High Strength Pure Aluminum Construction
- Suitable for glass **from 19/32" - 27/32" (15mm - 21.4 mm) thickness**
- Glass **height 1-1/2" (For Top Mount)** & **height 1-5/8" (For Side Mount)** above ground level

---

Mill Extrusion

ARCH69SMILL
ARCH69TMILL

Available in 10 ft & 20 ft length

ARCH6910TCLD
ARCH6920TCLD

Top Mount Cladding

ARCH6910SCLD

Side Mount Cladding (120" Length)

External & Internal Corner

ARCH6990CNTMIN

90º Top Fix Corner

ARCHC12

Glass Clamping Kit

ARCH69RS3 / ARCH69RS7

3Inches/7Inches Gap rubber

ARCH69SW

Stabilizer Washer

External & Internal Corner

ARCH6990CNTMEX

90º Top Fix External Corner

ARCHFWRENCH

Ratcheting Wrench

ARCHJP

Joining Pin

ARCHEC69

End Cap

ARCHDBLOCK

Drain Block

ARCHCWRENCH

Wrench

---

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

■ **P13** Frameless Shower Door	■ **P163** Storefront & Entrance System	■ **P261** Stock Glass Doors
■ **P85** Railing Hardware	■ **P223** Door Rails & Architectural Hardware	■ **P271** Glazing Supplies

02 Railing Hardware

86 Series – Components & Accessories

Suitable for glass from 19/32" - 27/32" (15mm - 21.4 mm) thickness
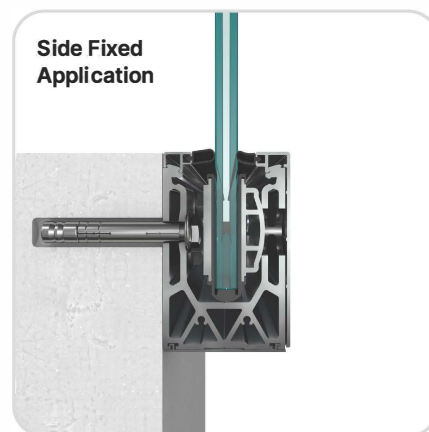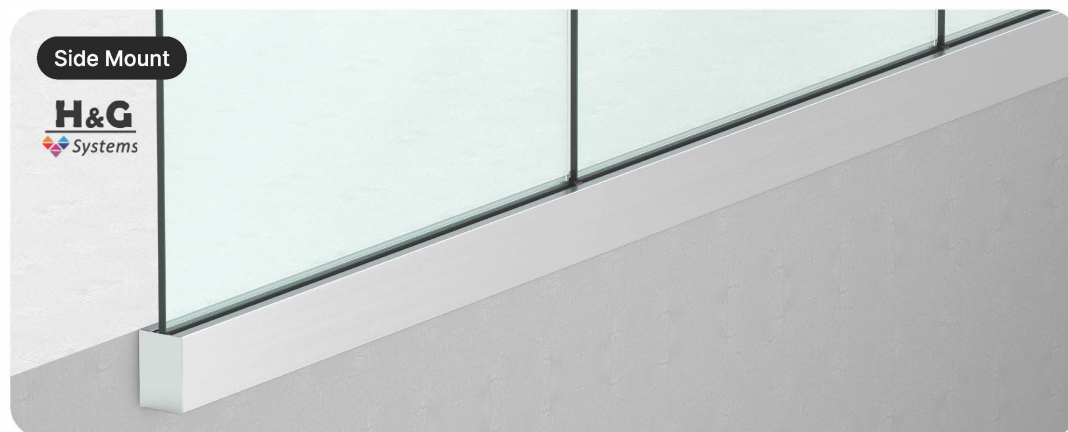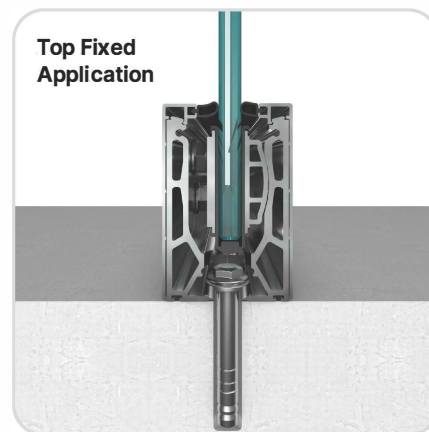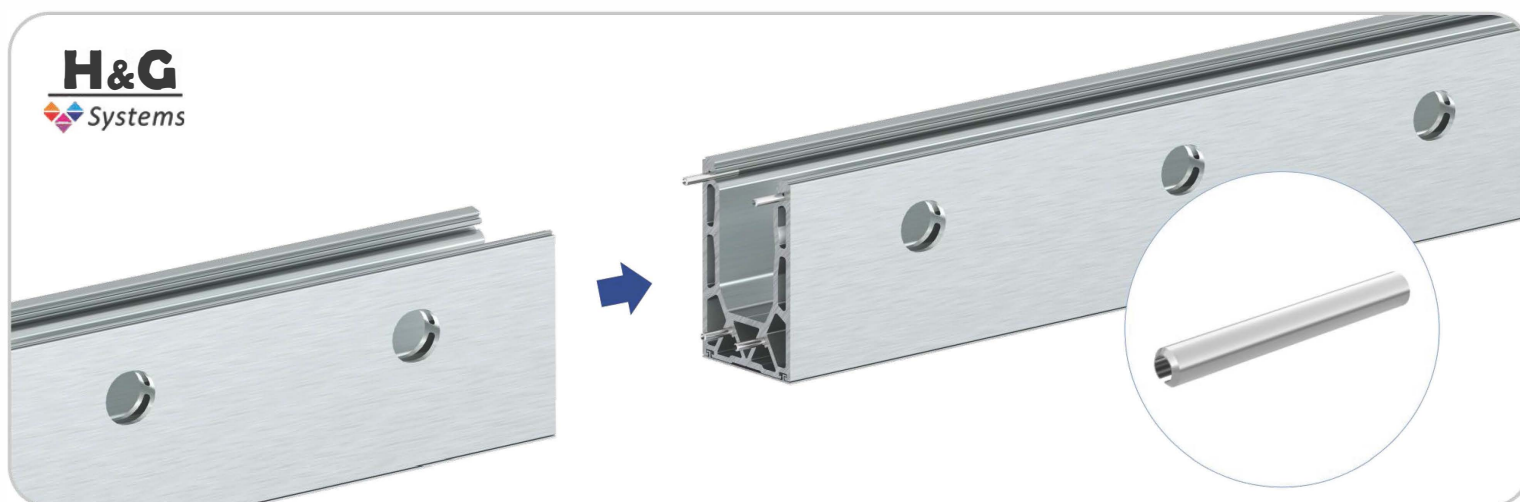
Finishes & Specification

Brushed Anodized Aluminum	Brushed Stainless Steel	Matte Black Anodized Aluminum	Polished Stainless Steel	Custom Finishes

Canadian Patent Number: 2962407
Engineered and Stamped - National / Ontario Building Code

- Engineered and stamped as per **National and Ontario Building Codes & Miami-Dade County NOA's.**
- **Material:** High Strength Pure Aluminum Construction
- Suitable for glass **from 19/32" - 27/32" (15mm - 21.4 mm) thickness**
- Glass **height 1-1/2" (For Top Mount)** above ground level & **height 1-5/8" (For Side Mount)**

10FT / Top Mount | **Kits**

ARCH8610T1517
ARCH8610T1921
Available in 10 ft length

10FT / Mill Top Mount | **Kits**

ARCH86TMILL10
Mill Top Mount / Available in 10 ft length

ARCHC1517
Glass Clamp Kit
For 19/32" - 11/16" (15mm-17mm) thick Glass

ARCHC1921
Glass Clamp Kit
For 3/4" - 27/32" (19mm-21mm) thick Glass

ARCH8610CLD
ARCH8610CLD

ARCH86SCLD
Top Mount Cladding

ARCH86SCLD
Cover Kit for ARCH86

External & Internal Corner

ARCH8690CNTMEX
90° Top Fix External Corner

ARCHEC86
End Cap

ARCHCWRENCH
Wrench

ARCHFWRENCH
Ratcheting Wrench

ARCH69RS3
ARCH69RS7
3 & 7 Inches Gap rubber

ARCHJP
Joining Pin

ARCH86SW
Stabilizer Washer

---

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

Base Shoe Installation Application

2° Tilt Adjustment
Quick & Easy Installation
Save Time and Money

Surface Mount
H&G Systems

Top Fixed Application

Side Mount
H&G Systems

Side Fixed Application
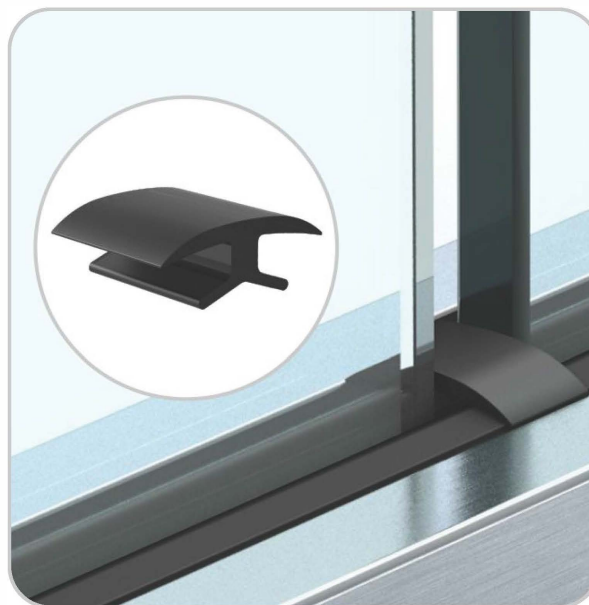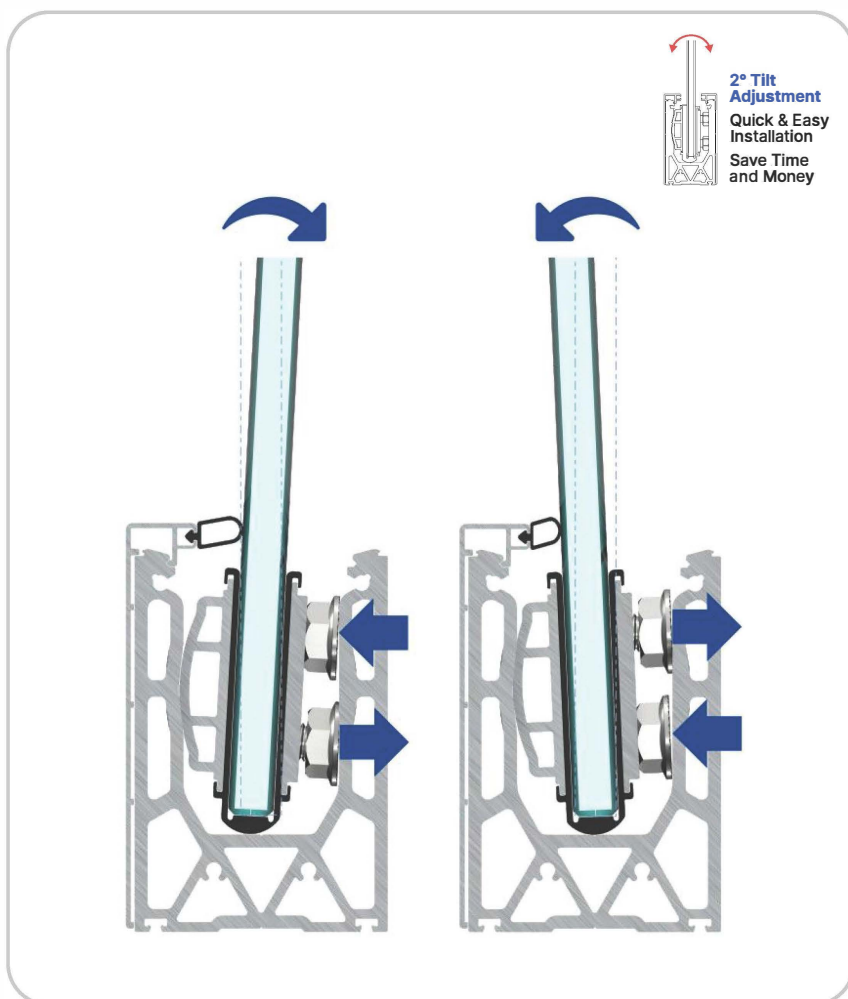
Recessed
H&G Systems

Recessed Application

Available Mount Types

- **Top Fixed Application:** Ideal for surfaces like floors or beams, ensuring a clean and modern look.
- **Side Fixed Application:** Perfect for maximizing floor space, mounted directly to the side of the structure.
- **Recessed Application:** Provides a sleek, minimalistic finish by concealing the base shoe within the surface.

Joining Pins

Ensure seamless alignment and structural integrity with Joining Pins from the Arch-Loc Base Shoe System. These precision-engineered components securely connect base shoe segments, providing enhanced stability and a clean, continuous appearance. Built for durability and ease of installation, they are an essential part of achieving a flawless glass railing system.

2° Tilt
Adjustment
Quick & Easy
Installation
Save Time
and Money

Clamp Adjustments - Rubber

Rubber in the Arch-Loc Base Shoe System provide protection from duct and debris and vibration damping. These durable rubber inserts ensure a secure fit while protecting the glass from damage, making installation easier and maintaining long-term stability in your glass railing system.

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

02 Railing Hardware

* For the most up-to-date product availability, visit our website.

92

www.ggshardware.com

Titan Spigots

Engineered and Stamped - National / Ontario Building Code

Titan Series – SQ/RD Top Mount Spigots

Adjustable Railing Spigots

↑ Adjustable Glass Height

⤡ Adjustable Glass Angle

STAMPED ENGINEERED STAMPED

Set Screw to Adjust Height

TI6SQADJ
TI8SQADJ

6" or 8" Height Adjustable Spigot - Square

TI6RD
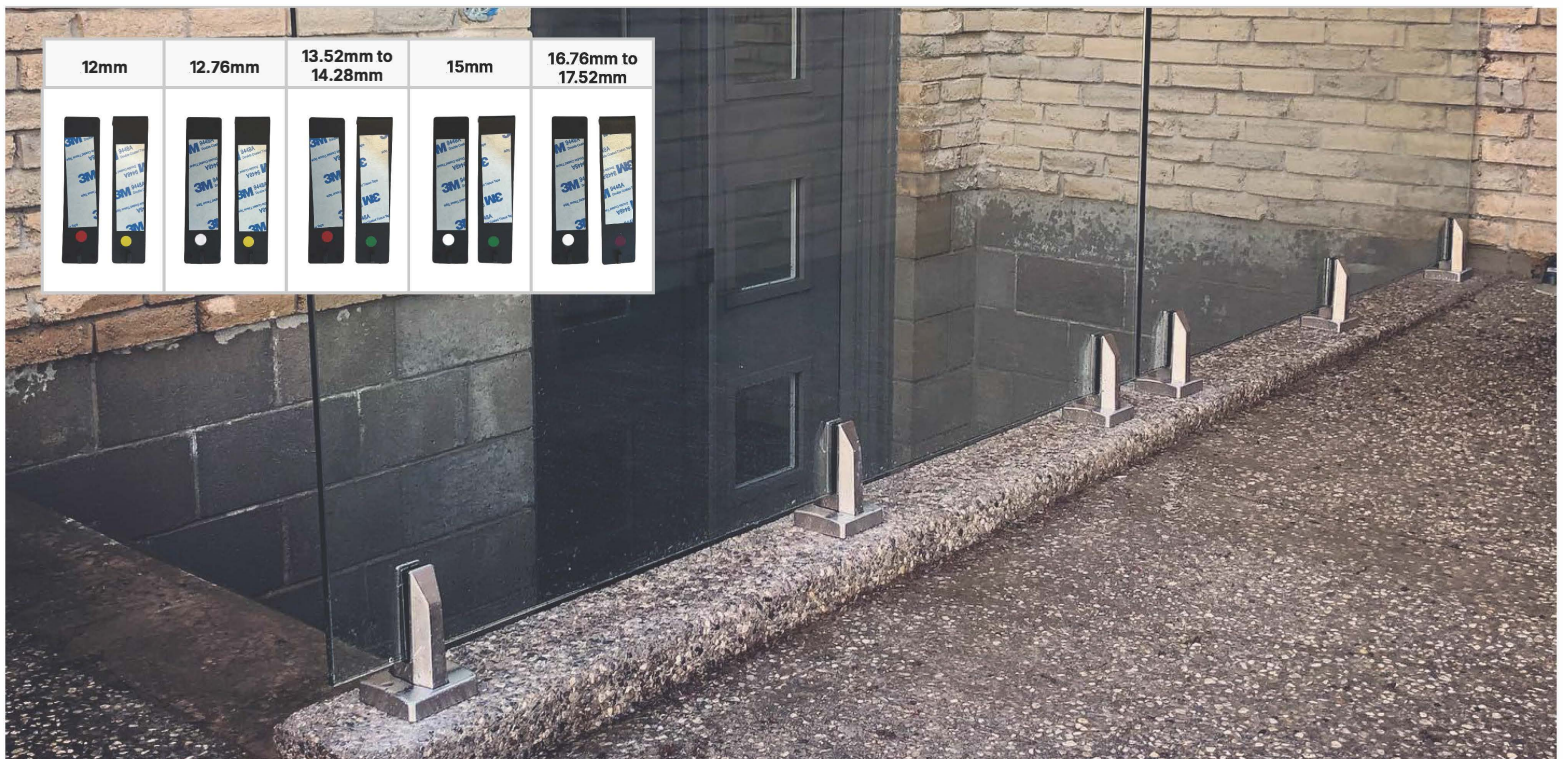
6" Top Mount Spigot - Round

ISOMETRIC VIEW
SCALE: NTS

Key Features

The clean architectural lines create a unique facade providing a very cost efficient modern solution for structural glass railings.

- **Height Adjustable:** Extra 1/2" adjustment for perfect glass alignment.
- **Tilt Adjustment:** ±3° flexibility for angled or horizontal installations.
- **Premium Material:** Duplex 2205 stainless steel with SS316 cover for top strength and corrosion resistance.
- **Glass Compatibility:** Fits 12mm glass.
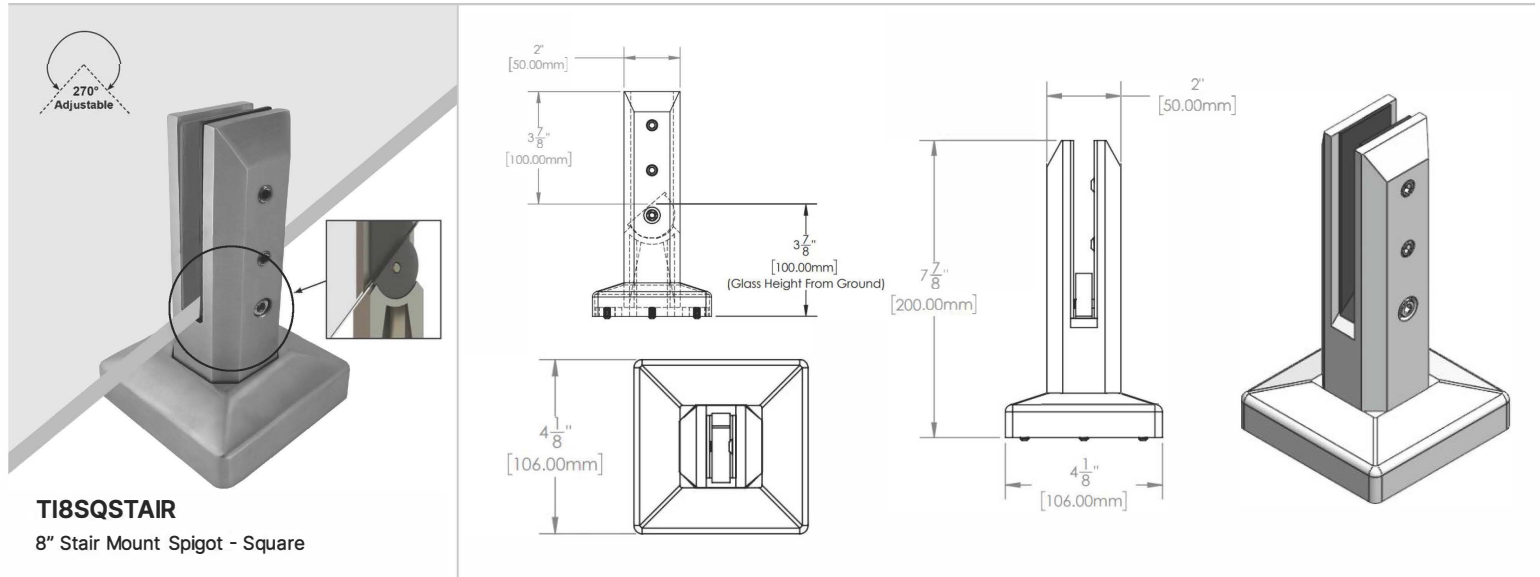- Engineered and Stamped to meet **National Building Codes.**

| P13 Frameless Shower Door | P163 Storefront & Entrance System | P261 Stock Glass Doors |
| P85 Railing Hardware | P223 Door Rails & Architectural Hardware | P271 Glazing Supplies |

02 Railing Hardware

ARCH-LOC™ Spigots

ENGINEERED STAMPED

Brushed Anodized Aluminum

Matte Black Anodized Aluminum

Manufactured by **H&G** Systems

NEW

For 12-17.52mm Tempered Glass

ARCH6SQADJ
Arch-Loc Spigot

Glass Size	Gasket Sticker Colors
12mm	🟡 Yellow Gasket - L + 🔴 Red Gasket - I
12.76mm	🟡 Yellow Gasket - L + ⚪ White Gasket - I
13.52mm to 14.28mm	🟢 Green Gasket - L + 🔴 Red Gasket - I
15mm	🟢 Green Gasket - L + ⚪ White Gasket - I
16.76mm to 17.52mm	🟣 Purple Gasket - L + ⚪ White Gasket - I

100(3-15/16in)
50(1-31/32in)
100(3-15/16in)
68(2-43/64in)
R6.5(17/64in)
18 (23/32in)

INSTALLATION METHODS

The clean architectural lines create a unique facade providing a very cost efficient modern solution for structural glass railings.

- **Canadian Patent No.:** 2,962,407
- **Height Adjustable:** Extra 1/2" adjustment for perfect glass alignment.
- **Tilt Adjustment:** ±30mm flexibility for angled or horizontal installations.
- **Premium Material:** Duplex 2205 stainless steel with SS316 cover for top strength and corrosion resistance.
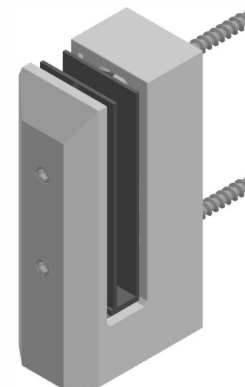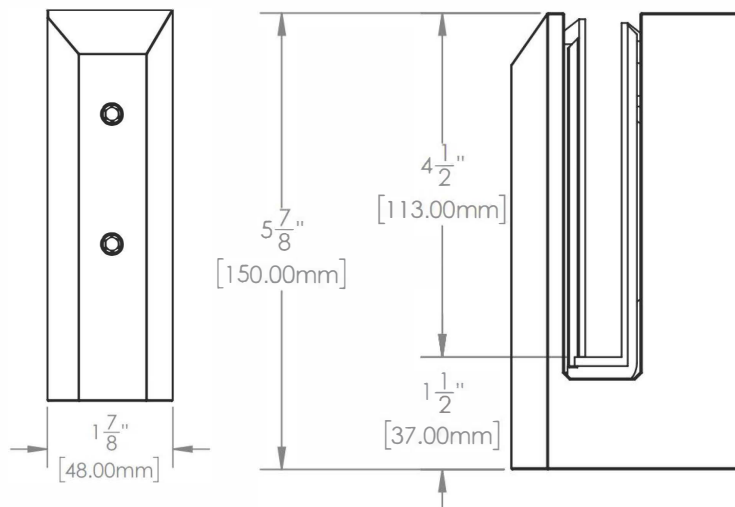- **Glass Compatibility:** Fits 12mm glass.
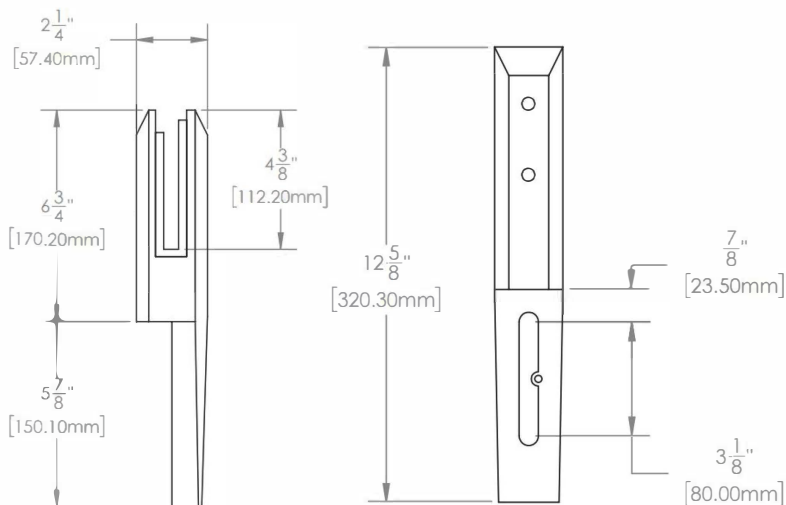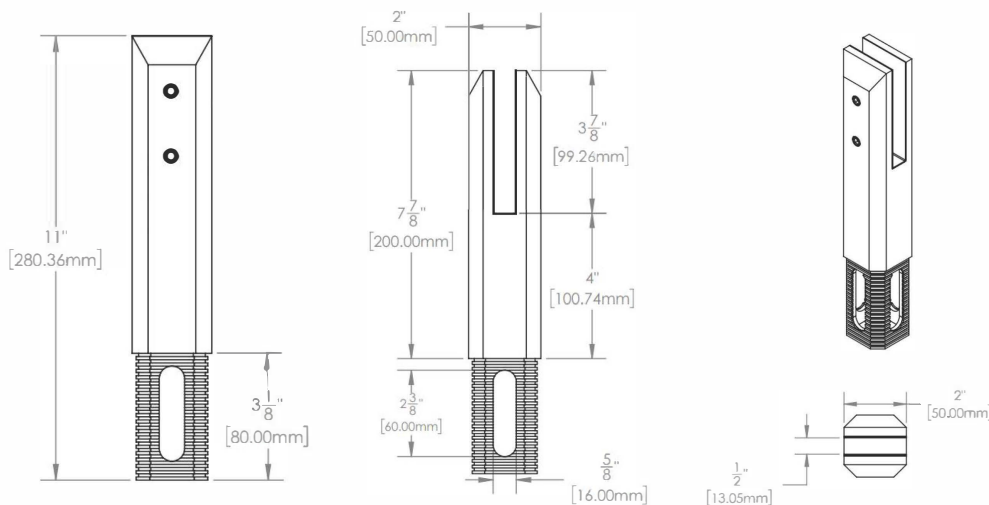- Engineered and Stamped to meet **National Building Codes.**

Manufactured by **H&G** Systems

| 12mm | 12.76mm | 13.52mm to 14.28mm | 15mm | 16.76mm to 17.52mm |

* For the most up-to-date product availability, visit our website.

95

www.ggshardware.com

P13 Frameless Shower Door	P163 Storefront & Entrance System	P261 Stock Glass Doors
P85 Railing Hardware	P223 Door Rails & Architectural Hardware	P271 Glazing Supplies

02 Railing Hardware

Titan Series – Stair Mount Spigots

Adjustable Railing Spigots

270° Adjustable

TI8SQSTAIR

8" Stair Mount Spigot - Square

2" [50.00mm]
3 7/8" [100.00mm]
3 7/8" [100.00mm] (Glass Height From Ground)
4 1/8" [106.00mm]
2" [50.00mm]
7 7/8" [200.00mm]
4 1/8" [106.00mm]

Key Features

The clean architectural lines create a unique facade providing a very cost efficient modern solution for structural glass railings.

- **Height Adjustable:** Extra 1/2" adjustment for perfect glass alignment.
- **Tilt Adjustment:** ±3° flexibility for angled or horizontal installations.
- **Premium Material:** Duplex 2205 stainless steel with SS316 cover for top strength and corrosion resistance.
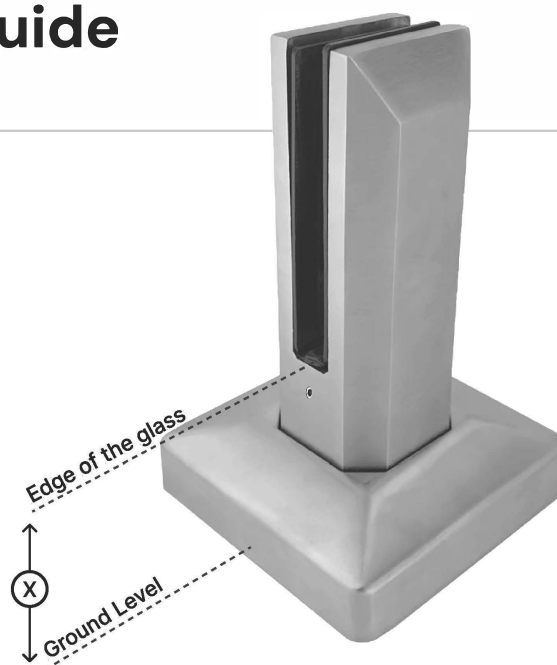- **Glass Compatibility:** Fits 12mm glass.

* For the most up-to-date product availability, visit our website.

96

www.ggshardware.com

■ P13 Frameless Shower Door   ■ P163 Storefront & Entrance System   ■ P261 Stock Glass Doors
■ P85 Railing Hardware   ■ P223 Door Rails & Architectural Hardware ■ P271 Glazing Supplies

02 Railing Hardware

Titan Series – Side Mount Spigots

Adjustable Railing Spigots

Architects Recommend

TISM

Side Mount Spigot

Key Features

The clean architectural lines create a unique facade providing a very cost efficient modern solution for structural glass railings.

- **Height Adjustable:** Extra 1/2" adjustment for perfect glass alignment.
- **Tilt Adjustment:** ±2° flexibility for angled or horizontal installations.
- **Premium Material:** Duplex 2205 stainless steel with SS316 cover for top strength and corrosion resistance.
- **Glass Compatibility:** Fits 12mm glass.
- Engineered and Stamped to meet **National Building Codes.**

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

02 Railing Hardware

Titan Series – Edge Mount Spigots

Adjustable Railing Spigots

TIEM

Edge Mount Spigot

Dimensions:
- $2\frac{1}{4}"$ [57.40mm]
- $4\frac{3}{8}"$ [112.20mm]
- $6\frac{3}{4}"$ [170.20mm]
- $5\frac{7}{8}"$ [150.10mm]
- $12\frac{5}{8}"$ [320.30mm]
- $\frac{7}{8}"$ [23.50mm]
- $3\frac{1}{8}"$ [80.00mm]

Key Features

The clean architectural lines create a unique facade providing a very cost efficient modern solution for structural glass railings.

- **Height Adjustable:** Extra 1/2" adjustment for perfect glass alignment.
- **Tilt Adjustment:** ±2° flexibility for angled or horizontal installations.
- **Premium Material:** Duplex 2205 stainless steel with SS316 cover for top strength and corrosion resistance.
- **Glass Compatibility:** Fits 12mm glass.
- Engineered and Stamped to meet **National Building Codes.**

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

02 Railing Hardware

Titan Series – Core Mount Spigots

Adjustable Railing Spigots

NEW

TICORE

Core Mount Spigot

Key Features

The clean architectural lines create a unique facade providing a very cost efficient modern solution for structural glass railings.

- **Height Adjustable:** Extra 1/2" adjustment for perfect glass alignment.
- **Tilt Adjustment:** ±3° flexibility for angled or horizontal installations.
- **Premium Material:** Duplex 2205 stainless steel with SS316 cover for top strength and corrosion resistance.
- **Glass Compatibility:** Fits 12mm glass.

Titan Series Spigot Height Guide
Adjustable Railing Spigots

X = Glass Height from Floor

Type of Spigot	Dimension (X)
6" Spigot	2-1/2" (63.5mm)
8" Spigot	3-3/8" (84.35 mm)
Core Mount Spigot	4" (100.74mm)
Edge Mount Spigot	2-1/4" (58mm)
Side Mount Spigot	1-1/2 (37mm)

Edge of the glass

X

Ground Level

Titan Series – Connectors & Accessories

Slim

CON180S
180° Glass-to-Glass

Slim

CON092S
90° Glass-to-Glass

Slim

DESIGNER'S APPROVED

CON90S
90° Wall-to-Glass

Slim

CON345S
Adjustable Glass-to-Glass

Slim

CON3WAY
Railing Connectors 3-Way
Glass-to-Glass

3" Length

**WEDGEANCHOR
-3/8X3**

Wedge Anchor
3/8" Diameter

5" Length

**WEDGEANCHOR
-3/8X5**

Wedge Anchor
3/8" Diameter

5" Length

LAGBOLT-3/8X5

Hex Lag Bolt

3-3/4" Length

HB12X3.75SS

Hanger Bolt for
Side Mount Spigots
- M12 X 3-3/4"
SS316

6" Lenght

HB12X6SS

Hanger Bolt for
Side Mount Spigots
- M12 X 6" SS316

Installation Socket
Side Mount Spigot

TISM-TOOL
Socket Tool

Thread Size: 3/8"-16 for a
precise and secure fit

TISCREW
Set Screw

* For the most up-to-date product availability, visit our website.

100

www.ggshardware.com

GGH LED Systems

Brushed
Anodized Aluminum

Matte Black
Anodized Aluminum

PRODUCT INFO

- Designed to fit into LED Pro-fit Spigot TI6SQADJ models
- Core in the base of spigot for simple light installation & replacement
- Integrated 1.5W RGB LED deck light set
- RGB, 16 light colors to choose from (speed & brightness adjustable)

- Sleek & modern design
- Life: 20,000 hours
- Waterproof rate of IP67
- 2205 Ultra Marine Grade Stainless Steel

- LED lighting can be changed without removing the spigot with a remote
- 4 mode settings - Flash, strobe, fade & smooth

MOODLEDKIT
LED Kit for Titan Series Spigot

KIT INSTALLATION METHOD

A.

B.

Transformer
converts 240v to 12v

RGB colour remote controller
Recommended to install the raised side of the inductor upwards, and do not block the induction signal by foreign objects

24 Metres of cable T-junctions
each 'T' distance is 1.5m

16*RGB lights
100mm light cable

16*Extension cable
250/455mm optional

RGB colour remote keypad

* For the most up-to-date product availability, visit our website.

101

www.ggshardware.com

Standoffs

| P13 Frameless Shower Door | P163 Storefront & Entrance System | P261 Stock Glass Doors |
| P85 Railing Hardware | P223 Door Rails & Architectural Hardware | P271 Glazing Supplies |

02 Railing Hardware

Arc Series – 4D Adjustable
Standoffs   Brushed Stainless   Matte Black   Satin Brass   More Finishes Online

PATENTED TECHNOLOGY · INNOVATIVE GUARANTEE

FAST • EASY • ENGINEERED

4D Base Adjustable
Oval shaped countersunk hole allow us to adjust Standoff base in four directions.

Height Adjustable
Standoff height can be adjusted for your panel projection needs.

Tilt Adjustable
Simple locking Angle with a standard Allen key - No special tools required.

Strong & Stable
Micro-adjustable for perfect glass alignment - Even after mounting.

Ultimate 4D Adjustable Standoffs

USE ONLY MONOLITHIC TEMPERED GLASS

Check out our video
Our video for easy installation tips and detailed product insights.

YouTube

Get a closer look at our hardware in action.

At Grey Goat Hardware, we don't just sell products — we show you how they work, install, and perform. Our YouTube channel features hands-on demonstrations, product highlights, installation tips, and project showcases — all designed to help you work smarter and spec with confidence.

Scan the QR Code to Watch
Or visit: www.youtube.com/@greygoathardware
Subscribe and stay updated on the latest innovations.

■ P13 Frameless Shower Door   ■ P163 Storefront & Entrance System   ■ P261 Stock Glass Doors
■ P85 Railing Hardware   ■ P223 Door Rails & Architectural Hardware   ■ P271 Glazing Supplies

02 Railing Hardware

Arc Series – 4D Adjustable

Standoffs

| | Brushed Stainless | | Matte Black | | Satin Brass | | More Finishes Online |

PATENTED TECHNOLOGY   **INNOVATIVE** GUARANTEE

Grey Goat Hardware Standoffs offer a sleek, durable solution for mounting glass, acrylic, or signage panels — ideal for both architectural and decorative applications.

- **Design Compliance:** Engineered to meet National Building Code
- **Patents Canada:** Patent No. 3113019 USA: Patent pending

- **Material:** High-grade Stainless Steel (AISI 316)
- **Glass Thickness Compatibility:** Suitable for 3/8" to 7/8" (10mm to 21.52mm) monolithic tempered glass
- **Glass Fabrication Requirement:** Ø7/8" (22.25mm)

Arc Series Standoff Round

STAMPED ENGINEERED STAMPED

Diameter	Height	SKU
1-1/2" Ø	1-1/4"	RDARC1.5X1.25
1-1/2" Ø	1-1/2"	RDARC1.5X1.5
2" Ø	1-1/4"	RDARC2X1.25
2" Ø	1-1/2"	RDARC2X1.5
2" Ø	2"	RDARC2X2

Arc Series & Accessories

- **Material:** High-grade Stainless Steel (AISI 316)
- **Glass Thickness Compatibility:** Suitable for 3/8" to 7/8" (10mm to 21.52mm) monolithic tempered glass
- **Glass Fabrication Requirement:** Ø7/8" (22.25mm)

Arc Series Standoff Square

STAMPED ENGINEERED STAMPED

X	Y	SKU
1-1/2"	1-1/2"	SQARC1.5X1.5
2"	2"	SQARC2X2

ARC-TOOL
T Wrench

BOLT-M10X84
Countersunk Anchor Bolts

SCREW-ST10X100
Countersunk Wood Screw

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

02 Railing Hardware

Solid Standoffs
Standoffs

- **Material:** High-grade Stainless Steel (AISI 316)
- **Glass Thickness Compatibility:** Suitable for 3/8" to 7/8" (10mm to 21.52mm) monolithic tempered glass
- **Glass Fabrication Requirement:** Ø7/8" (22.25mm)

Finishes

- Brushed Stainless
- Matte Black
- Satin Brass
- White
- Custom Finish Available

* : below mention, cap does not come with 1 inch Allen Screw.

Solid Round 1-1/2" Ø Standoffs

Diameter	Height	SKU
1-1/2" Ø **	1/4"	SSO1.5X0.25
1-1/2" Ø **	1/2"	SSO1.5X0.5
1-1/2" Ø **	3/4"	SSO1.5X0.75
1-1/2" Ø	1"	SSO1.5X1
1-1/2" Ø	1-1/4"	SSO1.5X1.25
1-1/2" Ø	1/2"	SSO1.5X1.5
1-1/2" Ø	2"	SSO1.5X2

Glass Fabrication: 3/4" (19mm) Ø (Suggested)*

Solid Round 2" Ø Standoffs

Diameter	Height	SKU
2" Ø **	1/4"	SSO2X0.25
2" Ø **	1/2"	SSO2X0.5
2" Ø **	3/4"	SSO2X0.75
2" Ø	1"	SSO2X1
2" Ø	1-1/4"	SSO2X1.25
2" Ø	1-1/2	SSO2X1.5
2" Ø	1-3/4"	SSO2X1.75
2" Ø	2"	SSO2X2
2" Ø	1/2" - 13 Thread	SSOH2X2
2" Ø	2-1/4"	SSO2X2.25
2" Ø	2-1/2"	SSO2X2.5
2" Ø	3"	SSO2X3
2" Ø	3-1/2"	SSO2X3.5

Glass Fabrication: 3/4" (19mm) Ø (Suggested)*

Solid Standoffs
Standoffs

- **Material:** High-grade Stainless Steel (AISI 316)
- **Glass Thickness Compatibility:** Suitable for 3/8" to 7/8" (10mm to 21.52mm) monolithic tempered glass
- **Glass Fabrication Requirement:** Ø7/8" (22.25mm)

Finishes

Brushed Stainless   Matte Black   Satin Brass   White   Custom Finish Available

Solid Square 2" x 2" Standoffs

Glass Fabrication: 3/4" (19mm) Dia (Suggested)*

Dimension	SKU
2" X 2"	SQSO2X2
2" X 1-1/2"	SQSO2X1.5

Solid Round Standoff Cap

Dimension	SKU
1-1/2"	SSOC1.5
2"	SSOC2

Clear   Black

SOGAS1.5-1
Gasket For Standoffs - 1.5" Ø- X 1 & 2 mm Thick

Clear   Black

SOGAS2-1
Gasket For Standoffs - 2" Ø- X 1 & 2 mm Thick

* For the most up-to-date product availability, visit our website.

107

www.ggshardware.com

Solid Standoff Base

Standoffs

Brushed Stainless   Matte Black   Satin Brass   White   Custom Finishes

2" (50mm) Ø

Solid Standoff Base - SS316 - Round

Diameter	Height	SKU
2" Ø	2"	SSOB2X2
2" Ø	1-1/2"	SSOB2X1.5
2" Ø	1-1/4"	SSOB2X1.25
2" Ø	1"	SSOB2X1
2" Ø	3/4"	SSOB2X0.75
2" Ø	1/2"	SSOB2X0.5
2" Ø	1/4"	SSOB2X0.25

1-1/2" (38mm) Ø

Solid Standoff Base - SS316 - Round

Diameter	Height	SKU
1-1/2" Ø	2"	SSOB1.5X2
1-1/2" Ø	1-1/2"	SSOB1.5X1.5
1-1/2" Ø	1-1/4"	SSOB1.5X1.25
1-1/2" Ø	1"	SSOB1.5X1
1-1/2" Ø	3/4"	SSOB1.5X0.75
1-1/2" Ø	1/2"	SSOB1.5X0.5
1-1/2" Ø	1/4"	SSOB1.5X0.25

Solid Round Standoff Cap

Diamater	SKU
1-1/2" Ø	SSOC1.5
2" Ø	SSOC2

* For the most up-to-date product availability, visit our website.

108

www.ggshardware.com

Hanger Bolts & Threaded Rod
Standoffs

Stainless Steel / Zinc

We provides 1" to 2" (X) threading for Hanger Bolt.

(X)

Hanger Bolt

Size	Material	SKU
2-1/2"	ZINC	HB38X2.5Z
3.5"	ZINC	HB38X3.5Z
4.5"	ZINC	HB38X4.5Z
2-1/2"	SS316	HB38X2.5SS
3"	SS316	HB38X3SS
3.5"	SS316	HB38X3.5SS
3-3/4"	SS316	HB12X3.75SS
4"	SS316	HB38X4SS
4.5"	SS316	HB38X4.5SS
5"	SS316	HB38X5SS
6"	SS316	HB12X6SS
6.5"	SS316	HB38X6.5SS

Stainless Steel

Threaded Rod

Size	Material	SKU
3/8" X 6"	SS316	TR38X6-SS316
1/2" X 6-1/4"	SS316	TR12X6.25SS

* For the most up-to-date product availability, visit our website.

109

www.ggshardware.com

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

02 Railing Hardware

Gaskets & Accessories
Standoffs

DRIVER-HANGERBOLT
Driver

SOWRENCH
Wrench

Super Duty Standoff Tightening Kit
For Easy & Safe Installation

SSOKIT
Standoffs Tightening Kit

BEST FOR ARC STANDOFFS

ARC-TOOL
T Wrench 10mm

BOLT-M10X84
SCREW-ST10X100
Countersunk Anchor Bolts & Wood Screw

Available In Clear & Black

SOGAS1.5-1   SOGAS1.5-2
SOGAS2-1   SOGAS2-2
Gasket For Standoffs - 1.5"Ø or 2"Ø (1 & 2 mm Thick)

Single Sheet & Pack of 10 Available

DESIGNER'S APPROVED

FAST GLASS TEMPLATING

5/32"

96"

48"

GGH GLAZING SUPPLY COMPANY

TEMPSHEET
Templating Sheet - Polypropylene Corrugated Plastic - (96" X 48" X 5/32")

P13 Frameless Shower Door	**P163** Storefront & Entrance System	**P261** Stock Glass Doors
P85 Railing Hardware	**P223** Door Rails & Architectural Hardware	**P271** Glazing Supplies

02 Railing Hardware

Standoffs With Mounting Plate
Standoffs

Finishes

Brushed Stainless Matte Black Custom Finishes

SSOPLATE2
2"Ø Standoffs with Mounting Plate

Product Overview

- **Features**: 2"Ø Standoff available in Side Mount.
- **Recommended Glass Thickness**: 1/2" (12mm).
- **Dimension**: 4" X 8" Back Plate.

6X Ø 3/8" [11.00mm]

Ø 2" [50.80mm]

8" [203.20mm]

4" [101.60mm]

3/8" [9.50mm]

Ø 3/4" [19.05mm]

1-3/4" [44.0mm]

3 3/8" [85.50mm]

3 3/8" [85.50mm]

4" [101.60mm]

2 3/4" [70.00mm]

4" [102.00mm]

* For the most up-to-date product availability, visit our website.

111

www.ggshardware.com

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

02 Railing Hardware

Display Standoffs

Finishes

- Brushed Stainless
- Satin Brass
- Matte Black
- Custom Finishes

Key Features

- **Material:** High-grade Stainless Steel (AISI 316)
- **Glass Thickness Compatibility:** Suitable for 3/8" to 7/8" (10mm to 21.52mm) monolithic tempered glass
- **Glass Fabrication Requirement:** Ø1/2" (12mm)

DESIGNER'S APPROVED

USE ONLY MONOLITHIC TEMPERED GLASS

Diameter	Base Height	SKU
3/4"	1/2"	DSO3412
3/4"	3/4"	DSO3434
3/4"	1"	DSO341
3/4"	1-1/2"	DSO34112
3/4"	2"	DSO342
3/4"	4"	DSO344

DSO3412 ✳
Display Standoff in 3/4" Ø

Diameter	Base Height	SKU
1-1/4"	1/2"	DSO11412
1-1/4"	3/4"	DSO11434
1-1/4"	1"	DSO1141
1-1/4"	1-1/2"	DSO114112
1-1/4"	2"	DSO1142
1-1/4"	4"	DSO1144

DSO11412 ✳
Display Standoff in 1-1/4" Ø

Cap Only
3.4"

DCAP34
Standoff Cap In 3/4" Dia

Cap Only
1-1/4"

DCAP114
Standoff Cap In 1-1/4" Dia

* For the most up-to-date product availability, visit our website.

112

www.ggshardware.com

Railing Glass Panels (1/2")

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

02 Railing Hardware

1/2" (12mm) Railing Glass Panel

Railing Glass Panels (1/2") Thickness

- CAN/CGSB 12.1-2017
- ANSI Z97.1-2015
- Certified by SGCC®

(Certification documents available upon request)

34" Height

Y Width

34" (863.6mm)

Glass Panel

Perfect for Solid Round 1-1/2" Ø Standoffs

Dimension	SKU
18X34	RG18X34
22X34	RG22X34
26X34	RG26X34
30X34	RG30X34
34X34	RG34X34
36X34	RG36X34
42X34	RG42X34
44X34	RG44X34
48X34	RG48X34
50X34	RG50X34
54X34	RG54X34
56X34	RG56X34
60X34	RG60X34
66X34	RG66X34
72X34	RG72X34

41" Height

Y Width

41" (1041.4mm)

Glass panel

Perfect for Solid Round 2" Ø Standoffs

Dimension	SKU	Dimension	SKU
12X41	RG12X41	44X41	RG44X41
14X41	RG14X41	46X41	RG46X41
16X41	RG16X41	48X41	RG48X41
18X41	RG18X41	50X41	RG50X41
20X41	RG20X41	52X41	RG52X41
22X41	RG22X41	54X41	RG54X41
24X41	RG24X41	56X41	RG56X41
26X41	RG26X41	58X41	RG58X41
28X41	RG28X41	60X41	RG60X41
30X41	RG30X41	62X41	RG62X41
32X41	RG32X41	64X41	RG64X41
34X41	RG34X41	66X41	RG66X41
36X41	RG36X41	68X41	RG68X41
38X41	RG38X41	70X41	RG70X41
40X41	RG40X41	72X41	RG72X41
42X41	RG42X41		

* For the most up-to-date product availability, visit our website.

114

www.ggshardware.com

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

02 Railing Hardware

1/2" (12mm) Railing Glass Panel

Railing Glass Panels (1/2") Thickness

- CAN/CGSB 12.1-2017
- ANSI Z97.1-2015
- Certified by SGCC®

(Certification documents available upon request)

46" Height

Y Width

46" (1168.4mm)

Glass Panel

Dimension	SKU
32X46	RG32X46
48X46	RG48X46
54X46	RG54X46
60X46	RG60X46
70×46	RG70X46
72X46	RG72X46

1/2" (12mm) Railing Glass Panel With Hinge Cutout only

46" Height With Hinge Cutout

Y Width

6" (152.4mm)

Glass Panel

34" (863.6mm)

46" (1186.4mm)

HULK Series
Hydraulic Hinge

Or

6" (152.4mm)

Dimension	SKU
32X46	RG32X46-2H
48X46	RG48X46-2H
54X46	RG54X46-2H
60X46	RG60X46-2H

1/2" (12mm) Railing Glass Panel With Hinge & Latch Cutout

Railing Glass Panels (1/2") Thickness

RG32X46-2HL

1/2" Railing Glass Panel (Size: 32" x 46") With Hinge & Latch Cutout

Refer to local building codes for product compliance and installation requirements.

Factory Order Program

Factory Direct Savings on Volume Orders

Take advantage of our Factory Direct Program and save big on large-scale shower door orders. Whether you're working on condos, high-rises, or residential developments, we make the process easy, fast, and cost-effective

What You Get

01 Full Crates of Glass Shipped Directly to You

- Delivered fast and hassle-free - right to your shop or job-site.

02 Order Today – Just Give Us a Call

- Our team is ready to assist with quotes, coordination, and delivery planning.

Contact us to enroll: **sales@ggshardware.com**

Speak with our program manager: **1-905-264-1600**

Ask about our MOQ charts, lead time options, and program perks.

Pro Series – Engineered

Architectural Railing Post – Blank

Pro Series - Engineered

Finishes

Brushed Stainless   Matte Black   Custom Finishes

*All Post Endcaps and Saddle Support Sold Separately

Square

1-9/16" X 1-9/16"

Sold Separate

44"
(1117mm)

□ 1 9/32"
□ [40.5mm]

□ 3 15/16"
□ [100.0mm]

4 X Ø 7/16"
(4 X Ø11.0mm)

□ 2 5/16"
□ [75.0mm]

POST DETAILS-TOP VIEW

← Base Plate With Cap Included

SPRO44B

Square Pro Series Railing Post - 44" Height

Specification

- **Material:** Constructed from high-quality Stainless Steel 316, offering superior durability and resistance to corrosion.
- **Customizable Design:** Blank posts with no pre-drilled holes, allowing for fabrication based on project-specific needs.
- **Applications:** Ideal for both residential and commercial installations, suitable for interior and exterior use.
- **Warranty:** Backed by a full 5-year warranty for peace of mind.
- **Compliance:** Engineered to meet Ontario and National Building Code requirements.
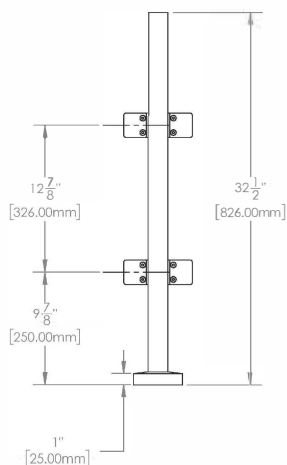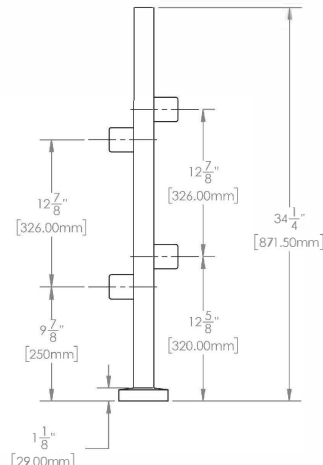

Square

2" X 2"

50"
(1270mm)

*2"X2" post allows for gate post with small picture of Hulk Hinge

page number: ___

□ 2"
□ [50.00mm]

□ 3 15/16"
□ [100.0mm]

4 X Ø 7/16"
(4 X Ø11.0mm)

□ 2 5/16"
□ [75.0mm]

POST DETAILS-TOP VIEW

← Base Plate With Cap Included

SPRO50B

Square Pro Series Railing Post - 50" Height - Blank

Round

1-11/16" Ø

Sold Separate

44"
(1117mm)

Ø 100mm

Ø 40mm

4 x Ø 11mm

← Base Plate With Cap Included

RPRO44B

Round Pro Railing Post - 44" Base Height - Blank

---

* For the most up-to-date product availability, visit our website.

118

www.ggshardware.com

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

02 Railing Hardware

Architectural Railing Posts – Square (32"–42")

Pro Series - Engineered

Finishes

Brushed Stainless   Matte Black   More Finishes Online

*All Post Endcaps and Saddle Support Sold Separately

End Post

9 27/32" (250mm)

32"–42"

9 27/32" (250mm)

Inline Post

9 27/32" (250mm)

32"–42"

9 27/32" (250mm)

Corner Post

9 27/32" (250mm)

32"–42"

9 27/32" (250mm)

Available Height	SKU	Available Height	SKU	Available Height	SKU
32" (812.8mm)	SPRO32E	32" (812.8mm)	SPRO32I	32" (812.8mm)	SPRO32C
36" (914.4mm)	SPRO36E	36" (914.4mm)	SPRO36I	36" (914.4mm)	SPRO36C
38" (978mm)	SPRO38E	38" (978mm)	SPRO38I	38" (978mm)	SPRO38C
42" (1067mm)	SPRO42E	42" (1067mm)	SPRO42I	42" (1067mm)	SPRO42C

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

02 Railing Hardware

Architectural Railing Posts – Round (32"-42")

Pro Series - Engineered

Finishes

Brushed Stainless   Matte Black   Custom Finishes

*All Post Endcaps and Saddle Support Sold Separately

ENGINEERED GUARANTEE

End Post

9 27/32"
(250mm)

32"-42"

9 27/32"
(250mm)

Inline Post

9 27/32"
(250mm)

32"-42"

9 27/32"
(250mm)

Corner Post

9 27/32"
(250mm)

32"-42"

9 27/32"
(250mm)

Available Height	SKU	Available Height	SKU	Available Height	SKU
32" (812.8mm)	RPRO32E	**32"** (812.8mm)	RPRO32I	**32"** (812.8mm)	RPRO32C
36" (914.4mm)	RPRO36E	**36"** (914.4mm)	RPRO36I	**36"** (914.4mm)	RPRO36C
38" (978mm)	RPRO38E	**38"** (978mm)	RPRO38I	**38"** (978mm)	RPRO38C
42" (1067mm)	RPRO42E	**42"** (1067mm)	RPRO42I	**42"** (1067mm)	RPRO42C

* For the most up-to-date product availability, visit our website.

120

www.ggshardware.com

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

02 Railing Hardware

Architectural Railing Posts – Side Mount

Pro Series - (Order On Request)

Finishes

- Brushed Stainless
- Matte Black
- More Finishes Online

FEATURE PRODUCTS

Custom Fabrication Available

End Post

Inline Post

Corner External Post

Corner Internal Post

SPROSIDEE
Side Mount Square Pro Railing Post
CUSTOM - End Post

SPROSIDEI
Side Mount Square Pro Railing Post
CUSTOM - Inline Post

SPROSIDEEXT
Side Mount Square Pro Railing Post
CUSTOM - External Post

SPROSIDEINT
Side Mount Square Pro Railing Post
CUSTOM - Internal Post

Custom Side Mount Post Requirements:

A: Distance from top of the post to 1st clamp.
B: Distance between clamp to clamp.
C: Distance from 2nd clamp to bottom of the post.
H: Total height of the post.

X: Width of the Mounting Plate.
Y: Height of the Mounting Plate.
T: Thickness of the Mounting Plate.
G: Hole distance from edge of the plate.

End Post   **Inline Post**   **90° Inside Post**   **90° Outside Post**

* For the most up-to-date product availability, visit our website.

121

www.ggshardware.com

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

02 Railing Hardware

Architectural Railing Post – For Stairs
Pro Series

Finishes

Brushed Stainless
Matte Black
Custom Finishes

Specification

Made from heavy-gauge 316 stainless steel for superior corrosion resistance, this 40×40mm (1.57"x1.57") post stands 32" tall, with 36", 38", and 42" options available. Includes gaskets for 10mm (3/8") and 12mm (1/2") toughened glass.

Inline Stair

Custom Fabrication Available

12 56/64" (326mm)

12 56/64" (326mm)

9 54/64" (250mm)

12 38/64" (320mm)

SPRO32STAIR

32" Base Height - Inline

Specification

- **Material:** Constructed from high-quality Stainless Steel 316, offering superior durability and resistance to corrosion.

- **Various Configuration:** Available with per-fabricated clamps for Inline, Corner and end post.

- **Applications:** Ideal for both residential and commercial stair glass panels installations, suitable for interior and exterior use.

- **Warranty:** Backed by a full 5-year warranty for peace of mind.

- **Compliance:** Engineered to meet Ontario and National Building Code requirements.

Custom Fabrication Available based on your requirement, send us quote on **products@ggshardware.com**

Inline Ground

$12\frac{7}{8}$" [326.00mm]

$32\frac{1}{2}$" [826.00mm]

$9\frac{7}{8}$" [250.00mm]

1" [25.00mm]

Inline Stair

$12\frac{7}{8}$" [326.00mm]

$12\frac{7}{8}$" [326.00mm]

$34\frac{1}{4}$" [871.50mm]

$9\frac{7}{8}$" [250mm]

$12\frac{5}{8}$" [320.00mm]

$1\frac{1}{8}$" [29.00mm]

End Post

$12\frac{7}{8}$" [326.00mm]

$34\frac{1}{4}$" [871.50mm]

$12\frac{5}{8}$" [320.00mm]

$1\frac{1}{8}$" [29.00mm]

* For the most up-to-date product availability, visit our website.

122

www.ggshardware.com

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

02 Railing Hardware

Architectural Railing Post – Accessories

Pro Series - Engineered

Finishes

Brushed Stainless   Matte Black   More Finishes Online

SPROBASE
Base Plate for Square Posts

CP40SQ
Coverplate for Square Post

RPROSUP
Handrail Support - Round

RPROSUPADJ
Handrail Support - Round - Adjustable

SPROSUP
Handrail Support - Square

SPROSUPADJ
Handrail Support - Square - Adjustable

FLATSAD135
Flat Saddle - 135°

FLATSAD180
Flat Saddle - 180°

FLATSAD90
Flat Saddle - 90°

3" Length

WEDGEANCHOR-3/8X3
Wedge Anchor 3/8" Diameter

3/8"

LAGBOLT-3/8X3
Hex Lag Bolt - 3/8" X 3-1/2"

USE ONLY MONOLITHIC TEMPERED GLASS

Architectural Railing Posts – Double Arm Posts

Double Arm Posts

Finishes

Brushed Stainless   Matte Black   Custom Finishes

Custom Fabrication Available

ADJ-RD

As Per Required

44" (1117mm)

As Per Required

RPROARM-44ADJ
Adjustable Round Post - 44" Height

ADJ-SQ

As Per Required

44" (1117mm)

As Per Required

SPROARM-44ADJ
Adjustable Square Post - 44" Height

Round

As Per Required

44" (1117mm)

As Per Required

RPROARM-44
Fixed Round Post - 44" Height

Square

As Per Required

44" (1117mm)

As Per Required

SPROARM-44
Fixed Square Post - 44" Height

ADJ-SQ

As Per Required

50" (1270mm)

As Per Required

SPROARM-50ADJ
Adjustable Square Post - 50" Height

Square

As Per Required

50" (1270mm)

As Per Required

SPROARM-50
Fixed Square Post - 50" Height

---

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

02 Railing Hardware

Double Arm Connector

DESIGNER'S APPROVED

Finishes

Brushed Stainless Steel   Matte Black Anodized Aluminum   Custom Finishes

- **Premium Material:** Made from high-quality stainless steel for strength and long-lasting performance.
- **Glass Compatibility:** Suitable for 1/2" to 13/16" (12mm to 20mm)thick glass.

Adjustable

PROARMADJ

Pro Series Double Arm Glass Connector - Adjustable

Fixed

PROARM

Pro Series Double Arm Glass Connector - Fixed

Canopy Bracket

GREAT VALUE   FEATURE PRODUCTS

Finishes

Brushed Stainless Steel   Matte Black Anodized Aluminum   Custom Finishes

*Custom configuration and size available based upon request products@ggshardware.com

Custom Fabrication Available

24"

GC2401

Glass Canopy Bracket (24" Height)

36"

GC3601

Glass Canopy Bracket (36" Height)

Ask us about
FACTORY DIRECT PROGRAM

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

Railing Mini Post

*Engineered for nationala nd building code

Finishes

Brushed Stainless

Matte Black

Custom Finish Available

- **Compact Design:** Mini posts measure 3/4" x 2" with a total height of 12" (including surface mount plate).
- **Strong Surface Mount Plate:** 5-1/2" x 3" x 3/4" base for secure installation.
- **Glass Compatibility:** Recommended for 1/2" (12mm) glass panels.

SS316

12"(304.8mm)

MINIPRO

Railing Mini Post - Surface Mount
Glass fabrication required, visit ggshardware.com for reference

---

SS316

21"(533.4mm)

MINIPROSM

Railing Mini Post - Side Mount
Glass fabrication required, visit ggshardware.com for reference

---

Divider Series – Partition Post

Finishes

Brushed Stainless   Matte Black   Custom Finishes

Specification:

- **Versatile Use:** Ideal for creating sleek, modern glass partition systems in office desk, commercial, or residential spaces.
- **Profile Options:** Available in both End-to-End Glass and Air Space Glass profile configurations to suit your design and privacy requirements.

PPOST1
Partition Post - 1 Way

PPOST2C
Partition Post - 2 Way Corner

PPOST3
Partition Post - 3 Way

PPOST2I
Partition Post - 2 Way Inline

PPOST4
Partition Post - 4 Way

PPOSTH1
Air Gap Partition Post 1 Way

PPOSTH2C
Air Gap Partition Post - 2 Way Corner

PPOSTH3
Air Gap Partition Post 3 Way

PPOSTH2I
Air Gap Partition Post - 2 Way Inline

PPOSTH4
Air Gap Partition Post 4 Way

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

02 Railing Hardware

G–AWS Aluminum Windscreen System

Overview

The Windscreen Awning System is a modern, durable solution for creating glass wind barriers in residential and commercial outdoor spaces.

Ask us about
FACTORY DIRECT PROGRAM

Key Features

- Clean, contemporary design with minimal hardware for unobstructed views
- Low-maintenance aluminum construction with corrosion-resistant finish
- Supports both dry and wet glazing methods, depending on glass thickness
- Suitable for installation on concrete slabs, block walls, or individual footings
- Adaptable to flat, sloped, or stepped surfaces
- Ideal for decks, patios, balconies, and poolside enclosures
- Standard color options available, with custom finishes upon request
- Compatible with phased construction timelines for added flexibility

02 RAILING HARDWARE

Railing Clamps

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

02 Railing Hardware

Square Railing Clamps
CLAM Series - SS316 & ZINC

Finishes

Brushed Stainless

Polished Stainless

Matte Black

SS316

SCLAM
Square Clamp - 55×55mm - Flat Back

SS316

SCLAMRB
Square Clamp - 61×55mm - Round Back

SS316

SCLAM54
Square Clamp - 54×54mm - Flat Back

ZINC

SCLAMZ
Square Clamp - 55×55mm - Flat Back

High-Quality Stainless Steel Clamps for Secure Glass Installation

- **Material:** Constructed with high-grade SS316 stainless steel, offering exceptional corrosion resistance for both indoor and outdoor use.
- **Glass Compatibility:** Designed to securely hold 10mm (3/8 inch) and 12mm (1/2 inch) thick monolithic tempered glass.

Round Railing Clamps
CLAM Series - SS316 & ZINC

INSTALLER'S FAVORITE!
GOAT Drill & Spade Bits,
Refer Page Number: 272

SS316

RCLAMFB
Round Clamp - 63×45mm - Flat Back

SS316

RCLAM
Round Clamp - 67×45mm - Round Back

---

* For the most up-to-date product availability, visit our website.

130

www.ggshardware.com

■ **P13** Frameless Shower Door	■ **P163** Storefront & Entrance System	■ **P261** Stock Glass Doors
■ **P85** Railing Hardware	■ **P223** Door Rails & Architectural Hardware	■ **P271** Glazing Supplies

02 Railing Hardware

Railing Clamps Accessories

CLAM Series - SS316

INSTALLER'S FAVORITE!
GOAT Drill & Spade Bits,
Refer Page Number: 272

Finishes

Brushed Stainless	Polished Stainless	Matte Black

SCLAMCONSQ
Adjustable 180° Connector
For Square Post

Swevel

SCLAMCONRD
Adjustable 180° Connector
For Round Post

Swevel

CLAMSAFETYPIN
Extra Pair of Safety Pin

SCREW-M8X20
Replacement Allen Screws

SCLAMRUB
Rubber Inserts

Dimension	SKU(PAIR)
12mm Glass	SCLAMRUB12
10mm Glass	SCLAMRUB10
8mm Glass	SCLAMRUB8
6mm Glass	SCLAMRUB6

RCLAMRUB
Rubber Inserts

Dimension	SKU(PAIR)
12mm Glass	RCLAMRUB12
10mm Glass	RCLAMRUB10
8mm Glass	RCLAMRUB8
6mm Glass	RCLAMRUB6

* For the most up-to-date product availability, visit our website.

131

www.ggshardware.com

Pool Fencing – Brackets

Railing Clamps

Finishes

Brushed Stainless   Polished Stainless   Matte Black

Key Features

- **Materials:** Crafted from premium Stainless Steel 316 for superior strength and corrosion resistance
- **Applications:** Ideal for pool fencing, offering a modern and secure enclosure for both residential and non-residential properties
- **Glass Compatibility:** Suitable for 5/16" to 1/2" (8mm, 10mm, and 12mm) monolithic tempered glass

BDIVESQ90

Pool Fencing Bracket 90° Glass to Glass - Square

BDIVE90

Pool Fencing Bracket 90° Glass to Glass - Round

CLAMSAFETYPIN
Extra Pair of Safety Pin

CLAMSAFETYPIN
Extra Pair of Safety Pin

BDIVE180SQ

Pool Fencing Bracket 180° Glass to Glass - Square

BDIVE180RD

Pool Fencing Bracket 180° Glass to Glass - Round

---

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

Railing Handrails & Caprails

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

02 Railing Hardware

Handrail – Round – 1–5/8" (42.4mm) Ø

Handrails & Caprails (19FT)

Finishes

Brushed Anodized Aluminum

Matte Black Anodized Aluminum

Custom Finishes Available

- **Premium Material**: Constructed from SS316 stainless steel for durability and long-term performance.
- **Standard Sizing**: 42.4mm (1-5/8") outer diameter with a 1.85mm wall thickness, available in a 19FT length.

Custom Fabrication Available

1-5/8" Ø

HR42.4

42.4mm Ø Round Handrail - 19' Length

END42.4

Endcap for Handrail

END42.4B

Ball Endcap for Handrail

E42.4F180

Handrail Elbow - 180° Fixed

CP42.4

Cover Plate Handrail

E42.4WELD90

Handrail Elbow 90° Welded

E42.4F90

Handrail Elbow 90° Fixed

E42.4MT90

Handrail Elbow 90° Mitered

E42.4ADJ90

Handrail Elbow 90° Adjustable

END42.4C

Handrail Elbow Curved

* For the most up-to-date product availability, visit our website.

134

www.ggshardware.com

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

02 Railing Hardware

Handrail – Round – 1–5/8" (42.4mm) Ø

Handrails & Caprails (19FT)

Finishes

Brushed Anodized Aluminum

Matte Black Anodized Aluminum

Custom Finishes

- **Premium Material:** Constructed from SS316 stainless steel for durability and long-term performance.
- **Standard Sizing:** 42.4mm (1-1/2") outer diameter with a 1.85mm wall thickness, available in a 19FT length.

Custom Fabrication Available

E42.4T180

42.4mm Handrail Elbow T-Shape 180°

E42.4T90

42.4mm Handrail Elbow T-Shape 90°

E42.4F135

42.4mm Handrail Elbow Fixed 135°

50° Adjustable Elbow

E42.4ADJR

42.4mm Handrail Elbow Adjustable Right

50° Adjustable Elbow

E42.4ADJL

42.4mm Handrail Elbow Adjustable Left

360° ROTATABLE ELBOW

E42.4R360

42.4mm Handrail Elbow Rotating 360°

RPROSUP

Handrail Support - Round

RPROSUPADJ

Handrail Support Round - Adjustable

WF42.4ADJ

Wall Mount Flange 42.4mm Handrail -Adjustable

INNOVATIVE GUARANTEE

WF42.4HD

Wall Mount Flange - 42.4mm Handrail - Heavy Duty

Handrail – Round – 1–1/2" (38.1mm) Ø

Handrails & Caprails (19FT)

Finishes

Brushed Anodized Aluminum

Matte Black Anodized Aluminum

Custom Finishes Available

- **Premium Material**: Constructed from SS316 stainless steel for durability and long-term performance.
- **Standard Sizing**: 1-1/2" (38.1mm) outer diameter with a 1.85mm wall thickness, available in a 19FT length.

Custom Fabrication Available

1-1/2" Ø

HR38.1
38.1mm Ø Round Handrail - 19' Length

END38.1
Endcap for Handrail

E38.1F90
Handrail Elbow - 90° Fixed

E38.1MT90
Handrail Elbow - 90° Mitered

E38.1ADJ90
Handrail Elbow 90° Adjustable

E38.1F180
Handrail Elbow 180° Fixed

E38.1F135
Handrail Elbow 135° Fixed

RPROSUP
Handrail Support - Round

RPROSUPADJ
Handrail Support - Round - Adjustable

INSTALLER'S FAVORITE!
GOAT Drill & Spade Bits, Refer Page Number: 272

* For the most up-to-date product availability, visit our website.

136

www.ggshardware.com

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

02 Railing Hardware

Handrail – Square – 1–9/16" (40mm)

Handrails & Caprails (19FT)

Finishes

Brushed Anodized Aluminum

Matte Black Anodized Aluminum

Custom Finishes Available

- **Premium Material**: Manufactured from high-gauge SS316 stainless steel for superior strength and corrosion resistance.
- **Standard Sizing**: 40mm x 40mm (1-5/8") square profile, available in a 19FT length.

Custom Fabrication Available

1-5/8"

HR40SQ
40mm Square Handrail - 19' Length

END40SQ
Endcap for 40mm Handrail

E40F90
40mm Square Handrail Elbow Fixed 90°

E40ADJ90
40mm Square Handrail Elbow Adjustable 90°

E40F180
40mm Square Handrail Elbow Fixed 180°

CP40SQ
40mm Square Handrail Cover Plate

WF40SQHD
Wall Mount Flange 40mm Square - Handrail - HD

WF40ADJ
Wall Mount Flange 40mm Handrail - Adjustable

SPROSUP
Handrail Support - Square

SPROSUPADJ
Handrail Support - Square - Adjustable

* For the most up-to-date product availability, visit our website.

137

www.ggshardware.com

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

02 Railing Hardware

Handrail – Rectangle – 2" X 1" (50x25mm)
Handrails & Caprails (19FT)

Custom Fabrication Available

Finishes

Brushed Stainless Steel
Matte Black Anodized Aluminum
More Finishes Online

- **Premium Material:** Constructed from SS316 stainless steel for enhanced strength and longevity.
- **Standard Sizing:** 2" x 1", available in a 19FT length.

2" X 1"

HR2X1

2 X 1" Rectangle Handrail - 19' Length

END2X1

Endcap for 2X1" Square Handrail

E2X1F90H

Elbow - 2X1" SQ Handrail Fixed 90° Horizontal

E2X1F90V

Elbow For 2X1" SQ Handrail Fixed 90° Vertical

E2X1F180

Elbow For 2X1" SQ Handrail Fixed 180°

E2X1ADJV

Elbow For 2X1" SQ Handrail Adjustable Vertical 90°

E2X1ADJH

Elbow For 2X1" SQ Handrail Adjustable Horizontal 90°

SPROSUP

Handrail Support - Square

SPROSUPADJ

Handrail Support - Square - Adjustable

* For the most up-to-date product availability, visit our website.

138

www.ggshardware.com

P13 Frameless Shower Door P163 Storefront & Entrance System P261 Stock Glass Doors
P85 Railing Hardware P223 Door Rails & Architectural Hardware P271 Glazing Supplies

02 Railing Hardware

Caprail – Round – 1–5/8" (42.4mm) Ø

Handrails & Caprails (19FT)

Custom Fabrication Available

Finishes

Brushed Stainless Steel
Matte Black Anodized Aluminum
More Finishes Online

- **Premium Material**: Constructed from SS316 stainless steel for enhanced strength and longevity.
- **Standard Sizing**: 1-5/8" outside diameter, available in a 19FT length.

1-5/8"Ø

*Refer to our website for LED options

CR42.4
42.4 Ø Round Caprail - 19' Length

CEND42.4
Endcap for Caprail

WFC42.4
Wall Mount Flange for Caprail

CE42.4F180
Elbow For Caprail - 180° Fixed

CE42.4F90H
Elbow For Caprail - 90° Fixed Horizontal

CE42.4F90V
Elbow For Caprail - 90° Fixed Vertical

CE42.4ADJDN
Elbow For Caprail - Adjustable Downward

10 mm to 21 mm

Dimension	SKU
10mm (19')	CRUB10
12mm (19')	CRUB12
15mm (19')	CRUB15
17mm (19')	CRUB17
19mm (19')	CRUB19
21mm (19')	CRUB21

CRUB
Rubber - 19' Length

CE42.4ADJUP
Elbow For Caprail - Adjustable Upward

* For the most up-to-date product availability, visit our website.

139

www.ggshardware.com

|		
■ **P13** Frameless Shower Door	■ **P163** Storefront & Entrance System	■ **P261** Stock Glass Doors
■ **P85** Railing Hardware	■ **P223** Door Rails & Architectural Hardware	■ **P271** Glazing Supplies

02 Railing Hardware

Caprail – Square – 1–5/8" – (40x40mm)

Handrails & Caprails (19FT)

Finishes

| Brushed Stainless Steel	Matte Black Anodized Aluminum	More Finishes Online

- **Premium Material:** Manufactured from high-gauge Stainless Steel 316 for superior corrosion resistance.
- **Modern Square Profile:** 40mm x 40mm (1-5/8") dimensions offer a sleek, contemporary look in 19'

Custom Fabrication Available

40mm Sqaure

*Refer to our website for LED options

CR40SQ

40mm Square Caprail
19' Length

CEND40SQ

Endcap For Caprail

WFC40SQ

Wall Mount Flange For Caprail

10 mm to 21 mm

CRUB

Rubber - 19' Length

Dimension	SKU
10mm (19')	CRUB10
12mm (19')	CRUB12
15mm (19')	CRUB15
17mm (19')	CRUB17
19mm (19')	CRUB19
21mm (19')	CRUB21

CE40F180

Elbow - 180° Fixed

CE40F90H

Elbow - 90° Fixed Horizontal

CE40F90V

Elbow - 90° Fixed Vertical

CE40ADJDN

Elbow - Adjustable Downward

CE40ADJUP

Elbow - Adjustable Upward

CP40SQ

Cover Plate - 40mm Square Caprail

* For the most up-to-date product availability, visit our website.

140

www.ggshardware.com

P13 Frameless Shower Door	**P163** Storefront & Entrance System	**P261** Stock Glass Doors
P85 Railing Hardware	**P223** Door Rails & Architectural Hardware	**P271** Glazing Supplies

02 Railing Hardware

Caprail – Rectangle – 2-3/8"x1-9/16" (60X40mm)
Handrails & Caprails (19FT)

Finishes

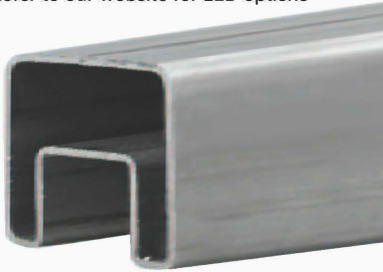Brushed Stainless Steel

Matte Black Anodized Aluminum

More Finishes Online

- **Premium Construction:** Made from 316 stainless steel for long-lasting durability and resistance to corrosion.
- **Modern Rectangular Design:** 60×40mm profile enhances architectural aesthetics.

2-3/8"x1-9/16"

*Refer to our website for LED options

CR60X40
60X40mm Rectangle Caprail
19' Length

CEND60X40
Endcap For Caprail

LED Options Available

Custom Fabrication Available

* For the most up-to-date product availability, visit our website.

141

www.ggshardware.com

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

02 Railing Hardware

Caprail – Square – 1"x1" (25x21mm)

Handrails & Caprails (19FT)

Custom Fabrication Available

Finishes

Brushed Stainless Steel

Matte Black Anodized Aluminum

More Finishes Online

- **High-Quality Material:** Made from 316 stainless steel for superior corrosion resistance and durability.
- **Versatile Design:** Suitable for a variety of railing applications, including both commercial and residential spaces.
- **Customizable Length:** Available in a 19FT length, with options for custom cutting and fabrication.

1"x1" *Refer to our website for LED options

CR1X1SQ

1 X 1" Square Caprail - 19' Length

CRUB12S

Small Rubber For Caprail

CEND1X1SQ

Endcap For Caprail

CE1X1F180

Elbow For Caprail
180° Fixed

WF1X1A

Wall Mount Flange
For 1 X 1" Caprail - Type A

CE1X1F90H

Elbow For Caprail
Fixed 90° Horizontal

CE1X1ADJ135H

Elbow For Caprail
Adjustable 135° Horizontal

CE1X1ADJ90V

Elbow For Caprail
Adjustable 90° Vertical

WF1X1B

Wall Mount Flange for 1 X 1" Caprail - Type B

* For the most up-to-date product availability, visit our website.

142

www.ggshardware.com

| P13 Frameless Shower Door | P163 Storefront & Entrance System | P261 Stock Glass Doors |
| P85 Railing Hardware | P223 Door Rails & Architectural Hardware | P271 Glazing Supplies |

02 Railing Hardware

Aluminum Caprail – Round 1–5/8" (42.4mm) Ø

Handrails & Caprails (19FT)

Custom Fabrication Available

Finishes

Brushed Stainless Steel

Matte Black Anodized Aluminum

More Finishes Online

- **Material:** Corrosion-resistant 6063-T5 aluminum for long-lasting durability.
- **Glass Compatibility:** Suitable for glass thicknesses of 10-21.52mm.
- **Available Finishes:** Satin Anodized and Matte Black.
- Lighter and Easier to Fabricate

INNOVATIVE GUARANTEE GUARANTEE

1-5/8" Ø

*Refer to our website for LED options

ALCRRD
42.4mm Ø Round Caprail - 19' Length

ALWFRD
Aluminum Caprail - Round Wall Flange

ALCENDRD
Aluminum Caprail - Round End Cap

Fixed

ALCR90
Aluminum Caprail - 90° Connector

Fixed

ALCR180
Aluminum Caprail - 180° Connector

Adjustable

ALCRADJH
Aluminum Caprail - Horizontal Connector

Adjustable

ALCRADJV
Aluminum Caprail - Vertical Connector

10 mm to 21 mm

CRUB
Rubber Gasket - 19' Length

Dimension	SKU
10mm (19')	CRUB10
12mm (19')	CRUB12
15mm (19')	CRUB15
17mm (19')	CRUB17
19mm (19')	CRUB19
21mm (19')	CRUB21

* For the most up-to-date product availability, visit our website.

143

www.ggshardware.com

P13 Frameless Shower Door **P163** Storefront & Entrance System **P261** Stock Glass Doors
P85 Railing Hardware **P223** Door Rails & Architectural Hardware **P271** Glazing Supplies

02 Railing Hardware

Aluminum Caprail – Square – 1–9/16" (40mm)
Handrails & Caprails (19FT)

Finishes

Brushed Stainless Steel

Matte Black Anodized Aluminum

Custom Finishes

- **Material:** Corrosion-resistant 6063-T5 aluminum for long-lasting durability.
- **Glass Compatibility:** Suitable for glass thicknesses of 10-21.52mm.
- **Available Finishes:** Satin Anodized and Matte Black.
- Lighter and Easier to Fabricate

1-9/16"

*Refer to our website for LED options

ALCRSQ
Square Aluminum Caprail - 19' Length

ALWFSQ
Aluminum Caprail Square Wall Flange

ALCENDSQ
Aluminum Caprail - Square End Cap

Fixed

ALCR90
Aluminum Caprail - 90° Connector

Fixed

ALCR180
Aluminum Caprail 180° Connector

Adjustable

ALCRADJH
Aluminum Caprail - Horizontal Adjustable Connector

Adjustable

ALCRADJV
Aluminum Caprail - Vertical Adjustable Connector

Custom Fabrication Available

10 mm to 21 mm

CRUB
Rubber Gasket - 19' Length

Dimension	SKU
10mm (19')	CRUB10
12mm (19')	CRUB12
15mm (19')	CRUB15
17mm (19')	CRUB17
19mm (19')	CRUB19
21mm (19')	CRUB21

* For the most up-to-date product availability, visit our website.

144

www.ggshardware.com

| P13 Frameless Shower Door | P163 Storefront & Entrance System | P261 Stock Glass Doors |
| P85 Railing Hardware | P223 Door Rails & Architectural Hardware | P271 Glazing Supplies |

02 Railing Hardware

Aluminum Caprail – Rectangle

Handrails & Caprails (19FT)

Finishes

Brushed Stainless Steel	Matte Black Anodized Aluminum	More Finishes Online

- **Material:** Corrosion-resistant 6063-T5 aluminum for long-lasting durability.
- **Glass Compatibility:** Suitable for glass thicknesses of 10-21.52mm.
- **Available Finishes:** Satin Anodized and Matte Black.
- **Lighter and Easier to Fabricate**

INNOVATIVE GUARANTEE GUARANTEE

Square

*Refer to our website for LED options

ALCRREC

Rectangular Aluminum Caprail - 19' Length

ALWFREC

Aluminum Caprail - Rectangular Wall Flange

ALCENDREC

Aluminum Caprail - Rectangular End Cap

Fixed

ALCR90

Aluminum Caprail - 90° Connector

Fixed

ALCR180

Aluminum Caprail 180° Connector

Adjustable

ALCRADJH

Aluminum Caprail - Horizontal Adjustable Connector

Adjustable

ALCRADJV

Aluminum Caprail - Vertical Adjustable Connector

Custom Fabrication Available

---

10 mm to 21 mm

CRUB

Rubber Gasket - 19' Length

Dimension	SKU
10mm (19')	CRUB10
12mm (19')	CRUB12
15mm (19')	CRUB15
17mm (19')	CRUB17
19mm (19')	CRUB19
21mm (19')	CRUB21

---

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

Romeo Juliet Balcony System

Brushed Anodized Aluminum

Matte Black Anodized Aluminum

Key Features

- Full range of Romeo Juliet Balcony System
- Match with H6030 slotted handrail system
- Suitable for 10-21.52mm glass with optional rubbers
- The centre of glass is 86mm distance off wall
- The glass does NOT require holes
- FAST FIT Mini Rails are supplied in any length
- Reduced MINIMUM visual impact
- No welding installation

Contact Us On

products@ggshardware.com
For More Information!

Handrail Brackets

Handrail Brackets – Wall Mount

Finishes

Brushed Stainless Steel

Matte Black Anodized Aluminum

More Finishes Online

Acronyms:

WM: Wall Mount
GM: Glass Mount

RD: Round
SQ: Square

Material:
SS316

Architects Recommend

HRB3X3WM - Fixed
3X3" with Round Saddle

HRB3X2WM - Fixed
3X2" with Round Saddle

HRB3X3WM - Fixed
3X3" with Flat Saddle

HRB3X2WM - Fixed
3X2" with Flat Saddle

SHRBADJWM
Adjustable Wall Mount - Flat Saddle

SHRBADJWM
Adjustable Wall Mount - Round Saddle

HRBADJWM
Adjustable Wall Mount - Round Saddle

HRBADJWM
Adjustable Wall Mount - Flat Saddle

Flat 4.5"

EXTHRB4.5WM
4-1/2" Length with Flat Saddle

Flat 6"

EXTHRB6WM
6" Length with Flat Saddle

Round 4.5"

EXTHRB4.5WM
4-1/2" Length with Round Saddle

Round 6"

EXTHRB6WM
6" Length with Round Saddle

* For the most up-to-date product availability, visit our website.

148

www.ggshardware.com

Handrail Brackets – Glass Mount

Finishes

Brushed Stainless Steel

Matte Black Anodized Aluminum

Custom Finishes

Acronyms:

WM: Wall Mount
GM: Glass Mount

RD: Round
SQ: Square

Material: SS316

Designers Selected

HRB3X2GM - Fixed
3X2" with Round Saddle

HRB3X3GM - Fixed
3X3" with Round Saddle

HRB3X2GM - Fixed
3X2" with Flat Saddle

HRB3X3GM - Fixed
3X3" with Flat Saddle

SHRBADJGM
Adjustable Glass Mount - Flat Saddle

SHRBADJGM
Adjustable Glass Mount - Round Saddle

HRBADJGM
Adjustable Glass Mount - Round Saddle

HRBADJGM
Adjustable Glass Mount - Flat Saddle

Flat 4.5"

Flat 6"

Round 4.5"

Round 6"

EXTHRB4.5GM
4-1/2" Length with Flat Saddle

EXTHRB6GM
6" Length with Flat Saddle

EXTHRB4.5GM
4-1/2" Length with Round Saddle

EXTHRB6GM
6" Length with Round Saddle

Handrail Brackets

Finishes

■ Brushed Stainless Steel   ■ Matte Black Anodized Aluminum   🌈 More Finishes Online

Acronyms:

WM: Wall Mount   RD: Round   Material:
SQ: Square   SS316

WM 2" X 2-1/2"

2"
2.5"

SHRB2X2.5WM

2" X 2-1/2" - Wall Mount

WM 2" X 3-1/2"

2"
3.5"

SHRB2X3.5WM

2" X 3-1/2" - Wall Mount

⚠ **Note:** Visit ggshardware.com
For Glass Fabrication & Product Information.

* For the most up-to-date product availability, visit our website.

150

www.ggshardware.com

Aluminum Posts

Adjustable

Modern Elegance Series– Kit
Aluminum Posts

Finishes

Matte Black   More Finishes Online

*Refer to website for kit components

42" & 50"*

Modern Elegance - 42" Post - All In One

Corner Post

End Post

Inline Post

ALPOST-42
ALPOST-50

42" & 50" Base Height - ALL IN ONE - Inline / Corner / End- Square

42" & 50"*

42"
(1117mm)

One Side Adjustable

Rubber Infills
3/8" or 1/2" Glass

Both Side Adjustable

Rubber Infills
3/8" or 1/2" Glass

ALPOST-42ADJ

42" Base Height - Adjustable - Square

Adjustable

* For the most up-to-date product availability, visit our website.

152

www.ggshardware.com

Modern Elegance Series Accessories
Aluminum Posts

Finishes

Matte Black

More Finishes Online

42"

ALPOST-INFILL
Aluminum Post Component - 42" Length Infills

ALPOST-RUBBER
Rubber Block

AL-HRAIL-ECAPMBL
End Cap For 2-1/2" X 1" Aluminum Handrail

1/2" (12mm)

ALPOST-RUBBER12
Rubber Gasket
For 12mm Glass (42" Length)

3/8" (10mm)

ALPOST-RUBBER10
Rubber Gasket
For 10mm Glass (42" Length)

Square

ALHRAIL-TOOL
Fix Tool For Aluminum Handrail

19' Length

ALHRAIL-2.5X1
Aluminum Handrail
2-1/2" X 1" - 19' Length

GOAT Cable Rail System

Goat Cable Rail System

Architects Recommend

Finishes

- Brushed Anodized Aluminum
- Matte Black Anodized Aluminum
- Brushed Stainless Steel
- Polished Stainless Steel
- More Finishes Online

GCSCABLE100
100ft length Cable - 1/8" thickness - SS316

GCSTENSIONER
Torq Tool Tensioner - Fencing Tool

GCSCUT
Goat Cable Rail System - Cable Cutter

GCSSTUD
Goat Cable Rail System - Stud

GCSKEY
Goat Cable Rail System - Release Key

GCSRWASHER
Goat Cable Rail System - Curved Washer Gasket

2" Post

GCSEND50SS
Fixed Cable End for 2" Post

1-5/8" Post

GCSEND40SS
Fixed Cable End for 1-5/8" Post

GCSENDW
Fixed Cable End for Wood Post

GCSADJEND40SS
Adjustable Cable End for 40mm Post

* For the most up-to-date product availability, visit our website.

155

www.ggshardware.com

Hulk Series

P13 Frameless Shower Door	**P163** Storefront & Entrance System	**P261** Stock Glass Doors
P85 Railing Hardware	**P223** Door Rails & Architectural Hardware	**P271** Glazing Supplies

02 Railing Hardware

Hydraulic Hinges – Hulk Series

Hulk Series

Architects Recommend

Finishes

Brushed Stainless	Matte Black Anodized Aluminum	Polished Stainless	More Finishes Online

Wall To Glass

Glass To Glass

Hold Type	Material	SKU	Hold Type	Material	SKU
Non Holds Open	SS304	HULK90NHO	Non Holds Open	SS304	HULK180NHO
Holds Open	SS304	HULK90HO	Holds Open	SS304	HULK180HO
Non Holds Open	SS316	HULK90NHO	Non Holds Open	SS316	HULK180NHO
Holds Open	SS316	HULK90HO	Holds Open	SS316	HULK180HO

* For the most up-to-date product availability, visit our website.

157

www.ggshardware.com

Grey Goat Color Samples Kit

Explore upcoming color finishes on our website.

Frameless Shower Hardware

CH Chrome	BN Brushed Nickel	MBL Matte Black	SB Satin Brass	PN Polished Nickel	BBRZ Brushed Bronze
GM Gun Metal	ORB Oil Rubbed Bronze	W White	AB Antique Brass	PB Polish Brass	Custom Finishes

This color tower was created for one-time distribution only. For the most up-to-date selection of available finishes, please visit our website at ggshardware.com.

Railing Hardware

BSS Brushed Stainless Steel	MBL Matte Black	SB Satin Brass	W White	PSS Polished Stainless Steel	Custom Finishes

Commercial Finishes

SA Satin Anodized	MBL Matte Black	BSS Brushed Stainless Steel	PSS Polished Stainless Steel	SB Satin Brass	Custom Finishes

Future Colors

ABC Antique Brushed Copper	BRG Brushed Rose Gold	SC Satin Chrome	RG Rose Gold	LSB Lacquered Satin Brass	PB Polish Brass	PVDB PVD Black

*These finishes aren't listed on our website yet — but they're available in our color chain. If you're interested, we'd be happy to provide upon request!

Don't have an account?

Sign up now at GGSHARDWARE.COM and get approved by one of our representatives same day! Check Page #4 for more info!

Need Help ?

Call our office today and speak to one of our friendly specialist

* For the most up-to-date product availability, visit our website.

Pool Fencing Hardware

P13 Frameless Shower Door **P163** Storefront & Entrance System **P261** Stock Glass Doors
P85 Railing Hardware **P223** Door Rails & Architectural Hardware **P271** Glazing Supplies

02 Railing Hardware

Latches with Lock
Pool Fencing Hardware

Designers Selected

Finishes

Brushed Stainless Steel Polished Stainless Steel
Matte Black Anodized Aluminum Custom Finishes

Specification

- **Material:** High-grade SS316 stainless steel.
- **Glass Compatibility:** Fits 8mm, 10mm, and 12mm glass.
- **Application:** Ideal for indoor/outdoor pool fencing.
- **Latch Type:** Various configuration with secure locking.

LDIVE180
180° Glass to Glass

LDIVE90R
90° Round Post to Glass

LDIVE90
90° Wall/Post to Glass

(!) Visit ggshardware.com For Glass Fabrication & Product Information.

LDIVE092IN
90° Glass to Glass - Inswing

LDIVE092OUT
90° Glass to Glass - Outswing

DSDIVE
DIVE Series Pool Fencing Door Stop

BKDIVE
Bottom Keeper

Latches Without Lock
Pool Fencing Hardware

Designers Selected

Finishes

Brushed Stainless Steel

Matte Black Anodized Aluminum

Polished Stainless Steel

Custom Finishes

Specification

- **Magnetic Latch Mechanism:** Ensures a secure and self-latching system for enhanced safety
- **Premium Material:** SS316 stainless steel for long-lasting durability in harsh environments
- **Glass Compatibility:** Suitable for 8mm, 10mm, and 12mm glass thicknesses
- **Maximum Weight Capacity:** 45kg (100 lbs)
- **Maximum Glass Width:** 40 inches

NLDIVE90W

Glass to Square Post/Wall

NLDIVE180

180° Glass to Glass

NLDIVE90RD

90° Glass to Round Post

NLDIVE90G

Glass to Glass 90° - Inswing

Brackets

BDIVE180RD

180° Glass to Glass - Round

BDIVE180SQ

180° Glass to Glass - Square

BDIVE90

90° Glass to Glass - Round

BDIVESQ90

90° Glass to Glass - Square

* For the most up-to-date product availability, visit our website.

161

www.ggshardware.com

Latches Hinges

Pool Fencing Hardware

Designers Selected

Finishes

Brushed Stainless Steel

Polished Stainless Steel

Matte Black Anodized Aluminum

Custom Finishes

Specification

- **Material:** High-grade SS316 stainless steel for superior corrosion resistance
- **Glass Compatibility:** Supports 8mm, 10mm, and 12mm tempered glass
- **Heavy-Duty Construction:** Enhanced durability for robust glass-to-glass connections
- **Maximum Weight Capacity:** 45kg (100 lbs)
- **Maximum Glass Width:** 40 inches
- **Regulation Compliant:** Meets pool safety standards for residential and non-residential properties

Heavy Duty

HDIVE180HD

Glass To Glass

Heavy Duty

HDIVE90HD

Glass To Wall / Square Post

Heavy Duty

HDIVE90RHD

Glass To Round Post

HDIVE90

Glass to Wall / Square Post

HDIVE180

Glass to Glass

HDIVE90R

Glass to Round Post

ASSA ABLOY Certified Distributor

Opening Solutions

Manufactured by

ASSA ABLOY
Opening Solutions

Distributed by

GGH GLAZING SUPPLY COMPANY

Assa Abloy – Panic Devices (PDU8000)

Finishes

○ US32   ○ US32D   ○ 4E   ○ 10BE   ● 314E   ● BSP   ● BPC   ○ WPC   ○ WSP   ● RPC

Panic Devices - PDU8000 Series

Combining safety and style, the PDU8000 features an engraved push area with boundary grooves for clear visibility. Available with keyed or non-keyed options, six exterior pulls, and multiple finishes — offering both function and design flexibility.

Specifications

Glass Thickness	3/8" to 13/16"	**Handing**	• Right-hand reverse (swing 3)
Dimensions	• Grip diameter: 11/4"		• Left-hand reverse (swing 4)
	• Projection: 3"		• Right hand (swing 5)
			• Left hand (swing 6)
Materials	Stainless steel	**Options**	Custom engraving options available
Applications Types	• Glass mounted		including push area with boundary grooves.
	• Rail mounted		

PDU8000
Standard ROCKWOOD Panic Device
1-3/4" x 4"

PDU8000-1
Panic Device with Full Height L-Shaped Mating Pull

PDU8000-2
Panic Device Half Height L-Shaped Mating Pull

PDU8000-3
Panic Device with Full Height Straight Mating Pull

PDU8000-4
Panic Device with Half Height Straight Mating Pull

PDU8000-5
Panic Device with Short Centered Straight Pull

PDU8000-6
Panic Device with Horizontal Straight Pull

Assa Abloy – Electric & Manual Strike

Finishes

⬤ US32   ⬤ US32D   ⬤ 4E   ⬤ 10BE   ⬤ 314E   ⬤ BSP   ⬤ BPC   ⬤ WPC   ⬤ WSP   ⬤ RPC

Folger Adam Electric Strikes

The Folger Adam 310-1 (3/4) is an industrial grade electric strike designed specifically for use in glass door applications with addition of a strike plate. The stainless steel construction makes it ideal for strength and corrosion resistance.

Product Features

- Tamper-resistant, heavy duty stainless steel construction
- Fail Safe/Fail Secure
- ¾" keeper depth
- Non-handed
- Plug-in connector
- Five-year limited warranty

MSK-SGL

Manual Strike - Single Door

MSK-DBL

Manual Strike - Double Door

ESK-SGL

Electric Strike - Single Door

ESK-DBL

Electric Strike - Manual Door

HES 1600 Heavy-Duty Optional Electric Strike

HES Strikes are the most advanced electric strikes available on the market for latchbolt locks. These series set a new standard in the industry by offering dynamic integrated adjustability and field configurable options.

Product Features

- Tamper resistant
- Stainless steel construction
- ESK-9200 and ESK-1600 models are non-handed, ESK-9100 handing required
- Field selectable fail safe/fail secure
- ESK-9100 and ESK-9200 are surface mounted

Static Strength:	• 1,500 lbs	Electrical:	ESK-1600
Dynamic Strength:	• 70 ft-lbs		• Dual voltage 12/24 VDC/VAC; 240 mA at 12 VDC/120 mA at 24 VDC ESK-9100
Endurance Rating:	• 1,000,000 cycles		• Adaptable voltage sensing 12/24 VDC/VAC; 240 mA at 12 VDC, 120 mA at 24 VDC ESK-9200
			• Adaptable voltage sensing 12/24 VDC/VAC; 240 mA at 12 VDC, 120 mA at 24 VDC
		Options:	LM for door monitoring (ESK-1600 models only)

ESK-1600-SGL

Electric Strike - Single Door

ESK-1600-DBL

Electric Strike - Double Door

Surface Mount

ESK-9100

Electric Strike - Single Door

Surface Mount

ESK-9200

Electric Strike - Double Door

* For the most up-to-date product availability, visit our website.

165

www.ggshardware.com

Assa Abloy – Security Latch Adapter (SL100) & Codes

Rockwood Security Latch Adapter (SL100)

• Converts roller latch on CRL (Blumcraft) PA100 devices to ASSA ABLOY's flat security latch

• Provides additional engagement with strike, increasing security

• Adjustable stops on strike include set screws, minimizing unintended movement

• UL 305 listed

• Manual strike included

Strike Kits

• Strike, Adapter Plate, and Cover included

Finishes

○ US32

SL100
Rockwood Security Latch Adapter

Code	Products	Code	Products
Code 01	Mortise Cylinder	Code 06	Non-Keyed Function (blank escutcheon plate provided)
Code 02	7-pin SFIC Housing w/Construction Core	Code 07	Keyed Construction Core for 7-pin SFIC Cylinder
Code 03	Special Order (keyed alike)	Code 08	Customer Swapping Cylinder in the Field
Code 04	Customer Supplied Cylinder		
Code 05	Dummy Cylinder Housing		

Assa Abloy – Dummy Devices (DDU8000)

Finishes

○ US32   ○ US32D   ● 4E   ● 10BE   ● 314E   ● BSP   ● BPC   ○ WPC   ○ WSP   ● RPC

Dummy Panic Devices - DDU8000 Series

The DDU8000 Dummy Panic Device suites with the PDU8000 panic device and Rockwood LP3301 locking door pull and maintains design consistency in a space.

Specifications

Glass Thickness	3/8" to 13/16"	**Handing**	• Right-hand reverse (swing 3)
Dimensions	• Grip diameter: 11/4"		• Left-hand reverse (swing 4)
	• Projection: 3"		• Right hand (swing 5)
Materials	Stainless steel		• Left hand (swing 6)
Applications Types	• Glass mounted	**Options**	Custom engraving options available including push area with boundary grooves.
	• Rail mounted		

DDU8000
Standard ROCKWOOD Dummy Panic Device
1-3/4" x 4"

DDU8000-1
Dummy Panic Device with Full Height
L-Shaped Mating Pull

DDU8000-2
Dummy Panic Device Half Height
L-Shaped Mating Pull

DDU8000-3
Dummy Panic Device with Full
Height Straight Mating Pull

DDU8000-4
Dummy Panic Device with Half
Height Straight Mating Pull

DDU8000-5
Dummy Panic Device with
Short Centered Straight Pull

DDU8000-6
Dummy Panic Device with
Horizontal Straight Pull

Floating Headers

Overview

When opening heights exceed door height recommendations and glass transoms are necessary, floating headers are the perfect solution. They allow for top locking mechanisms, as well as overhead closers, when floor closers are undesirable.

Finishes

Brushed Stainless   Matte Black   Satin Brass   Polished Stainless   Satin Anodized

HDF-1750×4000

ROCKWOOD 1-3/4" x 4" Floating Header

HDF-1750×4500

ROCKWOOD 1-3/4" x 4-1/2" Floating Header

HDF-2000×6000

ROCKWOOD 2" x 6" Floating Header

Assa Abloy

Product type	SKU
90° Back stop Non-hold open	DLUX4HDC90NHOEXTHD
90° Back stop Hold open	DLUX4HDC90HOEXTHD
105° Back stop Non-hold open	DLUX4HDC105NHOEXTHD
105° Back stop Hold open	DLUX4HDC105HOEXTHD

- **Heavy-Duty Performance:** Supports up to 300 lbs. for interior doors and 250 lbs. for exterior doors.
- **Concealed Installation:** Ensures a sleek, unobtrusive appearance.
- **Durable Cast Iron Body:** Built for long-lasting strength and reliability.
- **Versatile Compatibility:** Suitable for doors up to 48" wide (interior) and 42" wide (exterior).

DLUX4HDC90NHOEXTHD

ROCKWOOD 304 Heavy-Duty Overhead Concealed Door Closer

Key Features

- **Heavy-Duty Capacity:** Supports doors up to 300 lbs. for high-traffic applications.
- **Precise Clearance Adjustments: Includes shims for bottom clearances ranging from 5/16" to 3/4".**
- **Center-Hung Design:** Ensures balanced and smooth door operation.
- **Durable Construction:** Made from high-quality aluminum and stainless steel for long-lasting performance.
- **Easy Installation:** Simple end-load installation into the door rail for convenience.

DLUX PIVHD

DLUX End Load Bottom Pivot – Heavy-Duty (300 lb.)

* For the most up-to-date product availability, visit our website.

168

www.ggshardware.com

| P13 Frameless Shower Door | P163 Storefront & Entrance System | P261 Stock Glass Doors |
| P85 Railing Hardware | P223 Door Rails & Architectural Hardware | P271 Glazing Supplies |

03 Storefront & Entrances Hardware

Rockwood Handles

Finishes

US32　US32D　4E　10BE　314E　BSP　BPC　WPC　WSP　RPC

11147

The 11147 Series with Straight 47 Single Bar Set

Product Features

- Heavy-duty straight bar design for commercial and architectural doors
- Compatible with wood, metal, and glass doors
- Constructed from high-quality aluminum, brass, bronze, or stainless steel
- Available in a range of sizes, lengths, and bar diameters
- Offered in multiple mounting styles including back-to-back and single side
- Optional "PUSH" or "PULL" engraving for clear user direction
- Wide selection of architectural finishes to suit any design
- ANSI 156.6 compliant for durability and performance

11147OS

The 11147 Series with Offset 47 Single Bar Set

Product Features

- Sleek offset handle design for a modern and ergonomic look
- Engineered for use on glass, wood, or metal doors
- Built with durable materials: aluminum, brass, bronze, or stainless steel
- Available in various projections, sizes, and bar thicknesses
- Multiple mounting options including concealed and exposed fasteners
- Customizable with "PUSH" or "PULL" engraving for clear function labeling
- Offered in a range of premium finishes for design flexibility
- Meets ANSI 156.6 standards for reliable commercial-grade use

Floating Headers

* For the most up-to-date product availability, visit our website.

170

www.ggshardware.com

Solidity Hydraulic Bottom Patch

Solidity Hydraulic Bottom Patch

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.
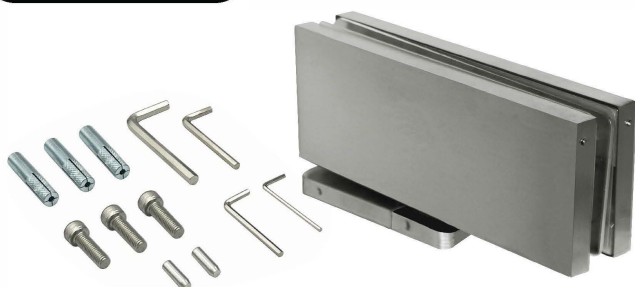
Finishes

Brushed Stainless · Satin Brass · Matte Black · Polished Stainless · Satin Anodized · More Finishes Online

100Kg
- **Maximum Weight:** 100KG (220.46LBS)
- **Maximum Door Width:** 39" (1000mm)
- Two Adjustable Speed Settings
- Hold Open at 90°
- Cycle Tested for 500,000 Operations

150Kg
- **Maximum Weight:** 150 Kg (330.70 lb)
- **Maximum Door Width:** 48" (1220mm)
- Two Adjustable Speed Settings
- Hold Open at 90°
- Cycle Tested for 500,000 Operations

Full Kit - Includes Body & Covers Plates

SOL100HO
100kg Hold Open

Hold Type	Maximum Door Weight	SKU
Hold Open	100kg	SOL100HO
Hold Open	150kg	SOL150HO
Non-Hold Open	100kg	SOL100NHO
Non-Hold Open	150kg	SOL150NHO

Body Only

SOL150HONCP
Blank Body - Without Cover Plates

Hold Type	Maximum Door Weight	SKU
Hold Open	100kg	SOL100HONCP
Hold Open	150kg	SOL150HONCP
Non-Hold Open	100kg	SOL100NHONCP
Non-Hold Open	150kg	SOL150NHONCP

Cover Plates Only

SOLCP
Solidity Series Cover Plates

Bottom Base Only

SOLBP
Solidity Series Bottom Base

Patch Fittings & Transom

Patch Fittings Configurations

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

|		
		Patch Fitting (PFIT Series) **Top Patch with Pivot Insert** PFIT20A
		Patch Fitting (PFIT Series) **Bottom Patch with Pivot Insert** PFIT10
100KG		**Solidity Series Hydraulic Bottom Patch** **100kg Hold Open** SOL100HO
150KG		**Solidity Series Hydraulic Bottom Patch** **100kg Hold Open** SOL150HO
		Patch Fitting (PFIT Series) **Transom – Wall Mount** PFIT34
		Patch Fitting (PFIT Series) **Transom – Glass Mount With Pivot Pin** PFIT40
		Patch Fitting (PFIT Series) **L-Shape Connector – No Door Stop** PFIT61
		Patch Fitting (PFIT Series) **L-Shape Connector With Door Stopper** PFIT60
		Patch Fitting (PFIT Series) **L-Shape Connector With Heavy Duty Door Stop** PFIT60HD

FOR HEAVIER AND WIDER DOORS

Patch Fittings Configurations

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Configuration – 1

1	PFIT20A	Patch Fitting (PFIT Series) – Top Patch with Pivot Insert
2A	PFIT10	Patch Fitting (PFIT Series) – Bottom Patch with Pivot Insert
2B	SOL100HO	Solidity Series Hydraulic Bottom Patch – 100kg Hold Open
2C	SOL150HO	Solidity Series Hydraulic Bottom Patch – 150kg Hold Open

Configuration – 2

1	PFIT20A	Patch Fitting (PFIT Series) – Top Patch with Pivot Insert
2A	PFIT10	Patch Fitting (PFIT Series) – Bottom Patch with Pivot Insert
2B	SOL100HO	Solidity Series Hydraulic Bottom Patch – 100kg Hold Open
2C	SOL150HO	Solidity Series Hydraulic Bottom Patch – 150kg Hold Open
3	PFIT34	Patch Fitting (PFIT Series) – Transom – Wall Mount

Configuration – 3

1	PFIT20A	Patch Fitting (PFIT Series) – Top Patch with Pivot Insert
2A	PFIT10	Patch Fitting (PFIT Series) – Bottom Patch with Pivot Insert
2B	SOL100HO	Solidity Series Hydraulic Bottom Patch – 100kg Hold Open
2C	SOL150HO	Solidity Series Hydraulic Bottom Patch – 150kg Hold Open
3	PFIT34	Patch Fitting (PFIT Series) – Transom – Wall Mount
4A	PFIT61	Patch Fitting (PFIT Series) – L–Shape Connector – No Door Stop
4B	PFIT60	Patch Fitting (PFIT Series) – Panel Glass to Glass – L–Shape Connector With Door Stopper
4C	PFIT60HD	Patch Fitting (PFIT Series) – L–Shape Connector – with Heavy Duty Door Stop

Configuration – 4

1	PFIT20A	Patch Fitting (PFIT Series) – Top Patch with Pivot Insert
2A	PFIT10	Patch Fitting (PFIT Series) – Bottom Patch with Pivot Insert
2B	SOL100HO	Solidity Series Hydraulic Bottom Patch – 100kg Hold Open
2C	SOL150HO	Solidity Series Hydraulic Bottom Patch – 150kg Hold Open
3	PFIT34	Patch Fitting (PFIT Series) – Transom – Wall Mount
5	PFIT40	Patch Fitting (PFIT Series) – Transom – Glass Mount

Configuration – 5

1	PFIT20A	Patch Fitting (PFIT Series) – Top Patch with Pivot Insert
2A	PFIT10	Patch Fitting (PFIT Series) – Bottom Patch with Pivot Insert
2B	SOL100HO	Solidity Series Hydraulic Bottom Patch – 100kg Hold Open
2C	SOL150HO	Solidity Series Hydraulic Bottom Patch – 150kg Hold Open
4A	PFIT61	Patch Fitting (PFIT Series) – L–Shape Connector – No Door Stop
4B	PFIT60	Patch Fitting (PFIT Series) – Panel Glass to Glass – L–Shape Connector With Door Stopper
4C	PFIT60HD	Patch Fitting (PFIT Series) – L–Shape Connector – with Heavy Duty Door Stop
5	PFIT40	Patch Fitting (PFIT Series) – Transom – Glass Mount

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

03 Storefront & Entrances Hardware

Patch Fittings & Transom

Finishes

	Brushed Stainless		Matte Black		Satin Brass		Polished Stainless		Satin Anodized

PFIT20A

Top Patch
with Pivot Insert

PFIT10

Bottom Patch
with Pivot Insert

PFIT70

Panel Glass to Glass

PFIT34

Transom - Wall Mount

PPIV401-2H

Top Free Swing Pivot
2 Holes

PFIT20ADJ

Top Patch with Adjustable
Closer Insert

PFIT40

Transom - Glass Mount

PFIT41L

Transom With Left Fin Support
Glass Mount

PFIT41R

Transom With Right Fin Support
Glass Mount

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

03 Storefront & Entrances Hardware

Patch Fittings & Transom

Finishes

Brushed Stainless | Matte Black | Satin Brass | Polished Stainless | Satin Anodized

PPIV401
Top Free Swing Pivot
3 Holes

PFIT20C
Top Patch
With Closer Insert

PFIT60HD
L-Shape Connector
With HD Door Stop

PFIT80
Panel Glass to Glass
4-Way Connector

PFIT94
Ceiling Mounted Support
Fin Connector

PFIT81
4-Way With Fin Connector

PPIV402
Bottom Free
Swinging Pivot for Floor Mount

PFIT61
L-Shape Connector - No Door Stop

PFIT60
L-Shape Connector With Door Stopper

Patch Fittings & Transom

Finishes

Brushed Stainless	Matte Black	Satin Brass	Polished Stainless	Satin Anodized

PPIV403

Bottom Door Free
Swinging Pivot

PFITGASKET

Gaskets For Wall Mount
Top & Bottom Patch

PFINTOP

Top Hole
For Patch Pivots

PFINDC

Top Hole
For Commercial Door Closers
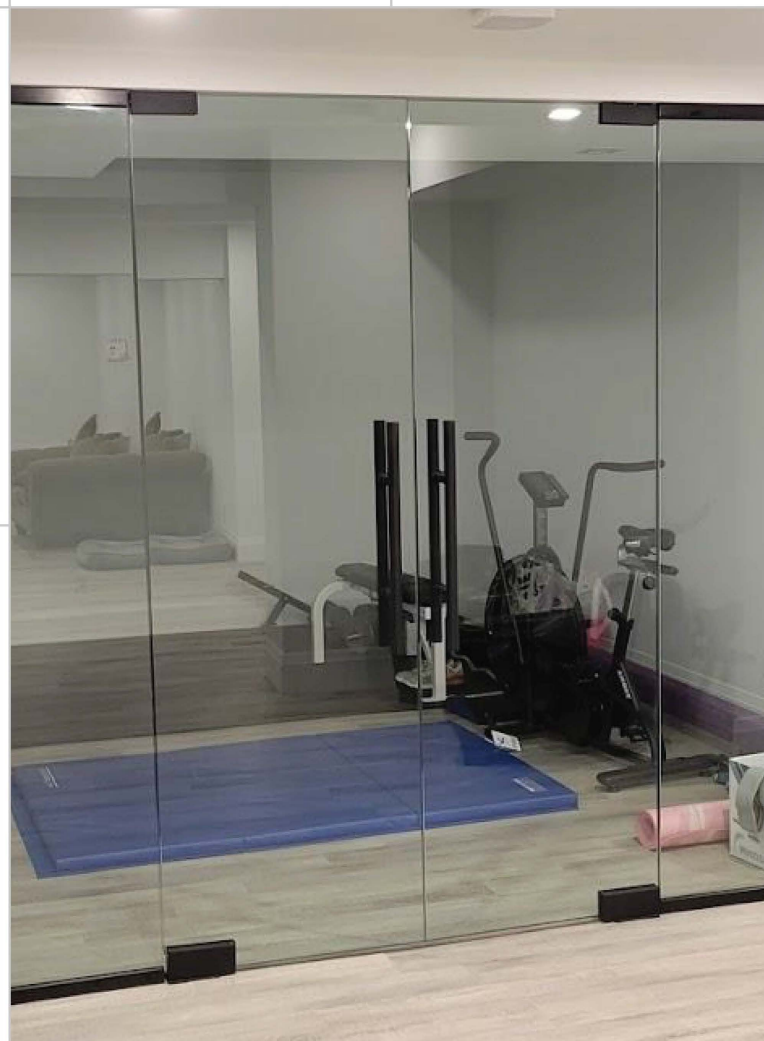

PFINBOT

Bottom Hole for Patch Pivots

PFINDS

Top Door Stops

PFINTOPPIV

Top Patch Pivots

Electromagnetic Entry Door Lock

Finishes

Brushed Stainless Steel

Satin Anodized

Polished Stainless

Custom Finishes

Matte Black

Product Overview

NE-600S Single Door Magnetic Lock with LED indicator and door status signal output. Compatible with glass, wood, metal, and fire doors. Hoisting design allows quick, easy installation. Includes accessories for inward, frameless, and narrow doors. Anti-residual magnetism ensures safer, more reliable access control.

ML600SGL

Single Door Magnetic Lock - 600Kg

ML600DBLSA

Double Door Magnetic Lock - 600Kg

MLSGLZLBRKT

Single Door Magnetic Lock Strike Brackets

MLDBLZLBRKT

Double Door Magnetic Lock Strike Brackets

* For the most up-to-date product availability, visit our website.

179

www.ggshardware.com

Commercial U–Channels

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

03 Storefront & Entrances Hardware

Commercial U-Channels

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.
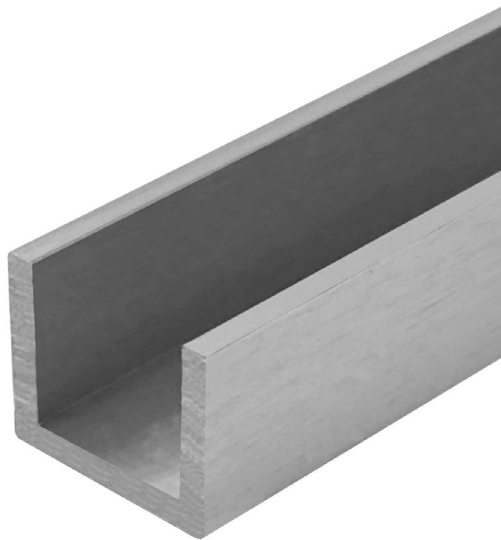
Finishes

- Brushed Stainless
- Matte Black
- Satin Anodized
- Custom Finishes

Specification

- **Versatile Applications**: Ideal for glass partitions, wine rooms, architectural installations, retail store fronts, conference rooms, and glass balustrades.
- **Low-Profile Design**: Shallow 1", 1.5" & 2" height options for a minimalistic look while ensuring stability.
- **Glass Compatibility**: Suitable for glass thicknesses of 10mm (3/8") and 12mm (1/2").

144" & 240" Length

CU1X1, CU1X1.5, CU1X2
Commercial U-Channel

Dimension	SKU
1 X 1" (144" Length)	CU1X1
1 X 1-1/2" (144" Length)	CU1X1.5
1 X 2" (144" Length)	CU1X2
1 X 1" (240" Length)	CU1X1-240
1 X 1-1/2" (240" Length)	CU1X1.5-240
1 X 2" (240" Length)	CU1X2-240

10mm / 12mm / Custom

TREMCO

CURUB
Roll-In Rubber

Dimension	SKU
12mm	CURUB12
12mm 500' Length Roll	CURUB10-500
10mm	CURUB10
10mm 500' Length Roll	CURUB10-500
0.200" 1' Length	CURUBCUSTOM
0.200" 500' Length Roll	CURUBCUSTOM500

ROLLER01 *
Vinyl Roller Tool

* For the most up-to-date product availability, visit our website.

182

www.ggshardware.com

Mall Clamps

Finishes

■ Brushed Stainless
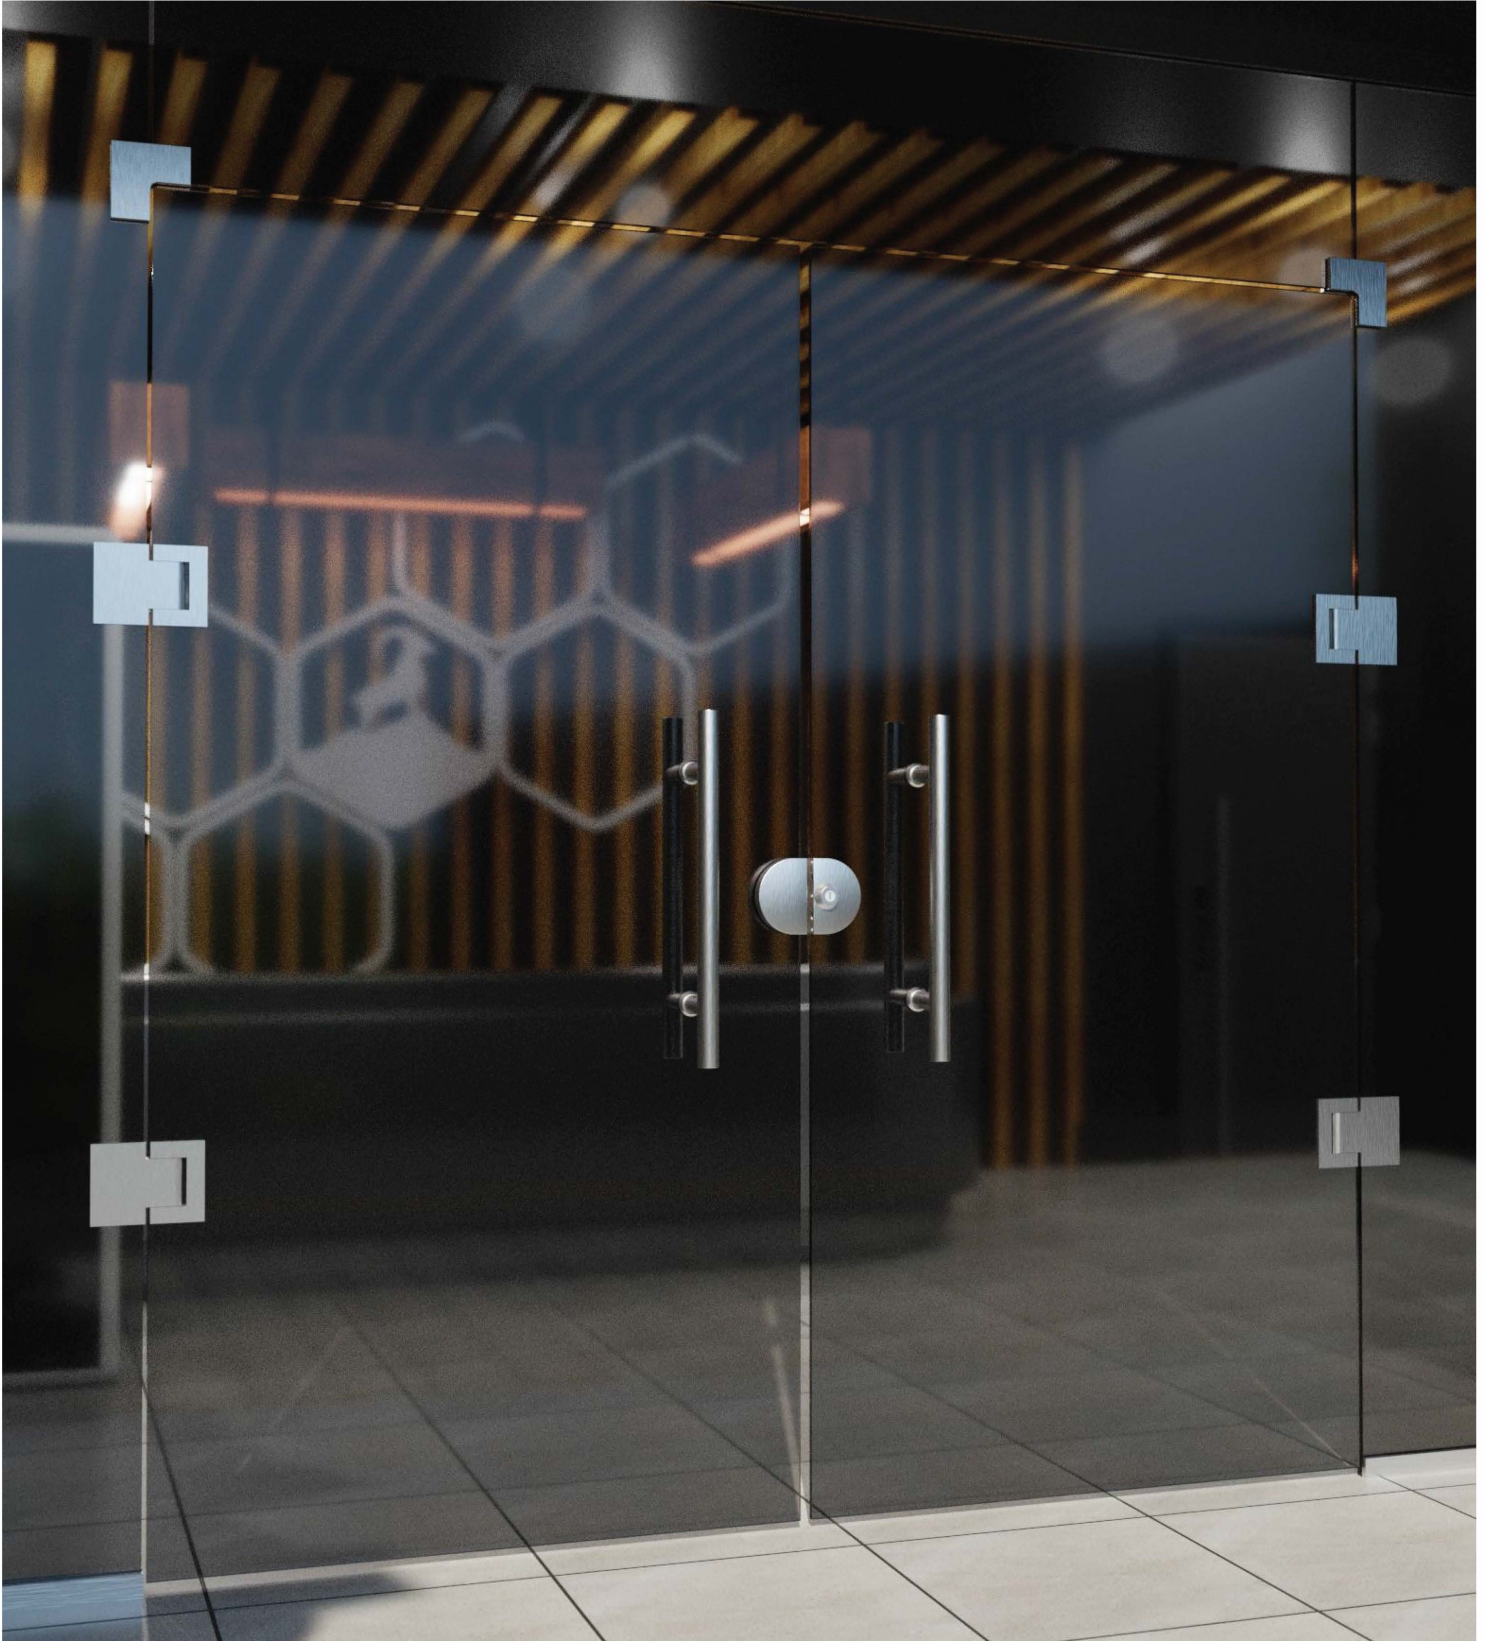
■ Matte Black

▦ Custom Finishes

Specification

- **Versatile Glass Compatibility:** Works with 3/8" to 3/4" (10 to 19 mm) thick monolithic tempered glass; special-order studs available for thicker applications.
- **Secure and Stable Joint:** Connects vertical glass panels to reduce movement and improve structural integrity.
- **Durable Build:** Constructed from Grade 304 Stainless Steel for lasting strength, offered in brushed or polished finishes.
- **Simple Installation:** Comes with flat head Phillips screws (included), making for a quick and secure setup.
- **Safety Gap Recommendation:** A minimum gap of 7/32" (5.6 mm) between panels is suggested for optimal stability.

MC180

180° Fixed Clamp

MC90

90° Fixed Clamp

MC135

135° Fixed Clamp

MCWALL

Wall Mount, Offset

AMC180 ✳

Acrylic 180° Fixed Clamp

AMC90 ✳

Acrylic 90° Fixed Clamp

AMC135 ✳

Acrylic 135° Fixed Clamp

Hulk Series

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

02 Railing Hardware

Hydraulic Hinges – Hulk Series

Hulk Series

Finishes

Brushed Stainless

Matte Black Anodized Aluminum

Polished Stainless

More Finishes Online

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

Wall To Glass

Hold Type	Material	SKU
Non Holds Open	SS304	HULK90NHO
Holds Open	SS304	HULK90HO
Non Holds Open	SS316	HULK90NHO
Holds Open	SS316	HULK90HO

Glass To Glass

Hold Type	Material	SKU
Non Holds Open	SS304	HULK180NHO
Holds Open	SS304	HULK180HO
Non Holds Open	SS316	HULK180NHO
Holds Open	SS316	HULK180HO

* For the most up-to-date product availability, visit our website.

185

www.ggshardware.com

Glass Door Locks

P13 Frameless Shower Door **P163** Storefront & Entrance System **P261** Stock Glass Doors
P85 Railing Hardware **P223** Door Rails & Architectural Hardware **P271** Glazing Supplies

03 Storefront & Entrances Hardware

Glass Door Locks

Finishes

Brushed Stainless
Matte Black
Satin Brass
Polished Stainless
Satin Anodized
More Finishes Online

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

GDL311GM
Glass Mount
Mounted Latch

GDL311WM
Wall Mount
Mounted Latch

DGDL
Digital Glass Door Lock
Glass & Wall Mount

GDLUSSET
American Style Cylinder
Patch Lock & Keeper Set

GDLUSK
Patch Lock Keeper
For American Style Cylinder

GDLUS
Patch Lock
With American Style Cylinder

GDLEU
Patch Lock With
European Style Design

GDLEUK
Patch Lock Keeper For
European Style Lock

GDLEUSET
European Style Patch
Lock & Keeper Set

* For the most up-to-date product availability, visit our website.

188

www.ggshardware.com

Glass Door Locks

Finishes

Brushed Stainless   Matte Black   Satin Brass   Polished Stainless   Satin Anodized   More Finishes Online

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.
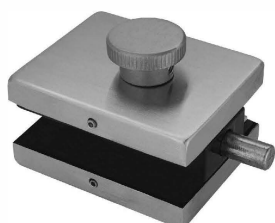

GDLRD90D

Glass to Wall - Double Sided - Round

GDLRD180D

Glass to Glass - Double Sided - Round
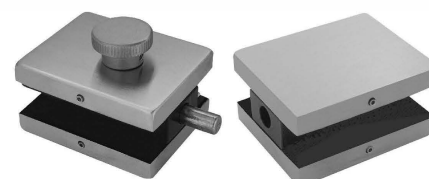

GDLRD90S

Glass to Wall - Single Sided - Round

GDLRD180S

Glass to Glass - Single Sided - Round

GDLTT

Thumbturn Lock

GDLTTK

Thumbturn Keeper

GDLTTSET

Thumbturn Lock & Keeper Set

GTDLGM

Privacy Glass Door Lock for Washroom - Thumbturn

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

03 Storefront & Entrances Hardware

Glass Display Hardware

Finishes

- Brushed Stainless
- Matte Black
- Satin Brass
- Polished Stainless
- Satin Anodized
- More Finishes Online

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

GDLMINI239
Showcase Glass Door Lock
Single Door

GDLMINI258
Showcase Glass Door Lock
Double Door

3/4" Ø Base
1-/4" Ø Base

DSO1144
Glass Display Standoffs

JEN037JR
Square Full Plate
Wall to Glass

CARA01
Square Pivot
Floor / Ceiling to Glass

BEST SELLER

DK100
100 Style Back to Back Knob

NEW

DK106
106 Style Back to Back Knob

DK140
140 Style Back to Back Knob

DKSQ
SQ Style Back to Back Knob

* For the most up-to-date product availability, visit our website.

190

www.ggshardware.com

Commercial Center Lock

P13 Frameless Shower Door	P163 Storefront & Entrance System	P261 Stock Glass Doors
P85 Railing Hardware	P223 Door Rails & Architectural Hardware	P271 Glazing Supplies

03 Storefront & Entrances Hardware

Storeroom Center Lock

Commercial Center Lock with Electric Strike

Finishes

Brushed Stainless

Matte Black Anodized Aluminum

Polished Stainless

Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

LH-Storeroom

Interior / Exterior

GDLCSINL

Inswing, Left Hand - LH

LHR-Storeroom

Interior / Exterior

GDLCSOUTL

Outswing, Left Hand - LHR

RH-Storeroom

Interior / Exterior

GDLCSINR

Inswing, Right Hand - RH

RHR-Storeroom

Interior / Exterior

GDLCSOUTR

Outswing, Right Hand - RHR

Manual Strike Box

GDLCSTK

Manual Strike Box

All In One Strike HESS

12V / 24V / Fail Safe / Fail Secure

HES5200C

HES5200C Electric Strike Complete Pack

Electric Strike Box HESS

GDLCELECSTKL

Electric Strike Box - Left Handed

Electric Strike Box HESS

GDLCELECSTKR

Electric Strike Box - Right Handed

Cover Only

GDLCELECSTKR

Electric Strike Box - Right Handed

---

* For the most up-to-date product availability, visit our website.

192

www.ggshardware.com

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

03 Storefront & Entrances Hardware

Classroom Center Lock

Commercial Center Lock with Electric Strike

Finishes

Brushed Stainless

Matte Black Anodized Aluminum

Polished Stainless

Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

LH-Classroom

Interior
Exterior

GDLCCINL

Inswing, Left Hand - LH

LHR-Classroom

Interior
Exterior

GDLCCOUTL

Outswing, Left Hand - LHR

RH-Classroom

Interior
Exterior

GDLCCINR

Inswing, Right Hand - RH

RHR-Classroom

Interior
Exterior

GDLCCOUTR

Outswing, Right Hand - RHR

Manual Strike Box

GDLCSTK

Manual Strike Box

All In One Strike

HESS

12V / 24V / Fail Safe / Fail Secure

HES5200C

HES5200C Electric Strike Complete Pack

Electric Strike Box

HESS

GDLCELECSTKL

Electric Strike Box - Left Handed

Electric Strike Box

HESS

GDLCELECSTKR

Electric Strike Box - Right Handed

Cover Only

GDLCELECSTKR

Electric Strike Box - Right Handed

---

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

Striker Center Lock Series

Commercial Center Lock with Electric Strike

Finishes

- Brushed Stainless
- Matte Black Anodized Aluminum
- Polished Stainless
- Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website.
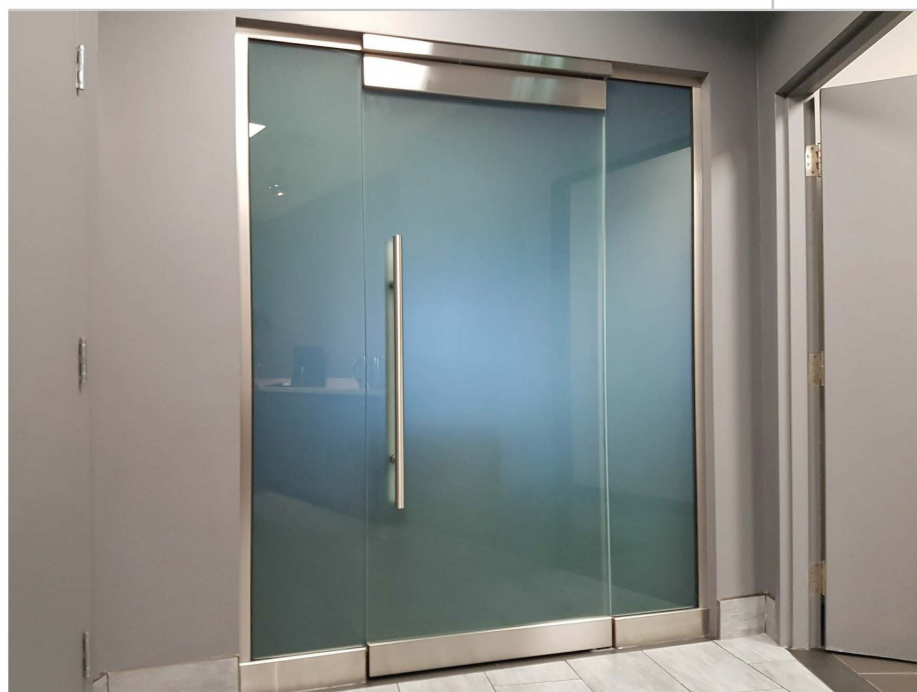Stock and finish availability may vary by product.

Passage

LH5X45PAS ✳

Lever & Latch Lock - Without Keyed Lock

Manual Strike

LHKPR ✳

Manual Strike Box

Electric Strike

LHESAFE, LHESECURE ✳

Electric Strike Box

Entrance **Storeroom** **Classroom**

LH5X45ENT, LH5X45STRM & LH5X45CLRM ✳

Lever & Latch Lock - With Keyed Lock

⚠ Note: Visit ggshardware.com For Glass Fabrication & Product Information.

---

* For the most up-to-date product availability, visit our website.

Commercial Ladder Pulls

| **P13** Frameless Shower Door | **P163** Storefront & Entrance System | **P261** Stock Glass Doors |
| **P85** Railing Hardware | **P223** Door Rails & Architectural Hardware | **P271** Glazing Supplies |

03 Storefront & Entrances Hardware

Ladder Pulls–Back To Back
Commercial Ladder Pulls

Finishes

- Brushed Stainless Steel
- Matte Black Anodized Aluminum
- Satin Brass
- Polished Stainless Steel
- Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Specification

- **Suitable for Glass Thickness**: 3/8" to 3/4" (10mm - 19mm)
- **Suitable for Wood/Aluminum Door Thickness**: 1-3/4" (44mm)
- **Available in Sizes**: 12", 24", 30", 36", 48", 60", 72", 84" and custom 96" length
- Constructed from durable 304 Grade Stainless Steel, **check ggshardware.com for 316 Stainless Steel**
- Prepped for back-to-back mounting, includes two mid-posts and fasteners for simple installation

LP36
36" (24" CTC)
Back To Back

Overall	CTC	SKU
12"	6"	LP12
24"	12"	LP24
30"	18"	LP30
36"	24"	LP36
48"	36"	LP48
60"	48"	LP60
72"	60"	LP72
84"	72"	LP84
96"	84"	LP96

SCREW-LADDERBOLT
M8 × 3-in Phillips Flat Head Screws for Aluminum Doors

CW14
Finishing Cap Washer - Single

Y Width

X Overall Height
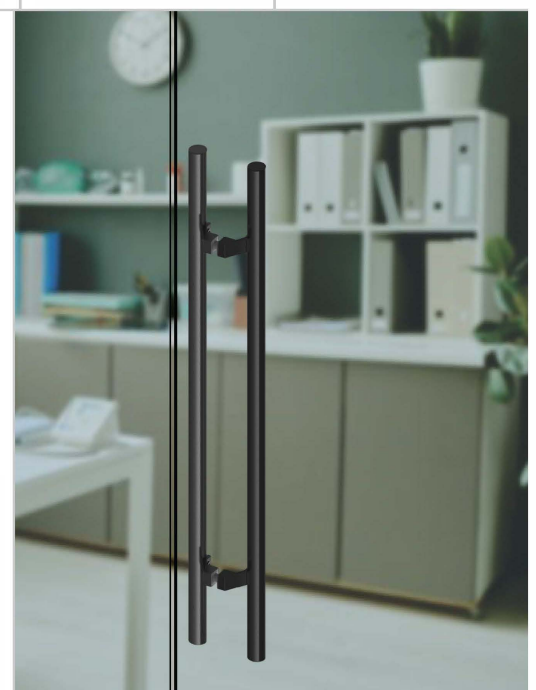
CTC

Available In Custom Lengths (X) and Diameters (Y) To Match Your Design Specifications.
Choose from premium finish options, leather wraps, and powder-coated colors for a tailored architectural look.

Ladder Pulls – Offset Back to Back

Commercial Ladder Pulls

Finishes

Brushed Stainless Steel

Polished Stainless Steel

Matte Black Anodized Aluminum

Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Specification

- **Suitable for Glass Thickness**: 3/8" to 3/4" (10mm - 19mm)
- **Suitable for Wood/Aluminum Door Thickness**: 1-3/4" (44mm)
- **Material:** Durable 304 Grade Stainless Steel
- **Offset Design:** Offers a distinctive, modern aesthetic
- Prepped for back-to-back mounting, includes two mid-posts and fasteners for simple setup

OSLP36

36" (24" CTC)
Offset Back to Back

Overall	CTC	SKU
24"	12"	OSLP24
36"	24"	OSLP36
48"	36"	OSLP48
60"	48"	OSLP60
72"	60"	OSLP72

OSLPKIT

Offset Kit

SCREW-LADDERBOLT

M8 × 3-in Phillips Flat Head Screws for Aluminum Doors

CW14

Finishing Cap Washer - Single

Available In Custom Lengths (X) and Diameters (Y) To Match Your Design Specifications.
Choose from premium finish options, leather wraps, and powder-coated colors for a tailored architectural look.

Ladder Pulls – ADA Locking
Commercial Ladder Pulls

Finishes

Brushed Stainless Steel

Polished Stainless Steel

Matte Black Anodized Aluminum

Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Specification

- **Suitable for Glass Thickness**: 1/2" (12mm) to 3/4" (19mm) tempered glass
- **Fully Concealed Deadbolt Locking System**: Includes top-mounted keyed thumb turn and bottom locking mechanism
- **Material**: 304 Grade Stainless Steel for superior durability and corrosion resistance
- **ADA Compatible**: Ensures accessibility compliance for various environments

48" Overall

36" CTC

Overall	CTC	SKU
48"	36"	LOCKLP48
60"	48"	LOCKLP60
72"	60"	LOCKLP72

LOCKLP48
48" ADA Locking Ladder Pull - Back to Back

72" ADA Locking Ladder Pull - Back to Back

LPDPK ✱✱
Dust proof Keeper

ICCOREBS
IC Core Lock Cylinder - 7 Pin SFIC

Interchangeable Core

Best Option to lock a Sliding Door 7 Pin SFIC (Small Format Interchangeable Core)

USE ONLY MONOLITHIC TEMPERED GLASS

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

03 Storefront & Entrances Hardware

Ladder Pulls – Single-Sided
Commercial Ladder Pulls

Finishes

Brushed Stainless Steel

Polished Stainless Steel

Matte Black Anodized Aluminum

Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Specification

- **Suitable for Glass Thickness**: 3/8" to 3/4" (10mm - 19mm)
- **Available Sizes**: 8", 16", 24", 36", 48", 60", and 72" overall lengths
- **Material**: Durable 304 Grade Stainless Steel
- **Simple Installation**: Prepped for back-to-back mounting with two mid-posts and fasteners included
- Custom lengths and finishes available (email: products@ggshardware.com)

SSLP36
36" (24" CTC) - Single Sided

Overall	CTC	SKU
16"	12"	SSLP16
24"	12"	SSLP24
36"	24"	SSLP36
48"	36"	SSLP48
60"	48"	SSLP60
72"	60"	SSLP72

For Aluminum Door

SSLPRDCAP ✳
SSLPSQCAP ✳
Single Sided Ladder Pull Cap - Round/Square Option

CW14
Finishing Cap Washer - Single

Ladder Pulls – Square – SQS Series
Commercial Ladder Pulls

Finishes

Brushed Stainless Steel

Polished Stainless Steel

Matte Black Anodized Aluminum

Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Specification

- **Suitable for Glass Thickness:** 3/8" to 3/4" (10mm - 19mm)
- **Suitable for Wood/Aluminum Door Thickness:** 1-3/4" (44mm)
- **Available Sizes:** 24", 36", 48", and 72" overall lengths
- **Material:** High-quality 304 Grade Stainless Steel
- **Simple Installation:** Ready for back-to-back mounting with mid-posts and fasteners included.

SQSLP36
36" (24" CTC) Square Back to Back

Overall	CTC	SKU
24"	12"	SQSLP24
36"	24"	SQSLP36
48"	36"	SQSLP48
60"	48"	SQSLP60
72"	60"	SQSLP72

SSLPSQCAP *
Single Sided Ladder Pull Cap - Square

CW14
Finishing Cap Washer - Single

P13 Frameless Shower Door	**P163** Storefront & Entrance System	**P261** Stock Glass Doors	
P85 Railing Hardware	**P223** Door Rails & Architectural Hardware	**P271** Glazing Supplies	

03 Storefront & Entrances Hardware

Ladder Pulls – Square To Round – SQR Series

Commercial Ladder Pulls

Finishes

- Brushed Stainless Steel
- Matte Black Anodized Aluminum
- Polished Stainless Steel
- Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Specification

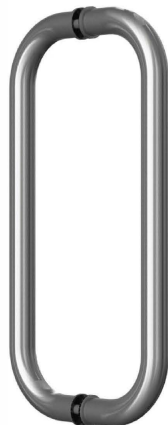- **Suitable for Glass Thickness**: 3/8" to 3/4" (10mm - 19mm)
- **Suitable for Wood/Aluminum Door Thickness**: 1-3/4" (44mm)
- **Material**: High-quality 304 Grade Stainless Steel
- **Simple Installation**: Prepped for back-to-back mounting with two round mid-posts and fasteners included

SQRLP48
48" (36" CTC) Back to Back

Overall	CTC	SKU
24”	12”	SQRLP24
36”	24”	SQRLP36
48”	36”	SQRLP48
60”	48”	SQRLP60
72”	60”	SQRLP72

SSLPRDCAP
Single Sided Ladder Pull Cap - Round

CW14
Finishing Cap Washer - Single

* For the most up-to-date product availability, visit our website.

201

www.ggshardware.com

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

03 Storefront & Entrances Hardware

Ladder Pulls – Tubular

Commercial Ladder Pulls

Finishes

- Brushed Stainless Steel
- Polished Stainless Steel
- Matte Black Anodized Aluminum
- Custom Finishes

Specification

- **Material:** High-grade SS304 stainless steel for enhanced durability
- **Tubular Diameter:** 1.25" (32mm) for a sleek, modern look
- **Suitable for Various Applications:** Ideal for wine cellars, gyms, and commercial business spaces

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

12" Overall / 12" CTC	18" Overall / 18" CTC	24" Overall / 24" CTC	Single Side Handle Option
RCM12X12	**RCM18X18**	**RCM24×24**	**LPHS**
12" Tubular Commercial Pull - 12" CTC	18" Tubular Commercial Pull - 18" CTC	24" Tubular Commercial Pull - 24" CTC	Cap For Single Sided Handles

Grey Goat Color Sample Tower Available at ggshardware.com

USE ONLY MONOLITHIC TEMPERED GLASS

P13 Frameless Shower Door **P163** Storefront & Entrance System **P261** Stock Glass Doors
P85 Railing Hardware **P223** Door Rails & Architectural Hardware **P271** Glazing Supplies

01 Frameless Shower Door

Sauna Handle

For glass fabrication details, CAD files, and the latest product information, please visit our website.
Stock and finish availability may vary by product.

FEATURE PRODUCTS

Specification

- **Heat and Moisture Resistant:** Constructed from materials designed to thrive in sauna conditions.
- **Ergonomic Grip:** Provides a secure and comfortable feel during use.
- **Sleek Design:** Perfectly suited for modern and traditional sauna aesthetics.
- **Hustle Free Installation:** Includes all necessary mounting hardware for easy installation.

Finishes

Satin Wood

**Don't Burn Your Hand!
Use Grey Goat Sauna Handles.**

SAUN19LP12
Sauna Handle 12" Ladder Pull Handle

SAUN25LP12
Sauna Handle 12"
Tubular Ladder Pull Handle

SAUN33R17
Sauna Handle 17"
Tubular Ladder Pull Handle

SAUN30S19
Sauna Handle 19"
Square Handle

SAUN19LP24
Sauna Handle 24"
Square Ladder Pull Handle

SAUN25LP24
Sauna Handle 24"
Tubular Ladder Pull Handle

SAUN38S31
Sauna Handle 31"
Square Handle

SAUN39R31
Sauna Handle 31"
Tubular Ladder Pull Handle

SAUN39R47
Sauna Handle 47"
Tubular Ladder Pull Handle

Ladder Pulls–Offset & Curved Ladder Pull Handle

Commercial Ladder Pulls

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

12" Overall

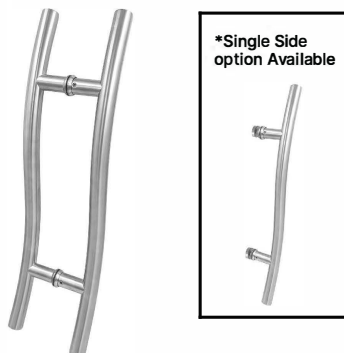*Single Side option Available

OSTUB12

12" Offset Tubular Commercial Pull

Specification

- **Material:** Premium SS304 stainless steel for superior durability
- **Tubular Diameter:** 1" (25.4mm) for a modern and comfortable grip
- **Suitable for Glass Thickness:** 3/8" - 3/4" (10mm - 19mm) tempered glass
- **Suitable for Wood/Aluminum Door Thickness:** Up to 1-3/4" (44mm)
- **Offset:** 3" (76 mm) Center-to-Center
- **Simple Installation:** Prepped for back-to-back mounting with included fasteners

Finishes

| Brushed Stainless | Matte Black | Satin Anodized | Custom Finishes |

20" Overall

*Single Side option Available

CURLP20

Curved Ladder Pull Handle 20" (11" CTC)

Specification

- **Contemporary Design:** Enhances the look of any door with its smooth, curved aesthetic.
- **Durable Construction:** Made from premium materials for reliable performance and longevity.
- **Comfortable Grip:** Designed for a secure and ergonomic hold.
- **Versatile Applications:** Ideal for a wide range of door styles and settings.
- **Easy Installation:** Includes M6 thread for hassle-free mounting.

Finishes

| Brushed Stainless | Custom Finishes |

CW14

Finishing Cap Washer - Single

Mechanical U–Channels

Economy Series – Fixed
Mechanical U-Channels

Finishes

Brushed Stainless
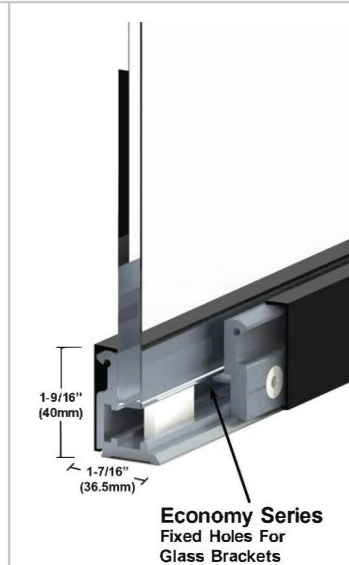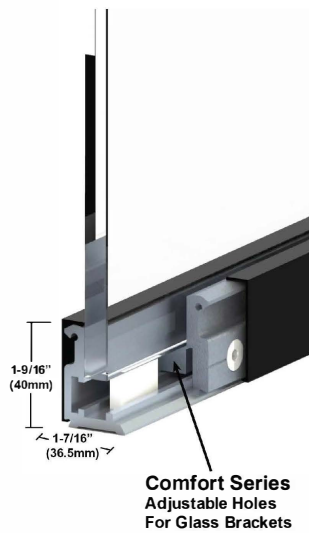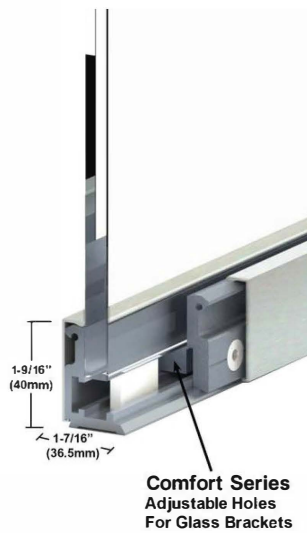
Matte Black

Satin Anodized

Custom Finishes

Specification

- **Overall Cross Section Size:** 1-9/16" x 1-7/16" with Short Cladding.
- **Overall Cross Section Size:** 4-1/2" x 1-7/16" with Tall Cladding.
- **Glass Compatibility:** Suitable for 3/8" to 1/2" (10 to 12 mm) monolithic tempered glass
- **No Glass Drilling Required:** Eliminates the need for holes in the glass, streamlining installation
- **Available Length:** 10FT (120") header length for versatile application
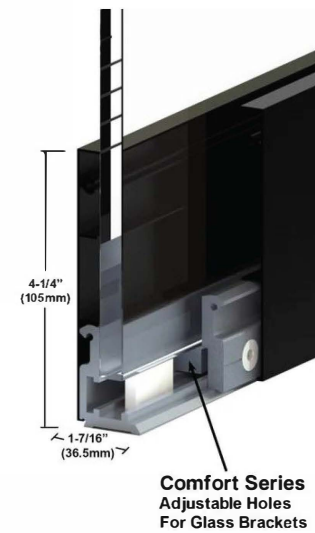
Economy Series Fixed Holes For Glass Brackets

1-9/16" (40mm) · 1-7/16" (36.5mm)

MECU10
Mechanical U-Channel
1-9/16" Cladding - 120" Length

Economy Series Fixed Holes For Glass Brackets

1-9/16" (40mm) · 1-7/16" (36.5mm)

MECU12
Mechanical U-Channel
1-9/16" Cladding - 120" Length

Economy Series Fixed Holes For Glass Brackets

4-1/4" (105mm) · 1-7/16" (36.5mm)

MECU10LRG
Mechanical U-Channel
4-1/4" Cladding - 120" Length

Economy Series Fixed Holes For Glass Brackets

4-1/4" (105mm) · 1-7/16" (36.5mm)

MECU12LRG
Mechanical U-Channel
4-1/4" Cladding - 120" Length

Comfort Series – Adjustable

Mechanical U-Channels

Finishes

Brushed Stainless

Matte Black

Satin Anodized

Custom Finishes

Specification

- **Overall Cross Section Size**: 1-9/16" x 1-7/16" with Short Cladding.
- **Overall Cross Section Size**: 4-1/2" x 1-7/16" with Tall Cladding.
- **Glass Compatibility**: Suitable for 3/8" to 1/2" (10 to 12 mm) monolithic tempered glass
- **No Glass Drilling Required**: Eliminates the need for holes in the glass, streamlining installation
- **Available Length**: 10FT (120") header length for versatile application

1-9/16" (40mm)

1-7/16" (36.5mm)

Comfort Series
Adjustable Holes
For Glass Brackets

MECUADJ10

Mechanical U-Channel - Adjustable
1-9/16" Cladding - 120" Length

1-9/16" (40mm)

1-7/16" (36.5mm)

Comfort Series
Adjustable Holes
For Glass Brackets

MECUADJ12

Mechanical U-Channel - Adjustable
1-9/16" Cladding - 120" Length

4-1/4" (105mm)

1-7/16" (36.5mm)

Comfort Series
Adjustable Holes
For Glass Brackets

MECUADJ10LRG

Mechanical U-Channel - Adjustable
4-1/4" Cladding - 120" Length

4-1/4" (105mm)

1-7/16" (36.5mm)

Comfort Series
Adjustable Holes
For Glass Brackets

MECUADJ12LRG

Mechanical U-Channel
4-1/4" Cladding - 120" Length

* For the most up-to-date product availability, visit our website.

207

www.ggshardware.com

Additional Components

Mechanical U-Channels

Finishes

Brushed Stainless	Matte Black	Satin Anodized	Custom Finishes

MECUCLD

Additional Set of Cladding - 1-9/16" Height

MECUCLDLRG

Additional set of Cladding - 4-1/8" Height

MECUSB

Additional Blocks for Mechanical U-Channel

MECUEND

Additional Endcaps for 1-9/16" Height

MECUENDLRG

Additional Large Endcaps for 4-1/4" Height

MECUBR

Additional Brackets 1/2" or 3/8"

MECU

Additional Extrusion Body

Sliding Door Kits – LAG Series

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

03 Storefront & Entrances Hardware

LAG Series – Glass Mount
Sliding Door Kits - LAG Series

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

LAGGM108
LAG Series - Glass Mount

Kit Includes

6 x Glass Mount Brackets
1 x Sliding Tube
1 x Left Door Stop
1 x Right Door Stop
2 x Door Rollers
1 x Thru-Glass Pull
1 x Floor Guide

Key Features

- **High-Quality Materials:** Crafted from Grade 316 Stainless Steel for exceptional corrosion resistance and longevity.
- **Hustle Free Installation:** The kit contains all essential hardware required for a seamless installation of 3/8" or 1/2" (10 or 12 mm) tempered glass panels.
- **Versatile Applications:** Suitable for both interior and exterior installations.

Specification

SKU NO.	Stainless Steel Rod	Weight Capacity	Maximum Door Height
LAGGM108	108" length, 3/32" thickness	Supports doors up to 220 lbs (100 kg)	98-7/16" (2.5 m)

Finishes

Brushed Stainless | Matte Black | Polished Stainless | Satin Brass | Custom Finishes

---

Included in Kit

LAGGM
Glass Mount Bracket

Included in Kit

LAGH108
LAG Series - Header Bar - 108" Length

Included in Kit

LAGDSL
Left Door Stop

Included in Kit

LAGDSR
Right Door Stop

Included in Kit

LAGRO
LAG Series - Door Roller

Included in Kit

GLASSPULL
Thru-Glass Pulls

Included in Kit

LAGFG
Floor Guide

Included in Kit

LAGHEC *
End Cap

(!) **Note: Visit** ggshardware.com
For Glass Fabrication & Product Information.

USE ONLY MONOLITHIC TEMPERED GLASS

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

03 Storefront & Entrances Hardware

LAG Series – Wall Mount
Sliding Door Kits - LAG Series

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

LAGWM108
LAG Series - Wall Mount

Kit Includes

5 x Wall Mount Brackets
1 x Sliding Tube
1 x Left Door Stop
1 x Right Door Stop
2 x Door Rollers
1 x Thru-Glass Pull
1 x Floor Guide
2 x End Cap
1 x Tube Support

Key Features

- **High-Quality Materials:** Crafted from Grade 316 Stainless Steel for exceptional corrosion resistance and longevity.
- **Hustle Free Installation:** The kit contains all essential hardware required for a seamless installation of 3/8" or 1/2" (10 or 12 mm) tempered glass panels.
- **Smooth Sliding Mechanism:** Designed and made for seamless and quiet movement.

Specification

SKU NO.	Stainless Steel Rod	Weight Capacity	Maximum Door Height
LAGWM108	108" length, 3/32" thickness	Supports doors up to 220 lbs (100 kg)	98-7/16" (2.5 m)

Finishes

Brushed Stainless	Matte Black	Polished Stainless	Satin Brass	Custom Finishes

---

Included in Kit

LAGWMB
Wall Mount Bracket

Included in Kit

LAGH108
LAG Series - Header Bar - 108" Length

Included in Kit

LAGDSL
Left Door Stop

Included in Kit

LAGDSR
Right Door Stop

Included in Kit

LAGRO
LAG Series - Door Roller

Included in Kit

GLASSPULL
Thru-Glass Pulls

Included in Kit

LAGFG
Floor Guide

Included in Kit

LAGHEC ✳
End Cap

Included in Kit

LAGWM
Tube Support

USE ONLY MONOLITHIC TEMPERED GLASS

---

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

03 Storefront & Entrances Hardware

LAG Series – Double Door Wall Mount
Sliding Door Kits - LAG Series

LAGDDWM216
LAG Series - Double Door Wall Mount

Kit Includes
5 x Wall Mount Brackets
1 x Sliding Tube
1 x Left Door Stop
1 x Right Door Stop
4 x Door Rollers
1 x Thru-Glass Pull
1 x Floor Guide
2 x End Cap
1 x Tube Support

Key Features
- **High-Quality Materials:** Crafted from Grade 316 Stainless Steel for exceptional corrosion resistance and longevity.
- **Hustle Free Installation:** The kit contains all essential hardware required for a seamless installation of 3/8" or 1/2" (10 or 12 mm) tempered glass panels.
- **Smooth Sliding Mechanism:** Designed and made for seamless and quiet movement.

Specification

SKU NO.	Stainless Steel Rod	Weight Capacity	Maximum Door Height
LAGDDWM216	216" length, 3/32" thickness	Supports doors up to 220 lbs (100 kg)	98-7/16" (2.5 m)

Finishes
Brushed Stainless | Matte Black | Polished Stainless | Satin Brass | Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Included in Kit — **LAGWMB** — Wall Mount Bracket
Included in Kit — **LAGH216** — LAG Series - Header Bar – 216" Length
Included in Kit — **LAGDSL** — Left Door Stop
Included in Kit — **LAGDSR** — Right Door Stop
Included in Kit — **LAGRO** — LAG Series - Door Roller
Included in Kit — **GLASSPULL** — Thru-Glass Pulls
Included in Kit — **LAGFG** — Floor Guide
Included in Kit — **LAGHEC** — End Cap
Included in Kit — **LAGWM** — Tube Support

USE ONLY MONOLITHIC TEMPERED GLASS

Soft–Closing Sliding Door System

| P13 Frameless Shower Door | P163 Storefront & Entrance System | P261 Stock Glass Doors |
| P85 Railing Hardware | P223 Door Rails & Architectural Hardware | P271 Glazing Supplies |

03 Storefront & Entrances Hardware

Soft-Closing Sliding Door System

Finishes

Brushed Stainless

Matte Black

Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Key Features:

- **Soft-Closing Mechanism:** Included in Kit, the Hydraulic Damper ensures gentle and noiseless door movement.
- **High Load Capacity:** Supports glass panels up to 264.5 lb (120 kg).
- **Universal Compatibility:** Suitable for tempered glass with a thickness of 3/8" to 1/2" (10 to 12 mm).
- **Track Length:** 3 meters for flexible installation options.
- **Durable Construction:** Made from premium aluminum for long-lasting performance.

Wall/Ceiling Mount Kit

SOFTWM
Wall & Ceiling Mount

Glass Mount Kit

SOFTGM
Glass Mount

SOFTCLD
Header Track - Cladding

SOFTH
Header Track - Base

SOFTGM1
Effortless Series - Glass Mount

SOFTKIT - Header Not Included
Effortless Series - Wall Mount Kit

EZY Sliding Door Kits

P13 Frameless Shower Door	**P163** Storefront & Entrance System	**P261** Stock Glass Doors	
P85 Railing Hardware	**P223** Door Rails & Architectural Hardware	**P271** Glazing Supplies	

03 Storefront & Entrances Hardware

EZY1 Sliding Door Kits – Facia Mount

Designers Selected

Finishes

- Brushed Stainless
- Satin Anodized
- Matte Black
- Custom Finishes

Specification

- **Regular & Heavy Duty Rating:** Supports up to 80 kg & 120 kg of weight for reliable performance.
- **Glass Compatibility:** Suitable for 3/8" to 1/2" (10 mm to 12 mm) monolithic tempered glass.
- **Header Track Length:** 118"

EZY1SD
Single Sliding Door Kit

EZY1HDSD (Heavy Duty)
Single Sliding Door Kit

EZY1HSD
Single Sliding Door Track (118" Length)

EZY1HSDP
Single Door + Panel Track (118" Length)

EZY1DD
Double Sliding Door Kit

EZY1HDDD (Heavy Duty)
Double Sliding Door Kit

EZY1HDD
Double Sliding Door Track (118" Length)

EZY1END
Endcap for EZY1 Series Sliding Door Kit

EZY1SDP
Single Door + Fixed Panel Kit

EZY1HDSDP (Heavy Duty)
Single Door + Fixed Panel Kit

EZY1RDKIT
Sliding Door Kit - Regular Duty

EZY1HDKIT (Heavy Duty)
Sliding Door Kit - Heavy Duty

EZY1WM
Wall Mount Bracket

Grey Goat Color Sample Tower Available at gghardware.com

P13 Frameless Shower Door	**P163** Storefront & Entrance System	**P261** Stock Glass Doors
P85 Railing Hardware	**P223** Door Rails & Architectural Hardware	**P271** Glazing Supplies

03 Storefront & Entrances Hardware

EZY2 Sliding Door Kits – Ceiling Mount
Cladding Option Available

Finishes

- Brushed Stainless
- Satin Anodized
- Matte Black
- Custom Finishes

Specification

- **Regular & Heavy Duty Rating:** Supports up to 80 kg & 120 kg of weight for reliable performance.
- **Glass Compatibility:** Suitable for 3/8" to 1/2" (10 mm to 12 mm) monolithic tempered glass.
- **Header Track Length:** 118"

EZY2SD
Single Sliding Kit

EZY2HDSD (Heavy Duty)
Single Sliding Kit

EZY2SDP
Single Sliding + Fixed Panel Kit

EZY2HDSDP (Heavy Duty)
Single Sliding + Panel Track (118") / HD

EZY2CLDSD
Single Sliding Kit with cladding

EZY2HDCLDSD (Heavy Duty)
Single Sliding Kit with Cladding

EZY2CLDSDP
Single Sliding + Fixed Panel Kit with Cladding

EZY2HDCLDSDP (Heavy Duty)
Single Sliding + Panel Kit with Cladding

EZY2HSD
Single Sliding Track (118" Length)

EZY2HSDP
Fixed Panel Track (118" Length)

EZY2CLD
Extra Cladding (118" Length)

EZY2END2
Endcap for EZY2 Series Sliding Door Kit

EZY2RDKIT
Sliding Door Kit - Regular Duty

EZY2HDKIT
Sliding Door Kit - Heavy Duty

* For the most up-to-date product availability, visit our website.

217

www.ggshardware.com

Continuous Gear Hinge

Continuous Gear Hinge

NEW

Finishes

■ Matte Black

□ Satin Anodized

▦ Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Specification

- **Durable Construction:** Supports doors up to 200 lbs for long-lasting strength and performance.
- **Full-Length Hinge Design:** Applied along the entire door length to balance and distribute weight evenly.
- **Seamless Aesthetic:** The hinge is mounted to the frame rabbet and door edge, concealing both leaves.
- **Installation-Ready:** Includes all necessary fasteners for quick and straightforward installation.
- **Maximum allowed swing:** 80°

83" / 96" / 120" Long	83" / 96" / 120" Long	83" / 96" / 120" Long	83" / 96" / 120" Long

GH1083
Continuous Gear Hinge - 10 Series

GH2083
Continuous Gear Hinge - 20 Series

GH3083
Continuous Gear Hinge - 30 Series

GH4083
Continuous Gear Hinge - 40 Series

Grey Goat – Samples

Grey Goat – Samples

Finishes

Brushed Stainless	Matte Black	Polished Stainless	Satin Brass	Custom Finishes

TRANQ78PS-SAMPLE

Tranquility Kit Sample

GGHCOLORSAMPLE

GGH Color Sample Kit

GGHARCSAMPLE

GGH Arc Series Standoff Sample

---

* For the most up-to-date product availability, visit our website.

222

www.ggshardware.com

Door Rails & Sidelite Rails

P13 Frameless Shower Door	**P163** Storefront & Entrance System	**P261** Stock Glass Doors
P85 Railing Hardware	**P223** Door Rails & Architectural Hardware	**P271** Glazing Supplies

04 Door Rails & Architectural Hardware

DLUX 4" Door Rail System

Finishes

Brushed Stainless Steel	Polished Stainless	Matte Black	Satin Anodized	Custom Finishes

*For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Key Features:

- **Durable Build:** Constructed from high-quality 6060 T6 Aluminum for superior strength and corrosion resistance.
- **Efficient Installation:** Designed for quick and easy installation with no expensive tools required, ensuring time and cost savings.
- **Locking Mechanism:** Includes a built-in locking mechanism, offering enhanced security for glass doors.
- **Compact Dimensions:** 35-3/4" length for compatibility with standard installations.
- **Endcap (Included):** The specially designed endcap [DLUX4DEND], included in all finishes as of Base Shoe is used to securely attach at the ends for a clean and finished look

Cylinder Lock Accessory Options (Sold Separately):

- **Keyed Lock Cylinder [DLUXCYLK]:** Provides secure locking with a traditional key for enhanced security in high-traffic areas.
- **Thumb turn Cylinder [DLUXCYLT]:** Offers easy access with a thumb-turn mechanism, ideal for interior doors and low-traffic applications.
- **Dummy Cylinder [DLUXCYLD]:** A non-functional cylinder designed for aesthetic purposes, used when a locking mechanism is not required.

Kit Includes

1 X DLUX4D35 or 37 or 48
2 X DLUX4DEND
1 X DLUX4DPSB

USE ONLY MONOLITHIC TEMPERED GLASS

4-1/32"

1-27/32"

DLUX4D35, 37, 48

DLUX 4" Door Rail - Without Lock

Kit Includes

1 X DLUX4D35 or 37 or 48
2 X DLUX4DEND
1 X DLUX4DPSB
1 X DLUXCYLMT

Sold Separate

DLUXCYLK
DLUXCYLT
DLUXCYLD

MATCHING FINISHES AVAILABLE

DLUX4D35L, 37L, 48L

DLUX 4" Door Rail - With Lock

Without Lock - Dimension	SKU	With Lock - Dimension	SKU
35-3/4"	DLUX4D35	35-3/4"	DLUX4D35L
37-3/4"	DLUX4D37	37-3/4"	DLUX4D37L
48"	DLUX4D48	48"	DLUX4D48L

DLUX 4" Door Rail – Accessories

Finishes

- Brushed Stainless
- Matte Black
- Satin Anodized
- Custom Finishes

Custom Fabrication Available

Included in Kit

DLUX4DEND

Door Rail Endcap

Included in Kit

DLUXCYLMT

Door Rail Lock

Included in Kit

DLUX4DPSB

Door Rail System - Pivot Slide Block

Sold Separate

DLUX4HWRENCH

3/16" Hex Wrench

Sold Separate

DLUXCYLK

Key Lock Cylinder

Sold Separate

DLUXCYLT

Thumbturn Lock Cylinder

Sold Separate

DLUXCYLD

Dummy Cylinder

Note: Visit ggshardware.com
For Glass Fabrication & Product Information.

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

04 Door Rails & Architectural Hardware

DLUX 4" Sidelite Rail System

Finishes

Matte Black
Stainless Steel
Satin Anodized
Custom Finishes

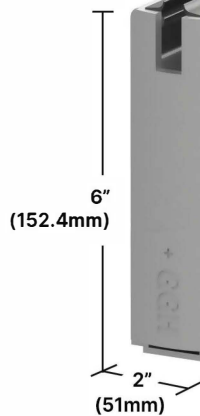## Specification

- **Compatible with:** The 4" Architectural Door Rail System for seamless storefront installations.
- **Length:** 120" (10ft) & 240" (20ft)
- **Clearance Options:** Includes a reversible saddle for 1/4" or 3/4" clearance
- **Roll-In Gasket:** Includes roll-in gasket for 1/2" or 3/8" glass
- For glass fabrication details, CAD files, and the latest product information, please visit our website.
- Stock and finish availability may vary by product.

Kit Includes
1 X DLUX4SL120
1 X DLUX4SLSAD120
1 X ARUB12 (10FT)

DLUX4SL120
DLUX 4" Sidelite Rail - 120" (10ft) Length

Kit Includes
1 X DLUX4SL240
2 X DLUX4SLSAD120
1 X ARUB12 (20FT)

DLUX4SL240
DLUX 4" Sidelite Rail - 240" (20ft) Length

4" (102 mm) / 2" (51 mm)

Included in Kit | **1/2"(12mm) Glass**

ARUB12
Architectural Roll-In Gasket for 1/2" (12mm) Glass

3/8"(10mm) Glass

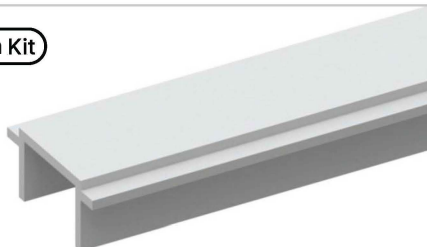**ARUB10**
Architectural Roll-In Gasket for 3/8" (10mm) Glass

Sold Separate

Included in Kit

DLUX4SLSAD120
Additional Saddle for DLUX 4" Sidelite Rail 10' & 20' Length

AUSB4
Architectural Neoprene Setting Block - 4" Length

DLUX4SLEND
Endcap for DLUX 4" Sidelite Rail

DLUX 6" Door Rail System

Finishes

- Brushed Stainless
- Matte Black
- Satin Anodized
- Custom Finishes

*For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Key Features:

- **Durable Build:** Constructed from high-quality 6060 T6 Aluminum for superior strength and corrosion resistance.
- **Efficient Installation:** Designed for quick and easy installation with no expensive tools required, ensuring time and cost savings.
- **Locking Mechanism:** Includes a built-in locking mechanism, offering enhanced security for glass doors.
- **Compact Dimensions:** 35-3/4" length for compatibility with standard installations.
- **Endcap (Sold Separately):** The specially designed endcap [DLUX4DEND], available in all finishes as of Base Shoe is used to securely attach at the ends for a clean and finished look

Cylinder Lock Accessory Options (Sold Separately):

- **Keyed Lock Cylinder [DLUXCYLK]:** Provides secure locking with a traditional key for enhanced security in high-traffic areas.
- **Thumb turn Cylinder [DLUXCYLT]:** Offers easy access with a thumb-turn mechanism, ideal for interior doors and low-traffic applications.
- **Dummy Cylinder [DLUXCYLD]:** A non-functional cylinder designed for aesthetic purposes, used when a locking mechanism is not required.

Kit Includes
1 X DLUX6D35 or 37 or 48
2 X DLUX6DEND
1 X DLUX6DPSB

6"

1-27/32"

DLUX6D35
DLUX 6" Door Rail - Without Lock

Kit Includes
1 X DLUX6D35 or 37 or 48
2 X DLUX6DEND
1 X DLUX6DPSB
1 X DLUXCYLMT

Sold Separate
DLUXCYLK
DLUXCYLT
DLUXCYLD

Matching Finishes Available

6"

1-27/32"

DLUX6D48L
DLUX 6" Door Rail - With Lock

Without Lock - Dimension	SKU	With Lock - Dimension	SKU
35-3/4"	DLUX6D35	35-3/4"	DLUX6D35L
37-3/4"	DLUX6D37	37-3/4"	DLUX6D37L
48"	DLUX6D48	48"	DLUX6D48L

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

04 Door Rails & Architectural Hardware

DLUX 6" Door Rail Lock Accessories

Finishes

Brushed Stainless

Matte Black

Satin Anodized

Custom Finishes

Included in Kit

DLUX4DEND

Door Rail Endcap

Included in Kit

DLUXCYLMT

Door Rail Lock

Included in Kit

DLUX4DPSB

Door Rail System - Pivot Slide Block

Sold Separate

DLUXCYLK

Key Lock Cylinder

Sold Separate

DLUXCYLT

Thumbturn Cylinder

Sold Separate

DLUXCYLD

Dummy Cylinder

Sold Separate

DLUX4HWRENCH

3/16" Hex Wrench

Sold Separate

DLUX4HTDF

Standard Top Door Rail Pivot Arm

Sold Separate

PPIV401-2H

Top Free Swing Pivot - 2 Holes

Short Arm / Long Arm

DLUX4HARMS
DLUX4HARML

Concealed Closer Arm

---

* For the most up-to-date product availability, visit our website.

228

www.ggshardware.com

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

04 Door Rails & Architectural Hardware

DLUX 6" Sidelite Rail System

Finishes

Matte Black
Stainless Steel
Satin Anodized
Custom Finishes

Specification

- **Compatible with:** The 6" Architectural Door Rail System for seamless storefront installations.
- **Length:** 120" (10ft)
- **Clearance Options:** Includes a reversible saddle for 1/4" or 3/4" clearance
- **Roll-In Gasket:** Includes roll-in gasket for 1/2" & 3/8" glass

Kit Includes
1 X DLUX6SL120
1 X DLUX6SLSAD120
1 X ARUB12 (10FT)

6"
(152.4mm)

2"
(51mm)

DLUX6SL120
DLUX 6" Sidelite Rail - 120" (10ft) Length

1/2"(12mm) Glass   **Included in Kit**

ARUB12
Architectural Roll-In Gasket for 1/2" (12mm) Glass

3/8"(10mm) Glass

ARUB10
Architectural Roll-In Gasket for 3/8" (10mm) Glass

Sold Separate

Included in Kit

DLUX4SLSAD120
Additional Saddle for DLUX 4" Sidelite Rail - 10' & 20' Length

Sold Separate

AUSB4
Architectural Neoprene Setting Block - 4" Length

DLUX6SLEND
Endcap for DLUX 6" Sidelite Rail

---

* For the most up-to-date product availability, visit our website.

229

www.ggshardware.com

P13 Frameless Shower Door P163 Storefront & Entrance System P261 Stock Glass Doors
P85 Railing Hardware P223 Door Rails & Architectural Hardware P271 Glazing Supplies

04 Door Rails & Architectural Hardware

4" Taper Door Rail

Finishes

Clear Anodized

Matte Black

- **Durable Build:** Constructed from high-quality 6060 T6 Aluminum for superior strength and corrosion resistance.
- **Efficient Installation:** Designed for quick installation with no expensive tools required, ensuring time and cost savings.
- **Locking Mechanism:** Includes a built-in locking mechanism, offering enhanced security for glass doors.

Kit Includes
1 X DLUX4T35 or 37 or 48
2 X DLUX4TEND
1 X DLUX4DPSB
1 X DLUXCYLMT

Sold Separate
DLUXCYLK
DLUXCYLT
DLUXCYLD

Matching Finishes Available

Kit Includes
1 X DLUX4T35 or 37 or 48
2 X DLUX4TEND
1 X DLUX4DPSB

DLUX4T35L, 37L & 48L
Door rail taper 4" with lock

DLUX4T35, 37 & 48
Door rail taper 4" without lock

Sold Separate

DLUX4TEND
Taper Door Rail Endcap

1/2"(12mm) Glass

ARUB12
Architectural Roll-In Gasket for 1/2" (12mm) Glass

Included in Kit

DLUX4SLSAD120
Additional Saddle for DLUX 4" Sidelite Rail - 10' & 20' Length

3/8"(10mm) Glass

ARUB10
Architectural Roll-In Gasket for 3/8" (10mm) Glass

Sold Separate

AUSB4
Architectural Neoprene Setting Block - 4" Length

---

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

P13 Frameless Shower Door	P163 Storefront & Entrance System	P261 Stock Glass Doors
P85 Railing Hardware	P223 Door Rails & Architectural Hardware	P271 Glazing Supplies

04 Door Rails & Architectural Hardware

4" Sidelite Rail

Finishes

- Black Bronze Anodized
- Satin Anodized
- Custom Finishes

Specification

- **Compatible with:** The 4" Taper Architectural Door Rail System for seamless storefront installations.
- **Length:** 120" (10ft) & 240" (20ft)
- **Clearance Options:** Includes a reversible saddle for 1/4" or 3/4" clearance
- **Roll-In Gasket:** Includes roll-in gasket for 1/2" (12mm) or 3/8" (10mm) glass

Kit Includes
1 X DLUX4TSL120
1 X DLUX4SLSAD120
1 X ARUB12 (10FT)

Kit Includes
1 X DLUX4TSL240
2 X DLUX4SLSAD120
1 X ARUB12 (20FT)

DLUX4TSL120
DLUX4TSL240

4" Taper Sidelite - 120" (10ft) or 240" (20ft) Length

Sold Separate

DLUX4TEND

Taper Door Rail Endcap

1/2"(12mm) Glass

ARUB12

Architectural Roll-In Gasket for 1/2" (12mm) Glass

3/8"(10mm) Glass

ARUB10

Architectural Roll-In Gasket for 3/8" (10mm) Glass

Included in Kit

DLUX4SLSAD120

Additional Saddle for DLUX 4" Sidelite Rail - 10' & 20' Length

Sold Separate

AUSB4

Architectural Neoprene Setting Block - 4" Length

---

* For the most up-to-date product availability, visit our website.

231

www.ggshardware.com

* For the most up-to-date product availability, visit our website.

232

www.ggshardware.com

DLUX 1–3/4" X 4" Header System

DLUX 1–3/4" X 4" Header System

Finishes

- Matte Black
- Stainless Steel
- Satin Anodized
- Custom Finishes

Specification

- **Standard Length:** Components available in 120" (10 FT) & 240" (20 FT) stock length for convenient purchasing.
- **Custom Fabrication:** Customizable 4" Architectural Door Header Systems tailored to your specifications.
- **Pre-Fabricated Options:** Ready-to-install single and double-door header systems for faster project completion.

DLUX4H120

DLUX 1-3/4 X 4" Header - 120" Length

DLUX4H240

DLUX 1-3/4 X 4" Header - 240" Length

DLUX4HPP120

DLUX 1-3/4 X 4" Header System - Pocket Plate - 120" Length

DLUX4HCP

DLUX 1-3/4 X 4" Header System - Closer Cover Plate - 14" Length

DLUX4HFP120

DLUX 1-3/4 X 4" Header System - Flat Plate - 120" Length

Header With Flat Plate

Header With Pocket Plate

Header With Flat Plate + Concealed Closer Plate

Custom Header Fabrication Available

DLUX 1–3/4" X 4" Header System

Finishes

Matte Black
Satin Anodized
Stainless Steel
Custom Finishes

Specification

- **Ease of Installation:** Quick and hassle-free setup saves time and money; no expensive tools are required.
- **Complete Kit:** Includes mounting clips, screws, and detailed instructions for a seamless assembly experience.
- **Material:** Made from durable solid brass for long-lasting performance.

HO/NHO **Complete With All Fasteners**

ASSA ABLOY

DLUX4HDC90HOEXT
Concealed Overhead Header Door Closer Extended

Heavy Duty

DLUX4HDC90NHOEXTHD
ROCKWOOD 304 Heavy-Duty Overhead Concealed Door Closer

HO/NHO **Complete With All Fasteners**

9/16" (14.2mm) Spindle Height

DLUX4HDC90
Concealed Overhead Header Door Closer / Custom header fabrication Available

HO/NHO **Complete With All Fasteners**

3/4" (19mm) Spindle Height

DLUX4HDC9034
Concealed Overhead Header Door Closer / Custom header fabrication Available

DSTOP2
Door Rail System - Single Door Stop

DSTOP6
Door Rail System - Single Door Stop

Complete With All Fasteners

DLUX4WMB
DLUX Header System - Wall Mount Bracket

DLUX 1–3/4" X 4" Header System

Finishes

Matte Black
Satin Anodized
Stainless Steel
Custom Finishes

Specification

- Quick and easy installation
- Available in Short & Long Size
- No expensive tools required
- Designed to work with concealed closers
- Compatible with 4" Architectural Header System and Sidelite Rail System

---

Short Arm/Long Arm

DLUX4HARM

Concealed Closers Arm (Short Arm & Long Arm)

DLUX4H609ARM

ROCKWOOD Overhead Closer Arm (OHC-609-ARM)

DLUX4DP

Door Rail System - Pivot Slide Block

Heavy Duty

DLUXPIVHD

DLUX End Load Bottom Pivot

2SIDETAPE

Double-Sided Tape (1" x 175ft Long)

DLUXPIVWB

DLUX Door Rail Top Pivot - Walking Beam Pivot

DLUX4HTDF

Standard Top Door Rail Pivot Arm

DLUXPIVDP

Dual Purpose Pivot Kit

DLUXPIVADJ1434

Adjustable Bottom Pivot - 1/4"-3/4"

---

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

P13 Frameless Shower Door

P85 Railing Hardware

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware

P261 Stock Glass Doors

P271 Glazing Supplies

04 Door Rails & Architectural Hardware

Smoke Baffle

Finishes

- Matte Black
- Stainless Steel
- Satin Anodized

Specification:

- **Durable Build:** Constructed from high-quality 6060 T6 Aluminum for superior strength and corrosion resistance.
- Endcap sold separately.

120" / 240'

SMKBFLKIT

Smoke Baffle Kit with Cladding & Endcap

SMKBFLEXT

Smoke Baffle Extrusion

SMKBFLCLD

Cladding for Smoke Baffle

SMKBFLEND

End Caps for Smoke Baffle

* For the most up-to-date product availability, visit our website.

237

www.ggshardware.com

Partition Sliding System

Format Sliding Door Entrance System

- The Format Sliding Door Entrance System offers a modern, durable solution for creating expansive glass entrances in both commercial and residential settings.
- Equipped with 4" tapered Series door rails on both top and bottom.
- Utilizes the Glass Securing System for reliable glass retention.
- Available in seven architectural finishes to complement various design themes.
- Bottom-rolling system ensures smooth operation and durability.
- Suitable for various commercial and residential entrance applications.

Door Configurations:

- X: Single sliding panel.
- XX: Two sliding panels on a single or double track.
- XO / OX: One sliding panel paired with a fixed panel.
- XOX: Sliding panels on both ends with a fixed center panel.
- OXO: Fixed panels on both ends with a central sliding panel.
- OXXO: Two central sliding panels flanked by fixed panels on each side.
- XXXX: Four-panel system with multiple sliding and fixed panel combinations.

Continuous Gear Hinge

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

03 Storefront & Entrances Hardware

Continuous Gear Hinge

INSTALLER'S FAVORITE!
GOAT Drill & Spade Bits,
Refer Page Number: 272

Finishes

Matte Black

Satin Anodized

Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.
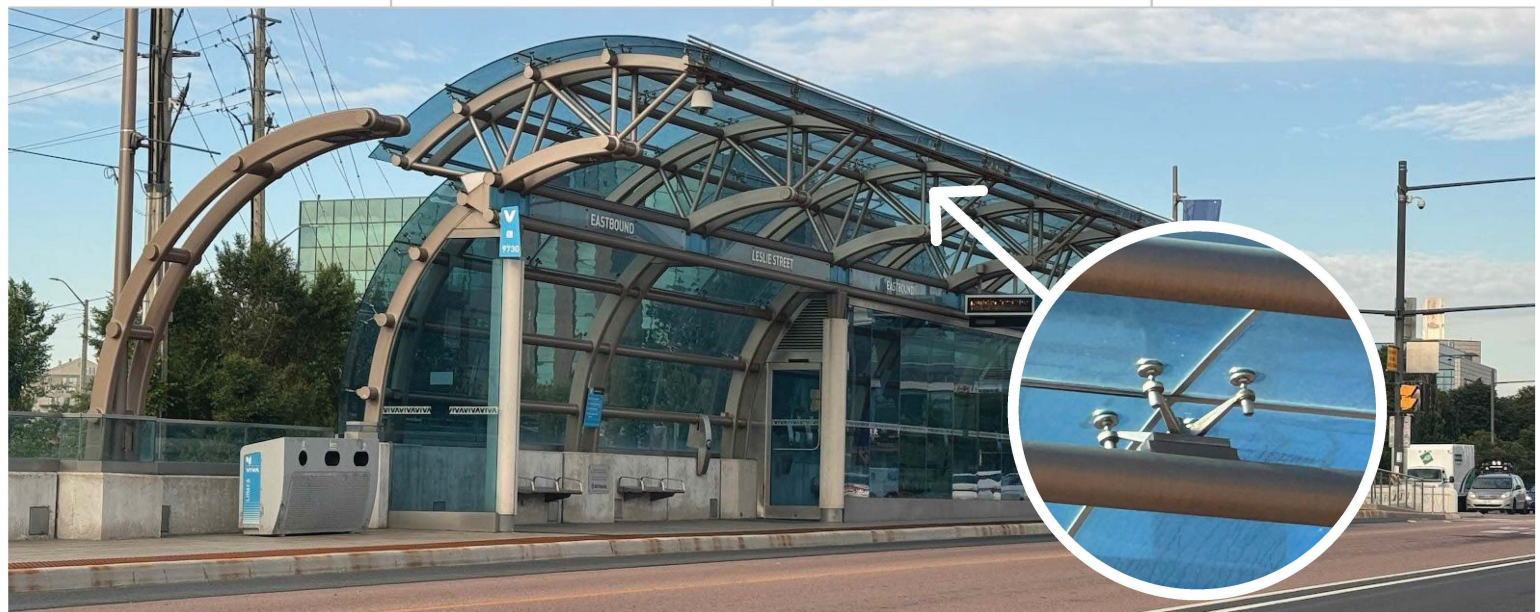
Specification

- **Durable Construction:** Supports doors up to 200 lbs for long-lasting strength and performance.
- **Full-Length Hinge Design:** Applied along the entire door length to balance and distribute weight evenly.
- **Seamless Aesthetic:** The hinge is mounted to the frame rabbet and door edge, concealing both leaves.
- **Installation-Ready:** Includes all necessary fasteners for quick and straightforward installation.
- **Maximum allowed swing:** 80°

83" / 96" / 120" Long	83" / 96" / 120" Long	83" / 96" / 120" Long	83" / 96" / 120" Long
GH1083	**GH2083**	**GH3083**	**GH4083**
Continuous Gear Hinge - 10 Series	Continuous Gear Hinge - 20 Series	Continuous Gear Hinge - 30 Series	Continuous Gear Hinge - 40 Series

Exposed Door Closer

Exposed Door Closer

INSTALLER'S FAVORITE!
GOAT Drill & Spade Bits, Refer Page Number: 272

Finishes

Clear Anodized   Matte Black   Custom Finishes

Key Features

- **Regular Arm Configuration:** Smooth, consistent closing for standard setups.
- **Back Check Function:** Prevents forceful opening to protect door and walls.
- **Non Hold Open Mechanism:** Auto-closes door for security and efficiency.

Non Hold Open   **Include Back Check Feature**

- **Max Door Width:** 950mm (37-3/16")
- **Max Door Weight:** 65 kg (143lbs)

EDC016

Exposed Door Closer - Size 3 - Non Hold Open

Non Hold Open   **Include Back Check Feature**

- **Max Door Width:** 1100mm (43-1/4")
- **Max Door Weight:** 80 kg (176lbs)

EDC017

Exposed Door Closer - Size 4 - Non Hold Open

9-3/4"

3-1/2"

DP017

Exposed Door Closer - Drop Plate

Rim Panic Device

Rim Panic Device

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.
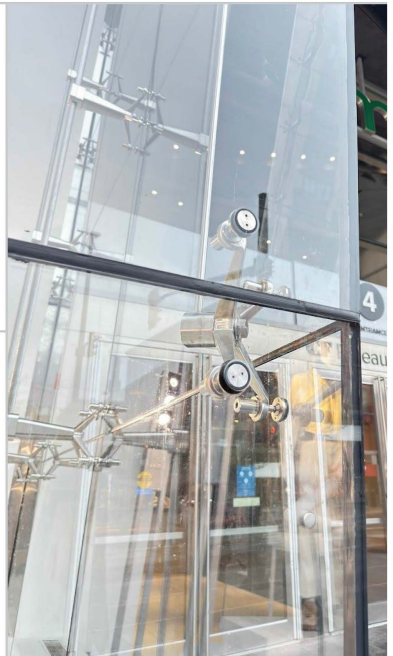
Finishes

Matte Black

Stainless Steel

Custom Finishes

Specification

- **Stainless Steel Finish:** Provides a sleek, durable, and corrosion-resistant surface.
- **Door Compatibility:** Suitable for use with aluminum narrow style, wood, or hollow metal doors.
- **Installation Fasteners Included:** Comes complete with all necessary fasteners for easy installation.
- **Latch Mechanism:** Ensures quick, secure exit with minimal force.

RPD003SS

Rim Panic Device - Stainless Steel

RPLT012SS

Rim Panic Lever Trim - Stainless Steel

Commercial Ladder Pulls

12" Overall

12" CTC

Specification

- **Material:** Premium SS304 stainless steel for superior durability
- **Tubular Diameter:** 1" (25.4mm) for a modern and comfortable grip
- **Suitable for Glass Thickness:** 3/8" - 3/4" (10mm - 19mm) tempered glass
- **Suitable for Wood/Aluminum Door Thickness:** Up to 1-3/4" (44mm)
- **Simple Installation:** Prepped for back-to-back mounting with included fasteners
- **Environment:** Perfect fit for Double Aluminum Door opening with two offset handle side by side for comfortable opening

Finishes

Brushed Stainless

Matte Black

Satin Anodized

Custom Finishes

OSTUB12

12" Offset Tubular Commercial Pull Handle

Architectural U–Channels

Architectural U-Channels

Finishes

- Matte Black
- Stainless Steel
- Satin Anodized
- Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Specification

- **Compatible with:** The 4" Architectural Door Rail System for seamless storefront installations.
- **Length:** 240" (20ft)
- **Clearance Options:** Includes a reversible saddle for 1/4" or 3/4" clearance
- **Roll-In Gasket:** Includes roll-in gasket for 1/2" glass

AU120 & AU240

Architectural U-Channels with Roll-In Gaskets - 120" & 240" Length

1/2"(12mm) & 3/8"(10mm) Glass

ARUB12 & ARUB10

Architectural Roll-In Gasket for 1/2" (12mm) & 3/8" (10mm)Glass

ROLLER01 ✳

Vinyl Roller Tool

AUEND

Endcaps for Architectural U-Channels

2SIDETAPE

Double-Sided Tape (1" X 175ft Long)

AUSB4

Architectural Neoprene Setting Block - 4" Length

Commercial Spider Fittings

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

04 Door Rails & Architectural Hardware

Commercial Spider Fittings – SPY Series

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Finishes

Matte Black
Satin Anodized
Stainless Steel
Custom Finishes

Specification

Engineered Data Sheet Available!

- **Versatile Applications:** Ideal for commercial building facades, glass canopies, and interior partition walls.
- **High Load Capacity:** Designed to hold large glass panels securely, maintaining structural integrity and aesthetic appeal.
- **Durable Finish:** Available in brushed or polished stainless steel to suit different environment needs and withstand the elements.
- **Engineered data Available**

SPYFM4
Fin Mount Spider Fittings
Quad Arm

SPYFM2V
Fin Mount Spider Fittings
Double Arm V-Shape

SPYFM2Y
Fin Mount Spider Fittings
Double Arm Y-Shape

SPYFM1R
Fin Mount Spider Fittings
Single Arm Right

SPYFM1L
Fin Mount Spider Fittings
Single Arm Left

SPYFM2
Fin Mount Spider Fittings
Double Arm

SPYFM1
Fin Mount Spider Fittings
Single Arm

SPYPM4
Post Mount Spider Fittings
Quad Arm

SPYPM4C
Post Mount Spider Fittings
Quad Arm Corner

* For the most up-to-date product availability, visit our website.

249

www.ggshardware.com

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

04 Door Rails & Architectural Hardware

Commercial Spider Fittings – SPY Series

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Finishes

Matte Black
Satin Anodized
Stainless Steel
Custom Finishes

Specification

- **Versatile Applications:** Ideal for commercial building facades, glass canopies, and interior partition walls.
- **High Load Capacity:** Designed to hold large glass panels securely, maintaining structural integrity and aesthetic appeal.
- **Durable Finish:** Available in brushed or polished stainless steel to suit different environment needs and withstand the elements.

SPYPM3
Post Mount Spider Fittings
Triple Arm

SPYPM2V
Post Mount Spider Fittings
Double Arm V-Shape

SPYPM2
Post Mount Spider Fittings
Double Arm

SPYPM2C
Post Mount Spider Fittings
Double Arm Corner

SPYPM1
Post Mount Spider Fittings
Single Arm

SPYPM1R
Post Mount Spider Fittings
Single Arm Left or Right

SPY Series Fasteners – SPY Series

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Finishes

Matte Black
Satin Anodized
Stainless Steel
Custom Finishes

Specification

- **High-Quality Material:** Made from 316 Alloy Stainless Steel for superior strength and weather resistance.
- **Fastening Mechanism:** Interior/exterior fixed or swivel mount that can tilts 6° for even stress distribution.
- **Suitable Glass Thickness:** 5/16" to 7/8" (8mm to 23mm)

	(5/16" to 19/32")	5/16" to 11/16"	11/16" to 1-1/32"	5/8" to 7/8"

SPYFARIG818
Rigid
For 8mm to 18mm Glass

SPYFASWEXT1523
Exterior Swivel
For 8mm to 15mm Glass

SPYFASW1826
Interior Swivel
For 8mm to 18mm Glass

SPYFASWEXT815
Interior Swivel
For 18mm to 26mm Glass

SPYFASW818
Exterior Swivel
For 15mm to 23mm Glass

* For the most up-to-date product availability, visit our website.

250

www.ggshardware.com

Glass Canopy Brackets

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

04 Door Rails & Architectural Hardware

Double Arm Connector

Finishes

Brushed Stainless Steel   Matte Black Anodized Aluminum   Custom Finishes

- **Premium Material:** Made from high-quality stainless steel for strength and long-lasting durability.
- **Removable Round Adapter:** Allows easy customization for round or flat posts for versatile installation.

Adjustable

PROARMADJ

Double Arm Glass Connector - Adjustable

Fixed

PROARM

Double Arm Glass Connector - Fixed

Canopy Bracket

Finishes

Brushed Stainless Steel   Matte Black Anodized Aluminum   Custom Finishes

*Custom configuration and size available based upon request products@ggshardware.com

Custom Fabrication Available

24"

GC2401

Glass Canopy Bracket (24" Height)

36"

GC3601

Glass Canopy Bracket (36" Height)

Ask us about
FACTORY DIRECT PROGRAM

* For the most up-to-date product availability, visit our website.

www.ggshardware.com

Windows Hardware

Window Hardware

- **Durable Aluminum Frame:** Can be cut to fit various height openings.
- **Pre-Assembled Components:** Includes pre-installed rollers and corners for easy setup.
- **Secure & Functional:** Comes with locking handle and bug strip for added protection.

SDK20
Heavy-Duty Extruded Sliding Screen Door Kit

CGNCR
Nylon Combination Roller

SSLATCH
Sliding Screen Latch & Pull with Screw Holes

CFSM36100
Charcoal Fiberglass Screen Mesh
36" Width - 100' Roll

SRS125500
Screen Retainer Spline - 0.125" ø - 500' Length

FCSS120500
Foam Core Screen Spline - 0.12" Ø - 500' Length

DO-IT-YOURSELF

**Sliding Screen
Door Kit**

Drive Thru Windows & Speak Thru

Drive Thru Windows & Speak Thru Series

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Horton

Finishes

Custom Finishes

Specification

- **Opening Operation:** Auto/manual bi-parting or single-side options to suit any need.
- **Glass:** 1" (25 mm) clear tempered glass and 1/4" (6 mm) prep.
- **Design:** Thin stile panels for a contemporary, clean appearance.
- **Counter & Apron:** Stainless steel counter and metal apron for durability.

- **Electrical:** Requires 120VAC, 60 cycle, single-phase, 15-amp service; average current draw is under 2 amps. Up to 5 units may be connected to 1 circuit.

Exterior Elevation

Floor Plan

DTW8100TS

Drive-Thru Window - Automatic Biparting - 8100TS Flush Mount

Exterior Elevation

Floor Plan

DTW8200TS

Drive-Thru Window - Automatic Biparting - 8200TS Projected

Exterior Elevation

Floor Plan

DTW8300

Drive-Thru Window - Security Single Slide - 8300 Projected

Exterior Elevation

Floor Plan

DTW8100

Drive-Thru Window - Automatic Single Slide - 8100 Flush Mount

Exterior Elevation

Floor Plan

DTW8900

Drive-Thru Window - Manual Single Slide - 8900 Flush Mount

Brushed Stainless

ST5

Speak Thru

Specification

- **Minimal Framing:** Provides a sleek design with minimal support for a contemporary glass canopy.
- **24" Protrusion:** Ample coverage for various applications, offering protection while maintaining an open feel.
- **Durable Construction:** Crafted from high-quality 316 Stainless Steel for strength, corrosion resistance, and long-lasting durability.
- **Glass Compatibility:** Designed for 1/2" thick glass with a 3/4" diameter hole for easy installation.

Partition System

This product is currently in development. The image shown may differ from the final product. For the latest specifications and availability, please refer to our website.

Door Configurations:

- Minimalist Design: Slim-profile frames provide a clean, contemporary look that complements various interior styles.
- Maximized Transparency: Large glass panels allow for abundant natural light, creating open and airy environments.
- Efficient Installation: System-specific accessories and snap-on covers facilitate quick and straightforward assembly.
- Customization Finishes: Available in a range of finishes to match your design preferences and project requirements.
- Versatile Applications: Ideal for offices, meeting rooms, and other interior spaces where both openness and separation are desired.

Format Sliding Door Entrance System

Enhance your interior spaces with our sleek and modern Glass Partition System, designed to offer both functionality and aesthetic appeal.

ADA Compliant Hardware

Key Features

- **Surface Options:** Electroplated Brass, Brushed Silver
- **Mirror Type:** 5mm Copper-Free Silver Mirror with Explosion-Proof Film
- **Size Options:** 610 × 862 mm, 610 × 915 mm, 711 × 1016 mm, or Custom Sizes
- **Frame:** Constructed from 304 Stainless Steel for enhanced durability
- **Frame Front Width:** 10 mm
- **Backing:** Explosion-Proof Film for added safety
- **Weld Point:** Invisible weld point for a sleek and smooth appearance
- **Hanging:** Double Fixed Metal Hooks for easy installation

Finishes

Brushed Stainless   Custom Finishes

ADAMIRROR

ADA-Compliance Mirror

Railing Glass Panels (1/2")

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

05 Stock Glass

1/2" (12mm) Railing Glass Panel
Railing Glass Panels (1/2")

34" Height

Y Width

Glass Panel

34" (863.6mm)

Railing Glass Panel - 34" Height

Dimension	SKU
18X34	RG18X34
22X34	RG22X34
26X34	RG26X34
30X34	RG30X34
34X34	RG34X34
36X34	RG36X34
42X34	RG42X34
44X34	RG44X34
48X34	RG48X34
50X34	RG50X34
54X34	RG54X34
56X34	RG56X34
60X34	RG60X34
66X34	RG66X34
72X34	RG72X34

41" Height

Y Width

Glass panel

41" (1041.4mm)

Railing Glass Panel - 41" Height

Dimension	SKU	Dimension	SKU
12X41	RG12X41	44X41	RG44X41
14X41	RG14X41	46X41	RG46X41
16X41	RG16X41	48X41	RG48X41
18X41	RG18X41	50X41	RG50X41
20X41	RG20X41	52X41	RG52X41
22X41	RG22X41	54X41	RG54X41
24X41	RG24X41	56X41	RG56X41
26X41	RG26X41	58X41	RG58X41
28X41	RG28X41	60X41	RG60X41
30X41	RG30X41	62X41	RG62X41
32X41	RG32X41	64X41	RG64X41
34X41	RG34X41	66X41	RG66X41
36X41	RG36X41	68X41	RG68X41
38X41	RG38X41	70X41	RG70X41
40X41	RG40X41	72X41	RG72X41
42X41	RG42X41		

P13 Frameless Shower Door **P163** Storefront & Entrance System **P261** Stock Glass Doors
P85 Railing Hardware **P223** Door Rails & Architectural Hardware **P271** Glazing Supplies

05 Stock Glass

1/2" (12mm) Railing Glass Panel
Railing Glass Panels (1/2")

46" Height

Y Width

46" (1168.4mm)

Glass Panel

Railing Glass Panel - 46" Height

Dimension	SKU
32X46	RG32X46
48X46	RG48X46
54X46	RG54X46
60X46	RG60X46
70×46	RG70X46
72X46	RG72X46

1/2" (12mm) Railing Glass Panel With Hinge Cutout only

34" Height With Hinge Cutout

Y Width

6" (152.4mm)

Glass Panel

34" (863.6mm)

46" (1186.4mm)

HULK Series
Hydraulic Hinge

Or

6" (152.4mm)

Railing Glass Panel - 46" Height with Hinge Cutouts

Dimension	SKU
32X46	RG32X46-2H
48X46	RG48X46-2H
54X46	RG54X46-2H
60X46	RG60X46-2H

1/2" (12mm) Railing Glass Panel With Hinge & Latch Cutout

Railing Glass Panels (1/2")

Y Width

6" (152.4mm)

Pool Fencing Latches with Lock

Glass Panel Hinge + Latch Cutout

34" (863.6mm)

46" (1186.4mm)

HULK Series Hydraulic Hinge

Or

6" (152.4mm)

RG32X46-2HL

1/2" Railing Glass Panel (Size: 32" x 46") With Hinge & Latch Cutout 32X46-2HL

Refer to local building codes for product compliance and installation requirements.

Factory Order Program

Factory Direct Savings on Volume Orders

Take advantage of our Factory Direct Program and save big on large-scale shower door orders. Whether you're working on condos, high-rises, or residential developments, we make the process easy, fast, and cost-effective

What You Get

01 Full Crates of Glass Shipped Directly to You

- Delivered fast and hassle-free - right to your shop or job-site.

02 Order Today – Just Give Us a Call

- Our team is ready to assist with quotes, coordination, and delivery planning.

Contact us to enroll: **sales@ggshardware.com**

Speak with our program manager: **1-905-264-1600**

Ask about our MOQ charts, lead time options, and program perks.

Stock Glass Doors

■ **P13** Frameless Shower Door	■ **P163** Storefront & Entrance System	■ **P261** Stock Glass Doors
■ **P85** Railing Hardware	■ **P223** Door Rails & Architectural Hardware	■ **P271** Glazing Supplies

05 Stock Glass

Shower Stock Door – 24" Width

Glass Thickness: 3/8" (10mm) Tempered Safety Glass.
Beveled and Polished Edges, Prefabricated for either 6" or 6×18" handle combinations

24" Width - 2 Hole

24" Width
12"
Hinge Cutout
6"X6" Handle Cutout
X Height
12"

X Height	SKU
64-2H	SD24X64-2H
66-2H	SD24X66-2H
68-2H	SD24X68-2H
70-2H	SD24X70-2H
72-1H	SD24X72-1H
72-2H	SD24X72-2H
74-2H	SD24X74-2H
76-2H	SD24X76-2H
78-2H	SD24X78-2H
80-2H	SD24X80-2H
82-2H	SD24X82-2H
84-2H	SD24X84-2H

24" Width - 3 Hole

24" Width
12"
Hinge Cutout
6"X18" Handle Cutout
X Height
12"

X Height	SKU
64-3H	SD24X64-3H
66-3H	SD24X66-3H
68-3H	SD24X68-3H
70-3H	SD24X70-3H
72-3H	SD24X72-3H
74-3H	SD24X74-3H
76-3H	SD24X76-3H
78-3H	SD24X78-3H
80-3H	SD24X80-3H
82-3H	SD24X82-3H
84-3H	SD24X84-3H

Shower Stock Door – 26" Width

Glass Thickness: 3/8" (10mm) Tempered Safety Glass.
Beveled and Polished Edges, Prefabricated for either 6" or 6×18" handle combinations

26" Width - 2 Hole

26" Width · 12" · Hinge Cutout · X Height · 6"X6" Handle Cutout · 12"

X Height	SKU
64-2H	SD26X64-2H
66-2H	SD26X66-2H
68-2H	SD26X68-2H
70-2H	SD26X70-2H
72-2H	SD26X72-2H
74-2H	SD26X74-2H
76-2H	SD26X76-2H
78-2H	SD26X78-2H
80-2H	SD26X80-2H
82-2H	SD26X82-2H
84-2H	SD26X84-2H

26" Width - 3 Hole

26" Width · 12" · Hinge Cutout · X Height · 6"X18" Handle Cutout · 12"

X Height	SKU
64-3H	SD26X64-3H
66-3H	SD26X66-3H
68-3H	SD26X68-3H
70-3H	SD26X70-3H
72-3H	SD26X72-3H
74-3H	SD26X74-3H
76-3H	SD26X78-3H
78-3H	SD26X78-3H
80-3H	SD26X80-3H
82-3H	SD26X82-3H
84-3H	SD26X84-3H

P13 Frameless Shower Door **P163** Storefront & Entrance System **P261** Stock Glass Doors
P85 Railing Hardware **P223** Door Rails & Architectural Hardware **P271** Glazing Supplies

05 Stock Glass

Shower Stock Door – Tranquility Series

Glass Thickness: 3/8" (10mm) Tempered Safety Glass.
Beveled and Polished Edges, Prefabricated for tranquility series sliding door kit.

30" Fixed Panel

30" Width

Tranquility Kit Cutout

X Height

Fixed Panel

X Height	SKU
60-PANEL	SD30X60PANEL
62-PANEL	SD30X62PANEL
66-PANEL	SD30X66PANEL
76-PANEL	SD30X76PANEL

30" Width - 1 Hole Sliding Panel

30" Width

Tranquility Kit Cutout

X Height

Sliding Panel

Thru Pull Cutout

X Height	SKU
60-1H	SD30X60DOOR-1H
62-1H	SD30X62DOOR-1H
66-1H	SD30X66DOOR-1H
76-1H	SD30X76DOOR-1H
76-2H	SD30X76DOOR-2H

Shower Glass Shelves (3/8")

Shower Glass Shelves (3/8")

SGS10X10
Stock Glass Shelves
10" X 10" - Round (Quarter Circle)

SGS9X9
Stock Glass Shelves
9" X 9" - Round (Quarter Circle)

Shower Shelf Clamps

- **Material:** Solid Brass for exceptional strength and resistance to corrosion
- **Glass Thickness Range:** 1/4" to 3/8" (6 to 10 mm) to accommodate a variety of glass shelf thicknesses
- **No Glass Fabrication Required:** Clamps tighten easily using nylon-tipped screws, streamlining installation without the need for custom glass fabrication

Finishes

Chrome	Brushed Nickel	Polished Nickel	Gun Metal	Antique Brass	White
Matte Black	Satin Brass	Brushed Bronze	Oil Rubbed Bronze	Polished Brass	Custom Finishes

SCSQ
Shower Shelf Clamp - Square
Glass Thickness Range: 1/4" to 3/8" (6mm to 10mm)

SCRD
Shower Shelf Clamp - Round
Glass Thickness Range: 1/4" to 3/8" (6mm to 10mm)

SCFL *
Shower Shelf Clamp - Falcon
Glass Thickness Range: 1/4" to 3/8" (6mm to 10mm)

* For the most up-to-date product availability, visit our website.

270

www.ggshardware.com

Glazing Supplies

Carbide Tip GOAT Drill & V Tip Spade Bits

GOAT Drill Bits

FEATURE PRODUCTS

Dimension	SKU
3/16" X 4"	GBIT-3/16X4 GBIT-3/16X4-10PACK
3/16" X 6"	GBIT-3/16X6 GBIT-3/16X6-10PACK
1/4" X 4"	GBIT-1/4X4 GBIT-1/4X4-10PACK
1/4" X 6"	GBIT-1/4X6 GBIT-1/4X6-10PACK
5/32" X 4"	GBIT-5/32X4 GBIT-5/32X4-10PACK

GOAT Spade Bits

Dimension	SKU
3/16" x 4"	SBIT-3/16X4 SBIT-3/16X4-10PACK
3/16" X 6"	SBIT-3/16X6 SBIT-3/16X6-10PACK
1/4" X 4"	SBIT-1/4X4 SBIT-1/4X4-10PACK
5/32" x 4"	SBIT-5/32X4 SBIT-5/32X4-10PACK
5/32" x 6"	SBIT-5/32X6 SBIT-5/32X6-10PACK

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware   P271 Glazing Supplies

06 Glazing Supplies

GOAT – High Bond Tapes

Dimension	SKU
1/2" Wide - 108FT Length 0.040" Thick	AHB04012
1/4" Wide - 108FT Length 0.040" Thick	AHB04014
1/2" Wide - 32FT Length 0.040" Thick	AHB04012-32
1/4" Wide - 32 FT Length 0.040" Thick	AHB04014-32
3/4" Wide - 108FT Length 0.050" Thick	AHB05034

Acrylic Adhesive Tape
Hi-Bond Clear - For Flat Bar Mounting

Dimension	SKU
6.5mm x 12mm 1/4" Thick & 10 Meter	FT1412BL
6.5mm x 19mm 1/4" Thick & 10 Meter	FT1434BL
3mm x 12mm 1/8" Thick & 20 Meter	FT1812BL
1.5mm x 12mm 1/16" Thick & 40 Meter	FT11612BL

Foam Adhesive Tape
Black Foam Tape - For Mirror Mounting

* For the most up-to-date product availability, visit our website.

273

P13 Frameless Shower Door   P163 Storefront & Entrance System   P261 Stock Glass Doors
P85 Railing Hardware   P223 Door Rails & Architectural Hardware P271 Glazing Supplies

06 Glazing Supplies

Tremco® 440 Tape

TREMCO

Finishes

Black
Grey

Specification

- **Premium Dimensions:** 1/16" thick x 3/8" wide, providing precise coverage and sealing.
- **Generous Roll Length:** 50 feet per roll to accommodate large-scale or multiple projects.
- **Superior Adhesion:** Made for excellent bonding to metal, glass, and other building materials.
- **Architectural-Grade Performance:** Delivers weather-resistant, airtight, and watertight seals, ideal for demanding applications.
- **Versatile Use:** Perfect for construction, glazing, curtain wall systems, and other architectural applications.
- **Durable and Flexible:** Maintains performance under various environmental conditions while ensuring easy application.

BLACK

TREMCO BLACK TAPE
440 Butyl Architectural

Dimension	SKU
1/8"X1/2" / 25FT	TREMCO440 1/8×1/2-BLK
1/16"X3/8" / 50FT	TREMCO440 1/16-BTAPE-50FT
1/16"X3/8" x20 / 50FT Contain 20 Rolls	TREMCO440 1/16-BTAPE-CASE
1/8"X3/8" / 25FT	TREMCO440 1/8-BTAPE-25FT
1/8"X3/8" x20 / 25FT Contain 20 Rolls	TREMCO440 1/8-BTAPE-CASE

GREY

TREMCO GREY TAPE
440 Butyl Architectural

Dimension	SKU
1/16"X3/8"	TREMCO440-1/16 GREYTAPE-50FT
1/16"X3/8" x20 Contain 20 Rolls	TREMCO440-1/16 GREYTAPE-CASE
1/8"X3/8"	TREMCO440-1/8 GREYTAPE-50FT
1/8"X3/8" x20 Contain 20 Rolls	TREMCO440-1/8 GREYTAPE-CASE

06 GLAZING SUPPLIES

Stainless Steel Cleaners & Adhesives

Stainless Steel Cleaners & Adhesives

Specification

- **Effective Cleaning:** Removes dirt, grease, and stains effortlessly from stainless steel surfaces.
- **Brilliant Finish:** Polishes to a high shine, leaving surfaces looking clean and professional.
- **Protective Barrier:** Forms a long-lasting protective layer to guard against corrosion, fingerprints, and watermarks.
- **Versatile Use:** Suitable for use on stainless steel, aluminum, and other metal surfaces.
- **Convenient Application:** 400ml spray can for easy, even application on large or small surfaces.

Single / Pack of 12

WEICON-MULTICLEANER
Weicon® Multi Foam Cleaner

Single / Pack of 12

WEICON-SSCARE
Weicon® Stainless Steel Care Spray

Single / Pack of 12

WEICON-POWERCLEANER
Weicon® Power Cleaner S Spray

Single / Pack of 12

WEICON-RK1500
RK-1500 KIT

Stainless Steel Repair Kit

WEICON-SSREPAIR
Stainless Steel Repair

UV BOND

PERMABOND-UV620
UV620 Light Curing Adhesive

UV LAMP

UVSINGLELAMP
UV Single Tube Lamp

---

* For the most up-to-date product availability, visit our website.

Glass Silicone Sealants

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

06 Glazing Supplies

General Electric Sealants

Specification

- **Durable Seal:** Provides lasting flexibility and strong adhesion to block moisture, even in heat and humidity.

- **Waterproof and Heat Resistant:** Stands up to extreme temperatures and weather, ensuring reliable performance in challenging environments.

- **Mold and Mildew Resistant:** Infused with fungicide to inhibit growth, making it perfect for sanitary and wet area applications.

- **Versatile Bonding:** Securely adheres to glass, tile, metal, plastics, and composites.

- **One-Part, Acetoxy Cure:** Easy to apply with no mixing required, offering a quick tack-free time and a smooth, professional finish.

Clear — Single / Bulk of 24	Black — Single / Bulk of 24	Clear / Black — Single / Bulk of 24	White / Black / Grey — Single / Bulk of 24

GE-SCS1700

GE SCS 1700 Sanitary
Silicone Sealant

GESCS1000

GE SCS 1000 Contractors Sanitary
Silicone Sealant

GESCS2800

SCS2800 SilGlaze ll
Sealant Neutral-Cure

GESCS2000

GE SCS 2000
SilPruf Sealant

Tremco® Sealants

TREMCO
Construction Products Group

Specification

- **Neutral-Cure Formula**: Non-corrosive and compatible with sensitive materials for long-term performance.
- **Medium Modulus:** Provides the perfect balance of flexibility and strength for secure and durable seals.
- **Single-Component Convenience:** Ready to use with no mixing required, ensuring quick and clean application.
- **Fast Cure Time:** Accelerates production processes and reduces project downtime.
- **Excellent Tooling:** Easy to apply and smooth, ensuring professional-grade finishes.

☐ Clear **Single / Bulk of 30**	☐ Clear **Single / Bulk of 15**	☐ Clear **Single / Bulk of 30** ■ Black
TREMCOSPEC2 Tremco Spectrum II	**TREMCOSPEC2SSG** Tremco Spectrum II Sausage	**TREMSIL600** Tremco Tremsil® 600
☐ Clear **Single / Bulk of 30**	☐ Limestone **Single**	☐ White **Single**
TREMCOPROGLAZE Tremco Proglaze	**TREMFLEX834LIMESTONE** Tremco Tremflex 834 (Limestone)	**TREMFLEX834WHITE** Tremco Tremflex 834 (White)

☐ Clear   **Single / Bulk of 30**
■ Black

TREMSIL-200
Tremco Tremsil® 200 - Acetoxy Sealant

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

06 Glazing Supplies

Palmer Mirror Mastic / Sprayway

Palmer

Specification

- **Reliable Adhesion:** Formulated for secure, long-lasting bonding of mirrors to multiple surface types.
- **Proven Compatibility:** Field and lab-tested for use with leading mirror brands and backing paints.
- **Convenient Application:** The 11 fl oz cartridge offers precision and ease, making installations faster and cleaner.
- **Industry Standard:** Trusted by professionals for delivering exceptional results in both residential and commercial projects.
- **Trusted Performance:** Field-tested and laboratory-approved for reliability in all types of mirror applications.

Single / Bulk of 24

MASTIC-BLUE
Mirro-Mastic
11 fl oz Cartridge

Single / Bulk of 24

MASTIC-QWIKSET
Mirro-Mastic QwikSet
10.1 oz Cartridge

Single / Bulk of 24

MASTIC-SUPERSET
Mirro-Mastic SuperSet
10.1 oz Cartridge

MASTIC-1G
Mirro-Mastic 1 Gallon
(3.78 L) Container

Single / Bulk of 24

MASTIC-STIK
Palmer Mastic Stik

SPRAYWAY-SW050
Sprayway - SW050 - Glass Cleaner

Silicone Setting Blocks

Silicone Setting Blocks

Product Overview

- **Material:** High-quality silicone for durable cushioning
- **Temperature Range:** -30°F to +200°F (-34°C to 93°C) for versatile use
- **Available Sizes:** 1/16", 1/8", 3/16", 1/4", 3/8", 1/2", 7/16" & 1-1/8"
- **Function:** Protects glass during installation by absorbing shock and providing support
- **Ideal For:** Preventing damage to glass and ensuring secure placement during installation

SB-SIL-6

Silicone Setting Blocks - (1/2")

Dimension (X)	SKU
1/16"	SB-SIL-1
1/8"	SB-SIL-2
3/16"	SB-SIL-3
1/4"	SB-SIL-4
3/8"	SB-SIL-5
1/2"	SB-SIL-6
7/16"	SB-SIL-7
1-1/8"	SB-SIL-8
1/4 × 1/2" x 4"	SB-SIL-9
1/8 × 1/2" x 4"	SB-SIL-10

SB-SIL-8

Silicone Setting Blocks - (1-1/8")

Dimension	SKU
1/16" (Pack of 50)	SB-SIL-1-50PACK
1/8" (Pack of 50)	SB-SIL-2-50PACK
3/16" (Pack of 50)	SB-SIL-3-50PACK
1/4" (Pack of 50)	SB-SIL-4-50PACK
3/8" (Pack of 50)	SB-SIL-5-50PACK
1/2" (Pack of 50)	SB-SIL-6-50PACK
7/16" (Pack of 50)	SB-SIL-7-50PACK
1-1/8" (Pack of 50)	SB-SIL-8-50PACK
1/4 × 1/2" x 4" (Pack of 50)	SB-SIL-9-50PACK
1/8 × 1/2" x 4" (Pack of 50)	SB-SIL-10-50PACK

EPDM Setting Blocks

Product Overview

- **Material:** Durable EPDM rubber with excellent weather and moisture resistance
- **Available Sizes:** 1/16", 1/8", 3/16", 1/4", 3/8", 1/2", 7/16" & 1-1/8"
- **Application:** Widely used in frameless shower installations to provide stable and secure support for glass panels
- **Function:** Prevents direct contact between glass and hard surfaces, reducing the risk of damage or cracking
- **Ideal For:** Ensuring proper alignment and cushioning in frameless glass shower setups, **even in wet or humid conditions.**

Dimension (X)	SKU
1/16"	SB-EPDM-1
1/8"	SB-EPDM-2
3/16"	SB-EPDM-3
1/4"	SB-EPDM-4
3/8"	SB-EPDM-5
1/2"	SB-EPDM-6
4" X 7/16" X 1/2"	SB-EPDM-7
4" X 1-1/8" X 1-1/8"	SB-EPDM-8
4" X 1-1/8" X 5/8"	SB-EPDM-9

SB-EPDM-6

EPDM Setting Blocks - (4" X 1-1/8" X 1/2")

Dimension	SKU
1/16" (Pack of 50)	SB-EPDM-1-50PACK
1/8" (Pack of 50)	SB-EPDM-2-50PACK
3/16" (Pack of 50)	SB-EPDM-3-50PACK
1/4" (Pack of 50)	SB-EPDM-4-50PACK
3/8" (Pack of 50)	SB-EPDM-5-50PACK
1/2" (Pack of 50)	SB-EPDM-6-50PACK
4" X 7/16" X 1/2" (Pack of 50)	SB-EPDM-7-50PACK
1-1/8" (Pack of 50)	SB-EPDM-8-50PACK
5/8" (Pack of 50)	SB-EPDM-9-50PACK

SB-EPDM-8

EPDM Setting Blocks - (4" X 1-1/8" X 1-1/8")

Suction Cup

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

06 Glazing Supplies

Wood's Power Grip

Specification

- **Fast Attach and Release:** Quickly secures to flat surfaces and releases effortlessly, improving work efficiency.

- **Red-Line Indicator:** Warns users of any significant vacuum loss, ensuring safety and reliability during use.

- **Protective Carrying Case:** Supplied with a durable case to protect the cup when not in use, ensuring longevity.

- **8-Inch Diameter:** Ideal for lifting and maneuvering glass, metal, and other smooth, flat materials.

WPG4950

Wood's Power-Grip 8" Hand Cup for Flat Surfaces

WPG5450

Wood's Power-Grip 9" Hand Cup for Flat Surfaces

MRTA8

Wood's Powr-Grip MRTA8
Wood's Powr-Grip - Glass Vacuum Lifter

Factory Order

All Wood's power products are available for factory order's - Contact us on

orders@ggshardware.com

Program Highlights:

- Direct-from-factory pricing for large-scale commitments
- Flexible order forecasting and inventory planning
- Custom labeling and product configurations
- Scheduled shipments based on your project phases
- MOQ (Minimum Order Quantity) applies – ask us for details

Contact us to enroll:

sales@ggshardware.com
Speak with our program manager: +1 905-264-1600
Ask about our MOQ charts, lead time options, and program perks.

Cut Resistance Gloves

Key Features

- **High-Level Cut Resistance**: Engineered with advanced materials to withstand sharp edges and reduce the risk of injuries.
- **Comfortable Fit**: Lightweight, breathable fabric ensures all-day comfort during use.
- **Excellent Grip**: Textured surface for a secure hold on tools, materials, and equipment.
- **Durable and Reusable**: Built to last through multiple uses without losing performance.
- **Versatile Use**: Ideal for kitchen work, construction, carpentry, metalworking, glass handling, and more.

GLOVES-BLK

Multifunctional Sealant Tool (5in1)

GLOVES-BLU

Multifunctional Sealant Tool (5in1)

Multifunctional Sealant Tool (5in1) & Magic Eraser

Specification

- **5-in-1 Functionality**: Combines multiple tools for repairing gaps, removing excess sealant, and achieving smooth finishes.
- **Sliding Switch Design**: Easily switch between the trowel and squeegee functions to adapt to various tasks.
- **Sealant Finishing Tools**: Includes 4 different soft head sizes (3R, 6R, 10R, 13R, 17R) for a variety of smoothing needs.
- **Reusable and Durable**: Made from high-quality plastic, the tool is easy to clean and built for long-lasting use.
- **Versatile Applications**: Ideal for use in kitchens, bathrooms, windows, sinks, and other home improvement projects.

SEALANT-TOOL

Multifunctional Sealant Tool (5in1)

ALERASER

Aluminum Magic Eraser For Scratch Removal

Silicone Trowel   Scraper Push Forward   Scraper Pull Backward

Surface Cleaning Blade   Cut Applicator Nozzle   Dredge Sealant Nozzle

3M Scotch Brite

Specification

- **Superior to Traditional Methods:** Outlasts steel wool, wire brushes, and sandpaper for cleaning, finishing, and surface preparation.
- **Versatile Applications:** Effective on rubber, composites, wood, metal, plastics, ceramics, porcelain, and glass.
- **Reusable and Long-Lasting:** Resists tearing, splintering, shredding, loading, and corrosion, providing a long useful life.
- **Flexible Design:** Can be folded, stacked, or rolled for efficient cleaning or conditioning on flat, uneven, or contoured surfaces.

3MHANDPAD

3M Scotch Brite General Purpose Hand Pads

Cork Pads

100 Roll / 1000 Roll / 5000 Roll

Specification

- **Superior to Traditional Methods:** Outlasts steel wool, wire brushes, and sandpaper for cleaning, finishing, and surface preparation.
- **Versatile Applications:** Effective on rubber, composites, wood, metal, plastics, ceramics, porcelain, and glass.
- **Reusable and Long-Lasting:** Resists tearing, splintering, shredding, loading, and corrosion, providing a long useful life.
- **Flexible Design:** Can be folded, stacked, or rolled for efficient cleaning or conditioning on flat, uneven, or contoured surfaces.

CORKPAD

3M Scotch Brite General Purpose Hand Pads

Dimension	SKU
Cork Pads 5000 per roll	CORKPAD5000
Cork Pads 1000 per roll	CORKPAD1000
Cork Pads 100 per roll	CORKPAD100

P13 Frameless Shower Door **P163** Storefront & Entrance System **P261** Stock Glass Doors
P85 Railing Hardware **P223** Door Rails & Architectural Hardware **P271** Glazing Supplies

06 Glazing Supplies

Horseshoe Shims

5/8" (16.00mm)

2" (51.00mm)

3-1/2" (87.60mm)

5/8" (16.00mm)

HORSESHOE1/4
Horseshoe Shim Tile Spacers
(1/4" Thick)

HORSESHOE1/8
Horseshoe Shim Tile Spacers
(1/8" Thick)

HORSESHOE1/16
Horseshoe Shim Tile Spacers
(1/16" Thick)

STKS16
GGS 1/16" x 3-1/2"
Stackable Shims

Templating Sheet

Product Overview

- **Perfect for Glass Railing Templating:** Tailored for creating accurate templates for railing glass panels, ensuring precise installations.

- **Versatile Application:** Acts as an excellent spacer or gasket between glass panels, providing both protection and stability.

- **Customizable Dimensions:** Can be easily cut into any required size to meet specific project needs.

- **Water Resistant and Durable:** Withstands humid and wet conditions, ensuring long-lasting performance.

- **Generous Size:** Available in a convenient 96" x 48" sheet with a 5/32" thickness, suitable for a wide range of applications.

TEMPSHEET

Templating Sheet - Polypropylene Corrugated Plastic - (96" X 48" X 5/32")

TEMPSHEET-10PACK

Templating Sheet - Polypropylene Corrugated Plastic - (96" X 48" X 5/32")

INSTALLER'S FAVORITE!
GOAT Drill & Spade Bits, Refer Page Number: 272

Grey Goat – Tools

P13 Frameless Shower Door **P163** Storefront & Entrance System **P261** Stock Glass Doors
P85 Railing Hardware **P223** Door Rails & Architectural Hardware **P271** Glazing Supplies

06 Glazing Supplies

Grey Goat – Tools

GCSTENSIONER
Torq Tool Tensioner - Fencing Tool

SOWRENCH
Wrench

ALHRAIL-TOOL
Fix Tool For Aluminum Handrail

SSOKIT
Tool Kit for Solid Standoffs (1.5" & 2" Diameter)

CAMI-TOOL
CAM Series - Tool Kit

TISM-TOOL
Socket Tool

ADJFITTOOL
Flex Tool

DLUX4HWRENCH
3/16" Hex Wrench

LAGWRENCH
Adjustable Wrench For Rollers

GCSCUT
Cable Cutter

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

06 Glazing Supplies

Grey Goat – Tools

CGLIGHT

Lightweight Composite Body Dripless Caulking Guns

CGSTEEL / CGSS

Dripless Caulking Guns Rugged Steel Body

LFWIPE

Lint-Free Glass Wipes

SQGE10

Shower Squeegee

DOLLY1

Plate Glass Dolly

P13 Frameless Shower Door   **P163** Storefront & Entrance System   **P261** Stock Glass Doors
P85 Railing Hardware   **P223** Door Rails & Architectural Hardware   **P271** Glazing Supplies

06 Glazing Supplies

Screws And Bolts

TISCREWMBL
Set Screw

SCREW-ST10X100
Countersunk Wood Screw

BOLT-M10X84
Countersunk Anchor Bolts

SS316 & ZINC

ADJ12M-HB-5/8×1-1/2
Hanger Bolt

SS316 & ZINC

ADJ12M-HB-5/8×2-1/2
Hanger Bolt

SS316 & ZINC

ADJ12M-HB-5/8×3-1/4
Hanger Bolt

SCREW-HINGE
Set Screws For Shower Hinges

SCREW-M8X20
Replacement Allen Screws

SCREW-LADDERPULL
Flat Head Screws

SCREW-WALL
Wall Mount Screws

P13 Frameless Shower Door P163 Storefront & Entrance System P261 Stock Glass Doors
P85 Railing Hardware P223 Door Rails & Architectural Hardware P271 Glazing Supplies

06 Glazing Supplies

Screws And Bolts

SS316 & ZINC

Dimension	SKU
2" Ø˜ X 1/4"	SSO2X0.25
2" Ø˜ X 1/2"	SSO2X0.5
2" Ø˜ X 3/4"	SSO2X0.75
2" Ø˜ X 1"	SSO2X1
2" Ø˜ X 1-1/4"	SSO2X1.25
2" Ø˜ X 1-1/2"	SSO2X1.5
2" Ø˜ X 1-3/4"	SSO2X1.75
2" Ø˜ X 2"	SSO2X2
2" Ø˜ X 2" with 1/2 H	SSOH2X2
2" Ø˜ X 2" with 1/2 H	SSOH2X2

Hanger Bolt

SS316

Dimension	SKU
3/8" X 6"	TR38X6-SS316
1/2" X 6-1/4"l	TR12X6.25SS

Threaded Rod

* For the most up-to-date product availability, visit our website.

295

www.ggshardware.com

Acrylic Mirror Plates

P13 Frameless Shower Door
P85 Railing Hardware
P163 Storefront & Entrance System
P223 Door Rails & Architectural Hardware
P261 Stock Glass Doors
P271 Glazing Supplies

06 Glazing Supplies

Acrylic Mirror Plates

AMPDEC1
Single Decorator

AMPDEC2
Double Decorator

AMPDEC3
Triple Decorator

AMPDEC4
Quad Decorator

AMPT1
Single Toggle

AMPT2
Double Toggle

AMPTDEC1
Single Toggle - Decorator Combo

AMPDUP1
Duplex

Appendix

* For the most up-to-date product availability, visit our website.

Appendix

* For the most up-to-date product availability, visit our website.

Appendix

Catalogue Contributors

Jinu Jung (Design & Layout), **Harmil Patel** (Technical Data), **Smit Rathod** (3D Rendering and Illustrations), **Bo Yee Wong** (Content Writer), **Jeffrey Lai** (Digital Integration) **Pradeep Kushwaha** (Project Lead & Technical)

* For the most up-to-date product availability, visit our website.

Our Locations

Canada's Trusted Glazing Hardware Distributor

With distribution centers in Toronto, Montreal, and Calgary, Grey Goat Hardware ensures fast and efficient service - wherever your project takes you.

Contact Us

Trusted by **2,000+ glazing contractors** across North America

TORONTO WAREHOUSE

606 Rivermede Rd, UNIT #1 & 2, Concord, ON L4K 2H6

📞 Phone: 1-905-264-1600
📠 Textline: 1-877-999-4628
✉ Email: cs.toronto@ggshardware.com
🌐 Website: www.ggshardware.com

MONTREAL WAREHOUSE

8145 Avenue Marco-Polo, Montreal, QC H1E 5Y8

📞 Phone: 1-514-547-3422
📠 Textline: 1-877-999-4628
✉ Email: cs.montreal@ggshardware.com
🌐 Website: www.ggshardware.com

CALGARY WAREHOUSE

2880 45 Ave SE, Unit # 248, Calgary, AB T2B 3M1

📞 Phone: 1-905-264-1600
📠 Textline: 1-877-999-4628
✉ Email: cs.calgary@ggshardware.com
🌐 Website: www.ggshardware.com

www.ggshardware.com

Scan For Real–Time

Get instant access to key tools and info — right from your phone.

Scan to Order | Real-Time Inventory | Custom Pricing | Volume Discounts | Orders Tracking | 3D CAD Models | Technical Drawings | Factory Order Programs | Full Product Catalog

GGH GLAZING SUPPLY COMPANY

TORONTO • MONTREAL • CALGARY

GGH PRODUITS VERRIERS

TORONTO • MONTREAL • CALGARY