PRODUCT CATALOGUE 2026

source

eclipse

Tel: +353 (1) 835 7447
Email: info@sgd.ie

www.sgd.ie


SGD
Solas Geal Distribution

CONTENTS

INDOOR LIGHTING

LED M/W CCT Schoolhouse Fitting	Pg 4
LED M/W CCT Backlit Panels	Pg 6
LED M/W CCT Battens	Pg 9
LED CCT Striplights	Pg 13
LED CCT Slim Dimmable Ceiling Range	Pg 14
LED CCT M/W Ceiling Lights	Pg 16
LED Cabinet Lights	Pg 19
LED Ribbon Lights	Pg 21
Bathroom Globes	Pg 25
LED Dual Voltage Shaver Lights	Pg 26
LED CCT Mirror Light	Pg 29

DOWNLIGHTS

LED CCT Dimmable PVC Downlights	Pg 32
LED CCT Multi Watt Downlight	Pg 36
LED Fire Rated CCT Downlights	Pg 37
Fire Rated GU10 Downlight	Pg 44
GU10 PVC Downlight	Pg 45
GU10 Convertor Downlight	Pg 46
GZ10 Shower Downlight	Pg 47
Spring Loaded GZ10 Downlight	Pg 48
GU10 Pressed Steel Downlight	Pg 50
GU10 Die Cast Twist Lock Downlight	Pg 51

EMERGENCY LIGHTING

Emergency Exit Boxes	Pg 54
Emergency Bulkheads	Pg 58
Emergency Accessories	Pg 61
Emergency Hanging Blades	Pg 62
Emergency Twin Spots	Pg 64
Emergency Spotlights	Pg 65

LAMPS

LED GU10 Lamp Range	Pg 70
COB LED 12V Lamp Range	Pg 74
LED Decorative	Pg 75
LED Filament Clear Glass	Pg 83
LED Vintage Filament	Pg 85
LED G9 / G4 Lamps	Pg 91
LED Reflector Lamps	Pg 92
LED Striplight Lamps	Pg 93
LED PAR 38 Lamp	Pg 94
Architectural Lamp	Pg 95

OUTDOOR LIGHTING

LED Multi Watt CCT High Bay	Pg 99
LED Multi Watt Floodlight	Pg 101
LED Multi Watt CCT Floodlight Range	Pg 102
LED Floodlight Range	Pg 104
LED Multi Watt CCT Corrosion Proof	Pg 106
LED IP65 Batten	Pg 111
LED CCT Streetlights 50W/100W	Pg 112
LED CCT Poly Bulkheads	Pg 115
LED CCT Multi Watt Outdoor Bulkheads	Pg 117
Outdoor Bulkheads	Pg 130
LED Sign Light	Pg 133
LED IP44 110V Integrated Festoon	Pg 134

GARDEN LIGHTING

Vintage Framed Wall Lights	Pg 138
GU10 Up/Down Wall Lights	Pg 141
LED CCT Aluminium Wall Lights	Pg 144
5M Festoon Lights	Pg 149
LED Solar Sensor Wall Lights	Pg 150
LED Solar PIR Floodlights	Pg 151
Bollard Range	Pg 152
GU10 Ground Lights	Pg 154
Mini Ground Light Kits	Pg 156
Spike Spots	Pg 157
Poly Garden Range	Pg 159
LED Ground Light	Pg 160
LED Deck Lights	Pg 161
LED Brick Light	Pg 165

ACCESSORIES

IP65 4 Pole Rotary Isolators	Pg 168
Push Connector Boxes	Pg 172
IP68 Connector Tubes	Pg 174
Weatherproof Switched Sockets	Pg 175
Weatherproof Switches	Pg 178
Metal Clad Sockets & Switches	Pg 180
IP55 Outdoor Switches	Pg 187
Weatherproof Empty Socket Boxes	Pg 188
Weatherproof Connection Box	Pg 189
Junction Boxes	Pg 190
Electrical Accessories	Pg 193
Lamp Holders	Pg 194
Retention Clips	Pg 194
Room/Frost Stats	Pg 195
Convertor Sockets	Pg 196
Distribution Boxes	Pg 197
Time Delay Switches	Pg 198
LED Dimmer Switches	Pg 199
Dual Voltage Shaver Sockets	Pg 200

SENSORS

PIR Motion Sensors	Pg 204
Photocells	Pg 208
Microwave Sensors	Pg 209

ALARMS

Smoke Alarm	Pg 213
Carbon Monoxide Alarm	Pg 214
Heat Alarm	Pg 215

FESTIVE LIGHTING

LED String Lighting	Pg 218
LED Rope Lighting	Pg 220
LED Icicle Lighting	Pg 221
LED Curtain Lighting	Pg 221
LED Festoon Lighting	Pg 222
LED String Lighting, White Cable	Pg 223
LED 24V String Lighting	Pg 224

INFORMATION

Terms & Conditions	Pg 228
Colour Temperature Guide	Pg 229
Ingress Protection (IP Rating) Guide	Pg 230
Energy Rating Labels	Pg 231
Glossary	Pg 232

INDOOR LIGHTING

LED MW CCT Schoolhouse Fitting	Pg 4
LED MW CCT UGR19 Backlit Panel	Pg 6
LED Backlit Panel Accessories	Pg 8
LED Multi Watt CCT 5ft Battens	Pg 9
LED Multi Watt 4ft, 6ft Battens	Pg 10
LED Multi Watt CCT Slimline Battens	Pg 11
LED CCT Striplights	Pg 13
LED Slim CCT Dimmable Fittings	Pg 14
LED Multi Watt CCT Ceiling Lights	Pg 16
LED 9W 4000K IP65 Ceiling Light	Pg 18
LED Cabinet Light Range	Pg 19
LED Ribbon Lighting	Pg 21
Profile for LED Ribbon	Pg 24
Bathroom Globe Fittings	Pg 25
LED Dual Voltage Shaver Lights	Pg 26
LED CCT Mirror Light	Pg 29



LED MW CCT SCHOOLHOUSE FITTING PG 4



BACKLIT PANELS PG 6



LED MW CCT BATTEN RANGE PG 9



LED MW CCT SLIMLINE BATTEN RANGE PG 11

LED SLIM DIMMABLE CCT CEILING LIGHTS PG 14



LED CABINET LIGHT RANGE PG 19



LED DUAL VOLTAGE SHAVER LIGHTS PG 26



LED CCT MIRROR LIGHT PG 29

seai SUSTAINABLE ENERGY AUTHORITY OF IRELAND
LIG116188

IP20

125 Lm/W

5 years Quality Assurance

7250 lm 58w

6250 lm 50w

5125 lm 41w

4000 lm 32w

Multi Watt

58w
50w
41w
32w







DALI 2
60w Dali Driver available

CCT Switch

3000k
4000k
6000k

LED Multi Watt CCT UGR<19 Schoolhouse Fitting


SSCH58W5FT
LED Multi Watt: 58/50/41/32W
CCT UGR<19 Schoolhouse Fitting


SSCH58W5FT-DA
LED Multi Watt: 58/50/41/32W
CCT UGR<19 Schoolhouse Fitting including DALI driver

S DALI DR
60w DALI LED Driver with prewired terminal block available.
Compatible with SSCH58W5FT

- CCT: 3000k, 4000k, 6000k
- UGR<19
- IP Rating: IP20
- 125Lm/W
- SMD 2835
- 5 yr Guarantee
- Beam Angle: 120°
- Hinged Diffuser
- Anti Tamper Switch
- Lamp Life: 50,000 hrs
- Input Voltage: 220-240v, 50/60Hz
- Commercial/Domestic Application
- Operating Temp: -20°C~+40°C

Luminous Intensity Distribution Diagram 3000k

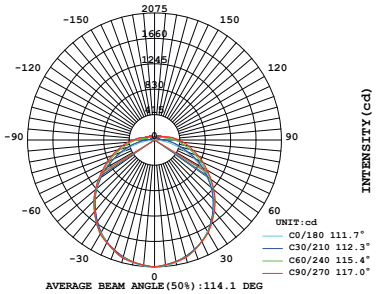

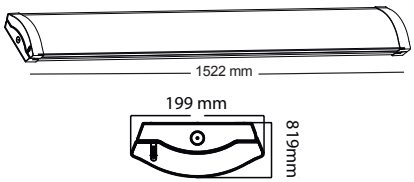

Outer Box 4

Scan for info

ErP COMPLIANT · UKCA · CE · RoHS COMPLIANT

A–G E

50000 Life Time · 10000 Switching Cycle · Compatible · UGR<19 · Non Dimmable
Flicker Free · 90% Energy Saving · Instant Start · 120° · >80 Ra Rendering Index

LED CCT MULTI WATT SCHOOLHOUSE FITTING

source

125 Lm/W

.IP20

seai SUSTAINABLE ENERGY AUTHORITY OF IRELAND
LIG116188

5 years Quality Assurance

7250 lm 58w

6250 lm 50w

5125 lm 41w

4000 lm 32w



Multi Watt


58w
50w
41w
32w

CCT Switch

3000k
4000k
6000k


LED M/W CCT Emergency Schoolhouse Fitting

SSCH58W5FTEM
LED Multi Watt: 58/50/41/32W
CCT UGR<19 Schoolhouse Fitting

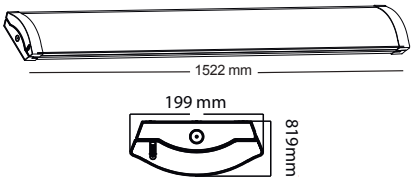

- CCT: 3000k, 4000k, 6000k
- UGR<19
- IP Rating: IP20
- 125Lm/W
- SMD 2835
- 5 yr Guarantee
- Beam Angle: 120°
- Hinged Diffuser
- Anti Tamper Switch
- Lamp Life: 50,000 hrs
- Input Voltage: 220-240v, 50/60Hz
- Commercial/Domestic Application
- Operating Temp: -20°C~+40°C
- Housing: White
- Battery: LiFeP04-6.4V 1500mAh
- Battery: 3 Hour Emergency Operation
- Battery: 3 Yr Guarantee

Luminous Intensity Distribution Diagram 3000k

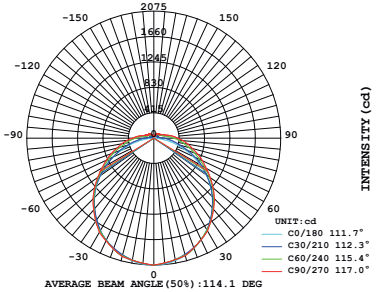

Outer Box 4

50000 Life Time
10000 Switching Cycle
Compatible
UGR<19
Non Dimmable
Flicker Free
90% Energy Saving
Instant Start
120°
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G E

Scan for info


seai SUSTAINABLE ENERGY AUTHORITY OF IRELAND
LIG94059

IP40

100 Lm/W

5 years Quality Assurance



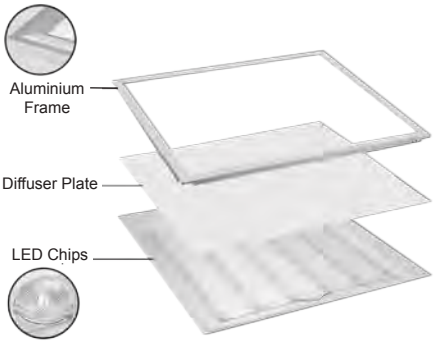


3600 lm 36w

2400 lm 24w

Multi Watt

36w

24w



CCT Switch

2700k

4000k


5700k

LED Multi Watt CCT UGR<19 Backlit Panel

SPAN-CCT
LED CCT UGR<19 Backlit Panel, 600mm x 600mm


- Multi Watt: 36w, 24w
- 100Lm/W
- CCT: 2700k, 4000k, 5700k
- UGR<19
- IP Rating: IP40
- Lamp Life: 30,000 hrs
- Input Voltage: 220-240v AC
- 600 x 600mm Panel

Illuminance Distance Curve

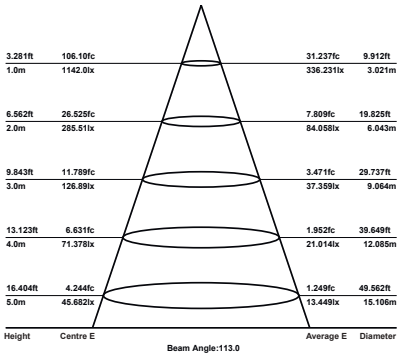

Note: The curves indicate illuminated area and the average illumination when luminaire is at a different distance.

Luminous Intensity Distribution Diagram

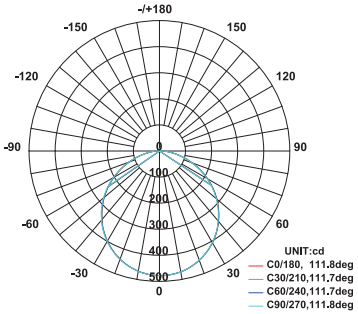

AVERAGE BEAM ANGLE (50%):111.8 DEG

Outer Box 5

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A ↑ G F

50000 Life Time
10000 Switching Cycle
Compatible
UGR<19
Non Dimmable
Flicker Free
** 90% Energy Saving
Instant Start
IK 06
>80 Ra Rendering Index

LED MULTI WATT CCT BACKLIT PANEL

source


100 Lm/W

IP40

3600 lm 36w

2400 lm 24w



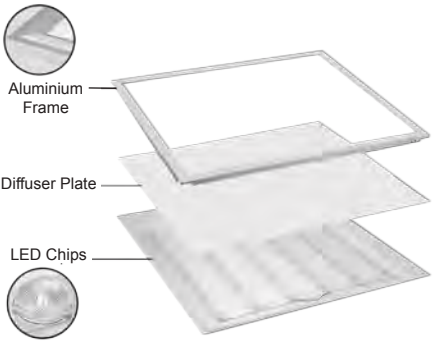


5 years Quality Assurance

Multi Watt

36w

24w



CCT Switch

2700k

4000k

5700k


LED Multi Watt Standard Backlit Panel

SPAN-ST-CCT

LED CCT Standard Backlit Panel, 600mm x 600mm


- Multi Watt: 36w, 24w
- 100Lm/W
- CCT: 2700k, 4000k, 5700k
- IP Rating: IP40
- Lamp Life: 30,000 hrs
- Input Voltage: 220-240v AC
- 600 x 600mm Panel
- Beam Angle: 120°

Illuminance Distance Curve

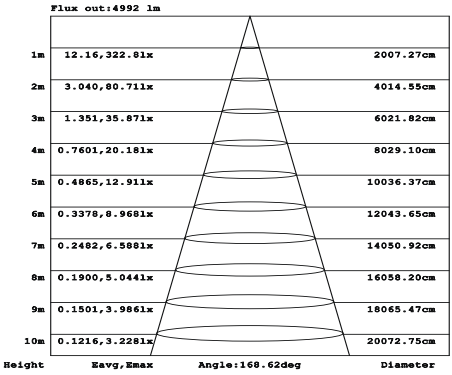

Note: The curves indicate illuminated area and the average illumination when luminaire is at a different distance.

Luminous Intensity Distribution Diagram

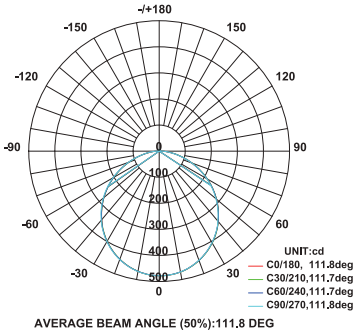

AVERAGE BEAM ANGLE (50%):111.8 DEG

Outer Box 5

50000 Life Time

10000 Switching Cycle

Compatible

LED

Non Dimmable

ErP COMPLIANT

UK CA

CE

RoHS COMPLIANT

Flicker Free

** 90% Energy Saving

Instant Start

IK 06


>80 Ra Rendering Index

A G F

Scan for info

3 years Quality Assurance

IP40

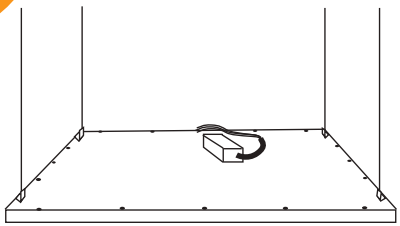

Suspension Kit




LED Backlit Panel Accessories & Frame

SPAN-SURF FRAME
Surface Mounted Frame

- 608 x 608mm Frame
- Suspension Kit included
- 3 Yr Guarantee

SPAN-SUSP KIT
Suspension Accessories

- Suspension Accessories
- 3 Yr Guarantee

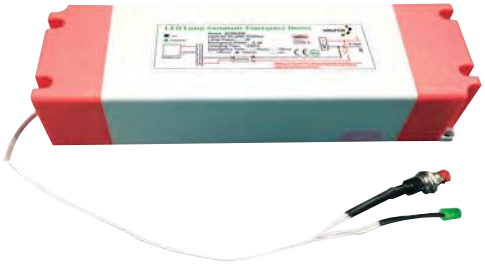

5w Emergency Pack, 3 Hour Backup

SPAN-EM
5w Emergency Pack, 3hr Backup

- Emergency output Power: 5±1w
- Battery 7.4 2600mA
- 3 Yr. Guarantee
- Input: AC85-265V/50-60Hz
- Output: DC20-90V
- Charging Time: ≥20 hours
- Emergency Duration Time: ≥3hrs
- Conversion Efficiency: ≥80%
- Power Factor 90%
- Emergency Switching Time ≤ 1s
- Lighting System: Continuous
- Temp Range: -10˚C - 50˚C
- Conversion Efficiency: ≥80%
- Humidity Range: 65%±20%

Outer Box SPAN EM 50 SPAN-SUSP 100

Outer Box SPAN SURF FRAME 20

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

LED MULTI WATT CCT BATTENS

130 Lm/W

IP20

7800 lm
60w



3 years Quality Assurance

Multi Watt

60w
52w
43w
34w

CCT Switch

3000k
4000k
6500k


LED Multi Watt CCT 5ft Batten

SBTMW5
5ft CCT LED Batten
Multi Watt: 60w/52w/43w/34w


SBTMW5-EM
5ft CCT LED Emergency Batten
Multi Watt: 60w/52w/43w/34w

- 130Lm/W
- CCT: 3000k, 4000k, 6500k
- Voltage: 220-240V AC, 50/60Hz
- IP Rating: IP20
- Beam Angle: 120°
- SMD 2835
- 5 yr Guarantee
- Emergency Battery: 3 Yr. Guarantee
- 3Hr Maintained Emergency Back up
- Battery: LifeP04 6.4V 2000mAh

Luminous Intensity Distribution Diagram SBTMW6 4000K



AVERAGE BEAM ANGLE(50%):125.2 DEG

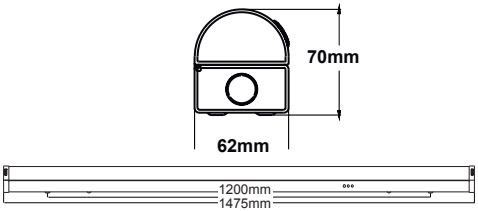

Outer Box 6

50000 Life Time
10000 Switching Cycle
Compatible
LED
Non Dimmable
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
IK 06
>80 Ra Rendering Index

A G E

Scan for info



IP20

130 Lm/W

10400 lm 80w

5200 lm 40w

5 years Quality Assurance

Multi Watt

80w
70w
60w
50w

6FT

40w
34w
28w
22w

4FT

CCT Switch

3000k
4000k
6500k

Outer Box
4ft = 9
6ft = 4

LED Multi Watt CCT 4ft/6ft Battens


SBTMW4
4ft CCT LED Batten
Multi Watt: 40w/34w/28w/22w

SBTMW4-EM
4ft CCT LED Emergency Batten
Multi Watt: 40w/34w/28w/22w


SBTMW6
6ft CCT LED Batten
Multi Watt: 80w/70w/60w/50w

- 130Lm/W
- CCT: 3000k, 4000k, 6500k
- Voltage: 220-240V AC, 50/60Hz
- IP Rating: IP20
- Beam Angle: 120°
- SMD 2835
- 5 yr Guarantee
- Emergency Battery: 3 Yr. Guarantee
- 3Hr Maintained Emergency Back up
- Battery: LifeP04 6.4V 2000mAh

Luminous Intensity Distribution Diagram SBTMW6 4000K



AVERAGE BEAM ANGLE(50%):125.2 DEG

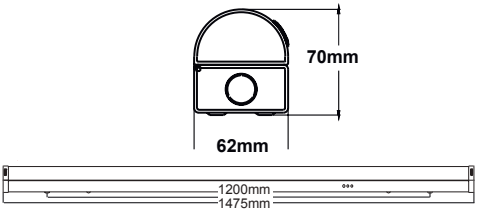

ErP COMPLIANT · UKCA · CE · RoHS COMPLIANT

A↑G E

50000 Life Time · 10000 Switching Cycle · Compatible · LED · Non Dimmable

Flicker Free · 90% Energy Saving · Instant Start · IK 06 · >80 Ra Rendering Index

Scan for info

LED MULTI WATT CCT SLIMLINE BATTENS

source

120 Lm/W

IP40

3600 lm 30w

2400 lm 20w



Multi Watt and CCT Switch



3 years Quality Assurance

Multi Watt

30w
20w
15w

900 mm

20w
15w
10w

600 mm

CCT Switch

2700k
3000k
4000k
6500k


LED CCT Multi Watt Slim 600/900mm Battens

SBAT-20W
LED Slim CCT Batten 600mm
Multi Watt: 10w/15w/20w


SBAT-30W
LED Slim CCT Batten 900mm
Multi Watt: 15w/20w/30w

- 120Lm/W
- Beam Angle 120°
- CCT: 2700k, 3000k, 4000k, 6500k
- IP Rating: IP40
- 3 yr Guarantee
- Flicker Free
- Complete with 1M Cable
- Lamp Life: 30,000 hrs
- Input Voltage: 220-240v, 50Hz
- Commercial/Domestic Application
- Housing: White

Luminous Intensity Distribution Diagram 50w



C0 plane beam angle (50%)
C90 plane beam angle (50%)
C0 plane beam angle (50%):114.9(DEG)
C90 plane beam angle (50%):119.6(DEG)



Outer Box
30w = 20
20w = 20

30000 Life Time
10000 Switching Cycle
Compatible
LED
Non Dimmable
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
IK 06
>80 Ra Rendering Index

A G F

Scan for info

IP40

120 Lm/W

6000 lm 50w

4800 lm 40w

3 years Quality Assurance



Multi Watt and CCT Switch

Multi Watt

50w
40w
30w

1500 mm

40w
30w
20w

1200 mm

CCT Switch

2700k
3000k
4000k
6500k


LED CCT Multi Watt Slim 1200/1500mm Battens

SBAT-40W
LED Slim CCT Batten 1200mm
Multi Watt: 20w/30w/40w


SBAT-50W
LED Slim CCT Batten 1500mm
Multi Watt: 30w/40w/50w

- 120Lm/W
- Beam Angle 120°
- CCT: 2700k, 3000k, 4000k, 6500k
- IP Rating: IP40
- 3 yr Guarantee
- Flicker Free
- Complete with 1M Cable
- Lamp Life: 30,000 hrs
- Input Voltage: 220-240v, 50Hz
- Commercial/Domestic Application
- Housing: White

Luminous Intensity Distribution Diagram 50w



C0 plane beam angle (50%)
C90 plane beam angle (50%)
C0 plane beam angle (50%):114.9(DEG)
C90 plane beam angle (50%):119.6(DEG)



Outer Box
50w = 15
40w = 20

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A ↑ G F

30000 Life Time · 10000 Switching Cycle · Compatible · LED · Non Dimmable

Flicker Free · 90% Energy Saving · Instant Start · IK 06 · >80 Ra Rendering Index

LED CCT STRIPLIGHTS

source

1381 lm
14w

1025 lm
10w

740 lm
8w

340 lm
4w

250 lm
3w

IP20

3 years Quality Assurance



CCT Switch

3000k
4000k
6500k

LED CCT Striplights

STRIP 3W CCT
236mm LED CCT Striplight,
3w 250Lm

STRIP 4W CCT
313mm LED CCT Striplight,
4w 340Lm


STRIP 8W CCT
573mm LED CCT Striplight,
8w 740Lm


STRIP 10W CCT
873mm LED CCT Striplight,
10w 1025Lm

STRIP 14W CCT
1173mm LED CCT Striplight,
14w 1381Lm

- IP Rating: IP20
- Beam Angle 120°
- CCT: 3000k, 4000k, 6500k
- 3 yr Guarantee
- PC Body
- Lamp Life: 30,000 hrs
- Input Voltage: 220-240v, AC
- Housing: White
- Suitable for interior use under cabinets
- Fittings can be connected together using cable provided or end to end

Fitting Options

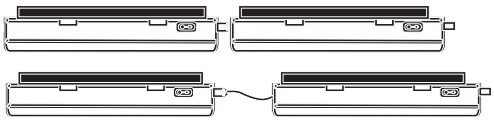

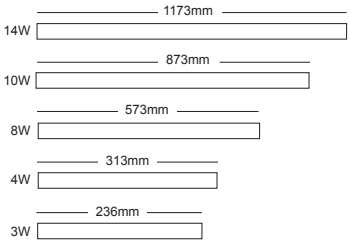

Outer Box 20

30000 Life Time
10000 Switching Cycle
Compatible
LED
Non Dimmable
Flicker Free
90% Energy Saving
Instant Start
IK 06
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G

Scan for info

IP54

1050 -1270 lm 12w

1800 -2100 lm 18w

2700 -3200 lm 30w

3 years Quality Assurance





CCT Switch

2700k

4000k

5700k

LED CCT Slimline Dimmable Square


SLIM-SQ 12W CCT
12w LED CCT Slimline
Dimmable Square, 1050-1270Lm

SLIM-SQ 18W CCT
18w LED CCT Slimline
Dimmable Square, 1800-2100Lm


SLIM-SQ 30W CCT
30w LED CCT Slimline
Dimmable Square, 2700-3200Lm

- Power: 12w, 18w, 30w
- CCT: 2700k, 4000k, 5700k
- Dimmable
- IP Rating: IP54
- 3 yr Guarantee
- Beam Angle: 120°
- Input Voltage: 220v-240v AC
- Commercial/Domestic Application
- Housing: White

Luminous Intensity Distribution Diagram 30W - 4000k

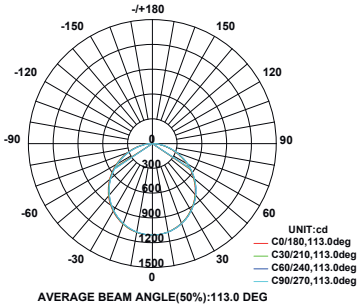

AVERAGE BEAM ANGLE(50%):113.0 DEG



Outer Box
12W = 20
18W = 10
30W = 10

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A G E

30000 Life Time · 10000 Switching Cycle · Compatible · 120° · Class II

Flicker Free · ** 90% Energy Saving · Instant Start · Dimmable · >80 Ra Rendering Index

LED CCT SLIM DIMMABLE FITTING

source

1050 -1270 lm 12w

1800 -2100 lm 18w

2700 -3200 lm 30w

IP54

3 years Quality Assurance



CCT Switch

2700k

4000k

5700k

LED CCT Slimline Dimmable Fitting

SLIM 12W CCT
12w LED CCT Slimline
Dimmable Light, 1050-1270Lm

SLIM 18W CCT
18w LED CCT Slimline
Dimmable Light, 1800-2100Lm


SLIM 30W CCT
30w LED CCT Slimline
Dimmable Light, 2700-3200Lm

SLIM 18 EM CCT
18w LED CCT Slimline
Emergency Light, 1800-2100Lm

SLIM 18 EMSENS CCT
18w LED CCT Slimline
Emergency Sensor, 1800-2100Lm

SLIM 18W SENS CCT
18w LED CCT Slimline
Sensor, 1800-2100Lm

- Power: 12w, 18w, 30w
- CCT: 2700k, 4000k, 5700k
- Dimmable
- IP Rating: IP54
- 3 yr Guarantee
- Beam Angle: 120°
- Input Voltage: 220v-240v AC, 50/60Hz
- Operating Temp: -20°C~+40°C
- Sensor detection Range 5-7mt
- Sensor Hold Time 30 sec
- Matt Chrome Trim available seperately for SLIM 18W CCT



Outer Box
12W = 20
18W = 10
30W = 10

30000 Life Time

10000 Switching Cycle

Compatible

120°

Class II

ErP COMPLIANT

UK CA

CE

RoHS COMPLIANT

Flicker Free

** 90% Energy Saving

Instant Start

Dimmable

>80 Ra Rendering Index

A G E

Scan for info

LED CCT MULTI WATT CEILING LIGHT



IP65

120 Lm/W

1080 lm 9w

1680 lm 12w

2160 lm 18w

5 years Quality Assurance

Multi Watt

9w
14w
18w





CCT Switch


3000k
4000k
6500k

LED Multi Watt CCT Ceiling Light


S2DMW
LED CCT Multi Watt IP65 Ceiling Light

- Multi Watt: 9w, 14w, 18w
- 120Lm/W
- Beam Angle 120°
- CCT: 3000k, 4000k, 6500k
- IP Rating: IP65
- 5 yr Guarantee
- Input Voltage: 240v, 50Hz
- Lamp Life: 50,000 hrs
- Hinged LED plate for easy installation
- Multiple entry points on base
- Commercial/Domestic Application
- Housing: White

Luminous Intensity Distribution Diagram 4000k 18w



AVERAGE BEAM ANGLE(50%):123.2 DEG



Outer Box 10

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A–G E

50000 Life Time · 10000 Switching Cycle · Compatible · 120° · LED

Flicker Free · 90% Energy Saving · Instant Start · IK 08 · >80 Ra Rendering Index

LED CCT MULTI WATT CEILING LIGHT

source

120 Lm/W

IP65

1080 lm 9w

1680 lm 12w


2160 lm 18w



5 years Quality Assurance



Hinged LED plate for easy installation



Corridor Function on Sensor Models

Multi Watt

9w

12w

18w

CCT Switch

3000k

4000k

6500k

LED Multi Watt CCT Ceiling Light


S2DMW-EM
LED CCT Multi Watt IP65
Emergency Ceiling Light


S2DMW-EM-SENS
LED CCT Multi Watt IP65
Emergency Sensor Ceiling Light

S2DMW-SENS
LED CCT Multi Watt IP65
Sensor Ceiling Light

- Multi Watt: 9w, 14w, 18w
- 120Lm/W
- CCT: 3000k, 4000k, 6500k
- IP Rating: IP65
- 5 yr Guarantee
- Input Voltage: 240v, 50Hz
- Hinged LED plate for easy installation
- Multiple entry points on base
- Corridor Function on Sensor Models
- Battery: LifeP04-6.4V 1000mAh
- Battery: 3 Hour Emergency Operation
- Battery: 3 Yr Guarantee

Luminous Intensity Distribution Diagram 4000k 18w





Outer Box 10

50000 Life Time

10000 Switching Cycle

Compatible

120°

LED

Flicker Free

** 90% Energy Saving

Instant Start

IK 08

>80 Ra Rendering Index

ErP COMPLIANT

UK CA

CE

RoHS COMPLIANT

A G E

Scan for info

3 years Quality Assurance

IP65

100 Lm/W

900 lm 9w



Colour Temp


4000k


LED 9w IP65 Ceiling Light

S9WLED-WH
LED IP65 9w Ceiling Light

- Power: 9w
- Lumen: 900Lm
- 100Lm/W
- Colour Temp: 4000k
- Beam Angle: 160°
- 3 yr Guarantee
- IP Rating: IP65
- Input Voltage: 180v-240v, 50Hz
- Lamp Life: 30,000 hrs
- Operating Temp: -20°C~+40°C
- Housing: White

Luminous Intensity Distribution Diagram

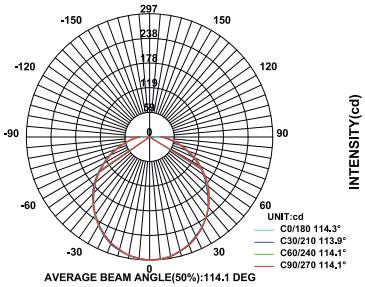



Outer Box 10

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A G F

30000 Life Time · 12500 Switching Cycle · Compatible · 160° · LED

Flicker Free · 90% Energy Saving · Instant Start · IK 10 · >80 Ra Rendering Index

LED CABINET LIGHT RANGE

source

100 lm
1.5wWW

100 lm
1.5wCW

IP20

3 years Quality Assurance



Colour Temp
3000k
6000k

LED Triangular Cabinet Light


STC-WH-WW
LED Warm White Triangular Cabinet Light, White Housing

STC-WH-CW
LED Cool White Triangular Cabinet Light, White Housing

STC-MC-WW
LED Warm White Triangular Cabinet Light, Matt Chrome Housing

STC-MC-CW
LED Cool White Triangular Cabinet Light, Matt Chrome Housing

- Power: 1.5w
- Lumen: 100Lm
- IP Rating: IP20
- 3 yr Guarantee
- Beam Angle: 90°
- Input Voltage: 170v-240v AC
- Lamp Life: 30,000 hrs
- Operating Temp: -20°C~+40°C
- Housing: White or Matt Chrome
- Available in Warm White or Cool White



Outer Box 50

30000 Life Time
10000 Switching Cycle
Compatible
Non Dimmable
LED
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
90°
>80 Ra Rendering Index
A G

Scan for info

3 years Quality Assurance

IP20

100 lm 1.5wWW

100 lm 1.5wCW



Colour Temp

3000k

6000k

LED Surface/Recessed Cabinet Light


SCB-WH-WW
LED Warm White Surface/ Recessed Cabinet Light, White Housing

SCB-WH-CW
LED Cool White Surface/ Recessed Cabinet Light, White Housing


SCB-MC-WW
LED Warm White Surface/ Recessed Cabinet Light, Matt Chrome Housing

SCB-MC-CW
LED Cool White Surface/ Recessed Cabinet Light, Matt Chrome Housing

- Power: 1.5w
- Lumen: 100Lm
- IP Rating: IP20
- 3 yr Guarantee
- Beam Angle: 90°
- Diameter: 69mm Ø
- Input Voltage: 170v-240v AC
- Lamp Life: 30,000 hrs
- Operating Temp: -20°C~+40°C
- Housing: White or Matt Chrome
- Available in Warm White or Cool White



Cutout: 50mm



Outer Box 50

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A↑G

30000 Life Time · 10000 Switching Cycle · Compatible · Non Dimmable · LED

Flicker Free · 90% Energy Saving · Instant Start · 90° · >80 Ra Rendering Index

LED RIBBON LIGHT

2400 lm
60w

IP65



3 years Quality Assurance

Colour Temp
3000k
6400k

LED 5M 14w Ribbon Light


S-RIB-5M 14W-WW
LED Ribbon Light 5M Warm White

S-RIB-5M 14W-CW
LED Ribbon Light 5M Cool White

E60WLED DRIVER
60w LED Driver

SRIBCON
Ribbon Light Connection Kit

- Power: 60w
- Lumen: 2400Lm
- Complete with LED IP20 60w Driver and male/female connectors
- IP Rating: IP65
- 3 yr Guarantee
- Beam Angle: 90°
- 5M Length
- Voltage: 12v
- LED quantity: 60pcs / M 5050 SMD
- Available in Warm White or Cool White





Outer Box 20

30000 Life Time
50000 Switching Cycle
Compatible
Non Dimmable
LED
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
90°
>80 Ra Rendering Index

A G

Scan for info

3 years Quality Assurance

IP65

1400 lm
24w



Colour Temp

3000k

6400k

LED 5M 5w Ribbon Light

S-RIB-5M 5W-WW
LED Ribbon Light 5M Warm White

S-RIB-5M 5W-CW
LED Ribbon Light 5M Cool White

- Power: 24w
- Lumen: 1400Lm
- Complete with LED IP20 30w Driver and male/female connectors
- IP Rating: IP65
- 3 yr Guarantee
- Beam Angle: 90°
- 5M Length
- Voltage: 12v
- LED quantity: 60pcs / M 3528 SMD
- Available in Warm White or Cool White



Outer Box 20

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A ↑ G

25000 Life Time · 50000 Switching Cycle · Compatible · Non Dimmable · LED

Flicker Free · 90% Energy Saving · Instant Start · 90° · >80 Ra Rendering Index

LED RIBBON LIGHT

1400 lm
24w

IP65

3 years Quality Assurance



Remote Control

Colour Choice

Red
Green
Blue
White

LED 5M 5w Multi Coloured Ribbon Light

S-RIB-5M 5W-RGB
LED RGB Ribbon Light with Remote Control

- Power: 24w
- Lumen: 1400Lm
- RGB - (Red, Green, Blue, White)
- Complete with LED IP20 60w Driver and male/female connectors
- IP Rating: IP65
- 5M Length
- Voltage: 12v
- Beam Angle: 90°
- LED quantity: 30pcs / M 3528 SMD
- Remote Control included
- Can be dimmed via remote control



Outer Box 20

25000 Life Time
50000 Switching Cycle
Compatible
Dimmable
LED
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
90°
>80 Ra Rendering Index

A G

Scan for info

IP20

3 years Quality Assurance



End Cap

Profile is supplied with Mounting Clip

Screw

Profile for LED Ribbon Range

SRIB2MST
Low Profile Surface Extrusion with Push On PC Diffuser

- With push on PC diffuser
- Single extrusion strip with covers, screws and mounting clips
- Anodised aluminium body
- Supplied in 2M lengths complete with end caps
- Size: Depth: 8.8mm x 14.4mm Inner Width, 2 meters length
- 3 yr Guarantee
- Compatible with the S-RIB ribbon light range

Outer Box 50

Scan for info

ErP COMPLIANT UKCA CE RoHS COMPLIANT

BATHROOM LIGHT

IP40

Class II

3 years Quality Assurance





Bathroom Globe with Prewired Lampholder

G100
100w Bathroom Globe c/w Prewired Lampholder

G60
60w Bathroom Globe c/w Prewired Lampholder

- Max Power: 100w / 60w
- Glass Globe with white base
- 3 year Guarantee
- IP Rating IP40
- Prewired Porcelain B22 Lamp Holder
- Lamp not included
- Voltage: 230/240v, 50Hz






Outer Box
G100=12
G60=16

Scan for info

IP20

700 lm
7w

3 years Quality Assurance

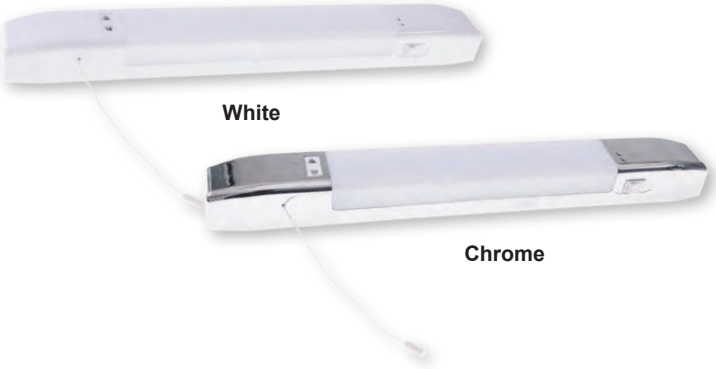

Colour Temp


4000k


LED Dual Voltage 7w Shaver Light

SDVSL-LED-CH
LED 7w Chrome
Shaver Light

SDVSL-LED-WH
LED 7w White Shaver Light

- Power: 7w
- Lumen: 700Lm
- 110v and 230v adjustable shaver socket
- SDVSL-LED-CH: Class 1, must be earthed
- SDVSL-LED-WH: Class 2
- IP Rating: IP20
- 3 yr Guarantee
- Input Voltage: 100v-240v , 50/60Hz
- Lamp Life: 30,000 hrs
- Available in White or Chrome finish





Outer Box 20

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A ↑ G F

30000 Life Time · 10000 Switching Cycle · Compatible · Non Dimmable · LED · Flicker Free · ** 90% Energy Saving · Instant Start · 120° · >80 Ra Rendering Index

LED IP44 DUAL VOLTAGE SHAVER LIGHT

source

900 lm
10w

IP44

3 years Quality Assurance



Chrome



White

Colour Temp


4000k

LED IP44 Dual Voltage 10w Shaver Light

SCURV-DV-CH
LED IP44 10w Chrome Shaver Light

SCURV-DV-WH
LED IP44 10w White Shaver Light


- Power: 10w
- Lumen: 900Lm
- 110v and 230v adjustable shaver socket
- Colour Temp: 4000k
- IP Rating: IP44
- Class II
- 3 yr Guarantee
- Input Voltage: 200v-240v , 50/60Hz
- Lamp Life: 30,000 hrs
- Available in White or Chrome finish



Dual Voltage



Shaver Socket



Outer Box 10

30000 Life Time
10000 Switching Cycle
Compatible
Non Dimmable
LED
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Class II
** 90% Energy Saving
Instant Start
120°
>80 Ra Rendering Index

A G F

Scan for info

IP20

640 lm
7.5w

3 years Quality Assurance





Colour Temp

4000k

LED S15 Lamp Dual Voltage 7.5w Shaver Light

SDVSL-S15
S15 Lamp Dual Voltage
Shaver Light

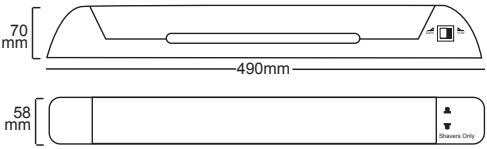



Shaver Socket **Dual Voltage**

- Lamp Type: 7.5w LED 284mm Striplight (Included)
- Lumen: 640Lm
- 115v and 230v adjustable shaver socket & pull cord
- Colour Temp: 4000k
- Class I, must be earthed
- LED Chips: 2835
- Temperature: -20°~40°C
- 3 yr Guarantee
- Input Voltage: 200v-240v , 50/60Hz
- Lamp Life: 30,000 hrs
- Lamp included
- Replaceable Light Source
- White Housing

Outer Box 20

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A ↑ G

30000 Life Time · 10000 Switching Cycle · Compatible · Non Dimmable · LED

Flicker Free · 90% Energy Saving · Instant Start · 100° · >80 Ra Rendering Index

LED CCT MIRROR LIGHT

source

110 Lm/W

IP44

1320 lm
12w

3 years Quality Assurance





CCT Switch


3000k
4000k
5700k

LED CCT Mirror Light

SBM-WH
LED Mirror Light, 12w, CCT, White frame

SBM-CH
LED Mirror Light, 12w, CCT, Chrome frame

- Power: 12w
- 110Lm/W
- Size: 600 x 100 x 45mm
- CCT: 3000k, 4000k, 5700k
- IP Rating: IP44
- Class II
- 3 yr Guarantee
- Input Voltage: 100v-240v AC
- Chrome or White Frame
- Lamp Life: 30,000 hrs

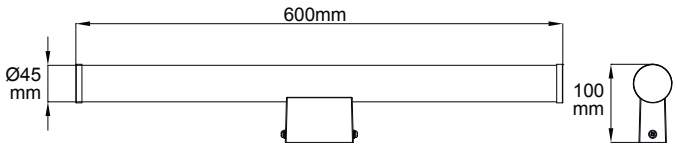

Outer Box 12

30000 Life Time
10000 Switching Cycle
Compatible
Non Dimmable
Class II
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
120°
>80 Ra Rendering Index

A G E

Scan for info

DOWNLIGHTS

LED CCT Dimmable PVC Downlights	Pg 32
LED CCT Multi Watt Universal Downlight	Pg 36
LED Fire Rated CCT Dimmable Downlight	Pg 37
LED Fire Rated CCT Tilt Downlight	Pg 39
LED Fire Rated CCT 5.5W Tilt Downlight	Pg 42
LED Fire Rated CCT 5.5W Downlight	Pg 43
Fire Rated GU10 Downlight	Pg 44
GU10 PVC Downlight	Pg 45
GU10 Convertor Downlight	Pg 46
GZ10 Shower Downlight	Pg 47
Spring Loaded GZ10 Downlight	Pg 48
GU10 Pressed Steel Downlight	Pg 50
GU10 Die Cast Twist Lock Downlight	Pg 51
GU10 Die Cast Twist Lock Tilt Downlight	Pg 51



LED CCT DIMMABLE PVC DOWNLIGHT PG 32



LED CCT MULTI WATT DOWNLIGHT PG 36



LED FIRE RATED CCT DOWNLIGHT PG 37



LED FIRE RATED CCT TIlT DOWNLIGHT PG 39



LED FIRE RATED CCT DIM DOWNLIGHT PG 41



LED FIRE RATED CCT 5.5W DOWNLIGHT PG 42



LED FIRE RATED GU10 DOWNLIGHT PG 44



SPRING LOADED GZ10 DOWNlGHT PG 48

3 years Quality Assurance

IP44

590 lm
7w







Quick Wire Connector

CCT Switch

3000k
4000k
5700k

LED CCT Dimmable 7w PVC Downlight

SPVC 7W-DIM-CCT
LED 7w Dimmable PVC Downlight
White housing


SPVC 7W BL DIM-CCT
LED 7w Dimmable PVC Downlight
Black housing


- Power: 7w
- Lumen: 590Lm
- CCT: 3000k, 4000k, 5700k
- IP Rating: IP44
- 3 yr Guarantee
- Beam Angle: 120°
- Input Voltage: 220v/240v AC
- Lamp Life: 30,000 hrs
- Prewired with quick wire connector
- Available in black or white finish

SPVC TR-7W
Matt Chrome Trim for 7w Downlight


SPVC TR-7W-BL
Black Trim for 7w Downlight

7w





Outer Box
60

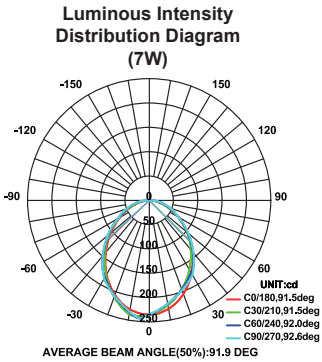

Scan for info

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A ↑ G F

30000 Life Time
10000 Switching Cycle
Compatible
Dimmable
LED
Flicker Free
** 90% Energy Saving
Instant Start
120°
>80 Ra Rendering Index

LED CCT DIMMABLE PVC DOWNLIGHT

source

900 lm
10w

IP44

3 years Quality Assurance







Quick Wire Connector

CCT Switch

3000k
4000k
5700k

LED CCT Dimmable 10w PVC Downlight


SPVC 10W-DIM-CCT
LED 10w Dimmable PVC Downlight
White housing

SPVC 10W BL DIM-CCT
LED 10w Dimmable PVC Downlight
Black housing

- Power: 10w
- Lumen: 900Lm
- CCT: 3000k, 4000k, 5700k
- IP Rating: IP44
- 3 yr Guarantee
- Beam Angle: 120°
- Input Voltage: 220v/240v AC
- Lamp Life: 30,000 hrs
- Prewired with quick wire connector
- Available in black or white finish


SPVC TR-10W
Matt Chrome Trim for 10w Downlight

Luminous Intensity Distribution Diagram (10W)



AVERAGE BEAM ANGLE(50%):92.8 DEG

10w





Outer Box 40

30000 Life Time
10000 Switching Cycle
Compatible
Dimmable
LED
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
120°
>80 Ra Rendering Index

A G F

Scan for info

3 years Quality Assurance

IP44

1200 lm
14w

1700 lm
17w





Quick Wire Connector

CCT Switch

3000k
4000k
5700k

LED CCT Dimmable 14w/17w PVC Downlight


SPVC 14W DIM-CCT
LED 14w Dimmable PVC Downlight
White housing

SPVC 17W DIM-CCT
LED 17w Dimmable PVC Downlight
White housing

- Power: 14/17w
- Lumen: 1200Lm (14w) / 1700Lm (17Lm)
- CCT: 3000k, 4000k, 5700k
- IP Rating: IP44
- 3 yr Guarantee
- Beam Angle: 120°
- Input Voltage: 240v AC
- Lamp Life: 30,000 hrs
- Prewired with quick wire connector
- White housing

SPVC TR-14W
Matt Chrome Trim for 14w Downlight

SPVC TR-17W
Matt Chrome for 17w Downlight



Outer Box
14w = 40
17w = 40



Matt Chrome Trim

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A ↑ G F

30000 Life Time · 10000 Switching Cycle · Compatible · Dimmable · LED

Flicker Free · ** 90% Energy Saving · Instant Start · 120° · >80 Ra Rendering Index

LED CCT DIMMABLE PVC DOWNLIGHT

2450 lm
25w

IP44



3 years Quality Assurance



Quick Wire Connector

CCT Switch


3000k
4000k
5700k

LED CCT Dimmable 25w PVC Downlight

SPVC 25W DIM-CCT
LED 25w Dimmable PVC Downlight
White housing

- Power: 25w
- Lumen: 2450Lm
- CCT: 3000k, 4000k, 5700k
- IP Rating: IP44
- 3 yr Guarantee
- Beam Angle: 120°
- Input Voltage: 240v AC
- Lamp Life: 50,000 hrs
- Prewired with quick wire connector
- White housing

25w





Matt Chrome Trim

SPVC TR-20W
Matt Chrome Trim for 25w Downlight


Outer Box 20

50000 Life Time
10000 Switching Cycle
Compatible
Dimmable
LED
Flicker Free
** 90% Energy Saving
Instant Start
120°
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G F

Scan for info

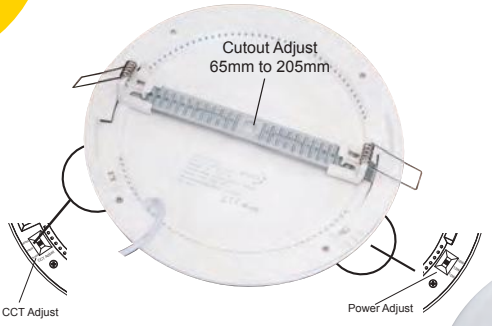



IP20

950 -1000 lm 10w

1200 -1450 lm 13w

1500 -1800 lm 16w

3 years Quality Assurance

Multi Watt

10w
13w
16w


CCT Switch

3000k
4000k
5700k


LED Universal CCT Multi Watt Downlight

SADCO-CCT
LED CCT Multi Watt and Adjustable Cutout Downlight

- Adjustable CCT and WATT
  10w: 950Lm - 1000Lm
  13w: 1200Lm - 1450Lm
  16w: 1500Lm - 1800Lm
- Adjustable Cutout from 65 - 205mm
- CCT: 3000k, 4000k, 5700k
- IP Rating: IP20
- 3 yr Guarantee
- Non-dimmable
- Beam Angle: 120°
- Lamp Life: 30,000 hrs
- Input Voltage: 200-240V AC
- Surface mounted: 20mm depth



Luminous Intensity Distribution Diagram (4000k)



AVERAGE BEAM ANGLE(50%):112.2 DEG

Outer Box 20

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A G E

30000 Life Time · 10000 Switching Cycle · Compatible · Non Dimmable · LED

Flicker Free · ** 90% Energy Saving · Instant Start · 120° · >80 Ra Rendering Index

LED FIRE RATED CCT DIMMABLE DOWNLIGHT

source

900 lm
9w

IP65

3 years Quality Assurance



CCT Switch
3000k
4000k
5700k

LED Fire Rated CCT 9w Dimmable Downlight

SPFR9W
LED Fire Rated CCT 9w
Dimmable Downlight


SPVC TR-10W
Matt Chrome Trim for
9w Downlight

SPVC TR-10W BL
Black Trim for
9w Downlight

- Power: 9w
- Lumen: 900Lm
- Voltage: 220-240V AC
- CCT: 3000k, 4000k, 5700k
- IP Rating: IP65
- 3 yr Guarantee
- Cutout: 90-102mm
- Triac Dimming
- Fire rated to 30/60/90 mins
- Suitable for covering with insulation material
- Pre Wired with terminal box and connector
- Built in Driver
- Fire, Moisture and Acoustic Compliant
- Black or Matt Chrome Trim Available



Black or Chrome Trim Available



Outer Box
40

30000 Life Time
10000 Switching Cycle
Compatible
Dimmable
F
Flicker Free
** 90% Energy Saving
Instant Start
30, 60, 90
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G F

Scan for info

IP65

600 lm
6w

3 years Quality Assurance



CCT Switch

3000k
4000k
5700k

LED Fire Rated CCT 6w Dimmable Downlight

SPFR6W
LED Fire Rated CCT 6w Dimmable Downlight


SPVC TR-7W
Matt Chrome Trim for 6w Downlight

SPVC TR-7W BL
Black Trim for 6w Downlight



Black or Chrome Trim Available

- Power: 6w
- Lumen: 600Lm
- Voltage: 220-240V AC
- CCT: 3000k, 4000k, 5700k
- IP Rating: IP65
- 3 yr Guarantee
- Cutout: 68-80mm
- Triac Dimming
- Fire rated to 30/60/90 mins
- Suitable for covering with insulation material
- Pre Wired with terminal box and connector
- Built in Driver
- Fire, Moisture and Acoustic Compliant
- Black or Matt Chrome Trim Available



Outer Box 60

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A ↑ G F

30000 Life Time · 10000 Switching Cycle · Compatible · Dimmable · F

Flicker Free · ** 90% Energy Saving · Instant Start · 30, 60, 90 · >80 Ra Rendering Index

LED FIRE RATED CCT TILT DOWNLIGHT

700 lm
7w

IP65



5 years Quality Assurance

CCT Switch
3000k
4000k
6000k


LED Fire Rated CCT Tilt 7w Downlight


SWV7WFRWH
LED 7w Dimmable White CCT
Fire Rated Recessed
Wall Washer

SWV7WFRMC
LED 7w Dimmable Matt Chrome
CCT Fire Rated Recessed
Wall Washer

- Power: 7w
- Lumen: 700Lm
- Voltage: 220-240V AC
- CCT: 3000k, 4000k, 6000k
- IP Rating: IP65
- 5 yr Guarantee
- Lamp Life: 30,000 hrs
- Triac Dimming
- Beam Angle: 120°
- Prewired with quick wire connector
- Available in White or Matt Chrome

Luminous Intensity Distribution Diagram





Outer Box 50

30000 Life Time
10000 Switching Cycle
Compatible
Dimmable
F
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
120°
>80 Ra Rendering Index

A G F

Scan for info

IP65

500 lm
5w

5 years Quality Assurance



CCT Switch

3000k
4000k
6000k


LED Fire Rated CCT Tilt 5w Downlight


SWV5WFRWH
LED 5w Dimmable White CCT
Fire Rated Recessed
Wall Washer

SWV5WFRMC
LED 5w Dimmable Matt Chrome
CCT Fire Rated Recessed
Wall Washer

- Power: 5w
- Lumen: 500Lm
- Voltage: 220-240V AC
- CCT: 3000k, 4000k, 6000k
- IP Rating: IP65
- 5 yr Guarantee
- Lamp Life: 30,000 hrs
- Triac Dimming
- Beam Angle: 120°
- Prewired with quick wire connector
- Available in White or Matt Chrome

Luminous Intensity Distribution Diagram





Outer Box 50

Scan for info

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A ↑ G F

30000 Life Time
10000 Switching Cycle
Compatible
Dimmable
F
Flicker Free
** 90% Energy Saving
Instant Start
120°
>80 Ra Rendering Index

LED FIRE RATED CCT DIM DOWNLIGHT

source

600 lm
6w

IP65

3 years Quality Assurance



SFR6WMCTR
Matt Chrome trim

CCT Switch


3000k
4000k
6500k


LED Fire Rated CCT Dimmable Downlight

SFR 6W-WH-CCT
LED 6w Dimmable White CCT
Fire Rated Downlight

- Power: 6w
- 100Lm/W
- Voltage: 220/240V AC
- CCT: 3000k, 4000k, 6500k
- Prewired with quick wire connector
- IP Rating: IP65
- 3 yr Guarantee
- Lamp Life: 30,000 hrs
- Dimmable with LED dimmers
- Beam Angle: 60°
- Flicker Free
- Cut out: 55-70mm
- Connection: push on
- 30/60/90 minute fire rated
- Fire, Moisture, Acoustic Compliant
- Matt Chrome Trim Sold Separately

Luminous Intensity Distribution Diagram 4000k





Outer Box 40

30000 Life Time
10000 Switching Cycle
Compatible
Dimmable
F
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
30, 60, 90
>80 Ra Rendering Index

A G F

Scan for info

3 years Quality Assurance

IP20

550 lm
5.5w





CCT Switch


- 3000k
- 4000k
- 6000k

LED CCT Fire Rated Tilt Downlight

SFR TL 5.5W-WH-CCT
LED CCT Fire Rated Tilt Downlight, White Finish

SFR TL 5.5W-MC-CCT
LED CCT Fire Rated Tilt Downlight, Matt Chrome Finish

- Power: 5.5w
- Lumen: 550Lm
- Tiltable Function
- Voltage: 170-240V AC
- CCT: 3000k, 4000k, 6000k
- IP Rating: IP20
- 3 yr Guarantee
- Cutout: 70mm
- Class II
- Dimmable with LED Dimmers
- Fire rated to 30/60/90 mins
- Pre Wired with quick wire connector
- Beam Angle: 60°
- White or Matt Chrome Finish

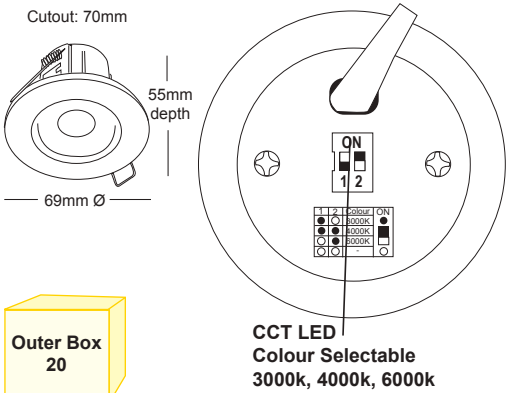

Outer Box 20

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A ↑ G F

30000 Life Time · 10000 Switching Cycle · Compatible · Dimmable · F

Class II · ** 90% Energy Saving · Instant Start · 30, 60, 90 · >80 Ra Rendering Index

LED CCT FIRE RATED DOWNLIGHT

550 lm
5.5w

IP65





3 years Quality Assurance

LED CCT Fire Rated Downlight


SFR 5.5W-WH-CCT
LED CCT Fire Rated Downlight, White Finish

SFR 5.5W-MC-CCT
LED CCT Fire Rated Downlight, Matt Chrome Finish


- Power: 5.5w
- Lumen: 550Lm
- Voltage: 170-240V AC
- CCT: 3000k, 4000k, 6000k
- IP Rating: IP65
- 3 yr Guarantee
- Cutout: 57mm
- Class II
- Dimmable with LED Dimmers
- Fire rated to 30/60/90 mins
- Pre Wired with quick wire connector
- Beam Angle: 60°
- White or Matt Chrome Finish

CCT Switch

3000k
4000k
6000k



CCT LED Colour Selectable 3000k, 4000k, 6000k



Outer Box 20

30000 Life Time
10000 Switching Cycle
Compatible
Dimmable
F
Class II
** 90% Energy Saving
Instant Start
30, 60, 90
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G F

Scan for info

3 years Quality Assurance

IP65

FIRE RATED 90min






IP65 Fire Rated GU10 Downlight

SGUFR-WH
IP65 Fire Rated GU10
White Downlight

SGUFR-MC
IP65 Fire Rated GU10
Matt Chrome Downlight

- Power: 240v 50w max
- IP Rating: IP65
- 3 yr Guarantee
- Lamp not included
- Available in White or Matt Chrome
- Fire rated up to 90 minutes
- Conforms to:
  EN 60598-2-2:2012
  EN 60598-1:2015+A1:2018
  BS476 Part 21:1987

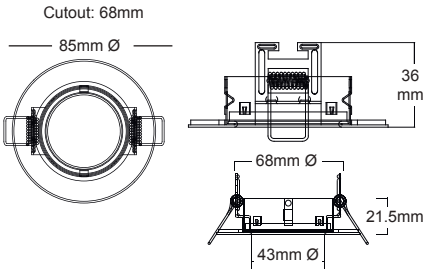

Outer Box 50

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

GU10 PVC DOWNLIGHT

Class II

IP20

2 years Quality Assurance




LED GU10 PVC Downlight

GZPVC
GU10 PVC Downlight

- IP Rating: IP20
- Lamp Type: GZ/GU10 Halogen Lamp
- Suitable for mounting on flammable Surfaces
- Voltage: 240v, 50Hz
- 2 yr Guarantee
- Class II (Double insulated)
- Lamp is not supplied
- 3 Trims supplied White, Black, Brown



3 Trims



Outer Box 50

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

3 years Quality Assurance

IP20




GU10 Convertor Downlight

EDLCON-WH
GU10/LV Convertor Downlight, White Finish

EDLCON-CH
GU10/LV Convertor Downlight, Chrome Finish

EDLCON-MC
GU10/LV Convertor Downlight, Matt Chrome Finish

- Diameter 150mm
- Will fit 70mm - 140mm hole
- IP Rating: IP20
- 3 yr Guarantee
- Supplied with GU10 and 12v Lamp Holder
- Available in: White, Chrome, and Matt Chrome





Lamp Holder Included

Outer Box 40

Scan for info

GZ10 SHOWER DOWNLIGHT

IP65

3 years Quality Assurance



240v IP65 GZ10 Shower Downlight


COM65SH-WH
GZ10 IP65 Shower Downlight, White Finish

COM65SH-BR
GZ10 IP65 Shower Downlight, Brass Finish

COM65SH-CH
GZ10 IP65 Shower Downlight, Chrome Finish

COM65SH-MC
GZ10 IP65 Shower Downlight, Matt Chrome Finish

- GZ10
- IP Rating: IP65
- 3yr Guarantee
- Available in: White, Chrome, Matt Chrome and Brass



Outer Box 50

Scan for info

3 years Quality Assurance

IP20



Spring Loaded GZ10 Downlight

SL-GZDL-WH
Spring Loaded GZ10 Downlight, White Finish


SL-GZDL-BR
Spring Loaded GZ10 Downlight, Brass Finish

SL-GZDL-CH
Spring Loaded GZ10 Downlight, Chrome Finish

SL-GZDL-MC
Spring Loaded GZ10 Downlight, Matt Chrome Finish

SL-GZDL-AB
Spring Loaded GZ10 Downlight, Antique Brass Finish

- GZ10
- IP Rating: IP20
- 3 yr Guarantee
- Available in: White, Chrome, Brass Antique Brass and Matt Chrome



Outer Box 50

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

SPRING LOADED GZ10 TILT DOWNLIGHT

IP20



3 years Quality Assurance

Spring Loaded GZ10 Tilt Downlight

SL-GZTL-WH
Spring Loaded Tilt
GZ10 Downlight, White Finish


SL-GZTL-BR
Spring Loaded Tilt
GZ10 Downlight, Brass Finish

SL-GZTL-CH
Spring Loaded Tilt
GZ10 Downlight, Chrome Finish

SL-GZTL-MC
Spring Loaded Tilt
GZ10 Downlight, Matt Chrome Finish

SL-GZTL-AB
Spring Loaded Tilt
GZ10 Downlight, Antique Brass Finish

- GZ10
- Tiltable Downlight
- IP Rating: IP20
- 3 yr Guarantee
- Available in: White, Chrome, Brass Antique Brass and Matt Chrome



Outer Box 50

Scan for info

IP20

3 years Quality Assurance






GU10 Pressed Steel Downlight

EGZDL-WH
Pressed Steel Downlight,
White Finish

EGZDL-MC
Pressed Steel Downlight,
Matt Chrome Finish

- GU10
- IP Rating: IP20
- Cutout: 60mm
- Available in: White and Matt Chrome



Cutout: 60mm

Outer Box
50

Scan for info


ErP COMPLIANT UK CA CE RoHS COMPLIANT

GU10 DIE CAST TWIST LOCK DOWNLIGHT

source

IP20





Cutout: 70mm

3 years Quality Assurance

GU10 Die Cast Twist Lock Downlight


EDC GZDL-WH
GU10 Die Cast Twist Lock Downlight, White

EDC GZDL-CH
GU10 Die Cast Twist Lock Downlight, Chrome

EDC GZDL-MC
GU10 Die Cast Twist Lock Downlight, Matt Chrome

- GU10
- IP Rating: IP20
- 3 year guarantee
- Cutout: 70mm
- Available in: White, Chrome and Matt Chrome





Cutout: 80mm

GU10 Die Cast Twist Lock Tilt Downlight

EDC GZTL-WH
GU10 Die Cast Twist Lock Tilt Downlight, White

EDC GZTL-CH
GU10 Die Cast Twist Lock Tilt Downlight, Chrome

EDC GZTL-MC
GU10 Die Cast Twist Lock Tilt Downlight, Matt Chrome

- GU10
- IP Rating: IP20
- 3 year guarantee
- Cutout: 80mm
- Available in: White, Chrome and Matt Chrome

Outer Box 50

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

EMERGENCY LIGHTING


Self Test Emergency Exit Box	Pg 54
Emergency Exit Box	Pg 55
Emergency Exit Box, Black Finish	Pg 56
Self Test Slimline Emergency Exit Box	Pg 57
Self Test Emergency Bulkhead	Pg 58
Emergency Bulkhead	Pg 59
Compact Emergency Bulkhead	Pg 60
Emergency Accessories	Pg 61
Emergency Hanging Blade	Pg 62
Self Test Emergency Hanging Blade	Pg 63
LED IP65 Emergency Twinspot	Pg 64
Emergency Recessed Spot	Pg 65
Emergency Surface/Recessed Spot	Pg 66




EMERGENCY EXIT BOX
PG 54



EMERGENCY EXIT BOX
BLACK FINISH PG 56



EMERGENCY BULKHEAD
PG 58



COMPACT EMERGENCY
BULKHEAD PG 60




EMERGENCY HANGING
BLADE PG 62



LED IP65 EMERGENCY
TWINSPOT PG 64



EMERGENCY RECESSED
SPOT PG 65



EMERGENCY SURFACE
/RECESSED SPOT PG 66


5 years Quality Assurance

LiFe PO4 BATTERY

IP20

3HR Battery Duration





Colour Temp

6500k

Self Test Emergency Exit Box

SEM-EXB P04-ST
Self Testing Emergency Exit Box

BATTERY

3 years Quality Assurance

- 1500mAh 3.2V
- Li-FeP04
  (Lithium Iron Phosphate Battery)
- 3 Hours Duration
- 3 Years Warranty

- Power: 4w
- Lumen: Mains Mode: >50Lm,
  Em Mode: >30Lm
- Colour Temp: 6500k
- IP Rating: IP20
- 5 Yr Guarantee
- Voltage: 220-240V
- Acrylic Lit Panel
- Self Testing
- Installation: Maintained/Non-maintained
- Viewing Distance 30m
- Compliant with standards
  EN 62034, EN IEC 60598-2-22:2022
  EN IEC 61347-2-7:2012+A1:2019+A2:2022
  & ISO7010
- Supplied with Down Arrow ISO legend
- Additional legends must be ordered separately
- Indoor Use: Exits/Corridors/Escape Routes

EXB-RML
Running Man Legend Left

EXB-RMR
Running Man Legend Right

EXB-RMU
Running Man Legend Up

EXB-RMD
Running Man Legend Down

Outer Box 10 Legends 50

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

EMERGENCY EXIT BOX

source


IP20

3HR Battery Duration

5 years Quality Assurance

LiFe PO4 BATTERY





Depth 50mm

Colour Temp

6500k

Emergency Exit Box

SEM-EXB P04
Emergency Exit Box

BATTERY

3 years Quality Assurance

- 1500mAh 3.2V
- Li-FeP04
  (Lithium Iron Phosphate Battery)
- 3 Hours Duration
- 3 Years Warranty

- Power: 4w
- Lumen: Mains Mode: >50Lm,
  Em Mode: >30Lm
- Colour Temp: 6500k
- IP Rating: IP20
- 5 Yr Guarantee
- Voltage: 220-240V
- Acrylic Lit Panel
- Installation: Maintained/Non-maintained
- Viewing Distance 30m
- Compliant with standards
  EN IEC 60598-2-22:2022
  EN IEC 61347-2-7:2012+A1:2019+A2:2022
  & ISO7010
- Supplied with Down Arrow ISO legend
- Additional legends must be ordered separately
- Indoor Use: Exits/Corridors/Escape Routes

EXB-RML
Running Man Legend Left

EXB-RMR
Running Man Legend Right

EXB-RMU
Running Man Legend Up

EXB-RMD
Running Man Legend Down

Outer Box 10
Legends 50

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info


5 years Quality Assurance

LiFe PO4 BATTERY

IP20

3HR Battery Duration





Colour Temp

6500k

Self Test Emergency Exit Box

SEM-BL EXB
Self Testing Emergency Exit Box

BATTERY

3 years Quality Assurance

- 1500mAh 3.2V
- Li-FeP04
  (Lithium Iron Phosphate Battery)
- 3 Hours Duration
- 3 Years Warranty

- Power: 4w
- Lumen: Mains Mode: >50Lm,
  Em Mode: >30Lm
- Colour Temp: 6500k
- IP Rating: IP20
- 5 Yr Guarantee
- Voltage: 220-240V
- Acrylic Lit Panel
- Black Housing
- Self Testing
- Installation: Maintained/Non-maintained
- Viewing Distance 35m
- Compliant with standards
  EN 62034, EN IEC 60598-2-22:2014
  + A1:2020 & ISO7010
- Supplied with Down Arrow ISO legend
- Additional legends must be ordered separately
- Indoor Use: Exits/Corridors/Escape Routes

EXB-RML
Running Man Legend Left

EXB-RMR
Running Man Legend Right

EXB-RMU
Running Man Legend Up

EXB-RMD
Running Man Legend Down

Outer Box
6
Legends 50

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

EMERGENCY EXIT BOX

source


IP20

3HR Battery Duration

5 years Quality Assurance

LiFe PO4 BATTERY





Depth 29mm

Colour Temp

6500k

Self Test Slimline Emergency Exit Box

SEM-SL-EXB P04
Self Testing Emergency Exit Box

BATTERY

3 years Quality Assurance

- 1500mAh 3.2V
- Li-FeP04
  (Lithium Iron Phosphate Battery)
- 3 Hours Duration
- 3 Years Warranty

- Power: 3.5w
- Lumen: Mains Mode: >21Lm,
  Em Mode: >40Lm
- Colour Temp: 6500k
- IP Rating: IP20
- 5 Yr Guarantee
- Voltage: 220-240V
- Acrylic Lit Panel
- Self Testing
- Installation: Maintained/Non-maintained
- Viewing Distance 30m
- Compliant with standards
  EN 62034, EN IEC 60598-2-22:2022
  EN IEC 61347-2-7:2012+A1:2019+A2:2022
  & ISO7010
- Supplied with 4 pack ISO Legends
- Indoor Use: Exits/Corridors/
  Escape Routes

EXB-RML
Running Man Legend Left

EXB-RMR
Running Man Legend Right

EXB-RMU
Running Man Legend Up

EXB-RMD
Running Man Legend Down

Outer Box 10
Legends 50

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

5 years Quality Assurance

LiFe PO4 BATTERY

IP65

3HR Battery Duration

IK 08



Supplied with Self Adhesive ISO legends

Colour Temp

6500k


Self Test Emergency Bulkhead


SEM-BH P04-ST
Self Testing Emergency Bulkhead

BATTERY

3 years Quality Assurance

- 1000mAh 3.2V
- Li-FeP04
  (Lithium Iron Phosphate Battery)
- 3 Hours Duration
- 3 Years Warranty

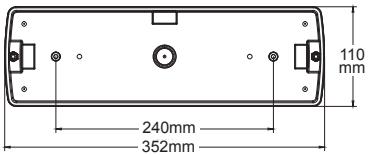



Outer Box 12

- Power: 3w
- Lumen: Mains Mode: >250Lm,
  Em Mode: >110Lm
- Colour Temp: 6500k
- IP Rating: IP65
- 5 Yr Guarantee
- Voltage: 220-240V
- Acrylic Lit Panel
- Self Testing
- Installation: Maintained/Non-maintained
- Viewing Distance 18m
- Compliant with standards
  EN 62034, EN IEC 60598-2-22:2022
  EN IEC 61347-2-7:2012+A1:2019+A2:2022
  & ISO7010
- Supplied with Self Adhesive ISO legends
- Indoor Use: Exits/Corridors/Escape Routes

ErP COMPLIANT UK CA CE RoHS COMPLIANT



ISO legend pack

Scan for info

EMERGENCY BULKHEAD

source

IP65

3HR Battery Duration

IK 08

5 years Quality Assurance

LiFe PO4 BATTERY



Supplied with Self Adhesive ISO legends

Colour Temp

6500k


Emergency Bulkhead


SEM-BH P04
Self Testing Emergency Bulkhead

BATTERY

3 years Quality Assurance

- 1000mAh 3.2V
- Li-FeP04
  (Lithium Iron Phosphate Battery)
- 3 Hours Duration
- 3 Years Warranty

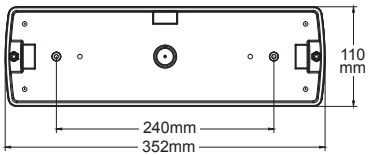



- Power: 3w
- Lumen: Mains Mode: >250Lm,
  Em Mode: >110Lm
- Colour Temp: 6500k
- IP Rating: IP65
- 5 Yr Guarantee
- Voltage: 220-240V
- Acrylic Lit Panel
- Installation: Maintained/Non-maintained
- Viewing Distance 18m
- Compliant with standards
  EN IEC 60598-2-22:2022
  EN IEC 61347-2-7:2012+A1:2019+A2:2022
  & ISO7010
- Supplied with Self Adhesive ISO legends
- Indoor Use: Exits/Corridors/
  Escape Routes

Outer Box 12



ISO legend pack

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

5 years Quality Assurance

LiFe PO4 BATTERY

IP65

3HR Battery Duration

IK 08





Supplied with Self Adhesive ISO legends

Colour Temp

6500k


Compact Emergency Bulkhead

SEM-SM BH P04
Compact Emergency Bulkhead

BATTERY

3 years Quality Assurance

- 1000mAh 3.2V
- Li-FeP04
  (Lithium Iron Phosphate Battery)
- 3 Hours Duration
- 3 Years Warranty



- Power: 2w
- Lumen: Mains Mode: >180Lm,
  Em Mode: >100Lm
- Colour Temp: 6500k
- IP Rating: IP65
- 5 Yr Guarantee
- Voltage: 220-240V
- Acrylic Lit Panel
- Installation: Maintained/Non-maintained
- Viewing Distance 18m
- Compliant with standards
  EN IEC 60598-2-22:2022
  EN IEC 61347-2-7:2012+A1:2019+A2:2022
  & ISO7010
- Supplied with Self Adhesive ISO legends
- Indoor Use: Exits/Corridors/Escape Routes

Outer Box 20


ErP COMPLIANT UKCA CE RoHS COMPLIANT



ISO legend pack

Scan for info

IP65






5 years Quality Assurance

Recessed Kit for Exit Sign

SEM-EXS RK

Attachment for SEM-EXSIGN

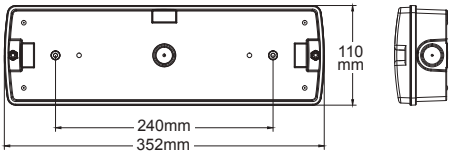




Recessed Kit for Emergency Bulkhead

SEM-RK

Attachment for SEM-BH P04, SEM-BH P04-ST







ISO legend pack

Drop Down Attachment for Emergency Bulkhead

SEM-DD

Attachment for SEM-BH P04, SEM-BH P04-ST. 8 ISO Legends included

Outer Box
SEM-EXS-RK=50
SEM-RK=20
SEM-DD=10

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

EMERGENCY HANGING BLADE




IP20

3HR Battery Duration

5 years Quality Assurance

Ni-Cd BATTERY

5 Mounting Options

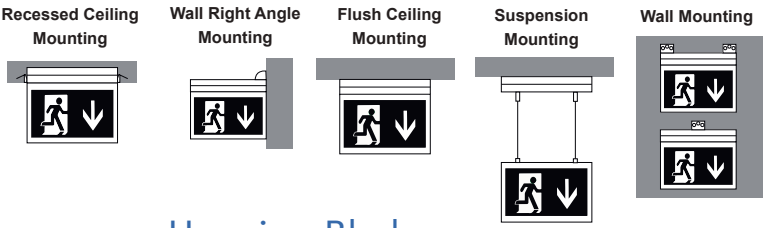

Colour Temp

6500k


Emergency Hanging Blade

SEM-EXSIGN
Emergency Hanging Blade

BATTERY

2 years Quality Assurance

- 800mAh 3.6V
- Ni-Cd
  (Nickel-Cadmium Battery)
- 3 Hours Duration
- 2 Years Warranty



- 5 Mounting Options:
  Ceiling/Flush/Suspension/Wall
  /Wall right angle
- Power: 3w
- Lumen: Mains Mode: >39Lm,
  Em Mode: >37Lm
- Colour Temp: 6500k
- IP Rating: IP20
- 5 Yr Guarantee
- Voltage: 220-240V
- Acrylic Lit Panel
- Installation: Maintained
- Viewing Distance 24m
- Compliant with standards
  EN IEC 60598-2-22:2014 + A1:2020 &
  ISO7010
- Supplied with 4 ISO legends
- Indoor Use: Exits/Corridors/Escape Routes

Outer Box 10

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

EMERGENCY HANGING BLADE

source

IP20


3HR Battery Duration

5 years Quality Assurance

LiFe PO4 BATTERY



Suspension Mounting



Flush Ceiling Mounting



Colour Temp

6500k


Self Test Emergency Hanging Blade

SEM-CH EXSIGN
Emergency Chrome Hanging Blade

BATTERY

3 years Quality Assurance

- 1500mAh 3.2V
- Li-FeP04
  (Lithium Iron Phosphate Battery)
- 3 Hours Duration
- 3 Years Warranty



- Power: 3w
- Lumen: Mains Mode: >40Lm,
  Em Mode: >40Lm
- Colour Temp: 6500k
- IP Rating: IP20
- 5 Yr Guarantee
- Voltage: 220-240V
- Acrylic Lit Panel
- Self Testing
- Installation: Maintained/Non-Maintained
- Viewing Distance 26m
- Compliant with standards EN 62034,
  EN IEC 60598-2-22:2014 + A1:2020 & ISO7010
- Supplied with Down Arrow ISO legend
- Additional legends must be ordered separately
- Indoor Use: Exits/Corridors/ Escape Routes

Outer Box 10

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

LED IP65 EMERGENCY TWINSPOT



5 years Quality Assurance

LiFe PO4 BATTERY

IP65

3HR Battery Duration

IK 08

Colour Temp

6500k

Self Test LED Emergency Twin Spot

SEM-TWSP P04
Emergency Self Test Twin Spot

BATTERY


3 years Quality Assurance

- 3600mAh 3.2V
- Li-FeP04
  (Lithium Iron Phosphate Battery)
- 3 Hours Duration
- 3 Years Warranty

- Power: 2w
- Lumen: Em Mode: >400Lm
- Colour Temp: 6500k
- IP Rating: IP65
- 5 Yr Guarantee
- Voltage: 220-240V
- Rotatable Heads
- Self Testing
- Installation: Non-maintained
- Compliant with standards
  EN 62034, EN IEC 60598-2-22:2022
  EN IEC 61347-2-7:2012+A1:2019+A2:2022
  & ISO7010
- Indoor Use: Exits/Corridors/Escape Routes

Outer Box 10

ErP COMPLIANT UKCA CE RoHS COMPLIANT



Scan for info

EMERGENCY RECESSED SPOT

source

IP20

3HR Battery Duration

5 years Quality Assurance

LiFe PO4 BATTERY



3 Bezels Supplied

Colour Temp

5500k

Self Test Emergency Recessed Spot


SEM-REDL
Emergency Self Test
Recessed Spot

BATTERY


3 years Quality Assurance

- 1500mAh 3.2V
- Li-FeP04
  (Lithium Iron Phosphate Battery)
- 3 Hours Duration
- 3 Years Warranty

- Power: 3w
- Lumen: Mains / Em Mode: >115Lm
- Colour Temp: 5500k
- IP Rating: IP20
- 5 Yr Guarantee
- Voltage: 220-240V
- Self Testing
- Installation: Non-Maintained
- Compliant with standards EN 62034, EN IEC 60598-2-22:2014 + A1:2020 & ISO7010
- Comes with 3 Bezels: White, Black & Matt Chrome
- Indoor Use: Exits/Corridors/Escape Routes

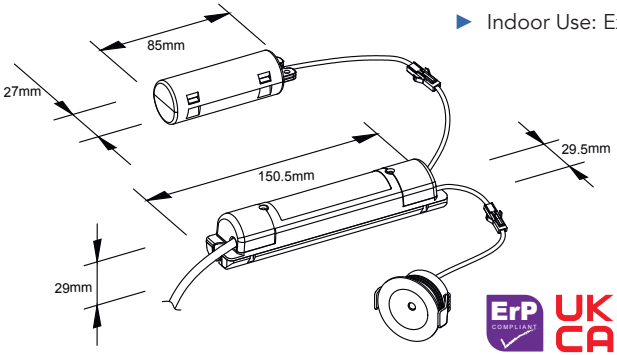

Cutout: 35mm



Diameter: 40mm

Outer Box 20

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info



5 years Quality Assurance

LiFe PO4 BATTERY

IP65

3HR Battery Duration

500 lm 5w

425 lm 5w

Colour Temp

6500k


Self Test Emergency Surface/Recessed Downlight

SEM-SWDL
Emergency Self Test Surface/ Recessed Spot

BATTERY

3 years Quality Assurance

- 4.0Ah 3.2V
- Li-FeP04
  (Lithium Iron Phosphate Battery)
- 3 Hours Duration
- 3 Years Warranty



- Power: 5w
- 2 click on lenses supplied for different Light Distributions:
  Open Lens: Beam Angle: 144°
  500Lm +/-10%
  Corridor Lens: Beam Angle: 128°
  425Lm +/-10%
- Colour Temp: 5700k+/-355k
- IP Rating: IP65
- 5 Yr Guarantee
- Voltage: 220-240V, 50/60Hz
- Surface Mounting Accessory included
- Self Testing
- Installation: Non-Maintained
- Compliant with standards
  EN 62034, EN IEC 60598-2-22:2022
  EN IEC 61347-2-7:2012+A1:2019+A2:2022
  & ISO7010
- Indoor Use: Exits/Corridors/Escape Route

Outer Box 20

ErP COMPLIANT UK CA CE RoHS COMPLIANT



Scan for info



LAMPS

LED GU10 Lamp Range	Pg 70
LED Dimmable 5w GU10 Lamp Range	Pg 73
COB LED 12v Lamp Range	Pg 74
LED Decorative Lamps	Pg 75
LED Dimmable Decorative	Pg 81
LED Filament Clear Glass	Pg 83
LED Filament Vintage Range	Pg 85
LED E27 Festoon Filament Lamp	Pg 90
LED G9 / G4 Lamps	Pg 91
LED Reflector Lamps	Pg 92
LED Striplight Lamps	Pg 93
LED PAR 38 Lamp	Pg 94
Twin Peg Architectural Lamp	Pg 95



LED GU10 LAMP RANGE
PG 70



LED DECORATIVE LAMPS
PG 75



LED FILAMENT VINTAGE
LAMPS PG 85



LED G9/G4 LAMPS
PG 91



LED REFLECTOR LAMPS
PG 92



LED STRIPLIGHT LAMPS
PG 93



LED PAR 38 LAMP
PG 94



ARCHITECTURAL
LAMP PG 95

3 years Quality Assurance

GU10

320 lm 4w WW

340 lm 4w NW

340 lm 4w CW



LED GU10 4w Lamp Range

Colour Temp

2700k

4000k


6500k

S4W-SMD-WW
GU10 4w 320Lm Lamp
Warm White 2700k

S4W-SMD-NW
GU10 4w 340Lm Lamp
Natural White 4000k

S4W-SMD-CW
GU10 4w 340Lm Lamp
Cool White 6500k

- Power: 4w
- Lumens: 320/340/340Lm
- 3 Yr. Guarantee
- Beam Angle: 36˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base Type: GU10
- Available In Warm/Cool/Natural White



Box Qty
Outer: 200
Inner: 50

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A F G

IP20 · 10000 Switching Cycle · Compatible · LED · Non Dimmable

36° · ** 90% Energy Saving · Instant Start · 30000 Life Time · >80 Ra Rendering Index

LED GU10 LAMP RANGE

500 lm
6w WW

525 lm
6w NW

525 lm
6w CW



3 years Quality Assurance

GU10

LED GU10 6w Lamp Range

S6W-SMD-WW
GU10 6w 500Lm Lamp
Warm White 2700k


S6W-SMD-NW
GU10 6w 525Lm Lamp
Natural White 4000k

S6W-SMD-CW
GU10 6w 525Lm Lamp
Cool White 6500k

- Power: 6w
- Lumens:500/525/525Lm
- 3 Yr. Guarantee
- Beam Angle: 36˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base Type: GU10
- Available In Warm/Cool/Natural White

Colour Temp

2700k
4000k
6500k



Box Qty
Outer: 200
Inner: 50

IP20
10000 Switching Cycle
Compatible
LED
Non Dimmable
36°
90% Energy Saving
Instant Start
30000 Life Time
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G F

Scan for info

3 years Quality Assurance

GU10

440 lm
6w WW

460 lm
6w CW



CREE

CREE COB GU10 6w Lamp Range

Colour Temp


2700k

6500k

S6WCOB GU10-WW
CREE COB GU10 6w 440Lm Lamp Warm White 2700k

S6WCOB GU10-CW
CREE COB GU10 6w 460Lm Lamp Cool White 6500k

- Power: 6w
- Lumens: 440/460Lm
- Non-Dimmable
- 3 Yr. Guarantee
- Beam Angle: 36˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base Type: GU10
- Available In Warm/Cool White



Box Qty
Outer: 200
Inner: 50

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A G F

IP20 · 10000 Switching Cycle · Compatible · LED · Non Dimmable

36° · ** 90% Energy Saving · Instant Start · 30000 Life Time · >80 Ra Rendering Index

LED GU10 LAMP RANGE

400 lm
5w WW

410 lm
5w NW

420 lm
5w CW



3 years Quality Assurance

GU10

LED Dimmable GU10 5w Lamp Range

S5WSMDDIM-WW
Dimmable GU10 5w 400Lm Lamp
Warm White 2700k


S5W-SMD-NW
Dimmable GU10 5w 410Lm Lamp
Natural White 4000k

S5WSMDDIM-CW
Dimmable GU10 5w 420Lm Lamp
Cool White 6500k

- Power: 5w
- Lumens:400/410/420Lm
- Dimmable
- 3 Yr. Guarantee
- Beam Angle: 36˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base Type: GU10
- Available In Warm/Cool/Natural White

Colour Temp

2700k
4000k
6500k



Box Qty
Outer: 200
Inner: 50

IP20
10000 Switching Cycle
Compatible
LED
Dimmable
36°
** 90% Energy Saving
Instant Start
30000 Life Time
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G F

Scan for info

380 lm
5w WW

380 lm
5w CW

3 years Quality Assurance

MR16



COB LED 12v 5w Lamp Range

Colour Temp


2700k

6500k

S12VCOB5W-WW
12v COB LED 5w 380Lm Lamp
Warm White 2700k

S12VCOB5W-CW
12v COB LED 5w 380Lm Lamp
Cool White 6500k

- Power: 5w
- Lumen: 380Lm
- 3 Yr. Guarantee
- Beam Angle: 36˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 240V AC
- Base Type: MR16
- Non-Dimmable
- Available In Warm/Cool White



Box Qty
Outer: 200
Inner: 50

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A G

IP20 · 10000 Switching Cycle · Compatible · LED · Non Dimmable

36° · 90% Energy Saving · Instant Start · 30000 Life Time · >80 Ra Rendering Index

470 lm
4.9w WW

470 lm
4.9w CW



3 years Quality Assurance

B22 E27

B15D E14

LED 4.9w Candle

SCAND LED-B22
LED 4.9w 470Lm B22 Candle, Warm White 2700k

SCAND LED-B15D
LED 4.9w 470Lm B15D Candle, Warm White 2700k

SCAND LED-E27
LED 4.9w 470Lm E27 Candle, Warm White 2700k

SCAND LED-E14
LED 4.9w 470Lm E14 Candle, Warm White 2700k

SCAND LED-B22 CW
LED 4.9w 470Lm B22 Candle, Cool White 6500k


SCAND LED-B15D CW
LED 4.9w 470Lm B15D Candle, Cool White 6500k

SCAND LED-E27 CW
LED 4.9w 470Lm E27 Candle, Cool White 6500k

SCAND LED-E14 CW
LED 4.9w 470Lm E14 Candle, Cool White 6500k

- Power: 4.9w
- Lumen: 470Lm
- 3 Yr. Guarantee
- Beam Angle: 270˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base Type: C30 Lamp
  B22/E27/E14/B15D
- Available In Warm/Cool White

Colour Temp
2700k
6500k



Box Qty
Outer: 100
Inner: 20

IP20 | 10000 Switching Cycle | Compatible | LED | Non Dimmable

270° | **90% Energy Saving | Instant Start | 30000 Life Time | >80 Ra Rendering Index

ErP COMPLIANT | UK CA | CE | RoHS COMPLIANT

A F G

Scan for info

source

3 years Quality Assurance

B22 E27

B15D E14

470 lm 4.9w WW

470 lm 4.9w CW



LED 4.9w Golf Ball Lamp

Colour Temp

2700k

6500k

SGOLF LED-B22
LED 4.9w 470Lm B22 Golf Ball Lamp, Warm White 2700k

SGOLF LED-B15D
LED 4.9w 470Lm B15D Golf Ball Lamp, Warm White 2700k

SGOLF LED-E27
LED 4.9w 470Lm E27 Golf Ball Lamp, Warm White 2700k

SGOLF LED-E14
LED 4.9w 470Lm E14 Golf Ball Lamp, Warm White 2700k


SGOLF LED-B22 C/W
LED 4.9w 470Lm B22 Golf Ball Lamp, Cool White 6500k

SGOLF LED-B15D C/W
LED 4.9w 470Lm B15D Golf Ball Lamp, Cool White 6500k

SGOLF LED-E27 C/W
LED 4.9w 470Lm E27 Golf Ball Lamp, Cool White 6500k

SGOLF LED-E14 C/W
LED 4.9w 470Lm E14 Golf Ball Lamp, Cool White 6500k

- Power: 4.9w
- Lumen: 470Lm
- 3 Yr. Guarantee
- Beam Angle: 270˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base: C45 Lamp
  B22/E27/E14/B15D
- Available In Warm/Cool White



Box Qty
Outer: 100
Inner: 20

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A G F

IP20 · 10000 Switching Cycle · Compatible · LED · Non Dimmable

270° · 90% Energy Saving · Instant Start · 30000 Life Time · >80 Ra Rendering Index

LED DECORATIVE

source

470 lm
5.5w WW

470 lm
5.5w CW



3 years Quality Assurance

B22

E27

LED 5.5w A60 GLS Lamp


S6W-GLS-B22-WW
LED 5.5w A60 GLS B22 Lamp, Warm White 2700k

S6W-GLS-E27-WW
LED 5.5w A60 GLS B22 Lamp, Warm White 2700k

S6W-GLS-B22-CW
LED 5.5w A60 GLS B22 Lamp, Cool White 6500k

- Power: 5.5w
- Lumen: 470Lm
- 3 Yr. Guarantee
- Beam Angle: 300˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 220-240V AC
- Base: A60 Lamp B22/E27
- Available In Warm/Cool White

Colour Temp
2700k
6500k



Box Qty
Outer: 100
Inner: 20

IP20
10000 Switching Cycle
Compatible
LED
Non Dimmable
300°
** 90% Energy Saving
Instant Start
30000 Life Time
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A F G

Scan for info



806 lm
8.5w WW

806 lm
8.5w CW

3 years Quality Assurance

B22

E27

LED 8.5w A60 GLS Lamp

Colour Temp

2700k

6500k


SGLS LED B22
LED 8.5w A60 GLS B22 Lamp
Warm White 2700k

SGLS LED E27
LED 8.5w A60 GLS E27 Lamp
Warm White 2700k

SGLS LED B22-C/W
LED 8.5w A60 GLS B22 Lamp
Cool White 6500k

SGLS LED E27-C/W
LED 8.5w A60 GLS E27 Lamp
Cool White 6500k

- Power: 8.5w
- Lumen: 806Lm
- 3 Yr. Guarantee
- Beam Angle: 300˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base: A60 Lamp B22/E27
- Available In Warm/Cool White



Box Qty
Outer: 100
Inner: 20

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A G F

IP20 · 10000 Switching Cycle · Compatible · LED · Non Dimmable

300° · **90% Energy Saving · Instant Start · 30000 Life Time · >80 Ra Rendering Index

LED DECORATIVE

source

1521 lm
15w WW

1521 lm
15w CW



3 years Quality Assurance

B22

E27

LED 15w A65 GLS Lamp

SA70 LED-B22 WW
LED 15w A65 GLS B22 Lamp
Warm White 2700k


SA70 LED-E27 WW
LED 15w A65 GLS E27 Lamp
Warm White 2700k

SA70 LED-B22 CW
LED 15w A65 GLS B22 Lamp
Cool White 6500k

SA70 LED-E27 CW
LED 15w A65 GLS E27 Lamp
Cool White 6500k

- Power: 15w
- Lumen: 1521Lm
- 3 Yr. Guarantee
- Beam Angle: 300˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base: A65 Lamp B22/E27
- Available In Warm/Cool White

Colour Temp
2700k
6500k



Box Qty
Outer: 100
Inner: 20

IP20
10000 Switching Cycle
Compatible
LED
Non Dimmable
300°
** 90% Energy Saving
Instant Start
30000 Life Time
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A F G

Scan for info

3 years Quality Assurance

B22

E27

1800 lm 17.8w WW

1800 lm 17.8w CW



LED 19w GLS Lamp

Colour Temp

2700k

6500k


SA70 19W B22 WW
LED 17.8w 1800Lm B22 GLS Lamp
Warm White 2700k

SA70 19W E27 WW
LED 17.8w 1800Lm E27 GLS Lamp
Warm White 2700k

SA70 19W B22 CW
LED 17.8w 1800Lm B22 GLS Lamp
Cool White 6500k

SA70 19W E27 CW
LED 17.8w 1800Lm E27 GLS Lamp
Cool White 6500k

- Power: 17.8w
- Lumen: 1800Lm
- 3 Yr. Guarantee
- Beam Angle: 300˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base: B22/E27
- Available In Warm/Cool White



Box Qty
Outer: 100
Inner: 20

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A G F

IP20 · 10000 Switching Cycle · Compatible · LED · Non Dimmable

300° · ** 90% Energy Saving · Instant Start · 30000 Life Time · >80 Ra Rendering Index

LED DECORATIVE

400 lm
4.9w WW

400 lm
4.9w CW



3 years Quality Assurance

B22 E27
B15D E14

LED Dimmable Clear Candle

SD CAN-B22-WW
LED 4.9w Dim Clear Candle 400Lm B22, Warm White 2700k

SD CAN-B15D-WW
LED 4.9w Dim Clear Candle 400Lm B15D, Warm White 2700k

SD CAN-E27-WW
LED 4.9w Dim Clear Candle 400Lm E27, Warm White 2700k

SD CAN-14-WW
LED 4.9w Dim Clear Candle 400Lm E14, Warm White 2700k

SD CAN-B22-CW
LED 4.9w Dim Clear Candle 400Lm B22, Cool White 6500k


SD CAN-B15D-CW
LED 4.9w Dim Clear Candle 400Lm B15D, Cool White 6500k

SD CAN-E27-CW
LED 4.9w Dim Clear Candle 400Lm E27, Cool White 6500k

SD CAN-E14-CW
LED 4.9w Dim Clear Candle 400Lm E14, Cool White 6500k

- Power: 4.9w
- Lumen: 400Lm
- 3 Yr. Guarantee
- Beam Angle: 270˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base: C30 Lamp
  B22/E27/E14/B15D
- Available In Warm/Cool White

Colour Temp
2700k
6500k



Box Qty
Outer: 100
Inner: 20

IP20
10000 Switching Cycle
Compatible
LED
Dimmable
270°
** 90% Energy Saving
Instant Start
30000 Life Time
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A ↑ G

Scan for info

806 lm
8.5w WW



3 years Quality Assurance

B22

E27

Colour Temp


2700k

LED Dimmable A60 Lamp

SGLS-DIM-B22 WW
LED 8.5w Dimmable A60 Lamp
B22, Warm White 2700k

SGLS-DIM-E27 WW
LED 8.5w Dimmable A60 Lamp
E27, Warm White 2700k

- Power: 8.5w
- Lumen: 806Lm
- 3 Yr. Guarantee
- Beam Angle: 300˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base: A60 Lamp B22/E27
- Available In Warm White only



Box Qty
Outer: 100
Inner: 20

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A ↑ G F

IP20 · 10000 Switching Cycle · Compatible · LED · Dimmable

300° · **90% Energy Saving · Instant Start · 30000 Life Time · >80 Ra Rendering Index

LED FILAMENT CLEAR GLASS

806 lm
7w WW



3 years Quality Assurance

B22

E27


LED Filament Clear Glass Lamp

SCF-DGLS B22
LED 7w 806Lm Dimmable
Clear Glass, B22
Warm White 2700k

SCF-DGLS E27
LED 7w 806Lm Dimmable
Clear Glass, E27
Warm White 2700k

- Power: 7w
- Lumen: 806Lm
- 3 Yr. Guarantee
- Beam Angle: 270˚
- Lamp Life: 20,000 Hrs.
- Input Voltage: 220V AC
- Base: B22/E27
- Dimmable
- Warm White

Colour Temp
2700k



Box Qty
Outer: 100
Inner: 20

IP20
10000 Switching Cycle
Compatible
LED
Dimmable
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
270°
** 90% Energy Saving
Instant Start
20000 Life Time
>80 Ra Rendering Index
A G E

Scan for info

470 lm
4w

3 years Quality Assurance



B22 E27

B15D E14

Colour Temp

2700k

LED Filament Dimmable Clear Glass Candle


SCF-DCAN-BC
LED 4w Dimmable Clear Glass Candle B22, Warm White 2700k

SCF-DCAN-ES
LED Dimmable Clear Glass Candle E27, Warm White 2700k

SCF-DCAN-SBC
LED Dimmable Clear Glass Candle B15D, Warm White 2700k

SCF-DCAN-SES
LED Dimmable Clear Glass Candle E14, Warm White 2700k

- Power: 4w
- Lumen: 470Lm
- 3 Yr. Guarantee
- Beam Angle: 320˚
- Lamp Life: 20,000 Hrs.
- Input Voltage: 220V AC
- Base: B22/E27/E14/B15D
- Dimmable
- Warm White



Box Qty
Outer: 100
Inner: 20

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A G E

IP20 | 10000 Switching Cycle | Compatible | LED | Dimmable

320° | ** 90% Energy Saving | Instant Start | 20000 Life Time | >80 Ra Rendering Index

LED FILAMENT VINTAGE CANDLE

source

380 lm
4w



3 years Quality Assurance

B22 E27
B15D E14

LED Filament Vintage Dimmable Candle

SFL-DCAN-B22
LED 4w 380Lm B22 LED Filament Dimmable Vintage Candle Warm White 2200k


SFL-DCAN-E27
LED 4w 380Lm E27 LED Filament Dimmable Vintage Candle Warm White 2200k

SFL-DCAN-B15D
LED 4w 380Lm B15D LED Filament Dimmable Vintage Candle Warm White 2200k

SFL-DCAN-E14
LED 4w 380Lm E14 LED Filament Dimmable Vintage Candle Warm White 2200k

- Power: 4w
- Lumen: 380Lm
- 3 Yr. Guarantee
- Beam Angle: 320˚
- Lamp Life: 20,000 Hrs.
- Input Voltage: 220V AC
- Base: C30 Lamp B22/E27E14/B15D
- Dimmable
- Amber Glass

Colour Temp
2200k



Box Qty
Outer: 100
Inner: 20

IP20 · 10000 Switching Cycle · Compatible · LED · Dimmable · ErP Compliant · UKCA · CE · RoHS Compliant

320° · **90% Energy Saving · Instant Start · 20000 Life Time · >80 Ra Rendering Index

A F G

Scan for info

LED FILAMENT VINTAGE GLS

806 lm
7w



3 years Quality Assurance

B22

E27

Colour Temp


2200k

LED Filament Vintage Dimmable GLS

SFL-DGLS-E27
LED 7w Vintage Filament Dimmable GLS E27, Warm White 2200k

SFL-DGLS-B22
LED 7w Vintage Filament Dimmable GLS B22, Warm White 2200k

- Power: 7w
- Lumen: 806Lm
- 3 Yr. Guarantee
- Beam Angle: 320˚
- Lamp Life: 20,000 Hrs.
- Input Voltage: 220V AC
- Base: B22/E27
- Dimmable
- Amber Glass



Box Qty
Outer: 100
Inner: 20

Scan for info

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G E

IP20
10000 Switching Cycle
Compatible
LED
Dimmable
320°
** 90% Energy Saving
Instant Start
20000 Life Time
>80 Ra Rendering Index

LED FILAMENT VINTAGE GLOBE

source

806 lm
7w



3 years Quality Assurance

B22

E27


LED Filament Vintage Dimmable Globe

SFL-DG95-E27
LED 7w 807Lm E27 LED Filament Dimmable Vintage Globe Warm White 2200k

SFL-DG95-B22
LED 7w 806Lm B22 LED Filament Dimmable Vintage Globe Warm White 2200k

- Power: 7w
- Lumen: 806Lm
- 3 Yr. Guarantee
- Beam Angle: 320˚
- Lamp Life: 20,000 Hrs.
- Input Voltage: 220V AC
- Base: B22/E27
- Dimmable
- Amber Glass

Colour Temp
2200k



Box Qty
Outer: 25
Inner: 5

IP20 · 10000 Switching Cycle · Compatible · LED · Dimmable

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

320° · 90% Energy Saving · Instant Start · 20000 Life Time · >80 Ra Rendering Index

A F G

Scan for info

LED FILAMENT VINTAGE TEARDROP

806 lm
7w



3 years Quality Assurance

B22

E27

LED Filament Vintage Dimmable Teardrop


Colour Temp

2200k

SFL-DST64-E27
LED 7w Vintage Filament Dimmable Teardrop E27, Warm White 2200k

SFL-DST64-B22
LED 7w Vintage Filament Dimmable Teardrop B22, Warm White 2200k

- Power: 7w
- Lumen: 806Lm
- 3 Yr. Guarantee
- Beam Angle: 320˚
- Lamp Life: 20,000 Hrs.
- Input Voltage: 220V AC
- Base: B22/E27
- Dimmable
- Amber Glass



Box Qty
Outer: 100
Inner: 20

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A G E

IP20 | 10000 Switching Cycle | Compatible | LED | Dimmable

320° | 90% Energy Saving | Instant Start | 20000 Life Time | >80 Ra Rendering Index

LED FILAMENT VINTAGE MINI DECORATIVE

source

315 lm
3.5w



3 years Quality Assurance


E14

LED Filament Vintage Dimmable Mini

SFL-DT25-E14
LED 3.5w 315Lm E14 LED Filament Dimmable Vintage Mini Decorative Warm White 2200k

- Power: 3.5w
- Lumen: 315Lm
- 3 Yr. Guarantee
- Beam Angle: 320˚
- Lamp Life: 20,000 Hrs.
- Input Voltage: 220V AC
- Base: E14
- Dimmable
- Amber Glass

Colour Temp
2200k



Box Qty
Outer: 100
Inner: 20

IP20 · 10000 Switching Cycle · Compatible · LED · Dimmable · ErP Compliant · UK CA · CE · RoHS Compliant

320° · **90% Energy Saving · Instant Start · 20000 Life Time · >80 Ra Rendering Index · A F G

Scan for info

LED E27 FESTOON FILAMENT LAMP

120 lm
2w

3 years Quality Assurance

E27






LED E27 Festoon Filament Lamp

Colour Temp

3000k

S14E27-WW
LED 2w 120Lm E27 Festoon Filament Lamp Warm White 3000k

- Power: 2w
- Lumen: 120Lm
- 3 Yr. Guarantee
- Beam Angle: 320˚
- Lamp Life: 20,000 Hrs.
- Input Voltage: 230V AC
- Base: E27
- Replacement Lamp for SFES5M PLS
- PC Lens
- Warm White



Box Qty
Outer: 100

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A ↑ G E

IP20 · 10000 Switching Cycle · Compatible · LED · Non Dimmable

320° · ** 90% Energy Saving · Instant Start · 20000 Life Time · >80 Ra Rendering Index

LED G9/G4 LAMPS

source

3 years Quality Assurance


2w 200Lm LED G9 Filament

200 lm
2w

SG9 FIL 2W WW

G9

- Power: 2w
- Lumen: 200Lm
- 3 Yr. Guarantee
- Beam Angle: 360˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 240V AC
- Base: G9
- Warm White



3w 230Lm LED G9


230 lm
3w

SG9 3W LED-WW

G9

Colour Temp
2700k

- Power: 3w
- Lumen: 230Lm
- 3 Yr. Guarantee
- Beam Angle: 230˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 240V AC
- Base: G9
- Warm White




2w 150Lm LED G4

150 lm
2w

SG4 12V 1.5W LED-WW

G4

- Power: 2w
- Lumen: 150Lm
- 2 Yr. Guarantee
- Beam Angle: 230˚
- Lamp Life: 15,000 Hrs.
- Input Voltage: 12V
- Base: G9 2W LED
- Warm White



Box Qty
Outer: 100
SG9 2W=100
SG9 3W=100
SG4 2W=500

IP20 · 10000 Switching Cycle · Compatible · LED · Non Dimmable · ErP Compliant · UK CA · CE · RoHS Compliant

320° · 90% Energy Saving · Instant Start · 30000 Life Time · >80 Ra Rendering Index

A G F

Scan for info

3 years Quality Assurance

LED 4.9w Reflective Lamp


SR50 LED-WW / SR50 LED-CW

E14

470 lm
4.9w

- Power: 4.9w
- Lumen: 470Lm
- 3 Yr. Guarantee
- Beam Angle: 120˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base Type: E14
- Warm White/Cool White





LED 8.5w Reflective Lamp


SR63 LED-WW / SR63 LED-CW

E27

806 lm
8.5w

- Power: 8.5w
- Lumen: 806Lm
- 3 Yr. Guarantee
- Beam Angle: 120˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base Type: E27
- Warm White/Cool White





Colour Temp

2700k

6400k

LED 11w Reflective Lamp


SR80 LED-WW / SR80 LED-CW

E27

1055 lm
11w

- Power: 11w
- Lumen: 1055Lm
- 3 Yr. Guarantee
- Beam Angle: 120˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 230V AC
- Base Type: E27
- Warm White/Cool White





Box Qty
Outer: 50
Inner: 20

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A↑G F

IP20 · 10000 Switching Cycle · Compatible · LED · Non Dimmable

120° · 90% Energy Saving · Instant Start · 30000 Life Time · >80 Ra Rendering Index

LED STRIPLIGHT LAMPS

source


310mm 9w LED Striplight Lamp

S19-9W-WW / S19-9W-CW

610 lm 9w WW

680 lm 9w CW

- Power: 9w
- Lumen: 610Lm (WW), 680Lm (CW)
- 3 Yr. Guarantee
- Beam Angle: 300˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 220V - 240V AC
- Size: 310mm x 30mm
- Warm White/Cool White

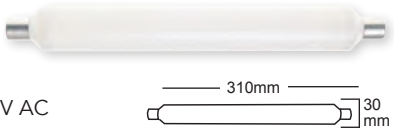

3 years Quality Assurance


248mm 6w LED Striplight Lamp

S15-6W 284-WW / S15-6W 284-CW

450 lm 6w WW

520 lm 6w CW

- Power: 6w
- Lumen: 450Lm (WW), 520Lm (CW)
- 3 Yr. Guarantee
- Beam Angle: 300˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 220V - 240V AC
- Size: 248mm x 26mm
- Warm White/Cool White

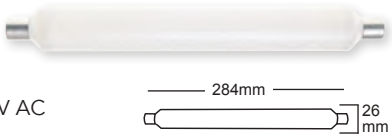

Colour Temp

2700k

6000k


221mm 4w LED Striplight Lamp

S15-4W 221-WW / S15-4W 221-CW

300 lm 4w WW

350 lm 4w CW

- Power: 4w
- Lumen: 300Lm (WW), 350Lm (CW)
- 3 Yr. Guarantee
- Beam Angle: 300˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 220V - 240V AC
- Size: 221mm x 26mm
- Warm White/Cool White

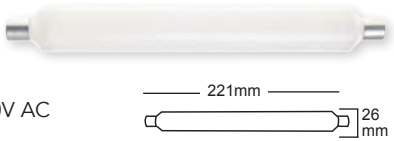

Box Qty Outer: 50

IP44 · 10000 Switching Cycle · Compatible · LED · Non Dimmable · 300° · 90% Energy Saving · Instant Start · 30000 Life Time · >80 Ra Rendering Index

ErP COMPLIANT · UKCA · CE · RoHS COMPLIANT

A G

Scan for info

1200 lm
15w WW

1200 lm
15w CW

3 years Quality Assurance

E27



LED PAR 38 Lamp

Colour Temp


2700k

6500k

SPAR 38 15-WW
IP54 15w PAR 38 Lamp,
Warm White

SPAR 38 15-CW
IP54 15w PAR 38 Lamp,
Cool White

- Power: 15w
- Lumen: 1200Lm
- 3 Yr. Guarantee
- Beam Angle: 300˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 240V AC
- Base Type: E27
- IP Rating: IP54
- Available in Warm/Cool White



Box Qty
Outer: 36

Scan for info

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G

IP54
10000 Switching Cycle
Compatible
LED
Dimmable
300°
** 90% Energy Saving
Instant Start
30000 Life Time
>80 Ra Rendering Index

ARCHITECTURAL LAMP

source

500 lm
5w WW

660 lm
8w WW

3 years Quality Assurance




Twin Peg Architectural Lamp

S14-5W-WW
5w Twin Peg, 300mm, 500Lm

S14-8W-WW
8w Twin Peg, 500mm, 660Lm

- Power: 5w/8w
- Lumen: 500Lm (5w) / 660Lm (8w)
- 3 Yr. Guarantee
- Beam Angle: 300˚
- Lamp Life: 30,000 Hrs.
- Input Voltage: 240V AC
- Base: S14S
- Warm White

Colour Temp
2700k

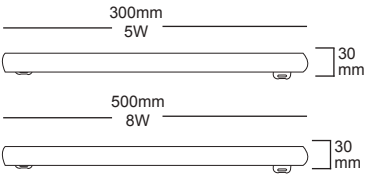

Box Qty
Outer: 50

IP20 · 10000 Switching Cycle · Compatible · LED · Non Dimmable · 300° · 90% Energy Saving · Instant Start · 30000 Life Time · >80 Ra Rendering Index

ErP COMPLIANT · UKCA · CE · RoHS COMPLIANT

A ↑ G

Scan for info

OUTDOOR LIGHTING

LED High CCT Bay Light	Pg 99
LED Multi Watt Floodlight	Pg 101
LED Multi Watt CCT Floodlight	Pg 102
LED Floodlights	Pg 104
LED PIR Floodlights	Pg 105
LED M/W IP66 CCT Corrosion Proof	Pg 106
LED IP65 M/W IP65 Corrosion Proof	Pg 109
LED IP65 Batten	Pg 111
LED CCT Streetlights	Pg 112
LED Poly CCT Bulkheads	Pg 115
LED CCT Multi Watt Bulkheads	Pg 117
LED CCT M/W PIR Sensor Bulkheads	Pg 119
LED CCT M/W Outdoor Bulkheads	Pg 121
LED PIR Bulkheads	Pg 127
LED Outdoor Bulkheads	Pg 129
Outdoor Bulkhead Fittings	Pg 130
LED Outdoor Sign Light	Pg 133
LED IP65 110v Integrated Festoon	Pg 135



LED MULTI WATT CCT
HIGH BAY PG 99



LED MULTI WATT CCT
FLOODLIGHT PG 101



LED CCT MULTI WATT IP66
CORROSION PROOF PG 106



LED CCT STREETLIGHTS
PG 112



LED CCT M/W PIR
BULKHEADS PG 119



LED CCT MULTI WATT
BULKHEAD PG 121



LED CCT MULTI WATT
SLIM BULKHEAD PG 126



LED OUTDOOR
SIGN LIGHT PG 133



LED MULTI WATT CCT HIGH BAY

source

160 Lm/W

IP65


32000 lm 200w

24000 lm 150w

16000 lm 100w







5 years Quality Assurance

Multi Watt

200w

150w

100w

LED Multi Watt CCT High Bay

SHBMW
LED Multi Watt CCT
High Bay Light

SHBSENS
Microwave Sensor for
High Bay Light

RC-HB
Remote Control

- Multi Watt: 100w, 150w, 200w
- 160Lm/W
- Beam Angle 120°
- CCT: 4000k, 5000k, 6000k
- <Ra80
- 5 yr Guarantee
- Input Voltage: 100-240V 50/60Hz
- Lamp Life: 50,000 hrs
- Mounting bracket & hook included
- Dimmable (with sensor only)
- Supplied with 2m Cable
- Remote Control (sold separately)
- Microwave sensor attachment (sold separately)
- Sensor Range: Max 12M
- Bi-Level dimming, daylight threshold and dusk/dawn function.
- Standby dimming level is on 10%/20%/30%
- Daylight threshold is on 30Lux/50Lux, 80Lux/120Lux
- Working temperature: -20°C~+60°C

CCT Switch

4000k

5000k


6000k



Microwave Sensor (SHBSENS)



Remote Control (RC-HB)



Outer Box 1

50000 Life Time

10000 Switching Cycle

Compatible

Microwave sensor

120°

Flicker Free

90% Energy Saving

Instant Start

IK 08

>80 Ra Rendering Index

ErP COMPLIANT

UK CA

CE

RoHS COMPLIANT

A G D

Scan for info





IP65

160 Lm/W

32000 lm 200w

24000 lm 150w

16000 lm 100w

5 years Quality Assurance

Multi Watt

200w

150w

100w

CCT Switch

4000k

5000k

6000k


LED Multi Watt CCT Emergency High Bay

SHBMW-EM
LED Multi Watt CCT Emergency High Bay

- Multi Watt: 100w, 150w, 200w
- Lumen in Emergency Mode: 1500Lm
- Beam Angle 120°
- CCT: 4000k, 5000k, 6000k
- <Ra80
- 5 yr Guarantee
- Input Voltage: 100-240V 50/60Hz
- Lamp Life: 50,000 hrs
- Mounting bracket & hook included
- Supplied with 2m Cable
- Battery Type: 6.4V LiFeP04 6000mAh 10W Emergency Pack
- Battery: 3 Hour Emergency Operation
- Battery Charge Time: 24 Hrs
- Battery Life Time: 50,000 Hrs
- Battery: 3 Yr Guarantee
- Battery Storage: -20°C to +40°C



Emergency Battery



Battery Dimensions

Outer Box 1

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A ↑ G D

50000 Life Time

10000 Switching Cycle

Compatible

LED

120°

Flicker Free

** 90% Energy Saving

Instant Start

IK 08

>80 Ra Rendering Index

LED MULTI WATT FLOODLIGHT

source

130 Lm/W

IP65

26000 lm 200w

19500 lm 150w

13000 lm 100w





5 years Quality Assurance

Multi Watt

200w

150w

100w


Colour Temp


4000k


LED Multi Watt Floodlight 200/150/100w

SFLMW
LED Multi Watt Floodlight

- Multi Watt: 200w, 150w, 100w
- 130Lm/W
- Colour Temp: 4000k
- IP Rating: IP65
- >Ra80
- 5 yr Guarantee
- Input Voltage: 100-240V 50/60Hz
- Mounting Bracket Included
- Aluminium die-casting, stainless steel screws
- Black Housing

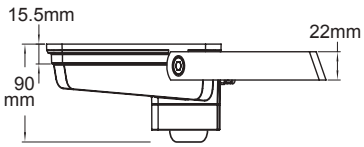

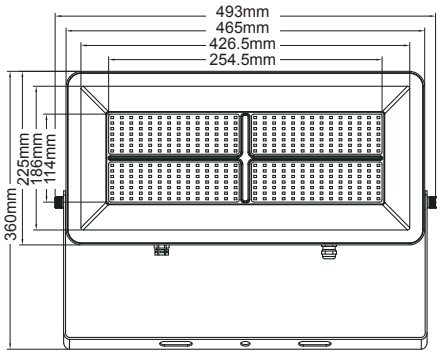



Outer Box 2

50000 Life Time

10000 Switching Cycle

Compatible

LED

120°

Flicker Free

** 90% Energy Saving

Instant Start

IK 08

>80 Ra Rendering Index

ErP COMPLIANT

UK CA

CE

RoHS COMPLIANT

A G E

Scan for info

5 years Quality Assurance

IP65

120 Lm/W

12000 lm 100w

8400 lm 70w

6000 lm 50w





Multi Watt

100w

70w

50w

CCT Switch

3000k

4000k

5000k


LED Multi Watt Floodlight 100/70/50w


SFL 50W-70W-100W BL
LED Multi Watt CCT
Black Floodlight

SFL 50W-70W-100W WH
LED Multi Watt CCT
White Floodlight

- Multi Watt: 50w, 70w, 100w
- 120Lm/W
- CCT: 3000k, 4000k, 5000k
- IP Rating: IP65
- Quick install bracket supplied
- 5 yr Guarantee
- 1 metre Cable supplied
- Voltage: 220-240v

Luminous Intensity Distribution Diagram 4000k

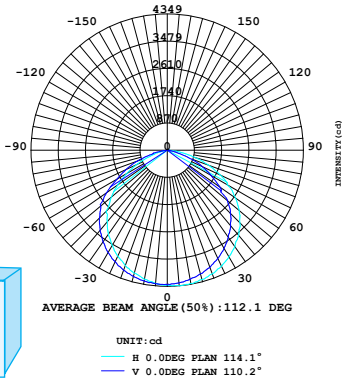

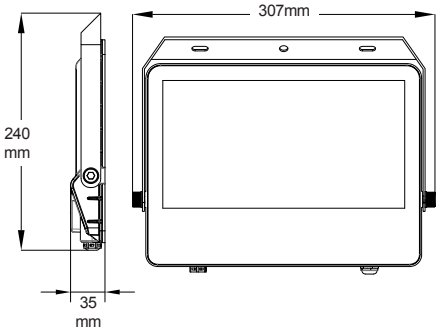

Outer Box 50/70/100 =10

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A↑G E

50000 Life Time · 10000 Switching Cycle · Compatible · LED · 110° · Flicker Free · 90% Energy Saving · Instant Start · IK 06 · >80 Ra Rendering Index

LED MULTI WATT CCT FLOODLIGHT


120 Lm/W

IP65

6000 lm 50w

3600 lm 30w





5 years Quality Assurance

Multi Watt
50w
30w

LED Multi Watt CCT Floodlight 50/30w

SFL 30W-50W BL
LED Multi Watt CCT Floodlight
Black Finish

SFL 30W-50W WH
LED Multi Watt CCT Floodlight
White Finish


- Multi Watt: 50w, 30w
- 120Lm/W
- CCT: 3000k, 4000k, 5000k
- IP Rating: IP65
- Quick install bracket supplied
- 1 metre Cable supplied
- Voltage: 220-240v

CCT Switch
3000k
4000k
5000k

2400 lm 20w

1200 lm 10w





Multi Watt
20w
10w

LED Multi Watt CCT Floodlight 20/10w

SFL 10W-20W BL
LED Multi Watt CCT Floodlight
Black Finish

SFL 10W-20W WH
LED Multi Watt CCT Floodlight
White Finish

- Multi Watt: 20w, 10w
- 120Lm/W
- CCT: 3000k, 4000k, 5000k
- IP Rating: IP65
- Quick install bracket supplied
- 1 metre Cable supplied
- Voltage: 220-240v

Outer Box
10/20w=40
30/50w=20

50000 Life Time
10000 Switching Cycle
Compatible
LED
110°
Flicker Free
** 90% Energy Saving
Instant Start
IK 06
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G E

Scan for info

5 years Quality Assurance



IP65

4500 lm 50w

2700 lm 30w

1800 lm 20w

900 lm 10w

2000 lm 18w

Wattage	Size
10W	93 x 124.5 x 27.5mm
20W	109 x 147 x 32.5mm
30W	148 x 208 x 39mm
50W	177.5 x 243 x 47mm

LED Floodlight Range

Colour Temp

4000k

SFD 10W BL
LED 10w Black Floodlight, 900Lm

SFD 10W WH
LED 10w White Floodlight, 900Lm

SFD 20W BL
LED 20w Black Floodlight, 1800Lm

SFD 20W WH
LED 20w White Floodlight, 1800Lm


SFD 30W BL
LED 30w Black Floodlight, 2700Lm

SFD 30W WH
LED 30w White Floodlight, 2700Lm

SFD 50W BL
LED 50w Black Floodlight, 4500Lm

SFD 50W WH
LED 50w White Floodlight, 4500Lm

- Colour Temp: 4000k
- IP Rating: IP65
- 5 yr Guarantee
- Lamp Life: 30,000 Hrs
- Working Voltage: AC175~265v
- Operating Temperature: -35~50°C
- Supplied with 1M cable
- Available in Black or White
- Quick fix bracket can be mounted without removing fixture



Quick Fix Bracket can be mounted without removing fixture

Outer Box
10w = 30
20w = 32
30w = 16
50w = 12

Scan for info

ErP COMPLIANT UKCA CE RoHS COMPLIANT

A ↑ G F

50000 Life Time

10000 Switching Cycle

Compatible

Non Dimmable

** 90% Energy Saving

Instant Start

IK 10

>80 Ra Rendering Index

LED PIR FLOODLIGHTS

source

4500 lm
50w


2700 lm
30w

1800 lm
20w


900 lm
10w

IP65

Remote Control







Quick Fix Bracket can be mounted without removing fixture

5 years Quality Assurance

Wattage	Size
10W	93 x 124.5 x 51mm
20W	109 x 147 x 56.5mm
30W	148 x 208 x 63mm
50W	177.5 x 243 x 70.5mm

LED PIR Floodlight Range

SFD 10W PIR BL
LED 10w PIR Black Floodlight, 900Lm

SFD 10W PIR WH
LED 10w PIR White Floodlight, 900Lm

SFD 20W PIR BL
LED 20w PIR Black Floodlight, 1800Lm

SFD 20W PIR WH
LED 20w PIR White Floodlight, 1800Lm

SFD 30W PIR BL
LED 30w PIR Black Floodlight, 2700Lm

SFD 30W PIR WH
LED 30w PIR White Floodlight, 2700Lm


SFD 50W PIR BL
LED 50w PIR Black Floodlight, 4500Lm

SFD 50W PIR WH
LED 50w PIR White Floodlight, 4500Lm

- Colour Temp: 4000k
- IP Rating: IP65
- Remote Controlled
- Manual Override Function
- On / Off Pir Sensor Fucntion
- Photocell Function 20 lux on 80 Lux off
- Day Mode 24hr Pir Mode
- Dusk Mode
- Adjustable Delay Setting: 15 Sec–30 Min
- Memory Function Pir Floodlight Remembers Last Setting
- Quick fix bracket can be mounted without removing fixture

Colour Temp

4000k

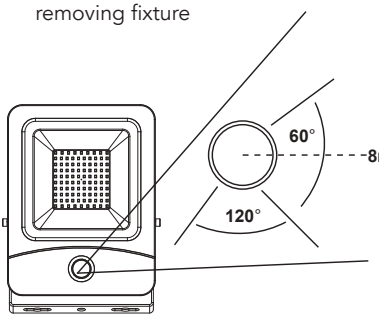

Outer Box
10w = 30
20w = 32
30w = 16
50w = 12

50000 Life Time
10000 Switching Cycle
Compatible
PIR sensor
Non Dimmable
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Photocell Feature
** 90% Energy Saving
Instant Start
IK 08
>80 Ra Rendering Index

A G F

Scan for info

5 years Quality Assurance

IP66

160 Lm/W

12800 lm 80w

9600 lm 60w



Multi Watt

80w
70w
60w
50w

6ft

60w
52w
43w
34w

5ft

CCT Switch

4000k
5000k
6000k

LED Multi Watt CCT IP66 Corrosion Proof

SCPFTMW-CCT-EM
LED M/W CCT 5ft Emergency Corrosion Proof

SCPMW-CCT-SENEM
LED M/W CCT 5ft Emergency Sensor Corrosion Proof


SCPMW-CCT-SEN
LED M/W CCT 5ft Emergency Sensor Corrosion Proof

SCP6FTMW-CCT-EM
LED M/W CCT 6ft Emergency Corrosion Proof

- Slimline Corrosion Proof
- Multi Watt
- 160Lm/W
- CCT: 4000k, 5000k, 6000k
- Ra>80
- SS Clips
- SMD 2835
- IP Rating: IP66
- Input Voltage: 220-240v, 50Hz
- Commercial/Domestic Application
- Operating Temp: -20°C~+50°C
- Battery Type: LiFeP04 6.4V 2000mAh
- Battery 3 yr Warranty
- 3hr maintained emergency back up
- Transmitting power: <0.5mW
- Power Consumption: ≤0.5mW(standby)
  <1W(operation)
- Detection angle: 150˚ (Wall Installation)
  360˚ (Ceiling Installation)
- Detection zone: Max(D x H):12m x 6m
- Detection sensitivity: 10%/ 25%/50% /75%/100%



Outer Box
6ft = 6
5ft = 6



Scan for info

ErP COMPLIANT · UKCA · CE · RoHS COMPLIANT

A ↑ G D

50000 Life Time · 10000 Switching Cycle · Compatible · 120° · Flicker Free · ** 90% Energy Saving · Instant Start · IK 08 · >80 Ra Rendering Index

LED MULTI WATT CCT IP66 CORROSION PROOF

source

160 Lm/W

IP66



5 years Quality Assurance

12800 lm 80w

9600 lm 60w

4800 lm 40w

2400 lm 20w

DALI 2

60w Dali Driver available

CCT Switch

4000k

5000k

6000k

Multi Watt

80w 70w 60w 50w — 6ft

60w 52w 43w 34w — 5ft

40w 34w 28w 22w — 4ft

20w 18w 15w 11w — 2ft

LED Multi Watt CCT IP66 Corrosion Proof


SCPMW-CCT
LED M/W CCT 5ft Corrosion Proof

SCP2FTMW-CCT
LED M/W CCT 2ft Corrosion Proof

SCP4FTMW-CCT
LED M/W CCT 4ft Corrosion Proof

SCP6FTMW-CCT
LED M/W CCT 6ft Corrosion Proof

- Slimline Corrosion Proof
- Sizes: 2ft, 4ft, 5ft, 6ft
- Multi Watt
- 160Lm/W
- CCT: 4000k, 5000k, 6000k
- Ra>80
- SS Clips
- SMD 2835
- IP Rating: IP66
- 5 yr Guarantee
- Beam Angle: 110°
- Lamp Life: 50,000 hrs
- Input Voltage: 220-240v, 50Hz
- Commercial/Domestic Application
- Operating Temp: -20°C~+50°C

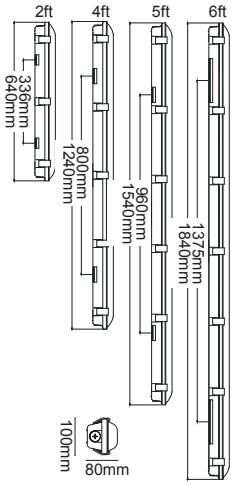

S DALI DR
60w DALI LED Driver with prewired terminal block available.



Outer Box
6ft = 6
5ft = 6
4ft = 6
2ft = 8

50000 Life Time

10000 Switching Cycle

Compatible

120°

ErP COMPLIANT

UK CA

CE

RoHS COMPLIANT

Flicker Free

** 90% Energy Saving


Instant Start

IK 08

>80 Ra Rendering Index

A ↑ G D

Scan for info

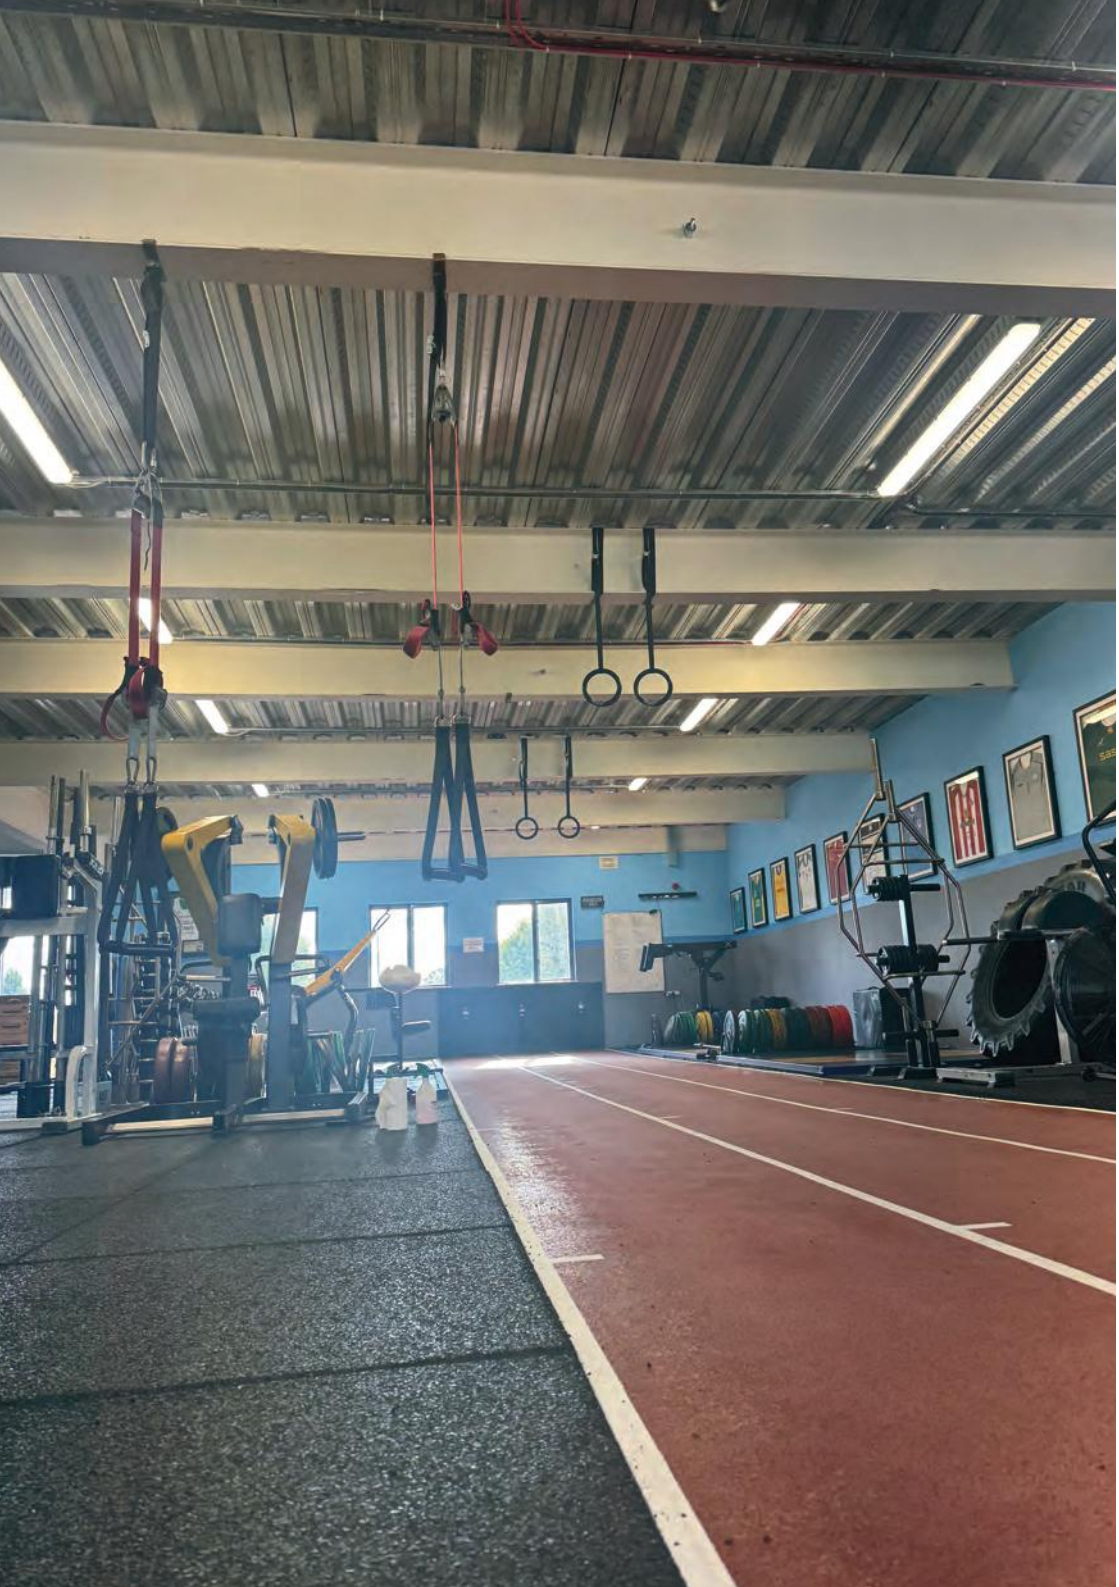

LED TWIN SS CLIPS MW CCT CORROSION PROOF

source

150 Lm/W

IP65

8250 lm 55w

6900 lm 46w

5700 lm 38w

4500 lm 30w



seai SUSTAINABLE ENERGY AUTHORITY OF IRELAND
LIG84870

5 years Quality Assurance

DALI 2
60w Dali Driver available

Multi Watt
55w
46w
38w
30w
5ft

LED IP65 Multi Watt CCT Corrosion Proof

S55WTW5FT
LED Multi Watt CCT 5ft Corrosion Proof

S55WTW5FT-EM
LED Multi Watt CCT 5ft Emergency Corrosion Proof

S55W M SENS
LED Multi Watt CCT 5ft Sensor Corrosion Proof


S55W EME M SENS
LED Multi Watt CCT 5ft Emergency Sensor Corrosion Proof

S DALI DR
60w DALI LED Driver with prewired terminal block available seperately

- Traditional Wide Body Corrosion Proof
- Multi Watt
- 150Lm/W
- CCT: 4000k, 5000k, 6500k
- IP Rating: IP65
- Input Voltage: 220v-240v AC, 50Hz
- Lamp Life: 50,000 hrs
- C/w with stainless steel clips and mounting brackets
- Hinged diffuser and tray
- Gland entry points at both ends
- Impact rating IK08
- Operating Temp: -30°C~50°C
- 3hr maintained emergency back up
- Transmitting power: <0.5mW
- Power Consumption: ≤0.5mW(standby) <1W(operation)
- Detection Angle:150°(Wall mounted) 360°(Ceiling mounted)
- Detection zone: Max(D x H):12m x 6m
- Detection sensitivity: 10%/ 25%/50% /75%/100%

CCT Switch
4000k
5000k
6500k





Outer Box 6

50000 Life Time
10000 Switching Cycle
Compatible
120°
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
IK 08
>80 Ra Rendering Index

A G D

Scan for info

5 years Quality Assurance

IP65

150 Lm/W





Multi Watt

5ft: 35w, 30w, 25w, 20w

4ft: 46w, 39w, 32w, 26w

2ft: 22w, 18w, 15w, 12w

CCT Switch

4000k

5000k

6500k

7000 lm 70w

6900 lm 46w

5400 lm 35w

1800 lm 22w

LED IP65 Multi Watt CCT Corrosion Proof


S22WTW2FT
LED Multi Watt CCT 2ft
Twin SS Clips Corrosion Proof

S46WTW4FT
LED Multi Watt CCT 4ft
Twin SS Clips Corrosion Proof

S35WSIN5FT
LED Multi Watt CCT 5ft
Twin SS Clips Corrosion Proof

S70WTW6FT
LED 6ft 4000k Twin SS Clips
Corrosion Proof

- Traditional Wide Body Corrosion Proof
- Multi Watt
- 150Lm/W
- CCT: 4000k, 5000k, 6500k
- IP Rating: IP65
- Input Voltage: 220v-240v AC
- Lamp Life: 50,000 hrs
- C/w with stainless steel clips and mounting brackets
- Hinged diffuser and tray
- Gland entry points at both ends
- Impact rating IK08

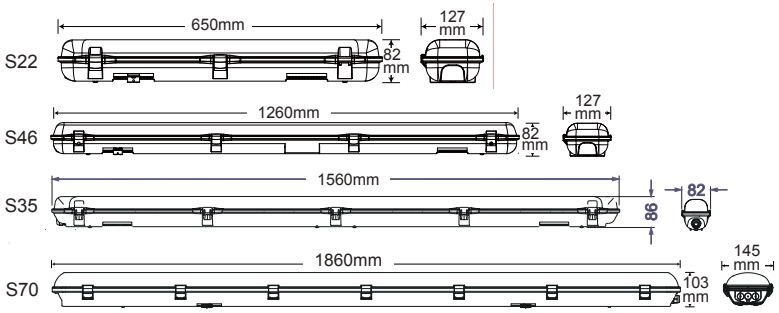

Outer Box
70w 6ft = 4
35w 5ft = 9
46w 4ft = 6
22w 2ft = 9

Scan for info

ErP COMPLIANT · UKCA · CE · RoHS COMPLIANT

A ↑ G E

50000 Life Time · 10000 Switching Cycle · Compatible · 120° · Flicker Free · 90% Energy Saving · Instant Start · IK 08 · >80 Ra Rendering Index

LED IP65 BATTEN

source

4100 lm
45w

IP65

3 years Quality Assurance



Colour Temp


4000k

LED IP65 Batten


S65BAT 5FT
LED IP65 Batten

- Power: 45w
- Lumen: 4100Lm
- Colour Temp: 4000K
- 3 yr Guarantee
- Beam Angle: 120˚
- IP Rating IP65
- Input Voltage: 220-240v
- Frequency 50Hz
- Flicker Free
- Glanded at both ends

Luminous Intensity Distribution Diagram

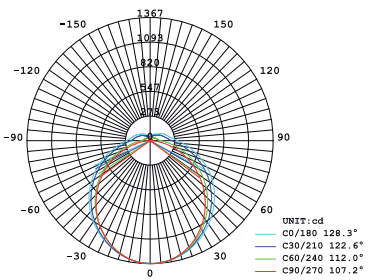

Average Beam Angle (50%): 117.5 DEG



Outer Box 32

50000 Life Time
10000 Switching Cycle
Compatible
LED
Class II
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
IK 10
>80 Ra Rendering Index


A G

Scan for info

IP65

5000 lm
50w

3 years Quality Assurance

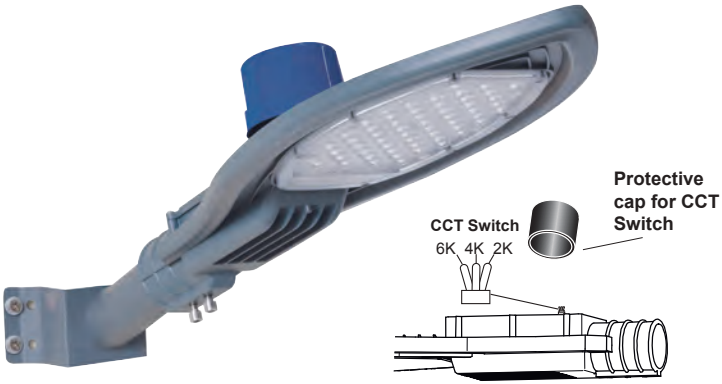

CCT Switch


2000k
4000k
6000k

LED CCT 50w Streetlight


STL-50W PC CCT
LED CCT 50w Streetlight

- Power: 50w
- Lumen: 5000Lm
- CCT: 2000k, 4000k, 6000k
- Complete with Photocell & Nema socket
- IP Rating: IP65
- Closed Circuit Cap
- Lamp type: 50W LED
- Lamp Life: 50,000 hrs
- Voltage: AC 100/277V
- Beam Angle: 120° x 60°
- Complete with Wall/Corner Bracket
- RAL Colour: 7003 (Grey)
- Accessories:
  S50W SPIG - Spiggott Attachment
  S50WOR - 90° Outreach Bracket Attachment

Luminous Intensity Distribution Diagram



Outer Box
4



Scan for info

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G E

50000 Life Time
10000 Switching Cycle
Compatible
Photocell Feature
120°x60°
Flicker Free
** 90% Energy Saving
Instant Start
IK 08
>80 Ra Rendering Index

LED CCT 100W STREETLIGHT

10000 lm
100w

IP65

3 years Quality Assurance




CCT Switch
2000k
4000k
6000k


LED CCT 100w Streetlight

STL-100W PC CCT
LED CCT 100w Streetlight

- Power: 100w
- Lumen: 10000Lm
- CCT: 2000k, 4000k, 6000k
- Complete with Photocell & Nema socket
- IP Rating: IP65
- Closed Circuit Cap
- Lamp type: 100W LED
- Lamp Life: 50,000 hrs
- Voltage: AC 100/277V
- Beam Angle: 120° x 60°
- Complete with Wall/Corner Bracket
- RAL Colour: 7003 (Grey)
- Accessories:
  S100W SPIG - Spiggott Attachment
  S100WOR - 90° Outreach Bracket Attachment

Luminous Intensity Distribution Diagram





Outer Box 4

50000 Life Time
10000 Switching Cycle
Compatible
Photocell Feature
120°x60°
Flicker Free
** 90% Energy Saving
Instant Start
IK 08
>80 Ra Rendering Index


ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G E


Scan for info

IP65 IK 08

3 years Quality Assurance

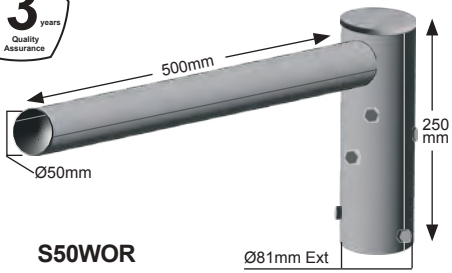

S50WOR

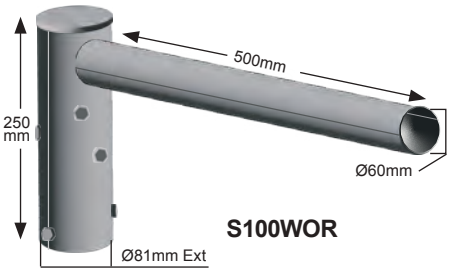

S100WOR


90° Outreach Bracket Attachment

S50WOR
90° Outreach Bracket Attachment for STL-50W PC CCT

S100WOR
90° Outreach Bracket Attachment for STL-100W PC CCT



S100W SPIG

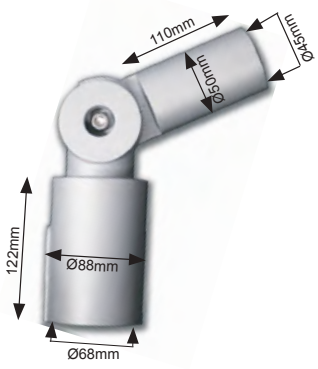

S50W SPIG

Spiggot Attachment

S50W SPIG
Spiggot Attachment for STL-50W PC CCT

S100W SPIG
Spiggot Attachment for STL-100W PC CCT

Outer Box
S50WOR=2
S100WOR=2
SPIGGOTS=10

Scan for info

ErP COMPLIANT UKCA CE RoHS COMPLIANT

POLY LED CCT OVAL BULKHEAD

1000 lm
12w

IP66

3 years Quality Assurance





CCT Switch

2700k
4000k
6400k


Poly LED CCT Oval Bulkhead


SOL CCT BL
Poly LED CCT Oval Bulkhead, Black Trim

SOL CCT WH
Poly LED CCT Oval Bulkhead, White Trim

- Power: 12w
- Lumen: 1000Lm
- CCT: 2700k, 4000K, 6400k
- Lamp life: 30000 Hrs
- 3 Yr. Guarantee
- IP Rating IP66
- Input Voltage: 220/240V
- Eyelid included
- Black or White Trim

Luminous Intensity Distribution Diagram

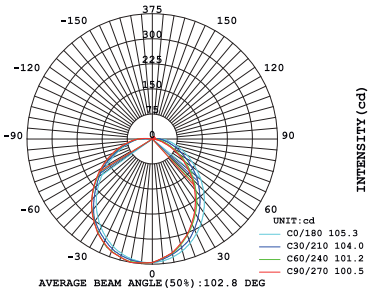



Outer Box 10

30000 Life Time
10000 Switching Cycle
Compatible
Non Dimmable
LED
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
IK 10
>80 Ra Rendering Index

A G F

Scan for info

IP66

1000 lm
12w

3 years Quality Assurance





CCT Switch

2700k
4000k
6400k


Poly LED CCT Round Bulkhead


SROU CCT BL
Poly LED CCT Circular Bulkhead, Black Trim

SROU CCT WH
Poly LED CCT Circular Bulkhead, White Trim

- Power: 12w
- Lumen: 1000Lm
- CCT: 2700k, 4000K, 6400k
- Lamp life: 30000 Hrs
- 3 Yr. Guarantee
- IP Rating IP66
- Input Voltage: 220/240V
- Eyelid included
- Black or White Trim

Luminous Intensity Distribution Diagram

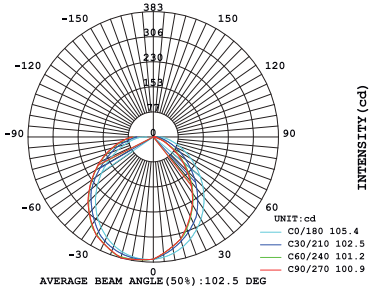



Outer Box 10

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A G F

30000 Life Time · 10000 Switching Cycle · Compatible · Non Dimmable · LED

Flicker Free · 90% Energy Saving · Instant Start · IK 10 · >80 Ra Rendering Index

LED MULTI WATT CCT OVAL BULKHEAD

source

110 Lm/W

IP65



3 years Quality Assurance

1100 lm 9w

1500 lm 12w

2000 lm 18w

Multi Watt

9w
12w
18w

LED Multi Watt CCT Oval Bulkhead

SOVLED BL/WH CCT
LED Multi Watt CCT Oval Bulkhead


SOV BL EYE
Black Eyelid for SOVLED BL/WH CCT


SOV WH EYE
White Eyelid for SOVLED BL/WH CCT

- Multi Watt: 9w, 12w, 18w
- 110Lm/W
- Beam Angle 115°
- 3 Yr Guarantee
- CCT: 3000k, 4000k, 6500k
- IP Rating: IP65 (Suitable for Bathrooms)
- Input Voltage: 220v-240v AC
- Lamp Life: 50,000 hrs
- Supplied with Black and White Trim
- Black and White Eyelids Available


CCT Switch

3000k
4000k
6500k



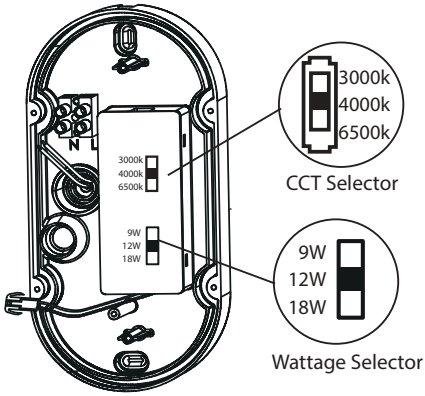

Luminous Intensity Distribution Diagram



Outer Box 20

50000 Life Time
10000 Switching Cycle
Compatible
LED
F
Flicker Free
** 90% Energy Saving
Instant Start
IK 10
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G E

Scan for info

LED MULTI WATT CCT ROUND BULKHEAD



IP65

110 Lm/W

1100 lm 9w

1500 lm 12w

2000 lm 18w

3 years Quality Assurance

Multi Watt

9w

12w

18w

CCT Switch

3000k

4000k

6500k

LED Multi Watt CCT Round Bulkhead

SCIRLED BL/WH CCT
LED Multi Watt CCT Round Bulkhead, Black and White Trim supplied


SCIR BL EYE
Black Eyelid for SCIRLED BL/WH CCT

SCIR WH EYE
White Eyelid for SCIRLED BL/WH CCT


- Multi Watt: 9w, 12w, 18w
- 110Lm/W
- Beam Angle 115°
- CCT: 3000k, 4000k, 6500k
- IP Rating: IP65
- 3 yr Guarantee
- Input Voltage: 220v-240v AC
- Lamp Life: 50,000 hrs
- Supplied with Black and White Trims
- Black and White Eyelids Available



depth 55 mm

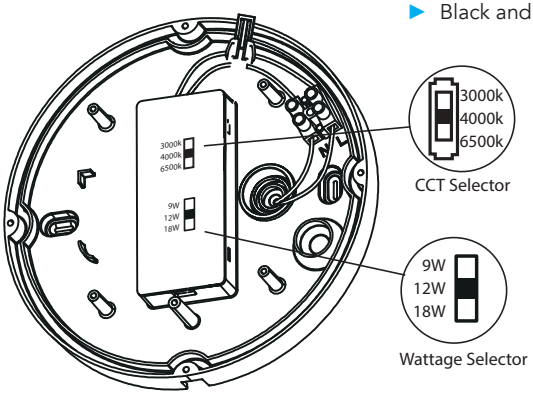

Luminous Intensity Distribution Diagram



Outer Box 20

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A ↑ G E

50000 Life Time · 10000 Switching Cycle · Compatible · LED · F · Flicker Free · 90% Energy Saving · Instant Start · IK 10 · >80 Ra Rendering Index

LED MULTI WATT CCT PIR SENSOR OVAL BULKHEAD

source

110 Lm/W

IP65



3 years Quality Assurance

1100 lm 9w

1500 lm 12w

2000 lm 18w

Multi Watt

9w

12w

18w

CCT Switch


3000k


4000k

6500k

LED Multi Watt CCT PIR Sensor Oval Bulkhead

SOV SEN BL/WH CCT
LED M/W CCT PIR Oval Bulkhead, Black and White Trim supplied





- Multi Watt: 9w, 12w, 18w
- 110Lm/W
- Beam Angle 115°
- CCT: 3000k, 4000k, 6500k
- IP Rating: IP65 (Suitable for Bathrooms)
- 3 yr Guarantee
- Input Voltage: 220v-240v AC
- Lamp Life: 50,000 hrs
- Detection Range: Max 4M
- Detection Angle: 120°
- Time Adjustment:
  Hold time: 5s/90s/5mins/10mins
  Standby period: 0s/10s/15min/+∞
- Ambient Light: Disabled or 25Lux
- Max mounting height: 3M

Outer Box 20

50000 Life Time

10000 Switching Cycle

Compatible

PIR sensor

F

ErP COMPLIANT

UK CA

CE

RoHS COMPLIANT

Flicker Free

** 90% Energy Saving

Instant Start

IK 10

>80 Ra Rendering Index

A G E

Scan for info

IP65

110 Lm/W

1100 lm 9w

1500 lm 12w

2000 lm 18w

3 years Quality Assurance

Multi Watt

9w

12w

18w

CCT Switch

3000k

4000k

6500k







LED Multi Watt CCT PIR Sensor Round Bulkhead

SCIR SEN BL/WH CCT

LED Multi Watt CCT PIR Sensor Round Bulkhead, Black and White Trim supplied





- Multi Watt: 9w, 12w, 18w
- 110Lm/W
- Beam Angle 115°
- CCT: 3000k, 4000k, 6500k
- IP Rating: IP65 (Suitable for Bathrooms)
- 3 yr Guarantee
- Input Voltage: 220v-240v AC
- Lamp Life: 50,000 hrs
- Detection Range: Max 4M
- Detection Angle: 120°
- Time Adjustment:
  Hold time: 5s/90s/5mins/10mins
  Standby period: 0s/10s/15min/+∞
- Ambient Light: Disabled or 25Lux
- Max mounting height: 3M

Outer Box 20

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A G E

50000 Life Time

10000 Switching Cycle

Compatible

PIR sensor

F

Flicker Free

** 90% Energy Saving

Instant Start

IK 10

>80 Ra Rendering Index

LED MULTI WATT CCT OUTDOOR BULKHEAD

source

137 Lm/W

IP65

5 years Quality Assurance

3300 lm 24w

2700 lm 20w

2300 lm 16w

1700 lm 12w



Multi Watt

24w
20w
16w
12w

CCT Switch

3000k
4000k
6500k


Watt Adjustable LED CCT Wallpack

SWP
LED Multi Watt CCT Wallpack

SWP-PC
LED Multi Watt CCT Wallpack with Photocell

- Multi Watt: 24w, 20w, 16w, 12w
- 137Lm/W
- Beam Angle 105°
- CCT: 3000k, 4000k, 6500k
- IP Rating: IP65
- 5 yr Guarantee
- Input Voltage: 220v-240v~50/60Hz
- Lamp Life: 50,000 hrs
- Operating Temperature: -20°C~+45°C
- Rear, Side & Top Cable/Conduit Entry
- Standard or including Photocell

Photocell Data
Rated Voltage: 5VDC
Power: 0.1W Max
Operation Level: 10-20Lx ON (all types of light)
30-80Lx OFF (Natural Light)

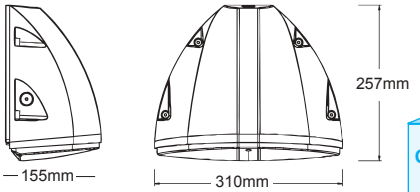

Outer Box 8

50000 Life Time
12500 Switching Cycle
Compatible
105°
Photocell Feature
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
IK 10
>80 Ra Rendering Index
A G E

Scan for info

5 years Quality Assurance

IP65

137 Lm/W

3300 lm 24w

2700 lm 20w

2300 lm 16w

1700 lm 12w

Multi Watt

24w
20w
16w
12w

CCT Switch

3000k
4000k
6500k




Watt Adjustable LED CCT Emergency Wallpack

SWP-EM
LED Multi Watt CCT Emergency Wallpack

SWP-EM PC
LED Multi Watt CCT Emergency Wallpack with Photocell

- Multi Watt: 24w, 20w, 16w, 12w
- 137Lm/W
- Beam Angle 105°
- CCT: 3000k, 4000k, 6500k
- IP Rating: IP65
- 5 yr Guarantee
- Input Voltage: 220v-240v~50/60Hz
- Lamp Life: 50,000 hrs
- Operating Temperature: -20°C~+45°C
- Plug and play Emergency Pack
- Emergency Backup 3 Hours
- Battery Type: LiFeP04 6.4V 1.0Ah
- Rear, Side & Top Cable/Conduit Entry

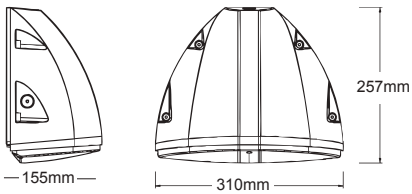

Outer Box 8

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A G E

50000 Life Time · 12500 Switching Cycle · Compatible · 105° · Photocell Feature

Flicker Free · ** 90% Energy Saving · Instant Start · IK 10 · >80 Ra Rendering Index

LED MULTI WATT CCT OUTDOOR BULKHEAD

source

100 Lm/W

IP65



5 years Quality Assurance

3000 lm 30w

2600 lm 26w

2200 lm 22w

1800 lm 18w

Multi Watt

30w
26w
22w
18w

CCT Switch

3000k
4000k
6500k

Watt Adjustable LED CCT Wallpack


BULK LED 30W
LED Multi Watt CCT Wallpack

BULK LED 30W+PC
LED Multi Watt CCT Wallpack with Photocell

- Multi Watt: 30w, 26w, 22w, 18w
- 100Lm/W
- Beam Angle 120°
- CCT: 3000k, 4000k, 6500k
- IP Rating: IP65
- Input Voltage: 220v-240v~50/60Hz
- Lamp Life: 50,000 hrs
- Operating Temperature: -20°C~+45°C
- Rear, Side & Top Cable/Conduit Entry
- Standard or including Photocell

Photocell Data

Rated Voltage: 5VDC
Power: 0.1W Max
Operation Level: 10-20Lx ON (all types of light)
30-80Lx OFF (Natural Light)



Outer Box 10

50000 Life Time
12500 Switching Cycle
Compatible
120°
Photocell Feature
Flicker Free
90% Energy Saving
Instant Start
IK 10
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G E

Scan for info


DRESSING ROOM — 2
TOILETS & REFEREE'S ROOM

LED MULTI WATT CCT OUTDOOR BULKHEAD

source

100 Lm/W

IP65

3000 lm 30w

2600 lm 26w

2200 lm 22w

1800 lm 18w



5 years Quality Assurance

Multi Watt

30w
26w
22w
18w

CCT Switch

3000k
4000k
6500k

Watt Adjustable LED CCT Emergency Wallpack


BULK 30W EMER
LED Multi Watt CCT Emergency Wallpack

BULK 30W PC EMER
LED Multi Watt CCT Emergency Wallpack with Photocell

Photocell Data

Rated Voltage: 5VDC
Power: 0.1W Max
Operation Level: 10-20Lx ON (all types of light)
30-80Lx OFF (Natural Light)

- Multi Watt: 30w, 26w, 22w, 18w
- 100Lm/W
- Beam Angle 120°
- CCT: 3000k, 4000k, 6500k
- IP Rating: IP65
- Input Voltage: 220v-240v~50/60Hz
- Lamp Life: 50,000 hrs
- Operating Temperature: -20°C~+45°C
- Plug and play Emergency Pack
- Emergency Backup 3 Hours
- Battery Type: LiFeP04 6.4V 1.0Ah
- Rear, Side & Top Cable/Conduit Entry



Outer Box 10

50000 Life Time
12500 Switching Cycle
Compatible
120°
Photocell Feature
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
90% Energy Saving
Instant Start
IK 10
>80 Ra Rendering Index

A G E

Scan for info

5 years Quality Assurance



IP65

100 Lm/W

1500 lm 15w

1200 lm 12w

900 lm 9w

Multi Watt

- 5w
- 12w
- 9w

CCT Switch


- 3000k
- 4000k
- 6500k

Watt Adjustable LED CCT Slimline Wallpack

BULK LED 15W
LED Multi Watt CCT Slimline Wallpack

BULK LED 15W+PC
LED Multi Watt CCT Slimline Wallpack with Photocell

- Multi Watt: 15w, 12w, 9w
- 100Lm/W
- CCT: 3000k, 4000k, 6500k
- IP Rating: IP65
- Input Voltage: 220v-240v~50/60Hz
- Lamp Life: 50,000 hrs
- Operating Temperature: -20°C~+45°C
- Rear, Side & Top Cable/Conduit Entry



Photocell Data
Rated Voltage: 5VDC
Power: 0.1W Max
Operation Level: 10-20Lx ON
(all types of light)
30-80Lx OFF (Natural Light)

Outer Box 10

Scan for info

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A↑G E

50000 Life Time · 12500 Switching Cycle · Compatible · 120° · Photocell Feature

Flicker Free · 90% Energy Saving · Instant Start · IK 10 · >80 Ra Rendering Index

LED PIR BULKHEAD

1400 lm
20w

IP65





3 years Quality Assurance

Colour Temp


4000k


Poly LED PIR 20w Bulkhead


SBHOV-BL-PIR
LED IP65 Poly PIR 20w Bulkhead, Black Housing

SBHOV-WH-PIR
LED IP65 Poly PIR 20w Bulkhead, White Housing

- Power: 20w
- Lumen: 1400Lm
- Colour Temp: 4000k
- 3 Yr. Guarantee
- IP Rating: IP65
- Input Voltage: 220v-240v AC
- Frequency: 50/60Hz
- Lifetime: 25,000Hrs
- Detection Range: 10 Metres MAX
- Detection Angle: 120°
- Time Adjustment: 10 sec - 10min
- Ambient Light: 2 Lux to 2000 Lux
- Available in black or white







Outer Box 12

25000 Life Time
12500 Switching Cycle
Compatible
PIR sensor
120°
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

Flicker Free
** 90% Energy Saving
Instant Start
Non Dimmable
>80 Ra Rendering Index

A G F

Scan for info

IP44

800 lm
7w

3 years Quality Assurance



Colour Temp


4000k

LED IP44 7W Drum Bulkhead


S7 CIR
LED IP44 7w Drum Bulkhead
Compact Surface

- Power: 7w
- Lumen: 800Lm
- Colour Temp: 4000k
- Compact Surface
- Beam Angle: 120°
- Lamp Life: 30,000 Hrs
- Lamp Type: 7w 85 SMD
- 3 yr Guarantee
- IP Rating IP44
- Input Voltage: 220-240v
- Polycarbonate body
- Non-Dimmable
- Instant Start

Luminous Intensity Distribution Diagram



AVERAGE BEAM ANGLE(50%):103.7 DEG



Outer Box 20

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A ↑ G F

30000 Life Time · 10000 Switching Cycle · Compatible · LED · 120° · Flicker Free · 90% Energy Saving · Instant Start · Non Dimmable · >80 Ra Rendering Index

LED OUTDOOR BULKHEAD

1180 lm
13w WW

1450 lm
13w CW

IP54

3 years Quality Assurance



LED Outdoor Oval Bulkhead

E13WLED OVAL-BL-WW
LED 13w Black Oval Bulkhead, 2700k - Warm White

E13WLED OVAL-BL-CW
LED 13w Black Oval Bulkhead, 6400k - Cool White

E13WLED OVAL-WH-WW
LED 13w White Oval Bulkhead, 2700k - Warm White


E13WLED OVAL-WH-CW
LED 13w White Oval Bulkhead, 6400k - Cool White

E26EYE-WH
White eyelid attachments for E13WLED OVAL WH

E26EYE-BL
White eyelid attachment for E13WLED OVAL BL

- Power: 13w
- Lumen: 1180Lm WW, 1450Lm CW
- 3 Yr. Guarantee
- IP Rating: IP54
- Lamp Life: 30000 Hrs)
- Input Voltage: 220v-240v AC
- Available in black or white
- Eyelid Attachment available
- Available in Warm/Cool White
- Dual mounting, horizontal or vertical

Colour Temp
2700k
6400k



Outer Box 10

30000 Life Time
10000 Switching Cycle
Compatible
LED
120°
Flicker Free
** 90% Energy Saving
Instant Start
Non Dimmable
>80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G F

Scan for info

IP54

3 years Quality Assurance



Outdoor Oval Bulkhead


E26OVAL-WH
1 x 26w Polycarbonate Bulkhead, White Finish

E26OVAL-BL
1 x 26w Polycarbonate Bulkhead, Black Finish

E26EYE-WH
White eyelid attachments for E26OVAL-WH

E26EYE-BL
White eyelid attachment for E26OVAL-BL

- Power: 1 x 26w Polycarbonate Bulkhead
- 3 yr Guarantee
- IP Rating IP54
- Can be mounted horizontally or vertically
- Available in black or white
- Eyelid Attachment available
- Dual mounting, horizontal or vertical
- G24d-3 Lamp required (not included)
- 240V 26W MAX



Outer Box 10

Scan for info

ErP COMPLIANT UKCA CE RoHS COMPLIANT

OUTDOOR BULKHEAD

IP44

3 years Quality Assurance







Outdoor BC Polycarbonate Bulkhead

ER100B-BL
BC Polycarbonate Bulkhead, Black Finish

ER100B
BC Polycarbonate Bulkhead, White Finish

- Pre wired B22 porcelain lamp holder
- Voltage: 240v
- 3 yr Guarantee
- IP Rating: IP44
- Lamp not included
- Available in black or white





Outer Box 20

Scan for info

IP65

3 years Quality Assurance






Outdoor BC Polycarbonate Bulkhead

S100B-BL
BC Polycarbonate Bulkhead, Black Finish

S100B-WH
BC Polycarbonate Bulkhead, White Finish

- Power: 100w Max
- Pre wired B22 porcelain lamp holder
- 3 yr Guarantee
- IP Rating: IP65
- Fits standard GLS B22 Lamp
- Lamp not included
- Can be mounted horizontally or vertically
- Available in black or white

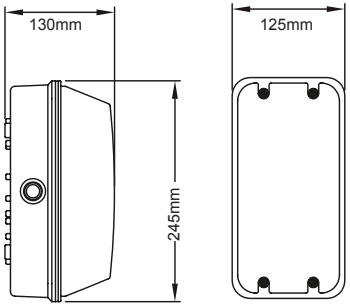

Outer Box 10

Scan for info

LED OUTDOOR SIGN LIGHT

source

2000 lm
20w

IP65



3 years Quality Assurance


Colour Temp

4000k

LED Sign Light

SSL20W
LED Sign Light

- Power: 20w
- Lumen: 2000Lm
- Colour Temp: 4000k
- IP Rating: IP65
- 3 yr Guarantee
- Input Voltage: 230v-240v AC
- Lamp Life: 30,000 hrs
- Supplied with Pre-Wired 1M Cable



Outer Box 10

30000 Life Time
10000 Switching Cycle
Compatible
LED
120°
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
Flicker Free
** 90% Energy Saving
Instant Start
IK 10
>80 Ra Rendering Index

A G F

Scan for info



IP44

650 lm
6.5w

2 years Quality Assurance

LED 110v Integrated Festoon Lights


Colour Temp

6400k

S110V FES 22M
LED 110V Integrated Festoon Light
22 Meters, 10 x SMD Lights

S110V FES 50M
LED 110V Integrated Festoon Light
50 Meters, 20 x SMD Lights

- Power: 6.5W per Lamp
- Lumen: 650Lm per Lamp
- IP Rating IP44
- Colour Temp: 6400k
- Low Heat Output
- Voltage: AC 100-120V, 50/60Hz
- Working Temperature: -15°C~40°C
- Lifetime: 30,000 hrs
- Flicker Free
- Yellow Housing
- Beam Angle: 120°
- Ra: ≥80
- 110v 16A yellow plug and coupler
  IP44 BS EN60309
  50M: H05VVH2-F 2x0.75mm^2 x 50M
  22M: H05VVH2-F 2x0.75mm^2 x 22M
- Cable: 2 x 0.75mm2 which allows
  Max 650w (100 x 6.5w LED Lamps)
- 22M: Max length of linkable
  Festoon must not exceed 220M
  (10 x 22M festoon)
  50M: Max length of linkable
  Festoon must not exceed 250M
  (5 x 50M festoon)



Outer Box
4

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

A G E

30000 Life Time · 10000 Switching Cycle · Compatible · Non Dimmable · Class II

Flicker Free · **90% Energy Saving · Instant Start · LED · >80 Ra Rendering Index



GARDEN LIGHTING

Vintage Frame Wall Lights	Pg 138
Vintage Frame PIR Wall Light	Pg 139
Vintage Frame Up/Down Wall Light	Pg 140
GU10 Up/Down Wall Lights	Pg 141
GU10 Up/Down PIR Wall Lights	Pg 142
LED CCT Aluminium Wall Light	Pg 144
5M Festoon Lighting Set	Pg 149
LED Solar Sensor Wall Lights	Pg 150
LED Solar PIR Sensor FloodLights	Pg 151
Bollard Range	Pg 152
GU10 Ground Lights	Pg 154
12V LED Ground Light Kits	Pg 156
LED Spike Spots	Pg 157
LED Ground Lights	Pg 160



VINTAGE FRAME WALL LIGHTS PG 138



GU10 UP/DOWN PIR WALL LIGHTS PG 141



LED CCT ALUMINIUM WALL LIGHTS PG 144



5M FESTOON SET PG 149



LED SOLAR WALL LIGHT PG 150



LED SOLAR PIR FLOOD LIGHTS PG 151



GU10 GROUND LIGHTS PG 154



LED COLOUR CHOICE MINI DECK LIGHT PG 162

VINTAGE FRAMED WALL LIGHT

IP44

3 years Quality Assurance






E27 Wall Light in Black Frame with Glass

EWAL UP
E27 Wall Light in Black Iron Frame with Temper Glass

- E27 Base
- Max: 60w
- Size: 100 x 150 x 260mm
- Class I
- IP Rating IP44
- Input Voltage: 220/240v AC
- Indoor or Outdoor Use

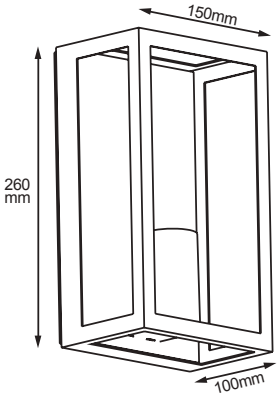

Outer Box 10

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

VINTAGE FRAMED WALL LIGHT

IP44

PIR Sensor




3 years Quality Assurance



E27 PIR Wall Light in Black Frame with Glass

EWAL UP-PIR
PIR E27 Wall Light in Black Iron Frame with Temper Glass

- E27 Base
- Max: 60w
- Size: 100 x 170 x 290mm
- Class I
- IP Rating IP44
- Input Voltage: 220/240v AC
- Detection Range: 2 - 8M
- Indoor or Outdoor Use

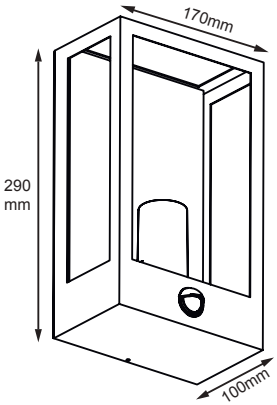

Outer Box 10

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

IP44

3 years Quality Assurance






E27 Up/Down Wall Light in Black Frame with Glass

EWAL UP-DN
E27 Up/Down Wall Light in Black Iron Frame with Temper Glass

- E27 Base
- Max: 2 x 60w
- Size: 100 x 145 x 370mm
- Class I
- IP Rating IP44
- Input Voltage: 220/240v AC
- Indoor or Outdoor Use

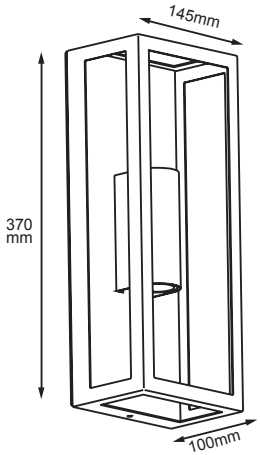

Outer Box 5

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

GU10 UP/DOWN WALL LIGHT

IP44





3 years Quality Assurance




GU10 Up/Down Wall Lights

ECH-UP/DN
GU10 Up/Down Wall Light
Stainless Steel

EBL-UP/DN
GU10 Up/Down Wall Light
Black Finish

- Power: GU10 Max 2 x 35w
- 3 Yr Guarantee
- IP Rating IP44
- Class I
- Input Voltage: 100/240v AC
- Indoor or Outdoor Use



Outer Box 20

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

GU10 UP/DOWN WALL LIGHT

3 years Quality Assurance

PIR Sensor

IP44






GU10 Up/Down PIR Wall Lights

ECH-UP/DN-PIR
GU10 Up/Down PIR Wall Light, Stainless Steel

EBL-UP/DN-PIR
GU10 Up/Down PIR Wall Light, Black Finish

- Power: GU10 Max 2 x 7w
- Glass Diffuser
- Class I
- IP Rating IP44
- Detection Range: 3M
- Input Voltage: 100/240v AC
- Size: 108 x 68 x 212mm
- Available in Black or Stainless Steel

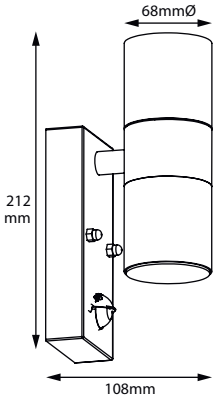

Outer Box 20

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info


GU10 WALL LIGHT

IP44

3 years Quality Assurance








GU10 Down Wall Lights

ECH-DN
GU10 Down Wall Light
Stainless Steel

EBL-DN
GU10 Down Wall Light
Black Finish

- Power: GU10 Max 35w
- 3 Yr Guarantee
- IP Rating IP44
- Class I
- Input Voltage: 100/240v AC
- Size: 96 x 60 x 105mm
- Available in Black or Stainless Steel




Outer Box 20

Scan for info

IP54

520 lm
6w

3 years Quality Assurance






CCT Switch


3000k
4000k
5000k

LED CCT 6w Aluminium Down Wall Light

ESLIM
LED 6w CCT Aluminium Wall Light

- Power: 6w SMD LED
- Lumen: 520Lm
- CCT: 3000k, 4000k, 5000k
- IP Rating: IP54
- Beam Angle: 150°
- Input Voltage: 100/240v AC
- Class 1
- Aluminium and Acrylic Housing
- Grey Finish (RAL7040)

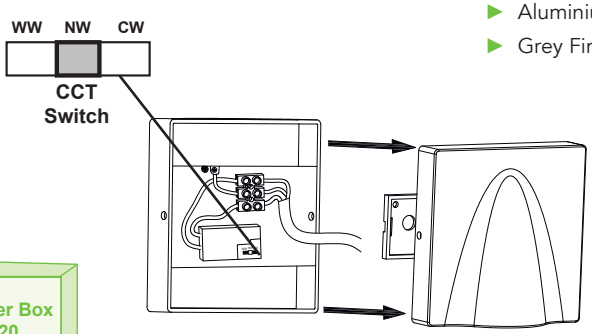



Outer Box 20

Scan for info

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G F

30000 Life Time
10000 Switching Cycle
Compatible
Non Dimmable
LED
150°
** 90% Energy Saving
Instant Start
IK 03
>80 Ra Rendering Index

LED CCT ALUMINIUM WALL LIGHT

eclipse

375 lm
6w

IP54

3 years Quality Assurance






CCT Switch


3000k
4000k
5000k

LED 6w CCT Aluminium Wall Light

ECAVE
LED 6w CCT Aluminium Wall Light

- Power: 6w COB LED
- Lumen: 375Lm
- CCT: 3000k, 4000k, 5000k
- 3 Yr Guarantee
- IP Rating IP54
- Beam Angle: 120°
- Input Voltage: 100/240v AC
- Class 1
- Grey Housing



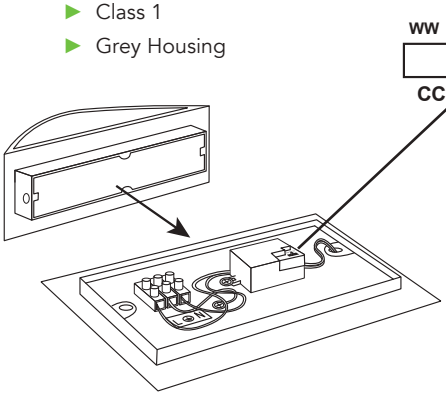

Outer Box 20

30000 Life Time
10000 Switching Cycle
Compatible
Non Dimmable
LED
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

120°
** 90% Energy Saving
Instant Start
IK 09
>80 Ra Rendering Index

A G

Scan for info

IP54

635 lm
12w

3 years Quality Assurance





CCT Switch

3000k
4000k
5000k


LED CCT 2 x 6w Aluminium Up/Down Wall Light


SLIM-UP/DN
LED 2 x 6w Aluminium Up/Down Wall Light, Grey (RAL7040)


SLIM-UP/DN-WH
LED 2 x 6w Aluminium Up/Down Wall Light, White Finish

SLIM-UP/DN-BL
LED 2 x 6w Aluminium Up/Down Wall Light, Black Finish

- Power: 2 x 6w SMD LED
- Lumen: 635Lm
- CCT: 3000k, 4000k, 5000k
- IP Rating: IP54
- Beam angle: 150°
- Input voltage: 100/240v AC
- Class 1
- Aluminium and glass housing
- Black, white or grey finish (RAL7040)



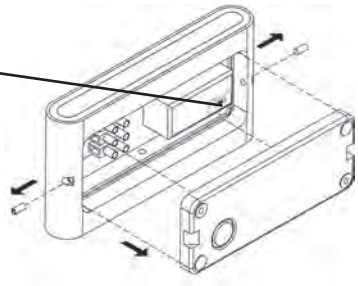



Outer Box 20

Scan for info

ErP COMPLIANT · UKCA · CE · RoHS COMPLIANT

A ↑ G

30000 Life Time · 10000 Switching Cycle · Compatible · Non Dimmable · LED

150° · ** 90% Energy Saving · Instant Start · IK 10 · >80 Ra Rendering Index

LED ALUMINIUM WALL LIGHT

eclipse

1050 lm
15w

IP65

3 years Quality Assurance






Colour Temp

4000k

LED 15w Round Wall Light

ECIR
LED 15w Round Wall Light

- Power: 15w
- Lumen: 1050Lm
- 45 LEDs
- Colour Temp: 4000k
- IP Rating: IP65
- Beam angle: 120°
- Input voltage: 220/240v AC
- 50/60Hz
- Class 1
- Grey Housing



Outer Box 6

30000 Life Time
10000 Switching Cycle
Compatible
Non Dimmable
LED
ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT
120°
** 90% Energy Saving
Instant Start
IK 09
>80 Ra Rendering Index

A G

Scan for info


LED ALUMINIUM WALL LIGHT

IP54

1080 lm
9w

3 years Quality Assurance



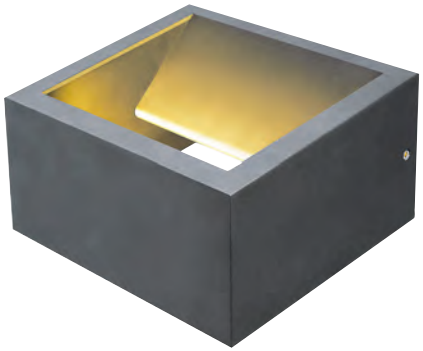


Colour Temp

4000k

LED 9w Aluminium Cube Up/Down Wall Light

ECUBE
LED 9w Aluminium Up/Down Wall Light

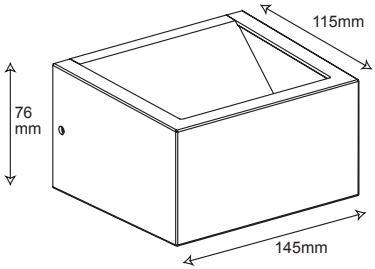

- Power: 9w Max COB LED
- Lumen: 1080Lm
- Colour Temp: 4000k
- IP Rating: IP54
- Beam angle: 120°
- Input Voltage: 220/240v AC
- Class 1
- 3 Yr. Guarantee
- Grey Finish
- Easy Surface Mounted Installation
- Glare Free Vertical Lighting Effect
- High Output LED Chip provides maximum illumination

Outer Box 20

Scan for info

ErP COMPLIANT · UKCA · CE · RoHS COMPLIANT

A G E

30000 Life Time · 10000 Switching Cycle · Compatible · Non Dimmable · LED

120° · ** 90% Energy Saving · Instant Start · IK 04 · >80 Ra Rendering Index


5M FESTOON SET INCLUDING LAMPS

1200 lm
2w

IP44



3 years Quality Assurance



Colour Temp


3000k

5M Festoon Set Including Lamps

SFES5M-PLS
5M Festoon Set Including Lamps

S14E27-WW
Warm White E27 Lamp for SFES5M-PLS

- Power: 2w (Per Lamp)
- Lumen: 1200Lm (Total)
- Colour Temp: 3000k (Warm White)
- IP Rating IP44
- 3 yr Guarantee
- Input Voltage: 240v AC
- Lamp Type: E27 S14
- Supplied with 10 x 2w Warm White Lamps, 1.5mm Power Cable & BS Plug
- Compatible with S14E27-WW Lamps
- Ideal for parties and events
- Indoor or Outdoor Use
- Connects up to 20 Sets (Max 400w)

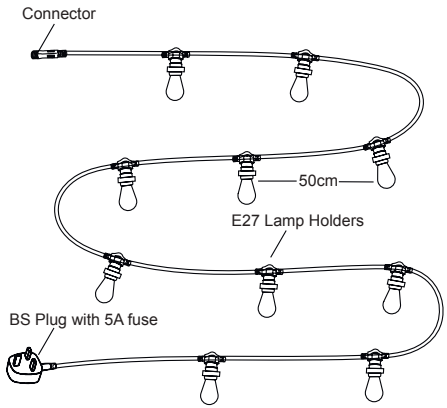

Outer Box 10

30000 Life Time
10000 Switching Cycle
Compatible
Non Dimmable
** 90% Energy Saving
Instant Start
>80 Ra Rendering Index
LED

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A↑G G

Scan for info

2 years Quality Assurance






IP44

230 lm 2.5w

340 lm 3.5w

700 lm 7.5w



Colour Temp

4000k

LED Solar Sensor Wall Lights

ESOL2.5W-WH
LED Solar Sensor 2.5w
Wall Light, White

ESOL2.5W-BL
LED Solar Sensor 2.5w
Wall Light, Black

ESOL3.5W-WH
LED Solar Sensor 3.5w
Wall Light, White

ESOL3.5W-BL
LED Solar Sensor 3.5w
Wall Light, White

ESOL7.5W-WH
LED Solar Sensor 7.5w
Wall Light, White

ESOL7.5W-BL
LED Solar Sensor 7.5w
Wall Light, Black

- Power: 2.5w / 3.5w / 7.5W
- Max Lumen: 230Lm / 340Lm / 700Lm
- Min Lumen: 207Lm / 306Lm / 620Lm
- IP Rating IP44 - Outdoor Use
- Colour Temp: 4000k
- Radar Sensor 0-6M, 120°
- Charging time: 4-6 hrs
- Operating time: 6-8 hrs
- Working Voltage: 6v
- Beam Angle: 100°
- Material: ABS, Lightweight, foldable
- 2.5W - Battery: 1x 3.7v 1500mAh Li-ion
- 3.5W - Battery: 1x 3.7v 1800mAh Li-ion
- 7.5W - Battery: 1x 3.7v 4800mAh Li-ion
- Charging Temp: 0°C~45°C
- Operating Temp: -10°C~55°C
- Black or white finish available

Outer Box 20

Wattage	Dimensions
2.5W	L119 x W93mm
3.5W	L167 x W93mm
7.5W	L219 x W93mm

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A G

Radar Sensor LED Solar Powered Class 3


LED SOLAR PIR SENSOR FLOODLIGHTS

800 lm
8w

1500 lm
12w

IP54



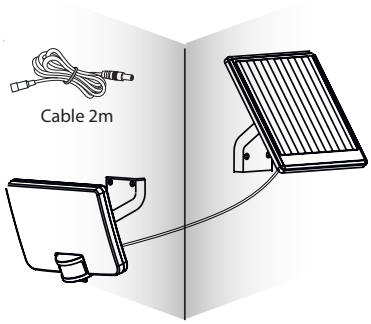

Panel and floodlight can be mounted separately

3 years Quality Assurance

Colour Temp

4000k


Solar PIR Sensor Floodlights

ESOLPIR8W-WH
LED Solar PIR Sensor 8w Floodlight, White

ESOLPIR8W-BL
LED Solar PIR Sensor 8w Floodlight, Black

ESOLPIR12W-WH
LED Solar PIR Sensor 12w Floodlight, White

ESOLPIR12W-BL
LED Solar PIR Sensor 12w Floodlight, Black



- Power: 8w / 12w
- Max Lumen: 800Lm / 1500Lm
- Min Lumen: 40Lm / 70Lm
- IP Rating IP54 - Outdoor Use
- Colour Temp: 4000k
- PIR Sensor 0-8M, 110°
- 15-1000 LUX (adjustable)
- 10-60 SEC (adjustable)
- Recharging Time: 6-8 hrs / 10-12 hrs
- Working Voltage: 3.7v
- Beam Angle: 120°
- Battery: 8W: 18650 1x 3.7v 2000mAh Li-ion
  12W: 18650 1x 3.7v 4000mAh Li-ion
- 2m extension cable included
- The floodlight parts can be mounted seperately
- Black or white finish available

Wattage	Dimensions
8W	178 x 140 x 290mm
12W	178 x 140 x 290mm

Outer Box 8

ErP COMPLIANT · UKCA · CE · RoHS COMPLIANT

PIR Sensor · LED · Solar Powered · Class 3

A↑G G

Scan for info

IP65





E27 Polycarbonate Bollards

SBOL 450
45cm E27 Polycarbonate Bollard

SBOL 750
75cm E27 Polycarbonate Bollard

- Power 60w Max
- E27 Lampholder
- 3 Yr. Guarantee
- IP Rating IP65
- Input Voltage: 220v
- Class II
- Polycarbonate Finish
- Available in 45cm and 75cm
- Lamp not included

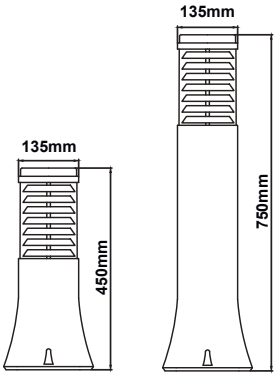



Outer Box 6

Scan for info

LED

Instant Start

Class II

Compatible

IP44


3 years Quality Assurance

110cm & 65cm Stainless Steel Bollards

CB110
110cm Stainless Steel Bollard

CB65
65cm Stainless Steel Bollard

- MAX 100v
- Stainless Steel Housing
- 3 Yr Guarantee
- IP Rating IP44
- Input Voltage: 220v
- Lamp not included

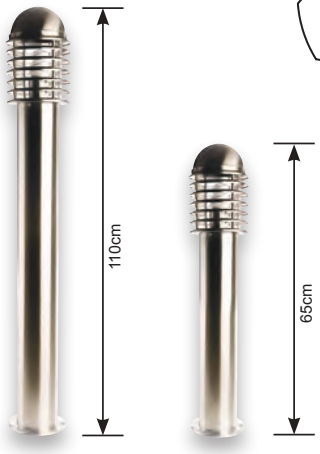


110cm & 65cm Black Housing Bollards

BB110
110cm Black Housing Bollard

BB65
65cm Black Housing Bollard

- MAX 100v
- Black Housing
- 3 Yr Guarantee
- IP Rating IP44
- Input Voltage: 220v
- Lamp not included

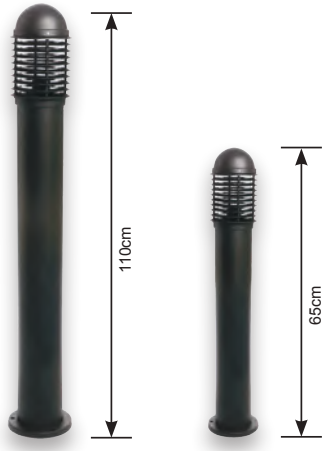

Outer Box
65cm = 4
110cm = 2

ErP COMPLIANT UKCA CE RoHS COMPLIANT


Scan for info


eclipse

3 years Quality Assurance

IP67









GU10 Drive/Walk Over Round Ground Light

3732WALK
GU10 Drive/Walk Over Ground Light

- GU10 50w Max Round Ground Light
- Supplied with Prewired 2m Cable
- 240v/50Hz
- IP Rating IP67
- Supplied with Plastic Sleeve for Installation







GU10 Drive/Walk Over Square Ground Light

3732WALK-SQ
GU10 Drive/Walk Over Ground Light

- GU10 50w Max Square Ground Light
- Supplied with Prewired 2m Cable
- 240v/50Hz
- IP Rating IP67
- Supplied with Plastic Sleeve for Installation

Outer Box 12

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

GU10 GROUND LIGHTS

IP67


3 years Quality Assurance



GU10 Asymmetrical Ground Light

3739
GU10 Asymmetrical Ground Light

- Stainless Steel Cover, Aluminium Body
- 240V GU10 Asymmetrical Fitting
- 3 Yr Guarantee
- IP Rating IP67
- Supplied with Prewired 1m Cable
- Supplied with a Cement Sleeve
- Cutout: 150mm



Outer Box 6


ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

IP67

3 years Quality Assurance





IP67 Mini Ground Light Kit


E1030-WH
30mm 10 x 0.6w IP67 Mini Ground Light Kit, White LED

- 12v DC
- 10 x 0.6W
- IP Rating IP67
- 10 Light Kit
- 1m Cable Supplied
- Long Lifespan: 50000 Hrs
- Cut Out: 21mm

Colour Temp

6500k





IP67 Pencil Ground Light Kit

E10PEN-WH
15mm 10 x 0.4w IP67 Pencil Ground Light Kit, White LED

- 12v DC
- 10 x 0.4W
- IP Rating IP67
- 10 Light Kit
- Ultra Thin 15mm Diameter
- 1m Cable Supplied
- Long Lifespan: 50000 Hrs
- Cut Out: 11mm

Outer Box 10

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A to G

Scan for info

LED SPIKE SPOT

75 lm
1w

IP68



3 years Quality Assurance

Colour Temp


6500k

LED Spike Spot

500.030LED-WH
15 LEDs 240v Wall/Spike Light, White LED

500.030LED-BE
15 LEDs 240v Wall/Spike Light, Blue LED

- Power: 1w
- Lumen: 75Lm
- 15 LEDs
- Prewired 2M cable
- Wall or Spike Mounted
- IP Rating: IP68
- Lifetime: 30,000 Hrs
- Voltage: 240V/50Hz
- Temp: -20°C < to < +40°C
- Suitable for Mounting on Normally Flammable Surfaces
- Available in in Blue or White LED

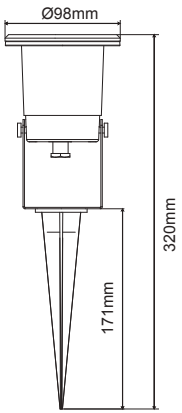

Outer Box 20

30000 Life Time

Compatible

LED

Class II

Instant Start

ErP COMPLIANT

UK CA

CE

RoHS COMPLIANT

A G F

Scan for info

IP68



GU10 Spike Spot Chrome 2M Cable

500.030-CH
GU10 Spike Spot Chrome, 2M Cable


- Max 50W
- 240V/50Hz, GU10
- IP Rating IP68
- Prewired 2M Cable
- Spike or Wall Mounted
- Chrome Housing



GU10 Spike Spot Black 2M Cable

500.030
GU10 Spike Spot Chrome, 2M Cable

- Max 50W
- 240V/50Hz, GU10
- IP Rating IP68
- Prewired 2M Cable
- Spike or Wall Mounted
- Black Housing

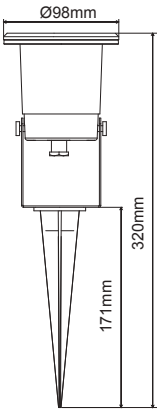


Outer Box 20

Scan for info

POLY GARDEN RANGE

IP44





3 years Quality Assurance

GU10 Spike Spot Black 2M Cable


ESPPVC
GU10 Spike Spot Black, 2M Cable



- Suitable for GU10 LED lamps only (not supplied)
- IP Rating: IP44
- Max 6w
- Pre wired 2m cable
- Wall or Spike mounted
- 240v/50Hz
- Made from polycarbonate material

GU10 LED Polycarbonate Wall Up/Down Light

SPVC UP/DN GU10
GU10 LED Poly Wall Up/Down Light



- Suitable for GU10 LED Lamps only (not supplied)
- 2 x Max 7w
- Black Housing
- Size: W 88mm, 60mmØ H 158mm
- Voltage: 220 / 240V
- IP Rating IP44

Outer Box
SPVC UP/DN 16
ESPPVC 20

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

3 years Quality Assurance

IP67

1.2 lm
1.5w



Colour Temp


6500k

LED Recessed Ground Light

3731-WH
LED Recessed Ground Light, White LED

3731-BL
LED Recessed Ground Light, Blue LED

- Power: 1.2w
- Lumen: 75Lm
- 3 Yr. Guarantee
- IP Rating IP67
- 15 LED included
- Pre-wired 2M cable included
- Voltage 240V
- Available in White or Blue LED



Outer Box 20

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A G F


30000 Life Time
Compatible
LED
Class II
Instant Start

LED 240V IP65 DECK LIGHT

120 lm
0.8w

IP65

3 years Quality Assurance

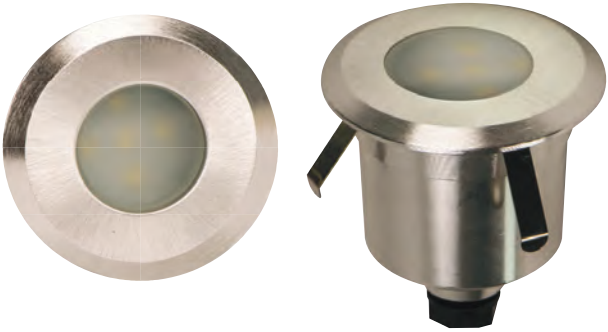

Colour Temp


6500k

5 LED 240v IP65 Deck Light

E5LED-WH
5 LED 240v IP65 Deck Light, White LED

E5LED-BL
5 LED 240v IP65 Deck Light, Blue LED

- Power: 0.8w
- Lumen: 120Lm
- IP Rating: IP65
- Beam Angle: 15°
- Voltage: 240V
- Available in Blue/White
- Prewired 2M Cable
- Cutout: 50mm

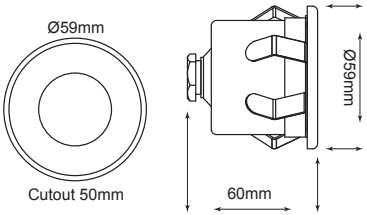

Outer Box 50

30000 Life Time
Compatible
LED
Class II
Instant Start

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A ↑ G D

Scan for info

IP65

90 lm
0.5w

3 years Quality Assurance



Colour Temp

3000k


6500k


LED Colour Choice Mini Deck Light

E6MINILED-WH
6 LED Colour Choice Mini Deck Light, Clear White

E6MINILED-WW
6 LED Colour Choice Mini Deck Light, Warm White

- LED Output 0.5w
- Lumen: 90Lm
- IP Rating IP65
- Beam Angle 15°
- Voltage 220/240V
- Pre-wired 2M Cable
- Colour Filaments Supplied





Outer Box 50

Scan for info

ErP COMPLIANT UKCA CE RoHS COMPLIANT

A G

Compatible LED Class II Instant Start

LED COLOUR CHOICE DECK LIGHT

eclipse

130 lm
1w

IP65

3 years Quality Assurance




Colour Temp

6500k

12 LED 240V Deck Light

E12LED
12 LED Colour Choice 240v Deck Light

- LED Output 1w
- Lumen: 130Lm
- 12 LED
- IP Rating: IP65
- Pre-wired 2.5M Cable
- Colour Filaments Supplied

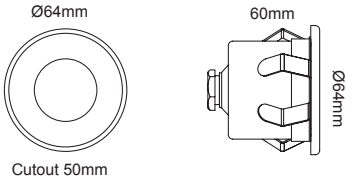

Outer Box 20

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Compatible LED Class II Instant Start

A G D

Scan for info

3 years Quality Assurance

IP65

30 lm
0.3w



Colour Temp


6500k


LED 240v Mini Deck Light

E2LED-WH
2 LED 240v Deck Light,
White LED

E2LED-BE
2 LED 240v Deck Light,
Light Blue LED

- LED Output 0.3w
- Lumen: 30Lm
- IP Rating IP65
- Beam Angle 15°
- Voltage: 240V
- Available in Blue or White LED
- Pre-wired 2M Cable
- Cutout: 25mm





Outer Box 50

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A G

Compatible LED Class II Instant Start

LED BRICK LIGHT

195 lm
3.2w

IP68

3 years Quality Assurance



Colour Temp


6500k

LED Brick Light

E-BRI-WH
39 LED 240v Brick Light,
White LED

E-BRI-BL
39 LED 240v Brick Light,
Blue LED

- LED Output 3.2w
- Lumen: 195Lm
- 39 LEDs
- IP Rating: IP68
- 3 Yr Guarantee
- IP Rating: IP68
- Voltage 240V
- Available in White or Blue LED
- Stainless Steel Cover, Plastic Housing
- Without Cable

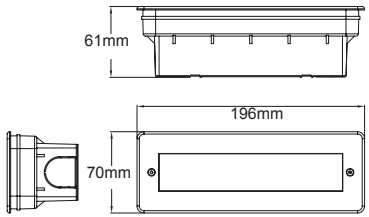

Outer Box
20

Compatible | LED | Class II | Instant Start

A G F

Scan for info

ACCESSORIES

IP65 4 Pole Rotary Isolators	Pg 168
Push Connector Boxes	Pg 172
IP66 Connection Box	Pg 173
IP68 Connection Tubes	Pg 174
Weatherproof IP66 Switched Sockets	Pg 175
Weatherproof IP66 Switches	Pg 178
Metal Clad Switched Sockets	Pg 180
Metal Clad Switches	Pg 181
Metal Clad Back Boxes	Pg 186
IP55 Outdoor Switches	Pg 187
Weatherproof Empty Socket Boxes	Pg 188
Weatherproof Connection Box	Pg 189
IP56 Junction Boxes	Pg 190
IP65 Terminal Junction Boxes	Pg 191
Electrical Accessories	Pg 193
Room/Frost Stats	Pg 195
Convertor Sockets	Pg 196
Distribution Boxes	Pg 197
Time Delay Switches	Pg 198
LED Dimmer Switches	Pg 199
Dual Voltage Shaver Sockets	Pg 200



IP65 4 POLE ROTARY ISOLATORS PG 168




PUSH CONNECTOR BOXES PG 172




IP66 CONNECTION BOX PG 173



IP68 CONNECTION TUBES PG 174



WEATHERPROOF IP66 SOCKETS /SWITCHES PG 175



METAL CLAD SWITCHES & SOCKETS PG 180



LED DIMMER SWITCHES PG 199



DUAL VOLTAGE SHAVER SOCKETS PG 200

3 years Quality Assurance

IP65

IK 08



IP65 4 Pole Rotary Isolator 115 x 173mm

SIS-20-4P-LA
20Amp 4 Pole Rotary Isolator
115 x 173mm

SIS-32-4P-LA
32Amp 4 Pole Rotary Isolator
115 x 173mm


SIS-40-4P-LA
40Amp 4 Pole Rotary Isolator
115 x 173mm

SIS-63-4P
63Amp 4 Pole Rotary Isolator
115 x 173mm

- 4 Pole
- IP Rating: IP65
- Fully Insulated Enclosure
- Earth Terminals included
- Captive Retained Cover Screws
- AC 415V
- 50/60Hz
- Padlockable
- 20mm/25mm Knockout Options
- 3 yr Guarantee
- Size: 115 x 173mm



Black Switch available separately

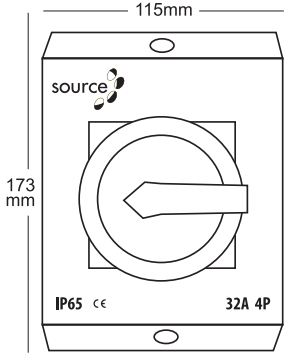

Outer Box 20

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

4 POLE ROTARY ISOLATOR RANGE




IP65 4 Pole Rotary Isolator 100 x 125mm

SIS-20-4P-SM
20Amp 4 Pole Rotary Isolator
100 x 125mm

SIS-32-4P-SM
32Amp 4 Pole Rotary Isolator
100 x 125mm

SIS-40-4P-SM
40Amp 4 Pole Rotary Isolator
100 x 125mm

- 4 Pole
- IP Rating: IP65
- Fully Insulated Enclosure
- Earth Terminals included
- Captive Retained Cover Screws
- AC 415V
- 50/60Hz
- Padlockable
- 20mm/25mm Knockout Options
- 3 yr Guarantee
- Size: 100 x 125mm





Black Switch available separately

Outer Box 30

Scan for info

3 years Quality Assurance



IP65


IK 08

IP65 4 Pole Rotary Isolator 156 x 237mm

SIS-80-4P
80Amp 4 Pole Rotary Isolator
156 x 237mm

SIS-125-4P
125Amp 4 Pole Rotary Isolator
156 x 237mm

- 4 Pole
- IP Rating: IP65
- Fully Insulated Enclosure
- Earth Terminals included
- Captive Retained Cover Screws
- AC 415V
- 50/60Hz
- Padlockable
- 20mm/25mm Knockout Options
- 3 yr Guarantee
- Size: 156 x 237mm

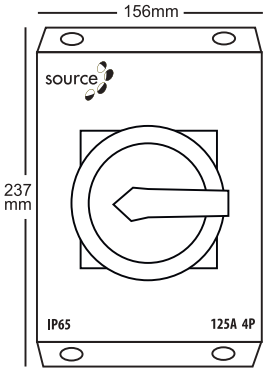



Black Switch available separately

Outer Box 8

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

4 POLE ROTARY ISOLATOR RANGE

IP65

IK 08




3 years Quality Assurance

IP65 4 Pole Rotary Isolator 115 x 173mm

SIS-25-4P-DC
25Amp 4 Pole Rotary Isolator
100 x 125mm

SIS-40-4P-DC
40Amp 4 Pole Rotary Isolator
100 x 125mm

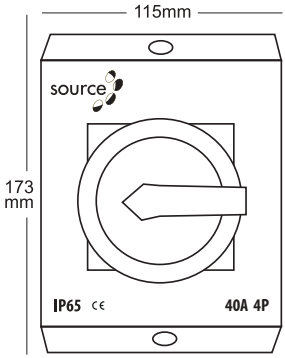

- 4 Pole
- Direct Current
- IP Rating: IP65
- Fully Insulated Enclosure
- Earth Terminals included
- Captive Retained Cover Screws
- DC 1000V
- 50/60Hz
- Padlockable
- 20mm/25mm Knockout Options
- 3 yr Guarantee
- Size: 115 x 173mm


Outer Box 20

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

IP20

3 years Quality Assurance






Mini Coffin Box c/w 3 Pole Connector

ECOFMIN
Black Mini Coffin Junction Box with 3 way pushwire connector

- 3 Way Mini Connection Box
- Colour: Black
- IP Rating: IP20
- 3 yr Guarantee





Large Coffin Box c/w 4 Pole Connector

ECOFLAR
Black Large Coffin Junction Box with 4 way pushwire connector

- 4 Way Large Connection Box
- Colour: Black
- IP Rating: IP20
- 3 yr Guarantee

Outer Box
Mini=300
Large=200

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

IP66 CONNECTION BOX

IP66

3 years Quality Assurance







Garden Connection Box

EGARCON
Garden Connection Box,
Plain Surface, IP66, No Knockouts,
No Glands

- 2 Way Large Connection Box
- Colour: Black
- No knockouts or cable glands
- IP Rating: IP66
- 3 yr Guarantee

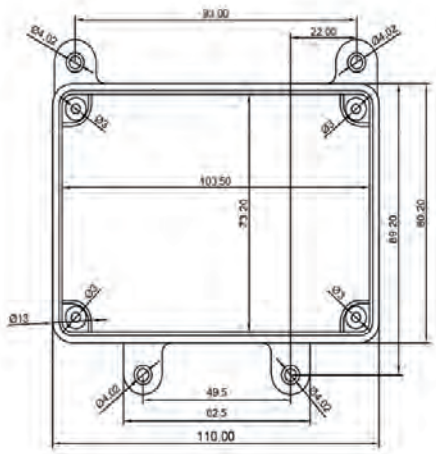

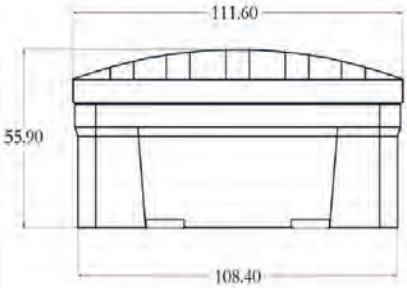

Outer Box 120

Scan for info






Straight Connector 5 Pole IP68 Tube

ESTCON
Straight Connector 5 Pole
IP68 Tube

- Black Polyamide body, plated screws (M20A)
- IP Rating IP68
- Voltage: 450/24V
- Fire Proof
- Cable Seals included: Orange: 12.5 - 14.5mm
  Red: 10 - 12mm



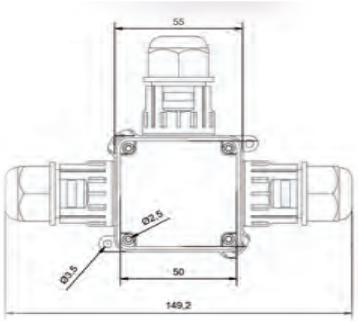



T 3 Pole Connecter IP68 Tube

E3TCON
T Connector, 3 pole IP68 Tube

- Black Polyamide body, plated screws (M20A)
- IP Rating: IP68
- Fire Proof
- Cable Seals included: Orange: 12.5 - 14.5mm
  Red: 10 - 12mm



Outer Box
ESTCON
100
E3TCON
50


Scan for info

WEATHERPROOF SWITCHED SOCKETS

IP66

IK 08

3 years Quality Assurance

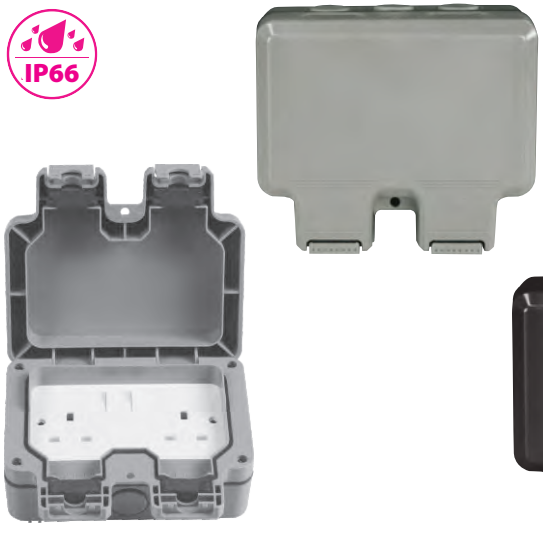


2 Gang Outdoor IP66 Switched Sockets

EOD2G
2 Gang Outdoor Switched Socket IP66, Grey Housing

EOD2G-BL
2 Gang Outdoor Switched Socket IP66, Black Housing

- BS Approved Switched Socket Included
- Suitable for Mounting on Flammable Surfaces
- IP66 Corrosion Resistant Polycarbonate Construction
- 3 yr Guarantee

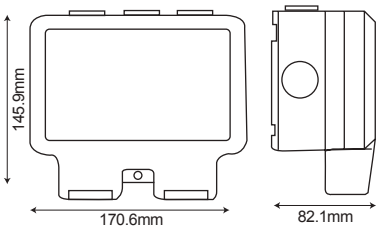

Outer Box 10

Scan for info

3 years Quality Assurance






IP66

IK 08

1 Gang Outdoor IP66 Switched Socket

EOD1G
1 Gang Outdoor Switched Socket IP66, Grey Housing


- BS Approved Switched Socket Included
- Suitable for Mounting on Flammable Surfaces
- IP66 Corrosion Resistant Polycarbonate Construction
- 3 yr Guarantee





2 Gang Outdoor IP66 Socket, Clear Lid Only

EOD2GCL
2 Gang Outdoor IP66 Socket, Clear Lid only

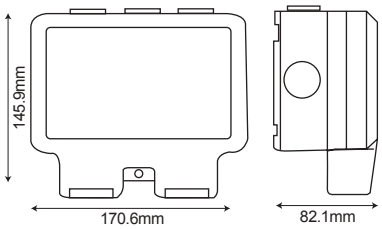

Outer Box
EOD1G=10
EOD2GCL 50

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

WEATHERPROOF SWITCHED SOCKETS

eclipse

IP66

IK 08






3 years Quality Assurance

1 Gang 13A Outdoor Fused Spur

EODSPUR
1 Gang Outdoor Fused Spur
IP66, Grey Housing

- Suitable for Mounting on Flammable Surfaces
- IP66 Corrosion Resistant Polycarbonate Construction
- Size: 120mm x 139mm x 80mm








2 Gang Outdoor IP66 Switched Socket

EODRCD
2 Gang RCD Socket IP66

- BS Approved Switched Socket Included
- Suitable for Mounting on Flammable Surfaces
- IP66 Corrosion Resistant Polycarbonate Construction
- Non Latching RCD
- Size: 170.6 x 145.9 x 82.10mm

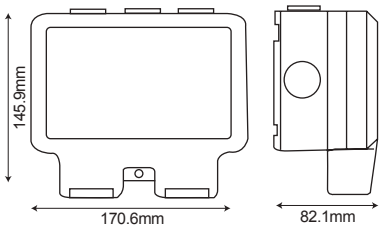

Outer Box 10


ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

3 years Quality Assurance

IP66

IK 08

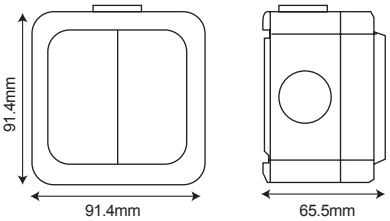




2 Gang 2 Way Outdoor IP66 Switch

EOD2G2W
2 Gang 2 Way Outdoor Switch

- Complete with Neon
- IP66 Corrosion Resistant Polycarbonate Construction
- 3 yr Guarantee

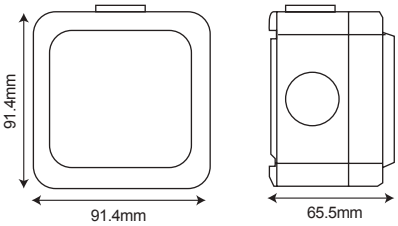



1 Gang 2 Way Outdoor IP66 Switch

EOD1G2W
1 Gang 2 Way Outdoor Switch

- Complete with Neon
- IP66 Corrosion Resistant Polycarbonate Construction
- 3 yr Guarantee

Outer Box
EOD2G2W
EOD1G2W
20

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

WEATHERPROOF SWITCHES

IK 08

IP66


3 years Quality Assurance



IP66 Bell Switch

EOD BELL
Bell Push Complete with Neon

- Complete with Neon
- IP Rating IP66
- Release Switch
- UV Resistant
- BS EN60669 Approved Switch
- 3 yr Guarantee
- Suitable for Mounting on Flammable Surfaces

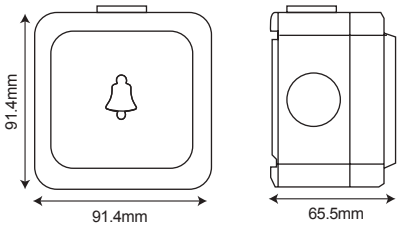


Outer Box 20

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

3 years Quality Assurance

IP20







13A 1 Gang Double Pole Switched Socket

EMC-1G-SW-SOC
13A 1 Gang Switched Socket
Double Pole, Metal Clad

- BS Approved 13A Switched Socket
- 1 Gang
- Metal Clad c/w knockouts
- Voltage: 250V 50Hz
- 3 yr Guarantee



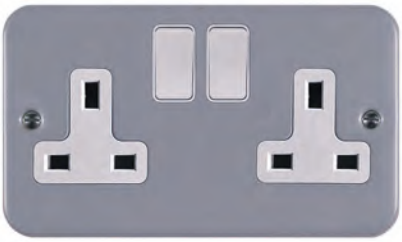

13A 2 Gang Double Pole Switched Socket

EMC-2G-SW-SOC
13A 2 Gang Switched Socket
Double Pole, Metal Clad

- BS Approved 13A Switched Socket
- 2 Gang
- Metal Clad c/w knockouts
- Voltage: 250V 50Hz
- 3 yr Guarantee


Outer Box
1G=100
2G=50

Scan for info

METAL CLAD SWITCHES

IP20






10A 1 Gang 2 Way Switch

EMC-1G-SW
10A 1 Gang 2 Way Switch
Metal Clad

- BS Approved 10A Switch
- 1 Gang
- Metal Clad c/w knockouts
- Voltage: 250V 50Hz
- 3 yr Guarantee





10A 2 Gang 2 Way Switch

EMC-2G-SW
10A 2 Gang 2 Way Switch
Metal Clad


- BS Approved 10A Switch
- 2 Gang
- Metal Clad c/w knockouts
- Voltage: 250V 50Hz
- 3 yr Guarantee

Outer Box
100

Scan for info

IP20

3 years Quality Assurance







10A 3 Gang 2 Way Switch

EMC-3G-SW
10A 3 Gang 2 Way Switch
Metal Clad

- BS Approved 10A Switch
- 3 Gang
- Metal Clad c/w knockouts
- Voltage: 250V 50Hz
- 3 yr Guarantee



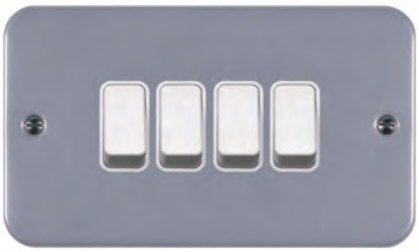

10A 4 Gang 2 Way Switch

EMC-4G-SW
10A 4 Gang 2 Way Switch
Metal Clad

- BS Approved 10A Switch
- 4 Gang
- Metal Clad c/w knockouts
- Voltage: 250V 50Hz
- 3 yr Guarantee


Outer Box
3G=100
4G=50

Scan for info

METAL CLAD SWITCHES

IP20






10A 1 Gang Press Switch

EMC-1G-PR-SW
10A 1 Gang Press Switch
Metal Clad

- BS Approved 10A Press Switch
- 1 Gang
- Metal Clad c/w knockouts
- Voltage: 250V 50Hz
- 3 yr Guarantee





13A Fused Spur Double Pole


EMC-SP
13A Fused Spur
Double Pole, Metal Clad

- BS Approved DP 13A Fused Spur
- Double Pole
- Metal Clad c/w knockouts
- Voltage: 250V 50Hz
- 3 yr Guarantee

Outer Box
100

Scan for info

IP20






13A Fused Spur DP with Neon

EMC-SP-NE
13A Fused Spur Double Pole with Neon, Metal Clad

- BS Approved DP 13A Fused Spur with Neon
- Voltage: 250V 50Hz
- Double Pole
- Metal Clad c/w knockouts
- 3 yr Guarantee





13A Fused Spur DP with Neon & Flex Outlet

EMC-SP-NE-FL
13A Fused Spur Double Pole with Neon & Flex Outlet Metal Clad

- BS Approved DP 13A Fused Spur
- Voltage: 250V 50Hz
- With Neon & Flex Outlet
- Double Pole
- Metal Clad c/w knockouts
- 3 yr Guarantee


Outer Box 100

Scan for info

METAL CLAD SWITCHES

IP20






20A Double Pole Switch with Neon & Flex Outlet

EMC-20A-SW-NE-FL
20A 1 Gang Switch with Neon & Flex Outlet,Double Pole, Metal Clad

- BS Approved 20A Switch
- 1 Gang
- With Neon & Flex Outlet
- Metal Clad c/w knockouts
- 3 yr Guarantee





45A Double Pole Switch with Neon

EMC-45A-SW-NE
45A 1 Gang Switch with Neon Double Pole, Metal Clad


- BS Approved 45A Switch
- Double Pole
- Voltage: 250V 50Hz
- Metal Clad c/w knockouts
- 3 yr Guarantee

Outer Box 100

Scan for info

IP20

3 years Quality Assurance






1 Gang Back Box, No Knockouts

EMC-1G-BB-N-KO
1 Gang Back Box, No Knockouts
Metal Clad

- 1 Gang Back Box
- Voltage: 250V 50Hz
- No Knockouts
- Metal Clad
- 3 yr Guarantee





2 Gang Back Box, No Knockouts

EMC-2G-BB-N-KO
2 Gang Back Box, No Knockouts
Metal Clad

- 2 Gang Back Box
- Voltage: 250V 50Hz
- No Knockouts
- Metal Clad
- 3 yr Guarantee

Outer Box
1G = 100
2G = 50

Scan for info

IP55 OUTDOOR SWITCHES





IP55 Outdoor Switches

EIP551G2W
IP55 1 Gang 2 Way 16Amp Switch

EIP552G2W
IP55 2 Gang 2 Way 16Amp Switch

EIP553G2W
IP55 3 Gang 2 Way 16Amp Switch

EIP554G2W
IP55 4 Gang 2 Way 16Amp Switch

- 16Amp Switch
- IP Rating: IP55

Type	Size
1 GANG 2-WAY	L68 x W85 x H68mm
2 GANG 2-WAY	L68 x W85 x H68mm
3 GANG 2-WAY	L100 x W85 x H68mm
4 GANG 2-WAY	L136 x W85 x H68mm

Outer Box 100

Scan for info

3 years Quality Assurance

IP66

IK 08






2 Gang Outdoor IP66 Empty Socket Box

EOD2GEMP
2 Gang Outdoor IP66 Empty Socket Box

- IP66 Weatherproof
- High Impact PC Housing
- UV Resistance
- Multiple 20mm Knockouts
- Suitable for mounting on flammable surfaces
- Corrosion resistance polycarbonate construction








1 Gang Outdoor IP66 Empty Socket Box

EOD1GEMP
1 Gang Outdoor IP66 Empty Socket Box

- IP66 Weatherproof
- High Impact PC Housing
- UV Resistance
- Multiple 20mm Knockouts
- Suitable for mounting on flammable surfaces
- Corrosion resistance polycarbonate construction

Outer Box 10



ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

WEATHERPROOF CONNECTION BOX

IP54


3 years Quality Assurance




Weatherproof Connection Box

EOB
IP54 Weatherproof
Connection Box

- IP54 Weatherproof Connection Box
- Lockable Latch
- Wall Mounting Option
- 5 Cable outlets for multiple connections
- Suitable for bulky plugs
- Ideal for outdoor power tools or festive lighting
- Socket extension lead not included

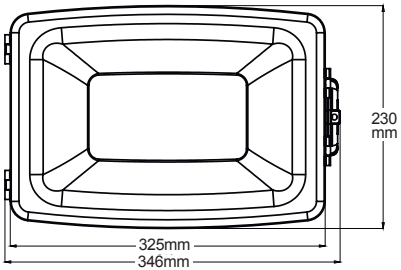



Outer Box
8

Scan for info

IP56

IP56 Plain Junction Boxes


ESQB3-PL
105 x 105mm x 55mm plain IP56 Junction Box and Screw Lid


ESQB4-PL
150 x 110mm x 70mm plain IP56 Junction Box and Screw Lid

ESQB5-PL
190 x 140mm x 70mm plain IP56 Junction Box and Screw Lid

ESQB6-PL
240 x 190mm x 90mm plain IP56 Junction Box and Screw Lid

- IP Rating IP56
- 3 Year Guarantee
- c/w plastic screws






IP56 Junction Boxes c/w knockouts

ESQB2
80 x 80mm x 40mm IP56 Junction Box, Screw Lid & knockouts

ESQB3
105 x 105mm x 55mm IP56 Junction Box, Screw Lid & knockouts

- IP Rating IP56
- 3 Year Guarantee






IP55 Round Junction Box c/w knockouts

ERB 70X40
70 x 40mm Round IP55 Junction Box, Screw Lid & knockouts

- Size: 70mm x 40mm
- IP Rating IP55
- Screw Lid
- Comes with knockouts
- 3 Year Guarantee





Outer Box
ESQB3=100
ESQB2=200
ERB=100

Outer Box
ESQB3-PL=100
ESQB4-PL=60
ESQB5-PL=30
ESQB6-PL=20

Scan for info


IP65


IP65 Terminal Mini Junction Boxes

EJBMIN-BL
IP65 Mini Junction Box, Black

EJBMIN-GR
IP65 Mini Junction Box, Grey

- Size: 48 x 83 x 40mm
- Threaded knockouts
- Complete with fast mounting clips
- Strip connector not supplied
- Available in grey or black











IP65 Terminal Junction Boxes 90 x 90 x 47mm

EJBS1-BL
IP65 Mini Junction Box, Black

EJBS1-GR
IP65 Mini Junction Box, Grey

- Size: 90 x 90 x 47mm
- Threaded knockouts
- Complete with fast mounting clips
- Strip connector supplied
- Available in grey or black









IP65 Terminal Junction Boxes 111 x 111 x 60mm

EJBS2-BL
IP65 Mini Junction Box, Black

EJBS2-GR
IP65 Mini Junction Box, Grey

- Size: 110 x 110 x 60mm
- Threaded knockouts
- Complete with fast mounting clips
- Strip connector supplied
- Available in grey or black






Outer Box
EJBS1=100
EJBS2=80
EJBMIN=200


Scan for info


3 years Quality Assurance

IP65





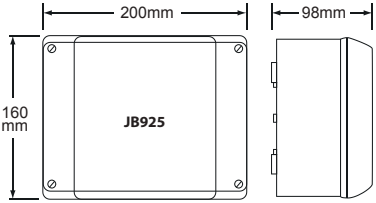



IP65 Rectangular Terminal Junction Boxes

JB906
139 x 119 x 70mm
Terminal Junction Box

JB910
167 x 125 x 82mm
Terminal Junction Box

JB925
200 x 160 x 98mm
Terminal Junction Box

- All supplied with terminals
- Heavy duty polycarbonate body
- Supplied with non-corrosive screws





IP65 Square Terminal Junction Boxes

JB902
88 x88 x 53mm
Terminal Junction Box

JB904
98 x98 x 61mm
Terminal Junction Box

- All supplied with terminals
- Heavy duty polycarbonate body
- Supplied with non-corrosive screws





Outer Box
JB902/4=50
JB906/10=50
JB925=30


ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

IP54

3 years Quality Assurance




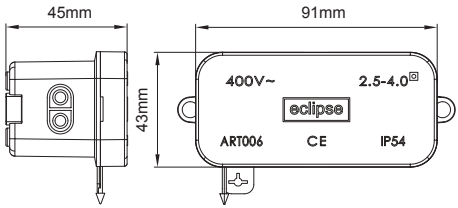

PVC Coffin with Porcelain Connector

ECO
PVC Coffin with
Porcelain Connector

- IP Rating: IP54

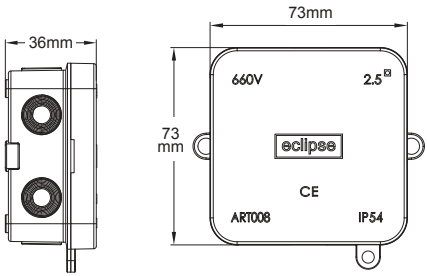



2 x 2 PVC Box with Strip Connector

EBO
2 x 2 PVC Box with
Strip Connector

- IP Rating: IP54

Outer Box
ECO = 240
EBO = 100

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

GU10 390mm Lamp Holder

201-GU10LH
GU10 390mm Lamp Holder



Retention Clip for 12V Downlight

LV RET
Retention Clip for 12V Downlight



Retention Clip for SL GU10 Downlight


SL-GZ-RET
Retention Clip for SL GU10 Downlight



Outer Box
GZLH=100
LVLH=50

IP54

3 years Quality Assurance






10 Amp 230/240V Thermostat

ETST
10 Amp 230/240V Room Stat

- Control of heating and cooling applications
- Temp range 10°C to 35°mm
- Will fit 1 gang box
- Comes with neon indicator





10 Amp 230/240V Frost Stat

EFST
10 Amp 230/240V Frost Stat


- Control of heating and cooling applications
- Temp range -5°C to 15°mm
- Will fit 1 gang box
- Comes with neon indicator

Outer Box 50

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

3 years Quality Assurance






1-2 Gang Convertor Socket

KC2SL
1-2 Gang Convertor Socket

- Polycarbonate Material
- Complies with BS1363

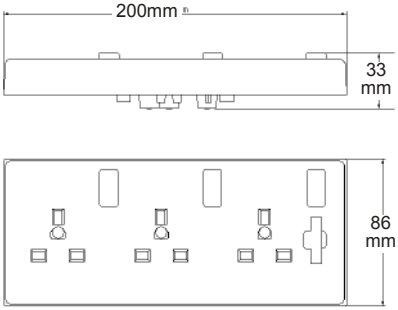



1-3 Gang Convertor Socket

KC3SL
1-2 Gang Convertor Socket

- Polycarbonate Material
- Complies with BS1363

Outer Box
KC2SL=50
KC3SL=100
(packs of 10)

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

IP65

3 years Quality Assurance





Distribution Boxes

EDB6504
4mod Distribution Box


EDB6508
8mod Distribution Box

EDB6512
12mod Distribution Box


EDB6518
18mod Distribution Box

EDB6524
24mod Distribution Box


- IP Rating: IP65
- Transparent cover
- Suitable for mounting on flammable surfaces
- All supplied with earth and neutral connections




EDB6504




EDB6508



EDB6518



EDB6512



EDB6524

Outer Box
EDB6504 = 30
EDB6508 = 20
EDB65012=20


Outer Box
EDB6518 = 10
EDB6524 = 5

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

IP65

3 years Quality Assurance






IP65 Electronic Time Delay Switch

ET-LAG IP65
IP65 Electronic
Time Delay Switch

- Power Source: AC 220-240V 50Hz
- Time Delay 2 sec to 2 hours
- Load: Max 16 Amp
- IP Rating: IP65
- Power: Max 3500w
- Suitable for Indoor/Outdoor use





IP20

LED Indoor Electronic Time Delay Switch

ET-LAG LED
LED Indoor Electronic
Time Delay Switch

- Power Source: AC 220-240V 50Hz
- Time Delay 1.2 sec to 12 hours
- Load: Max 1.5 Amp
- IP Rating: IP20 (Indoor use only)
- Power: 5w - 300w
- All supplied with earth and neutral connections
- Suitable for Incandescent, Flourescent, LED Lighting
- One Way Switch
- Replaces Existing Wall Switch

Outer Box
ET-LAG IP65
50
ET-LAG LED
40

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

IP54


Dimmable

LED Dimmer Module

SLEDMOD-DIM
LED Dimmer Module



- Dimmable LED: 5-100w
- Dimmable CFL: 10-150w
- Voltage: 200-240V AC
- Load Ratings: Max / Min
- Tungsten Lamp 60-150w
- Halogen Lamp: 35-150w
- Type: Trailing/Leading Edge




1 Gang 100w LED Dimmer

SLED-DIM
1 Gang 100w LED Dimmer
White

SLED-DIM-MC
1 Gang 100w LED Dimmer
Matt Chrome



- Available in white or matt chrome
- 1 gang




2 Gang 100w LED Dimmer

SLED2G-DIM
2 Gang 100w LED Dimmer
White

SLED2G-DIM-MC
2 Gang 100w LED Dimmer
Matt Chrome



- Available in white or matt chrome
- 2 gang



Outer Box
SLED DIM
SLED2G-DIM
Outer Box=100
Inner Box=5

Outer Box
SLEDMOD-DIM
Outer Box=200
Inner Box=20

3 years Quality Assurance

ErP COMPLIANT · UK CA · CE · RoHS COMPLIANT

Scan for info

IP20

3 years Quality Assurance






Dual Voltage Shaver Sockets

SDV-SOC-WH
Dual Voltage Shaver Socket
White

SDV-SOC-MC
Dual Voltage Shaver Socket
Matt Chrome

- Dual Voltage: 115 / 230V
- Class 1
- IP Rating: IP20



Outer Box
50


Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT



SENSORS


PIR Motion Sensors	Pg 204
Photocells	Pg 208
Microwave Sensor 1200W	Pg 209
Surface Mounted Microwave Sensor	Pg 210
Recessed Microwave Sensor	Pg 211



PIR MOTION SENSORS
PG 204



2 IN 1 FLUSH MOUNT PIR
MOTION SENSOR PG 207



PHOTOCELLS
PG 208



MICROWAVE SENSOR
1200W PG 209



SURFACE MOUNTED
MICROWAVE SENSOR PG 210



RECESSED MOUNTED
MICROWAVE SENSOR PG 211

3 years Quality Assurance

IP54

PIR sensor

180°

360°







Swivel PIR Motion Sensor

SWV PIR BL
Swivel PIR Motion Sensor,
Black Housing

SWV PIR WH
Swivel PIR Motion Sensor,
White Housing

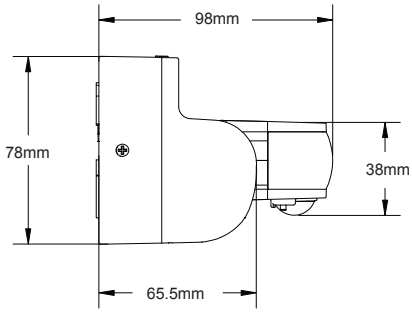

- Mounting Height: 1.8m - 2.5m
- Working Temperature: -20°C~+40°C
- Voltage: 220V AC - 240V AC
- Frequency: 50/60Hz
- Ambient Light: <10-2000LUX (adjustable)
- Time Delay: Min: 10sec±3sec
  Max: 15min±2min
- Frequency: 50/60Hz
- IP Rating: IP54
- Detection Range: 180°+360°
- Detection Distance: 12M max (<24°C)
- Rated Load: 1200w (incandescent Lamp)
  300w (Energy Saving Lamp)
- Available in Black or White

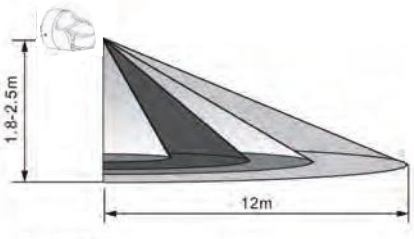

Outer Box 50

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

PIR MOTION SENSOR

PIR sensor

IP54

180°

3 years Quality Assurance







180° PIR Infrared Motion Sensor

SAD-PIR-BL
180° PIR Infrared Motion Sensor, Black Housing

SAD-PIR-WH
180° PIR Infrared Motion Sensor, White Housing

- Mounting Height: 1.8m - 2.5m
- Working Temperature: -20°C~+40°C
- Voltage: 220 AC-240V AC
- Frequency: 50Hz
- IP Rating: IP54
- Input Voltage: 220v-240v AC
- Detection Range: 180°
- Detection Distance: 12M max (<24°C)
- Rated Load: 2000w (incandescent Lamp)
  1000w (Energy Saving Lamp)
- Available in Black or White

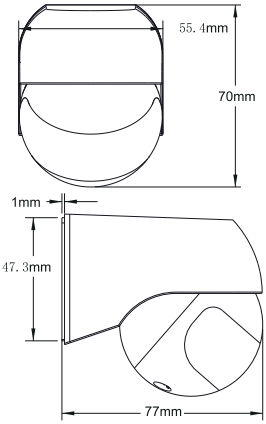

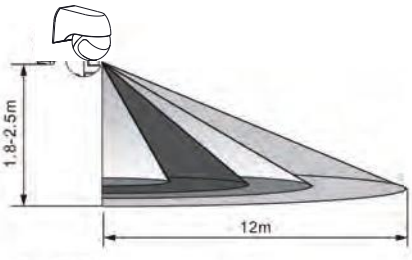

Outer Box 50

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

3 years Quality Assurance

IP54

PIR sensor

360°

180°






180° & 360° PIR Infrared Motion Sensor

SPIR 3MOD-BL
180° PIR Infrared Motion Sensor, Black Housing

SPIR 3MOD-WH
180° PIR Infrared Motion Sensor, White Housing

- Power Source: 220v/AC-240v/AC
- Voltage: 220 AC-240V AC
- Frequency: 50Hz/60Hz
- IP Rating: IP54
- 3 yr Guarantee
- Ambient Light:<10-2000LUX (adjustable)
- Time-Delay: min: 10sec±3sec
  max: 15min±3min
- Rated Load: 2000W (incandescent lamp)
  1000W (energy saving lamp)
- Detection Distance: 12m max (<24°C)
- Detection Range: 180°+360°
- Working Temperature: -20~40°C
- Working Humidity: <93%RH
- Installation Height: 1.8m~2.5m
- Power Consumption: <0.9W (work)
  <0.9W(static)
- Detection Moving Speed: 0.6~1.5m/s
- Available in Black or White

3 Mounting Options

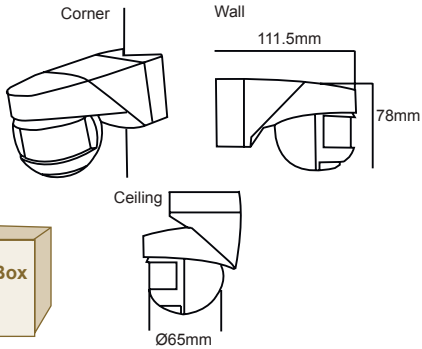

Outer Box 50

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info

PIR MOTION SENSOR

PIR sensor

IP20

360°

3 years Quality Assurance





2 in 1 Flush Surface Mounting PIR Motion Sensor

SRS-PIR
2 in 1 Flush Surface Mounting PIR Motion Sensor

- 3 Yr. Guarantee
- Flush Mounting or Ceiling Mounting
- Input Voltage: 220-240V AC
- 360° PIR Motion Sensor
- IP Rating: IP20
- 3 yr Guarantee
- Available in White
- Time Setting 10 sec - 7 min adjustable
- Max 2000W Incandescent Lamp
- Ambient Light: <10 Lux - 2000 Lux
- Detection Range: 6 metres max
- Beam Angle 360°

Recessed Surface





Outer Box 50

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info


Photocell Kit / Photocell Head

IP54

3 years Quality Assurance

PEC-KIT
Photocell Kit


PEC-HEAD
Photocell Head

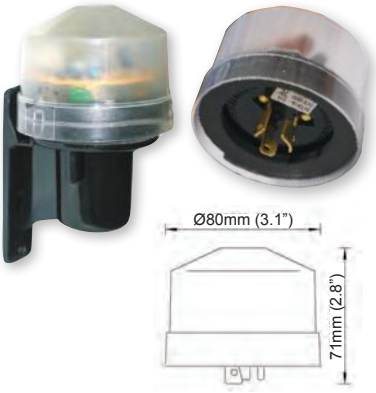


- Electronic Relay Load Switching
- 220-240V AC, 50/60Hz
- 1000W Tungsten
- 1800VA Inductive Head
- 3 yr Guarantee
- -40°C to +70°C
- Switching Delay: 10-15s
- UV Stabilised Polycarbonate
- Power Consumption: <0.25W
- Sensor: Photodiode Light Level: On <20Lux Off>80Lux
- EN IEC 61058-1:2018, EN 61058-1-1:2016
- BS EN IEC 61058-1:2018, BS EN 61058-1-1:2016
- 3650 Cycles
- IP Rating: IP54
- BS5972 Twist Lock Terminal

220-240v 1.5v Mini Photocell

MINI-PEC
1.5V Mini Photocell



- On-Off Levels: 10~20Lx On (Dusk) 30~60Lx Off (Dawn)
- Ambient Temp: -40°C-+70°C
- Related Humidity: 96%
- Leads Length: 180mm
- Rated Voltage: 220-240VAC
- 3 yr Guarantee
- Applicable Voltage:198-264VAC
- Load: 6A Tungsten, 6A Inductive Load
- Life Time: 3650 Cycles
- Power: 1.5VA Max

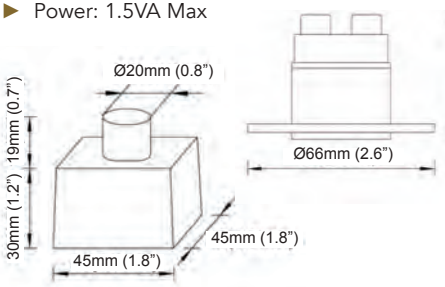

Outer Box
PEC-KIT=50
PEC-HEAD
MINI-PEC
100

ErP COMPLIANT UK CA CE RoHS COMPLIANT

Scan for info


Microwave sensor

IP54

360°

3 years Quality Assurance





Microwave Sensor 1200w

E MICRO
Microwave Sensor 1200w

- Power Source: 220-240V AC
- Detection Angle: 360°
- Frequency: 50/60 Hz
- Time Setting: 8 sec to 12 min
- Rated Load: 1200w (220-240V AC)
- Power consumption approx 0.9W



IP54 Empty Enclosure for E Micro

E MIC IP54
IP54 Empty Enclossure for E Micro

- SIZE: 11.6 x 5.6cm
- IP Rating: IP54

Outer Box
E MICRO=100
E MIC IP54=75

Scan for info

IP20

Microwave sensor

360°

Photocell Feature


3 years Quality Assurance



Surface Mounted Microwave Sensor 1200w

E MIC SURF
Surface Mounted Microwave Sensor 1200w

- Power Source: 220-240V AC
- Reach 2-10mt adjustable
- Frequency: 50/60 Hz
- Time Setting: 8 sec to 12 min
- Rated Load: 1200w (220 240V AC)
- Light Control: 2-2000 LUX
- Detection Angle: 360°
- Power Consumption approx 0.9W

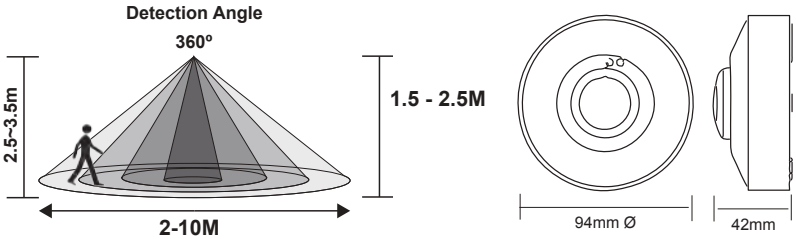

Outer Box 100

Scan for info

MICROWAVE SENSOR RANGE

eclipse

Microwave sensor

IP54

360°

Photocell Feature


3 years Quality Assurance




Recessed Microwave Sensor 1200w

E MIC REC
Recessed Microwave Sensor 1200w

- Power Source: 220-240V AC
- Reach 2-10mt adjustable
- Frequency: 50/60 Hz
- Time Setting: 10 sec to 30 min
- Rated Load: 1200w (220-240V AC)
- Light Control: 2-2000 LUX
- Detection Angle: 360°
- Power Consumption approx 0.9W

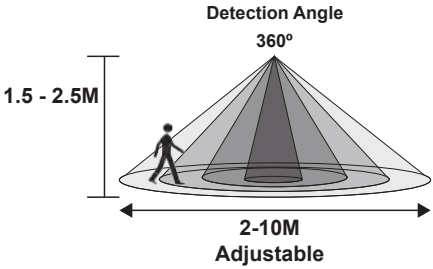

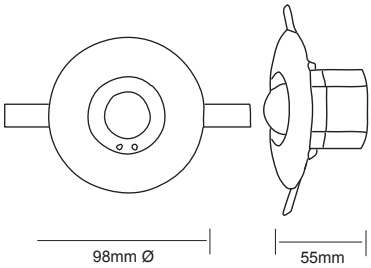

Outer Box 50

ErP COMPLIANT UKCA CE RoHS COMPLIANT

Scan for info

ALARMS



SMOKE ALARM
PG 213



CARBON MONOXIDE ALARM PG 214



HEAT ALARM
PG 215

Smoke Alarm	Pg 213
Carbon Monoxide Alarm	Pg 214
Heat Alarm & Base	Pg 215

eclipse


5 years Quality Assurance




Smoke Alarm

SGD 1236
Smoke Alarm

- 240v Photoelectric Smoke Alarm with Battery Back-up
- Hush Features
- Photoelectric Sensor for slow smoldering fires
- Power-up by AC Quick Connector
- BS Number: BS EN14604:2005
- 5 yr Guarantee
- 9V Battery (Included) Back Up
- Continues to operate during power cuts
- Interconnectable with wires (up to 20 Units)
- Easy to install with mounting hardware included
- Low 85dB alarm signal
- Low battery signal
- Operating Light





Outer Box 50
Inner Box 10

ErP COMPLIANT UKCA CE RoHS COMPLIANT


Scan for info




Carbon Monoxide Alarm

E240CARB
Carbon Monoxide Alarm

- AC/DC Operated Carbon Monoxide alarm
- Alarm and AC power supply indicator
- Low battery & battery missing warning sound
- Self-test button
- Auto-hush function when CO is clear
- Fitting and battery tamper-resistant feature
- Easy Installation
- Loud 85dB Alarm signal
- 9VDC battery power for backup
- CE Approved
- 5 year warranty
- Tested to: BS EN50291 1:2010+A1:2012
- Licence No: KM 651575

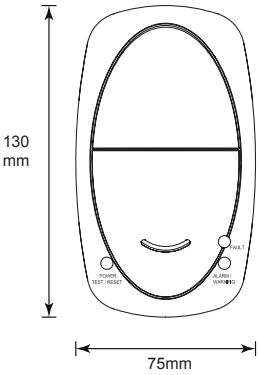



Outer Box
48
Inner Box
12

Scan for info







Heat Alarm & Base

E240VHD
Heat Alarm

VST-BASE
Heat Alarm Base

- 240v Heat Alarm with Battery Backup
- Interconnectable with wires (up to 20 Units)
- Easy to install with mounting hardware included
- Power-up by AC Quick Connector (3 PIN Plug-in)
- 9V Battery (Included) Back Up
- Continues to operate during power cuts
- Ideal for areas where smoke alarms cannot be used such as kitchens, garages and attics
- Loud 85dB Alarm signal
- Anti-tamper lock
- Low battery signal
- Operating Light





Outer Box
E240VHD=50
VSD-BASE 100
Inner Box 10

Scan for info

Festive Lighting

LED String 120 LED 12M Lighting	Pg 218
LED String 320 LED 25.6M Lighting	Pg 219
LED Rope Lighting	Pg 220
LED Icicle Lighting	Pg 221
LED Curtain Lighting	Pg 221
LED Festoon Lighting	Pg 222
LED String Lighting, White Cable	Pg 223
LED 24V String Lighting	Pg 224




LED STRING 120 LED LIGHTING PG 218



LED STRING 320 LED LIGHTING PG 219



LED ROPE LIGHTING PG 220



LED ICICLE LIGHTING PG 221



LED CURTAIN LIGHTING PG 221



LED FESTOON LIGHTING PG 222



LED STRING LIGHTING, WHITE CABLE PG 223



LED 24V STRING LIGHTING PG 224

IP44

2 years Quality Assurance



LED String 120 LED 12M Lighting

E120LED-WH
120 LEDs 12M LED String Lights, Clear White

E120LED-WW
120 LEDs 12M LED String Lights, Warm White

E120LED-BE
120 LEDs 12M LED String Lights, Blue

E120LED-RD
120 LEDs 12M LED String Lights, Red

E120LED-GN
120 LEDs 12M LED String Lights, Green

E120LED-CC+CON
120 LEDs 12M LED String Lights, Multi Colour with Remote Controller

- 12M String
- 120 LEDs
- MAX 4 sets can be connected
- Voltage: 220-240, 50 Hz
- 2 Yr. Guarantee
- Easy Coupler Connections
- IP Rating IP44
- Available in Clear White, Warm White, Blue, Red, Green and Multi Colour
- Multi Colour Version comes with Remote Controller

Easy Coupler Connections






Outer Box 10

Scan for info

ErP COMPLIANT UKCA CE RoHS COMPLIANT

A↑G G

10000 Switching Cycle
Compatible
LED
30000 Life Time
Instant Start
** 90% Energy Saving
** >80 Ra Rendering Index

Festive Lighting

IP44

source

2 years Quality Assurance



LED String 320 LED 25.6M Lighting

E320LED-WH
320 LEDs 12M LED String Lights, Clear White

E320LED-WW
320 LEDs 12M LED String Lights, Warm White

E320LED-BE
320 LEDs 12M LED String Lights, Blue

E320LED-RD
320 LEDs 12M LED String Lights, Red

E320LED-GN
320 LEDs 12M LED String Lights, Green

E320LED-CC+CON
320 LEDs 12M LED String Lights, Multi Colour with Remote Controller

- 25.6M String
- 320 LEDs
- MAX 4 sets can be connected
- Voltage: 220-240, 50 Hz
- 2 Yr. Guarantee
- Easy Coupler Connections
- IP Rating IP44
- Available in Clear White, Warm White, Blue, Red, Green and Multi Colour
- Multi Colour Version comes with Remote Controller

Easy Coupler Connections






Outer Box 4

10000 Switching Cycle
Compatible
LED
30000 Life Time
** 90% Energy Saving
Instant Start
** >80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G

Scan for info

IP44

2 years Quality Assurance



LED Rope Lights

RL-WHLED
50M LED Rope Light, Clear White

RL-WWLED
50M LED Rope Light, Warm White

RL-BELED
50M LED Rope Light, Blue

RL-RDLED
50M LED Rope Light, Red

RL-GRLED
50M LED Rope Light, Green

- 50M String
- Can be cut every 1.5M
- Accessories Available
- Complete with 3 BS Plugs, End Caps and Connectors
- Voltage: 220-240, 50 Hz
- Rated Power: 110V
- 2 Yr. Guarantee
- IP Rating IP44
- Available in Clear White, Warm White, Blue, Red and Green

Outer Box 1

Scan for info

ErP COMPLIANT UKCA CE RoHS COMPLIANT

A↑G G

10000 Switching Cycle | Compatible | LED | 30000 Life Time

Instant Start | ** 90% Energy Saving | ** >80 Ra Rendering Index

Festive Lighting

source

IP44

2 years Quality Assurance



LED Icicle Lighting

E5M80LEDICE-WW
5M LED Icicle Light, Warm White

E5M80LEDICE-CW
5M LED Icicle Light, Cool White

- 5M String
- 80 LEDs
- MAX 12 sets can be connected
- 2 Yr. Guarantee
- Easy Coupler Connections
- Voltage: 220-240V, 50/60Hz
- IP Rating IP44



LED Curtain Lighting

ECURT 2X2-WH
2M x 2M Square Curtain
500 LEDs, Clear White

ECURT 2X2-WW
2M x 2M Square Curtain
500 LEDs, Warm White

ECURT 2X2-BL
2M x 2M Square Curtain
500 LEDs, Blue

- 2M x 2M Square Curtain
- 500 LEDs
- Available with Black or White Cable
- 2 Yr. Guarantee
- IP Rating IP44
- Voltage: 220-240V, 50/60Hz
- Available in Clear White, Warm White, or Blue

Outer Box
ICICLE 10
CURTAIN 2

10000 Switching Cycle
Compatible
LED
30000 Life Time
** 90% Energy Saving
Instant Start
** >80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G

Scan for info

2 years Quality Assurance

IP44





LED Festoon Lighting

SFES10M
10M E27 Interlinkable Festoon
50cm Spacing, Black Cable

SFES25M
25M E27 Interlinkable Festoon
50cm Spacing, Black Cable

SE27GOLF-WW
LED .85w E27 Golf Ball,
Warm White

SE27GOLF-WH
LED .85w E27 Golf Ball,
Clear White

SE27GOLF-BE
LED .85w E27 Golf Ball, Blue

SE27GOLF-GR
LED .85w E27 Golf Ball, Green

SE27GOLF-YW
LED .85w E27 Golf Ball, Yellow

SE27GOLF-RD
LED .85w E27 Golf Ball, Red

- Harness supplied without Lamps
- SFES10M: MAX 5 x 10M sets can be connected
  SFES25M: MAX 2 x 25M sets can be connected
- Rubber Cable
- Voltage: 240v
- 2 Yr. Guarantee
- Easy Coupler Connections
- IP Rating IP44
- Each Golf Ball: LED .85w, E27
- Available in Clear White, Warm White, Blue, Red, Green and Yellow

Outer Box
10M=8
25M=4
SE27Golf
200

Scan for info

ErP COMPLIANT UKCA CE RoHS COMPLIANT

A↑G G

10000 Switching Cycle
Compatible
LED
30000 Life Time
Instant Start
** 90% Energy Saving
** >80 Ra Rendering Index

Festive Lighting

source

IP44

2 years Quality Assurance



LED String Lighting with White Cable

EWC120 LED WH
320 LEDs 25.6M LED String, Clear White

EWC120 LED WW
320 LEDs 25.6M LED String, Warm White

EWC120 LED BL
320 LEDs 25.6M LED String, Blue

EWC320 LED WH
320 LEDs 25.6M LED String, Clear White

EWC320 LED WW
320 LEDs 25.6M LED String, Warm White

EWC320 LED BL
320 LEDs 25.6M LED String, Blue

- 12 / 25.6M String
- 120 / 320 LEDs
- MAX 4 sets can be connected
- Voltage: 220-240v, 50Hz
- 2 Yr. Guarantee
- Easy Coupler Connections
- IP Rating IP44
- Available in Clear White, Warm White and Blue

Easy Coupler Connections






Outer Box
25.6M=4
12M=10

10000 Switching Cycle
Compatible
LED
30000 Life Time
** 90% Energy Saving
Instant Start
** >80 Ra Rendering Index

ErP COMPLIANT
UK CA
CE
RoHS COMPLIANT

A G

Scan for info

2 years Quality Assurance

IP44



LED 24v 25.6M String Lighting

LED-PL-320-25.6M-24V-BL
320 Head 24v 25.6M LED String Light, Blue

- 2 Yr. Guarantee
- IP Rating IP44
- 25.6M String Light
- 320 LEDs



LED 24v 25M String Lighting

E32024V-WH
24V 320 LEDs 25M LED String, Clear White

E32024V-WW
24V 320 LEDs 25M LED String, Warm White

- 320 LEDs
- 25.6M String Light
- MAX 2 sets can be connected
- Voltage: 24V, 50Hz
- 2 Yr. Guarantee
- IP Rating IP44
- Easy Coupler Connections
- Available in Clear White and Warm White

Outer Box 4

Scan for info

ErP COMPLIANT UK CA CE RoHS COMPLIANT

A↑G G

10000 Switching Cycle | Compatible | LED | 30000 Life Time

Instant Start | ** 90% Energy Saving | ** >80 Ra Rendering Index

Garden Wall Lights



Vintage Wall Lights



Ceiling Lights and Shaver Lights



Outdoor Bulkheads



Corrosion Proofs



Battens and Striplights



Emergency Lights



Weatherproof Sockets/Switches



LED Outdoor Bulkheads



LED Downlights



1. Returns
No goods will be accepted for return by SGD unless previously authorised in writing and a returns number has been issued. Any goods returned without an SGD returns number will be refused. Please contact the office on +353 1 8357447 or via email info@sgd.ie

2. Payment
Strictly 60 days following Month End on all approved accounts unless otherwise stated. Failure to pay within the agreed terms without prejudice to any of the seller's rights may result in suspension of deliveries of any goods to the buyer. We also reserve the right to forward your account to third party to commence with legal action.

3. Carriage
- All NI orders under £200 will be charged carriage at a cost of £9.50; orders over this value will be delivered FOC.
- All ROI orders under €300 will be charged carriage at a cost of €13.50; orders over this value will be delivered FOC.

4. Proof of Delivery
Our courier companies hold proof of delivery records for three months, therefore we cannot process claims for POD's later than three months from the date of invoice.

5. Damage Or Loss In Transit
In the event of goods being lost/short delivered or damaged in transit SGD must be informed in writing within 2 working days from the date of delivery. SGD must be notified in writing of the particulars of this, in order to validate a claim, quoting the picking list number.

6. Ownership
Ownership of all goods supplied not withstanding delivery to the purchaser shall remain the property of SGD Ltd until full payment has been received for the goods. In the event of a default in payment the company reserves the right to repossess the goods without final notice.

7. Faulty Goods
In the event that goods that have been supplied by SGD are deemed to be faulty, SGD shall replace these free of charge. SGD shall not be liable for any secondary costs incurred.

8. Dimensions
Although every care has been taken with the dimensions and specifications of each product, SGD can not be held responsible for any discrepancies.

COLOUR TEMPERATURE

Every light source has two distinct elements:

1) Brightness which is measured in lumens; this is the measure of the amount of light that is omitted from the product.
2) Colour temperature which is measured in kelvin and indicates how warm or cool the light is. Warmer lamps/LEDs have low kelvin numbers, cooler lamps/LEDs have high kelvin numbers.

WARM White **NATURAL** White **COOL** White

1000K 2000K 3000K 4000K 5000K 6000K 7000K

WARM White (<3800K)

WARM



Warmer whites are generally preferred for creating a more relaxed environment such as dining, living or reception areas.

NATURAL White (4000K)

NATURAL



Natural neutral white is a good choice for offices, retail or other commercial enviroments.

COOL White (>5000K)

COOL



Perfect for industrial and healthcare application settings.

Finding your LED Equivalent

LED	3W	5W	7W	9W	12W
INCANDESCENT	25W	40W	60W	75W	100W
HALOGEN	18W	28W	42W	55W	70W
LUMENS	200	400	600	800	1000
CFL	5W	8W	12W	15W	20W

Each light within our brochure has been given an appropriate IP rating; this relates to the degree of protection the light provides against solid objects and water ingress. IP ratings are relevant to anywhere that moisture is prevalent, such as bathrooms, utility rooms and exterior environments.
Written as IPxx, the first x defines the level of protection offered from dust; the second x defines the level of protection offered from moisture. The higher the numbers are, the better the protection will be.

Choose the right IP rating for your location

In most installations products with a rating of IP44 are suitable for the majority of locations. In certain circumstances a lower or higher rating can be used.

Example:

Products fitted in porches or recessed in soffits, a product with a rating of IP23 can be used as the product will receive protection from the property.



Solid Object Protection

1. Protected against solid object greater than 50mm (ie hand)
2. Protected against solid object greater than 12.5mm (ie finger)
3. Protected against solid object greater than 2.5mm (ie screwdriver)
4. Protected against a solid object greater than 1mm (ie a wire)
5. Dust protected. Limited ingress of dust permitted. Will not interfere with operation of the equipment.
6. Dust tight. No ingress of dust.

Moisture Protection

1. Protected against vertical falling drops of water. Limited ingress permitted.
2. Protected against vertical falling drops of water with enclosure tilted up to 15° from the vertical. Limited ingress permitted.
3. Protected against sprays of water up to 60° from the vertical. Limited ingress permitted.
4. Protected against water splashes from all directions. Limited ingress permitted.
5. Protected against jets of water. Limited ingress permitted.
6. Protected against powerful jets of water. Limited ingress permitted.
7. Watertight against the effects of immersion in water between 15cm and 1M for 30mins.
8. Watertight against the effects of immersion in water under pressure for long periods



ENERGY LABELS

Some new changes have come to the lighting market since 2021. They are determined by the new EU 2019/2020 Single Lighting Regulation (SLR) and the new EU 2019/2015 Energy Label Rating (ELR). The aim is to protect the environment, boost consumer protection and improve the sustainability of products. Modules, Lamps and Luminaires will now be referred to as Light Sources. Energy efficiency will only be evaluated for the light source going forward. Product data will be recorded on the EPREL (European Product Database for Energy Labelling). Based on the energy efficiency achieved, each light source will be given a new classification and a new label between A and G. Also, some products will no longer be allowed to be placed on the EU market.



Definition of Light Source: A light source is an electronically operated product that emits white light. This may be a lamp, module or luminaire with fully integrated components. Luminaires may be a light source (fully integrated luminaire) or may contain one or more light sources (containing product).



Exempt Products

Emergency Lighting, Battery Powered Light Sources, Original Artwork, Lighting for Military and Transport Equipment and Vehicles, Screens and Displays, Medical Equipment, Marine Equipment, Speciality or Niche Products, Luminaires with replaceable light Sources

Rollout of Changes


Sept 1 2021 — ***SLR (Single Lighting Regulation) entered into force in December 2019. It will apply from September 1 2021.***

Sept 1 2021 — ***All Light Sources placed on the market from September 1st, 2021 will require a new energy efficiency label in accordance with the regulation.***

March 1 2023 — ***Transition period of 18 months. Light sources that have been placed on the market by August 31st, 2021 may be sold with their old labels until March 1st, 2023. From March 2023, these products must be relabelled.***

New Re-Classified Energy

All Light Sources are now required to be listed in the EPRL database (European Product Database for Energy Labelling) from September 1, 2021 where they will be assessed and relabelled on the basis of ecological and sustainable aspects, among other things. All light sources will be reclassified. The QR Code links to product data information (fiche) which is stored in the EPRL database. SGD guarantees full registration of all its products.

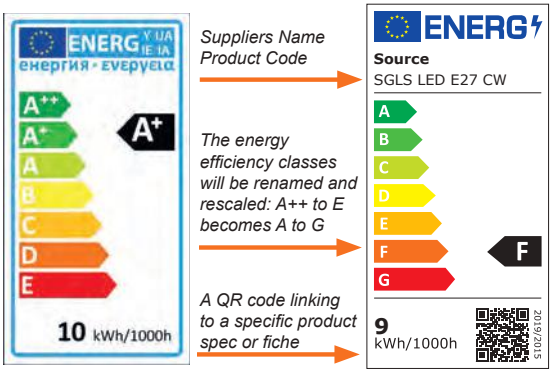

Old Label — New Label

Calculating the New class Formula

Lumen/Watt x Total Mains Factor = Class

Class Values	
≤85	→ G
85~110	→ F
110~135	→ E
135~160	→ D
160~185	→ C
185~210	→ B
≥210	→ A

Total Mains Factor

NDLS (unfocused light) directly connected to MLS =1.000

NDLS (unfocused light) not connected to MLS = 0.926

DLS (Bundled Light) directly connected to MLS (Mains) =1.176

DLS (Bundled Light) not directly connected to NMLS (non Mains) = 1.089

PRODUCT CODE	PAGE NO:
500.03	Page 158
3739	Page 155
201-GU10LH	Page 194
3731-BL	Page 160
3731-WH	Page 160
3732WALK	Page 154
3732WALK-SQ	Page 154
500.030-CH	Page 158
500.030LED-BE	Page 157
500.030LED-WH	Page 157
BB110	Page 153
BB65	Page 153
BULK 30W EMER	Page 125
BULK 30W PC EMER	Page 125
BULK LED 15W	Page 126
BULK LED 15W+PC	Page 126
BULK LED 30W	Page 123
BULK LED 30W+PC	Page 123
CB110	Page 153
CB65	Page 153
COM65SH-BR	Page 47
COM65SH-CH	Page 47
COM65SH-MC	Page 47
COM65SH-WH	Page 47
E MIC IP54	Page 209
E MIC REC	Page 211
E MIC SURF	Page 210
E MICRO	Page 209
E-BRI-BL	Page 165
E-BRI-WH	Page 165
E1030-WH	Page 156
E10PEN-WH	Page 156
E120LED-BE	Page 218
E120LED-CC+CON	Page 218
E120LED-GN	Page 218
E120LED-RD	Page 218
E120LED-WH	Page 218
E120LED-WW	Page 218
E12LED	Page 163
E13WLED OVAL-BL-CW	Page 129
E13WLED OVAL-BL-WW	Page 129
E13WLED OVAL-WH-CW	Page 129
E13WLED OVAL-WH-WW	Page 129
E240CARB	Page 214
E240VHD	Page 215
E26EYE-BL	Page 130
E26EYE-WH	Page 130
E26OVAL-BL	Page 130
E26OVAL-WH	Page 130
E2LED-BE	Page 164
E2LED-WH	Page 164
E32024V-WH	Page 224
E32024V-WW	Page 224
E320LED-BE	Page 219
E320LED-CC+CON	Page 219
E320LED-GN	Page 219
E320LED-RD	Page 219
E320LED-WH	Page 219
E320LED-WW	Page 219
E3TCON	Page 174
E5LED-BL	Page 161
E5LED-WH	Page 161
E5M80LEDICE-CW	Page 221
E5M80LEDICE-WW	Page 221

PRODUCT CODE	PAGE NO:
E60WLED DRIVER	Page 21
E6MINILED-WH	Page 162
E6MINILED-WW	Page 162
EBL-DN	Page 143
EBL-UP/DN	Page 141
EBL-UP/DN-PIR	Page 142
EBO	Page 193
ECAVE	Page 145
ECH-DN	Page 143
ECH-UP/DN	Page 141
ECH-UP/DN-PIR	Page 142
ECIR	Page 147
ECO	Page 193
ECOFLAR	Page 172
ECOFMIN	Page 172
ECUBE	Page 148
ECURT 2X2-BE	Page 221
ECURT 2X2-WH	Page 221
ECURT 2X2-WW	Page 221
EDB6504	Page 197
EDB6508	Page 197
EDB6512	Page 197
EDB6518	Page 197
EDB6524	Page 197
EDC GZDL-CH	Page 51
EDC GZDL-MC	Page 51
EDC GZDL-WH	Page 51
EDC GZTL-CH	Page 51
EDC GZTL-MC	Page 51
EDC GZTL-WH	Page 51
EDLCON-CH	Page 46
EDLCON-MC	Page 46
EDLCON-WH	Page 46
EFST	Page 195
EGARCON	Page 173
EGZDL-MC	Page 50
EGZDL-WH	Page 50
EIP551G2W	Page 187
EIP552G2W	Page 187
EIP553G2W	Page 187
EIP554G2W	Page 187
EJBMIN-BL	Page 191
EJBMIN-GR	Page 191
EJBS1-BL	Page 191
EJBS1-GR	Page 191
EJBS2-BL	Page 191
EJBS2-GR	Page 191
EMC-1G-BB-N-KO	Page 186
EMC-1G-PR-SW	Page 183
EMC-1G-SW	Page 181
EMC-1G-SW-SOC	Page 180
EMC-20A-SW-NE-FL	Page 185
EMC-2G-BB-N-KO	Page 186
EMC-2G-SW	Page 181
EMC-2G-SW-SOC	Page 180
EMC-3G-SW	Page 182
EMC-45A-SW-NE	Page 185
EMC-4G-SW	Page 182
EMC-SP	Page 183
EMC-SP-NE	Page 184
EMC-SP-NE-FL	Page 184
EOB	Page 189
EOD BELL	Page 179
EOD1G	Page 176

PRODUCT CODE	PAGE NO:
EOD1G2W	Page 178
EOD1GEMP	Page 188
EOD2G	Page 175
EOD2G-BL	Page 175
EOD2G2W	Page 178
EOD2GCL	Page 176
EOD2GEMP	Page 188
EODRCD	Page 177
EODSPUR	Page 177
ER100B	Page 131
ER100B-BL	Page 131
ERB 70X40	Page 190
ESLIM	Page 144
ESOL2.5W-BL	Page 150
ESOL2.5W-WH	Page 150
ESOL3.5W-BL	Page 150
ESOL3.5W-WH	Page 150
ESOL7.5W-BL	Page 150
ESOL7.5W-WH	Page 150
ESOLPIR12W-BL	Page 151
ESOLPIR12W-WH	Page 151
ESOLPIR8W-BL	Page 151
ESOLPIR8W-WH	Page 151
ESPPVC	Page 159
ESQB2	Page 190
ESQB3	Page 190
ESQB3-PL	Page 190
ESQB4-PL	Page 190
ESQB5-PL	Page 190
ESQB6-PL	Page 190
ESTCON	Page 174
ET-LAG IP65	Page 198
ET-LAG LED	Page 199
ETST	Page 195
EWAL UP	Page 138
EWAL UP-DN	Page 140
EWAL UP-PIR	Page 139
EWC320LED-BL	Page 223
EWC320LED-CC+CON	Page 223
EWC320LED-RD	Page 223
EWC320LED-WH	Page 223
EWC320LED-WW	Page 223
EXB-RMD	Page 54
EXB-RML	Page 54
EXB-RMR	Page 54
EXB-RMU	Page 54
G100	Page 25
G60	Page 25
GZPVC	Page 45
JB902	Page 192
JB904	Page 192
JB906	Page 192
JB910	Page 192
JB925	Page 192
KC2SL	Page 196
KC3SL	Page 196
LED-PL-320-25.6M-24V-BL	Page 224
LV RET	Page 194
MINI-PEC	Page 208
PEC-HEAD	Page 208
PEC-KIT	Page 208
RC-HB	Page 99
RL-BELED	Page 220
RL-GRLED	Page 220

PRODUCT CODE	PAGE NO:
RL-RDLED	Page 220
RL-WHLED	Page 220
RL-WWLED	Page 220
S DALI DR	Page 4
S-RIB-5M 5W-RGB	Page 23
S-RIB-5W 14W-CW	Page 21
S-RIB-5W 14W-WW	Page 21
S-RIB-5W 5W-CW	Page 22
S-RIB-5W 5W-WW	Page 22
S100B-BL	Page 132
S100B-WH	Page 132
S100W SPIG	Page 114
S100WOR	Page 114
S110V FES 22M	Page 134
S110V FES 50M	Page 134
S12VCOB5W-CW	Page 74
S12VCOB5W-WW	Page 74
S14-5W-WW	Page 95
S14-8W-WW	Page 95
S14E27-WW	Page 90
S15-4W 221-WW	Page 93
S15-4W-221-CW	Page 93
S15-6W 284-WW	Page 93
S15-6W-284-CW	Page 93
S19-9W-CW	Page 93
S19-9W-WW	Page 93
S22WTW2FT	Page 110
S2DMW	Page 16
S2DMW-EM	Page 17
S2DMW-EM-SENS	Page 17
S2DMW-SENS	Page 17
S35WSIN5FT	Page 110
S46WTW4FT	Page 110
S4W-SMD-CW	Page 70
S4W-SMD-NW	Page 70
S4W-SMD-WW	Page 70
S50W SPIG	Page 114
S50WOR	Page 114
S55W EME M SENS	Page 109
S55W M SENS	Page 109
S55WTW5FT	Page 109
S55WTW5FT-EM	Page 109
S5W-SMD-NW	Page 73
S5WSMDDIM-CW	Page 73
S5WSMDDIM-WW	Page 73
S65BAT 5FT	Page 111
S6W-GLS-B22-CW	Page 77
S6W-GLS-B22-WW	Page 77
S6W-GLS-E27-WW	Page 77
S6W-SMD-CW	Page 71
S6W-SMD-NW	Page 71
S6W-SMD-WW	Page 71
S6WCOB GU10-CW	Page 72
S6WCOB GU10-WW	Page 72
S7 CIR	Page 128
S70WTW6FT	Page 110
S9WLED-WH	Page 18
SA70 19W B22 CW	Page 80
SA70 19W B22 WW	Page 80
SA70 19W E27 CW	Page 80
SA70 19W E27 WW	Page 80
SA70 LED-B22 CW	Page 79
SA70 LED-B22 WW	Page 79
SA70 LED-E27 CW	Page 79

PRODUCT CODE	PAGE NO:
SA70 LED-E27 WW	Page 79
SAD-PIR-BL	Page 205
SAD-PIR-WH	Page 205
SADCO-CCT	Page 36
SBAT-20W	Page 11
SBAT-30W	Page 11
SBAT-40W	Page 12
SBAT-50W	Page 12
SBHOV-BL-PIR	Page 127
SBHOV-WH-PIR	Page 127
SBM-CH	Page 29
SBM-WH	Page 29
SBOL 450	Page 152
SBOL 750	Page 152
SBTMW4	Page 10
SBTMW4-EM	Page 10
SBTMW5	Page 9
SBTMW5-EM	Page 9
SBTMW6	Page 10
SCAND LED-B15D	Page 75
SCAND LED-B15D CW	Page 75
SCAND LED-B22	Page 75
SCAND LED-B22 CW	Page 75
SCAND LED-E14	Page 75
SCAND LED-E14 CW	Page 75
SCAND LED-E27	Page 75
SCAND LED-E27 CW	Page 75
SCB -MC-CW	Page 20
SCB -MC-WW	Page 20
SCB -WH-CW	Page 20
SCB -WH-WW	Page 20
SCF-DCAN-BC	Page 84
SCF-DCAN-ES	Page 84
SCF-DCAN-SBC	Page 84
SCF-DCAN-SES	Page 84
SCF-DGLS B22	Page 83
SCF-DGLS E27	Page 83
SCIR BL EYE	Page 118
SCIR BL EYE	Page 118
SCIR SEN BL/WH CCT	Page 120
SCIRLED BL/WH CCT	Page 118
SCP2FTMW-CCT	Page 107
SCP4FTMW-CCT	Page 107
SCP6FTMW-CCT	Page 106
SCP6FTMW-CCT-EM	Page 106
SCPFTMW-CCT-EM	Page 106
SCPFTMW-CCT-SEN	Page 106
SCPMW-CCT	Page 105
SCURV-DV-CH	Page 27
SCURV-DV-WH	Page 27
SD CAN-B15D-CW	Page 81
SD CAN-B15D-WW	Page 81
SD CAN-B22-CW	Page 81
SD CAN-B22-WW	Page 81
SD CAN-E14-CW	Page 81
SD CAN-E14-WW	Page 81
SD CAN-E27-CW	Page 81
SD CAN-E27-WW	Page 81
SDV-SOC-BL	Page 200
SDV-SOC-WH	Page 200
SDVSL-LED-CH	Page 26
SDVSL-LED-WH	Page 26
SDVSL-S15	Page 28
SE27GOLF-BE	Page 222

PRODUCT CODE	PAGE NO:
SE27GOLF-GR	Page 222
SE27GOLF-RD	Page 222
SE27GOLF-WH	Page 222
SE27GOLF-WW	Page 222
SE27GOLF-YW	Page 222
SEM SM BH P04	Page 60
SEM-BH P04	Page 59
SEM-BH P04-ST	Page 58
SEM-BL EXB	Page 56
SEM-CH EXSIGN	Page 63
SEM-DD	Page 61
SEM-EXB P04	Page 55
SEM-EXB P04-ST	Page 54
SEM-EXS RK	Page 61
SEM-EXSIGN	Page 62
SEM-REDL	Page 65
SEM-RK	Page 61
SEM-SL-EXB P04	Page 57
SEM-SWDL	Page 66
SEM-TWSP P04	Page 64
SFD 10W BL	Page 104
SFD 10W PIR BL	Page 105
SFD 10W PIR WH	Page 105
SFD 10W WH	Page 104
SFD 20W BL	Page 104
SFD 20W PIR BL	Page 105
SFD 20W PIR WH	Page 105
SFD 20W WH	Page 104
SFD 30W BL	Page 104
SFD 30W PIR BL	Page 105
SFD 30W PIR WH	Page 105
SFD 30W WH	Page 104
SFD 50W BL	Page 104
SFD 50W PIR BL	Page 105
SFD 50W PIR WH	Page 105
SFD 50W WH	Page 104
SFES10M	Page 222
SFES25M	Page 222
SFES5M-PLS	Page 149
SFL 10W-20W BL	Page 103
SFL 10W-20W WH	Page 102
SFL 30W-50W BL	Page 103
SFL 30W-50W WH	Page 103
SFL 50W-70W-100W BL	Page 102
SFL 50W-70W-100W WH	Page 102
SFL-DCAN-B15D	Page 85
SFL-DCAN-B22	Page 85
SFL-DCAN-E14	Page 85
SFL-DCAN-E27	Page 85
SFL-DG95-B22	Page 87
SFL-DG95-E27	Page 87
SFL-DGLS-B22	Page 86
SFL-DGLS-E27	Page 86
SFL-DST64-B22	Page 88
SFL-DST64-E27	Page 88
SFL-DT25-E14	Page 89
SFLMW	Page 101
SFR 5.5W-MC-CCT	Page 43
SFR 5.5W-WH-CCT	Page 43
SFR 6W-WH-CCT	Page 41
SFR TL 5.5W-MC-CCT	Page 42
SFR TL 5.5W-WH-CCT	Page 42
SG4 12V 1.5W LED-WW	Page 91
SG9 3W LED-WW	Page 91

GLOSSARY

PRODUCT CODE	PAGE NO:
SG9 FIL 2W WW	Page 91
SGD 1236	Page 213
SGLS LED B22	Page 78
SGLS LED B22-C/W	Page 78
SGLS LED E27	Page 78
SGLS LED E27-C/W	Page 78
SGLS-DIM-B22 WW	Page 82
SGLS-DIM-E27 WW	Page 82
SGOLF LED-B15D	Page 76
SGOLF LED-B15D C/W	Page 76
SGOLF LED-B22	Page 76
SGOLF LED-B22 C/W	Page 76
SGOLF LED-E14	Page 76
SGOLF LED-E14 C/W	Page 76
SGOLF LED-E27	Page 76
SGOLF LED-E27 C/W	Page 76
SGUFR-MC	Page 44
SGUFR-WH	Page 44
SHBMW	Page 99
SHBMW-EM	Page 100
SHBSENS	Page 99
SIS-125-4P	Page 170
SIS-20-4P-LA	Page 168
SIS-20-4P-SM	Page 169
SIS-25-4P-DC	Page 171
SIS-32-4P-LA	Page 168
SIS-32-4P-SM	Page 169
SIS-40-4P-DC	Page 171
SIS-40-4P-LA	Page 168
SIS-40-4P-SM	Page 169
SIS-63-4P	Page 168
SIS-80-4P	Page 170
SL-GZ-RET	Page 194
SL-GZDL-AB	Page 48
SL-GZDL-BR	Page 48
SL-GZDL-CH	Page 48
SL-GZDL-MC	Page 48
SL-GZDL-WH	Page 48
SL-GZTL-AB	Page 49
SL-GZTL-BR	Page 49
SL-GZTL-CH	Page 49
SL-GZTL-MC	Page 49
SL-GZTL-WH	Page 49
SLED-DIM	Page 199
SLED-DIM-MC	Page 199
SLED2G-DIM	Page 199
SLED2G-DIM-MC	Page 199
SLEDMOD-DIM	Page 199
SLIM 12W CCT	Page 15
SLIM 18 EM CCT	Page 15
SLIM 18 EMSENS CCT	Page 15
SLIM 18 SENS CCT	Page 15
SLIM 18W CCT	Page 15
SLIM 30W CCT	Page 15
SLIM-SQ 12W CCT	Page 14
SLIM-SQ 18W CCT	Page 14
SLIM-SQ 30W CCT	Page 14
SLIM-UP/DN	Page 146
SLIM-UP/DN-BL	Page 146
SLIM-UP/DN-WH	Page 146
SOL CCT BL	Page 115
SOL CCT WH	Page 115
SOV BL EYE	Page 117
SOV BL EYE	Page 117

PRODUCT CODE	PAGE NO:
SOV SEN BL/WH CCT	Page 119
SOVLED BL/WH CCT	Page 117
SPAN-CCT	Page 6
SPAN-EM	Page 8
SPAN-ST-CCT	Page 7
SPAN-SURF FRAME	Page 8
SPAR 38 15-CW	Page 94
SPAR 38 15-WW	Page 94
SPFR6W	Page 38
SPFR9W	Page 37
SPIR 3MOD-BL	Page 206
SPIR 3MOD-WH	Page 206
SPVC 10W BL DIM-CCT	Page 33
SPVC 10W-DIM-CCT	Page 33
SPVC 14W DIM-CCT	Page 34
SPVC 17W DIM-CCT	Page 34
SPVC 25W DIM-CCT	Page 35
SPVC 7W BL DIM-CCT	Page 32
SPVC 7W-DIM-CCT	Page 32
SPVC TR-10W	Page 33
SPVC TR-10W BL	Page 33
SPVC TR-14W	Page 34
SPVC TR-17W	Page 34
SPVC TR-20W	Page 35
SPVC TR-7W	Page 32
SPVC TR-7W-BL	Page 32
SPVC UP/DN GU10	Page 159
SR50 LED-CW	Page 92
SR50 LED-WW	Page 92
SR63 LED-CW	Page 92
SR63 LED-WW	Page 92
SR80 LED-CW	Page 92
SR80 LED-WW	Page 92
SRIB2MST	Page 24
SRIBCON	Page 21
SROU CCT BL	Page 116
SROU CCT WH	Page 116
SRS-PIR	Page 207
SSCH58W5FT	Page 4
SSCH58W5FT-DA	Page 4
SSCH58W5FTEM	Page 5
SSL20W	Page 133
STC-MC-CW	Page 19
STC-MC-WW	Page 19
STC-WH-CW	Page 19
STC-WH-WW	Page 19
STL-100W PC CCT	Page 113
STL-50W PC CCT	Page 112
STRIP 10W CCT	Page 13
STRIP 14W CCT	Page 13
STRIP 3W CCT	Page 13
STRIP 4W CCT	Page 13
STRIP 8W CCT	Page 13
SWP	Page 121
SWP-EM	Page 122
SWP-EM PC	Page 122
SWP-PC	Page 121
SWV PIR BL	Page 204
SWV PIR WH	Page 204
SWV5WFRMC	Page 40
SWV5WFRWH	Page 40
SWV7WFRMC	Page 39
SWV7WFRWH	Page 39
VST-BASE	Page 215


SGD
source
eclipse
Solas Geal Distribution
SGD Trade Counter
SGD
eclipse
Solas Geal Distribution
SGD Trade Counter







Unit 7/8 Ashbourne Business Centre, Ballybin Road, Ashbourne, Co. Meath, Ireland. A84 YP58
Tel: +353 (1) 835 7447 **Email:** info@sgd.ie

www.sgd.ie