



WORLD LEADER  
IN CONTINUOUS ANODISING

STANDARD MILL FINISH




NATURAL



ZINC 10



GOLD 20

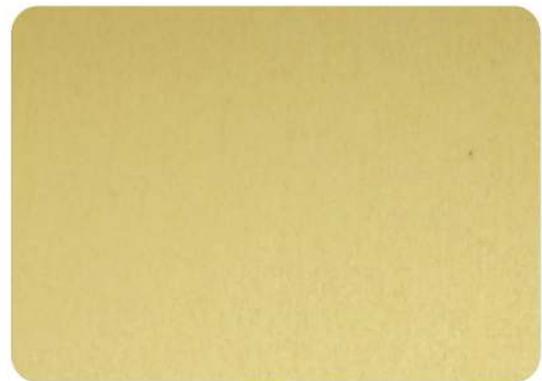

GOLD 40



COPPER 30



COPPER 50



BRONZE 30



BRONZE 85

BRITE



NATURAL



CHAMPAIGN



GOLD 20



GOLD 40



COPPER 30



COPPER 50




BRONZE 30



BRONZE 85

BRUSHED

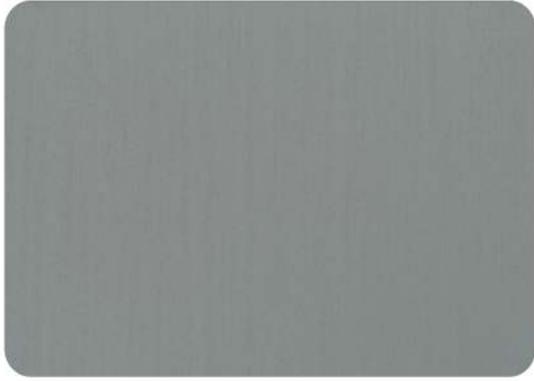

ZINC NATURAL



STAINLESS STEEL



GOLD 20



GOLD 40



COPPER 30



COPPER 50



BRONZE 30



BRONZE 85



ALUMINIUM ALLOYS USED 1000, 3000, 5000 and 6000-series  
CONTINUOUS ANODISING

Coil Width	1000mm - 2000 mm (39.40" - 78.80")
Metal Thickness	0,3mm - 3,50mm (0.012" to 0.138")
Anodic Layer Thickness	Less than 1µm - 25µm (0.000039" - 0.001")
Coil Weight	Maximum 6,000 kg (13,224 lbs) to 10,000 kg (22,040 lbs) per line specification

ISO certified in quality management ISO 9001  
ISO certified in quality management ISO 50001  
ISO certified in quality management ISO 14001


Coil NV/S.A.  
Roosveld 5  
B-3400 Landen  
BELGIUM

Coil GmbH  
Claude-Breda-Straße 1  
D-06406 Bernburg / Saale  
GERMANY



[architect.helpline.support@coil.be](mailto:architect.helpline.support@coil.be)  
[international.sales@coil.be](mailto:international.sales@coil.be)

[www.coil.be](http://www.coil.be)

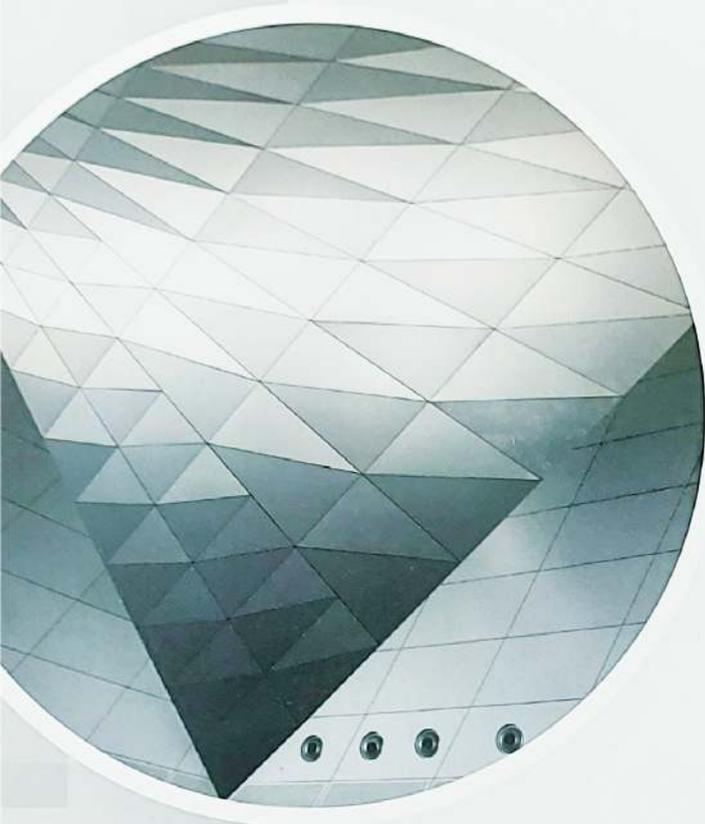

PRODUCTS

C-Bond  
C-Brite  
C-Brush  
C-Deco  
C-Flex  
C-Iconic  
C-Wall  
C-Tech

All colours are usable for all our products.

All products and colours are also available in perforated pattern.

Install panels in the same direction to avoid orientation differences.

Order project in one batch to avoid colour differences.