

Quick Guide for

Hot-Selling Distribution Products

2026



CONTENTS

01 CCTV

- 01 CCTV Highlights
- 04 Network Cameras
 - Pro Series
 - Value Series
 - PTZ Cameras
 - AOV SolarVu Cameras
 - Cable Free Series
- 15 Thermal
- 16 NVR
- 19 Turbo HD
- 22 DVR

23 NON-CCTV

- 23 Networking
- 26 Premises Distribution System
- 29 Video Intercom
- 32 Wireless Alarm System
- 36 People and Vehicle Access Control
- 42 Audio
- 45 Commercial Displays

47 SMB SOLUTIONS

- 48 SMB Solution for Condominiums
- 50 SMB Solution for Shops
- 52 SMB Solution for Offices
- 54 SMB Solution for Villas

56 ABOUT HIKVISION

Cloud-Based Unified Management



Hik-Partner Pro

Security Business Assistant. At Your Fingertips.

Seamless delivery just via mobile app


- Automated device discovery in LAN
- Automated device setup
- Easy handover to end users

Remote maintenance improves efficiency



Remote parameter configuration, firmware upgrading, and password resetting

Subscription services for ongoing revenues

- Health monitoring
- Subscription plan management

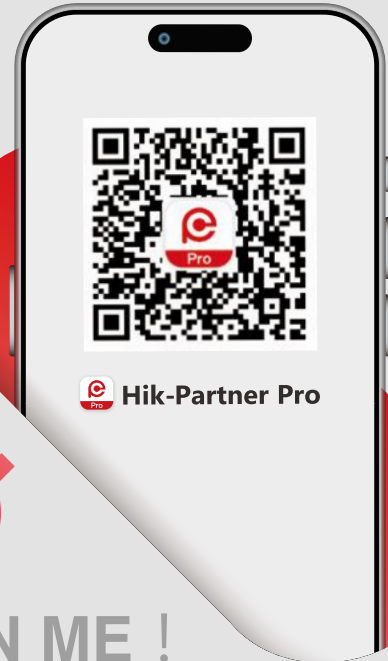

SCAN ME !

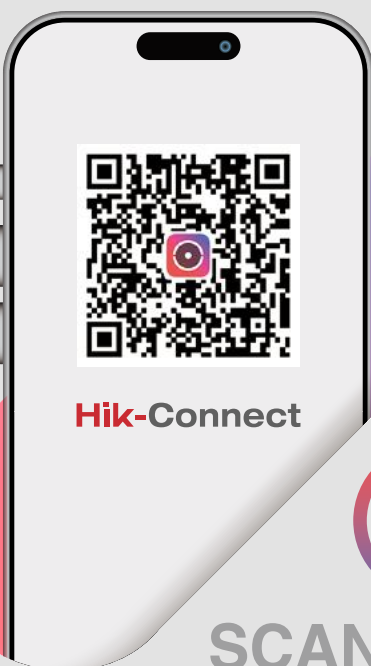

Hik-Connect

Unified Security, From Residence to Business

Team Mode for SMB & enterprise use

- Accessible via web portal / mobile app
- Streamlined multi-site management
- Precise role-based permissions
- Serverless deployment & scalability
- Seamless integration with OpenAPI

Personal Mode for individual use

- Interact with taps and swipes
- Remote management on the go
- Accurate and timely notifications
- Stay secure with all data encrypted



SCAN ME !

CCTV Highlights

Guanlan Encoding

Guanlan Encoding brings Hikvision's Guanlan large AI model directly into the video encoding pipeline – cutting storage costs by 30%–50% on average without compromising the clarity of critical objects like people and vehicles. Built on the H.265 international standard, Hikvision's products remain fully interoperable with third-party devices.



Dynamic Stitching

It delivers a flawless view without a seam, even at close range (from 1 to 5 meters).



Ultra-High Definition

ULTRA HD


16 MP and 12 MP ultra-high-definition cameras deliver clear video output, enabling the capture of extremely detailed images.



AOV SolarVu




- 24/7 recording with low power & storage consumption, ensuring extended battery
- Solar power enables cable-free deployment for off-grid locations
- 4G connectivity delivers reliable transmission with less consumption



ColorVu 3.0



It delivers brighter, clearer, and more vivid 24/7 color imaging through advanced sensors, lenses, AI algorithms, and Active Alignment.



Noise Reduction



Color Accuracy



Image Clarity



More Details



Audio 2.0



Arrayed Dual-Mic reduces noise, enhancing audio quality. Smart PA speaker provides a wider sound coverage and better warning and two-way audio effect.



SoundMax

Enables powerful alarms to deter trespassers more effectively, which have a longer range than standard ones.



Dual-Lens Point-to-Point Zoom Camera

It delivers two independent channels through a camera, with each lens offering 2.8 mm and 4 mm focal lengths via Point-to-Point Zoom for flexible deployment.



PTRZ

Remote pan, tilt, rotation, and zoom can be controlled locally, via web or app, with less on-site adjustment and maintenance.



Point-to-Point Zoom

Two focal lengths (2.8 mm & 4 mm) in one lens adapt to wider security requirements. No hard choices between multiple SKUs help simplify selection, stocking, and installation.



Auto Tracking

With it, cameras automatically detect and continuously track a person for long-range details.



CCTV Highlights

Dual-Lens PT Camera

It integrates panorama and 8x zoomed-in details simultaneously. It also enables front-and-rear security at the same time, delivering a 360° coverage.



AI Focus

It automatically learns and adapts to the surroundings. It delivers instant sharp focus as the camera remembers perfect settings for each security position.



Easy-to-Use DVRs & NVRs

Easy Installation

HDD plug-and-play design: No wiring required for HDD installation.

5-step startup wizard: Complete device activation in just 5 steps within 1 minute. The interface is intuitive and easy to operate.



Easy Configuration

Effortless plug-and-play: Eliminates complex, time-consuming configurations when adding IP cameras.

Multi-platform camera setup: Configure cameras across multiple platforms with ease.



Easy Operation

Smart video stream management: Say goodbye to "insufficient decoding resources." Adaptive stream adjustment enables live viewing of all channels in one view.

One-click activation/deactivation: Users can quickly enable or disable the alarm linkage with simple operation across multiple platforms.



Easy Maintenance

Retrieve & reset passwords in seconds: Hikvision provides several easy ways to retrieve passwords.

OTA: Over-the-air upgrades for the EUI of NVRs and DVRs ensure that users can easily receive the latest system upgrades across multiple platforms.



Network Cameras - Pro Series

Pro Series Cameras with ColorVu 3.0



DS-2CD20X763-LI(2U)Y
DS-2CD20X763-LI2UY/S(L)(RB)

- X=4/6/8 MP
- ColorVu 3.0 with HIKAI-ISP, 0.0001 Lux
- Smart Hybrid Light, up to 40 m IR & white light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Tamper-free & eco-friendly packaging



DS-2CD21x763-LIY
DS-2CD21x763-LIS2UY

- X=4/6/8 MP
- ColorVu 3.0 with HIKAI-ISP, 0.0001 Lux
- Smart Hybrid Light, up to 30 m IR & white light
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available (-S models)
- Tamper-free & eco-friendly packaging



DS-2CD23x763-LI(2U)Y
DS-2CD23x763-LIS2UY/S(L)(RB)

- X=4/6/8 MP
- ColorVu 3.0 with HIKAI-ISP, 0.0001 Lux
- Smart Hybrid Light, up to 30 m IR & white light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Audio and alarm interface available (-S models)
- Tamper-free & eco-friendly packaging



DS-2CD2Tx763-LIY
DS-2CD2Tx763-LIS2UY/S(L)(RB)

- X=4/6/8 MP
- ColorVu 3.0 with HIKAI-ISP, 0.0001 Lux
- Smart Hybrid Light, up to 60 m IR & white light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion resistant, IP67
- Audio and alarm interface available (-S models)
- Tamper-free & eco-friendly packaging



DS-2CD26x763-LIZSY
DS-2CD26x763-LIZS2UY/S(L)(RB)

- X=4/6/8 MP, 2.8-12 mm vari-focal
- ColorVu 3.0 with HIKAI-ISP, 0.0005 Lux
- Smart Hybrid Light, up to 60 m IR & white light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available
- Tamper-free & eco-friendly packaging



DS-2CD2Hx763-LIZSY
DS-2CD2Hx763-LIZS2UY/S(L)(RB)

- X=4/6/8 MP, 2.8-12 mm vari-focal
- ColorVu 3.0 with HIKAI-ISP, 0.0005 Lux
- Smart Hybrid Light, up to 40 m IR & white light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available
- Tamper-free & eco-friendly packaging



DS-2CD27X763-LIPTRZSY
DS-2CD27X763-LIPTRZS2UY/S(L)(RB)

- X=8/6/4 MP, ColorVu 3.0 with HIKAI-ISP
- Motorized Pan, Tilt, Rotate, Zoom for easy installation and maintenance
- Smart Hybrid Light, up to 40 m white & IR light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available
- Tamper-free & eco-friendly packaging

Pro Series PTRZ Cameras



DS-2CD214663-IPTRZY
DS-2CD214663-IPTRZS2UY

- Motorized Pan, Tilt, Rotate, Zoom for easy installation and maintenance
- 2.8/4 mm Point-to-Point Zoom
- Anti-reflective & compact design
- Powered by DarkFighter & HIKAI-ISP, up to 30 m IR light
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available (-S models)
- Tamper-free & eco-friendly packaging



DS-2CD214362-IPTRZY
DS-2CD214362-IPTRZS2UY

- Motorized Pan, Tilt, Rotate, Zoom for easy installation and maintenance
- 2.8/4 mm Point-to-Point Zoom
- Anti-reflective & compact design
- Smart Hybrid Light, up to 30 m IR & white light
- AcuSense 3.0, Audio 2.0 (-2U models), 120 dB WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available (-S models)



DS-2CD27X663-IPTRZSY
DS-2CD27X663-IPTRZS2UY/S(L)(RB)

- X=16/12/8/6/4 MP, Powered by DarkFighter & HIKAI-ISP, up to 40 m IR light
- Motorized Pan, Tilt, Rotate, Zoom for easy installation and maintenance
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available
- Tamper-free & eco-friendly packaging

Network Cameras - Pro Series

Pro Series Ultra HD Cameras



NEW

ULTRA HD CORROSION RES STANF+

DS-2CD20X663-I(U)Y
DS-2CD20X663-IUY/S(L)(RB)

- X=16/12 MP ultra-high definition
- Powered by DarkFighter & HIKAI-ISP, up to 40 m IR light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Tamper-free & eco-friendly packaging



NEW

ULTRA HD CORROSION RES STANF+

DS-2CD23X663-I(2U)Y
DS-2CD23X663-I2UY/S(L)(RB)

- X=16/12 MP ultra-high definition
- Powered by DarkFighter & HIKAI-ISP, up to 30 m IR light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Tamper-free & eco-friendly packaging



NEW

ULTRA HD CORROSION RES STANF+

DS-2CD2TX663-2I(2U)Y/4I(2U)Y
DS-2CD2TX663-IS2UY/S(L)(RB)

- X=16/12 MP ultra-high definition
- Powered by DarkFighter & HIKAI-ISP, -2I/4I: up to 60/80 m IR light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Audio and alarm interface available (-S models)
- Tamper-free & eco-friendly packaging



NEW

ULTRA HD CORROSION RES STANF+

DS-2CD26X663-IZSY
DS-2CD26X663-IZS2UY/S(L)(RB)

- X=16/12 MP, 2.8-12 mm vari-focal
- Powered by DarkFighter & HIKAI-ISP, up to 60 m IR light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available
- Tamper-free & eco-friendly packaging



NEW

ULTRA HD PTRZ

DS-2CD27X663-IPTRZSY
DS-2CD27X663-IPTRZS2UY/S(L)(RB)
DS-2CD27X663-IPTRZS2UY/S(L)(RB)

- X=16/12 MP, 2.8-12 mm vari-focal
- Motorized Pan, Tilt, Rotate, Zoom for easy installation and maintenance
- Powered by DarkFighter & HIKAI-ISP, up to 40 m IR light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available
- Tamper-free & eco-friendly packaging



NEW

ULTRA HD CORROSION RES STANF+

DS-2CD2HX663-IZSY
DS-2CD2HX663-IZS2UY/S(L)(RB)

- X=16/12 MP, 2.8-12 mm vari-focal
- Powered by DarkFighter & HIKAI-ISP, up to 40 m IR light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion resistant, IP67, IK10
- Audio and alarm interface available
- Tamper-free & eco-friendly packaging



NEW

ULTRA HD CORROSION RES STANF+

DS-2CD2012362-LI(U)Y
DS-2CD2012362-LIUY/S(L)(RB)

- 12 MP ultra-high definition
- Smart Hybrid Light, up to 40 m IR and white light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, 120 dB WDR
- NEMA 4X corrosion-resistant, IP67



NEW

ULTRA HD CORROSION RES STANF+

DS-2CD2312362-LI(2U)Y
DS-2CD2312362-LI2UY/S(L)(RB)

- 12 MP ultra-high definition
- Smart Hybrid Light, up to 30 m IR and white light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 120 dB WDR
- NEMA 4X corrosion-resistant, IP67



NEW

ULTRA HD CORROSION RES STANF+

DS-2CD2T12362-2LI(2U)Y/4LI(2U)Y
DS-2CD2T12362-LIS2UY/S(L)(RB)

- 12 MP ultra-high definition
- Smart Hybrid Light, -2I/4I: up to 60/80 m IR & white light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 120 dB WDR
- NEMA 4X corrosion-resistant, IP67
- Audio and alarm interface available (-S models)



NEW

ULTRA HD CORROSION RES STANF+

DS-2CD2612362-LIZS2UY
DS-2CD2612362-LIZS2UY/S(L)(RB)

- 12 MP, 2.8-12 mm vari-focal
- Smart Hybrid Light, up to 60 m IR & white light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0, 120 dB WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available



NEW

ULTRA HD CORROSION RES STANF+

DS-2CD2712362-LIZS2UY

- 12 MP, 2.8-12 mm vari-focal
- Smart Hybrid Light, up to 40 m IR & white light
- AcuSense 3.0, Audio 2.0, 120 dB WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available



NEW

ULTRA HD CORROSION RES STANF+

DS-2CD2H12362-LIZS2UY
DS-2CD2H12362-LIZS2UY/S(L)(RB)

- 12 MP, 2.8-12 mm vari-focal
- Smart Hybrid Light, up to 40 m IR & white light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0, 120 dB WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available

Network Cameras – Pro Series

Pro Series UHD Dual-Lens 180° Cameras



DS-2CD23X7G3P-LIS2UY/S(L)(RB)

- X=16/12/8/6/4 MP, 180° panoramic view with 20:9 ratio
- Dynamic Stitching: seamless stitching even at close range (for 16/12/8 MP)
- ColorVu with Smart Hybrid Light, up to 30 m white & IR light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0, 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Audio and alarm interface available
- Tamper-free & eco-friendly packaging



DS-2CD2TX7G3P-LIS2UY/S(L)(RB)

- X=16/12/8/6/4 MP, 180° panoramic view with 20:9 ratio
- Dynamic Stitching: seamless stitching even at close range (for 16/12/8 MP)
- ColorVu with Smart Hybrid Light, up to 40 m white & IR light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0, 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Audio and alarm interface available
- Tamper-free & eco-friendly packaging

Pro Series Smart Hybrid Light Cameras



**DS-2CD20X3G3-LIY
DS-2CD20X3G3-LI2UY
DS-2CD20X3G3-LI2UY/SX**

- X=4/6/8 MP
- Smart Hybrid Light, up to 40 m IR & white light
- Strobe Light & Audio Alarm: white light mode and red-blue light mode in one (/SX models)
- AcuSense 3.0: person and vehicle classification based on deep learning
- Audio 2.0: crystal-clear audio with Arrayed Dual-Mic and Smart PA Speaker (-2U models)
- 120 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Tamper-free packaging



**DS-2CD21X3G3-LIY
DS-2CD21X3G3-LIS2UY**

- X=4/6/8 MP
- Smart Hybrid Light, up to 30 m IR & white light
- AcuSense 3.0: person and vehicle classification based on deep learning
- Audio 2.0: crystal-clear audio with Arrayed Dual-Mic and Smart PA Speaker (-2U models)
- 120 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available (-S models)
- Tamper-free packaging



**DS-2CD23X3G3-LIY
DS-2CD23X3G3-LI2UY
DS-2CD23X3G3-LI2UY/SX**

- X=4/6/8 MP
- Smart Hybrid Light, up to 30 m IR & white light
- Strobe Light & Audio Alarm: white light mode and red-blue light mode in one (/SX models)
- AcuSense 3.0: person and vehicle classification based on deep learning
- Audio 2.0: crystal-clear audio with Arrayed Dual-Mic and Smart PA Speaker (-2U models)
- 120 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Tamper-free packaging



DS-2CD25X3G3-LIS2UY

- X=4/6/8 MP
- Smart Hybrid Light, up to 30 m IR & white light
- AcuSense 3.0: person and vehicle classification based on deep learning
- Audio 2.0: crystal-clear audio with Arrayed Dual-Mic and Smart PA Speaker
- 120 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK08
- Audio and alarm interface available
- Tamper-free packaging



**DS-2CD2TX3G3-2LI(2UY)
DS-2CD2TX3G3-4LI(2UY)
DS-2CD2TX3G3-LIS2UY/SX**

- X=4/6/8 MP
- Smart Hybrid Light, 2LI/4LI: up to 60/80 m IR & white light
- Strobe Light & Audio Alarm: white light mode and red-blue light mode in one (/SX models)
- AcuSense 3.0, Audio 2.0 (-2U models)
- 120 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Audio and alarm interface available (-S models)
- Tamper-free packaging



**DS-2CD26X3G3-LIS2UY
DS-2CD26X3G3-LIS2UY/SX**

- X=4/6/8 MP, 2.8-12mm vari-focal
- Smart Hybrid Light, up to 60 m IR & white light
- Strobe Light & Audio Alarm: white light mode and red-blue light mode in one (/SX models)
- AcuSense 3.0, Audio 2.0
- 120 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available
- Tamper-free packaging



DS-2CD27X3G3-LIS2UY

- X=4/6/8 MP, 2.8-12mm vari-focal
- Smart Hybrid Light, up to 40 m IR & white light
- AcuSense 3.0, Audio 2.0
- 120 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available
- Tamper-free packaging



DS-2CD2HX3G3-LIS2UY

- X=4/6/8 MP, 2.8-12mm vari-focal
- Smart Hybrid Light, up to 40 m IR & white light
- AcuSense 3.0, Audio 2.0
- 120 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK10
- Audio and alarm interface available
- Tamper-free packaging

Network Cameras - Pro Series

Pro Series Cameras with Point-to-Point Zoom



Microization 3.0 CORROSION RES STAN7+4

DS-2CD204663-IZ(2U)Y
DS-2CD204663-IZ2UY/S(L)(RB)

- 4 MP, 2.8/4 mm Point-to-Point Zoom
- Powered by DarkFighter & HIKAI-ISP, up to 40 m IR light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Tamper-free & eco-friendly packaging



Microization 3.0 CORROSION RES STAN7+4

DS-2CD234663-IZ(2U)Y
DS-2CD234663-IZS2UY/S(L)(RB)

- 4 MP, 2.8/4 mm Point-to-Point Zoom
- Powered by DarkFighter & HIKAI-ISP, up to 30 m IR light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Audio and alarm interface available (-S models)
- Tamper-free & eco-friendly packaging



Microization 3.0 CORROSION RES STAN7+4

DS-2CD254663-IZ2UY
DS-2CD254663-IZS2UY

- 4 MP, 2.8/4 mm Point-to-Point Zoom
- Powered by DarkFighter & HIKAI-ISP, up to 30 m IR light
- AcuSense 3.0, Audio 2.0, 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67, IK08
- Audio and alarm interface available (-S models)
- Tamper-free & eco-friendly packaging



Microization 3.0 CORROSION RES STAN7+4

DS-2CD2T4663-2IZY
DS-2CD2T4663-4IZY
DS-2CD2T4663-IZS2UY/S(L)(RB)

- 4 MP, 2.8/4 mm Point-to-Point Zoom
- Powered by DarkFighter & HIKAI-ISP, -2I/4I: up to 60/80 m IR light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0 (-2U models), 130 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Audio and alarm interface (-S models)
- Tamper-free & eco-friendly packaging



Microization 3.0 CORROSION RES STAN7+4

DS-2CD234663D-IZ2UY/SL
DS-2CD234663D-IZ2UY/SRB

- 2 independent channels, 1 wiring, 1 IP
- Innovative interpolated design, highly waterproof and quick installation
- 2 x 4MP, 2.8/4 mm Point-to-Point Zoom
- Powered by DarkFighter & HIKAI-ISP, up to 30 m IR light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0, 120 dB AI WDR
- NEMA 4X corrosion-resistant, IP67
- Tamper-free & eco-friendly packaging



Microization 3.0 CORROSION RES STAN7+4

DS-2CD234362D-LIZ2UY/SL
DS-2CD234362D-LIZ2UY/SRB

- 2 independent channels, 1 wiring, 1 IP
- Innovative interpolated design, highly waterproof and quick installation
- 2 x 4MP, 2.8/4 mm Point-to-Point Zoom
- Smart Hybrid Light, up to 30 m IR and white light
- Strobe Light & Audio Alarm: white light (for /SL) or red-blue light (for /SRB)
- AcuSense 3.0, Audio 2.0, 120 dB WDR
- NEMA 4X corrosion-resistant, IP67

Pro Series Mini TandemVu Cameras



TandemVu Smart Hybrid Light

DS-2SE2C200MWG-E/12

- 2 MP Mini TandemVu, panoramic channel 2.8 mm + PTZ channel 8 mm
- Up to 30 m IR & white light
- Smart Hybrid Light: Smart Mode & IR Mode & White Light Mode
- Strobe Light & Audio Alarm
- Person and vehicle classification based on deep learning
- Dust and water resistant (IP66)



TandemVu Smart Hybrid Light

DS-2SE2C400MWG-E/14

- 4 MP Mini TandemVu, panoramic channel 2.8 mm + PTZ channel 8 mm
- Up to 30 m IR & white light
- Smart Hybrid Light: Smart Mode & IR Mode & White Light Mode
- Strobe Light & Audio Alarm
- Person and vehicle classification based on deep learning
- Dust and water resistant (IP66)

Pro Series Special Cameras



EXIR

DS-2CD295560-ISU

- 5 MP Fisheye, 1.05 mm
- Horizontal/vertical/diagonal FOV: 180°
- Up to 8 m IR light
- 120 dB true WDR
- Built-in mic
- Audio and alarm interface available



Powered by DarkFighter + AcuSense 3.0

DS-2CD212662-IMS
DS-2CD218662-IMS

- 2/8 MP, direct HD live view with HDMI output
- Built-in Micro HDMI, HDMI output: 50/60 Hz
- Up to 30 m IR light
- AcuSense 3.0: person and vehicle classification based on deep learning
- 120 dB true WDR
- Vandal resistant IK10
- Audio and alarm interface available



AcuSense 3.0

DS-2CD2E2362-U
DS-2CD2E4362-U

- 2/4 MP, in-ceiling installation
- Tilt: 0°-75°
- AcuSense 3.0: person and vehicle classification based on deep learning
- 120 dB true WDR
- Built-in mic

Network Cameras - Value Series

Value Series with ColorVu 3.0



DS-2CD10X7G3-LIU(F)(/SL)(/SRB)

- X=2/4/6 MP
- HIKAI-ISP for excellent noise reduction effect
- Super clear 24/7 colorful imaging with ColorVu 3.0 technology
- Motion Detection 3.0, more accurate on person and vehicle classification
- /SL/SRB: Provide real-time security via built-in two-way audio and strobe light alarm
- Smart Hybrid Light: integrates IR and white lights, 3 supplemental lighting modes
- -F: On-board storage with SD card up to 512 GB
- Water and dust resistant (IP67)



DS-2CD1047G3H-LIU(F)(/SL)(/SRB)

- HIKAI-ISP for excellent noise reduction effect
- Super clear 24/7 colorful imaging with ColorVu 3.0 technology
- Motion Detection 3.0, more accurate on person and vehicle classification
- /SL/SRB: Provide real-time security via built-in two-way audio and strobe light alarm
- Smart Hybrid Light: integrates IR and white lights, 3 supplemental lighting modes
- -F: Support on-board storage up to 512 GB (SD card slot)
- Water and dust resistant (IP67)



DS-2CD11X7G3-LIU(F)

- X=2/4/6 MP
- HIKAI-ISP for excellent noise reduction effect
- Super clear 24/7 colorful imaging with ColorVu 3.0 technology
- Motion Detection 3.0, more accurate on person and vehicle classification
- Smart Hybrid Light: integrates IR and white lights, 3 supplemental lighting modes
- -F: Support on-board storage up to 512 GB (SD card slot)
- Water and dust resistant (IP67) and vandal resistant



DS-2CD1147G3H-LIU(F)

- HIKAI-ISP for excellent noise reduction effect
- Super clear 24/7 colorful imaging with ColorVu 3.0 technology
- Motion Detection 3.0, more accurate on person and vehicle classification
- Smart Hybrid Light: integrates IR and white lights, 3 supplemental lighting modes
- -F: Support on-board storage up to 512 GB (SD card slot)
- Water and dust resistant (IP67), vandal-proof



DS-2CD13X7G3-LIU(F)(/SL)(/SRB)

- X=2/4/6 MP
- HIKAI-ISP for excellent noise reduction effect
- Super clear 24/7 colorful imaging with ColorVu 3.0 technology
- Motion Detection 3.0, more accurate on person and vehicle classification
- /SL/SRB: Provide real-time security via built-in two-way audio and strobe light alarm
- Smart Hybrid Light: integrates IR and white lights, 3 supplemental lighting modes
- -F: Support on-board storage up to 512 GB (SD card slot)
- Water and dust resistant (IP67)



DS-2CD1F47G3H-LIU(F)(/SX)

- Auto Tracking focuses on moving person
- HIKAI-ISP for excellent noise reduction effect
- Super clear 24/7 colorful imaging with ColorVu 3.0 technology
- Motion Detection 3.0, more accurate on person and vehicle classification
- -SX: Provide real-time security via built-in two-way audio and strobe light alarm
- Smart Hybrid Light: integrates IR and white lights, 3 supplemental lighting modes
- -F: Support on-board storage up to 512 GB (SD card slot)
- Water and dust resistant (IP66)



DS-2CD1347G3H-LIU(F)(/SL)(/SRB)

- HIKAI-ISP for excellent noise reduction effect
- Super clear 24/7 colorful imaging with ColorVu 3.0 technology
- Motion Detection 3.0, more accurate on person and vehicle classification
- /SL/SRB: Provide real-time security via built-in two-way audio and strobe light alarm
- -F: Support on-board storage up to 512 GB (SD card slot)
- Smart Hybrid Light: integrates IR and white lights, 3 supplemental lighting modes
- Water and dust resistant (IP67)



DS-2CD1B7G3-LIU(F)(/SL)(/SRB)

- X=2/4/6 MP
- HIKAI-ISP for excellent noise reduction effect
- Super clear 24/7 colorful imaging with ColorVu 3.0 technology
- Motion Detection 3.0, accurate on person and vehicle classification
- /SL/SRB: Provide real-time security via built-in two-way audio and strobe light alarm
- Smart Hybrid Light
- -F: SD card slot up to 512 GB
- Water and dust resistant (IP67)



DS-2CD1B47G3H-LIU(F)(/SL)(/SRB)

- HIKAI-ISP for excellent noise reduction effect
- Super clear 24/7 colorful imaging with ColorVu 3.0 technology
- Motion Detection 3.0, more accurate on person and vehicle classification
- /SL/SRB: Provide real-time security via built-in two-way audio and strobe light alarm
- Smart Hybrid Light: integrates IR and white lights, 3 supplemental lighting modes
- -F: Support on-board storage up to 512 GB (SD card slot)
- Water and dust resistant (IP67)



DS-2CD1TX7G3-LIU(F)(/SL)(/SRB)

- X=2/4/6 MP
- HIKAI-ISP for excellent noise reduction effect
- Super clear 24/7 colorful imaging with ColorVu 3.0 technology
- Motion Detection 3.0, accurate on person and vehicle classification
- /SL/SRB: Provide real-time security via built-in two-way audio and strobe light alarm
- Smart Hybrid Light
- -F: SD card slot up to 512 GB
- Water and dust resistant (IP67)



**DS-2CD1TX7G3-LIU(F)/LS(L)(RB)
DS-2CD1B7G3-LIU(F)/LS(L)(RB)**

- X=2/4/6 MP
- SoundMax produces a louder alarm sound to deter trespassers
- HIKAI-ISP for excellent noise reduction effect
- 24/7 colorful imaging with ColorVu 3.0
- Motion Detection 3.0
- /SL/SRB: Supports two-way audio and strobe light alarm
- Smart Hybrid Light
- -F: SD card slot up to 512 GB
- Water and dust resistant (IP67)



DS-2CD1T47G3H-LIU(F)(/SL)(/SRB)

- HIKAI-ISP for excellent noise reduction effect
- Super clear 24/7 colorful imaging with ColorVu 3.0 technology
- Motion Detection 3.0, more accurate on person and vehicle classification
- /SL/SRB: Provide real-time security via built-in two-way audio and strobe light alarm
- Smart Hybrid Light: integrates IR and white lights, 3 supplemental lighting modes
- -F: Support on-board storage up to 512 GB (SD card slot)
- Water and dust resistant (IP67)

Network Cameras - Value Series

Value Series with Smart Hybrid Light



NEW

Motion Detection Two-Way Audio

DS-2CD10X3G3-LIU(F)/(SX)

- X=2/4 MP
- Support human and vehicle classification
- Smart Hybrid Light: advanced technology with long range
- Efficient H.265+ compression technology
- Support on-board storage up to 512 GB (SD card slot)
- -SX: Provide real-time security via built-in two-way audio
- Water and dust resistant (IP67)



NEW

Motion Detection

DS-2CD11X3G3-LIU(F)

- X=2/4 MP
- Support human and vehicle classification
- Smart Hybrid Light: advanced technology with long range
- Efficient H.265+ compression technology
- Support on-board storage up to 512 GB (SD card slot) (Optional)
- Built-in microphone for real-time audio security
- Water and dust resistant (IP67) and vandal resistant



NEW

Motion Detection Two-Way Audio

DS-2CD13X3G3-LIU(F)/(SX)

- X=2/4 MP
- Support human and vehicle classification
- Smart Hybrid Light: advanced technology with long range
- Efficient H.265+ compression technology
- Support on-board storage up to 512 GB (SD card slot)
- -SX: Provide real-time security via built-in two-way audio
- Water and dust resistant (IP67)



NEW

Motion Detection Two-Way Audio

DS-2CD16X3G3-LIZ(S)U/(SX)

- X=2/4 MP
- Support human and vehicle classification
- Smart Hybrid Light: advanced technology with long range
- Clear imaging even with strong back lighting due to 120 dB WDR technology
- Efficient H.265+ compression technology
- -SX: Provide real-time security via built-in two-way audio
- 2.8 to 12 mm motorized varifocal lens for easy installation and monitoring
- Water and dust resistant (IP67)



NEW

Motion Detection

DS-2CD17X3G3-LIZ(S)U

- X=2/4 MP
- Support human and vehicle classification
- Smart Hybrid Light: advanced technology with long range
- Clear imaging against strong back light due to DWDR technology
- Efficient H.265+ compression technology
- Built-in microphone for real-time audio security
- 2.8 to 12 mm motorized varifocal lens for easy installation and monitoring
- Water and dust resistant (IP67), vandal proof



NEW

Motion Detection Two-Way Audio

DS-2CD1BX3G3-LIU(F)/(SX)

- X=2/4 MP
- Support human and vehicle classification
- Smart Hybrid Light: Integrates IR and white lights, 3 supplemental lighting modes
- Efficient H.265+ compression technology
- -SX: Provide real-time security via built-in two-way audio
- -F: Support on-board storage up to 512 GB (SD card slot)
- Water and dust resistant (IP67)



NEW

Motion Detection Two-Way Audio

DS-2CD1TX3G3-LIU(F)/(SX)

- X=2/4 MP
- Support human and vehicle classification
- Smart Hybrid Light: advanced technology with long range
- Efficient H.265+ compression technology
- Support on-board storage up to 512 GB (SD card slot)
- -SX: Provide real-time security via built-in two-way audio
- Water and dust resistant (IP67)

Value Series with MD 2.0



Two-Way Audio

DS-2CD1043G2-LIU(F)/(SL)

- X=2/4/6/8 MP
- Support human and vehicle Detection
- Smart Hybrid Light: advanced technology with long range
- Efficient H.265+ compression technology
- -F: Support on-board storage up to 512 GB (SD card slot)
- -SL: Provide real-time security via built-in two-way audio
- Water and dust resistant (IP67)



DS-2CD11X3G2-LIU(F)

- X=2/4/6/8 MP
- Support human and vehicle Detection
- Smart Hybrid Light: advanced technology with long range
- Efficient H.265+ compression technology
- -F: Support on-board storage up to 512 GB (SD card slot)
- Built-in microphone for real-time audio security
- Water and dust resistant (IP67) and vandal resistant



Two-Way Audio

DS-2CD13X3G2-LIU(F)/(SL)

- X=2/4/6/8 MP
- Support human and vehicle Detection
- Smart Hybrid Light: advanced technology with long range
- Efficient H.265+ compression technology
- -F: Support on-board storage up to 512 GB (SD card slot)
- -SL: Provide real-time security via built-in two-way audio
- Water and dust resistant (IP67)

Network Cameras – Value Series

Value Series with MD 2.0



Two-Way Audio

DS-2CD1BX3G2-LIU(F)/(SL)

- X=2/4/6/8 MP
- Support human and vehicle detection
- Smart Hybrid Light: Integrates IR and white lights, 3 supplemental lighting modes
- Efficient H.265+ compression technology
- -F: Support on-board storage up to 512 GB (SD card slot)
- Built-in microphone for real-time audio security
- -SL: Provide real-time security via built-in two-way audio
- Water and dust resistant (IP67)



Two-Way Audio

DS-2CD1TX3G2-LIU(F)/(SL)

- X=2/4/6/8 MP
- Support human and vehicle detection
- Smart Hybrid Light: advanced technology with long range
- Efficient H.265+ compression technology
- -F: Support on-board storage up to 512 GB (SD card slot)
- -SL: Provide real-time security via built-in two-way audio
- Water and dust resistant (IP67)

Value Series Essential



DS-2CD10X360-I(UF)

- X=2/4/5/8 MP
- Efficient H.265+ compression technology
- Clear imaging even with strong back lighting due to 120 dB WDR
- Water and dust resistant (IP67)
- -UF: Built-in Microphone, Built-in micro SD/SDHC/SDXC slot, up to 256 GB
- EXIR 2.0: advanced infrared technology with long IR range



DS-2CD10X160-I

- X=2/4 MP
- Easy installation with Power over Ethernet (PoE) technology
- Water and dust resistant (IP67)



DS-2CD11X360-I(UF)

- X=2/4/5/8 MP
- Efficient H.265+ compression technology
- Clear imaging even with strong back lighting due to 120 dB WDR
- Water and dust resistant (IP67), vandal proof
- -UF: Built-in Microphone, built-in micro SD/SDHC/SDXC slot, up to 256 GB
- EXIR 2.0: advanced infrared technology with long IR range



DS-2CD11X160-I

- X=2/4 MP
- Easy installation with Power over Ethernet (PoE) technology
- Water and dust resistant (IP67)



DS-2CD13X360-I(UF)

- X=2/4/5/8 MP
- Efficient H.265+ compression technology
- Clear imaging even with strong back lighting due to 120 dB WDR
- Water and dust resistant (IP67)
- -UF: Built-in Microphone, built-in micro SD/SDHC/SDXC slot, up to 256 GB
- EXIR 2.0: advanced infrared technology with long IR range



DS-2CD13X160-I

- X=2/4 MP
- Easy installation with Power over Ethernet (PoE) technology
- Water and dust resistant (IP67)



DS-2CD16X360-I(Z)

- X=2/4/5 MP
- Efficient H.265+ compression technology
- Clear imaging even with strong back lighting due to DWDR technology
- Up to 256 GB SD card slot for storage
- 2.8 to 12 mm motorized varifocal lens for easy installation and monitoring
- Water and dust resistant (IP67)
- EXIR 2.0: advanced infrared technology with long IR range



DS-2CD17X360-I(Z)

- X=2/4/5 MP
- Efficient H.265+ compression technology
- Clear imaging even with strong back lighting due to DWDR technology
- Up to 256 GB SD card slot for storage
- 2.8 to 12 mm motorized varifocal lens for easy installation and monitoring
- Water and dust resistant (IP67), vandal proof
- EXIR 2.0: advanced infrared technology with long IR range



DS-2CD1TX360-I(UF)

- X=2/4/8 MP
- Efficient H.265+ compression technology
- Clear imaging even with strong back lighting due to 120 dB WDR
- Water and dust resistant (IP67)
- -UF: Built-in Microphone, Built-in micro SD/SDHC/SDXC slot, up to 256 GB
- EXIR 2.0: advanced infrared technology with long IR range

Network Cameras - PTZ Cameras

Value Series PTZ Cameras



Powered by DarkFighter + AcuSense

DS-2DE2A204IWG1-E(W)
DS-2DE2A404IWG1-E(W)
DS-2DE2A604IWG1-E(W)

- 1/2.8", 2/4/6 MP, 4x optical zoom
- Up to 20 m IR light
- Two-way Audio
- IP66, IK10



NEW

Powered by Hybrid Light

DS-2DE2C204MWG-E
DS-2DE2C404MWG-E

- 1/2.8", 2/4 MP, 4x optical zoom
- Up to 30 m white & IR light
- Auto-tracking lite
- Audio alarm
- Motion Detection 2.0
- Two-way Audio
- IP66



Powered by DarkFighter + AcuSense

DS-2DE3A204IWG1-E
DS-2DE3A404IWG1-E

- 1/1.8", 2/4 MP, 4x optical zoom
- Up to 50 m IR
- AI-ISP
- Live Guard
- Two-way Audio
- IP66



NEW

Powered by Hybrid Light + AcuSense

DS-2DE3C204MWG1-E
DS-2DE3C404MWG1-E(4G)
DS-2DE3C804MWG1-E(4G)

- 1/2.8", 2/4/8 MP, 4x optical zoom
- Up to 40 m white & IR light
- Auto-tracking lite
- Audio alarm
- Two-way Audio
- IP66



Powered by Hybrid Light + AcuSense

DS-2SE3C204MWG-E/12
DS-2SE3C204MWG-4G/12
DS-2SE3C404MWG-E/14
DS-2SE3C404MWG-4G/14

- Static channel: 1/2.8", 2/4 MP, 30 m white light & IR light
- PTZ: 1/2.8", 2/4 MP, 4x optical zoom, up to 40 m IR
- AI-ISP
- Auto-tracking lite
- Live guard
- Smart linkage
- Two-way Audio
- IP66

Pro Series PTZ Cameras



NEW

AcuSense

DS-2DE4425IWG1-E

- 1/2.8" 4 MP CMOS, 25x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Auto Tracking 2.0, Live Guard
- Self-Learning Rapid Focus
- Pan: 360° endless, tilt: -15° to 90°
- 100 m IR
- IP67



NEW

AcuSense

DS-2DE4425IWG1-E3

- 1/2.8" 4 MP CMOS, 25x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Self-Learning Rapid Focus
- Pan: 360° endless, tilt: 0° to 90°



NEW

AcuSense

DS-2DE4825IWG1-E

- 1/2.5" 8 MP CMOS, 25x optical zoom
- SharpMotion AI-ISP
- 8 MP@25/30 fps
- Self-Learning Rapid Focus
- Self-Learning Rapid Focus
- Pan: 360° endless, tilt: -15° to 90°
- 100 m IR
- IP67



NEW

AcuSense

DS-2DE4A225IWG1-E

- 1/2.8" 4 MP CMOS, 25x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Auto tracking 2.0
- Self-Learning Rapid Focus
- Pan: 360° endless, tilt: -5° to 90°
- 50 m IR
- IP67



NEW

AcuSense

DS-2DE5432IWG1-E

- 1/2.8" 4 MP CMOS, 32x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Auto Tracking 2.0
- Self-Learning Rapid Focus
- Pan: 360° endless, tilt: -15° to 90°
- 150 m IR
- IP67



NEW

AcuSense

DS-2DE7A432IWG1-E

- 1/2.5" 4 MP CMOS, 32x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Auto Tracking 2.0, Live Guard
- Self-Learning Rapid Focus
- Pan: 360° endless, tilt: -15° to 90°
- 200 m IR
- IP67, IK10



TandemVu AcuSense

DS-2SE4C425MWG-4G/14

- Panoramic: 4 MP@25/30 fps, 2.8 mm, Tilt: 9°-21°
- PTZ: 4 MP@25/30 fps, 25x optical zoom,
- Pan: 360° endless, tilt: -15° to 90°
- Smart linkage between bullet and PTZ channels for auto tracking
- White strobe light and audio alarm
- Built-in microphone and speaker
- White light (30 m) and IR (100 m)
- 4G communication
- IP67



TandemVu AcuSense

DS-2SE4C425MWG-E/14

- Panoramic: 4 MP@25/30 fps, 2.8 mm lens, Tilt: 9°-21°
- PTZ: 4 MP@25/30 fps, 25x optical zoom,
- Pan: 360° endless, tilt: -15° to 90°
- Smart linkage between bullet and PTZ channels for auto tracking
- White strobe light and audio alarm
- Built-in microphone and speaker
- White light (30 m) and IR (100 m)
- IP67



TandemVu AcuSense

DS-2SE4C425MWG-E/26

- Panoramic: 2 x 1/2.5" CMOS, 6 MP, 180° FOV
- PTZ: 1/2.8" 4 MP CMOS, 25x optical zoom
- Pan: 360° endless, tilt: -15° to 90°
- 4 MP@25/30 fps
- Smart linkage between bullet and PTZ channels for auto tracking
- 30 m white light and 100 m IR
- IP66



TandemVu AcuSense

DS-2SE4C425MWG-E/RB/14

- Panoramic: 4 MP@25/30 fps, 2.8 mm, Tilt: 9°-21°
- PTZ: 4 MP@25/30 fps, 25x optical zoom,
- Pan: 360° endless, tilt: -15° to 90°
- Smart linkage between bullet and PTZ channels for auto tracking
- Red & blue strobe light and audio alarm
- Built-in microphone and speaker
- White light (30 m) and IR (100 m)
- IP67



TandemVu AcuSense

DS-2SE4C425MWG-E/14 (Black)

- Panoramic: 4 MP@25/30 fps, 2.8 mm, Tilt: 9°-21°
- PTZ: 4 MP@25/30 fps, 25x optical zoom, Pan: 360° endless, tilt: -15° to 90°
- Smart linkage between bullet and PTZ channels for auto tracking
- White strobe light and audio alarm
- Built-in microphone and speaker
- White light (30 m) and IR (100 m)
- IP67



NEW

AcuSense

DS-2DE7A825IWG1-E

- 1/1.8" 8 MP CMOS, 25x optical zoom
- SharpMotion AI-ISP
- 8 MP@25/30 fps
- Auto Tracking 2.0, Live Guard
- Self-Learning Rapid Focus
- Pan: 360° endless, tilt: -15° to 90°
- 200 m IR
- IP67, IK10

Network Cameras - AOV SolarVu Cameras

AOV SolarVu Cameras



SolarVu

DS-2CFS04/4G

- 0°C charging capability
- Solar panel: 8 W, battery: 9000 mAh
- 4 MP
- 0.005 lux@F1.6
- IR/white light up to 30 m
- Motion Detection 2.0
- Two-way Audio
- IP66



SolarVu

DS-2CFSP4/4G

- 0°C charging capability
- Solar panel: 8 W, battery: 9000 mAh
- 4 MP
- 0.05 lux@F1.2
- Smart Tracking
- IR/white light up to 30 m
- Motion Detection 2.0
- Two-way Audio
- IP66



NEW

SolarVu

DS-2CFSP8-D/4G

- 0°C charging capability
- Solar panel: 8 W, battery: 9000 mAh
- 4 MP+4 MP
- 0.005 lux@F1.6
- Smart Tracking
- IR/white light up to 30 m
- Motion Detection 2.0
- Two-way Audio
- IP66



NEW

SolarVu

DS-2CFSP4/4G (Cold Proof)

- -10°C charging capability
- Solar panel: 8 W, battery: 10000 mAh
- 4 MP
- 0.05 lux@F1.2
- Smart Tracking
- IR/white light up to 30 m
- Motion Detection 2.0
- Two-way Audio
- IP66



NEW

SolarVu

DS-2CFSP8-D/4G (Cold Proof)

- -10°C charging capability
- Solar panel: 8 W, battery: 10000 mAh
- 4 MP+4 MP
- 0.005 lux@F1.6
- Smart Tracking
- IR/white light up to 30 m
- Motion Detection 2.0
- Two-way Audio
- IP66

Network Cameras - Cable-Free Series

EasyLink Wi-Fi Cameras



DS-2CWF06-D

- 3 MP+3 MP, 1/2.8"CMOS
- Panoramic and detail view
- Smart Tracking
- One-tap Privacy Mode
- IR/white light up to 10 m
- Two-way Audio



DS-2CWF06-P

- 3 MP+3 MP, 1/2.5"CMOS
- 180° field of view
- 0.005 lux@F1.6
- IR/white light up to 30 m
- Two-way Audio
- IP67

EasyLink Wi-Fi NVR Kit



NK842WBH 2 MP Wi-Fi Bullet Camera x4 8-ch Wi-Fi NVR x1

- 8-channel IP video input
- Up to 4 x 4 MP / 8 x 1080p decoding capacity
- 4K HDMI local output
- 1 SATA interface, up to 8 TB for each HDD
- Smart Hybrid Light
- Motion Detection 2.0
- Water and dust resistant (IP66)



NK844WBH 4 MP Wi-Fi Bullet Camera x4 8-ch Wi-Fi NVR x1

- 8-channel IP video input
- Up to 4 x 4 MP / 8 x 1080p decoding capacity
- 4K HDMI local output
- 1 SATA interface, up to 8 TB for each HDD
- Smart Hybrid Light
- Motion Detection 2.0
- Water and dust resistant (IP66)



NK844WDH 4 MP Wi-Fi Dome Camera x4 8-ch Wi-Fi NVR x1

- 8-channel IP video input
- Up to 4 x 4 MP / 8 x 1080p decoding capacity
- 4K HDMI local output
- 1 SATA interface, up to 8 TB for each HDD
- Smart Hybrid Light
- Water and dust resistant (IP66)

EasyLink Wi-Fi NVS Kit



NKS4223WBTH 2 MP Wi-Fi Bullet Camera 3 MP Wi-Fi PT Turret Camera 4-ch NVS

- Smart Hybrid Light
- Two-way Audio
- Smart Tracking (PT Camera)
- One-tap Privacy Mode (PT Camera)
- 2 Micro SD card slots, up to 512 GB each
- 4-ch IP video input



NKS422WBH 2 MP Wi-Fi Bullet Camera x2 4-ch NVS

- Smart Hybrid Light
- Two-way Audio
- 2 Micro SD card slots, up to 512 GB each
- 4-ch IP video input
- All cameras can be linked to NVS simultaneously
- Secure and integrated video storage in NVS



NKS422WBPH 2 MP Mini PT Camera 2 MP Wi-Fi Bullet Camera 4-ch NVS

- Smart Hybrid Light
- Two-way Audio
- 2 Micro SD card slots, up to 512 GB for each
- 4-ch IP video input
- All cameras can be linked to NVS simultaneously
- Secure and integrated video storage in NVS



NKS4245WBTH 4 MP Wi-Fi Bullet Camera 5 MP Wi-Fi PT Turret Camera 4-ch NVS

- Smart Hybrid Light
- Two-way Audio
- Smart Tracking (PT Camera)
- One-tap Privacy Mode (PT Camera)
- 2 Micro SD card slots, up to 512 GB each
- 4-ch IP video input



NKS424WBH 4 MP Wi-Fi Bullet Camera x2 4-ch NVS

- Smart Hybrid Light
- Two-way Audio
- 2 Micro SD card slots, up to 512 GB each
- 4-ch IP video input
- All cameras can be linked to NVS simultaneously
- Secure and integrated video storage in NVS



NKS424WBPH 4 MP Mini PT Camera 4 MP Wi-Fi Bullet Camera 4-ch NVS

- Smart Hybrid Light
- Two-way Audio
- 2 Micro SD card slots, up to 512 GB for each
- 4-ch IP video input
- All cameras can be linked to NVS simultaneously
- Secure and integrated video storage in NVS

Thermal - HeatPro

HeatPro Series Thermal Cameras



HM-TD2618/G0/T1A

- Thermal: 160 x 120 @12 μm , NETD ≤ 25 mK
- Optical: 5 MP
- 100 m perimeter protection
- Smart Hybrid Light and audible warning
- IP67, IK10



HM-TD2628/G1/T3A

- Thermal: 256 x 192 @12 μm , NETD ≤ 25 mK
- Optical: 5 MP
- 120 m perimeter protection
- Powered by GUANLAN Large-Scale AI Models
- Smart Hybrid Light and audible warning
- IP67, IK10



HM-TD1218/G0/T1A

- Thermal: 160 x 120 @12 μm , NETD ≤ 25 mK
- Optical: 5 MP
- 70 m perimeter protection
- Smart Hybrid Light and audible warning
- IP67



HM-TD1228/G1/T3A

- Thermal: 256 x 192 @12 μm , NETD ≤ 25 mK
- Optical: 5 MP
- 84 m perimeter protection
- Powered by GUANLAN Large-Scale AI Models
- Smart Hybrid Light and audible warning
- IP67



HM-TD2628T/G1/T3A

- Thermal: 256 x 192 @12 μm , NETD ≤ 25 mK
- Optical: 5 MP
- Anomaly temperature detection and smoke detection powered by GUANLAN Large-Scale AI Models
- Temperature range: -20 $^{\circ}\text{C}$ to 650 $^{\circ}\text{C}$, accuracy ± 2 $^{\circ}\text{C}$ or $\pm 2\%$
- Smart Hybrid Light and audible warning
- IP67, IK10



HM-TD1228T/G1/T3A

- Thermal: 256 x 192 @12 μm , NETD ≤ 25 mK
- Optical: 5 MP
- Anomaly temperature detection and smoke detection powered by GUANLAN Large-Scale AI Models
- Temperature range: -20 $^{\circ}\text{C}$ to 650 $^{\circ}\text{C}$, accuracy ± 2 $^{\circ}\text{C}$ or $\pm 2\%$
- Smart Hybrid Light and audible warning
- IP67



HM-TD3028T/Q(B)

- 256x192 @12 μm , NETD ≤ 40 mK; Optical 4MP
- 90 $^{\circ}$ /50 $^{\circ}$ HFOV
- Anomaly temperature range: -20 $^{\circ}\text{C}$ to 550 $^{\circ}\text{C}$, accuracy ± 2 $^{\circ}\text{C}$ or $\pm 2\%$
- Smart whitelight supplement
- IP67



HM-TD3118T/Q

- 160 x 120 @12 μm , NETD ≤ 40 mK
- 110 $^{\circ}$ /90 $^{\circ}$ HFOV
- Anomaly temperature range: -20 $^{\circ}\text{C}$ to 550 $^{\circ}\text{C}$, accuracy ± 2 $^{\circ}\text{C}$ or $\pm 2\%$
- IP67



HM-TD1017

- 160 x 120 @17 μm , NETD ≤ 50 mK
- 110 $^{\circ}$ /90 $^{\circ}$ HFOV
- People counting and occupancy exception detection
- Health tracking for anomaly detection
- 2.4 GHz Wi-Fi
- Type-C and PoE



HM-TD1018

- 160 x 120 @12 μm , NETD ≤ 50 mK
- 90 $^{\circ}$ HFOV
- People counting and occupancy exception detection
- Radar-powered fall detection
- PoE



DS-2TD4228/S2

- 256 x 192 @12 μm , NETD ≤ 35 mK;
- Optical 4 MP, 4.8-153 mm, 32x
- Perimeter protection and anomaly temperature detection
- Fire and smoke detection range: -20 - 150 $^{\circ}\text{C}$, accuracy ± 8 $^{\circ}\text{C}$
- Linkage smart tracking



DS-2TD4228T/S2

- 256 x 192 @12 μm , NETD ≤ 35 mK;
- Optical 4 MP, 4.8-153 mm, 32x
- Perimeter protection and anomaly temperature detection
- Fire and smoke detection
- Temperature range: -20 $^{\circ}\text{C}$ to 550 $^{\circ}\text{C}$, accuracy ± 2 $^{\circ}\text{C}$ or $\pm 2\%$
- Linkage smart tracking

K/VPro Series NVR with AcuSeek

Type it, seek fast

AcuSeek



Efficient Retrieval



Easy to Use




Cost-Effective


Just type. Just speak. Just find.



Person with a brown handbag

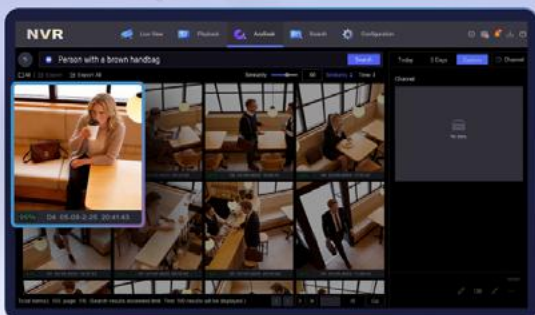

Search via NVR



Search on Hik-Connect



Network Video Recorders – VPro & Pro Series

K/VPro Series NVR with AcuSeek



NEW

AcuSeek

DS-7604NXI-K1(/4P)/VPro

- 4-ch IP video input; /P: PoE
- Up to 40 Mbps incoming bandwidth
- Up to 4 × 12 MP/6 × 8 MP/12 × 4 MP/24 × 1080p decoding capability
- 1 SATA interface, up to 16 TB for each HDD
- Powered by Guanlan Large-Scale AI Model
- Full-channel AcuSeek with AcuSense IPC
- Full-channel AcuSearch with AcuSense IPC



NEW

AcuSeek

DS-7608NXI-K1(/8P)/VPro

- 8-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 4 × 12 MP/6 × 8 MP/12 × 4 MP/24 × 1080p decoding capability
- 1 SATA interface, up to 16 TB for each HDD
- Powered by Guanlan Large-Scale AI Model
- Full-channel AcuSeek with AcuSense IPC
- Full-channel AcuSearch with AcuSense IPC



NEW

AcuSeek

DS-7608NXI-K2(/8P)/VPro

- 8-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 4 × 12 MP/6 × 8 MP/12 × 4 MP/24 × 1080p decoding capability
- 2 SATA interfaces, up to 16 TB for each HDD
- Powered by Guanlan Large-Scale AI Model
- Full-channel AcuSeek with AcuSense IPC
- Full-channel AcuSearch with AcuSense IPC



NEW

AcuSeek

DS-7616NXI-K2(/16P)/VPro

- 16-ch IP video input; /P: PoE
- Up to 160 Mbps incoming bandwidth
- Up to 4 × 12 MP/6 × 8 MP/12 × 4 MP/24 × 1080p decoding capability
- 2 SATA interfaces, up to 16 TB for each HDD
- Powered by Guanlan Large-Scale AI Model
- Full-channel AcuSeek with AcuSense IPC
- Full-channel AcuSearch with AcuSense IPC



NEW

AcuSeek

DS-7732NXI-K4(/16P)/VPro

- 32-ch IP video input; /P: PoE
- Up to 256 Mbps incoming bandwidth
- Up to 4 × 12 MP/6 × 8 MP/12 × 4 MP/24 × 1080p decoding capability
- 4 SATA interfaces, up to 16 TB for each HDD
- Powered by Guanlan Large-Scale AI Model
- Full-channel AcuSeek with AcuSense IPC
- Full-channel AcuSearch with AcuSense IPC

K Series NVR with AcuSense



AcuSense

DS-7604NXI-K1(/4P)(E)

- 4-ch IP video input; /P: PoE
- Up to 40 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 1 SATA interface, up to 16 TB for each HDD
- Full-channel AcuSearch with AcuSense IPC
- Up to 2 channels of perimeter protection
- Up to 4 channels of facial recognition for picture stream
- Up to 4 channels of Motion Detection 2.0



AcuSense

DS-7608NXI-K1(/8P)(E)

- 8-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 1 SATA interface, up to 16 TB for each HDD
- Full-channel AcuSearch with AcuSense IPC
- Up to 2 channels of perimeter protection
- Up to 8 channels of facial recognition for picture stream
- Up to 8 channels of Motion Detection 2.0



AcuSense

DS-7608NXI-K2(/8P)(E)

- 8-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 2 SATA interfaces, up to 16 TB for each HDD
- Full-channel AcuSearch with AcuSense IPC
- Up to 2 channels of perimeter protection
- Up to 8 channels of facial recognition for picture stream
- Up to 8 channels of Motion Detection 2.0



AcuSense

DS-7616NXI-K2(/16P)(E)

- 16-ch IP video input; /P: PoE
- Up to 160 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 2 SATA interfaces, up to 16 TB for each HDD
- Full-channel AcuSearch with AcuSense IPC
- Up to 2 channels of perimeter protection
- Up to 8 channels of facial recognition for picture stream
- Up to 16 channels of Motion Detection 2.0



AcuSense

DS-7732NXI-K4(/16P)(E)

- 32-ch IP video input; /P: PoE
- Up to 256 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 4 SATA interfaces, up to 16 TB for each HDD
- Full-channel AcuSearch with AcuSense IPC
- Up to 2 channels of perimeter protection
- Up to 8 channels of facial recognition for picture stream
- Up to 32 channels of Motion Detection 2.0

Eco K Series



NEW

DS-7604NI-K1(/4P)/4K

- 4-ch IP video input; /P: PoE
- Up to 40 Mbps incoming bandwidth
- 2 × 12 MP/4 × 8 MP/8 × 4 MP/16 × 1080p
- 1 SATA interface, up to 12 TB



NEW

DS-7608NI-K1(/8P)/4K

- 8-ch IP video input
- Up to 60 Mbps incoming bandwidth
- 2 × 12 MP/4 × 8 MP/8 × 4 MP/16 × 1080p
- 1 SATA interface, up to 12 TB



NEW

DS-7608NI-K2(/8P)/4K

- 8-ch IP video input; /P: PoE
- Up to 60 Mbps incoming bandwidth
- 2 × 12 MP/4 × 8 MP/8 × 4 MP/16 × 1080p
- 2 SATA interfaces, up to 12 TB



NEW

DS-7616NI-K2(/16P)/4K

- 16-ch IP video input; /P: PoE
- Up to 160 Mbps incoming bandwidth
- 2 × 12 MP/4 × 8 MP/8 × 4 MP/16 × 1080p
- 2 SATA interfaces, up to 12 TB

76Q Series NVR



DS-7604NI-Q1(/4P)(E)

- 4-ch IP video input; /P: PoE
- Up to 40 Mbps incoming bandwidth
- Up to 2 × 8 MP / 4 × 4 MP / 8 × 1080p decoding capacity
- 1 SATA interface, up to 8 TB
- 1-ch Motion Detection 2.0



DS-7608NI-Q1(/8P)(E)

- 8-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 2 × 8 MP / 4 × 4 MP / 8 × 1080p decoding capacity
- 1 SATA interface, up to 8 TB
- Up to 4-ch Motion Detection 2.0



DS-7608NI-Q2(/8P)(E)

- 16-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 2 × 8 MP / 4 × 4 MP / 8 × 1080p decoding capacity
- 2 SATA interfaces, up to 8 TB
- Up to 4-ch Motion Detection 2.0



DS-7616NI-Q2(/8P)(E)

- 4-ch IP video input; /P: PoE
- Up to 160 Mbps incoming bandwidth
- Up to 2 × 8 MP / 4 × 4 MP / 8 × 1080p decoding capacity
- 1 SATA interface, up to 8 TB
- 4-ch Motion Detection 2.0

71Q Series NVR



DS-7104NI-Q1(/4P)(D)

- 4-ch IP video input; /P: PoE
- Up to 40 Mbps incoming bandwidth
- Up to 1 × 6 MP / 2 × 4 MP / 4 × 1080p decoding capacity
- 1 SATA interface, up to 6 TB



DS-7108NI-Q1(/8P)(D)

- 8-ch IP video input; /P: PoE
- Up to 60 Mbps incoming bandwidth
- Up to 1 × 6 MP / 2 × 4 MP / 4 × 1080p decoding capacity
- 1 SATA interface, up to 6 TB

Turbo HD Cameras

ColorVu Cameras with Two-way Audio



NEW

ColorVu Two-way Audio

DS-2CE70DF0T-PTLXTS
DS-2CE70KF0T-PTLXTS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way Audio
- Smart Hybrid Light
- -X: strobe light and audio alarm



NEW

ColorVu Two-way Audio

DS-2CE60DF0T-PTLXTS
DS-2CE60KF0T-PTLXTS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way Audio
- Smart Hybrid Light
- IP66
- -X: strobe light and audio alarm



NEW

ColorVu Two-way Audio

DS-2CE10DF0T-LP(X)TS
DS-2CE10KF0T-LP(X)TS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way Audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-way Audio

DS-2CE10DF0T-L(X)TS
DS-2CE10KF0T-L(X)TS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way Audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-way Audio

DS-2CE12DF0T-L(X)TS
DS-2CE12KF0T-L(X)TS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way Audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-way Audio

DS-2CE19DF0T-L(X)TS
DS-2CE19KF0T-L(X)TS

- 2 MP, 3K
- 2.8 mm, 3.6 mm, 6mm fixed focal lens
- 0.001 lux@F1.0
- Two-way Audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-way Audio

DS-2CE72DF0T-LP(X)TS
DS-2CE72KF0T-LP(X)TS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way Audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-way Audio

DS-2CE72DF0T-L(X)TS
DS-2CE72KF0T-L(X)TS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way Audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm

Smart Hybrid Light Cameras with ColorVu



ColorVu

DS-2CE10DF3T-L(P)FS

- 2 MP
- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



ColorVu

DS-2CE12DF3T-LFS

- 2 MP
- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



ColorVu

DS-2CE50DF3T-VPLFS

- 2 MP
- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67

Smart Hybrid Light Cameras with ColorVu



DS-2CE70DF3T-LMFS

- 2 MP
- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE70DF3T-LPFS

- 2 MP
- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)



DS-2CE72DF3T-LFS

- 2 MP
- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE10KF3T-LSI(YE) DS-2CE10UF3T-LSI(YE)

- 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67
- -Y: Anti-corrosion (NEMA4X)
- -E: PoC



DS-2CE12KF3T-LSI(YE) DS-2CE12UF3T-LSI(YE)

- 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67
- -Y: Anti-corrosion (NEMA4X)
- -E: PoC



DS-2CE72KF3T-LSI(YE) DS-2CE72UF3T-LSI(YE)

- 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67
- -Y: Anti-corrosion (NEMA4X)
- -E: PoC



DS-2CE12KF3TP-DLS

- 3K
- 2 fixed focal lens, 180° FOV
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67



DS-2CE72KF3TP-DLS

- 3K
- 2 fixed focal lens, 180° FOV
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67



DS-2CE10DF0T-LPFS DS-2CE10KF0T-LPFS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE10DF0T-LFS DS-2CE10KF0T-LFS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE12DF0T-LFS DS-2CE12KF0T-LFS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE70DF0T-LMFS DS-2CE70KF0T-LMFS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE70DF0T-LPFS DS-2CE70KF0T-LPFS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)



DS-2CE72DF0T-LFS DS-2CE72KF0T-LFS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67

Turbo HD Cameras

Smart Hybrid Light Cameras with Two-way Audio



Smart Hybrid Light Two-way Audio

DS-2CE16D0T-LP(X)TS
DS-2CE16K0T-LP(X)TS
DS-2CE16U0T-LP(X)TS

- 2 MP, 3K, 4K
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way Audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



Smart Hybrid Light Two-way Audio

DS-2CE17D0T-L(X)TS
DS-2CE17K0T-L(X)TS
DS-2CE17U0T-L(X)TS

- 2 MP, 3K, 4K
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way Audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



Smart Hybrid Light Two-way Audio

DS-2CE17D0T-L(X)TS
DS-2CE17K0T-L(X)TS
DS-2CE17U0T-L(X)TS

- 2 MP, 3K, 4K
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way Audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



Smart Hybrid Light Two-way Audio

DS-2CE19D0T-L(X)TS
DS-2CE19K0T-L(X)TS
DS-2CE19U0T-L(X)TS

- 2 MP, 3K, 4K
- 2.8 mm, 3.6 mm, 6mm fixed focal lens
- Two-way Audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



Smart Hybrid Light Two-way Audio

DS-2CE78D0T-LP(X)TS
DS-2CE78K0T-LP(X)TS
DS-2CE78U0T-LP(X)TS

- 2 MP, 3K, 4K
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way Audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



Smart Hybrid Light Two-way Audio

DS-2CE78D0T-L(X)TS
DS-2CE78K0T-L(X)TS
DS-2CE78U0T-L(X)TS

- 2 MP, 3K, 4K
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way Audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm

Smart Hybrid Light Cameras



Smart Hybrid Light

DS-2CE16D0T-L(P)FS
DS-2CE16G0T-L(P)FS
DS-2CE16K0T-L(P)FS

- 2 MP, 2K, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



Smart Hybrid Light

DS-2CE17D0T-LFS
DS-2CE17G0T-LFS
DS-2CE17K0T-LFS

- 2 MP, 2K, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



Smart Hybrid Light

DS-2CE18D0T-LFS
DS-2CE18K0T-LFS

- 2 MP, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



Smart Hybrid Light

DS-2CE76D0T-LPFS
DS-2CE76G0T-LPFS
DS-2CE76K0T-LPFS

- 2 MP, 2K, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



Smart Hybrid Light

DS-2CE76D0T-LMFS
DS-2CE76G0T-LMFS
DS-2CE76K0T-LMFS

- 2 MP, 2K, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



Smart Hybrid Light

DS-2CE78D0T-LFS
DS-2CE78G0T-LFS
DS-2CE78K0T-LFS

- 2 MP, 2K, 3K
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67

PowerX DVR with Guanlan Encoding

NEW



Two-Way Audio

IDS-7204HQHI-S1/XT

- 4-ch analog video input
- Up to 6-ch IP video input
- Up to 3K/5 MP Lite@12 fps, 2K@10 fps, 1080p@15 fps encoding capability
- 1 SATA interface
- 4 channels of AcuSearch
- 2 channels of perimeter protection
- 1 channel of facial recognition
- All 4 channels of Motion Detection 2.0
- Guanlan Encoding

NEW



Two-Way Audio

IDS-7208HQHI-S1/XT

- 8-ch analog video input
- Up to 12-ch IP video input
- Up to 3K/5 MP Lite@12 fps, 2K@10 fps, 1080p@15 fps encoding capability
- 1 SATA interface
- 8 channels of AcuSearch
- 4 channels of perimeter protection
- 2 channels of facial recognition
- All 8 channels of Motion Detection 2.0
- Guanlan Encoding

NEW



Two-Way Audio

IDS-7216HQHI-S1/XT

- 16-ch analog video input
- Up to 24-ch IP video input
- Up to 3K/5 MP Lite@12 fps, 2K@10 fps, 1080p@15 fps encoding capability
- 1 SATA interface
- 16 channels of AcuSearch
- 8 channels of perimeter protection
- 4 channels of facial recognition
- All 16 channels of Motion Detection 2.0
- Guanlan Encoding

NEW



Two-Way Audio

IDS-7204HUHI-S1/XT

- 4-ch analog video input
- Up to 8-ch IP video input
- Up to 4K/8 MP@8 fps(1-ch), 3K/5 MP@12 fps encoding capability
- 1 SATA interface
- 4 channels of AcuSearch
- 4 channels of perimeter protection
- 2 channels of facial recognition
- All 4 channels of Motion Detection 2.0
- Guanlan Encoding

NEW



Two-Way Audio

IDS-7208HUHI-S2/XT

- 8-ch analog video input
- Up to 8-ch IP video input
- Up to 4K/8 MP@8 fps, 3K/5 MP@12 fps encoding capability
- 2 SATA interfaces
- 8 channels of AcuSearch
- 8 channels of perimeter protection
- 4 channels of facial recognition
- All 8 channels of Motion Detection 2.0
- Guanlan Encoding

NEW



Two-Way Audio

IDS-7216HUHI-S2/XT

- 16-ch analog video input
- Up to 32-ch IP video input
- Up to 4K/8 MP@8 fps, 3K/5 MP@12 fps encoding capability
- 2 SATA interfaces
- 16 channels of AcuSearch
- 16 channels of perimeter protection
- 4 channels of facial recognition
- All 16 channels of Motion Detection 2.0
- Guanlan Encoding

Value Series

NEW



Two-Way Audio

DS-7104HGHI-M1/T-2K

- 4-ch analog video input
- Up to 5-ch IP video input
- Up to 2K lite@10fps/1080p lite@15 fps encoding capability
- 1 SATA interface
- Motion Detection 2.0 for all 4 channels

NEW



Two-Way Audio

DS-7108HGHI-M1/T-2K

- 8-ch analog video input
- Up to 10-ch IP video input
- Up to 2K lite@10fps/1080p lite@15 fps encoding capability
- 1 SATA interface
- All 8 channels of Motion Detection 2.0

NEW



Two-Way Audio

DS-7116HGHI-M1/T-2K

- 16-ch analog video input
- Up to 18-ch IP video input
- Up to 2K lite@10fps/1080p lite@15 fps encoding capability
- 1 SATA interface
- All 16 channels of Motion Detection 2.0

Two-Way Audio



IDS-7204HQHI-M1/T

- 4-ch analog video input
- Up to 6-ch IP video input
- Up to 3K/5 MP lite@12 fps, 2K@10 fps encoding capability
- 1 SATA interface
- 2 channels of perimeter protection
- All 4 channels of Motion Detection 2.0

Two-Way Audio



IDS-7208HQHI-M1/T

- 8-ch analog video input
- Up to 12-ch IP video input
- Up to 3K/5 MP lite@12 fps, 2K@10 fps encoding capability
- 1 SATA interface
- 4 channels of perimeter protection
- All 8 channels of Motion Detection 2.0

Two-Way Audio



IDS-7216HQHI-M1/T

- 16-ch analog video input
- Up to 24-ch IP video input
- Up to 3K/5 MP lite@12 fps, 2K@10 fps encoding capability
- 1 SATA interface
- 4 channels of perimeter protection
- All 16 channels of Motion Detection 2.0

Networking

Hikvision LinkVu offers a diverse range of cloud-managed networking products and one-stop integrated security and networking solutions. This simplifies workflows and enhances efficiency for installers, allowing for effortless product selection and solution design, quick deployment, as well as effective management and maintenance.



A Visual, Full-Cycle Networking Solution for SMBs

01 Design (quote)

Easy Security & Networking Design Tools Make partners Pro



02 Deploy (delivery)

Quick Visual Deployment & Delivery Complex networking becomes simple



03 Maintain

Remote Configuration & Maintenance, Anytime, Anywhere Troubleshoot on one topology – no site visits required



Smart Managed Switch



DS-3E1505P-EI

- 4 × Gigabit PoE ports, 1 × Gigabit RJ45 port
- 60 W total PoE power budget
- 802.1Q VLAN
- PoE watchdog to detect and restart unresponsive cameras
- STP/RSTP loop prevention
- Cable detection for failure location
- Up to 300 m long-range PoE transmission
- 6 kV surge protection



DS-3E1506P-EI

- 4 × Gigabit PoE ports, 2 × Gigabit RJ45 ports
- 60 W total PoE power budget
- 802.1Q VLAN
- PoE watchdog to detect and restart unresponsive cameras
- STP/RSTP loop prevention
- Cable detection for failure location
- Up to 300 m long-range PoE transmission
- 6 kV surge protection



DS-3E1510P-EI

- 8 × Gigabit PoE ports, 2 × Gigabit RJ45 ports
- 110 W total PoE power budget
- 802.1Q VLAN
- PoE watchdog to detect and restart unresponsive cameras
- STP/RSTP loop prevention
- Cable detection for failure location
- Up to 300 m long-range PoE transmission
- 6 kV surge protection



DS-3E1518P-EI

- 16 × Gigabit PoE ports, 1 × Gigabit RJ45 port, 1 × Gigabit fiber optical port
- 230 W total PoE power budget
- IEEE 802.1Q VLAN tagging
- Energy-saving mode with user-configurable plans
- IEEE 802.3az Energy Efficient Ethernet (EEE) standard for power saving during low data activity
- STP/RSTP loop prevention
- Cable detection for failure location
- DHCP snooping
- 6 kV surge protection



DS-3E1520P-EI

- 16 × Gigabit PoE RJ45 ports, 2 × Gigabit RJ45 ports, 2 × Gigabit fiber optical ports
- 230 W total PoE power budget
- Unified cloud management for security systems
- Real-time network topology view and management via Hik-Partner Pro app
- Remote troubleshooting
- Up to 300 m long-range PoE transmission
- 6 kV surge protection



DS-3E1528P-EI

- 24 × Gigabit PoE RJ45 ports, 2 × Gigabit RJ45 ports, 2 × Gigabit fiber optical ports
- 370 W total PoE power budget
- Unified cloud management for security systems
- Real-time network topology view and management via Hik-Partner Pro app
- Remote troubleshooting
- Up to 300 m long-range PoE transmission
- 6 kV surge protection for PoE ports



DS-3E1726HP-EI

- 24 × Gigabit PoE ports, 2 × 10 G fiber optical ports
- Total PoE power budget 370 W
- Energy-saving mode with user-configurable plans
- IEEE 802.1Q VLAN tagging
- STP/RSTP loop prevention with storm control
- Cable detection for failure location
- DHCP snooping
- 6 kV surge protection for PoE ports



DS-3E2528P-SI-24P4F

- 24 × GE PoE ports, 4 × GE SFP ports
- Network management via Hik-Partner Pro app and Unified Network Management Platform (UNMP)
- Port isolation, storm control, MAC binding, and port mirroring
- STP/RSTP/MSTP loop elimination in LAN
- L3 IPv4/IPv6 static route forwarding
- Port rate limiting and flow control
- 6 kV surge protection for PoE ports



DS-3E3728-SI-24T4X

- 24 × GE RJ45 ports and 4 × 10G SFP+ ports
- Network management via Hik-Partner Pro app and Unified Network Management Platform (UNMP)
- Port isolation, storm control, MAC binding, and port mirroring
- STP/RSTP/MSTP
- Static routing, OSPFv2, RIPv1/v2, BGP, etc.
- Port rate limiting and flow control
- 10 kV surge protection for PoE ports

Industrial Smart Managed Switch



DS-3T1512HP-SI-8P4F

- 8 × Gigabit PoE RJ45 ports, 4 × Gigabit SFP fiber optical ports
- 802.1Q VLAN
- 802.3bt Hi-PoE, up to 90 W per port
- STP/RSTP/ERPS loop prevention, storm control
- Cable detection for failure location
- SNMP, QoS, DHCP snooping
- 6 kV surge protection for PoE ports
- Wide temperature (-40 to 75 °C) design
- Up to 300 m long-range PoE transmission



DS-3T1506HP-EI-UPS

- 4 × Gigabit PoE ports, 2 × Gigabit SFP
- 802.3bt Hi-PoE, up to 90 W per port
- 24 V passive PoE output for wireless bridge, etc.
- 12 V to 24 V solar power input, DC 54 V input
- Wide temperature (-40 to 75 °C) design
- Battery health monitoring via Hik-Partner Pro and Hik-Connect
- Power consumption schedule
- 6 kV surge protection for PoE ports



DS-3T1510P-SI-FLT

- 8 × Gigabit RJ45 ports, 2 × Gigabit fiber optical ports
- DHCP snooping
- 802.1Q VLAN
- ACL List
- STP/ERPS loop prevention, storm control
- ARP anti-spoofing
- SNMP, QoS
- Wide temperature (-40 to 75 °C) design

Networking

Wireless Bridge



DS-3WF500T-EI-2N/P

- Up to 500 m wireless transmission distance
- 300 Mbps 802.11n wireless bridge
- Built-in 7 dBi 2 x 2 MIMO antenna
- Visualized topology management
- Standard PoE input & output
- Plug & play



DS-3WF3000-SI-5ACG/2P

- Up to 3 km wireless transmission distance
- 867 Mbps 802.11ac wireless bridge
- Built-in 13 dBi 2 x 2 MIMO antenna
- Visualized topology management
- Standard PoE input & output
- Plug & play
- Easy adjustment with universal joint bracket



DS-3WF5000-SI-5ACG/2P

- Up to 5 km wireless transmission distance
- 867 Mbps 802.11ac wireless bridge
- Built-in 16 dBi 2 x 2 MIMO antenna
- Visualized topology management
- Standard PoE input & output
- Plug & play
- Easy adjustment with universal joint bracket

Wireless Access Point & Smart Managed Router



DS-3WAP6230-EI

- 1 x Gigabit PoE in port, 1 x Gigabit RJ45 port
- Wi-Fi 6 dual-band 3000 Mbps
- Auto RF optimization
- Wide signal coverage
- Reliable Wi-Fi connection
- Outstanding wall penetration



DS-3WAP6218-EI

- 1 x Gigabit PoE in port, 1 x Gigabit RJ45 port
- Wi-Fi 6 dual-band 1800 Mbps
- Auto RF optimization
- Wide signal coverage
- Reliable Wi-Fi connection
- Outstanding wall penetration



DS-3WAP6130-EI

- 1 x Gigabit PoE in port, 1 x Gigabit RJ45 port
- Wi-Fi 6 dual-band 3000 Mbps
- 86 mm wall junction box for easy installation
- Seamless roaming
- Wide signal coverage
- Reliable Wi-Fi connection



DS-3WAP6630-EI

- 1 x Gigabit PoE in port, 1 x Gigabit fiber optical port
- Wi-Fi 6 dual-band 3000 Mbps
- Auto RF optimization
- Wide signal coverage
- IP68 waterproof



DS-3WG1505P-EI

- 4 Gigabit PoE LAN ports with 1 LAN/WAN switchable
- 1 Gigabit WAN port
- Max. 1000 Mbps throughput
- 60 W total PoE power budget
- Integrated AP controller
- Multiple VPN support (IPsec, L2TP, PPTP, OpenVPN)
- Advanced security (firewall, DDoS defending, IP/MAC/URL filtering, ARP defending, etc.)
- Network usage management



DS-3WG2510-EI

- 8 Gigabit LAN ports with 2 LAN/WAN switchable
- 2 Gigabit WAN ports with 1 WAN/LAN switchable
- Max. 2000 Mbps throughput
- Integrated AP controller
- Multiple VPN support (IPsec, L2TP, PPTP, OpenVPN)
- Advanced security (firewall, DDoS defending, IP/MAC/URL filtering, ARP defending, etc.)
- Network usage management

SOHO Networking Products



DS-3WR30X

- 3000 Mbps Wi-Fi 6
- Dual Gigabit (wired and wireless)
- Dual-band with 5G priority
- Roaming support
- APP management



DS-3WRM30X/3

- AX3000 dual-band Wi-Fi 6
- Dual-band with 5G priority
- Roaming support
- Hikvision Mesh supported
- APP management



DS-3WR4G12C

- AC1200 dual-band Wi-Fi
- 4G boost for faster speed
- Instant access to a mobile network with a SIM card

Premises Distribution System Products



Efficient
Cabling



Reliable
UPS



Versatile
Monitors



PDS – Monitors

SOHO Monitors



DS-D5022F2-1V2
DS-D5022F2-1V2S

- 21.5"
- 1080P
- 250 nits
- 100 Hz refresh rate
- VA panel, 4000:1
- Built-in speaker (optional)
- HDMI, VGA, headphone socket



DS-D5024F2-AV2
DS-D5024F2-BV2S

- 23.8"
- 1080P
- 250 nits
- 100 Hz refresh rate
- VA panel, 4000:1
- Built-in speaker (optional)
- HDMI, VGA, headphone socket



DS-D5027F3-2P2
DS-D5027F3-2P2S

- 27"
- 1080P
- 300 nits
- 100 Hz refresh rate
- IPS panel, 1300:1
- Built-in speaker (optional)
- HDMI, VGA, headphone socket

Security Monitors



DS-D5222F2-1V1S

- 21.5"
- 1080P
- 250 nits
- 75 Hz refresh rate
- VA panel, 3000:1
- Built-in speaker, CVBS BNC, USB
- HDMI, VGA, headphone socket



DS-D5224F2-1V1S/B

- 23.8"
- 1080P
- 250 nits
- 75 Hz refresh rate
- VA panel, 4000:1
- Built-in speaker, CVBS BNC, USB
- HDMI, VGA, headphone socket



DS-D5232F2-1V1S

- 32"
- 1080P
- 350 nits
- 60 Hz refresh rate
- VA Panel, 4000:1
- Built-in speaker, CVBS BNC, USB
- HDMI, VGA, DVI, headphone socket



DS-D5032F3-1V0S

- 32"
- 1080P
- 300 nits
- 60 Hz refresh rate
- VA panel, 4000:1
- Built-in speaker
- HDMI, VGA, headphone socket



DS-D5043F3-1V0S

- 43"
- 1080P
- 300 nits
- 60 Hz refresh rate
- VA Panel, 4000:1
- Built-in speaker, USB
- HDMI, VGA, headphone socket

4K UHD Monitors



DS-D5043U3-1V0S

- 43"
- 3840 × 2160 4K
- 300 nits
- 60 Hz refresh rate
- VA panel, 4000:1
- Built-in speaker, USB, DP
- HDMI, VGA, headphone socket



DS-D5050U3-1V0S

- 50"
- 3840 × 2160 4K
- 300 nits
- 60 Hz refresh rate
- VA Panel, 4000:1
- Built-in speaker, USB
- HDMI, VGA, headphone socket



DS-D5055U3-1V0S

- 55"
- 3840 × 2160 4K
- 300 nits
- 60 Hz refresh rate
- VA panel, 4000:1
- Built-in speaker, USB, DP
- HDMI, VGA, headphone socket

PDS – CABLE & UPS & CABINET

Network Cables



DS-1LN5E-S
DS-1LN5E0-UU/E (outdoor)

- 305-meter CAT5E UTP network cable
- Solid copper (99.95%) with full diameter: 24AWG
- Excellent transmission performance verified by Fluke test
- Great PVC flame resistance: UL CM, CPR Eca (for indoor models)



DS-1LN6U-G
DS-1LN6U-SC0
DS-1LN6U-UU
DS-1LN60USPE (outdoor)

- 305-meter CAT6 UTP network cable
- Solid copper (99.95%) with full diameter: 23AWG
- Excellent transmission performance verified by Fluke test
- Great PVC flame resistance: UL CM, CPR Eca (for indoor models)



NEW

DS-1LN6AUUC0 (indoor)
DS-1LN6AUSPE (outdoor)

- 305-meter CAT6 UTP network cable
- Solid copper (99.95%) with full diameter: 23AWG
- Excellent transmission performance verified by Fluke test
- Supports Gigabit Ethernet (10GbaseT) standard, with bandwidth of 500MHz.

Online UPS



6/10 KVA Rack Type UPS & Battery Pack
DS-UPS06/10K-R/TJL
DS-UPS09xxxA-R/TJ

- High Power Factor up to 1.0
- Comprehensive protection including surge / short circuit / overcharge / overdischarge protection and EPO function
- Easy management with LCD display, local and remote monitoring
- Rack & tower type switchable
- Support external battery pack connection



1/2/3 KVA Rack Type UPS & Battery Pack
DS-UPSxxKxx-R/TJS(/X)
DS-UPS09xxxB-R/TJ(C)

- High Power Factor up to 0.9
- Comprehensive protection including surge / short circuit / overcharge / overdischarge protection and EPO function
- Easy management with LCD display, local and remote monitoring
- Rack & tower type switchable
- Built-in battery design, and support external battery pack connection



1/2/3 KVA Tower Type UPS & Battery Pack
DS-UPSxxKxx-R/TSI(/X)
DS-UPS09xxxB-R/T(C)

- High Power Factor up to 0.9
- Comprehensive protection including surge / short circuit / overcharge / overdischarge protection and EPO function
- Easy management with LCD display, local and remote monitoring
- Built-in battery design, and support external battery pack connection

Backup UPS



NEW

DS-UPS600-R(/X)
DS-UPS1000-R(/X)
DS-UPS2000-R(/X)
DS-UPS3000-R(/X)

- 600/1000/1200/2000/3000 VA
- Uninterrupted and stable power supply
- Built-in sealed lead-acid battery
- Built-in AVR supports automatic voltage regulation
- Auto restart while AC is recovering
- Wide input voltage range & frequency range
- Overload & short circuit protection

Cabinet



DS-XSxxx-E Series IT Cabinet

- 19-inch international standard
- 18U/22U/27U/32U/37U/42U, depth from 600 to 1200 mm
- Made of high-quality cold-rolled sheet metal
- Designed to rack mount equipment for cabling, telecommunications, IT, data industrial, and office installations



DS-XS6xxx-S Series Wall-mount Cabinet

- 19-inch international standard
- 4U/6U/9U/12U, depth from 450 to 600 mm
- Made of high-quality cold-rolled sheet metal
- Designed to rack mount equipment for cabling, telecommunications, IT, data industrial, and office installations

Video Intercom

TALKVU

Talk clear, view smart



Hikvision's next-gen TalkVu Video Intercom transforms how you connect, protect, and control—delivering crystal-clear vision, pure sound, smart security, and seamless management. With TalkVu, experience the difference when technology truly understands what home means to you.




See every detail, clearer & wider



Hear every word, cleaner & smarter



Secure in smart ways

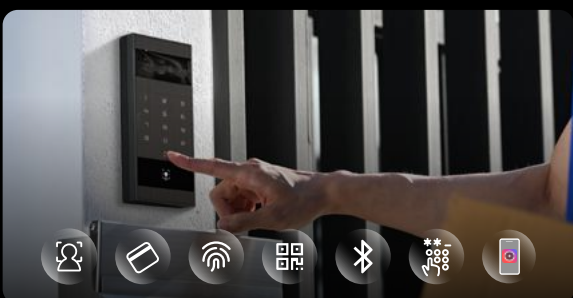

Control made convenient



Video Intercom Products

IP Indoor Station



TALKVU

DS-KC9570-VWTE1/S

- 10.1" IPS touch screen, 1920 × 1200
- Android 14, Wi-Fi
- 5 MP camera with privacy shutter
- Unified control hub: Lighting, Curtain, HVAC, Intercom, Alarm, Network camera, Elevator access



DS-KH8350-WTE1

- 7" IPS touch screen, 1024 × 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control



DS-KH8381-WTE1

- 7" IPS touch screen, 1024 × 600
- 8-ch alarm inputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control



DS-KH6350-WTE1

- 7" touch screen, 1024 × 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control



DS-KH6320-WTE1

- 7" touch screen, 1024 × 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control



DS-KH6110-WTE1

- 4.3" touch screen, 1024 × 600
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Easy and quick set-up

IP Door Station



TALKVU

DS-KV8114T-KWQ1

- 4 MP camera, 3 lens, H:180°
- One-press to call
- IR illumination, WDR, AI-ISP
- IP65, PoE, Bluetooth, Wi-Fi
- Built-in card reader module, keypad
- Convenient Hik-Connect app mobile control



TALKVU

DS-KV6124-WBQ1

- 4 MP camera, H:150°, V:75°
- One-press to call
- IR illumination, WDR
- IP65, PoE, Bluetooth
- Built-in card reader module, keypad
- Convenient Hik-Connect app mobile control



DS-KV6133-WME1

- 2 MP camera, H:129°, V:75°
- One-press to call
- IR illumination, WDR
- IP65, PoE, Wi-Fi
- Built-in card reader module
- Convenient Hik-Connect app mobile control

Video Intercom Products

IP Kit



TALKVU

DS-KIS622-S

- Door Station: [DS-KV8114-KWE1]
- 4 MP camera, H:180°
 - One-press to call
 - IR illumination, WDR
 - IP65, PoE,Wi-Fi, Bluetooth
 - Built-in card reader module, keypad
 - Convenient Hik-Connect app mobile control
- Indoor Station: [DS-KH8380-WTE1]
- 7" touch screen, 1024 × 600
 - 8-ch alarm inputs
 - Wi-Fi
 - Convenient Hik-Connect app mobile control
 - Support voice messages
 - Elevator access control



TALKVU

DS-KIS611-S

- Door Station: [DS-KV6114-MWBE1]
- 4 MP camera, H: 150°, V: 75°
 - One-press to call
 - IR illumination, WDR
 - IP65, PoE, Wi-Fi, Bluetooth
 - Built-in card reader module
 - Convenient Hik-Connect app mobile control
- Indoor Station: [DS-KH6350-WTE1]
- 7" touch screen, 1024 × 600
 - 8-ch alarm inputs and 2-ch alarm outputs
 - Wi-Fi
 - Convenient Hik-Connect app mobile control
 - Support voice messages
 - Elevator access control



TALKVU

DS-KIS612-P

- Door Station: [DS-KV6124-WBE1]
- 4 MP camera, H: 150°, V: 75°
 - One-press to call
 - IR illumination, WDR
 - IP65, PoE, Bluetooth
 - Built-in card reader module, keypad
 - Convenient Hik-Connect app mobile control
- Indoor Station: [DS-KH6350-WTE1]
- 7" touch screen, 1024 × 600
 - 8-ch alarm inputs and 2-ch alarm outputs
 - Wi-Fi
 - Convenient Hik-Connect app mobile control
 - Support voice messages
 - Elevator access control

4-Wire Kit



DS-KIS313-P(B)

- Door Station: [DS-KB2422T-IM]
- 2 MP camera, H: 117°, V: 70°
 - HD TVI video quality
 - IP65, metal
 - One-press to call
 - 4-wire plug & play interfaces
- Indoor Station: [DS-KH6352-WTDE6]
- 7" touch screen, 1024 × 600
 - One-press to unlock the door
 - 4-wire plug & play interfaces
 - Wi-Fi
 - Convenient Hik-Connect app mobile control



DS-KIS213(B)

- Door Station: [DS-KB2422T-IM]
- 2 MP camera, H: 117°, V: 70°
 - HD TVI video quality
 - IP65, metal
 - One-press to call
 - 4-wire plug & play interfaces
- Indoor Station: [DS-KH2230T]
- 7" colorful TFT screen, 1024 × 600
 - One-press to unlock the door
 - 4-wire plug & play interfaces
 - Supports monitoring door station and external analog camera



DS-KIS203T

- Door Station: [DS-KB2421T-IM]
- 2 MP camera
 - Self-adaptive IR supplement
 - One-press to call
 - 4-wire plug & play analog interfaces
 - IP65, aluminum alloy
- Indoor Station: [DS-KH2220]
- 7" colorful TFT screen, 1024 × 600
 - One-press to unlock the door
 - 4-wire plug & play analog interfaces
 - Supports monitoring door station and external analog camera

2-Wire Kit



DS-KIS708EY

- Door Station: [DS-KV7023EY-IMPE2]
- 2 MP camera, H: 135°, V: 85°
 - One-press to call
 - IR illumination, WDR
 - IP65, IK08
 - Built-in card reader module, keypad
- Indoor Station: [DS-KH7300EY-WTE2/White]
- 7" touch screen, 1024 × 600
 - 2-wire HD
 - 1-ch alarm input
 - Wi-Fi
 - Convenient Hik-Connect app mobile control
 - Real plug & play



DS-KIS705EY

- Door Station: [DS-KV7413EY-IME2]
- 2 MP camera, H: 135°, V: 85°
 - One-press to call
 - IR illumination, WDR
 - IP65, IK08
 - Built-in card reader module, nametag
- Indoor Station: [DS-KH7300EY-WTE2/White]
- 7" touch screen, 1024 × 600
 - 2-wire HD
 - 1-ch alarm input
 - Wi-Fi
 - Convenient Hik-Connect app mobile control
 - Real plug & play
- Distributor: [DS-KAD7040EY]
- 4 interface indicators show device status, 1 reset button
 - Din rail mounting



DS-KIS704EY

- Door Station: [DS-KD7003EY-IME2]
- 2 MP camera, H: 133°, V: 82°
 - One-press to call
 - IR illumination, WDR
 - IP65, IK08
 - Modular design
- Indoor Station: [DS-KH7300EY-WTE2/White]
- 7" touch screen, 1024 × 600
 - 2-wire HD
 - 1-ch alarm input
 - Wi-Fi
 - Convenient Hik-Connect app mobile control
 - Real plug & play
- Distributor: [DS-KAD7040EY]
- 4 interface indicators show device status, 1 reset button
 - Din rail mounting

Wireless Alarm System - AX PRO Series

Simplicity through innovation

Seamless ARC connection

- Wi-Fi, LAN, 2G or 4G automatically switching for seamless connection
- Supports 2 ARC connection for redundancy

Audio + video verification

- Full-duplex intercom for instant communication
- Stay informed with real-time visual verification

Cutting-edge RF tech

- TRI-X & CAM-X working independently, for stable ultra-long distance wireless transmission
- Extended transmission distance with great reliability, up to 2,000 m



Wireless Intrusion Alarm

AX HOME Series

NEW



AX HOME Control Panel DS-PA201PS-16WE/WA/WB DS-PA201PS-32WE/WA/WB

- Budget-friendly
- 1,200 / 2,000 m transmission distance
- Low power consumption & data usage
- Installation wizard
- User-friendly app
- Hassle-free installation
- Supports 24/7 monitoring with alarm response



Wireless Keyfob DS-PKF201-WE/WA/WB

- Remote arm / disarm
- Custom keys for more advanced operations
- 900 / 500 m transmission distance
- Up to 2 years' battery life



Wireless LED Keypad DS-PK201B-WE/WA/WB

- One-push FIRE, PANIC, and MEDICAL alarm
- Duress code used in emergencies
- 1,200 / 1,000 m transmission distance
- LED indication for the system status
- Up to 2 years' battery life



Wireless Magnetic Contact DS-PD201MC-WE/WA/WB

- Door opening detection
- 25 mm gap detection
- 1,600 / 1,200 m transmission distance
- Up to 2 years' battery life



Wireless PIR Detector DS-PD201P10-WE/WA/WB

- Detection range: 10 m / 90°
- 2-2.4 m mounting height
- 1,600 / 1,200 m transmission distance
- Up to 24 kg pet immunity
- 3 levels of sensitivity: High / Normal / Low
- Up to 2 years' battery life



Wireless PIR-CAM Detector DS-PD201PC10-WE/WA/WB

- Detection range: 10 m / 90°
- 2-2.4 m mounting height
- 1,600 / 1,200 m transmission distance
- Up to 25 kg pet immunity
- Picture verification
- Up to 2 years' battery life



Wireless Sounder Indoor DS-PS201-WE/WA/WB

- Strobe light and audio alarm
- 80-95 dB at 1 m distance
- 1,600 / 1,200 m transmission distance
- FIRE, PANIC, MEDICAL and INTRUSION alarm
- Blue / red version available
- Up to 2 years' battery life



AX HOME Kit the kit includes:

- Control panel
- Keypad - PIR
- Magnetic contact
- Sounder indoor
- Keyfob
- AA batteries
- Screw package & sponge tape



AX HOME Kit the kit includes:

- Control panel
- PIR
- Magnetic contact
- Keypad
- AA batteries
- Screw package & sponge tape

AX PRO Series



AX PRO Control Panel
DS-PWA64-M-WE/WB
DS-PWA96-M-WE/WB

- TCP/IP, Wi-Fi, and 3/4G network
- Video verification by mobile app
- Voice guide
- Supports 24/7 monitoring with alarm response
- Kits available



Wireless PIR-Camera Detector
DS-PDPC12P-EG2-WE(B)/WB(B)

- Detection range: 12 m / 85.9°
- Up to 20 pictures for verification
- 800 m transmission distance
- 3D optics design for creep zone detection
- Up to 5 years' battery life



Wireless PIR Detector
DS-PDP15P-EG2-WE(B)/WB(B)

- Detection range: 15 m / 90°
- 1,600 / 1,200 m transmission distance
- 3D optics design for creep zone detection
- Up to 5 years' battery life



Magnetic Contact
DS-PDMC-EG2-WE(B)/WB(B)

- Door opening detection
- Max. 43 mm gap detection
- 1,600 / 1,200 m transmission distance
- Up to 5 years' battery life



NEW

Wireless Double PIRCAM Detector
DS-PDPC18-HM-WE/WB

- 2 PIR
- Up to 20 pictures for verification
- Detection range and angle: 18 m / 90°
- Up to 800 m transmission range
- Up to 3 years' battery life



NEW

Wireless Smoke Detector Smoke & Heat
DS-PD451SMK-WE/WB

- Detection range: 30-80, 4-12 m
- ≥ 85 dB
- Up to 1,000 m transmission range
- Up to 4 years' battery life



Wireless LCD Keypad
DS-PK1-LT-WE/WB

- LCD screen and LED to indicate system status
- 1,200 / 800 m transmission distance
- Up to 2 years' battery life



Wireless Keyfob
DS-PKF1-WE(B)/WB(B)

- Quick arm / disarm
- 900 / 500 m transmission distance



Wireless External Sounder
DS-PS1-E-WE/WB

- 110 dB
- 1,200 / 900 m transmission distance



NEW

Wireless Intercom Sounder Plus
DS-PS403I-WE/WB

- Supports full-duplex
- Up to 800 m transmission range
- 85-105 dB
- Up to 4 years' battery life



NEW

Dual Wall Switch
DS-PM401R2H-WE/WB

- Compact design for easy installation in hidden spaces
- One-button control via App, Keyfob, or Keypad with automation support
- Flexible dual-load control with real-time monitoring and protection



NEW

Wireless Keyfob
DS-PKF401-WE/WB

- Quick arm / disarm
- 900 / 500 m transmission distance
- Multiple enrollment methods and easy installation design
- Easy replaceable battery with PCB protected

Fire Alarm System

Fusion Camera



HF-VH243

- Heat Detection Camera with built-in NTC heat sensor for temperature detection and alarm
- High quality imaging with 4 MP resolution
- Two-way audio via built-in microphone and speaker
- Supports the Hik-Protect and Hik-Connect apps



HF-VR342

- Flame Detection Camera with dual-IR flame sensor for flame and smoke detection
- 4 MP fixed-focus camera with up to 30 m flame detection range
- Two-way audio via built-in microphone and speaker
- Supports the Hik-Protect and Hik-Connect apps



HF-VT343

- Thermal Detection Camera supporting temperature, flame, and smoke detection (up to 30 m fire detection range)
- High quality imaging with 4 MP resolution
- Two-way audio via built-in microphone and speaker
- Supports the Hik-Protect and Hik-Connect apps

Conventional FAS



HF-C104(8)

- 4/8-zone conventional fire alarm panel supporting up to 128/256 nodes
- Rich interfaces including alarm input/output, alarm bell, RS-485, and more
- Ultra-slim cabinet design with hidden hinges
- Dedicated fire alarm indicator with 85 dB high-volume buzzer



HF-CAB1

- Conventional Alarm Bell with aluminum alloy bell cover
- Lightweight with high sound output
- Easy installation
- Low operating current with high reliability



HF-CH1

- Conventional Heat Detector (with Base)
- Two-wire design for easy installation and wiring
- High reliability sensor
- Intelligent temperature compensation algorithm improves response under different temperature rise conditions



HF-CMP1

- Conventional Manual Call Point (with Base)
- Two-wire design for easy installation and wiring
- Resettable operating panel with dedicated reset key
- Each mounting base includes a reset key



HF-CS1

- Conventional Smoke Detector (with Base)
- Two-wire design for easy installation and wiring
- Strong anti-interference capability
- Resistant to dust, temperature changes, corrosion, and light interference



HF-CSS1

- Conventional Sounder Strobe (with Base)
- Two-wire design for easy installation and wiring
- Loud sound output with bright strobe indication

Standalone Alarm



HF-KS1-WF/R(R8)

- The Wireless Gateway Kit includes 1 × HF-PG1-WF/R (R8) and 3 × HF-S3E-R (R8)
- HF-S3E-R (R8): Interlinked smoke detector
- HF-PG1-WF/R (R8): Wi-Fi gateway
- Supports up to 27 additional interlinked smoke detectors
- Optional 433 MHz or 868 MHz frequency
- Supports the Hik-Protect app



HF-KS2-WF/R(R8)

- The Smoke Alarm Kit includes 1 × HF-SG3-WF/R (R8) and 3 × HF-S3E-R (R8)
- HF-S3E-R (R8): Interlinked smoke detector
- HF-SG3-WF/R (R8): Wi-Fi smoke detector
- Supports up to 26 additional interlinked smoke detectors
- Optional 433 MHz or 868 MHz frequency
- Supports the Hik-Connect and Hik-Protect app



HF-S2

- Standalone Smoke Alarm with indicating buzzer, sound level ≥ 85 dB @ 3 m
- Up to 3-year battery life (2 × AA batteries) with easy replacement
- Supports low-battery and chamber contamination alarms
- Supports local silence and reset

Quick Pass Products for People & Vehicles



Quick and seamless
access



Centralized access
management



Flexible and secure
authentication



ANPR Cameras



Barrier Gate



Entrance
& Exit Radar



UHF System



Speed Gates & Turnstiles



Hik-Connect



MinMoe Face
Recognition Terminals



Sliding Gate Opener

QUICK PASS

Quick Pass, Smart Control

Quick Pass – People and Vehicle Access Control

Vehicle Access Control Management



NEW

Remote Access ANPR Camera DS-TCG406-E(ER)

- 4 MP, 1/1.8" progressive scan CMOS sensor
- Built-in indicator and speaker
- Embedded IR and white supplemental lights
- Supports ANPR and vehicle type, color, and brand recognition



ANPR Camera DS-TCG406-E(S)

- 4 MP, 1/1.8" progressive scan CMOS sensor
- Embedded IR and white supplemental lights
- Supports ANPR and vehicle type, color, and brand recognition
- Supports Wiegand interface integration with access control systems



2MP ANPR Kit DS-TMC200-E1

- All-in-one plug-and-play design
- 2 MP, 1/3" progressive scan CMOS sensor
- Optional IR/white supplemental lighting
- Customizable multilingual LED display and voice broadcast
- Supports ANPR and vehicle type, color, and brand recognition



Upgrade

Entrance & Exit Controller DS-TME200-D(K)/P

- Embedded Linux operating system
- Supports entry and exit management for up to 4 lanes
- Storage capacity: 50,000 cards and 50,000 event records
- Supports 4 Wiegand interfaces for card reader integration



Straight Pole (Straight & Telescopic) DS-TMG001-3D

- 3 m / 4 m octagonal boom pole
- 2.6–4 m telescopic boom pole
- 3.6–6 m telescopic boom pole



Light Straight Pole DS-TMG001-6L

- 3 m / 4 m light boom pole with reinforced wall thickness



Folding Pole DS-TMG002-3D

- 1.5 + 1.5 m folding boom pole
- 2 + 2 m folding boom pole
- 2.5 + 2.5 m folding boom pole



Light Folding Pole DS-TMG002-6L

- 1.5 + 1.5 m / 2 + 2 m light folding boom pole with reinforced wall thickness



Anti-Fall Radar DS-TMG035(Anti-Fall Radar) DS-TMG035/60G(Anti-Fall Radar)

- Detects vehicle presence for anti-fall protection
- 60/79 GHz radar for higher resolution and stable detection
- Quick deployment with easy installation and maintenance
- Strong adaptability to complex environments
- App-based configuration



Trigger Radar DS-TMG035(Trigger Radar) DS-TMG035/60G(Trigger Radar)

- Detects vehicle presence and outputs trigger signals to barrier gates
- 60/79 GHz MMIC radar for higher resolution and stable detection
- Quick deployment with easy installation and maintenance
- Strong adaptability to complex environments
- App-based configuration



32 Series Barrier Gates Body DS-TMG320

- Motor: DC brushless motor
- Mean Cycles Between Failures (MCBF): 2,500,000
- Supports Bluetooth connection for app-based configuration
- Maximum opening speed: 3 m boom in 3 seconds
- Standardized chuck compatible with multiple boom pole types
- Supports both right-hand and left-hand installation




32 Series Barrier Gates Body DS-TMG320/B

- Motor: DC brushless motor
- Mean Cycles Between Failures (MCBF): 2,500,000
- Supports Bluetooth connection for app-based configuration
- Maximum opening speed: 3 m boom in 3 seconds
- Standardized chuck compatible with multiple boom pole types
- Supports both right-hand and left-hand installation
- Built-in status indicator

Note: Standard boom poles do not include an anti-collision function. To enable this feature, please order the anti-collision accessories separately.

Vehicle Access Control Management



UHF Sticker DS-TRC900-8/A

- Operating frequency: 860–960 MHz
- Write endurance: up to 100,000 cycles
- Data retention: up to 50 years



UHF Card DS-TRC902-1/A

- Single-band/dual-band options
- Operating frequency: 860–960 MHz
- Write endurance: up to 100,000 cycles
- Data retention: up to 10 years



UHF Card Reader DS-TRI900-1/A

- Operating frequency: 840–960 MHz (optional)
- Reading distance up to 9 m
- Wiegand 34/26 interface
- Universal wall-mount and pole-mount bracket

People Access Control Management



MinMoe

DS-K1T342 Series

- 4.3-inch touchscreen
- Capacity: 1,500 users, 1,500 faces, 3,000 cards, and 150,000 events
- Supports up to 3,000 fingerprints (optional)
- TCP/IP, optional Wi-Fi, RS-485, Wiegand, and USB
- PC and mobile web configuration
- PoE support
- IP65-rated



MinMoe

DS-K1T344 Series

- 4.5-inch touchscreen
- Capacity: 3,000 users, 3,000 faces, 3,000 cards, and 150,000 events
- Supports up to 3,000 fingerprints (optional)
- TCP/IP, optional Wi-Fi, RS-485, Wiegand, Bluetooth, and USB
- PC and mobile web configuration (AP mode)
- Alarm input and output support
- PoE support
- IP65-rated



QUICK PASS

Swing Barrier DS-K3B211LX Series

- 4 pairs of IR detectors for access validation and anti-tailgating
- LED indicators display passing direction
- Passing permission is automatically canceled after timeout
- Fire alarm linkage keeps doors open during emergencies
- LX version: without built-in access control board and card reader (optional)



PRIMEPASS MinMoe

Prime Pass Swing Barrier DS-K6B411TX Series

- Supports AP mode via NFC tags for Android devices
- Built-in face recognition access control module
- Built-in dToF sensors for pedestrian and obstacle protection
- Optional supercapacitor enables automatic door opening during power failure
- Supports cross-device anti-passback



PRIMEPASS MinMoe

Prime Pass Swing Gate DS-K6BC402TX Series

- Built-in face recognition access control module
- Built-in dToF sensors for pedestrian and obstacle protection
- Supports PC and mobile web configuration, plus self-diagnosis for maintenance
- Supports AP mode via NFC tags for Android devices

Sliding Gate Opener



QUICK PASS

Sliding Gate Opener DS-K3GL606WX-WB Series

- Built-in Wi-Fi and LAN interfaces for remote management
- Battery-powered design with maximum opening speed of 0.6 m/s @ 17 kgf
- Powered by 2 × 12 V, 7 Ah batteries
- Supports mobile web configuration via NFC (AP mode)
- Built-in access control system
- Supports PIN code, card, QR code (external reader), and 433 MHz remote keyfob access



QUICK PASS

Sliding Gate Opener DS-K3GL606WX-WE Series

- Built-in Wi-Fi and LAN interfaces for remote management
- Battery-powered design with maximum opening speed of 0.6 m/s @ 17 kgf
- Powered by 2 × 12 V, 7 Ah batteries
- Supports mobile web configuration via NFC (AP mode)
- Built-in access control system
- Supports PIN code, card, QR code (external reader), and 868 MHz remote keyfob access

Access Control

MinMoe Face Recognition Terminal

Superior recognition in any environment

Recognition speed < 0.2 s & accuracy rate > 99%

Easy to manage and operate

Multiple authentication methods, web/GUI configuration, Hik-Connect mobile control

Top level security

Face anti-spoofing, user data encryption & optional privacy protection mode


Extensive functionality via one device

Video security, intercom & access control integrated in one



PoE Power Supply

Power both the device and the lock

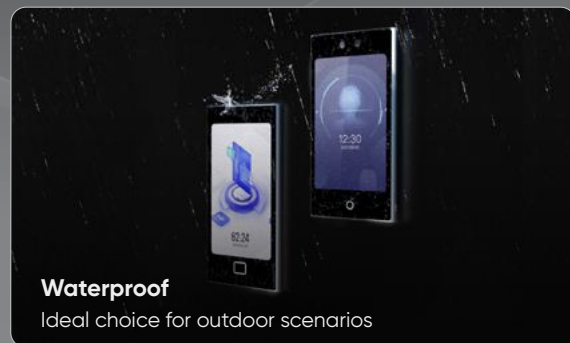

Waterproof

Ideal choice for outdoor scenarios



Integrated Video Intercom

One button connecting to all stations and the mobile app



Mobile AP Mode

Easy configuration in only 3 steps



Flexible Authentication Options

10+ types and combinations



Privacy Protection

Secure users' personal information in compliance with strict data protection regulations

Access Control Terminal



2.0 Access Terminal

DS-K1T502-E1 series

- Multi-function: access control, video security, and video intercom
- Cards: 100,000
- Fingerprints: 10,000
- AP mode
- PC & mobile web configuration
- Hik-Connect management
- PoE
- IP65, IK09



2.0 Access Terminal

DS-K1T510 series

- Multi-function: access control, video security, and video intercom
- Cards: 10,000
- Fingerprints: 3,000
- AP mode
- PC & mobile web configuration
- PoE
- IP65



2.0 Access Terminal

DS-K1T805 series

- Access control
- Cards: 10,000
- Fingerprints: 3,000
- AP mode
- PC & mobile web configuration
- Hik-Connect management
- IP65, IK08



2.0 Access Terminal

DS-K1T807 series

- Access control
- 2.4-inch non-touch LCD screen
- Cards: 5,000
- Fingerprints: 5,000
- AP mode
- Mobile web configuration
- PoE
- IP65



2.0 Access Terminal

DS-K1T808 series

- Access control
- 2.4-inch LCD screen
- Cards: 3,000
- Fingerprints: 3,000
- AP mode
- PC & mobile web configuration



2.0 Access Terminal

DS-K1T809 series

- Access control
- Users: 1,000
- Cards: 1,000 / 5,000
- AP mode
- Mobile web configuration
- IP65

Value Face Recognition Terminal



MinMoe

DS-K1T320 Series

- 2.4-inch non-touch screen
- 500 users; 500 faces; 1,000 cards; 100,000 events
- 1,000 fingerprints (optional)
- TCP/IP, Wi-Fi (optional), USB
- PC & mobile web (AP mode)
- On-device attendance



MinMoe

DS-K1T321 Series

- 2.4-inch non-touch screen
- 500 users; 500 faces; 3,000 cards; 150,000 events
- 3,000 fingerprints (optional)
- TCP/IP, Wi-Fi (optional), RS-485, USB
- PC & mobile web (AP mode)
- On-device attendance



MinMoe

DS-K1T323 Series

- 2.4-inch non-touch screen
- 1,000 users; 1,000 faces; 3,000 cards; 150,000 events
- 3,000 fingerprints (optional)
- TCP/IP, Wi-Fi (optional), Wiegand, Bluetooth
- PC & mobile web (AP mode)
- PoE
- IP65



MinMoe

DS-K1T342 Series

- 4.3-inch touch screen
- 1,500 users; 1,500 faces; 3,000 cards; 150,000 events
- 3,000 fingerprints (optional)
- TCP/IP, Wi-Fi (optional), RS-485, Wiegand, USB
- PC & mobile web
- PoE
- IP65



MinMoe

DS-K1T343 Series

- 4.3-inch touch screen
- 1,500 users; 1,500 faces; 3,000 cards; 150,000 events
- 3,000 fingerprints (optional)
- TCP/IP, Wi-Fi (optional), RS-485, Wiegand, USB
- PC & mobile web
- On-device attendance



MinMoe

DS-K1T344 Series

- 4.5-inch touch screen
- 3,000 users; 3,000 faces; 3,000 cards; 150,000 events
- 3,000 fingerprints (optional)
- TCP/IP, Wi-Fi (optional), RS-485, Wiegand, Bluetooth
- PC & mobile web (AP mode)
- Alarm in / out
- PoE
- IP65

Security Inspection

Intelligent X-Ray Security Inspection



ISD-SG5030SA-CL

- Tunnel dimensions: 500 mm × 300 mm (W × H)
- Wire resolution*: 38 - 40 AWG
- Penetration*: 8 - 10 mm
- Single-energy
- Conveyor load: ≥100 kg; Conveyor speed: 0.2 m/s
- Intelligent recognition of up to 7 types in 15 categories
- Video-to-package correlation, package-to-package correlation



ISD-SG6040SA-2CL

- Tunnel dimensions: 620 mm × 420 mm (W × H)
- Wire resolution*: 38 - 40 AWG
- Penetration*: 6 - 10 mm
- Single-energy
- Conveyor load: ≥165 kg; Conveyor speed: 0.2 m/s
- Intelligent recognition of up to 7 types in 15 categories
- Video-to-package correlation, package-to-package correlation



ISD-SG6550SA-2CL

- Tunnel dimensions: 650 mm × 500 mm (W × H)
- Wire resolution*: 36 - 38 AWG
- Penetration*: 6 - 10 mm
- Single-energy
- Conveyor load: ≥165 kg; Conveyor speed: 0.2 m/s
- Intelligent recognition of up to 7 types in 15 categories
- Video-to-package correlation, package-to-package correlation



ISD-SG5030S-CVL

- Tunnel dimensions: 500 mm × 300 mm (W × H)
- Wire resolution*: 38 - 40 AWG
- Penetration*: 30 - 32 mm
- Conveyor load ≥ 100 kg
- Press to switch the conveyor speed: 0.2 or 0.3 m/s
- Intelligent recognition of up to 64 types in 35 categories
- Video-to-package correlation, package-to-package correlation



ISD-SC5030S-H2CVL

- Tunnel dimensions: 500 mm × 300 mm (W × H)
- Wire resolution*: 38 - 40 AWG
- Penetration*: 30 - 32 mm
- Raytina 2.0, 23.8-inch 120-Hz display
- Conveyor load ≥ 100 kg
- Press to switch the conveyor speed: 0.2 or 0.3 m/s
- Intelligent recognition of up to 64 types in 35 categories
- Video-to-package correlation, package-to-package correlation

Metal Detector



ISD-SMG118-NW / ISD-SMG118

- Tunnel dimensions: 2024 mm(H) × 734 mm(W) × 405 mm(D)
- 18 independent detection zones
- Detection sensitivity: Detects objects as small as a single coin (approx. φ25 mm)
- Multi-zones alarm, 4.3-inch color LCD display
- Power-on self-checking, adjustable sensitivity levels
- Networking via HikCentral platform (only for NW models)



ISD-SMG111-NW / ISD-SMG111

- Tunnel dimensions: 2204 mm(H) × 734 mm(W) × 405 mm(D)
- 11 independent detection zones
- Detection sensitivity: Detects objects as small as a single coin (approx. φ25 mm)
- Multi-zones alarm, LED segment displays
- Power-on self-checking, adjustable sensitivity levels
- Networking via Hik-Central platform (only for NW models)



ISD-SMG112

- Tunnel dimensions: 2024mm(H) × 734mm(W) × 405 mm(D)
- 12 independent detection zones
- Detection sensitivity: Detects objects as small as a single coin (approx. φ25 mm)
- Multi-zones alarm, 4.3-inch color LCD display
- Power-on self-checking, adjustable sensitivity levels



ISD-SMG106C

- Tunnel dimensions: 2024 mm(H) × 734 mm(W) × 405 mm(D)
- 6 independent detection zones
- Detection sensitivity: Detects objects as small as a single coin (approx. φ25 mm)
- Multi-zones alarm, LED segment displays
- Power-on self-checking, adjustable sensitivity levels



ISD-SMH002

- Adjustable sensitivity levels
- Rechargeable battery
- Audible, visual, and vibration prompts
- Low battery alarm



NP-SMH003

- Adjustable sensitivity levels
- Audible and vibration prompts
- Low battery alarm

*Performance metrics are based on tests conducted using the Hikvision Imaging Standard Test Piece.

Audio

Smarter audio, made easy

Hikvision audio products feature diverse broadcasting modes, offering versatility for various contexts. From live and scheduled broadcasts to alarm linkage and emergency mustering-linked broadcasts, these audio products seamlessly meet your needs.

Whether used for background music, security protection, or paging and notifications, Hikvision audio products are designed to effectively convey crucial messages.

TTS
(Text-to-Speech)

Two-way
Audio

Easy
Operation & Maintenance

Video & Audio
Linkage

Multiple
Broadcast Modes

Built-in
eMMC

Public Address Product

Network Horn Speaker



DS-QAZ1307G1T-E(C)

- Rated Power: 7 W
- Sensitivity (1 m, 1 W): 110 dB
- Max. SPL: 121 dB
- Frequency Response: 300 Hz to 13 kHz
- Supports PoE
- Supports scheduled/live/emergency broadcast, alarm linkage, two-way audio, and TTS
- White

Network Cabinet Speaker



DS-QAZ1120G1R-B

- 5.25" × 1
- Rated Power: 20 W
- Sensitivity (1 m, 1 W): 90 dB
- Max. SPL: 103 dB
- Frequency Response: 130 Hz to 17.5 kHz
- Supports scheduled/live/emergency broadcast, alarm linkage, two-way audio, and TTS
- Optional in white or black

Network Ceiling Speaker



DS-QAZ1606G1-BE(B)

- Full Frequency: 6.5" × 1
- Rated Power: 6 W
- Sensitivity (1 m, 1 W): 88 dB
- Max. SPL: 94 dB
- Frequency Response: 140 Hz to 15 kHz
- Supports PoE and Hi-PoE
- Supports scheduled/live/emergency broadcast, alarm linkage, two-way audio, and TTS
- Optional in white or black



DS-QAZ1630G1-BE

- 1 × 1.0-inch tweeter and 1 × 6.5-inch woofer
- Rated Power: 30 W
- Sensitivity (1 m, 1 W): 92 dB
- Max. SPL: 104 dB
- Frequency Response: 80 Hz to 20 kHz
- Supports Hi-PoE
- Supports scheduled/live/emergency broadcast, alarm linkage, two-way audio, and TTS
- Optional in white or black



DS-QAZ1610G1-BE(B)

- 1 × 1.0-inch tweeter and 1 × 6.5-inch woofer
- Rated Power: 10 W
- Sensitivity (1 m, 1 W): 89 dB
- Max. SPL: 98 dB
- Frequency Response: 120 Hz to 20 kHz
- Supports PoE and Hi-PoE
- Supports scheduled/live/emergency broadcast, alarm linkage, two-way audio, and TTS
- Optional in white or black

Network Amplifier



DS-QAE1A80G1-VB

- Rated Power: 80 W, 2 zones
- Audio Input: USB/Bluetooth/MIC/RCA
- Supports two-zone volume and content adjustment
- Supports scheduled/live/emergency broadcast, alarm linkage, TTS



DS-QAE1A80G1-VB/ST

- Rated Power: 80 W, 2 zones
- Audio input: FM/USB/Bluetooth/MIC/RCA
- Supports two-zone volume and content adjustment
- Supports scheduled/live/emergency broadcast, alarm linkage, and TTS

Analog Ceiling Speaker



DS-QAE0206G1-V

- 5.25" × 1
- Rated Power: 6 W
- Sensitivity (1 m, 1 W): 91 dB ± 3 dB
- Max. SPL: 98 dB
- Frequency Response: 90 Hz to 20 kHz
- White



DS-QAE0210G1-V

- 5" paper basin
- Rated Power: 5/10 W
- Sensitivity (1 m, 1 W): 91 dB
- Max. SPL: 104 dB
- Frequency Response: 80 Hz to 20kHz
- White



DS-QAZ0630G1

- 1 × 1.0-inch tweeter and 1 × 6.5-inch woofer
- Rated Power: 100 V: 30 W/15 W/7.5 W, 70 V: 30 W/15 W/7.5 W/3.25 W
- Sensitivity (1 m, 1 W): 92 dB
- Max. SPL: 104 dB
- Frequency Response: 80 Hz to 20 kHz
- Optional in white or black

Analog Column Speaker



DS-QAE0420G1-V

- Full frequency 4" x 1, high frequency 0.75" x 1
- Rated Power: 20 W
- Sensitivity (1 m, 1 W): 89.5 dB ± 3 dB
- Max. SPL: 96 dB
- Frequency Response: 100 Hz to 20 kHz
- White

Analog Cabinet Speaker



DS-QAE0120G1R

- 5.25" x 1
- Rated Power: 70 V: 5 W/10 W/15 W/20 W, 100 V: 5 W/10 W/15 W/20 W
- Sensitivity (1 m, 1 W): 90 dB ± 3 dB
- Max. SPL: 103 dB
- Frequency Response: 130 Hz to 17.5 kHz
- Optional in white or black

Analog Horn Speaker



DS-QAE0330G1T-V

- 34-core 2-inch mid-to-high (dome resin film)
- Rated Power: 70 V: 2.5 W/5 W/7.5 W/15 W/30 W, 100 V: 5 W/10 W/15 W/30 W
- Sensitivity (1 m, 1 W): 108 dB ± 3 dB
- Max. SPL: 120 dB
- Frequency Response: 250 Hz to 8 kHz
- White

Analog Amplifier



DS-QAE0A60G1-VB

- Rated Power: 60 W, 2 zones
- Audio Input: USB/Bluetooth/MIC/RCA
- Supports two-zone volume adjustment



DS-QAE0A120G1-VB6

- Rated Power: 120 W, 6 zones
- Audio Input: EMC/MIC/AUX/Bluetooth/USB/SD card
- Supports two-zone volume and content adjustment



DS-QAE0A240G1-VB6

- Rated Power: 240 W, 6 zones
- Audio Input: EMC/MIC/AUX/Bluetooth/USB/SD card
- Supports two-zone volume and content adjustment



DS-QAE0A40G1W-RB

- 4-inch touch screen
- 4-channel speaker output, dual-channel stereo sound
- Audio Input: Bluetooth/TF card/USB/AUX
- Supports 485 control
- Linux system
- Supports multi-language switching

Paging Microphone



DS-QAE0MG0G1

- High SNR and balanced frequency response sound inlet basket
- High-sensitivity, low-noise pre-amplifier circuit
- Droplet-shaped pickup design
- Supports 12 VDC power supply and 48 V phantom power

WonderHub

Touch. Teach. Wonder to Reach.

Select Series



Performance Series



Value Series



HCF



WonderOS



Wonderhub
Class

- **Ultra Smooth**

Smooth writing with smart recognition, intelligent charts, palm rejection, and multi-user collaboration.

- **AI Co-Pilot**

Voice control, instant content recognition, and auto-summaries simplify tasks and spark engagement.

- **Intuitive Interface**

Seamlessly integrate access, storage, and tools for an effortless workflow.

- **Centralized Management**

Remotely control up to 2,048 displays and manage apps, updates, and analytics. Zero hassle.

WonderHub Interactive Display



NEW

DS-D5AxxRB
A3 DS-D5AxxRB/B3

- 65" / 75" / 86"
- 8-Core CPU, 8 GB + 128 GB
- Android 14, Google EDLA Certified
- 4K, 400 nits brightness
- 8MP camera and 8-mic array
- (B3 model: built-in camera and mics)
- Rich interfaces with 1 x Type-C (15W)



DS-D5BxxRB
EP DS-D5BxxRB/FP

- 65" / 75" / 86"
- 8-Core CPU, 8 GB + 128 GB
- Android 16, Google EDLA Certified
- 4K, 450 nits brightness
- 8MP camera and 8-mic array
- (FP model: built-in camera and mics)
- Rich interfaces with 2 x Type-C (65W)



DS-D5CxxRB
A2L DS-D5CxxRB/B2L

- 65" / 75" / 86" / 98"
- 8-Core CPU, 8 GB + 128 GB (16 GB + 256 GB optional)
- Android 14, Google EDLA Certified
- 4K, 540 nits brightness
- 8MP camera and 8-mic array
- (B2L model: built-in camera and mics)
- Rich interfaces with 2 x Type-C (65W)

Wall-Mounted Digital Signage



DS-D60xxUN-DL

- 43" / 50" / 55" / 65" / 75"
- 4K, 500 nits brightness, 25% haze
- 4 GB + 32 GB
- Min. 9 mm even bezel, 70 mm thickness



DS-D60xxUN-DP

- 32" / 43" / 50" / 55" / 65"
- 4K (32" model: 1080p), 500 nits brightness, 25% haze
- 4 GB + 32 GB
- Min. 9 mm even bezel, 40 mm thickness



DS-D60xxUH-DP

- 43" / 50"
- 4K, 700 nits brightness, 25% haze
- 4 GB + 32 GB
- Min. 9 mm even bezel, 40 mm thickness

Floor-Standing Digital Signage



DS-D6055UT-D/S

- 55"
- 4K, 500 nits brightness
- 4 GB + 32 GB
- Slim design
- 10-point capacitive touch



DS-D6055UN-D/S

- 55"
- 4K, 500 nits brightness
- 4 GB + 32 GB
- Slim design

Digital Signage Box



DS-D60E-B

- 4-Core CPU, 2 GB + 16 GB
- Audio In x 1, Audio Out x 1, HDMI Out x 1, LAN x 1, USB 2.0 x 2

Solutions for Small & Medium Sized Businesses

Grow your business with one-stop SMB solutions

SMB



Condominiums



Shops



Offices



Villas

SMB Solution for Condominiums

Grow your business with one-stop SMB solutions



Core Benefits


For installers

- + One-stop procurement and management
- + Less maintenance cost with remote troubleshooting

For end-users

- + One software for all devices
- + Less costs with no need for servers / VPN
- + Vehicle gate automatic unlocking
- + High-level protection to deter theft

How Our Solution Works

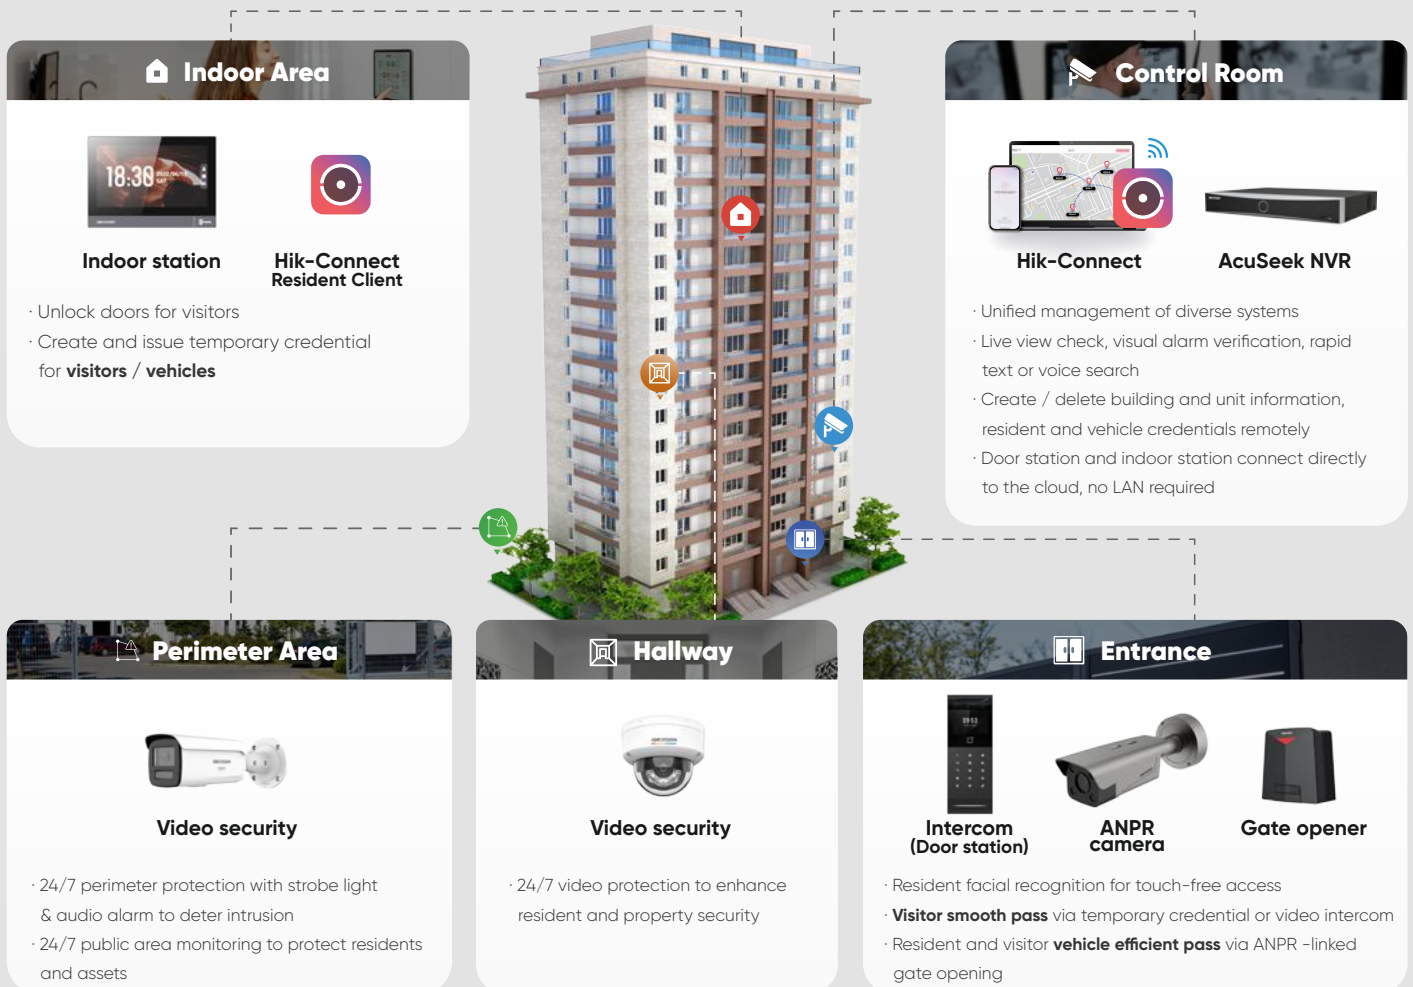

Product Showcase

Cloud-based Software



Hik-Partner Pro

For installers

- Remote health monitoring and troubleshooting on portal / app



Hik-Connect

For end-users

- Remote monitoring and management on portal / app
- Free access* (channels, doors, ANPRs, panels) to cover most SMB scenes

*Quantity varies by region. Contact local provider for details.



Scan to download

Video Security

Analog solution



Turbo HD Camera

DS-2CE78D0T-LI(X)TS

- 2 MP
- Two-way audio
- Smart Hybrid Light
- 20 m white light and 25 m IR



Turbo HD Camera with ColorVu

DS-2CE72DF3T-LXTS

- 2 MP
- Two-way audio
- Smart Hybrid Light
- IR / white light up to 40 m
- WDR ≥ 120 dB
- IP67



PowerX DVR

IDS-7208HQHI-M1/XT

- 8-ch Motion Detection 2.0
- 4-ch perimeter protection
- 8-ch AcuSearch
- 8-ch two-way audio



IP solution



Network Camera with ColorVu

DS-2CD114763-LIUF

- HikAI-ISP, 4 MP
- ColorVu 3.0, Motion Detection 3.0, Smart Hybrid Light
- 0.0005 lux@F1.0
- IR/white light up to 30 m
- IP67, IK08



Network Camera with ColorVu

DS-2CD2T4763-LIS2UY/SL

- 4 MP
- ColorVu 3.0, AcuSense 3.0, Smart Hybrid Light
- Two-way audio, built-in dual-microphone
- Strobe light and audio alarm
- IR / white light up to 60 m
- IP67, NEMA 4X anti-corrosion



AcuSeek NVR

DS-7616NXI-K1/VPro

- 16-ch IP video input; /P: PoE
- Up to 24 × 1080p decoding capability
- Full Channel AcuSeek for IPC with ColorVu 3.0 /AcuSense



Video Intercom, Gate Opener and ANPR



Touch-screen Wide FOV Door Station

DS-KD9214 Series

- Metal
- 4 MP, FOV: 180°(H)
- 4.3-inch touch screen
- Face / PIN code / Card / Bluetooth / QR code / App
- AI video and abnormal sound detection



Indoor Station

DS-KH8381 Series

- Hik-Connect control
- 7-inch IPS screen, 1024 × 600
- Linux
- Check live videos from door stations and linked IP cameras



Sliding Gate Opener

DS-K3GL606 Series

- Gate mass ≤ 600 kg
- Support Wi-Fi and LAN
- Open gate via keyfob, app, intercom, etc.



ANPR Camera

DS-TCG406 Series

- 2688 × 1520 resolution
- 4 built-in LEDs (integrated white light and IR)
- LPR accuracy > 98%
- IP67, IK10

Networking, Display and Accessory



Wi-Fi 6 Wireless Router

DS-3WR15X-H

- 1,500 Mbps Wi-Fi 6
- Hikvision Mesh Supported
- App management



Smart Managed Switch

DS-3E1528P-EI

- 24 x Gigabit PoE RJ45 ports, 2 x Gigabit RJ45 ports, 2 x Gigabit fiber optical ports
- Total PoE power budget 370 W



Monitor

DS-D5022F2

- 1080p
- 21.5"
- HDMI, VGA, Audio out



Online UPS

DS-UPS01K24-R/TS

- Capacity 1000 VA / 900 W, PF up to 0.9
- Easy management with local and remote monitoring
- Surge / short circuit / overcharge / over discharge protection and Emergency Power Off function (EPO)

SMB Solution for Shops

Grow your business with one-stop SMB solutions



Core Benefits


For installers

- One-stop procurement and management
- Less maintenance cost with remote troubleshooting

For end-users

- One software for all devices
- Less costs with no need for servers / VPN
- Secure backup with cloud storage
- Paperless promotion display

How Our Solution Works

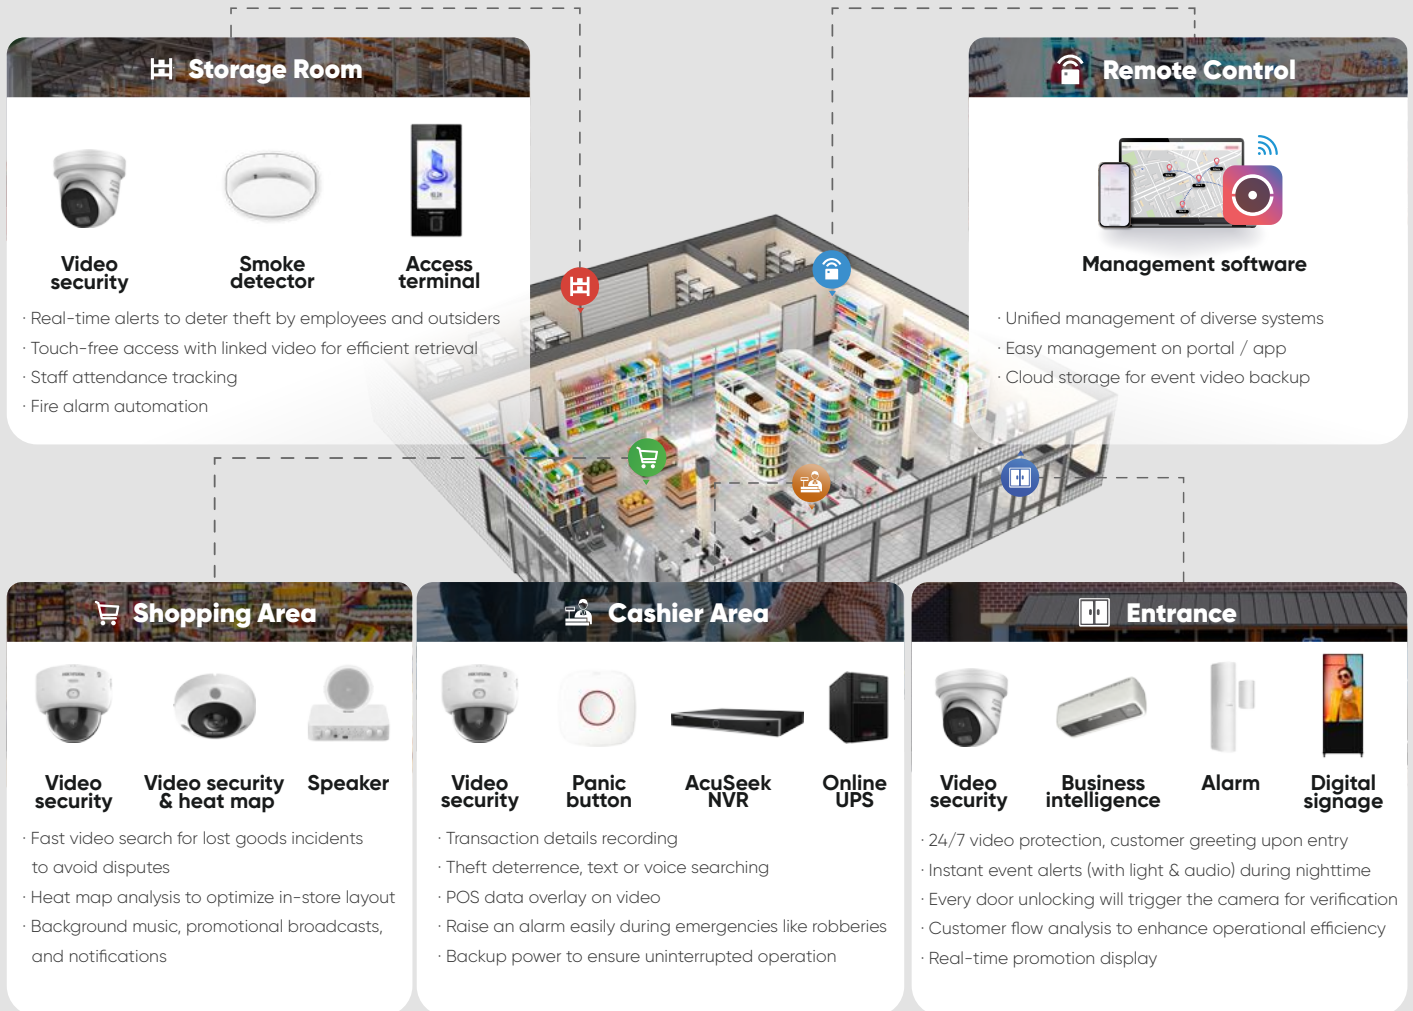

Product Showcase

Software



Hik-Partner Pro

For installers

- Remote health monitoring and troubleshooting on portal / app



Hik-Connect

For end-users

- Remote monitoring and management on portal / app
- Free access* (channels, doors, ANPRs, panels) to cover most SMB scenes

*Quantity varies by region. Contact local provider for details.



Scan to download

Video Security



Network Camera with PTRZ

DS-2CD2146G3-IPTRZS2UY

- 4 MP
- 2.8/4mm Point-to-Point Zoom
- Motorized pan, tilt, rotation, and zoom
- Up to 30 m IR light
- Arrayed dual-mic
- IP67, IK10, NEMA 4X
- Tamper-free & eco-friendly packaging



Network Camera with ColorVu

DS-2CD2347G3-LIS2UY/SL

- 4 MP
- ColorVu 3.0, AcuSense 3.0, Smart Hybrid Light
- Two-way audio, built-in dual-microphone
- Strobe light and audio alarm
- IR / white light up to 60 m
- IP67, NEMA 4X anti-corrosion



AcuSeek NVR

DS-7608NXI-I2(/8P)/VPro

- 8-ch IP video input; /P: PoE
- Up to 32 × 1080p decoding capability
- Full Channel AcuSeek for IPC with ColorVu 3.0 /AcuSense



Business intelligence



DeepinView Series Fisheye Camera

DS-2CD63C5G1-IVS

- Up to 360° coverage, 12 MP UHD
- Built-in AI algorithm: People Counting, Queue Management, Heat Map, Intersection Analysis
- Built-in mic and speaker



Dual-Lens People Counting Camera

DS-2CD6825G0/C-IVS

- Highly accurate vertical-view people counting
- Applicable for wide-door and high-ceiling scenarios

Access Control



MinMoe Face Recognition Terminal

DS-K1T342 Series

- 4.3-inch touch screen
- Max. 1500 faces
- Face recognition < 0.2 s / user
- IP65, PoE, video intercom



MinMoe Face Recognition Terminal

DS-K1T344 Series

- 4.5-inch touch screen
- Max. 3,000 faces
- Face recognition < 0.2 s / user
- IP65, PoE, video intercom



Alarm



AX PRO Kit

DS-PWA64-Kit-WE/WB

- Includes 1 panel, 1 keyfob, 1 PIR detector, and 1 magnetic contact
- Up to 64 wireless zones / outputs (including 48 PIRCAMs)
- LAN, Wi-Fi, GPRS (Single SIM card)



Wireless Emergency Button

DS-PDEB1-EG2-WE(B)/WB(B)

- Fully remote configurable through App
- IP66 waterproof



Wireless Smoke Detector

DS-PD451SMK-WE/WB

- Smoke & Heat
- Detection range: 30-80 m², 4-12 m
- Buzzer ≥ 85 dB @ 3 m
- Up to 1,000 m transmission range
- Up to 5 years battery life

Networking, Display and Accessory



Network Amplifier

DS-QAE1A80G1-VB

- 80 W, PoE
- Supports live / schedule broadcast
- Supports TTS (Text-To-Speech) (only for 1 channel)
- Multiple audio input: MIC / USB / Bluetooth / RCA
- Two-zone volume adjustment
- Built-in eMMC



Analog Ceiling Speaker

DS-QAE0206G1-V

- 6 W
- Constant voltage 100 V



Digital Signage

DS-D6055UN-D/S

- 55-inch screen
- Floor-standing installation
- Variable materials, static and dynamic materials, including pictures, video, pop-up, etc.



Smart Managed Switch

DS-3E1510P-EI

- 8 Gigabit PoE ports, 2 Gigabit RJ45 ports
- Total PoE power budget 110 W
- VLAN configuration



Monitor

DS-D5022F2

- 1080p
- 21.5"
- HDMI, VGA, Audio out



Online UPS

DS-UPS01K24-R/TS

- Capacity 1000 VA / 900 W, PF up to 0.9
- Easy management with local and remote monitoring
- Surge / short circuit / overcharge / over discharge protection and Emergency Power Off function (EPO)

SMB Solution for Offices

Grow your business with one-stop SMB solutions



Core Benefits


For installers

- + One-stop procurement and management
- Less maintenance cost with remote troubleshooting

For end-users

- One software for all devices
- Less costs with no need for servers / VPN
- Digital management for employees & visitors
- Robust protection against theft

How Our Solution Works

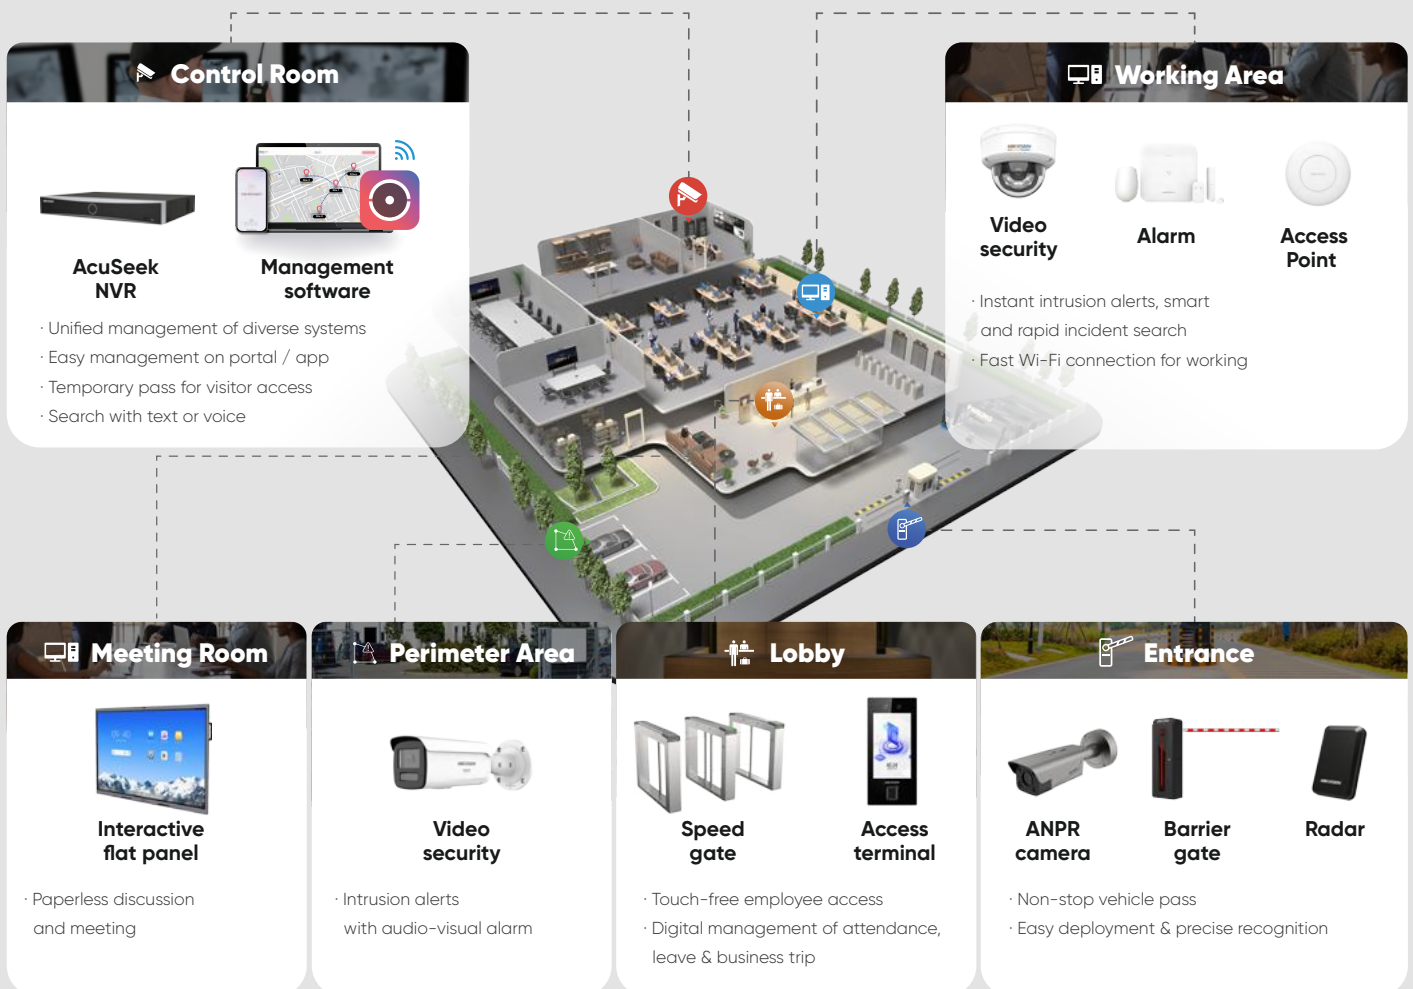

Product Showcase

Cloud-based Software



Hik-Partner Pro

For installers

- Remote health monitoring and troubleshooting on portal / app



Hik-Connect

For end-users

- Remote monitoring and management on portal / app
- Free access* (channels, doors, ANPRs, panels) to cover most SMB scenes

*Quantity varies by region. Contact local provider for details.



Scan to download

Video Security

Analog solution



Turbo HD Camera

DS-2CE78D0T-L(X)TS

- 2 MP
- Two-way audio
- Smart Hybrid Light
- 20 m white light and 25 m IR



Turbo HD Camera with ColorVu

DS-2CE72DF3T-LXTS

- 2 MP
- Two-way audio
- Smart Hybrid Light
- IR / white light up to 40 m
- WDR ≥ 120 dB
- IP67



PowerX DVR

iDS-7208HQHI-M1/XT

- 8-ch Motion Detection 2.0
- 4-ch perimeter protection
- 8-ch AcuSearch
- All channels two-way audio



IP solution



Network Camera with ColorVu

DS-2CD1147G3H-LIUF

- HikAI-ISP, 4 MP
- ColorVu 3.0, Motion Detection 3.0, Smart Hybrid Light
- 0.0001 lux @ F1.0
- IR / white light up to 30 m
- IP67, IK08



Network Camera with ColorVu

DS-2CD2T47G3-LIS2UY/SL

- 4 MP
- ColorVu 3.0, AcuSense 3.0, Smart Hybrid Light
- Two-way audio, built-in dual-microphone
- Strobe light and audio alarm
- IR / white light up to 60 m
- IP67, NEMA 4X anti-corrosion



AcuSeek NVR

DS-7616NXI-K1/VPro

- 16-ch IP video input; /P: PoE
- Up to 24 × 1080p decoding capability
- Full Channel AcuSeek for IPC with ColorVu 3.0 /AcuSense



Access Control



MinMoe Face Recognition Terminal

DS-K1T342 Series

- 4.3-inch touch screen
- Max. 1500 faces
- Face recognition < 0.2 s / user
- IP65, PoE, video intercom



MinMoe Face Recognition Terminal

DS-K1T344 Series

- 4.5-inch touch screen
- Max. 3,000 faces
- Face recognition < 0.2 s / user
- IP65, PoE, video intercom



QUICK PASS

Speed Gate

DS-K3B211LX series

- 4 pairs of infrared sensors
- Lane width: 550 mm to 900 mm
- MCBF > 3 millions times



Barrier Gate

DS-TMG32 series

- Max. rising speed 3 m @ 3 s, DC brushless motor
- MCBF: 2.5 million times
- App-based configuration via Bluetooth



ANPR Camera

DS-TCG406 Series

- 2688 × 1520 resolution
- 4 built-in LEDs (integrated white light and IR)
- LPR accuracy > 98%
- IP67, IK10



Anti-fall Radar

DS-TMG035 Series

- Response time 50 ms
- Detection area 0-2 m
- IP67

Alarm



AX PRO Kit

DS-PWA64-Kit-WE/WB

- Includes 1 panel, 1 keyfob, 1 PIR detector, and 1 magnetic contact
- Up to 64 wireless zones/outputs (including 48 PIRCAMs)
- LAN, Wi-Fi, GPRS (Single SIM Card)



Wireless Smoke Detector

DS-PD451SMK-WE/WB

- Smoke & Heat
- Detection range: 30-80 m², 4-12 m
- Buzzer ≥ 85 dB @ 3 m
- Up to 1,000 m transmission range
- Up to 5 years battery life

Networking and Display



Ceiling Access Point

DS-3WAP6230-EI

- Wi-Fi 6 dual band 3000 Mbps
- 2 × Gigabit ports with 1 PoE input
- Users (Max. / Recommend): 256 / 110



PoE Gateway Router

DS-3WG1510P-EI

- 8 Gigabit PoE ports, 2 Gigabit WAN ports
- Max. 1000 Mbps throughput
- Users: 100
- PoE power budget 60 W



Smart Managed Switch

DS-3E1528P-EI

- 24 × Gigabit PoE RJ45 ports, 2 × Gigabit RJ45 ports, 2 × Gigabit fiber optical ports
- Total PoE power budget 370 W



Interactive Flat Panel

DS-D5C75RB/B2L

- 4K display
- 75-inch touch screen
- Dual systems of Android and Windows



Monitor

DS-D5022F2

- 1080p
- 21.5"
- HDMI, VGA, Audio out

SMB Solution for Villas

Grow your business with one-stop SMB solutions



Core Benefits

For installers

- One-stop procurement and management
- Less maintenance cost with remote troubleshooting
- Easy Installation

For end-users

- One software for all devices
- Less costs with no need for servers / VPN
- Vehicle gate automatic unlocking
- High-level protection to deter theft

How Our Solution Works



Product Showcase

Cloud-based Software



Hik-Partner Pro

For installers

- Remote health monitoring and troubleshooting on portal / app



Hik-Connect (Personal Mode)

For end-users

- Remote monitoring and management on app



Scan to download

Video Security

Wireless Solution



AOV Solar Camera

DS-2CFS04/4G

- 4 MP, 1/3" CMOS
- 0.005 lux @ F1.6
- IR / white light up to 30 m
- Motion Detection 2.0
- Two-way audio
- IP66

SolarVu



AOV Solar Camera

DS-2CFSP4/4G

- Dual 4 MP, 0.005 lux@F1.6
- Panoramic view + detailed view
- Smart Hybrid Light: IR / white light up to 30 m
- Motion Detection 2.0
- Strobe light and audio alarm
- Two-way audio
- IP66

SolarVu



EasyLink Wi-Fi NVS Kit

NKS4223WBTH

- Smart Hybrid Light
- Two-way audio
- Smart tracking (PT Camera)
- One-tap privacy mode (PT Camera)
- 2 Micro SD card slots, up to 512GB each
- 4-ch IP video input

2 MP Wi-Fi Bullet Camera
3 MP Wi-Fi PT Turret Camera
4-ch NVS

Wi-Fi 6 Motion

Wired Solution



Network Camera with ColorVu

DS-2CD104763-LIU(F)(/SL)(/SRB)

- Strobe light & audio alarm, two-way audio, Smart Hybrid Light
- HikAI-ISP, 4 MP
- 0.0005 lux @ F1.0
- IR / white light up to 30 m
- IP67

ColorVu 3.0

Motion



Network Camera with ColorVu

DS-2CD114763-LIU(F)

- HikAI-ISP, 4 MP
- ColorVu 3.0, Motion Detection 3.0, Smart Hybrid Light
- 0.0005 lux @ F1.0
- IR / white light up to 30 m
- IP67, IK08

Motion



NVR with AcuSense

DS-7608NXL-K1(/8P)(E)

- 8-ch IP video input; /P: PoE
- Up to 10 × 4 MP / 20 × 1080p decoding capability
- 8-ch AcuSearch
- 2-ch perimeter protection

AcuSense

Video Intercom and Gate Opener



Hybrid HD Intercom Kit

DS-KIS313 Series

- Includes 1 indoor station, and 1 outdoor station
- App control
- Hybrid connection, plug & play



IP Video Intercom Kit

DS-KIS613-S

- 1 indoor station: 7" touch screen
- 1 door station: 4 MP, 150° FOV
- App control
- IP connection

TALKVU



Sliding Gate Opener

DS-K3GL606 Series

- Gate mass ≤ 600 kg
- Support Wi-Fi and LAN
- Open gate via keyfob, app, intercom, etc.



Alarm



AX PRO Kit

DS-PWA64-Kit-WE/WB

- Includes 1 panel, 1 keyfob, 1 PIR detector, and 1 magnetic contact
- Up to 64 wireless zones / outputs (including 48 PIRCAMs)
- LAN, Wi-Fi, GPRS (Single SIM card)



Wireless PIRCAM Detector

DS-PDPC12P-EG2-WE(B)/WB(B)

- Detection range: 12 m / 85.9°
- Up to 20 pictures for verification
- 800 m transmission distance
- Up to 5 years battery life



Wireless Smoke Detector

DS-PD451SMK-WE/WB

- Smoke & Heat
- Detection range: 30-80 m², 4-12 m
- Buzzer ≥ 85 dB @ 3 m
- Up to 1,000 m transmission range
- Up to 5 years battery life



Wireless Portable Emergency Button

DS-PDEBP1-EG2-WE(B)/WB(B)

- Fully remote configurable through app
- IP66 waterproof



Wireless PIR Glass Break Detector

DS-PDPG12P-EG2-WE/WB

- PIR detection range: 12 m / 85.9°
- Glass break detection range: 8 m / 120°
- Up to 30 kg pet immunity

Networking, Display and Accessory



Mesh Wi-Fi System

DS-3WRM126C Series

- AC1200M dual-band, Wi-Fi 5
- One-tap mesh: auto-pair devices
- Seamless roaming
- Dual app management via Hik-Connect & Hik-Partner Pro



Smart Managed Switch

DS-3E1309P-EL (B)

- 10/100 M PoE port: 8
- Gigabit RJ45 port: 1
- Total PoE power budget 110 W



Online UPS

DS-UPS01K24-R/TS

- Capacity 1000 VA / 900 W, PF up to 0.9
- Easy management with local and remote monitoring
- Surge / short circuit / overcharge / over discharge protection and Emergency Power Off function (EPO)

About Hikvision

Hikvision is committed to serving various industries through its cutting-edge technologies of machine perception, artificial intelligence, and big data, leading the future of AIoT.

Extensive R&D Capabilities




Almost 1/2 of employees are R&D engineers & technicians



Over 12% of annual revenue invested in R&D (2025)



12,000+ patents (2025)

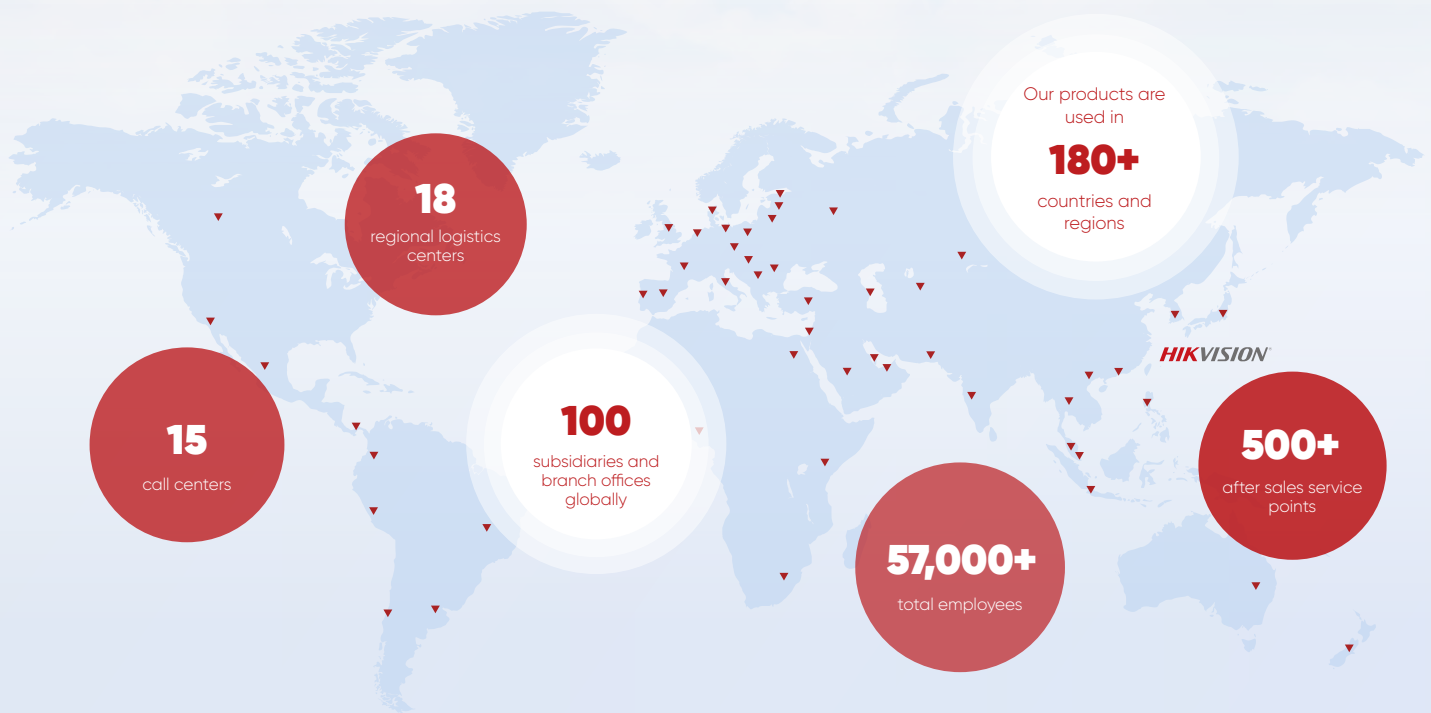

Abundant AIoT Product & Solution Offerings

Based on leading technologies, we develop complete hardware and software products, and roll out integrated security solutions and intelligent solutions for different vertical industries.



Perception Bridge

IoT Perception



Intelligence Engine

Artificial Intelligence



Value Amplifier

Big Data

Quick Guide for
Hot-Selling Distribution Products

2026



www.hikvision.com
support@hikvision.com



HIKVISION[®]