



**Rolls
Tiles & Planks**


Commercial Flooring Solutions

2023/2024 Collection


Gerflor®

Formats

With foam backing (Comfort)

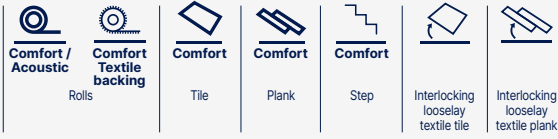

Without foam backing (Compact)



Performances

17 dB

Sound insulation in dB
(EN ISO 717-2)

R10

Slip resistance wet
(DIN 51130)

10⁵

Electrical resistance in Ω :
 $5 \times 10^4 \leq R \leq 10^6$
(EN 1081/DIN 51953)

10⁷

Electrical resistance in Ω :
 $10^6 \leq R \leq 10^8$
(EN 1081/DIN 51953)



Very high density foam



100% recyclable

Treatments



Micro structured cross coat
Polimerised laser technology



Polyurethane surface
Treatment UV cured
Stain shield
Matt effect

**Protectsol®
Protectsol® Mat**

Polyurethane surface
Treatment UV cured

**ProtectShield™
Pur+ Matt**

Polyurethane
surface treatment
Matt surface

Pur+

Polyurethane surface
treatment

Pur

Polyurethane surface
treatment

Sparclean®

Powder coated
treatment



New exclusive
Linoleum surface protection

Certification



Fire resistance

Static electrical
propensity

Electrical
resistance

Slip
resistance

Thermal
conductivity

Water
resistance

8-39. Mipolam Homogeneous

Evercare™

Mipolam Symbioz™
Mipolam Evo
Mipolam Planet & Bioplanet
Mipolam Elegance
Mipolam Affinity
Mipolam Accord
Mipolam Cosmo
Mipolam Troplan

PUR

Mipolam Classic

40-53. Premium

Poesy
Neopolis
Osmoz
Indiana
Metallica
Brazilia
My Premium
Attraction® Premium

54-123. Taralay Multilayered

Taralay Millenium **New**

Cosmic
Stellar

Taralay Libertex

Wood
Amsterdam
Paros
Reflect

Taralay Impression **New**

Taralay Impression **hop** **New**

Wood
Cemento
Terrazzo
Rough
Riverside
Gentlemen
Pure Wool
Finesse
Envol
Jungle
Nido
Rice
FlipKubes
Kubes
Metallic
Nest
Chess
Happy
Uni Matt

My Taralay Impression **New**

Taralay Initial

Wood
Urban
Strada
Spider
Diversion
Miami

Nerok

Tarastep Pro **New**

124-213. Creation LVT

Creation 70

Creation 70
Creation 70 Clic
Creation 70 Looselay
Creation 70 Connect **New**

Creation 55

Creation 55
Creation 55 Solid Clic
Creation 55 Rigid Acoustic
Creation 55 Looselay
Creation 55 Looselay Acoustic

Creation 40

Creation 40
Creation 40 Solid Clic
Creation 40 Rigid Acoustic

Creation 30

Creation 30
Creation 30 Solid Clic

My Creation **New**

My Saga² **New**

214-229. Technical tiles

GTI® Max

GTI® Pure

GTI® EL5

Attraction®

Neopolis
Brazilia
Indiana
Osmoz

230-255. Technical solutions

EL5 / EL7 solutions (Dissipative & conductive floors)

Mipolam EL7
Mipolam Robust EL7
Mipolam EL5
Mipolam Technic EL5
GTI® EL5

Safety flooring

Tarasafe Geo
Tarasafe Ultra
Tarasafe Standard
Tarasafe Plus/Super
Tarasafe Ultra H₂O

Shower System

Elegance SD
Tarasafe Ultra H₂O
Tarasafe Design
Mural Calypso

Wall Covering

Mural Ultra Design
Mural Club
Mural Calypso

256-285. DLW Linoleum

Compact Linoleum

Arabesque
Marmorette
Colorette
Uni Walton
Lino Art Urban
Lino Art Flow
Lino Art Metallic
Lino Art Star

Acoustic Linoleum

Marmorette Acoustic
Marmorette AcousticPlus
Colorette AcousticPlus
Uni Walton AcousticPlus
Lino Art Urban AcousticPlus

Technical Solutions

High mechanical Traffic Linodur
Dissipative Linoleum Marmorette LCH

286-319. Sport flooring

Taraflex® **New**

Synthetic Sport Flooring

Connor Sports®

Hardwood Flooring Systems

Sport Court®

Outdoor Surfaces

DLW **New**

Linoleum Sport Flooring

Powershock

Fitness Rubber Solutions

320-351. Finishes

Finishes

Skirting solutions
Stair solutions
Profile solutions
Welding solutions
Entrance mats solutions

Installation solutions

Shower system
Accessibility
Acoustic underlayers
Specific products
Adhesives and tapes

Sport finishes


Paint and marking for boundary lines

352-359. Specifications


Gerflor presentation

Since 1937, Gerflor **has designed, manufactured** and **distributed design-led, innovative** and **eco-responsible** floor coverings and wall protection solutions. Present in more than **100 countries**, with **4,500 employees**, **30 subsidiaries** and **24 production sites**, Gerflor serves many activity sectors including health, education, residential accommodation and sport.

Worldwide presence for better service

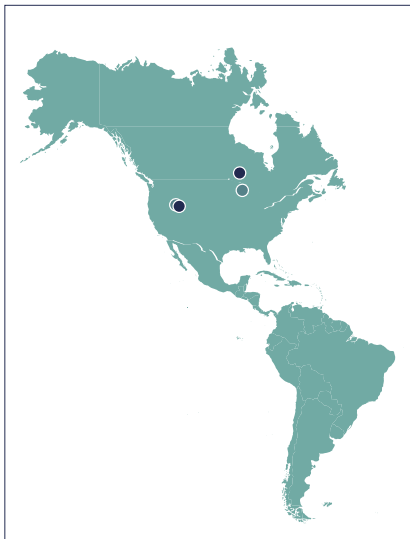

Americas

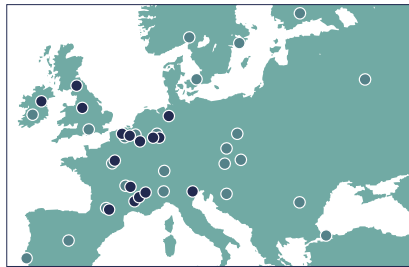

Europe
Middle East & Africa



Asia & Pacific

- Sales offices
- Manufacturing plants and logistic hubs

30 sales offices

24 manufacturing plants and logistic hubs

5 Technocentres



Industry



Healthcare



Hospitality



Offices



Sport



Education



Retail



Transport



Housing



Public
Housing



Our commitments for a sustainable future

Gerflor teams have always considered customers and the environment as their absolute priorities. Our floor coverings, wall solutions and finishing components are user friendly, healthy solutions. They are designed with respect for our planet to last as long as possible with proposed end-of-life options. From product design through end-of-life, the circular economy is a core priority for the group. We have determined 5 priority commitments to guide our environmental management up to 2025.

we care / we act Our Commitments for a Sustainable future



CARBON FOOTPRINT*
-20 % kg
CO₂ equivalent/m²
between 2020 and 2025



BIOSOURCED CONTENT**
10 % by 2025



RECYCLED CONTENT
30 % by 2025



ADHESIVE FREE***
35 % by 2025



ANNUAL VOLUME RECYCLED
60 000 t by 2025

* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution







Mipolam Homogeneous

pages 10-41

14. Mipolam Homogeneous Evercare™


- 16. Mipolam Symbioz™
- 20. Mipolam Evo
- 24. Mipolam Planet & Bioplanet
- 30. Mipolam Elegance
- 32. Mipolam Affinity
- 36. Mipolam Accord
- 38. Mipolam Cosmo
- 39. Mipolam Troplan


40. Mipolam Homogeneous PUR

- 40. Mipolam Classic

Mipolam Homogeneous

Type Binder content EN ISO 10581

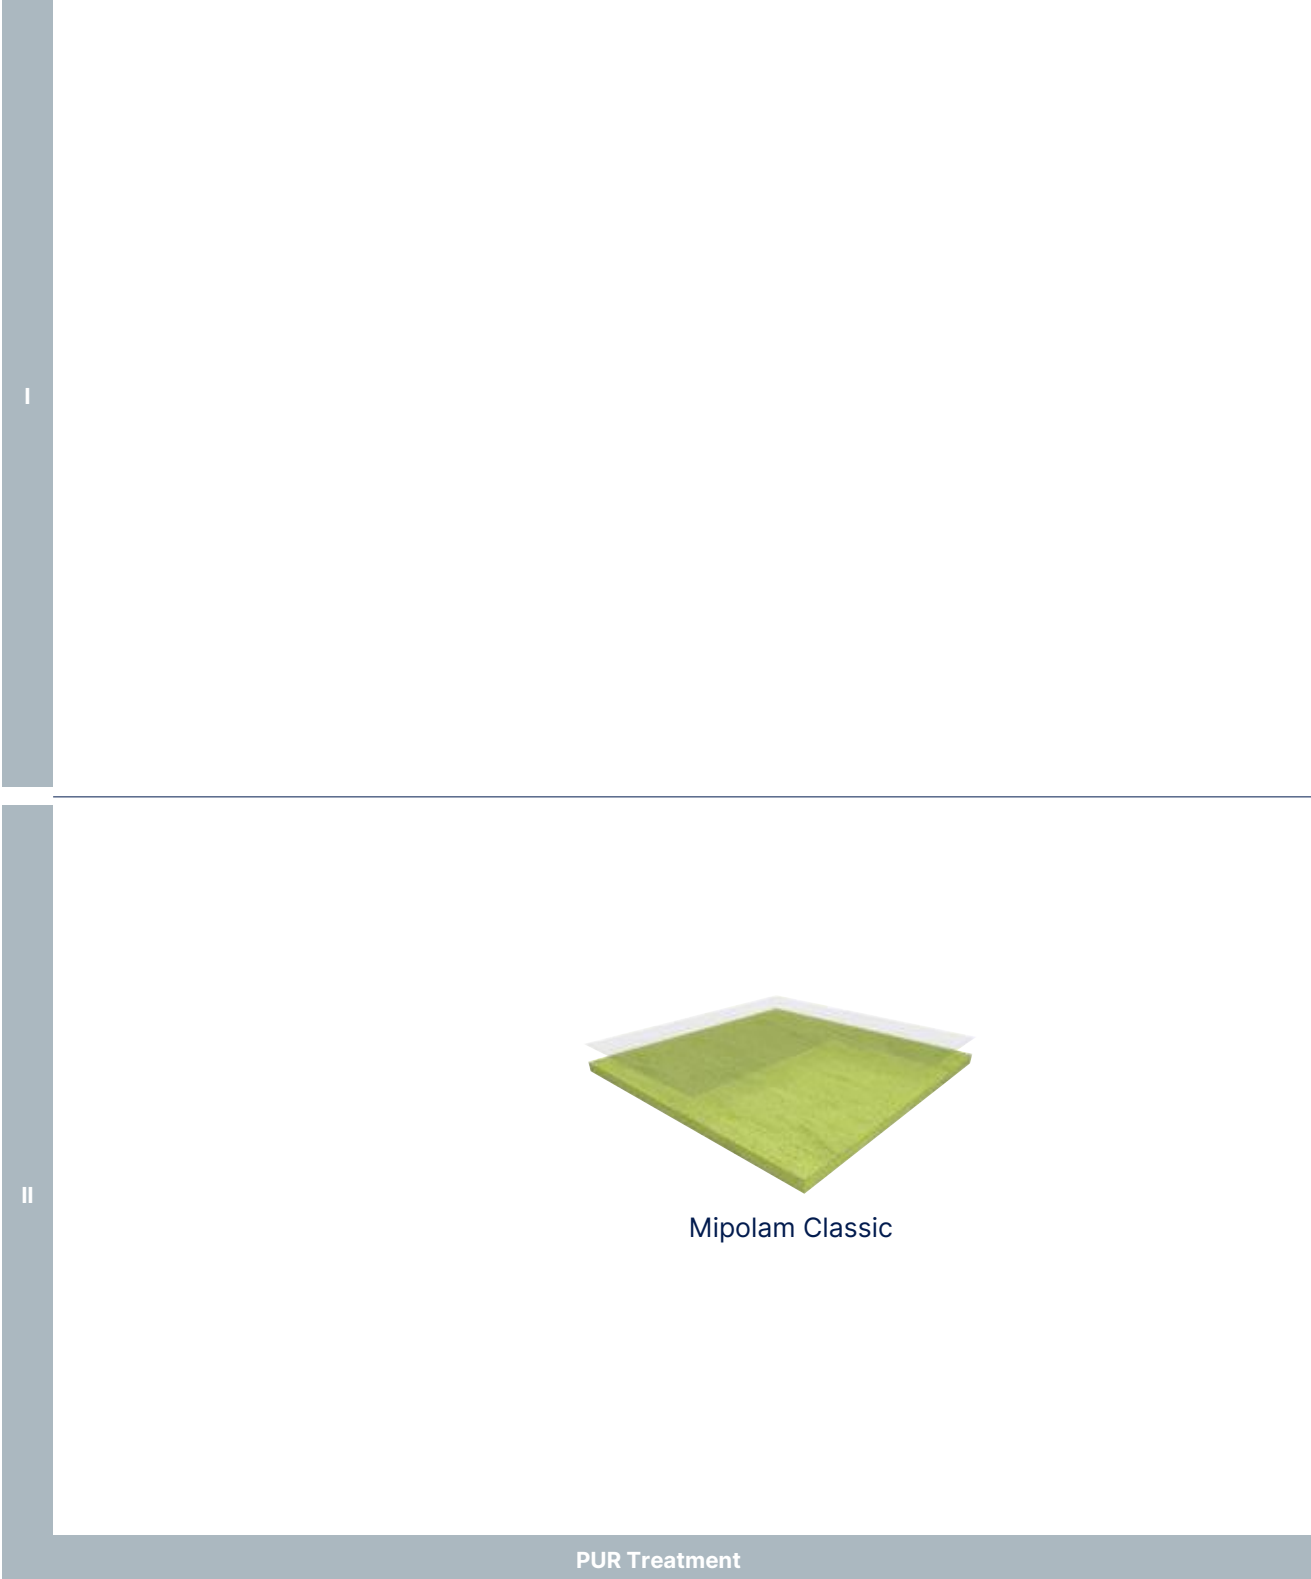




Mipolam
Symbioz™



Bio Content
17 %




Mipolam Evo

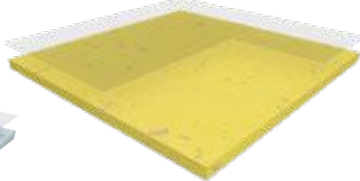

Mipolam Planet
Mipolam Bioplanet




Bio Content
17 %

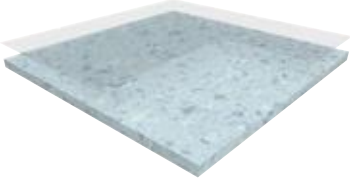

Mipolam Elegance
Mipolam Affinity
Mipolam Accord



Mipolam Cosmo

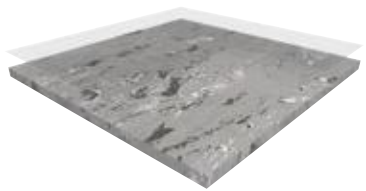

Mipolam Troplan



An exclusive and Gerflor
patented surface treatment.

Stain shield

**No wax for
life Water and
detergent savings**

**Matt effect:
enhanced design**

**Anti-bacterial &
anti-viral activity**
ISO 22196 & ISO 21702


Evercare™ Treatment

Maintenance

Mipolam Homogeneous Evercare™

Mipolam Symbioz™

Mipolam Symbioz™

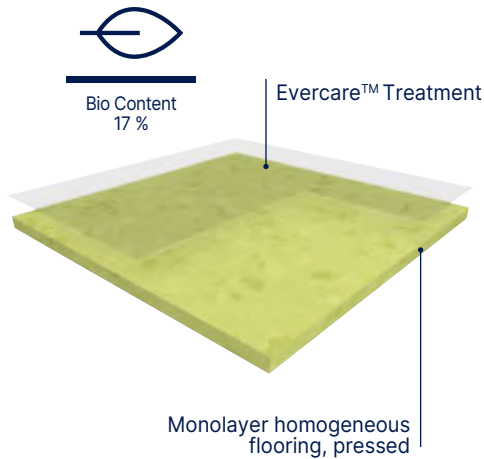

MIPOLAM SYMBIOZ™ is fully flexible homogeneous compacted floorcovering in sheet, 2 m wide, providing excellent resistance to wear and tear in high traffic areas. Their weight is **2595 gr/m²**. They feature a non-directional design incorporating coloured chips to ensure an even colour throughout the thickness presenting **a nice matt finish**.

MIPOLAM SYMBIOZ™ contain over 75% sustainable of renewable raw materials. They include a 100% bio based plasticizer, made of residues from cereals (wheat, corn...). It is 100% phthalates free and recyclable. This floorcovering is a non-emissive product (below the level of VOC measurement accuracy).

According to ISO 21702, Mipolam Symbioz has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h00.

According to ISO 22196, Mipolam Symbioz has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h00.

The flooring is equipped with **Evercare™**, patented surface treatment obtained by **UV laser cross-linking** offering **the best chemical resistance to the main products used in healthcare** environment as Betadine, eosin, hydro alcoholic solutions, making the maintenance easy and long lasting the flooring. This treatment **avoids applying any acrylic emulsion** throughout the lifetime of the product.

The flooring is **antistatic** (< 2 kV), its residual indentation is ≈ 0.02 mm.

The flooring complies with the EN ISO 10581 norm, has a binder content Type I and is suitable for heavy duty traffic areas and **Bfl-s1 fire** resistance.

As part of our sustainable development policy, this product is manufactured in the first floor covering plant awarded with the triple certification: ISO 9001 (quality), ISO 14 001 (environment) and OHSaS 18001 (safety).



BBR40:
100% Bio-based plasticizer rod for Mipolam Symbioz™
(see page 333)



Evercare™



100% recyclable

Mipolam Symbioz™ have been engineered using a full life cycle model, to guarantee the lowest environmental impact at every stage of the product life

- ▶ **Highest durability:** product life expectancy > 20 years
- ▶ **Eco-responsible exclusive Bio based plasticizer,** 100% made from organic source
- ▶ **Evercare™:** patented polyurethane surface treatment with unique performance in staining providing chemical resistance
- ▶ **Easy maintenance:** no wax for life
- ▶ **On average 30% savings on maintenance cost**
- ▶ **15% less detergent and water use.**

Indoor Air Quality: very low emitting material (40 times lower than European standards).

Mipolam Symbioz™

Description			
Total thickness	EN ISO 24346	mm	2
Weight	EN ISO 23997	g/sqm	2595
Width of sheet	EN ISO 24341	cm	200
Length of sheet	EN ISO 24341	lm	20
Classification			
Norm / Product specification	-	-	EN ISO 10581
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance	EN 16165:2021 – Appendix B (DIN 51 130)	class	R9
Performances			
Type Binder content	EN ISO 10581	type	I
Dimensional stability	EN ISO 23999	%	≤ 0.40
Impact Sound Insulation	EN ISO 717-2	dB	5
Residual indentation (norm)	EN ISO 24343-1	mm	≤ 0.10
Residual indentation (average measured value)	-	mm	≈ 0.02
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	Evercare™
Chemical products resistance	EN ISO 26987	class	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24h ⁽¹⁾	ISO 22196	-	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h ⁽¹⁾	ISO 21702	-	> 99.7% virucidal activity
Environment / Indoor Air Quality			
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
Certification	-	-	Floorscore®
CE Marking			
	EN 14041		

(1) The implementation of an effective cleaning regime is the most important defence against infection.

Mipolam Homogeneous Evercare™

Mipolam Symbioz™



Evercare™



100% recyclable



Bio Content
17 %




6027 Acacia

^ Scale 1




6027 Acacia




6002 Lipica




6030 Stonehenge

6001 Cotton






6009 Grey Stone





6050 Hurricane





6056 Tulum





6005 Ghibli






6008 Calico






6036 Oceania





6058 Vermiglio




6031 Breeze





6010 Mist






6037 Lagoon





6018 Ushuaia




6034 Mole






6029 Cloud






6006 Blue Sky





6075 Cardinal





6041 Clay




6039 Pebble





6047 Sauge




6065 Segesta





6043 Wood




6044 Sea Storm






6057 Musk





6025 Tangelo




6045 Chocolate




6059 Black Diamond




6067 Kaki





6032 Sunshine


Mipolam Homogeneous Evercare™

Mipolam Evo

Mipolam EVO

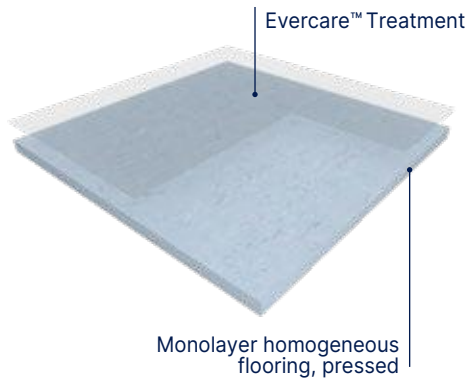

MIPOLAM EVO is a new generation of resilient flooring, made with a patented blend of synthetic thermoplastic polymers. It is a fully flexible homogeneous compacted floorcovering, available in sheet, 2m wide. It provides excellent resistance to wear and tear in high traffic areas. Its weight is **2700 gr/m²**.

Its composition is 100% REACH compliant ; **it contains no PVC and no plasticizer.**

The product ensures perfect indoor air quality (TVOC **<10 microgramms / m³** after 28 days according to NF EN16000-6)) and is **Floorscore and Blue Angel certified.**

It features 14 colours based on a timeless design with colours throughout its thickness presenting a **nice matt finish.**

The flooring is equipped with **Evercare™**, patented surface treatment obtained by **UV laser cross-linking** offering the best **chemical resistance to the main products used in healthcare** environment, such as betadine, eosin, hydro alcoholic solutions, making the maintenance and disinfection easy and long lasting.

This treatment **avoids applying any acrylic emulsion** throughout the lifetime of the product.

The flooring is **antistatic** (<2kV), its residual indentation is \approx 0.02 mm.

The flooring complies with the EN ISO 19322 norm, has a binder content Type I and is suitable for heavy duty traffic areas.

It is **Bfl-s1 fire** resistant and is rated R10 for antislip resistance.

It is 100% recyclable. 100% of their post manufacturing waste get recycled.

As thermoplastics, its recycled content replaces virgin material and is on average 20%.

Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the flooring **is certified Cradle to Cradle™ Silver.**

According to ISO 21702, Mipolam Evo has anti viral activity against Human Coronaviruses : it reduces the number of virus by 99,7% after 2h00.

According to ISO 22196, Mipolam Evo has anti bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h00.



Evercare™



100% recyclable

- ▶ Cradle to Cradle™ Silver and Blue Angel certified
- ▶ Evercare® surface treated for ease of maintenance and cleaning
- ▶ Up to 25% recycled content, 100% recyclable
- ▶ Hygienic properties: antibacterial activity (EN ISO 22196) and antiviral activity (ISO 21702)
- ▶ Heavy traffic resistance
- ▶ Harmonic array of 14 colours to design efficient buildings

Mipolam EVO

Description			
Total thickness	EN ISO 24346	mm	2
Weight	EN ISO 23997	g/sqm	2700
Width of sheet	EN ISO 24341	cm	200
Length of sheet	EN ISO 24341	lm	20
Classification			
Norm / Product specification	-	-	ISO 19322
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10
Performances			
Dimensional stability	EN ISO 23999	%	≤ 0.40
Impact Sound Insulation	EN ISO 717-2	dB	5
Residual indentation (norm)	EN ISO 24343-1	mm	≤ 0.10
Residual indentation (average measured value)	-	mm	≈ 0.04
Castor chair test (type H)	ISO 4918	-	OK
Water tightness	EN 13553 - Annex A	-	pass
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	Evercare™
Chemical products resistance	EN ISO 26987	class	OK
Environment / Indoor Air Quality			
VOC certifications	Blue Angel	-	ok
	Floorscore®	-	ok
	M1	-	ok
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24h ⁽¹⁾	ISO 22196	-	> 99% inhibits growth
Antiviral activity (human coronavirus 229E)	ISO 21702	-	99.7% after 2h 99.9% after 5h
CE Marking			
CE	EN 14041		

(1) The implementation of an effective cleaning regime is the most important defence against infection.

Mipolam Homogeneous Evercare™

Mipolam Evo



Evercare™



100% recyclable



9009 Trondheim



9009 Trondheim


^ Scale 1



9050 Malmo





9030 Uppsala




9029 Tromso






9008 Lulea





9044 Bergen





9063 Narvik




9031 Kiruna

9005 Visby




9045 Gello





9055 Goteborg




9032 Copenhagen




9027 Oslo


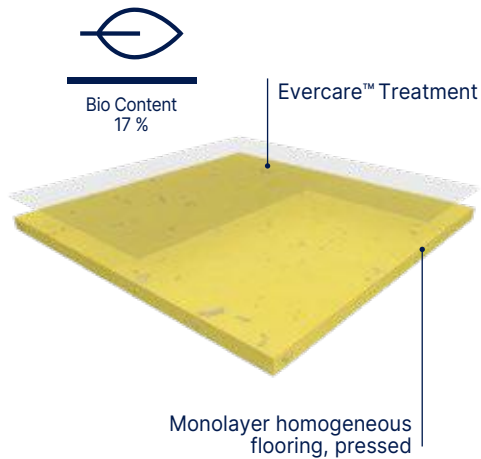


9006 Stockholm


Mipolam Homogeneous Evercare™

Mipolam Planet & Bioplanet

Mipolam Planet & Bioplanet



MIPOLAM PLANET is fully flexible homogeneous compacted floorcovering in sheet, 2 m wide, providing excellent resistance to wear and tear in high traffic areas. Their weight is **2700 gr/m²**. They feature a non-directional design incorporating translucent chips that provides a 3D effect and ensures an even colour throughout the thickness presenting a nice matt finish over 40 colours. The flooring is equipped with **Evercare™**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product. It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio-accumulative) or PBT (persistent, bio-accumulative and toxic) and is REACH compliant. It is **100% phthalates free and recyclable**. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (< 10 microgram/m³ and g/m³) and this product is classified A + (the best class). According to ISO 21702, Mipolam Planet has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h00. According to ISO 22196, Mipolam Planet has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h00. The flooring is **antistatic** (< 2 kV), its residual indentation is ≈ 0.02 mm. The flooring complies with the EN ISO 10581 norm, has a binder content Type I and is suitable for heavy duty traffic areas and **Bfl-s1 fire resistance**. As part of our sustainable development policy, this product is manufactured in the first floor covering plant awarded with the triple certification: ISO 9001 (quality), ISO 14 001 (environment) and OHSaS 18001 (safety).


MIPOLAM BIOPLANET is fully flexible homogeneous compacted floorcovering in sheet, 2 m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is **2700 gr/m²**. It features a non-directional design incorporating translucent chips that provides a 3D effect and ensures an even colour throughout the thickness presenting a nice matt finish over 40 colours. It contains over 75% sustainable of renewable raw materials. It include a 100% bio based plasticizer, made of residues from non-agricultural food. The flooring is equipped with **Evercare™**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product. It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio-accumulative) or PBT (persistent, bio-accumulative and toxic) and is REACH compliant. It is **100% phthalates free and recyclable**. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (< 10 microgram/m³ and g/m³) and this product is classified A + (the best class). According to ISO 21702, Mipolam Bioplanet has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h00. According to ISO 22196, Mipolam Bioplanet has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h00. The flooring is **antistatic** (< 2 kV), its residual indentation is ≈ 0.02 mm. The flooring complies with the EN ISO 10581 norm, has a binder content Type I and is suitable for heavy duty traffic areas and **Bfl-s1 fire resistance**. As part of our sustainable development policy, this product is manufactured in the first floor covering plant awarded with the triple certification: ISO 9001 (quality), ISO 14 001 (environment) and OHSaS 18001 (safety).



Evercare™



100% recyclable



Matt finish

- ▶ Recycled content up to 25%, 100% Recyclable
- ▶ Bio content 17% (Mipolam BioPlanet - on demand)
- ▶ Anti-viral activity & Anti-bacterial activity
Indoor air quality: TVOC 100 times below standard
- ▶ 40 COLOURS: Bright and subtle non directional design
- ▶ Heavy traffic resistance
- ▶ Ease of maintenance thanks to Evercare™

			Mipolam Planet	Mipolam BioPlanet	Mipolam Planet R10
Description					
Total thickness	EN ISO 24346	mm	2	2	2
Weight	EN ISO 23997	g/sqm	2700	2700	2700
Width of sheet	EN ISO 24341	cm	200	200	200
Tile size	EN ISO 24342	mm	608 × 608 ⁽¹⁾	608 × 608 ⁽¹⁾	608 × 608 ⁽¹⁾
Length of sheet	EN ISO 24341	lm	20	20	20
Classification					
Norm / Product specification	-	-	EN ISO 10581	EN ISO 10581	EN ISO 10581
European classification	EN ISO 10874	class	34-43	34-43	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2
Slip resistance	EN 16165:2021 – Appendix B (DIN 51 130)	class	R9	R9	R10
Performances					
Type Binder content	EN ISO 10581	type	I	I	I
Dimensional stability	EN ISO 23999	%	sheet < 0.40	sheet < 0.40	sheet < 0.40
Dimensional stability (average measured value)	-	%	sheet ≈ 0.10	sheet ≈ 0.10	sheet ≈ 0.10
Impact Sound Insulation	EN ISO 717-2	dB	5	5	5
Residual indentation (norm)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.10
Residual indentation (average measured value)	-	mm	≈ 0.02	≈ 0.02	≈ 0.02
Castor chair test (type H)	ISO 4918	-	OK	OK	OK
Decontamination	ISO 8690	-	Excellent	Excellent	Excellent
Watertightness	EN 13553	Annex A	Pass	Pass	Pass
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 7	≥ 7	≥ 7
Surface treatment	-	-	Evercare™	Evercare™	Evercare™
Chemical products resistance	EN ISO 26987	class	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24h ⁽²⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h ⁽²⁾	ISO 21702	-	> 99.7% virucidal activity	> 99.7% virucidal activity	> 99.7% virucidal activity
Environment / Indoor Air Quality					
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®
CE Marking					



EN 14041



(1) Products available in tiles for a minimum quantity order of 500 sqm.

(2) The implementation of an effective cleaning regime is the most important defence against infection.

Mipolam Homogeneous Evercare™

Mipolam Planet & Bioplanet



Evercare™



100% recyclable



5404 Vanilla Sky



^ Scale 1



5403 Moon Dust



5402 Ivory Dust




5412 Moon Stone



5424 Hawk Eye



5439 Moon Way



5441 Clay Soil



5432 Sun Stone



5418 Terra Nera



5422 Sunflower



5438 Andalusite



5428 Shedded Ground



5443 Wood Path




5445 Tree Bark



5444 Rocky Hill





Matt finish



5482 Sugar Drip



5406 Moqui



5430 Sideral Grey



5460 Lava Stone



5437 Reef Water



5416 Acquamarina



5450 Blended Ashes



5459 Stormy Cloud



5417 Foggy Hill



5426 Shadow



5420 Stone Powder



5429 Fog Patch




5427 Green Zest



5436 Tiger Eye



5413 Rain Fall



5439 Moon Way



5447 Aventurine



5456 Intense Indigo



5410 Silex



5411 Atlantic Grey



5455 Lava Flow



5466 Rocky Blue



5408 Chalk Dust



5409 Pebble Beach



5475 Intense Ruby




5446 Blue Nug



Mipolam Homogeneous Evercare™

Mipolam Elegance / Affinity / Accord / Cosmo / Troplan

Mipolam Elegance

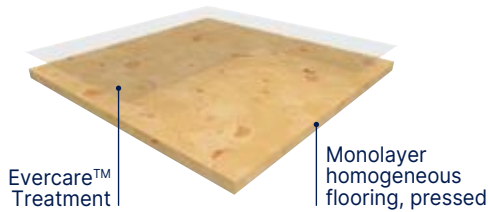


MIPOLAM ELEGANCE is a vinyl flooring homogeneous pressed in 2m sheets, with a thickness of 2 mm and a **weight of ≤ 2980 g**. The non directional design with colour throughout the thickness integrates a 3D effect (transparent particles in pure PVC on all 33 references) and a **mat finish**.

This flooring is recommended for administrative buildings making skirtings easier, as well as angles and welding. The flooring is equipped with **Evercare™** the latest improvements in polyurethane surface treatment obtained by **UV laser cross-linking**. This Evercare™ treatment avoids staining of **chemical products used in Healthcare** like Betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring. This treatment has excellent maintenance characteristics and does not require the application of acrylic polishes.

According to ISO 21702, **MIPOLAM ELEGANCE** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **MIPOLAM ELEGANCE** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h. The flooring is composed of minimum **25% recycled content 100% controlled** and is **REACH compliant**. It is 100% recyclable and 100% phthalate free. This flooring is **antistatic** (< 2 kV), compliant to EN ISO 10581 with a binder content type I, is suitable for heavy duty traffic areas and has a **Bfl-s1 fire** resistance. The product is non reactive to residual indentation with a value ≤ 0.02 mm. The product emission rate of volatile organic compounds is < 10 microgram/m³ (TVOC after 28 days ISO 16000-6).


Mipolam Affinity

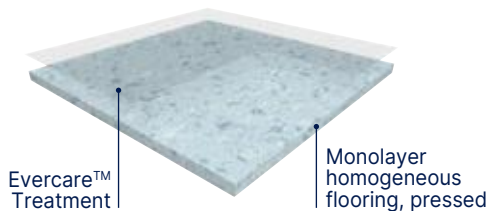

MIPOLAM AFFINITY is a vinyl flooring homogeneous pressed in 2 m sheets, with a thickness of 2 mm and a **weight of 2800 g**. The non-directional design with colour throughout the thickness is available in 50 references presenting a contrasted designed & a **mat finish**. This flooring is recommended for collective buildings making skirtings easier, as well as angles and welding. The flooring is equipped with **Evercare™**, patented surface treatment obtained by **UV laser cross-linking** offering **the best chemical resistance to the main products used in healthcare** environment as Betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment **avoids applying any acrylic emulsion** throughout the lifetime of the product.

According to ISO 21702, **MIPOLAM AFFINITY** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **MIPOLAM AFFINITY** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h. It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio-accumulative) or PBT (persistent, bio-accumulative and toxic) and is **REACH compliant**. It is 100% phthalate free and recyclable. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (< 10 microgram/m³) and this product is classified A + (the best class). This flooring is **antistatic** (< 2 kV), its residual indentation is ≤ 0.02 mm to 150 minutes respecting EN ISO 24343-1. This flooring complies with EN ISO 10581 offering a Binder content Type I, which makes it suitable for heavy duty traffic areas. It has a **Bfl-s1 fire** resistance.

Mipolam Accord

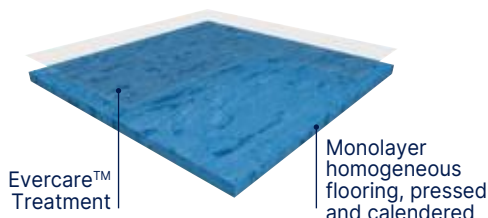

MIPOLAM ACCORD is a vinyl flooring homogeneous calendered and pressed in 2m sheets, with a thickness of 2 mm and a **weight of ≤ 2790 g**. The semi-directional design with colour throughout the thickness is available in 28 references presenting a nice **mat finish**.

This flooring is recommended for collective buildings making skirtings easier, as well as angles and welding. The flooring is equipped with **Evercare™** the latest improvements in polyurethane surface treatment obtained by **UV laser cross-linking**. This Evercare™ **avoids staining of chemical products used in Healthcare** like Betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring. This treatment has excellent maintenance characteristics and does not require the application of acrylic polishes.

According to ISO 21702, **MIPOLAM ACCORD** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **MIPOLAM ACCORD** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h. The flooring is composed of minimum **25% recycled content 100% controlled** and is **REACH compliant**. It is 100% phthalate free and 100% recyclable. This flooring is **antistatic** (< 2 kV). The product is non-reactive to residual indentation with a value ≤ 0.02 mm to 150 minutes respecting EN ISO 24343-1. The flooring is compliant with EN ISO 10581 norm, has a binder content type I, is suitable for heavy duty traffic areas and has a **Bfl-s1 fire** resistance. The product emission rate of volatile organic compounds is < 10 microgram/m³ (TVOC after 28 days ISO 16000-6).

Mipolam Cosmo




MIPOLAM COSMO is a vinyl flooring homogeneous calendered and pressed in 2 m sheets, with a thickness of 2 mm and a **weight ≤ 3000 g**. The semi-directional design with colour throughout the thickness is available in 10 references presenting a nice **matt finish**.

This flooring is suitable for medium to high traffic areas, and facilitates floor-wall junctions, angles and welding treatments. The flooring is equipped with **Evercare™**, patented surface treatment obtained by UV laser cross-linking offering **the best chemical resistance to the main products used in healthcare** environment as Betadine, eosin, hydro alcoholic solutions, making the maintenance easy and long lasting the flooring. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product. According to ISO 21702, **MIPOLAM COSMO** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **MIPOLAM COSMO** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h. It is composed of 45% minerals, 22% of inexhaustible material and at least **25% of recycled 100% controlled**.

It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio-accumulative) or PBT (persistent, bio-accumulative and toxic) and is **REACH compliant**.

It is 100% phthalate free and 100% recyclable. VOC emissions after 28 days (ISO 16000-6) are below detection levels with <10 microgram/m³ and this product is classified A + (the best class). The flooring is **antistatic** (<2 kV), its residual indentation is ≤ 0.02 mm. The flooring is compliant with EN ISO 10581 norm, has a binder content type I, is suitable for heavy duty traffic areas and has a **Bfl-s1 fire** resistance.

Mipolam Troplan

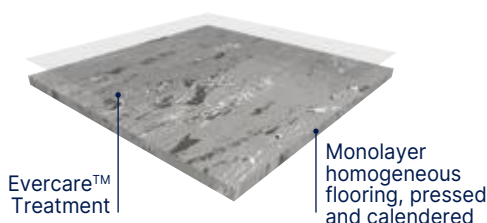

MIPOLAM TROPLAN is a vinyl flooring homogeneous calendered and pressed in 2 m sheets, with a thickness of 2 mm and a **weight ≤ 3300 g**. The directional design with colour throughout the thickness is available in 18 references presenting a nice **matt finish**.

This flooring is suitable for medium to high traffic areas, and facilitates floor-wall junctions, angles and welding treatments. The flooring is equipped with **Evercare™**, patented surface treatment obtained by **UV laser cross-linking** offering **the best chemical resistance to the main products used in healthcare** environment as Betadine, eosin, hydro alcoholic solutions, making the maintenance easy and long lasting the flooring. This treatment **avoids applying any acrylic emulsion** throughout the lifetime of the product.

According to ISO 21702, **MIPOLAM TROPLAN** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h.

According to ISO 22196, **MIPOLAM TROPLAN** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h. It is composed of 45% minerals, 22% of inexhaustible material and at least **25% of recycled 100% controlled**. It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio-accumulative) or PBT (persistent, bio-accumulative and toxic) and is **REACH compliant**. Mipolam Troplan is 100% phthalate free and 100% recyclable. VOC emissions after 28 days (ISO 16000-6) are below detection levels with < 10 microgram/m³ and this product is classified A + (the best class).

The flooring is **antistatic** (< 2 kV), its residual indentation is ≤ 0.03 mm. The flooring is compliant to the EN ISO 10581 norm, has a binder content type II, is suitable for heavy duty traffic areas and has a **Bfl-s1 fire** resistance.



Mipolam Homogeneous Evercare™

Mipolam Elegance / Affinity / Accord / Cosmo / Troplan



Evercare™



100% recyclable

High performing homogeneous multipurpose floorings

Suitable for heavy traffic areas (education, healthcare, shops)

► Mipolam Mipolam Elegance / Mipolam Affinity / Mipolam Accord / Mipolam Cosmo / Mipolam Troplan: Evercare™ - New revolutionary patented polyurethane surface treatment with unique performance in staining providing unrivalled chemical and scratching resistance

► Antistatic

► Densely compacted surface for improved wear and ease of maintenance

			Mipolam Elegance	Mipolam Affinity	Mipolam Accord	Mipolam Cosmo	Mipolam Troplan
Description							
Total thickness	EN ISO 24346	mm	2	2	2	2	2
Weight	EN ISO 23997	g/sqm	2980	2800	2790	3000	3300
Width of sheet	EN ISO 24341	cm	200	200	200	200	200
Length of sheet	EN ISO 24341	lm	20	20	20	20	20
Tile size	EN ISO 24342	mm	-	608 × 608 ⁽¹⁾	608 × 608 ⁽¹⁾	608 × 608 ⁽¹⁾	608 × 608
Number of tiles per package	-	-	-	20	20	20	20
Classification							
Norm / Product specification	-	-	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581
European classification	EN ISO 10874	class	34-43	34-43	34-43	34-43	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2	< 2
Slip resistance	EN 16165:2021 – Appendix B (DIN 51 130)	class	R9	R9	R9	R9	R9
Performances							
Type Binder content	EN ISO 10581	type	I	I	I	I	II
Dimensional stability (requirement)	EN ISO 23999	%	Sheet ≤ 0.40	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25
Dimensional stability (average measured value)	EN ISO 23999	%	-	-	-	-	-
Impact Sound Insulation	EN ISO 717-2	dB	5	5	5	5	4
Residual indentation (norm)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10
Residual indentation (average measured value)	-	mm	≈ 0.02	≈ 0.02	≈ 0.02	≈ 0.02	≈ 0.03
Castor chair test (type H)	ISO 4918	-	OK	OK	OK	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25	0.25	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Evercare™	Evercare™	Evercare™	Evercare™	Evercare™
Chemical products resistance	EN ISO 26987	class	OK	OK	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24h ⁽²⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h ⁽²⁾	ISO 21702	-	> 99.7% virucidal activity	> 99.7% virucidal activity	> 99.7% virucidal activity	> 99.7% virucidal activity	> 99.7% virucidal activity
Environment / Indoor Air Quality							
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10	< 10	< 10	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®	Floorscore®
CE Marking							
		EN 14041					

(1) Products available in tiles for a minimum order quantity of 500 sqm.

(2) The implementation of an effective cleaning regime is the most important defence against infection.

Mipolam Homogeneous Evercare™


Mipolam Elegance



Evercare™



0329 Hazelnut

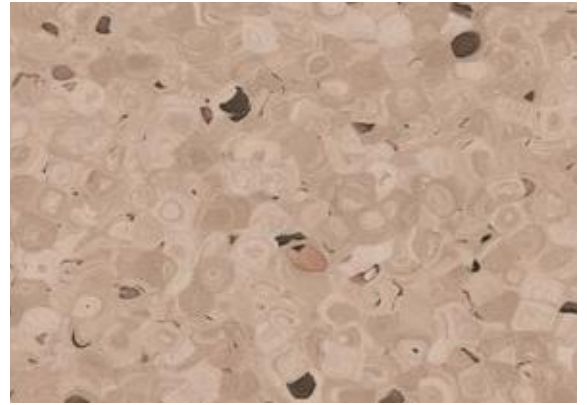

0329 Hazelnut

^ Scale 1




0705 Patisson*



0347 Mangoustan



0696 Ginger*



0318 Grape



0343 Pecan*



0344 Nutmeg*




0697 Greenstone



0321 Olive






Matt finish



0322 Jicama*





0699 Banana




0340 Jambolan




0704 Raspberry Grey*






0328 Almond




0333 Ananas





0339 Apple




0319 Quetsche





0323 Nut*




0700 Melon





0338 Kiwi

0348 Bluetta*





0324 Chestnut





0327 Pear





0703 Lime





0341 Bilberry

0698 Cacao




0702 Kumquat

0330 Litchi





0342 Blueberry




0326 Jojoba




0331 Plum




0336 Acerola




0349 Bluecrop


 References also available as Elegance SD suitable for Shower system.

* References in stock - other colours available on order.

Mipolam Homogeneous Evercare™

Mipolam Affinity



Compact




Compact

Evercare™



100% recyclable



Matt finish



4476 Amethyst



^ Scale 1



4476 Amethyst - 4402 Yuki





4417 Aquamarine 




4408 Crystal Ice 






4482 Orchid 




4448 Ruby 




4496 Light Sapphire 




4409 Matte Grey 




4481 Rosaspina 




4475 Cinabre 





4416 Sapphire 




4410 Violet Grey 





4437 Cashmere Rose 

4455 Orange Sunlight 




4446 Blue Ocean 

4426 Baltic 





4429 Gray Opal 




4435 Butternut 




4436 Santorini 




4420 Silver Grey 




4430 Pearl Grey 





4425 Amber 




4466 Thistle 




4450 Stormy Weather 






4434 Cast Iron 




4460 Black Stone 




4459 Grey Storm 




4433 Ash Coat 


(1)  Mentioned colors available with MCR40 specific multicolor welding rod (code: H058)

(2) All colors available with CR40 matching uni welding rod (code: 0585)

Mipolam Homogeneous Evercare™


Mipolam Affinity



Evercare™



100% recyclable



Matt finish



4402 Yuki



^ Scale 1



4402 Yuki - 4447 Light Emerald





4445 Mocca



4443 Lime Taupe



4444 Havana Brown




4467 Clover




4431 Exotic Mud




4463 Greige




4428 Sandy



4457 Olivine



4413 Marlyn




4441 Light Greige



4404 Milkshake



4427 Pine Forest



4412 Tundra



4405 Sand Opal



4424 Smoked Opal




4407 Spearmint



4411 Raffia



4401 Quartz



4403 Natural Shade



4447 Light Emerald



4432 Citrine



4422 Mango



(1) Mentioned colors available with MCR40 specific multicolor welding rod (code: H058)

(2) All colors available with CR40 matching uni welding rod (code: 0585)

Mipolam Homogeneous Evercare™

Mipolam Accord



Compact




Compact

Evercare™



100% recyclable



Matt finish



0330 Kruger



^ Scale 1



0330 Kruger / 0321 Salt





0321 Salt



0332 Dore



0324 Sand




0312 Powell



0447 Grunsee



0425 Cork



0301 Louise



0310 Huron



0457 Como



0315 Orange River



0303 Manitoba



0319 Toba



0417 Constance



0448 Bandak



0305 Light Sand




0320 Ontario



0306 Inari



0437 Flamingo Resort



0441 Loch Ness



0450 Thames



0316 Malaren



0463 Bourget



0443 Krumme



0360 Balaton



0346 Roxen



0445 Otto



0459 Mississippi



* All colors available with MCR40 specific multicolor welding rod (code: H058) and with CR40 matching uni welding rod (code: 0585)

Mipolam Homogeneous Evercare™


Mipolam Cosmo




Evercare™



100% recyclable



Matt finish

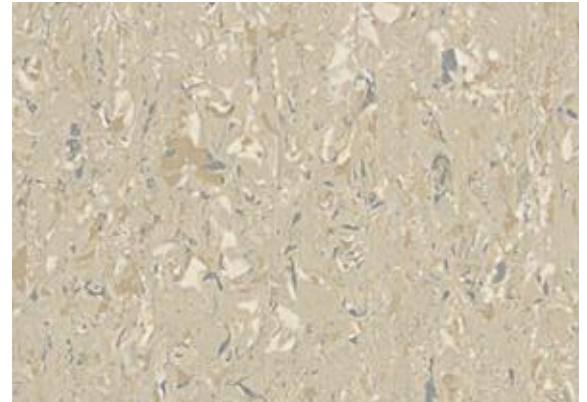

2633 Lichen

^ Scale 1



2603 Lemon Chiffon



2317 Soft Green




2609 Light Smoke



2606 Azur



2610 Silver



2636 Overseas



2638 Pure Grey



2355 Real Red



2639 Smart Grey




Mipolam Troplan



Evercare™



100% recyclable



Matt finish



1004 Earth



1004 Earth

^ Scale 1



1009 Light Grey



1032 Yellow



1055 Apricot



1002 Beige



1010 Grey



1006 Blue



1007 Green




1003 Light Ocre



1059 Blue Grey




1036 Medium Blue



1037 Medium Green



1035 Ocre



1040 Dark Grey



1056 Dark Blue



1057 Dark Green



1033 Brown




1060 Anthracite



Mipolam Homogeneous PUR

Mipolam Classic

Mipolam Classic

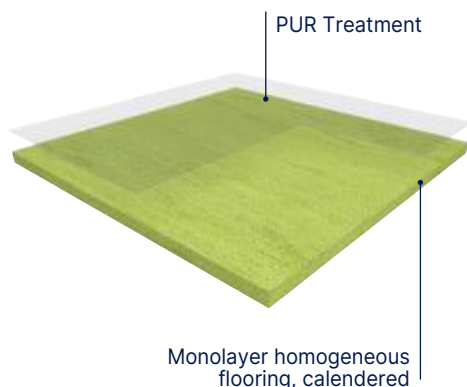

MIPOLAM CLASSIC 1.5 mm is a flexible homogeneous calendered compacted floorcovering in tiles or sheets, with directional design, colour dyed as a raw mixture to ensure even colour throughout the thickness of 1.5 mm and a **weight of ≤ 2520 g**. Its surface is densely compacted for improved wear and ease of maintenance.

It receives a polyurethane (**PUR**) surface treatment for ease of maintenance and to avoid the use of an immediate acrylic emulsion after installation. The flooring complies with the **EN ISO 10874** (34-43) and EN ISO 10581, has a binder content type II, has Bfl-s1 fire resistance. It is suitable for heavy traffic areas.

It is 100% recyclable. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (< 10 microgram/m³) and this product is classified A + (the best class).

MIPOLAM CLASSIC 2 mm is a flexible homogeneous calendered compacted floorcovering in tiles or in 2 m sheets, with a thickness of 2 mm and a **weight of ≤ 3300 g**. This directional design, colour dyed as a raw mixture to ensure even colour throughout the thickness is available in 14 references. Its surface is densely compacted for improved wear and ease of maintenance.

It receives a polyurethane (**PUR**) surface treatment for ease of maintenance and to avoid the use of an immediate acrylic emulsion after installation. The flooring complies with the **EN ISO 10874** (34-43) and EN ISO 10581, has a binder content type II, has Bfl-s1 fire resistance. It is suitable for heavy traffic areas.

It is 100% recyclable. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (< 10 microgram/m³) and this product is classified A + (the best class).

Mipolam Classic

Description				
Total thickness	EN ISO 24346	mm	1.5	2
Weight	EN ISO 23997	g/sqm	2520	3300
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	lm	20	20
Tile size	EN ISO 24342	mm	-	300 × 300 ⁽¹⁾ / 608 × 608
Number of tiles per package	-	-	-	50 / 20
Classification				
Norm / Product specification	-	-	EN ISO 10581	EN ISO 10581
European classification	EN ISO 10874	class	23-31	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Performances				
Type Binder content	EN ISO 10581	type	II	II
Dimensional stability	EN ISO 23999	%	≤ 0.40	Sheet ≤ 0.40 / Tile ≤ 0.25
Impact Sound Insulation	EN ISO 717-2	dB	-	4
Residual indentation (norm)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10
Residual indentation (average measured value)	-	mm	≈ 0.03	≈ 0.03
Castor chair test (type H)	ISO 4918	-	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6
Surface treatment	-	-	PUR	PUR
Chemical products resistance	EN ISO 26987	class	OK	OK
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10	
Certification	-	-	Floorscore®	
CE Marking				



EN 14041



(1) Tiles (300 × 300 mm) available for a minimum order quantity of 500 sqm.



PUR

100% recyclable



0002 Platinum ▲ ^ Scale 1




0108 Pepper
 



0122 Pineapple
 





0123 Corallo
 



0301 Beige
 




0005 Steel
 



0010 Azure ▲
 



0121 Green Leaf
 




0003 Ivory
 



0303 Grey
 



0013 Pewter
 



0124 Tortora
 



0014 Brown
 



0125 Truffle
 

All colours available as 300 × 300mm tiles upon request for a minimum order quantity of 500 sqm.
▲ Thickness: 1.5 mm - Sheet format only





Premium

pages 40-53

40. Premium

- 46. Poesy
- 47. Neopolis
- 48. Osmoz
- 50. Indiana
- 52. Metallica
- 52. Brazilia

53. My Premium

Attraction® Premium

(See page 228)

Premium

The unrivalled high traffic solution



A Sustainable Choice



100% recyclable
Recycled content up to 53%



Adhesive free
for Attraction® tiles



Health & Wellness
Anti-viral and **anti-bacterial** activity
Acoustic: reduction **-17 dB** (Comfort)
Indoor air quality: TVOC emissions
10 times better than norms
requirements



Made in Europe

We care / we act

Our Commitments for a Sustainable future



Premium

Best technologies in one

Evercare™ technology



Stain resistance



Matt surface

100% pure homogeneous wearlayer



Superior abrasion & traffic resistance



Long lasting colors


Multilayered construction



Exceptional dimensional stability



Acoustic properties
• 17 dB (Comfort sheet)
• 8 dB (Compact sheet)

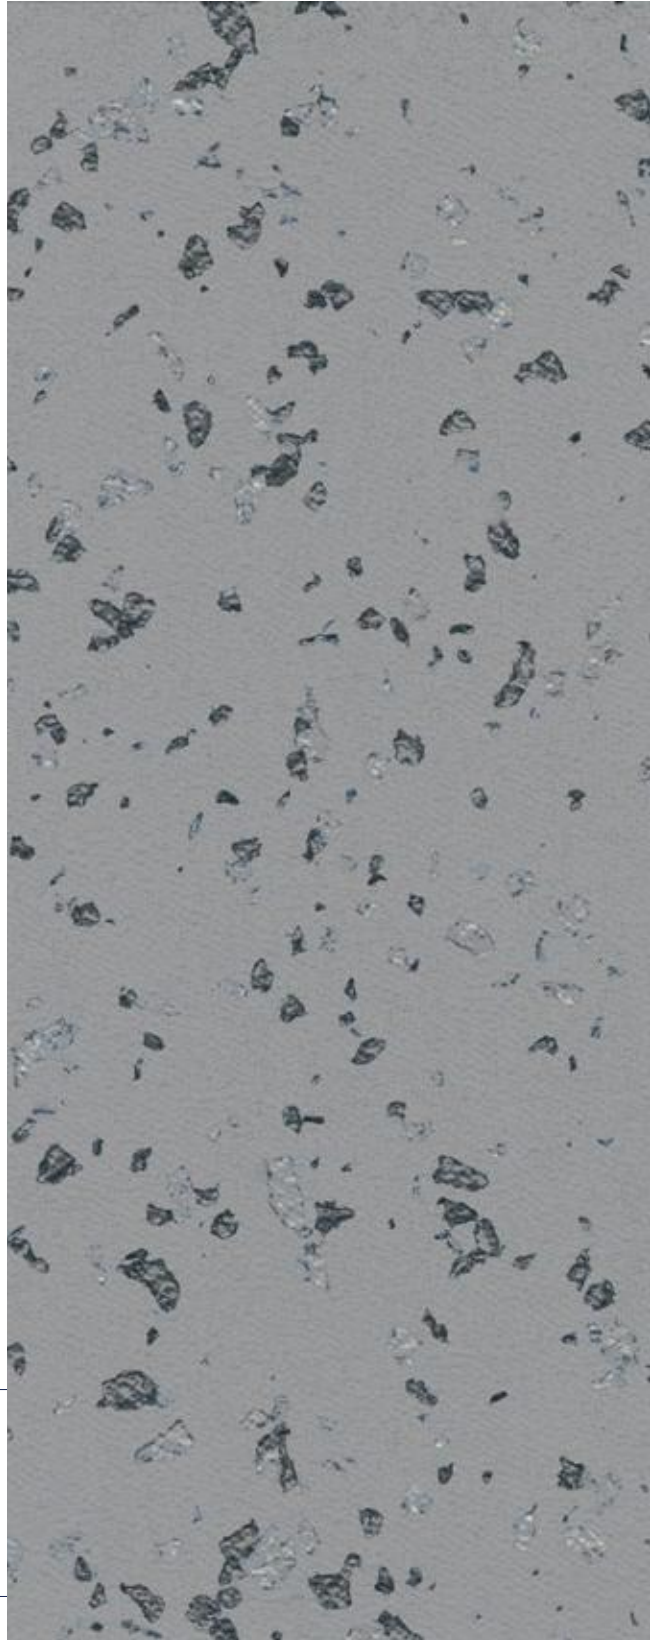


my Premium

Customize your floor! 

Premium

Premium Comfort

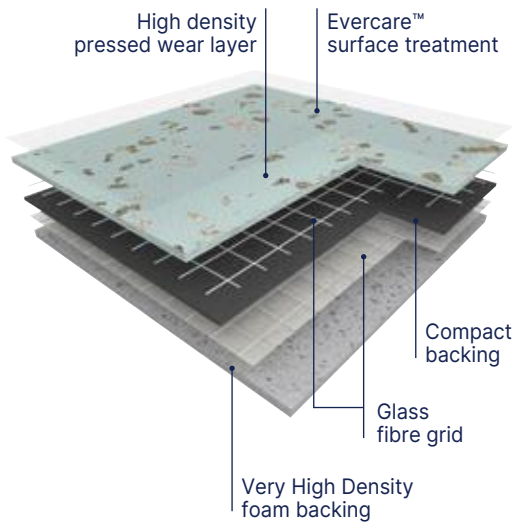

The floor covering is made of a ≥ 1.02 mm thick, pure vinyl homogeneous wear layer with no filler, incorporating very densely pressed coloured chips, with a mat finishing and without a transparent wear layer.

It offers a T group wear rating and is available in 2 m wide sheet.

The product contains a compact backing which is calendered, pressed and a Very High Density (VHD) foam backing.

It is reinforced with a double glass fibre grid.

It offers a **17 dB (Metallica: 16 dB) sound insulation, an indentation resistance of 0.06 mm and a rolling heavy loads easiness.**

PREMIUM COMFORT is treated with **Evercare™**, a surface treatment obtained by UV laser crosslinking. It ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

According to ISO 21702, **PREMIUM COMFORT** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **PREMIUM COMFORT** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h.

It is 100% compliant with REACH.

It is composed of 40% of minerals and inexhaustible materials.

It is made with up to 53% recycled content; 100% of which are fully controlled and REACH compliant.


It does not contain any heavy metals, any formaldehydes.

It is made with phthalate free plasticizers.

The products emission rate of volatile organic compounds is **< 10 microgram/m³ (TVOC after 28 days – ISO 16000-6).**

It is 100% recyclable.

Premium Compact

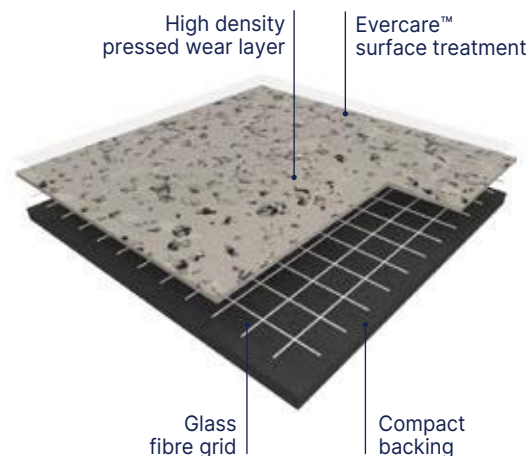

The floor covering is made of a ≥ 1.02 mm thick, pure vinyl homogeneous wear layer with no filler, incorporating very densely pressed coloured chips, with a mat finishing and without a transparent wear layer.

It offers a T group wear rating and is available in 2 m wide sheet.

Its compact backing is calendered, pressed and reinforced with a glass fibre grid yielding.

It offers a **8 dB sound insulation, an indentation resistance of 0.02 mm and a rolling heavy loads easiness.**

PREMIUM COMPACT is treated with **Evercare™**, a surface treatment obtained by UV laser crosslinking. It ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

According to ISO 21702, **PREMIUM COMPACT** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **PREMIUM COMPACT** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h.

It is 100% compliant with REACH.

It is composed of 40% of minerals and inexhaustible materials.

It is made with up to 53% recycled content; 100% of which are fully controlled and REACH compliant.

It does not contain any heavy metals, any formaldehydes.

It is made with phthalate free plasticizers.

The products emission rate of volatile organic compounds is **< 10 microgram/m³ (TVOC after 28 days – ISO 16000-6).**

It is 100% recyclable.



17 dB

16 dB
Metallica



Evercare™



100% recyclable

Outstanding durability

Design within the whole thickness of the wear layer, ≥ 1.02 mm thick

Long lasting appearance

Pure vinyl wear layer (no filler, no transparent wear layer) for the best scratch and soiling resistance

Easy maintenance & matt effect

Evercare™ surface treatment

Excellent indoor air quality

TVOC after 28 days < 10 microgram/m³

Rolling heavy loads easiness, best stability and very high performance indentation / acoustic 0.06 mm / 17 dB (Metallica: 16 dB) for Comfort, 0.02 mm / 8 db for Compact Glass fibre grid reinforcement & very high density foam backing

Premium Comfort

Poesy - Neopolis - Osmoz - Indiana - Metallica - Brazilia

Premium Compact

Poesy - Neopolis - Osmoz - Indiana - Metallica - Brazilia

Description			Premium Comfort	Premium Compact
Total thickness	EN ISO 24346	mm	3.00 - 3.30	2.00
Thickness of wearlayer	EN ISO 24340	mm	≥ 1.02	≥ 1.02
Weight	EN ISO 23997	g/sqm	≥ 2800	≥ 2580
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	lm	25	20
Classification				
Norm / Product specification	-	-	EN ISO 11638	EN ISO 10582
European classification	EN ISO 10874	class	34-42	34-43
Fire rating	EN 13501-1	class	Cfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10	R10
Performances				
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0
Wear group	-	group	T	T
Type Binder content	EN ISO 10582	type	-	I
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20	≤ 0.10
Residual indentation (average measured value)	-	mm	≈ 0.06	≈ 0.02
Impact sound insulation	EN ISO 717-2	dB	17 16 (Metallica)	8
Castor chair test (type H)	ISO 4918	-	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6
Surface treatment	-	-	Evercare™	Evercare™
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24h ⁽²⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h ⁽²⁾	ISO 21702	-	> 99.7% virucidal activity	> 99.7% virucidal activity
Environment / indoor air quality				
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®
CE marking				



EN 14041



(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
 (2) The implementation of an effective cleaning regime is the most important defence against infection.

Premium

Poesy




17 dB



Evercare™




100% recyclable



Matt finish




2750 Ellipse

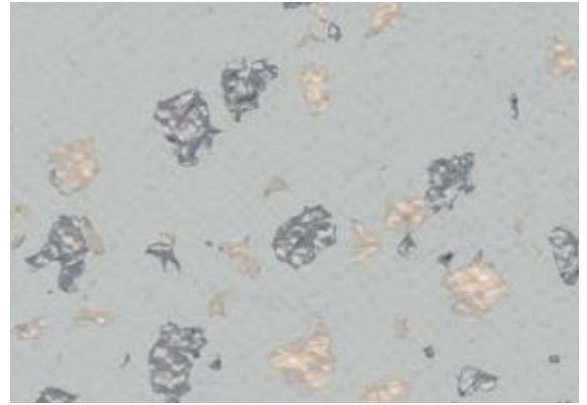

2750 Ellipse

^ Scale 1



7109 Idylle




2752 Litote




8626 Rime



2751 Slam



8627 Allegorie



2747 Ballade



8621 Ode



2748 Refrain



2749 Lyrique



Neopolis




17 dB



Evercare™



100% recyclable



Matt finish

Premium



2744 Queens Soft




2741 Brooklyn

^ Scale 1




2743 Central Park



2745 Plaza



2744 Queens Soft



2740 Harlem Soft



2742 Times Square




Premium

Osmoz

-  Compact
-  Comfort
- 17 dB
-  VHD
- Evercare™
-  100% recyclable




7735 Coffee Brown / 4350 Elefant




Matt finish

Premium

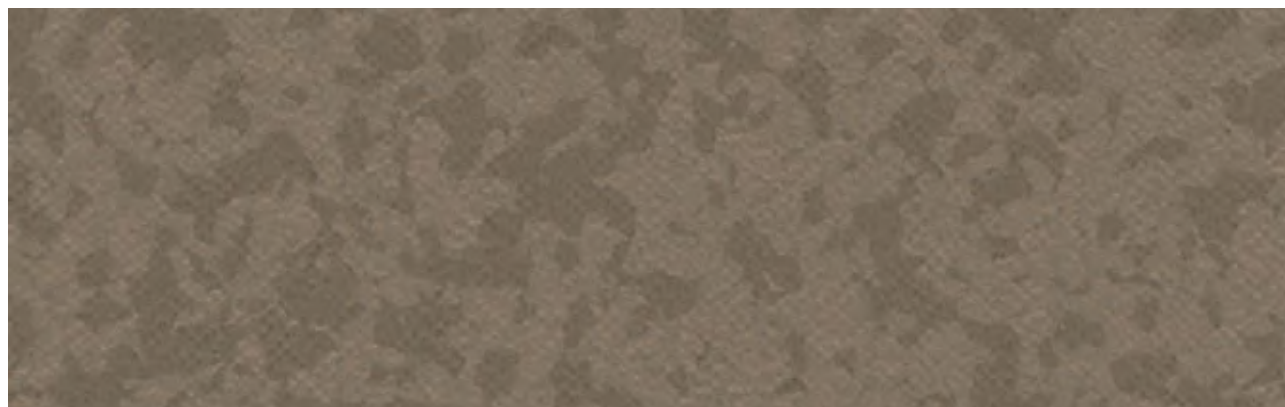


7735 Coffee Brown


^ Scale 1



4364 Ivory New




4365 Alpaga New




3792 Storm Grey



3791 Slate Grey



4350 Elefant



4349 Angora



4351 Greige



8073 Cocoa



4527 Bamboo



4496 Pacific Blue



0356 Denim



7737 Pepper Grey



7204 Mimosa



0702 Kumquat



7108 Grenadine



Premium

Indiana



Compact



Comfort


17 dB



Evercare™




100% recyclable



Matt finish




7517 Faroe

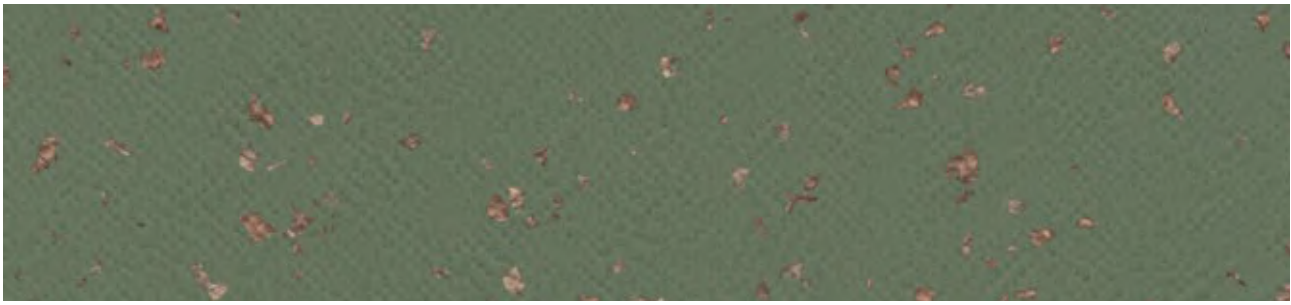

7517 Faroe


^ Scale 1



8059 Nicobar



8150 Bali



4343 Tokelau




8262 Rodrigues



8053 Anambas



8226 Fidji



3788 Nauru



4009 Tufoa



8470 Samoa



4003 Tao



4002 Manua



4001 Ofu



8837 Songo



4004 Pago



8850 Maupiti



4135 Aldabra




4015 Guinea



4526 Lasia



4469 Pemba



4476 Wattaru



8256 Tahaa



4142 Penang



4146 Moheli



8194 Kornati



Premium

Metallica / Brazilia



16 dB
Metallica


17 dB
Brazilia



Evercare™



100% recyclable



Matt finish


Metallica



8257 Nyx




^ Scale 1



9719 Eclipse



8625 Naiade



8623 Sedna



8624 Triton



9745 Cosmic



9310 Tethys



9753 Energy



9330 Moon



2746 Ymir




Brazilia



4342 Juara




^ Scale 1



3709 Ceara



4478 Copacabana



8736 Recife



4477 Maceio



3734 Almerim



8577 Amazonas



8386 Boa Vista



8269 Ipanema



4329 Bacabal



8157 Goias



3707 Paraiba



4136 Sao Luis




My Premium


Customize your floor!



1. Select a design type



Brazilia




Indiana



Osmoz




Poesy



Neopolis

2. Choose your granules: palette

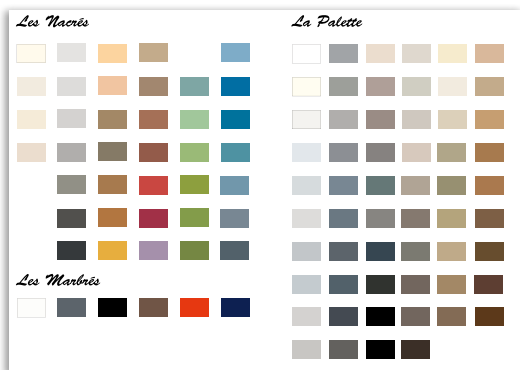


...

3. Visualize your design and order online on



my Floor by Gerflor .com

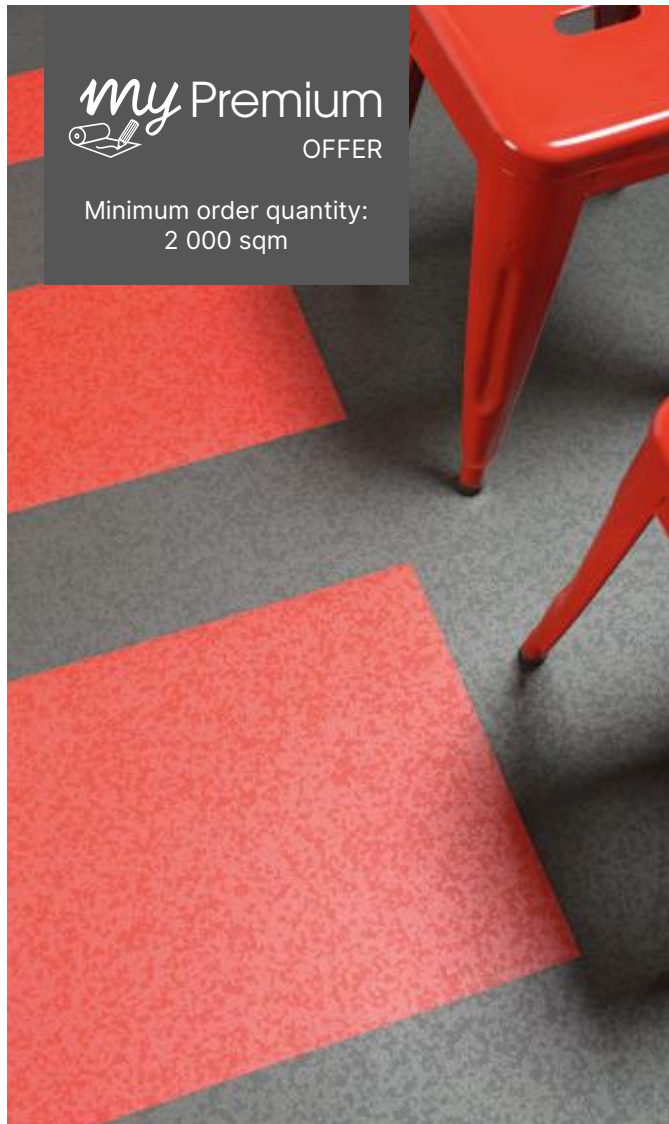





Taralay Multilayered

pages 54-123

58. Taralay Millenium New

- 60. Cosmic
- 62. Stellar

64. Taralay Libertex

- 68. Wood
- 70. Amsterdam
- 70. Paros
- 71. Reflect

72. Taralay Impression New

Taralay Impression hop New

- 78. Wood
- 84. Cemento
- 84. Terrazzo
- 85. Rough
- 85. Riverside
- 86. Gentlemen
- 86. Pure Wool
- 87. Finesse
- 88. Envol
- 88. Jungle
- 89. Nido
- 89. Rice
- 91. FlipKubes
- 91. Kubes
- 92. Metallic
- 92. Nest
- 93. Chess
- 94. Happy
- 96. Uni Matt

98. My Taralay Impression New

102. Taralay Initial

- 104. Wood
- 108. Urban
- 108. Strada
- 109. Spider
- 110. Diversion
- 111. Miami

112. Nerok


- 114. Nerok 55
- 114. Nerok 70

120. Tarastep Pro New

Taralay Multilayered




Premium
See pages 40/53

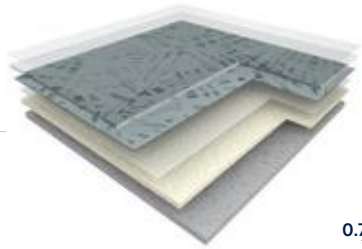

Taralay Impression
Acoustic


New designs

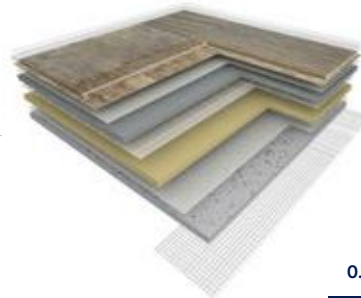

Taralay Impression **hop**
Acoustic **New**




Taralay
Multilayered

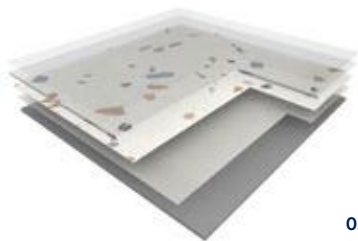

Taralay Impression
Compact

New designs

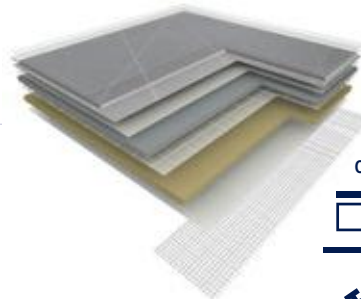

Taralay Impression **hop**
Compact **New**



Glue Down

Looselay


PROTECSOL[®] 2 Treatment

Maintenance

Taralay Multilayered

Taralay Millenium **New**

Taralay Millenium Compact

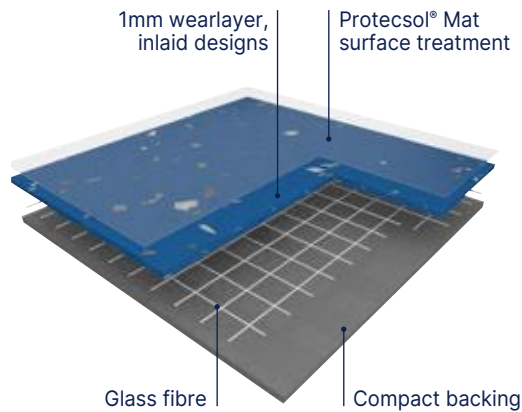


TARALAY MILLENIUM COMPACT is a multilayered vinyl floor covering available in 2m wide sheet, with a group T wear rating. The product comprises a **1 mm thick coated wear layer, made of pure vinyl, coloured throughout its thickness (no transparent wear layer and no filler)**. Its complete thickness is 2 mm. It is reinforced with a fibre glass grid for a better dimensional stability. The construction of the product yields a 8dB sound insulation rating and a **resistance to indentation of 0.03 mm**.

This flooring is protected by the surface treatment, **Protocols® Mat**, with a minimum thickness of 13µm, ensuring easy maintenance and no required polish for the entire lifetime of the product.

It is composed of 50% mineral and inexhaustible materials. It does not contain any heavy metals or CMR 1&2 components and it is 100% compliant with REACH. The product emission rate of volatile organic compounds is <10 micrograms/m³ (TVOC after 28 days ISO 16000-6).

It is 100% recyclable.

Taralay Millenium Acoustic (on demand)

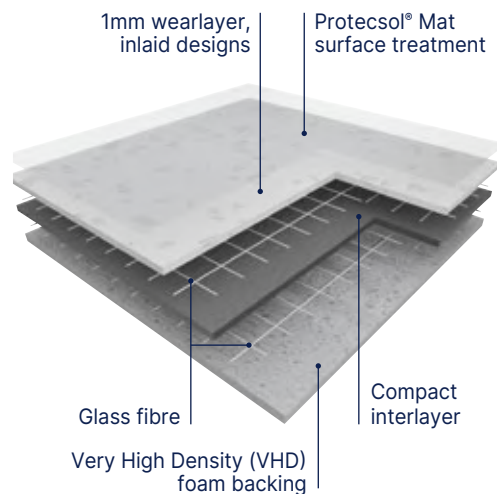

TARALAY MILLENIUM ACOUSTIC is a multilayered vinyl floorcovering available in 2m wide sheet, with a group T wear rating. The product comprises a **1 mm thick coated wear layer, made of pure vinyl, coloured throughout its thickness (no transparent wear layer and no filler)**. Its complete thickness is 3.4 mm. It contains a Very High Density (VHD) foam backing and is reinforced with 2 fibre glass grids which yields a **17dB sound insulation** rating and a **resistance to indentation of 0.07 mm**.

This flooring is protected by the surface treatment, **Protocols® Mat**, with a minimum thickness of 13µm, ensuring easy maintenance and no required polish for the entire lifetime of the product.

It is composed of 50% mineral and inexhaustible materials. It does not contain any heavy metals or CMR 1&2 components and it is 100% compliant with REACH. The product emission rate of volatile organic compounds is <10 micrograms/m³ (TVOC after 28 days ISO 16000-6).

It is 100% recyclable.



17 dB



ProtecSol® Mat



100% recyclable

- **Design within the whole thickness – no filler**
Outstanding abrasion resistance
- **Very high density (VHD) foam backing**
Easy rolling for loads
- **ProtecSol® Mat Surface Treatment**
Easy cleaning
- **100 % Recyclable**
Eco-responsible solutions

Description			Taralay Millenium Compact	Taralay Millenium Acoustic*
	Total thickness	EN ISO 24346	mm	2.00
Thickness of wearlayer	EN ISO 24340	mm	1	1
Weight	EN ISO 23997	g/sqm	2725	3385
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	lm	20	25
Classification				
Norm / Product specification	-	-	EN ISO 10582	ISO 11638 (EN 651)
European classification	EN ISO 10874	class	34-43	34-42
Fire rating	EN 13501-1	class	Bfl-s1	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10	R10
Performances				
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0
Wear group	-	group	T	T
Type Binder content	EN ISO 10582	type	I	-
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20
Residual indentation (average measured value)	-	mm	≈ 0.03	0,07
Impact sound insulation	EN ISO 717-2	dB	8	17
Castor chair test (type H)	ISO 4918	-	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6
Surface treatment	-	-	ProtecSol® Mat	ProtecSol® Mat
Chemical products resistance	EN ISO 26987	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽¹⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h ⁽¹⁾	ISO 21702	-	> 99.3% virucidal activity	> 99.3% virucidal activity
Environment / indoor air quality				
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®
CE marking				



EN 14041



(1) The implementation of an effective cleaning regime is the most important defence against infection.

*available on demand (minimum order quantity : 1000 sqm)

Taralay Multilayered

Taralay Millenium **New** - Cosmic




17 dB



Protcsol® Mat



100% recyclable

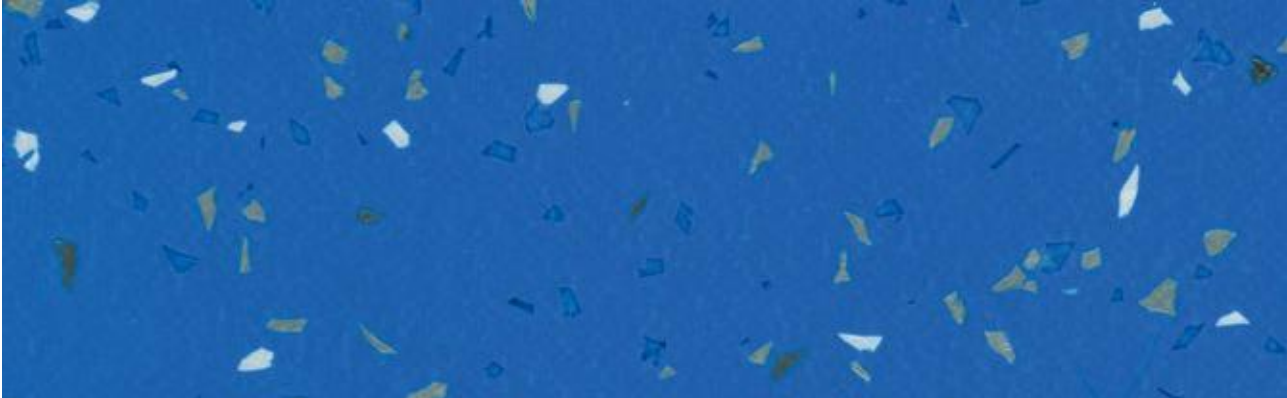

5718 Pallas

^ Scale 1



Pallas



8856 Pandore



4038 Delia



4161 Hilda



5728 Ilias



4369 Egeria



4160 Hermione



5723 Lotis



4036 Vesta



4159 Kalliope



5721 Fortuna




4368 Astree



8645 Bianca



3442 Doris



4037 Gyptis




4374 Aria



3438 Iris




4533 Ceres



4532 Sylvia



4162 Adonis



3435 Nemesis



4531 Camilla



*Acoustic: available on demand (minimum order quantity : 1000 sqm)

Taralay Multilayered

Taralay Millenium **New** - Stellar



17 dB



Protcsol® Mat



100% recyclable





4163 Flore




^ Scale 1



3446 Eden



4039 Pan



5724 Chicago




4200 Apolon



4373 Fudo



4372 Boree



4164 Eros



3439 Europa



5726 Yuna



5725 Freia



*Acoustic: available on demand (minimum order quantity : 1000 sqm)

Taralay Multilayered - fast track installation

Taralay Libertex

All Taralay benefits...



Hygienic & easy maintenance
ProtecSol® surface treatment



Comfort
Max³ Layer system



High traffic resistance
0.7 mm wearlayer

34

... with fast track installation



Minimal subfloor preparation
Installation on existing or uneven subfloors



No dry time
Looselay solution



No shutdown
No odor, no glue, minimum facility downtime





Fast installation in one solution!



Adhesive free

Apply double-sided tape (such as Fix&Free 100 Ref. 058U) on welding area and on room edges



Hot welding

for 100% watertight hygienic system (Ref. CR40 0585)



Cold welding

for invisible joint (see Romus #95605)



Wall transition

- Vynaflex skirtings, ideal for commercial applications (H 60 mm - Ref. 0483 / H 80 mm - Ref. 0482 / H 100 mm - Ref. 0477)
- Coving for 100% watertight hygienic system



Entrance Mats

A new quick & easy installation of entrance mats with Quickmat Tile (Ref. 1725)

More information on gerflor.com

Your sustainable flooring solution!


Circular Economy

- 100% recyclable product
- Recycled content: backing made with recycled PET



Indoor Air Quality


Adhesive Free installation means virtually no VOC!

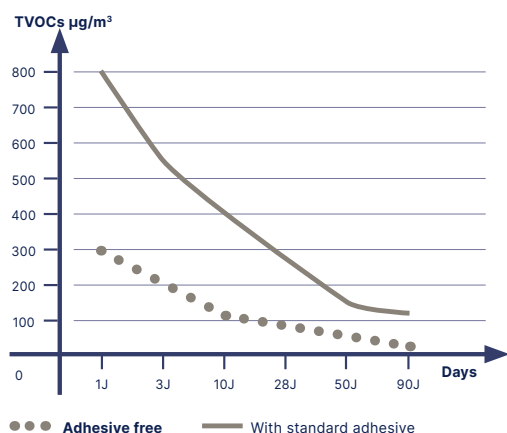

Taralay Multilayered - fast track installation

Taralay Libertex

Taralay Libertex

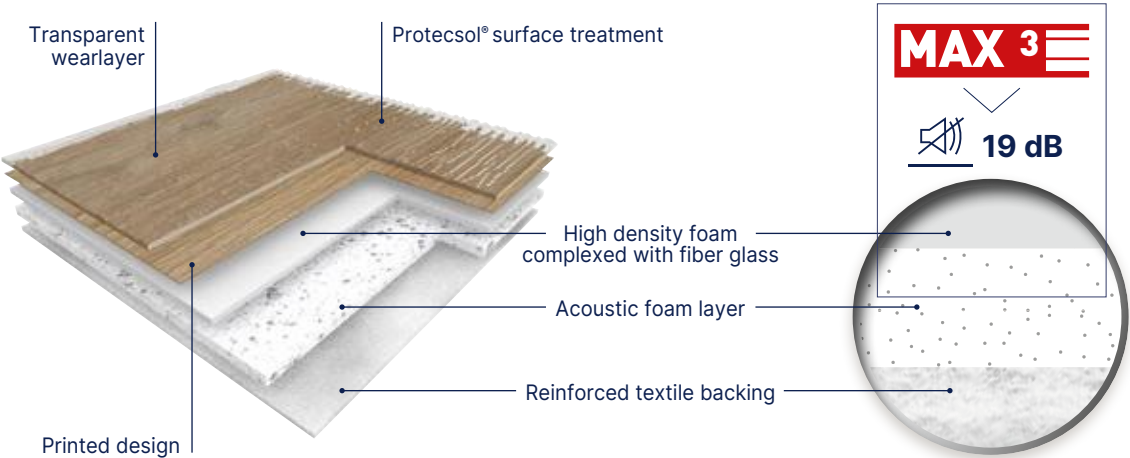

TARALAY LIBERTEX is ideal for fast track installation or renovations in commercial buildings. It is a multi-layered vinyl floorcovering with a printed design protected by a 0.70 mm thick transparent wear layer. The product features a high density foam complexed with fiber glass, an acoustic foam layer and a reinforced textile backing. It offers **19 dB sound insulation**.

It is available in 2 m and 4 m wide sheet, offers a R10 slip resistance and a group T wear rating. It is mechanically embossed, benefits from **Protacosol®** surface treatment and has an ultra matt look.

TARALAY LIBERTEX is a worry-free looselay solution. It is laid without glue, simply applying a double-sided tape such as Fix&Free on room edge and at the joint. Its textile backing absorbs surface irregularities requiring minimal subfloor preparation on uneven floors. It is compatible with cold welding, hot welding, coving, and Vynaflex skirtings.

It includes at least 30% mineral materials and 20% renewable materials. Textile backing is made at 95% from recycled PET bottles. It is 100% recyclable and 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000) are below 100 microgram/m³. It is classified A + (the best class) for indoor air quality.





19 dB Protecso[®]



100% recyclable

Fast track installation

- Minimal subfloor preparation: textile backing absorbs subfloor irregularities
- No shutdown, no odor, ideal for occupied rooms thanks to loose-lay installation
- No drying time, no glue

Hygienic and easy maintenance: Protecso[®] surface treatment

Comfort: 19 dB sound reduction

Taralay
Multilayered

Libertex

Description			
Total thickness	EN ISO 24346	mm	3.65
Thickness of wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/sqm	2900
Width of sheet	EN ISO 24341	cm	200/400
Length of sheet	EN ISO 24341	lm	20
Classification			
Norm / Product specification	-	-	EN ISO 11638
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10
Performances			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40
Dimensional stability (measured value)	-	-	≤ 0.05
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20
Impact sound insulation	EN ISO 717-2	dB	19
Room impact	NF S 31 074	dB	< 65
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	Protecso [®]
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK
Environment / indoor air quality			
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 100
CE marking			



EN 14041



(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
 (2) The implementation of an effective cleaning regime is the most important defence against infection.

Taralay Multilayered - fast track installation

Taralay Libertex - Wood



19 dB

Protocolsol®



100% recyclable



Textile Backing



2247 Hossegor Latte

Legend



1430 - Legend Grey



No plank
Continuous design



2243 - Legend Chestnut



No plank
Continuous design



2242 - Legend Country



No plank
Continuous design

Cocoon



2241 - Cocoon Silver Brown



No plank
Continuous design

Hossegor



2247 - Hossegor Latte



10 × 100-67-33.3 cm

Taralay Libertex - Wood



19 dB

Protocols®



100% recyclable




Textile Backing



2245 Skandi Oak Natural

Skandi Oak

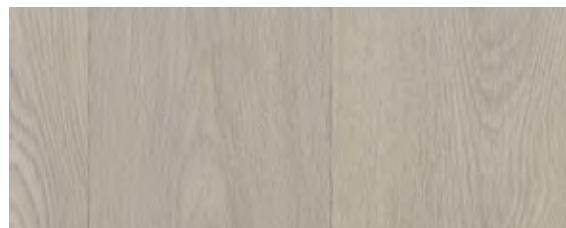

2244 - Skandi Oak Clear



20 × 133,3 cm



2245 - Skandi Oak Natural



20 × 133,3 cm



2246 - Skandi Oak Toffee



20 × 133,3 cm

Pure Oak



0720 - Pure Oak Clear



16 × 100 cm



1751 - Pure Oak Grey



16 × 100 cm

Taralay
Multilayered

Taralay Multilayered - fast track installation

Taralay Libertex - Amsterdam / Paros



19 dB

Protacosol®



100% recyclable



Textile Backing



Amsterdam



2151 Amsterdam Light Grey

^ Scale 1



2152 Amsterdam Grey



2153 Amsterdam Anthracite



Paros



2248 Paros Clear

^ Scale 1



Taralay Libertex - Reflect



19 dB

Protocols®




100% recyclable



Textile Backing



2253 Reflect Silver / 2252 Reflect Forest

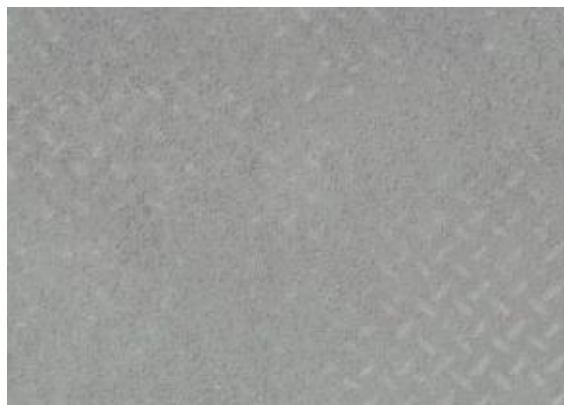

2253 Reflect Silver

^ Scale 1



2249 Reflect Sea



2252 Reflect Forest



2251 Reflect Sunny



1785 Reflect Earth



2252 Reflect Flower




Taralay
Multilayered

Taralay Multilayered

Taralay Impression **New**


Taralay Impression Compact

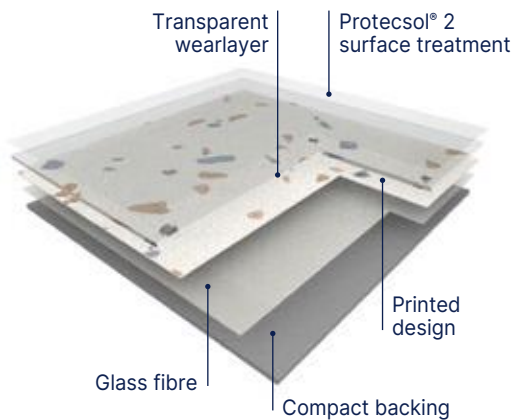

TARALAY IMPRESSION COMPACT 0,7 is a multi-layered vinyl floorcovering, integrating a fiber glass and a printed design. It's available in 2 m wide sheet, with a group T wear rating. Total width of the product is 2 mm, including a transparent wear layer of 0.70 mm thick. **It offers 8 dB sound insulation and an indentation resistance of ca. 0.03 mm.** Its **dimensional stability** performs down to 0,08% (average measure).

TARALAY IMPRESSION COMPACT is made in France. It's **100% recyclable**, and the floorcovering will have its individual EPD sheet. The flooring is equipped with **Protecsole® 2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product. It is **free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB** (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels ($<10 \mu\text{g} / \text{m}^3$) and this product is classified A + (the best class) and Floorscore® & M1 certified for indoor air quality. Taralay Impression Compact has antibacterial efficacy (E.coli / S.aureus / MRSA) : >99% after 24 hours according to ISO22196.

Taralay Impression Acoustic

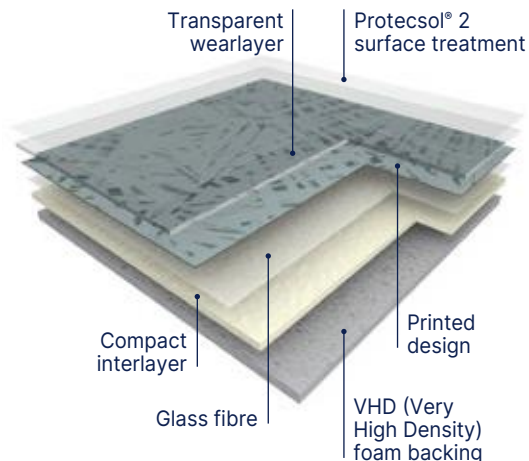

TARALAY IMPRESSION ACOUSTIC 0,65 is a multi-layered vinyl floorcovering, integrating a **Very High Density foam backing**, reinforced with a fiber glass and a printed design. It's available in 2 m wide sheet, with a group T wear rating. Total width of the product is **3,35 mm**, including a transparent wear layer of 0.65 mm thick. It offers **19 dB sound insulation and an indentation resistance of ca. 0.08 mm.** Its **dimensional stability** performs down to **0,08%** (average measure).

TARALAY IMPRESSION ACOUSTIC is made in France, with green electricity. It's **100% recyclable**, and the floorcovering will have its individual EPD sheet.

The flooring is equipped with **Protecsole® 2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

It is **free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB** (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels ($<10 \mu\text{g} / \text{m}^3$) and this product is classified A + (the best class) and Floorscore® & M1 certified for indoor air quality. Taralay Impression Compact has antibacterial efficacy (E.coli / S.aureus / MRSA) : >99% after 24 hours according to ISO22196.



19 dB



Protecsol® 2



100% recyclable

- **Ultra-realistic designs:**

Realistic embosses and plank dimensions for wood designs

- **Matt effect**

- **Extreme stain resistance, easy maintenance:**

Protecsol® 2 surface treatment (patented technology by Gerflor)

- **High traffic resistance, long-lasting appearance**

Available with a 0.7 mm wearlayer and available with a 0.9 mm wearlayer upon request (minimum order quantity of 800 sqm)

- **The best acoustic / indentation performance on the market**

COMPACT: 0.03 mm / 8 dB

ACOUSTIC: 0.08 mm / 19 dB

- **Eco-responsible solution**

Best in class for indoor air quality

(TVOC < 10 microgram/m³ after 28 days)

Taralay
Multilayered

Description			Taralay Impression Compact	Taralay Impression Acoustic
	Total thickness	EN ISO 24346	mm	2.00
Wearlayer Thickness	EN ISO 24340	mm	0.70	0.65
Weight	EN ISO 23997	g/sqm	2635	2825
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	lm	25	25
Classification				
Norm / Product specification	-	-	EN ISO 10582	EN ISO 11638
European classification	EN ISO 10874	class	34-43	34-42
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10	R10
Performances				
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0
Wear group	-	group	T	T
Type Binder content	EN ISO 10582	type	I	-
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40	≤ 0.40
Dimensional stability (measured value)	-	%	0,08	0,08
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20
Residual indentation (average measured value)	-	mm	≈ 0.03	≈ 0.08
Impact sound insulation	EN ISO 717-2	dB	8	19
Castor chair test (type H)	ISO 4918	-	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6
Surface treatment	-	-	PROTECSOL® 2	PROTECSOL® 2
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24h ⁽²⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h ⁽²⁾	ISO 21702	-	> 99.7% virucidal activity	> 99.7% virucidal activity
Environment / indoor quality air				
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®
CE Marking				



EN 14041



(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

(2) The implementation of an effective cleaning regime is the most important defence against infection.

Taralay Multilayered

Taralay Impression **hop** **New** : the looselay solution

Eco-design valued at each stage of the life cycle

GERFLOR COMMITTED

to communicating transparently about the carbon impact of its products and focusing on eco-design, including the use of sustainable raw materials, the sustainability of its products and circular economy

1- Raw materials

+ 15% Recycled content



TVOC < 10 micrograms/m³



Reach compliant*

4- A second life made easier

100%
RECYCLABLE

100% recyclable



Uninstall and re-use:

- Flooring can be uninstalled without damaging either the product or the surface underneath
- Flooring can be re-used for another building



Easy to recycle

- Qualifies for the **the Second Life Programme**
- Flooring is incorporated back into our production lines

FLOOR TO FLOOR A unique partnership with Paprec, recycling programmes that are certified by Europlast



Accelerating recycling is essential for building a more circular economy. Preserving resources and reducing the carbon footprint of our business are our commitments for Sustainable Development.

* Registration, Evaluation and Authorisation of Chemicals



2- Installation

made easy in busy environments



hop Reinforced holding tape!



Adhesive free



Reduced downtime



Qualifies for the **Second Life Programme**

3- Use

Long-lasting performance

Protecsol® 2

Protecsol® 2: stain resistant water-repellent surface saves water and detergent



Withstands wheeling heavy loads (straight or circular) up to 500 kg




Excellent resistance to indentation
0.03 mm (compact) / 0.08mm (acoustic)



Excellent stability, even during temperature changes: expansion < 0.03%



Improved resistance to moisture

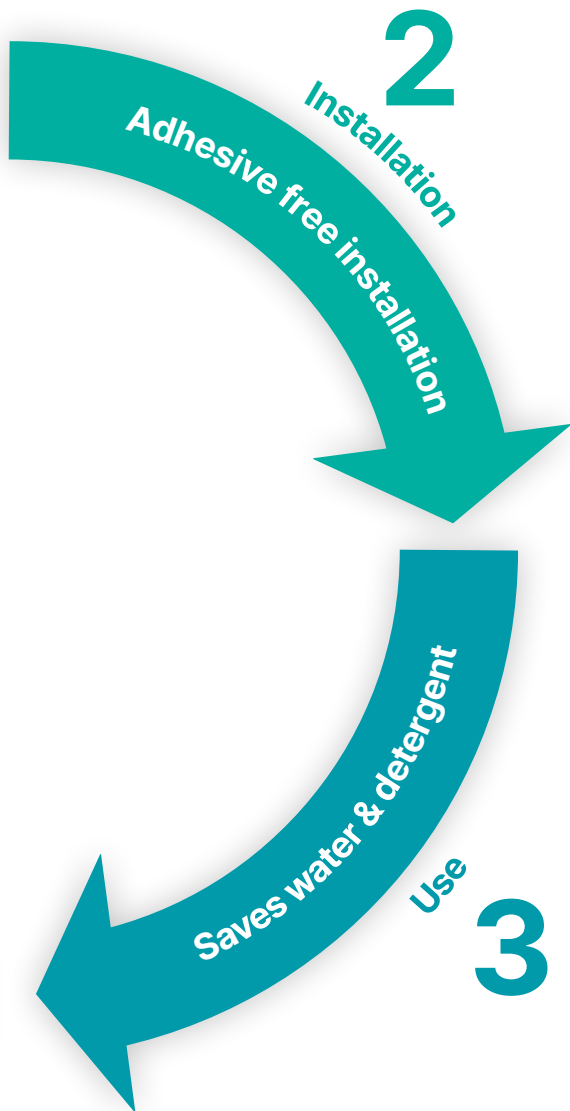

Taralay Multilayered

Taralay Impression **hop** **New**

Taralay Impression **hop** Compact

TARALAY IMPRESSION HOP COMPACT 0,7 is a multi-layered vinyl floorcovering, integrating a **double fiber frame** and a printed design. It's available in 2 m wide sheet, with a group T wear rating. The system **TARALAY IMPRESSION HOP COMPACT** - floorcovering + holding tape « HOP tape », code 059E0001- enables to **lay down flooring gluefree**.

Thanks to its **double fiber frame** -fiber veil + fiber grid-, and its calendared interlayer, the floorcovering achieves a **high level of stability**, even under temperature variations and heavy rolling loads. It can be laid down onto **various existing supports**, including asbestos. Perfectly suitable for renovation or new buildings construction.

Without any glue, its **end life removal is fast and easy**. The Gerflor holding tape doesn't affect the support, to ease renovation. Re-use of the floorcovering, recycle or renovation are then facilitated.

Total width of the product is **2,30 mm**, including a transparent wear layer of 0.70 mm thick. It offers **8 dB sound insulation** and an **indentation resistance of ca. 0.03 mm**. Its **dimensional stability** performs down to **0,03%** (average measure).

TARALAY IMPRESSION HOP COMPACT is made in France.

It's made of **15% minimum post-consumed PVC**, and goes up to 25% in total.

The flooring is equipped with **Protecsol® 2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

It is **free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB** (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (<10 µg / m³) and this product is classified A + (the best class) and Floorscore® & M1 certified for indoor air quality. Taralay Impression Compact has antibacterial efficacy (E.coli / S.aureus / MRSA) : >99% after 24 hours according to ISO22196.

It's **100% recyclable**, and the floorcovering will have its individual EPD sheet.

Taralay Impression **hop** Acoustic

TARALAY IMPRESSION HOP ACOUSTIC 0,7 is a multi-layered vinyl floorcovering, integrating a **double fiber frame**, a **Very High Density foam backing** and a printed design. It's available in 2 m wide sheet, with a group T wear rating.

The system **TARALAY IMPRESSION HOP ACOUSTIC** - floorcovering + holding tape « HOP tape », code 059E0001- enables to **lay down flooring gluefree**.

Thanks to its **double fiber frame** -fiber veil + fiber grid-, and its **calendared interlayer**, the floorcovering achieves a **high level of stability**, even under temperature variations and heavy rolling loads. It can be laid down onto **various existing supports**, including asbestos. Perfectly suitable for renovation or new buildings construction.

Without any glue, its **end life removal is fast and easy**. The Gerflor holding tape doesn't affect the support, to ease renovation. Re-use of the floorcovering, recycle or renovation are then facilitated.


Total width of the product is **4,35 mm**, including a transparent wear layer of 0.70 mm thick. It offers **19 dB sound insulation** and an **indentation resistance of ca. 0.08 mm**. Its **dimensional stability** performs down to **0,03%** (average measure).

TARALAY IMPRESSION HOP ACOUSTIC is made in France. It's made of **15% minimum post-consumed PVC**, and goes up to 25% in total.

The flooring is equipped with **Protecsol® 2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

It is **free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB** (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (<10 µg / m³) and this product is classified A + (the best class) and Floorscore® & M1 certified for indoor air quality. Taralay Impression Compact has antibacterial efficacy (E.coli / S.aureus / MRSA) : >99% after 24 hours according to ISO22196.

It's **100% recyclable**, and the floorcovering will have its individual EPD sheet.

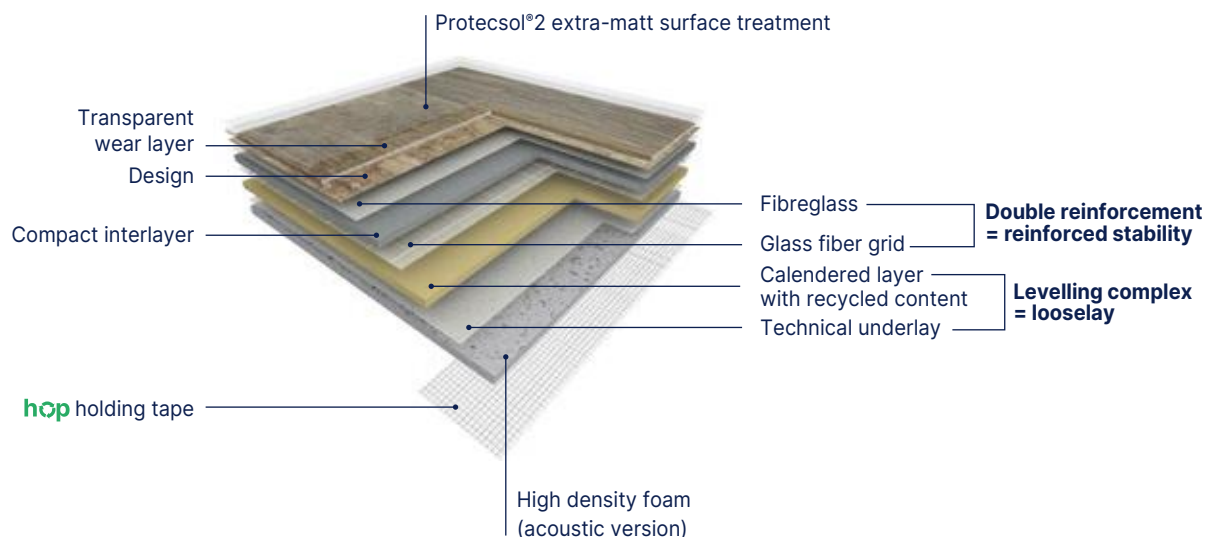



19 dB

Protecsol® 2



100% recyclable

- **Innovative & eco designed solution for looselay installation**
- **Gluefree solution means quick and easy:** save up to 50% installation time
- **15% recycled content inside**

- **Protecsol®2 surface treatment:** the best stain resistance thanks to water-repellent properties
- **Acoustic version :** VHD foam for an acoustic insulation (-19db) - walking wellness and low impact sound

Taralay Impression hop Compact Taralay Impression hop Acoustic

Description			Taralay Impression hop Compact	Taralay Impression hop Acoustic
Total thickness	EN ISO 24346	mm	2.30	4.35
Wearlayer Thickness	EN ISO 24340	mm	0.70	0.70
Weight	EN ISO 23997	g/sqm	3125	3670
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	lm	20	20
Classification				
Norm / Product specification	-	-	EN ISO 10582	EN ISO 11638
European classification	EN ISO 10874	class	34-43	34-42
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10	R10
Performances				
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0
Wear group	-	group	T	T
Type Binder content	EN ISO 10582	type	I	I
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40	≤ 0.40
Dimensional stability (measured value)	-	%	0,03	0,03
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20
Residual indentation (average measured value)	-	mm	≈ 0.03	≈ 0.08
Impact sound insulation	EN ISO 717-2	dB	8	19
Castor chair test (type H)	ISO 4918	-	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6
Surface treatment	-	-	PROTECSOL® 2	PROTECSOL® 2
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24h ⁽²⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h ⁽²⁾	ISO 21702	-	> 99.7% virucidal activity	> 99.7% virucidal activity
Environment / indoor quality air				
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®
CE Marking				



EN 14041



(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
 (2) The implementation of an effective cleaning regime is the most important defence against infection.

Taralay Multilayered

Taralay Impression / Taralay Impression **hop** **New**
Wood Fusion / Rivau Nature



19 dB

Protocols® 2



100% recyclable



1104 Wood Fusion Nature

Wood Fusion



1104 Wood Fusion Nature



1110 Rivau Nature

Rivau Nature



1110 Rivau Nature



*Available in Taralay Impression **hop**

Taralay Impression / Taralay Impression **hop** **New** Habana 3D / Raintree

Taralay
Multilayered



1100 Habana 3D Blossom

Habana 3D



1100 Habana 3D Blossom



16,6 cm



1069 Habana 3D Trinidad



16,6 cm



1070 Habana 3D Vinales




16,6 cm



1077 Raintree Natural

Raintree

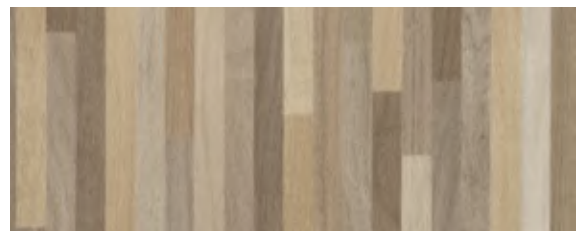

1077 Raintree Natural



2,5 cm



1076 Raintree Grey



2,5 cm

*Available in Taralay Impression **hop**

Taralay Multilayered

Taralay Impression / Taralay Impression **hop** **New**
Nature Oak / Noma



19 dB

Protacosol® 2



100% recyclable



1055 Nature Oak Clear

Nature Oak



1055 Nature Oak Clear



16,6 cm



1053 Nature Oak Blond



16,6 cm



1056 Nature Oak Dark



16,6 cm



1054 Nature Oak Brown



16,6 cm



Noma



0519 Noma Beige



16,6 cm



0373 Noma Ice



16,6 cm



Taralay Impression / Taralay Impression **hop** **New** Charme / Walnut / Moon Island

Taralay
Multilayered



1093 Charme Kraft

Charme



1093 Charme Kraft



20 cm



0723 Charme Pecan



20 cm



Walnut



1314 Walnut Brown




10 cm



0760 Moon Island

Moon Island

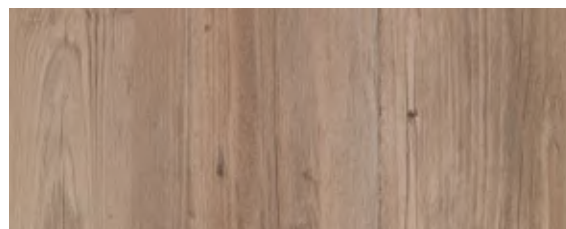

0760 Moon Island



16,6 cm



*Available in Taralay Impression **hop**

Taralay Multilayered

Taralay Impression / Taralay Impression **hop** **New**
 Sycamore / Portobello



19 dB

Protectsol® 2




100% recyclable



0725 Sycamore Light Brown

Sycamore

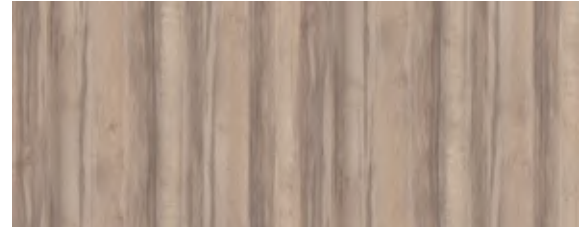

0725 Sycamore Light Brown



No plank
Continuous design



0727 Sycamore Vanilla



No plank
Continuous design



0773 Portobello

Portobello



0773 Portobello




16,6 cm

Taralay Impression / Taralay Impression **hop** New Infinity




Infinity

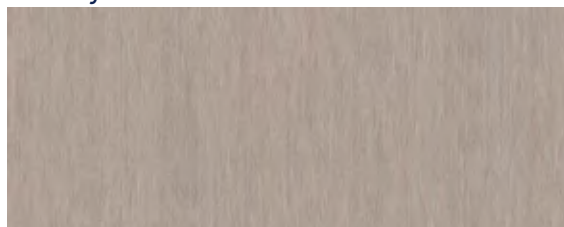

0680 Infinity Greige



No plank
Continuous design

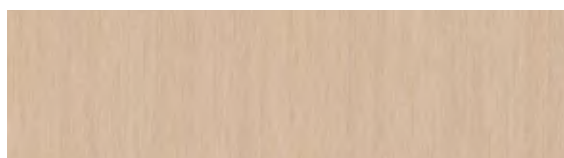

0720 Infinity Aube



No plank
Continuous design

Taralay
Multilayered

Colour Reference	Colour Name	Pattern Repeat	Planks Sizes
		Width x Length (mm)	
0373	Noma Ice	1000x1000	166x1000
0519	Noma Beige	1000x1000	166x1000
0680	Infinity Greige	1000x1000	No plank Continuous design
0720	Infinity Aube	1000x1000	No plank Continuous design
0723	Charme Pecan	1000x1000	200x1000
0725	Sycamore Light Brown	1000x1000	No plank Continuous design
0727	Sycamore Vanilla	1000x1000	No plank Continuous design
0760	Moon Island	1000x1000	166x1000
0773	Portobello	1000x1000	166x1000
0923	Happy Road	2000x6000	-
1041	Chess Black & White	1000x1000	250x250
1053	Nature Oak Blond	2000x1000	166x1000
1054	Nature Oak Brown	2000x1000	166x1000
1055	Nature Oak Clear	2000x1000	166x1000
1056	Nature Oak Dark	2000x1000	166x1000
1069	Habana 3D Trinidad	1000x1000	166x1000
1070	Habana 3D Vinales	1000x1000	166x1000
1076	Raintree Grey	1000x1000	25 random lenght
1077	Raintree Natural	1000x1000	25 random lenght
1093	Charme Kraft	1000x1000	200x1000
1098	Envol Black & White	2000x6000	-
1099	Envol Forest	2000x6000	-
1100	Habana 3D Blossom	2000x6000	166x1000
1101	Happy Form	2000x6000	-
1102	Happy Number Blue	2000x3000	-
1103	Happy Number Grey	2000x3000	-
1104	Wood Fusion Nature	1000x6000	200 x random lenght
1110	Rivau Nature	1000x1000	70x350
1314	Walnut Brown	1000x1000	100x1000

*Available in Taralay Impression **hop**

Taralay Multilayered

Taralay Impression / Taralay Impression **hop** **New**
Cemento / Terrazzo



19 dB

Protacosol® 2



100% recyclable



1024 Cemento Napoli

Cemento



1024 Cemento Napoli




^ Scale 1



1026 Cemento Roma



0524 Cemento Capri



0523 Cemento Genova



1025 Cemento Firenze




0543 Cemento Brescia



1059 Terrazzo Brescia

Terrazzo

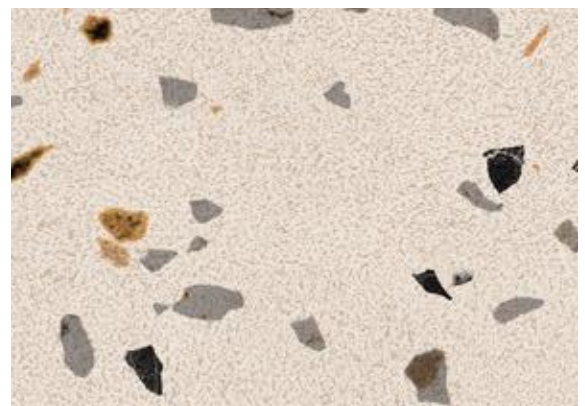

1059 Terrazzo Brescia



^ Scale 1



1060 Terrazzo Napoli



1058 Terrazzo Black & White



*Available in Taralay Impression **hop**

Taralay Impression / Taralay Impression **hop** New Rough / Riverside

Taralay
Multilayered



1029 Rough Grey

Rough



1029 Rough Grey



^ Scale 1



1028 Rough Beige



1057 Riverside

Riverside



1057 Riverside



^ Scale 1

*Available in Taralay Impression **hop**

Taralay Multilayered

Taralay Impression / Taralay Impression **hop** **New**
Gentlemen / Pure Wool



19 dB

Protocols® 2



100% recyclable



1068 Gentlemen Denim

Gentlemen



1068 Gentlemen Denim



^ Scale 1



1067 Gentlemen
Black & White



0770 Gentlemen Clear



1072 Pure Wool Grey

Pure Wool



1072 Pure Wool Grey



^ Scale 1



1071 Pure Wool Taupe



1074 Pure Wool Teal




1073 Pure Wool Beige



*Available in Taralay Impression **hop**

Taralay Impression / Taralay Impression **hop** **New** Finesse

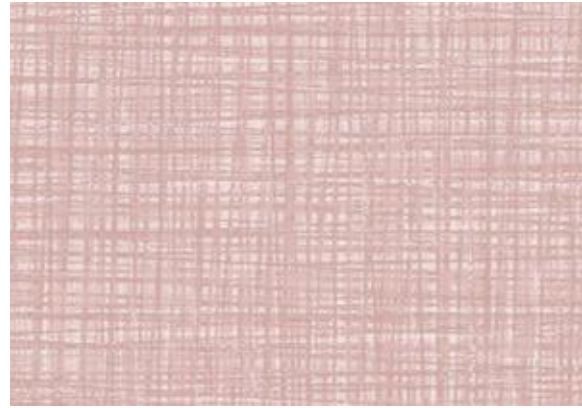

1066 Finesse Poudre

^ Scale 1



1063 Finesse Brown



1065 Finesse Paille



1064 Finesse Nature



Taralay
Multilayered

*Available in Taralay Impression **hop**

Taralay Multilayered

Taralay Impression / Taralay Impression **hop** **New**
 Envol / Jungle



19 dB

Protocols® 2



100% recyclable



1099 Envol Forest

Envol



1099 Envol Forest



^ Scale 1



1098 Envol Black & White



1039 Jungle Green / 1079 Uni Matt Dark Green

Jungle



1039 Jungle Green



^ Scale 1



1038 Jungle Copper



1040 Jungle Grey




*Available in Taralay Impression **hop**

Taralay Impression / Taralay Impression **hop** **New**
 Nido / Rice

Taralay
 Multilayered



Nido

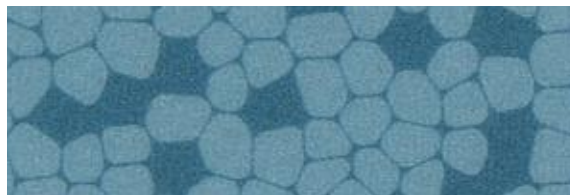

1037 Nido Teal

^ Scale 1



1036 Nido Brick



1062 Nido Beige



1035 Nido Grey



Rice



0736 Rice Champa

^ Scale 1



0763 Rice Greige



0737 Rice Souris



0736 Rice Champa

Taralay Multilayered

Taralay Impression **New**
Kubes / Flipkube



19 dB

Protecsol® 2




100% recyclable




1050 Kubes Indigo / 1042 Flipkube Indigo

Kubes

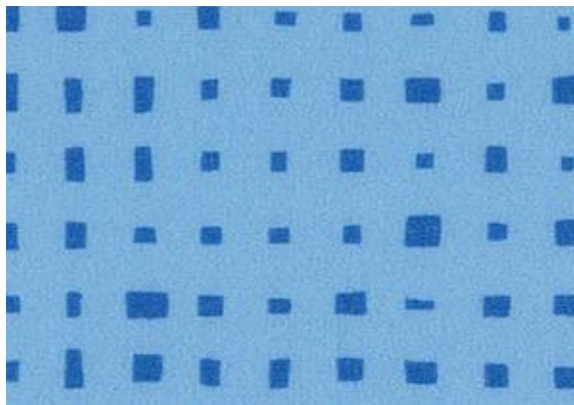

1050 Kubes Indigo

^ Scale 1

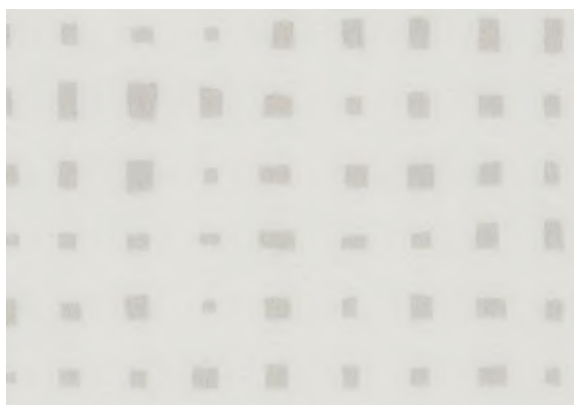

0755 Kubes White

^ Scale 1



1030 Kubes Fuschia



1031 Kubes Carmine



1047 Kubes Lemon




1027 Kubes Corail



1046 Kubes Anis



Flipkube

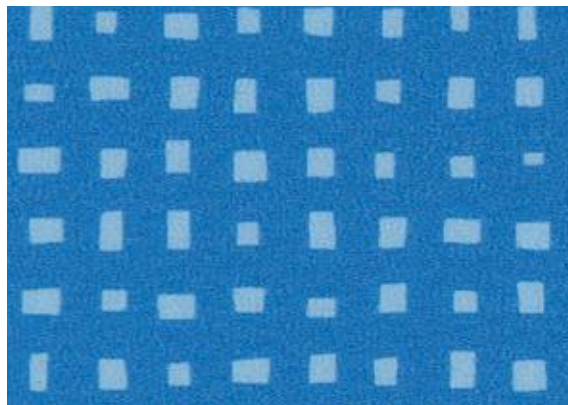

1042 Flipkube Indigo

^ Scale 1



1045 Flipkube White

^ Scale 1



1044 Flipkube Lagoon



1075 Flipkube Purple



1043 Flipkube Garden



Taralay Multilayered

Taralay Impression / Taralay Impression **hop** **New**
Metallic / Nest



19 dB

Protocols® 2




100% recyclable




1048 Metallic Gold

Metallic

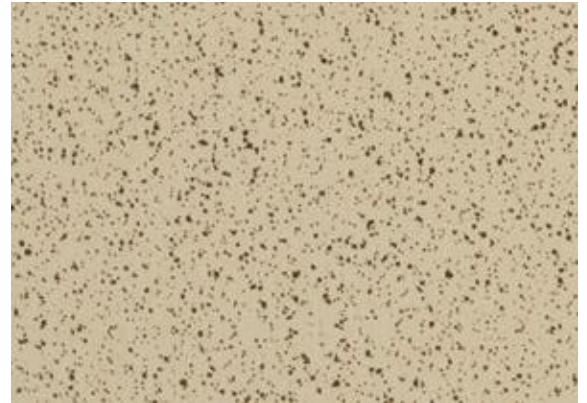

1048 Metallic Gold

^ Scale 1

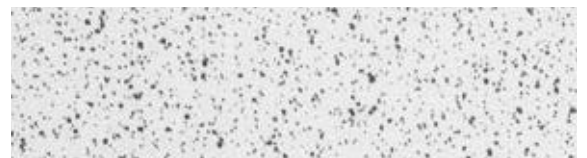

1049 Metallic Silver



1051 Nest Blue

Nest



1051 Nest Blue

^ Scale 1



0745 Nest Metal



1052 Nest White



*Available in Taralay Impression **hop**

Taralay Impression / Taralay Impression **hop** **New** Chess Black & White



1041 Chess Black & White

Chess Black & White



1041 Chess Black & White



^ Scale 10%

25x25 cm



Taralay
Multilayered

Taralay Multilayered

Taralay Impression **New**
Happy Number / Happy Form



19 dB

Protacosol® 2



100% recyclable



1078 Uni Matt Indigo / 1102 Happy Number Blue

Happy Number



1102 Happy Number Blue

^ Scale 5%



1103 Happy Number Grey

^ Scale 5%



1101 Happy Form

Happy Form



1101 Happy Form

^ Scale 5%



Taralay Impression **New** Happy Road



0923 Happy Road

Happy Road



0923 Happy Road

^ Scale 10%



Taralay Multilayered

Taralay Impression / Taralay Impression **hop** **New**
Uni Matt



19 dB


Protacosol® 2



100% recyclable



1092 Uni Matt Light Beige / 1103 Happy Number Grey

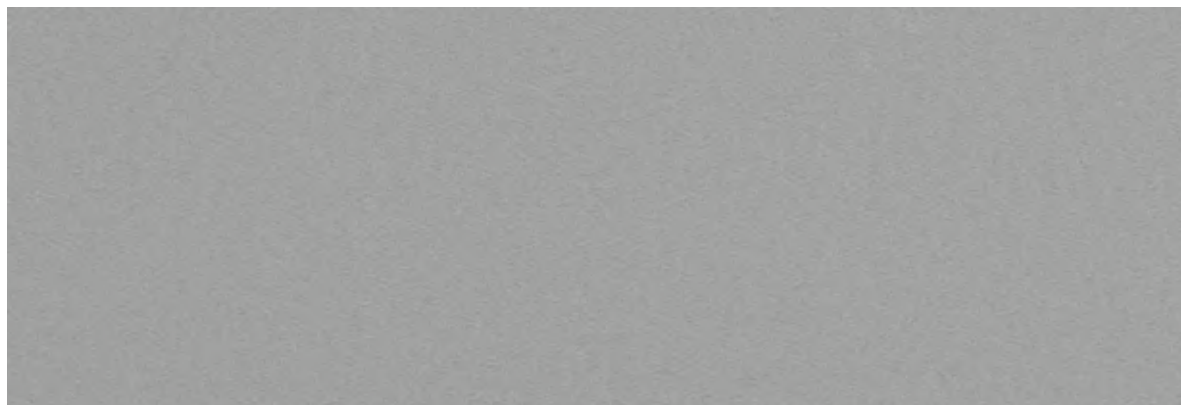

1084 Uni Matt Jungle Grey


^ Scale 1




0832 Uni Matt Grey



1088 Uni Matt Dark Beige



1092 Uni Matt Light Beige



0848 Uni Matt White




1091 Uni Matt Corail



1089 Uni Matt Copper




1090 Uni Matt Brick



1086 Uni Matt Poudre




1087 Uni Matt Yellow



1082 Uni Matt
Light Green



1081 Uni Matt Lagoon



1078 Uni Matt Indigo



1080 Uni Matt Green



1079 Uni Matt Dark Green



1085 Uni Matt Teal



1083 Uni Matt Navy



*Available in Taralay Impression **hop**

Taralay Multilayered

My Taralay Impression **New**

Beyond the norm

As you are unique and each of your projects represents a new challenge, Gerflor gives you the chance to stand out, from 50sqm.

One atmosphere, one style, one floor, but several possibilities...

3 possibilities





1 - COLOUR

the possibility to recolour 32 designs in the Taralay Impression range as you wish



1

Select a design* from the Taralay Impression range



2

Change the colour scheme as you wish



3

Receive your floor sample within 10 days of acceptance of your inquiry by Gerflor



4

Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order

* from among 32 eligible designs (see Brochure My Taralay Impression)

"ENVOL" DESIGN
STANDARD COLOUR SCHEME



CUSTOMISED COLOUR 1



CUSTOMISED COLOUR 2



Minimum order: 50 m² (special pricing system)
If you have any questions (pricing, feasibility, technical information), do not hesitate to contact your sales representative

Taralay Multilayered

My Taralay Impression **New**



2 - COLLECTION

the possibility to select from among **50 exclusive designs**




1

Draw inspiration from Gerflor's 50 exclusive designs and change, if you so wish, the design's colour scheme on www.myfloorbygerflor.com




2

View your customised design on your computer screen before approving it



3

Receive your floor sample within 10 days of acceptance of your inquiry by Gerflor



4

Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order





3 - CUSTOMISATION

the possibility to make your floor unique




1

Send us your own file in accordance with the process described in our **specifications**




2

Approval by our technical team



3

Receive your floor sample within 10 days and before all of your floor is made



4

Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order



File formats accepted



Files free from copyright only




300 DPI resolution



RAL, Pantone and NCS colour reference



To enhance the visual identity of your company or that of your clients, you can have your logo printed across the width of the roll.




- No metallic ink
- No printing on a plain background
- Design only across the width (2 m)
- No continuity of designs over several rolls



Taralay Multilayered

Taralay Initial

Taralay Initial Compact

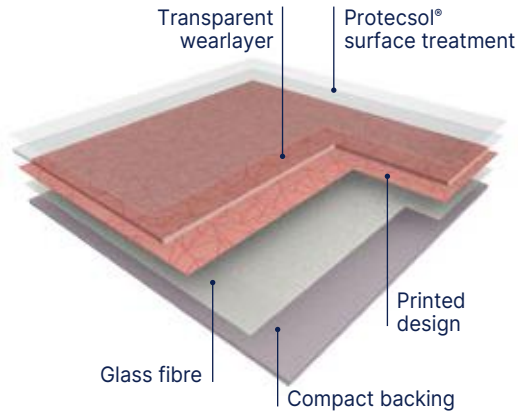

TARALAY INITIAL COMPACT is a multi-layered vinyl floorcovering, available in 2 m wide sheet, with a group T wear rating.

The product comprises a compacted backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.70 mm thick). It offers 6 dB sound insulation and an indentation resistance of 0.03 mm.


It is treated with **ProtecSol®**, a UV cured surface treatment, which facilitates ease of maintenance and eliminates permanently the need for acrylic emulsion (metallisation).

According to ISO 21702, **TARALAY INITIAL COMPACT** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.3% after 2h.

According to ISO 22196, **TARALAY INITIAL COMPACT** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h.

These products do not contain any heavy metals or CMR 1&2 and are 100% compliant with REACH. The products emission rate of volatile organic compounds is < 10 microgram/m³ (TVOC after 28 days – ISO 16000-6). It is 100% recyclable.

Taralay Initial Acoustic

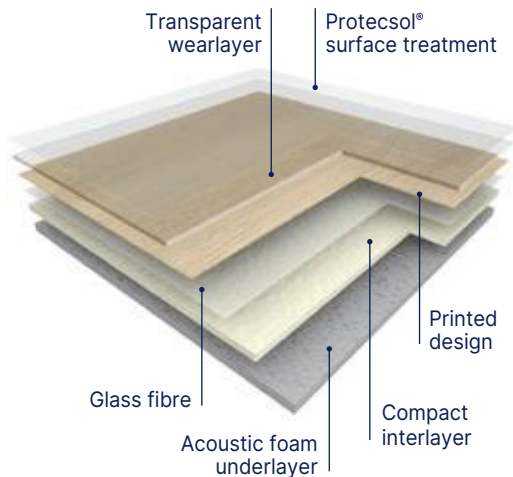

TARALAY INITIAL ACOUSTIC is an acoustic multi-layered vinyl floorcovering, available in 2 m wide sheet, with a group T wear rating.

The product comprises a foam backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.65 mm thick). It offers **19 dB** sound insulation and an indentation resistance of 0.10 mm.

It is treated with **ProtecSol®**, a UV cured surface treatment, which facilitates ease of maintenance and eliminates permanently the need for acrylic emulsion (metallisation).

According to ISO 21702, **TARALAY INITIAL ACOUSTIC** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.3% after 2h.

According to ISO 22196, **TARALAY INITIAL ACOUSTIC** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h.

It does not contain any heavy metals or CMR 1&2 and is 100% compliant with REACH. The products emission rate of volatile organic compounds is < 10 microgram/m³ (TVOC after 28 days – ISO 16000-6). It is 100% recyclable.



19 dB

Protecsol®



100% recyclable

- All references are available in **Compact** and **Acoustic**
- High resistance to indentation **0.03 mm (Compact)** and **0.10 mm (Acoustic)**
- High impact insulation **6 dB (Compact)** and **19 dB (Acoustic)**
- **Protecsol®** Surface Treatment (easy maintenance & no wax)
- Highest performance in **TVOC emission < 10 microgram/m³**

			Taralay Initial Compact Pro	Taralay Initial Acoustic Pro
Description				
Total thickness	EN ISO 24346	mm	2.00	3.35
Thickness of wearlayer	EN ISO 24340	mm	0.70	0.65
Weight	EN ISO 23997	g/sqm	2635	2825
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	lm	25	25
Classification				
Norm / Product specification	-	-	EN ISO 10582	EN ISO 11638
European classification	EN ISO 10874	class	34-43	34-42
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10	R10
Performances				
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0
Wear group	-	group	T	T
Type Binder content	EN ISO 10582	type	I	-
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20
Residual indentation (average measured value)	-	mm	≈ 0.03	≈ 0.10
Impact sound insulation	EN ISO 717-2	dB	6	19
Castor chair test (type H)	ISO 4918	-	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6
Surface treatment	-	-	Protecsol®	Protecsol®
Chemical products resistance	EN ISO 26987	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽¹⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h ⁽¹⁾	ISO 21702	-	> 99.3% virucidal activity	> 99.3% virucidal activity
Environment / indoor air quality				
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®
CE marking				



EN 14041



(1) The implementation of an effective cleaning regime is the most important defence against infection.

Taralay Multilayered

Taralay Initial - Wood



19 dB

Protocols®



100% recyclable



0826 Filament Grey

Filament



0826 Filament Grey



No plank
Continuous design




0799 Filament Light



No plank
Continuous design


Renzo

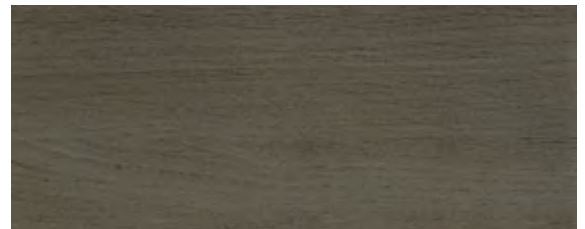

0590 Renzo Steel



No plank
Continuous design

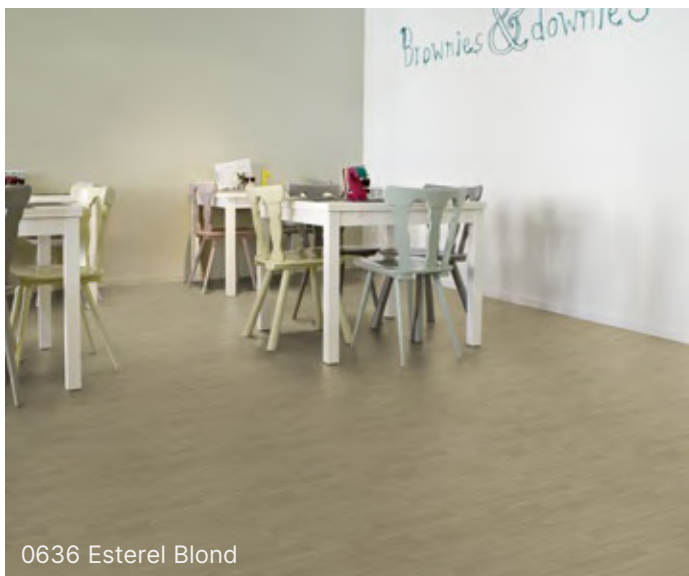

0636 Esterel Blond

Esterel




0636 Esterel Blond



10 cm



Habana

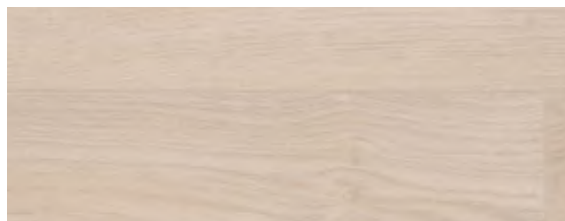

0797 Habana Ivory



16.7 cm 



0828 Habana Beige



16.7 cm 



Noma



0588 Noma Clair



16.7 cm 



0698 Noma Naturel



16.7 cm 

Taralay Multilayered

Taralay Initial - Wood



19 dB

Protectsol®



100% recyclable



0773 Ranch

Ranch



0773 Ranch



16.7 cm




0953 Ranch Anthracite



16.7 cm



Bostonian

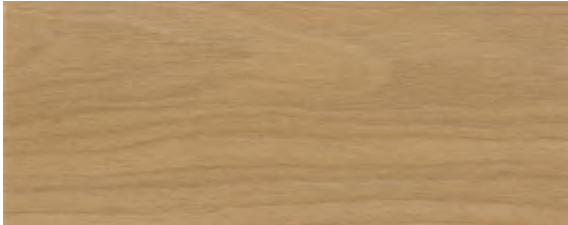

0961 Bostonian Honey



20 cm



0959 Bostonian Brown



20 cm



0960 Bostonian Grey




20 cm





Twist

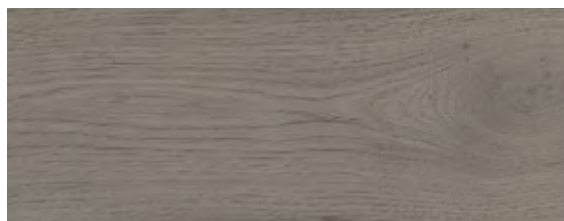

0977 Twist Grey



16.7 cm



0979 Twist White



16.7 cm



0978 Twist Blond



16.7 cm



0980 Twist Brown



16.7 cm

Design name	Colour Reference	Colour Name	Pattern Repeat in m	Planks Sizes in cm	
				Length	Width
Bostonian	0959	Brown	1 m x 1 m	100	20
Bostonian	0960	Grey	1 m x 1 m	100	20
Bostonian	0961	Honey	1 m x 1 m	100	20
Esterel	0636	Blond	1 m x 1 m	100	10
Habana	0828	Beige	1 m x 1 m	100	16.7
Habana	0638	Ivory	1 m x 1 m	100	16.7
Noma	0588	Clair	1 m x 1 m	100	16.7
Noma	0698	Naturel	1 m x 1 m	100	16.7
Ranch	0773	Ranch	1 m x 1 m	100	16.7
Ranch	0953	Ranch Anthracite	1 m x 1 m	100	16.7
Twist	0978	Blond	1 m x 1 m	100	16.7
Twist	0980	Brown	1 m x 1 m	100	16.7
Twist	0977	Grey	1 m x 1 m	100	16.7
Twist	0979	White	1 m x 1 m	100	16.7

0977 Twist Grey

Taralay Multilayered

Taralay Initial - Urban / Strada



19 dB

Protecsol®



100% recyclable



0035 Urban Gris

Urban



0035 Urban Gris

^ Scale 1



0037 Urban Souris



0958 Urban Beige



0791 Strada Metallic

Strada



0791 Strada Metallic

^ Scale 1



0790 Strada Chrome



0465 Strada Ciment



Taralay Initial - Spider



0974 Spider Saphir



0974 Spider Saphir

^ Scale 1




0976 Spider Quartz



0954 Spider Dore



0956 Spider Grenat



0957 Spider Cuivre



0975 Spider Emeraude



0955 Spider Perle



0973 Spider Alu



Taralay Multilayered

Taralay Initial - Diversion



19 dB

Protecsol®



100% recyclable



0515 Diversion Kiwi



0515 Diversion Kiwi

^ Scale 1



0949 Diversion Soleil



0825 Diversion Turquoise



0049 Diversion Carbone



0962 Diversion Marine




0047 Diversion Ivoire



0824 Diversion Souris



Taralay Initial - Miami

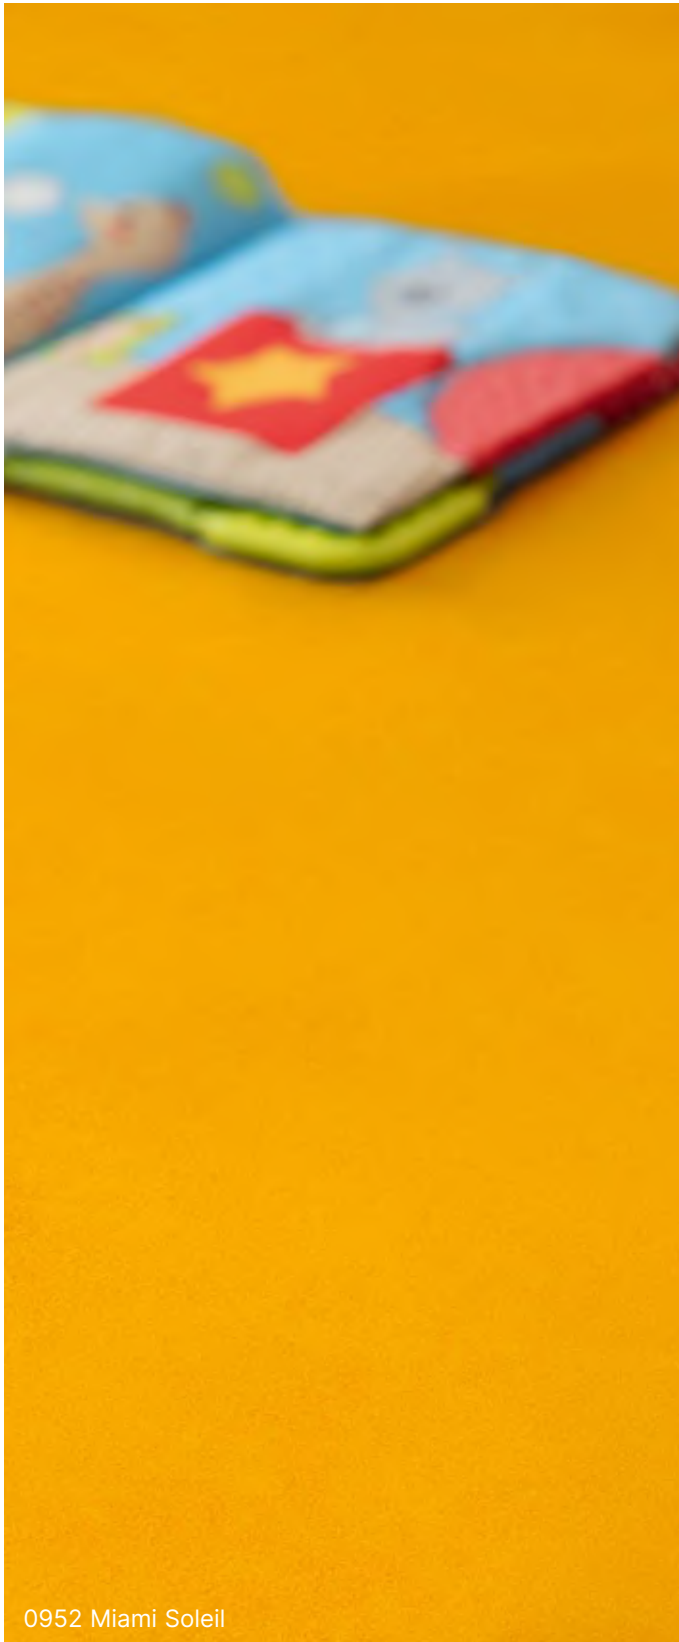

0952 Miami Soleil




0952 Miami Soleil

^ Scale 1



0950 Miami Sable



0963 Miami Perle



0966 Miami Abricot



0968 Miami Ciel



0951 Miami Litchee



0967 Miami Mer



0970 Miami Taupe



0965 Miami Foret



0964 Miami Souris




0969 Miami Paon



Taralay Multilayered

Nerok 55/70

Nerok 55/70

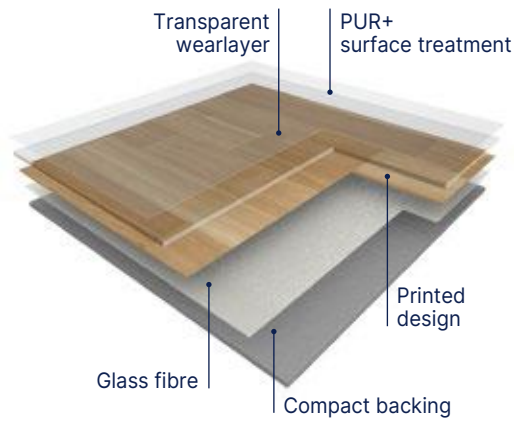

NEROK is a multilayered vinyl floor covering available in 2m and 4m wide sheet, with a group T wear rating.

The product comprises a compacted backing reinforced with a glass fiber veil and a printed design that is protected by a transparent wearlayer. It offers a -6 dB sound insulation and a resistance to indentation of 0.05 mm.

This flooring is protected by the surface treatment, **PUR+ MAT**, ensuring easy maintenance and no required polish for the entire lifetime of the product.

It does not contain any heavy metals or CMR 1&2 components, 100% compliant with REACH. The product emission rate of volatile organic compounds is <math><100\text{ microgram/m}^3</math> (TVOC after 28 days ISO 16000-6).

It is 100% recyclable.



0476 Noma Miel



19 dB PUR+



100% recyclable

- Available in 4 and 2m width
- Nerok 55: Class 33
- Nerok 70: Class 34

- 100 % Recyclable
- PUR+ Polyurethane surface treatment:
 - Easy maintenance

Taralay
Multilayered

			Nerok 55	Nerok 55 Acoustic	Nerok 70	Nerok 70 Acoustic
Description						
Total Thickness	EN ISO 24346	mm	2.00	3.35	2.00	3.45
Thickness of the wearlayer	EN ISO 24340	mm	0.55	0.55	0.70	0.70
Weight	EN ISO 23997	g/m ²	2560	2400	2670	2500
Width of sheet	EN ISO 24341	cm	200 /400	200 /400	200 /400	200 /400
Length of sheet	EN ISO 24341	ml	20	20	20	20
Classification						
Norm/Product Specification	-	-	EN ISO 10582	EN ISO 11638 (EN 651)	EN ISO 10582	EN ISO 11638 (EN 651)
European Classification	EN ISO 10874	Class	33-42	33-42	34-43	34-42
Fire Rating	EN 13501-1	Class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static Electrical Propensity	EN 1815	kV	< 2	< 2	< 2	< 2
Slip Resistance Wet	EN 16165:2021 – Appendix B (DIN 51 130)	Class	R10	R10	R10	R10
Performances						
Wear Resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0
Wear Group	QB 30	group	T	T	T	T
Type Binder content	EN ISO 10582	type	I	-	I	-
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
Residual Indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20	≤ 0.10	≤ 0.20
Residual Indentation (average measured value)	-	mm	≈ 0.05	≈ 0.10	≈ 0.05	≈ 0.10
Impact sound insulation	EN ISO 717-2	dB	6	19	6	19
Castor chair test (type H)	ISO 4918	-	OK	OK	OK	OK
Thermal Conductivity	EN ISO 10456	W/(m.k)	0.25	0.25	0.25	0.25
Colour Fastness	EN ISO 105-B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Surface Treatment	-	-	PUR+	PUR+	PUR+	PUR+
Chemical Products Resistance ⁽¹⁾	EN ISO 26987	-	OK	OK	OK	OK
Environment/indoor air quality						
TVOC after 28 days	ISO 16000-6	micrograms/m ³	<100	<100	<100	<100
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®
CE marking						
		EN 14041				

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

Taralay Multilayered

Nerok 55/70



19 dB

PUR+



100% recyclable



2013 Sherwood Blond

Sherwood



2015 Sherwood Brown



25 cm



2013 Sherwood Blond



25 cm



2012 Sherwood Clear



25 cm




2017 Sherwood Grey



25 cm



Newport

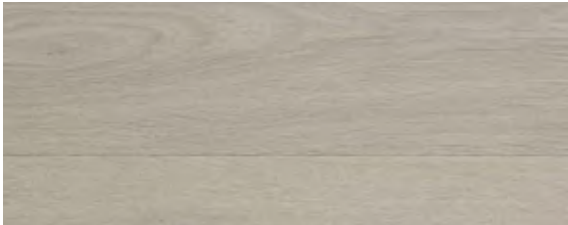

2244 Newport Clear



20 cm



2245 Newport Natural



20 cm





1893 Harbor Blue

Harbor



1893 Harbor Blue



Multisizes



Noma



0476 Noma Miel



16.7 cm




1451 Noma Kola



16.7 cm



Oak Select

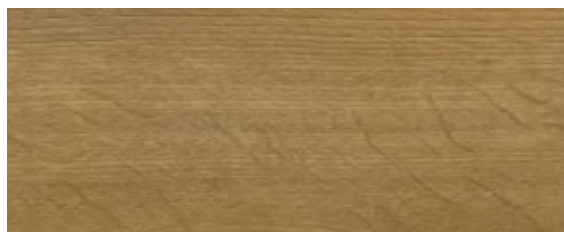

2242 Oak Select Country



No strip
Continuous design



1430 Oak Select Dark Grey



No strip
Continuous design



Taralay Multilayered

Nerok 55/70



19 dB

PUR+



100% recyclable



1751 Timber Grey

Timber



1751 Timber Grey



16.7 cm



0720 Timber Clear



16.7 cm



0492 Timber Cabana



16.7 cm

Chene




0669 Chene Light



6.2 cm

Factory

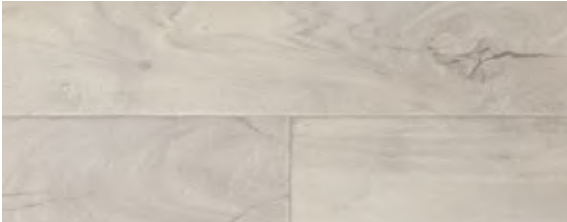

1518 Factory White



16.7 cm



2151 Shade Light Grey

Shade



2151 Shade Light Grey
 

^ Scale 1



2152 Shade Grey
 



2153 Shade Anthracite




2249 Brooklyn Blue

Brooklyn



2249 Brooklyn Blue
 

^ Scale 1



2253 Brooklyn Silver
 

Taralay Multilayered

Nerok 55/70



6 dB

PUR+



100% recyclable



2131 Leone Mouse

Leone



2131 Leone Mouse


^ Scale 1



2132 Leone Metal



2133 Leone Anthracite



2135 Leone Cream



2134 Leone Brown






0597 Pixel Silver

Pixel



0597 Pixel Silver

^ Scale 1



2176 Pixel Taupe



2178 Pixel Paprika




2175 Pixel Clear



0621 Pixel Vanilla




0639 Pixel Sand



2181 Pixel Meadow



0632 Pixel Anthracite



2182 Pixel Ocean




2179 Pixel Black



Taralay Multilayered

Tarastep Pro New

Tarastep Pro

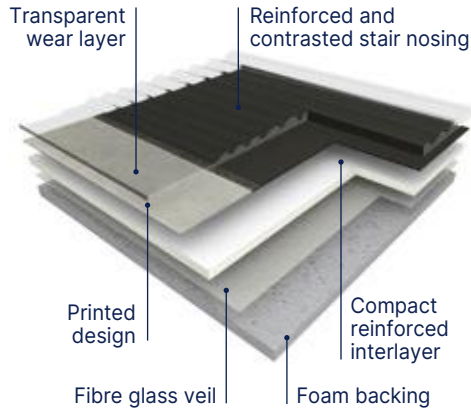

TARASTEP PRO is an **heterogenous, sound-absorbing** solution with reinforced layer and transparent wearlayer, used to **recover indoor stairs in a single element**.

TARASTEP PRO is an all-in-one covering that covers the tread, the stair nosing - with a reinforced non-slip surface, and the riser. It has a total thickness of 3.45 mm, with a **wear layer of 1 mm** which gives it great resistance to traffic and a residual indentation of 0.10 mm (value measured).


With a high-density foam backing, TARASTEP PRO provides 17dB of sound insulation and 63dB of walking noise.

It complies with accessibility regulations. The stair nosing specially designed to facilitate movement presents a **tactile contrast and a visual contrast** of at least 70% on each color.

TARASTEP PRO is suitable for premises classified **34/42 European class**.

According to standard NF EN 13501-1, the coating is classified Bfls1. It is phthalate-free and complies with the European REACH regulation. TVOC air emissions at 28 days (NF EN 16000) of the selected coating are $< 100 \mu\text{g} / \text{m}^3$. It is 100% recyclable.

Access for all (More details - See page 338)

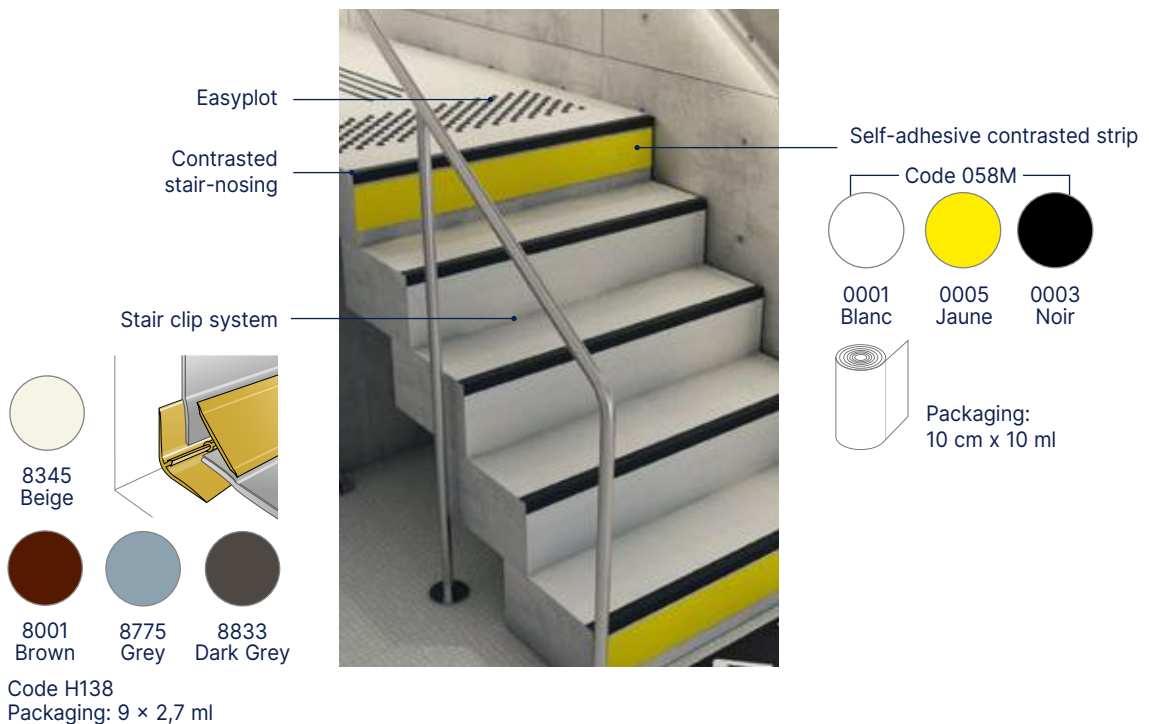



17 dB



100% recyclable

- **Complete solution for stairs** : more durable
- Concrete design with **70% minimum contrast** with stair nose
- **Mix & match with Taralay and Premium ranges** : colors harmony stair & floor
- **High thickness** : comfort underfoot
- **1 mm wearlayer** : high resistance to traffic

Taralay
Multilayered

Tarastep Pro

Description			
Total thickness	EN ISO 24346	mm	3.45
Thickness of wearlayer	EN ISO 24340	mm	1
Weight	EN ISO 23997	g/sqm	3005
Width of sheet	EN ISO 24341	cm	100
Length of sheet	EN ISO 24341	lm	20
Classification			
Norm / Product specification	-	-	EN ISO 11638
European classification	EN ISO 10874	class	34-42
Impact sound insulation	EN ISO 717-2	dB	17
Walking sound	NFS 31 074	dB	< 65
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip Resistance Wet	EN 16165:2021 – Appendix B (DIN 51 130)	classe	R10
Performances			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Dimensional stability	EN ISO 23999	%	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20
Residual indentation (average measured value)	-	-	≈ 0.10
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface Treatment	-	-	Protecsol®
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽²⁾	ISO 22196	-	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h ⁽²⁾	ISO 21702	-	> 99.3% virucidal activity
Environment / indoor quality air			
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 100
Certification	-	-	Floorscore®
CE marking			



EN 14041



(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
(2) The implementation of an effective cleaning regime is the most important defence against infection.

Taralay Multilayered

Tarastep Pro **New**




17 dB




100% recyclable

CUTTING SERVICE AVAILABLE

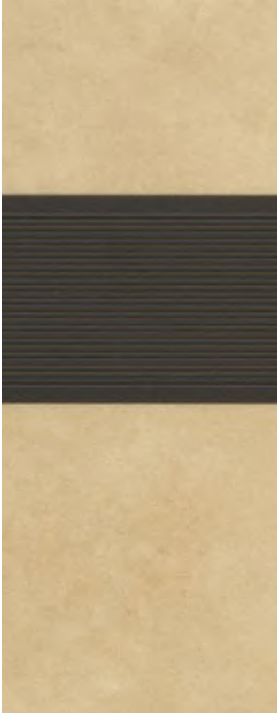


2338 Sand & Brown
82% contrast

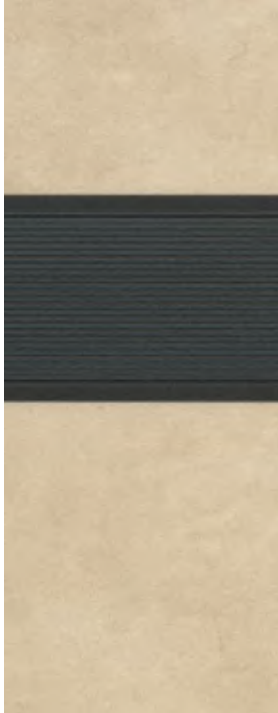

2333 Nature & Dark Grey
83% contrast




2335 Capri & Black
79% contrast

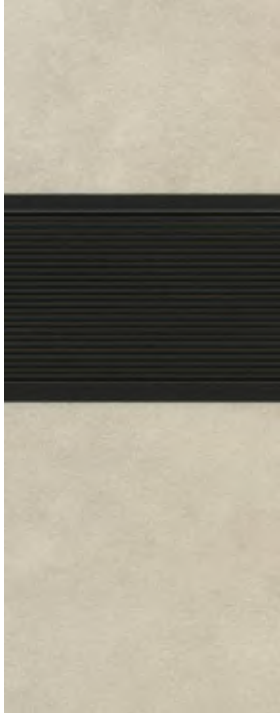


2342 Genova & Dark Grey
90% contrast



2339 Dark Grey & Yellow
73% contrast

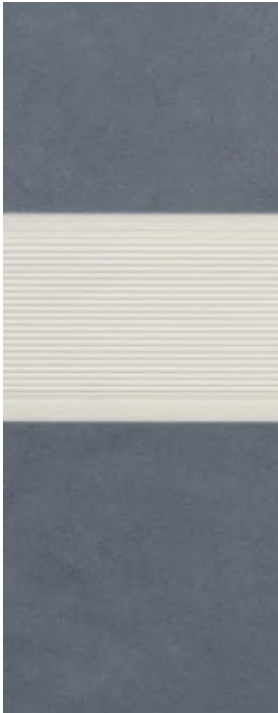

2334 Blue Grey & Clear
73% contrast

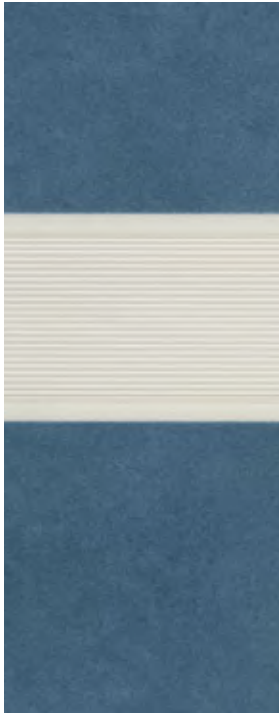


2337 Deep Blue & Clear
77% contrast




2344 Silver & Green
73% contrast

**CUTTING
SERVICE
AVAILABLE**


Taralay
Multilayered

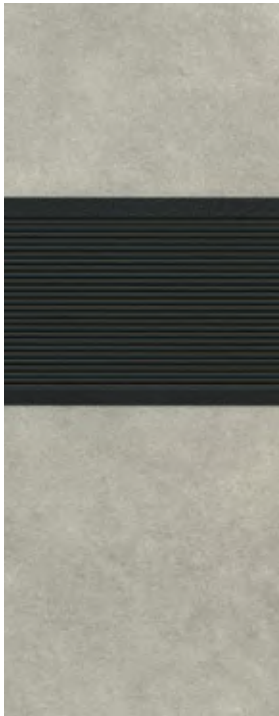


2336 Brescia & Black
 **84%**
contrast

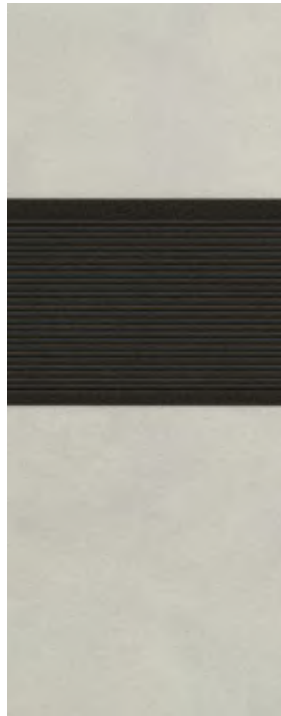


2343 Light Grey & Black
 **85%**
contrast

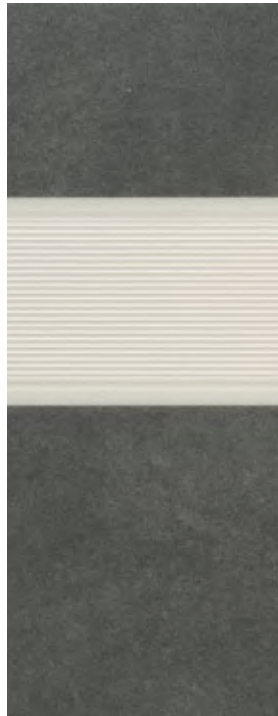

2341 Black & Light Grey
 **77%**
contrast

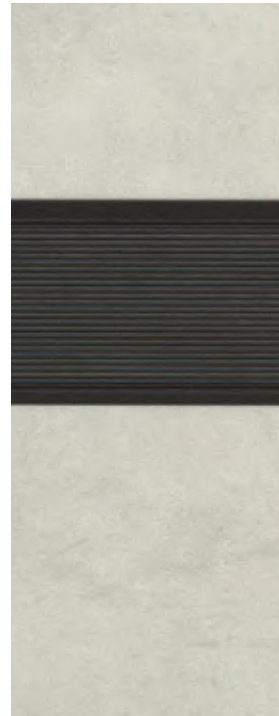

2332 Silver & Dark Grey
 **86%**
contrast

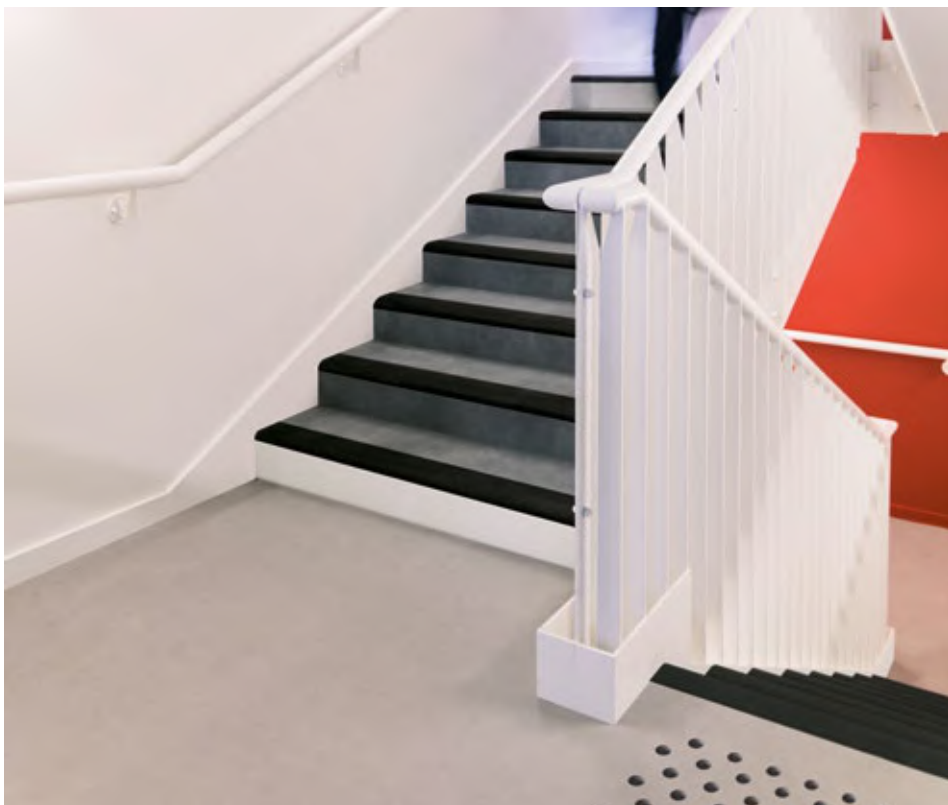

2340 Warm Grey & Black
 **77%**
contrast



**European LVT
manufacturer since 1985**

- 4 LVT factories
- Stock in Europe
12 logistics hubs
- Internal Design Center
> exclusive designs

**Gerflor
The Reference!**



Luxury Vinyl Tile

pages 124-213

130. **Creation 70**

- 130. Creation 70
- 132. Creation 70 Clic
- 134. Creation 70 Looselay
- 136. Creation 70 Connect **New**

152. **Saga²**

158. **Creation 55**

- 158. Creation 55
- 160. Creation 55 Solid Clic
- 162. Creation 55 Rigid Acoustic
- 164. Creation 55 Looselay
- 166. Creation 55 Looselay Acoustic

182. **Creation 40**

- 182. Creation 40
- 184. Creation 40 Solid Clic
- 186. Creation 40 Rigid Acoustic

196. **Creation 30**


- 196. Creation 30
- 198. Creation 30 Solid Clic

210. **My Creation **New**** **My Saga² **New****







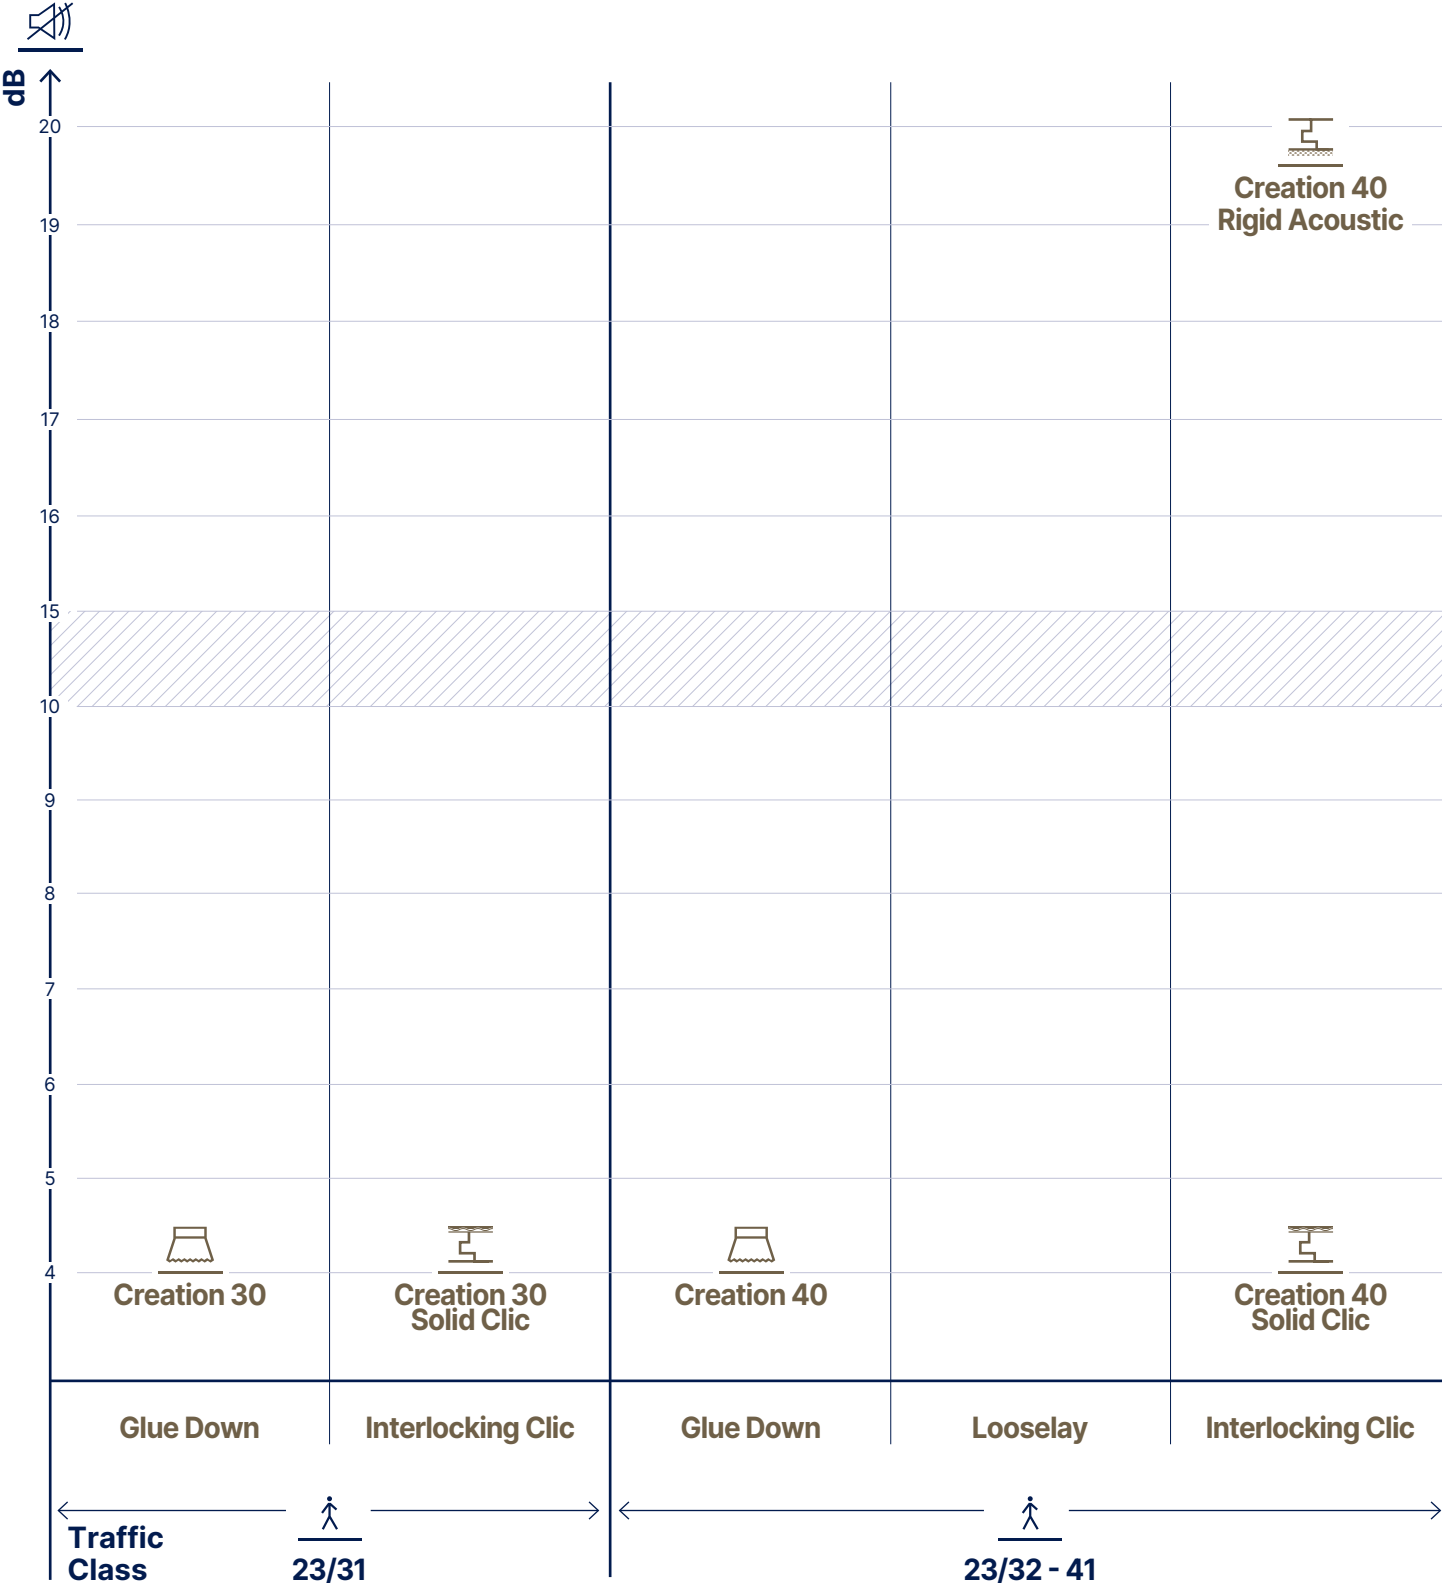






213. **More than a floor... wall & finishes**

Luxury Vinyl Tile

Creation




Visualize your design in any room setting on gerflor.com > Services > Interior Designer

	 Creation 55 Looselay Acoustic	 Creation 55 Rigid Acoustic			
	 Saga² 55			 Saga² 70	
				 Creation 70 Looselay	
	 Creation 55 Looselay				
 Creation 55		 Creation 55 Solid Clic	 Creation 70	 Creation 70 Connect	 Creation 70 Clic
Glue Down	Looselay	Interlocking Clic	Glue Down	Looselay	Interlocking Clic
 33 - 42			 34 - 43		

Our Commitments

for a Sustainable future

All Gerflor product ranges are developed according to a life cycle analysis model

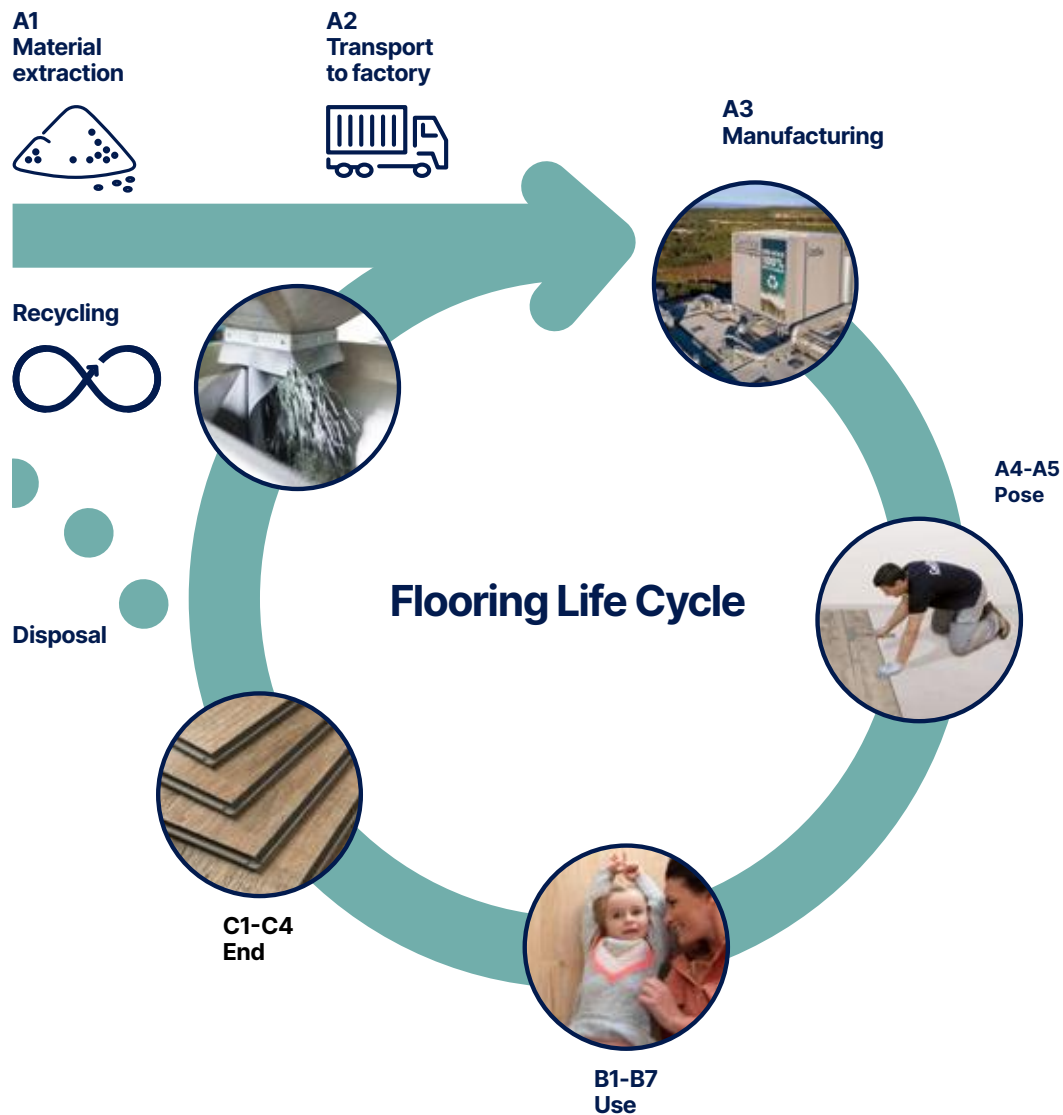

Third-party verified life cycle analysis of our products can be found in their Environmental Product Declaration (EPD)

Creation

the reference in sustainability




Carbon footprint

- Manufacturing Footprint in Europe
- ISO 14001 & 50001 certifications
- Renewable energy



3 factories in Europe

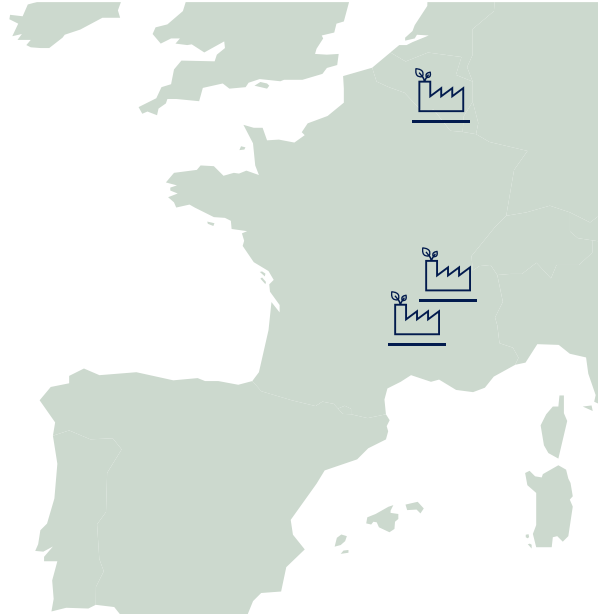

Creation
LVT



Circularity

- 100% recyclable products
- High % of recycled content
- Adhesive Free solutions
- Packaging using 100% recycled cardboard



Health and safety

- 100% Reach compliant
- Phthalate free*
- Formaldehyde Free
- Indoor Air Quality:
TVOC <10 µg/m3 after 28 days



* Except recycled content



we **care** / we **act**

Luxury Vinyl Tile

Creation 70

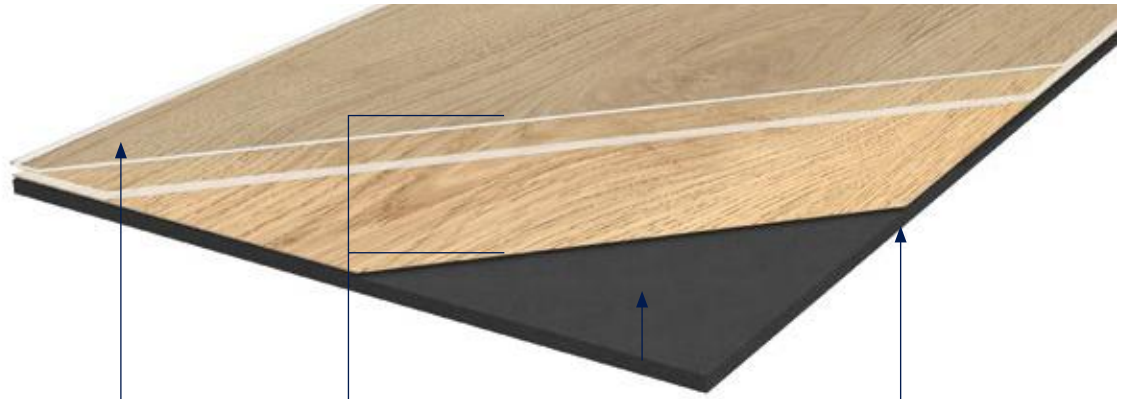

PUR+ MATT



Easy maintenance

4D DESIGN

MATT SURFACE



Natural look

CRISTAL WEAR LAYER



High definition design & color

STRUCTURED EMBOSS & BEVEL



Ultra realistic surface

DESIGNS



Wide variety of planks or tiles

RESILIENT COMFORT CORE



Noise absorption



Soft underfoot

DIAMOND BACKLAYER

BODY & STRENGTH



Easy handling

BACK EMBOSS

Better subfloor adhesion



Easy positioning

LVT decoratives strips

Format (mm) 4×914mm



Code: 3203 + Color code



REACH


100% reach
phthalate free



100% recyclable
Up to 35% recycled content



TVOC emissions below
detection level
(TVOC < 10µg/m³ after 28 days)
No formaldehyde

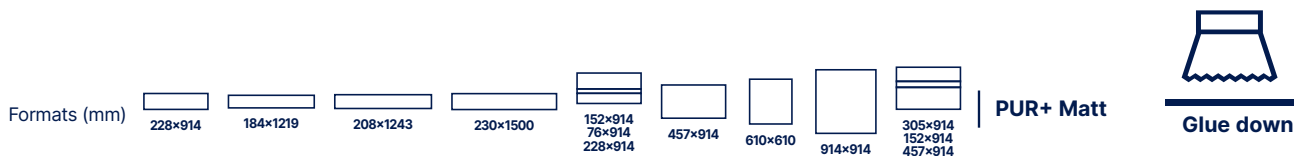

Creation 70

Creation 70 Design is a synthetic, decorative, flexible, antistatic abrasion group T floorcovering available in tile or plank, with beveled edges. It consists in a 0.70 mm thick transparent wear layer, a design film and a Resilient Comfort Core to provide softness and comfort surface. The overall thickness is 2.5 mm. It benefits from a cross-linked polyurethane surface treatment (**PUR+ Matt**), making maintenance easier and eliminating the need for initial polishes.

Creation 70 Design is a glued floorcovering, resistant to use (commercial / industrial use) of 34-43 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.

Creation 70 Design is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is REACH compliant. **The product emission rate of organic compounds is < 10 microgram/m³** (TVOC < 28 days – ISO 16000-6).



Creation LVT

Creation 70

	Creation 70 Design										Creation 70	
Description												
Total thickness	EN ISO 24346	mm									2.50	2.50
Thickness of wearlayer	EN ISO 24340	mm									0.70	0.70
Weight	EN ISO 23997	g/sqm									4100	3960
Size	EN ISO 24342	mm	184x1219	230x1500	Mix planks 76/152/ 228x914	610x610	914x914	457x914	228x914	Mix tiles 152/305/ 457x914	208x1243	
Number of planks / tiles and sqm per box	-	-	14 ⁽¹⁾ / 15 3.14 / 3.36	9 / 3.11	8+8+8 / 3.34 m	9 / 3.35	5 / 4.18	9 / 3.76	17 / 3.54	4+4+4 / 3.34	14 / 3.62	
Classification												
Norm / Product specification	-	-									EN ISO 10582	EN ISO 10582
European classification	EN ISO 10874	class									34-43	34-43
Fire rating	EN 13501-1	class									Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV									< 2	< 2
Slip resistance wet ⁽²⁾	EN 16165:2021 – Appendix B (DIN 51 130)	class									R10	R10
Performances												
Wear resistance	EN 660.2	mm ³									≤ 2.0	≤ 2.0
Wear group	-	group									T	T
Type Binder content	ISO 10582	type									I	I
Room impact	NF S 31074	dB									76	76
Sound Insulation	EN ISO 717-2	dB									4	4
Dimensional stability (norm)	EN ISO 23999	%									≤ 0.25	≤ 0.25
Dimensional stability (average measured value)	-	%									≤ 0.10	≤ 0.10
Residual indentation	EN ISO 24343-1	mm									≤ 0.10	≤ 0.10
Castor chair test (type H)	ISO 4918	-									OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)									0.25	0.25
Colour fastness	EN ISO 105-B02	degree									≥ 6	≥ 6
Surface treatment	-	-									PUR+ Matt	PUR+ Matt
Chemical products resistance	EN ISO 26987	-									OK	OK
Environment / indoor air quality												
TVOC after 28 days	ISO 16000-6	microgram/m ³									< 10	< 10
CE marking												




EN 14041



(1) Regimental Picadilly 0807
(2) Ramp test with oil

Luxury Vinyl Tile

Creation 70 Clic



PUR+ MATT



Easy maintenance

4D DESIGN

MATT SURFACE



Natural look

CRYSTAL WEAR LAYER



High definition design & color

STRUCTURED EMBOSS & BEVEL



Ultra realistic surface

2 M PATTERN DESIGN

Wide variety of planks or tiles

DUOCORE TECHNOLOGY

RESILIENT COMFORT CORE



Noise absorption



Soft underfoot

RIGID CORE WITH FIBER GLASS VEIL



The best stability



No adhesive



Renovation ceramic
4 mm joint

CLIC REVOLUTION 100 % VERTICAL



30% Faster



Durable clic system



Heavy load resistance



Waterproof joints



Easy to change a plank



100% Reach
Phthalate free



100% Recyclable
Up to 55% recycled content



TVOC emissions below
detection level
(TVOC < 10µg/m³ after 28 days)
No formaldehyde

Formats (mm)

212x1239

242x1461

391x729

PUR+ Matt



Creation 70 Clic

Creation 70 Clic is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in tiles and planks, with bevelled edges. It consists in a 0.70 mm thick transparent wear layer, a design film of 2 m width to have more variety in the design and a Duo Core Technology, made with a rigid core back layer reinforced with a fiber veil, combined with a flexible core top layer to provide softness and comfort surface. The overall thickness is 6 mm. They benefit from a cross-linked polyurethane surface treatment (**PUR+ Matt**), making maintenance easier and eliminating the need for initial polishes.

Creation 70 Clic is an interlocking floorcovering assembled with a vertical system on the long and short side for a quick and solid installation.

The resistance to use (commercial / industrial use) of 34-43 according to EN-ISO 10874 and has Bfl -s1 class for smoke emission according to EN 13501-1.

Creation 70 Clic is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 55% of recycled content. It is REACH compliant.

The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).

To be combined with Gerflor acoustic underlayers

Gerflor Acoustic 15dB



Code: 1798 - Format: 1m x 15ml

Please refer to Gerflor's installation guidelines.

Romus Tools

Anti-bounce mallet / Fitter Knife - LVT Roller



Creation LVT

Creation 70 Clic

Description			
Total thickness	EN ISO 24346	mm	6
Thickness of wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/sqm	9850
Size	EN ISO 24342	mm	214 × 1239 242 × 1461 391 × 729
Number of planks / tiles and sqm per box	-	-	6 / 1.59 5 / 1.77 5 / 1.43
Classification			
Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10
Performances			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≤ 0.05
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Impact sound insulation	EN ISO 717-2	dB	5
Room impact	NF S 31074	dB	78
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	PUR+ Matt
Chemical products resistance	EN ISO 26987	-	OK
Environment / indoor air quality			
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
CE marking			




EN 14041



Luxury Vinyl Tile

Creation 70 Looselay

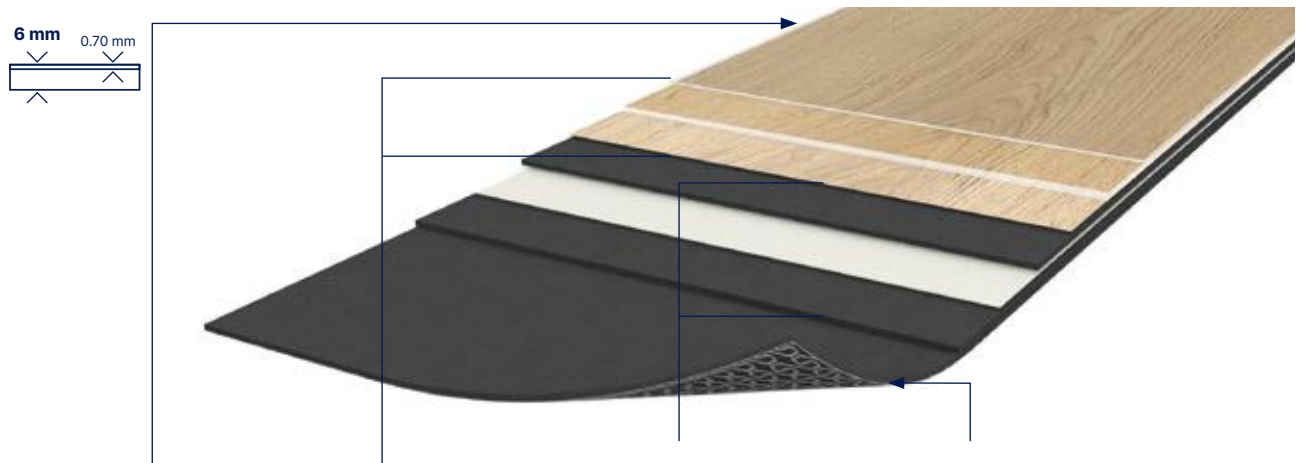

PUR+ MATT



Easy maintenance

4D DESIGN

MATT SURFACE



Natural look

CRISTAL WEAR LAYER



High definition design & color

STRUCTURED EMBOSS & BEVEL



Ultra realistic surface

MIX&MATCH DESIGNS



Easy mix&match of designs & formats

DUOCORE TECHNOLOGY

RESILIENT COMFORT CORE



Noise absorption



Soft underfoot

RIGID CORE



The best stability / Fiber glass inside



Renovation ceramic < 5 mm joint

GRIP-WAVE BACKLAYER

ANTI-SKID BACKING



Super strong suction to the subfloor

Air circulation: better acoustic

Humidity circulation: moisture resistance



Easily removable: renovation



100% Reach Phthalate free




100% Recyclable Up to 35% recycled content



TVOC emissions below detection level (TVOC < 10µg/m³ after 28 days) No formaldehyde

Formats (mm)



PUR+ Matt



Looselay
Removable

Creation 70 Looselay


Creation 70 Looselay is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in tiles and planks, with bevelled edges. It consists in a 0.70 mm thick transparent wear layer, a design film and a Duo Core Technology, made with a rigid core back layer reinforced with a fiber veil, combined with a flexible core top layer to provide softness and comfort surface. The overall thickness is 6 mm. It also includes anti-skid backing to allow an easy installation. It benefits from a cross-linked polyurethane surface treatment (**PUR+ Matt**), making maintenance easier and eliminating the need for initial polishes.

Creation 70 Looselay is a looselay floorcovering, resistant to use (commercial / industrial use) of 34-43 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.

Creation 70 Looselay is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is REACH compliant.

The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).

Explore the world of possibilities

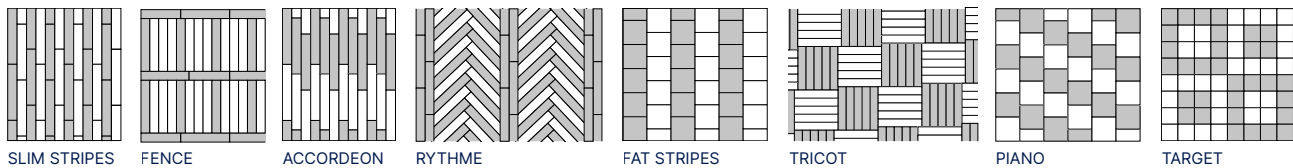

Quick & easy to install



Installation with tackifier



Apply planks or tiles



Pressure roller



Easy to replace a plank

Please refer to Gerflor's installation guidelines.

Creation 70 Looselay

Description			
Total thickness	EN ISO 24346	mm	6.00
Thickness of wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/sqm	10000
Size	EN ISO 24342	mm	229 x 1220 600 x 600 914 x 914
Number of planks / tiles and sqm per box	-	-	6 / 1.68 4 / 1.44 2 / 1.67
Classification			
Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10
Performances			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	73
Impact sound insulation	EN ISO 717-2	dB	9
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≤ 0.05
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	PUR+ Matt
Chemical products resistance	EN ISO 26987	-	OK
Environment / indoor air quality			
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
CE marking			





EN 14041



Creation
LVT

Luxury Vinyl Tile

Creation 70 Connect

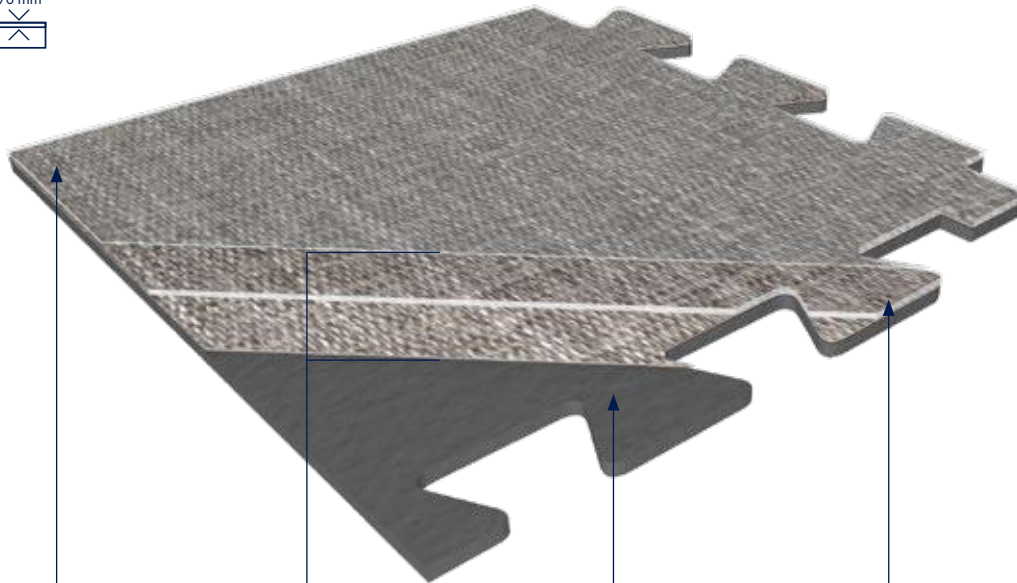

PUR+ MATT



Easy maintenance

4D DESIGN

MATT SURFACE



Natural look

CRISTAL WEAR LAYER



High definition design & color

STRUCTURED EMBOSS



Ultra realistic surface

DESIGNS

Designs selected to hide dovetails - all over effect

RESILIENT REINFORCED CORE



Glass particles for better stability



Noise absorption



Soft underfoot



Renovation ceramic 5 mm joint

EXCLUSIVE DOVETAILS



Gerflor patented



No adhesive



Easy installation



Avoid mistakes installation



Resistant dovetails

Formats (mm)



PUR+ Matt



Creation 70 Connect

Creation 70 Connect is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in tiles. It consists in a 0.70 mm thick transparent wear layer, a design film, a calendered layer and a PVC compact sublayer reinforced with fibers.

The overall thickness is 5 mm.

It benefits from a cross-linked polyurethane surface treatment (**PUR+ Matt**), making maintenance easier and eliminating the need for initial polishes.

Creation 70 Connect is an interlocking floorcovering, resistant to use (commercial / industrial use of 34-43 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.

Creation 70 Connect is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 55% of recycled content. It is REACH compliant. **The product emission rate of organic compounds is < 10 microgram/m³** (TVOC < 28 days – ISO 16000-6).



Interlocking installation with dovetails



Fast and easy renovation



Adhesive free



All over effect



Creation LVT

Creation 70 Connect

Description

Total thickness	EN ISO 24346	mm	5.00
Thickness of wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/sqm	8235
Tile size	EN ISO 24342	mm	701.3 × 701.3
Number of tiles and sqm per box	-	-	20 / 9.83

Classification

Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet ⁽¹⁾	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10

Performances

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	group	I
Room impact	NF-S 31074	dB	75
Impact sound insulation	EN ISO 717-2	dB	5
Dimensional stability	EN ISO 23999	%	≤ 0.15
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	PUR+ Matt
Chemical products resistance	EN ISO 26987	-	OK

Environment / indoor air quality

TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
--------------------	-------------	--------------------------	------

CE marking



EN 14041



(1) Ramp test with oil

Luxury Vinyl Tile

Creation 70



Muse Smocked / East Village

DB
Creation 70
(Dry Back)

CLIC
Creation 70 Clic

LL
Creation 70
Looselay

CO
Creation 70
Connect




Cervino Oak Cold Grey 1187
DB 230 × 1500




Travertino Grey 1189
DB 228 × 914



Onka Pearl 1056
DB 230 × 1500 | **CLIC** 242 × 1461

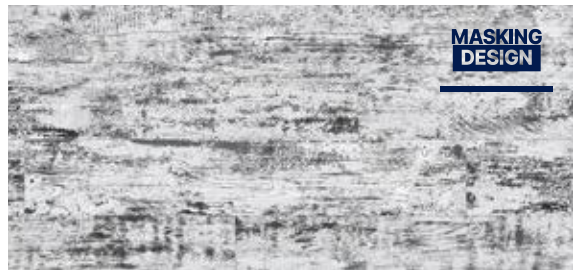

Grace Bay Black 1050
DB 208 × 1243 | **CLIC** 214 × 1239

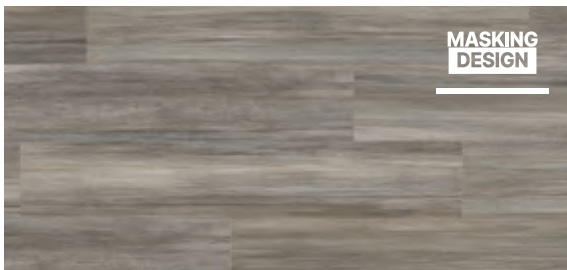

Muse Smocked 1051
DB 208 × 1243 | **CLIC** 214 × 1239



Toasted Wood Ash 1053
DB 230 × 1500 | **CLIC** 242 × 1461

Luxury Vinyl Tile

Creation 70



Toasted Wood Cafe



Wild Oak 0359
DB 208 × 1243 | CLIC 214 × 1239



Toasted Wood Roadster 0800
DB 230 × 1500 | CLIC 242 × 1461



Toasted Wood Cafe 0799
DB 230 × 1500 | CLIC 242 × 1461



Onka Coffee 1057
DB 230 × 1500 | CLIC 242 × 1461

DB
Creation 70
(Dry Back)

CLIC
Creation 70 Clic

LL
Creation 70
Looselay


CO
Creation 70
Connect



Onka Natural 1055
DB 230 × 1500 | **CLIC** 242 × 1461



Muse Sand 1052
DB 208 × 1243 | **CLIC** 214 × 1239

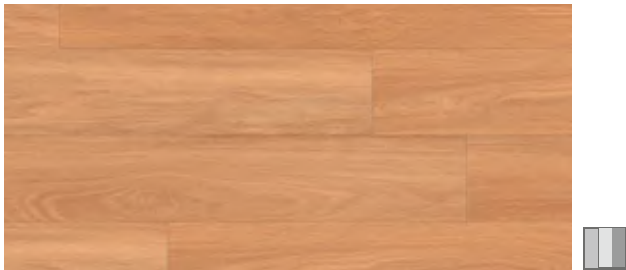

Onka Honey 1054
DB 230 × 1500 | **CLIC** 242 × 1461 | **LL** 229 × 1220



Clifton Honey 1190
DB 208 × 1243



Serena 0545
DB 208 × 1243 | **CLIC** 214 × 1239



Albion 0577
DB 208 × 1243 | **CLIC** 214 × 1239



Diesel Nala 1075
DB 230 × 1500 | **LL** 229 × 1220



Clifton Chestnut 1191
DB MIX : 152 × 914 / 76 × 914 / 228 × 914



Diesel Burnt 1074
DB 230 × 1500 | **LL** 229 × 1220



Deep Forest 0360
DB 208 × 1243 | **CLIC** 214 × 1239

Creation
LVT

Luxury Vinyl Tile

Creation 70



Clifton Grey 1192
DB 208 × 1243



Travertino Beige 1188
DB 228 × 914



Grace Bay Cream 1049
DB 208 × 1243



Denim Wood 0356
DB 208 × 1243 | LL 229 × 1220



Solid Glam Picadilly 0803
DB 184 × 1219



Portobello 0357
DB 208 × 1243 | CLIC 214 × 1239 | LL 229 × 1220



Regimental Picadilly 0807
DB 184 × 1219



Moon Island 0358
DB 208 × 1243 | CLIC 214 × 1239 | LL 229 × 1220



Solid Glam Picadilly / Regimental Picadilly



Osborne Natural 0091
CO 701,3 × 701,3

DB
Creation 70
(Dry Back)

CLIC
Creation 70 Clic

LL
Creation 70
Looselay


CO
Creation 70
Connect



Silversands 0324
DB 208 × 1243




Limed Oak 0329
DB 208 × 1243

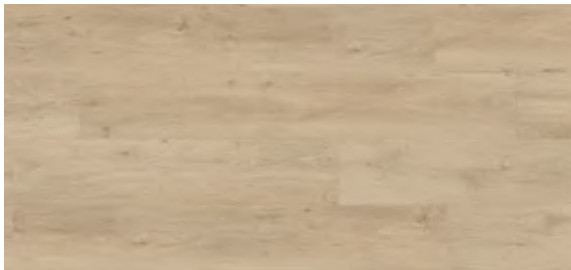


Midwest 0538
DB 208 × 1243 | **CLIC** 214 × 1239 | **LL** 229 × 1220



Cervino Oak Beige 0797
DB 230 × 1500 | **CLIC** 242 × 1461

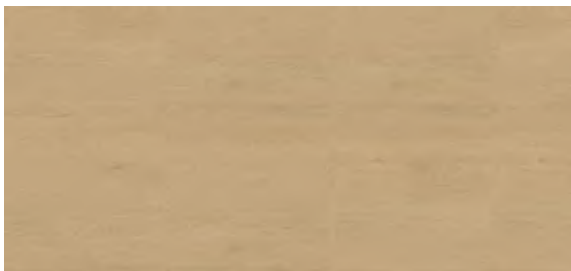

Oak Light 0090
CO 701,3 × 701,3

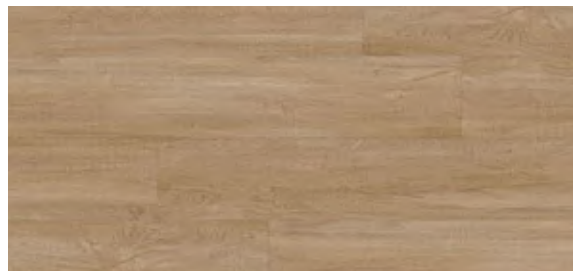

Cervino Oak Nature 0798
DB 230 × 1500 | **CLIC** 242 × 1461




Oak Golden 1492
CO 701,3 × 701,3



Cervino Oak Honey Clear 1186
DB 230 × 1500



Douglas 0535
DB 208 × 1243

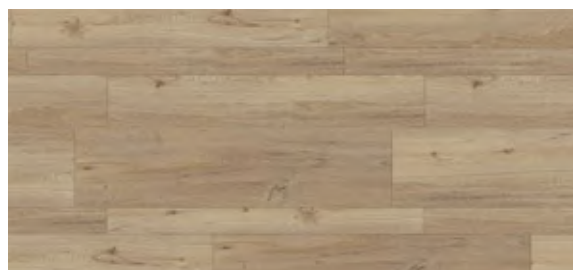

Clifton 0556
DB MIX : 152 × 914 / 76 × 914 / 228 × 914

Luxury Vinyl Tile


Creation 70



Gentleman Tweed / Diesel Nala



Gentleman Taupe 1083
DB 228 × 914 | LL 229 × 1220 | CO 701,3 × 701,3

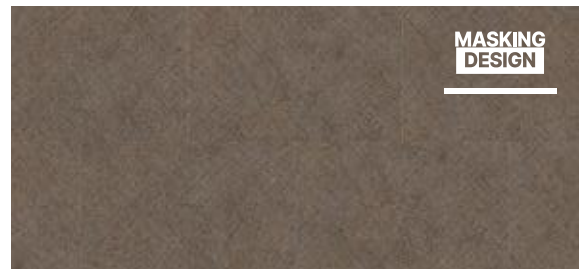


Tatami Smoked 1079
DB 610 × 610 | LL 600 × 600



Prado Terracotta 1065
DB 457 × 914 | CLIC 391 × 729



Gentleman Tweed 1076
DB 228 × 914 | LL 229 × 1220

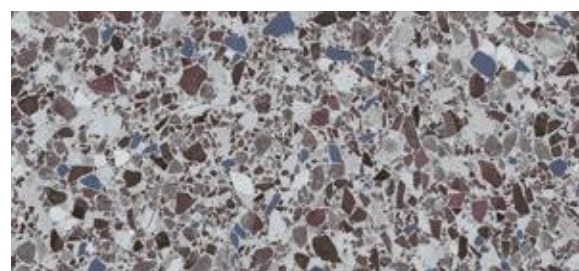


Dalma Burgundy 1089
CO 701,3 × 701,3

DB
Creation 70
(Dry Back)

CLIC
Creation 70 Clic

LL
Creation 70
Looselay


CO
Creation 70
Connect

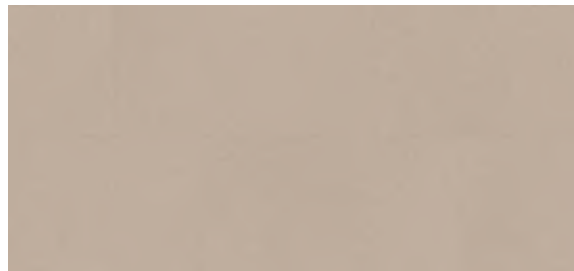


Pure Concrete Beige 1063
DB 914 × 914 | **CLIC** 391 × 729




Rough Textile Beige 0062
CO 701,3 × 701,3

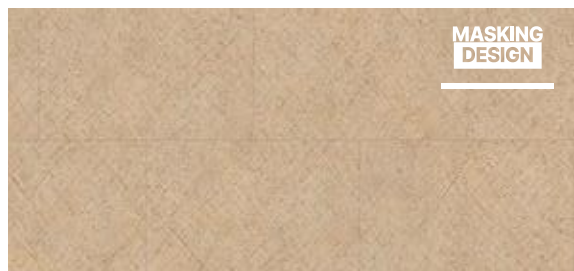

Tatami Savane 1077
DB 610 × 610 | **LL** 600 × 600

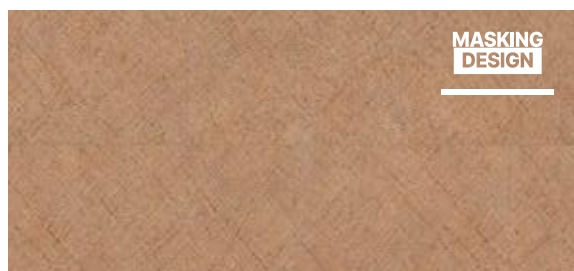

Tatami Raffia 1078
DB 610 × 610 | **LL** 600 × 600

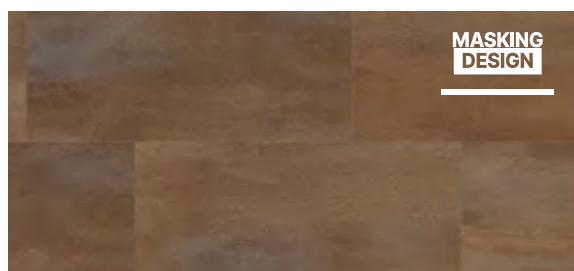

Oxyd Pure 0088
DB 457 × 914 | **CLIC** 391 × 729

Creation
LVT

Luxury Vinyl Tile


Creation 70



Pure Concrete Light 1060
DB 914 × 914 | **CLIC** 391 × 729 | **LL** 914 × 914



Secret Garden White 1059
DB 457 × 914 | **CLIC** 391 × 729

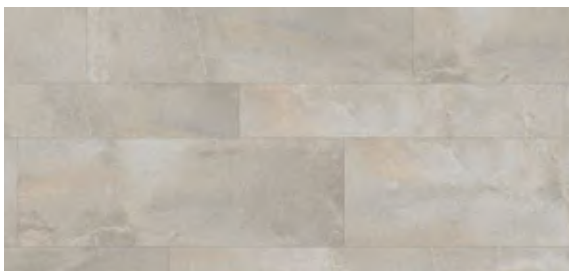

Etna Beige 1068
DB 457 × 914 / **MIX** : 152 × 914 / 305 × 914 / 457 × 914 (on demand)
CLIC 391 × 729



Dock Taupe 0087
DB 457 × 914 | **CLIC** 391 × 729 | **LL** 914 × 914
CO 701,3 × 701,3 (0089)



Etna Beige

DB
Creation 70
(Dry Back)


CLIC
Creation 70 Clic

LL
Creation 70
Looselay

CO
Creation 70
Connect




Pure Concrete Medium 1061
DB 914 × 914 | **CLIC** 391 × 729 | **LL** 914 × 914

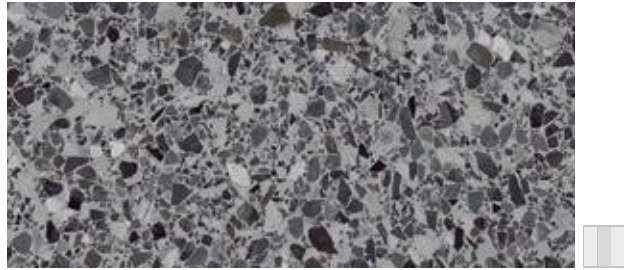


Dalma Grey 1088
CO 701,3 × 701,3



Rough Textile Grey 0063
CO 701,3 × 701,3

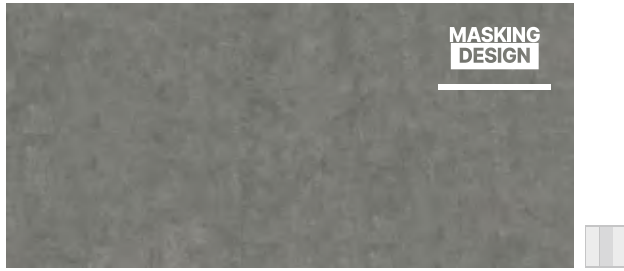

East Village 0522
DB 610 × 610

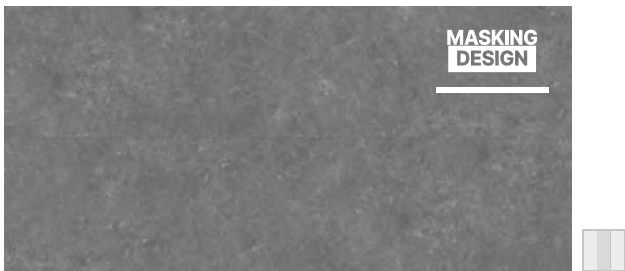


Dock Grey 0085
DB 457 × 914 | **CLIC** 391 × 729 | **LL** 914 × 914 | **CO** 701,3 × 701,3



Halifax 0531
DB 610 × 610




Carassi 0561
DB 228 × 914

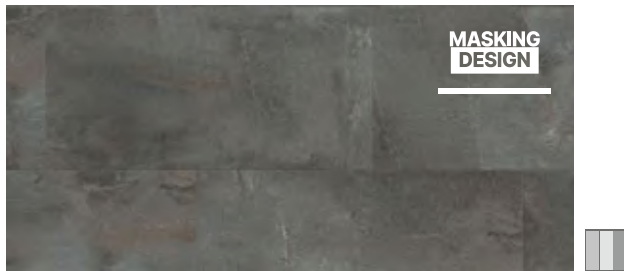

Etna Dark 1069
DB 457 × 914 | **CLIC** 391 × 729



Oxyd Iron 0089
DB 457 × 914 | **CLIC** 391 × 729

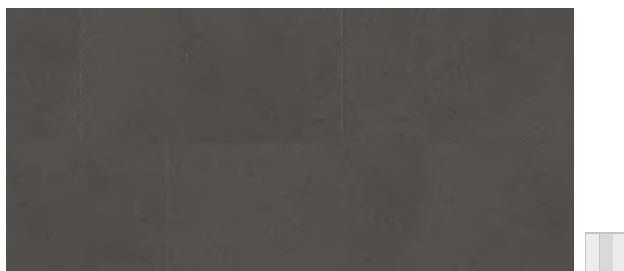


Pure Concrete Dark 1062
DB 914 × 914 | **CLIC** 391 × 729 | **LL** 914 × 914


Creation
LVT

Luxury Vinyl Tile

Creation 70

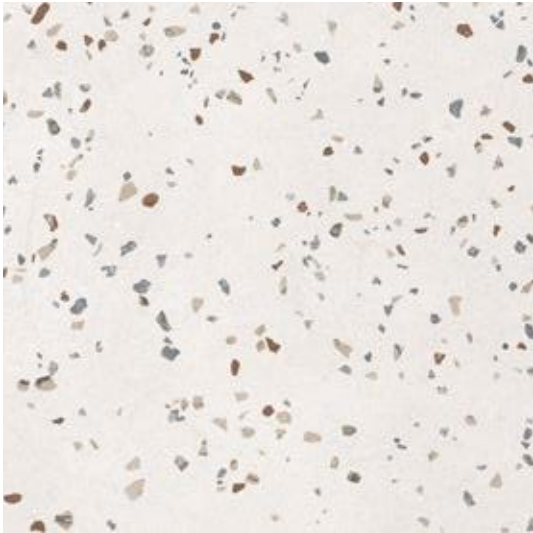

Terrazzo Nature* 1067
DB 914 × 914 | CLIC 391 × 729

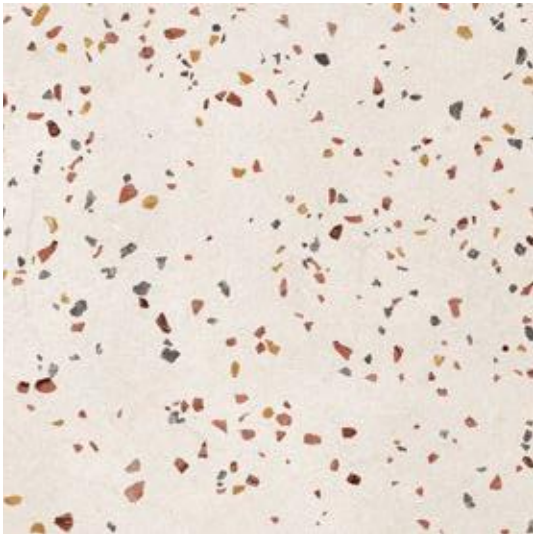

Terrazzo Ocre* 1066
DB 914 × 914 | CLIC 391 × 729

DB
Creation 70
(Dry Back)

CLIC
Creation 70 Clic

LL
Creation 70
Looselay

CO
Creation 70
Connect



Gentleman Grey /
Gentleman Garance /
Gentleman Peppermint



Gentleman Garance 1080
DB 610 × 610 | **LL** 600 × 600



Gentleman Indigo 1081
DB 610 × 610 | **LL** 600 × 600



Gentleman Peppermint 1082
DB 610 × 610 | **LL** 600 × 600



Gentleman Grey 1058
DB 457 × 914 | **CLIC** 391 × 729 | **LL** 914 × 914
CO 701,3 × 701,3 (0089)









Prado Green 1064
DB 457 × 914 | **CLIC** 391 × 729

Creation
LVT

Luxury Vinyl Tile

Creation 70

Code	Color	Design	Dry Back	Clic	Looselay	Connect	Skirting Matching Design	Emboss	NCS	LRV
										
0085	Dock Grey		457x914	391x729	914x914	701,3x701,3	S111	Hammered	6500-N	20.1
0087	Dock Taupe		457x914	391x729	914x914	701,3x701,3	S020	Hammered	6005-Y50R	19.2
1058	Gentleman Grey		610x610	391x729	600x600	701,3x701,3 (0088)	White	Textile	7500-N	12.7
0538	Midwest		208x1243	214x1239	229x1220	-	S039	Natural	3010-Y30R	38.9
0358	Moon Island		208x1243	214x1239	229x1220	-	S034	Brushed	4010-Y30R	24.8
1054	Onka Honey		230x1500	242x1461	229x1220	-	S121	Natural	4020-Y40R	26.6
0357	Portobello		208x1243	214x1239	229x1220	-	S053	Brushed	5005-Y50R	23.5
1062	Pure Concrete Dark		914x914	391x729	914x914	-	White	Hammered	7500-N	11.1
1060	Pure Concrete Light		914x914	391x729	914x914	-	White	Hammered	3500-N	39.1
1061	Pure Concrete Medium		914x914	391x729	914x914	-	White	Hammered	4502-B	28.4
0577	Albion		208x1243	214x1239	-	-	S108	Natural	4020-Y30R	21.8
0797	Cervino Oak Beige		230x1500	242x1461	-	-	S011	Natural	3010-Y30R	40.1
0798	Cervino Oak Nature		230x1500	242x1461	-	-	S109	Natural	5020-Y20R	28.3
0360	Deep Forest		208x1243	214x1239	-	-	S110	Brushed	6010-Y50R	15.8
1068	Etna Beige	457x914 / MIX 152x914 305x914 / 457x914 on demand		391x729	-	-	White	Hammered	4005-Y80R	36.6
1069	Etna Dark		457x914	391x729	-	-	White	Hammered	6502-R	12.9
1050	Grace Bay Black		208x1243	214x1239	-	-	White	Natural	2500-N	32.0
1049	Grace Bay Cream		208x1243	-	-	-	White	Natural	2005-Y80R	49.1
1052	Muse Sand		208x1243	214x1239	-	-	S117	Natural	3010-Y40R	39.4
1051	Muse Smoked		208x1243	214x1239	-	-	S118	Natural	5005-Y80R	21.3
1057	Onka Coffee		230x1500	242x1461	-	-	White	Natural	8005-Y80R	7.0
1055	Onka Natural		230x1500	242x1461	-	-	S122	Natural	3020-Y60R	31.1
1056	Onka Pearl		230x1500	242x1461	-	-	S120	Natural	4005-R20B	32.9
0089	Oxyd Iron		457x914	391x729	-	-	White	Perforated	8000-N	9.4
0088	Oxyd Pure		457x914	391x729	-	-	White	Perforated	6020-Y30R	17.2
1063	Pure Concrete Beige		914x914	391x729	-	-	White	Hammered	4005-Y50R	34.3
1064	Prado Green		457x914	391x729	-	-	White	Stone	7502-G	12.1
1065	Prado Terracotta		457x914	391x729	-	-	White	Stone	4010-Y90R	23.1
1059	Secret Garden White		457x914	391x729	-	-	White	Stone	2502-Y	50.2
0545	Serena		208x1243	214x1239	-	-	S132	Natural	6010-Y30R	16.7
1067	Terrazzo Nature		914x914	391x729	-	-	White	Stone	2000-N	64.4
1066	Terrazzo Ocre		914x914	391x729	-	-	White	Stone	2002-Y50R	54.5
1053	Toasted Wood Ash		230x1500	242x1461	-	-	White	Natural	7502-R	10.6
0799	Toasted Wood Cafe		230x1500	242x1461	-	-	White	Natural	8010-Y30R	8.4
0800	Toasted Wood Roadster		230x1500	242x1461	-	-	White	Natural	7010-Y30R	13.6
0359	Wild Oak		208x1243	214x1239	-	-	S075	Brushed	4020-Y30R	26.8
0356	Denim Wood		208x1243	-	229x1220	-	S026	Natural	2502-Y	41.4
1074	Diesel Burnt		230x1500	-	229x1220	-	White	Natural	8010-Y30R	8.1
1075	Diesel Nala		230x1500	-	229x1220	-	White	Natural	5020-Y30R	16.7
1080	Gentleman Garance		610x610	-	600x600	-	White	Textile	5030-Y90R	13.7
1081	Gentleman Indigo		610x610	-	600x600	-	White	Textile	5030-R90B	16.3
1082	Gentleman Peppermint		610x610	-	600x600	-	White	Textile	6020-G	16.3
1083	Gentleman Taupe		228x914	-	229x1220	701,3x701,3 (0089)	White	Textile	5502-Y	21.2
1076	Gentleman Tweed		228x914	-	229x1220	-	White	Textile	6010-Y50R	16.2
1077	Tatami Savane		610x610	-	600x600	-	White	Stone	3010-Y20R	31.6
1079	Tatami Smoked		610x610	-	600x600	-	White	Stone	7005-Y20R	12.2
1078	Tatami Raffia		610x610	-	600x600	-	White	Stone	4020-Y30R	24.4
0561	Carassi		228x914	-	-	-	White	Rib Wood	5502-G	21.7
1187	Cervino Oak Cold Grey		230x1500	-	-	-	White	Natural	3502-R	33.8
1186	Cervino Oak Honey Clear		230x1500	-	-	-	White	Natural	4020-Y30R	27.6
0556	Clifton	Mix 152x914 / 76x914 / 228x914		-	-	-	S144	Natural	5010-Y10R	23.2
1191	Clifton Chesnut	Mix 152x914 / 76x914 / 228x914		-	-	-	White	Natural	4020-Y40R	25.2
1192	Clifton Grey		208x1243	-	-	-	White	Natural	3005-R20B	45.7
1190	Clifton Honey		208x1243	-	-	-	White	Natural	4020-Y40R	24.2
0535	Douglas		208x1243	-	-	-	White	Natural	4005-Y50R	29.1
0522	East Village		610x610	-	-	-	S154	Stone	4502-G	22.0
0531	Halifax		610x610	-	-	-	S032	Stone	6502-Y	16.7
0329	Limed Oak		208x1243	-	-	-	S147	Natural	2010-Y20R	42.0
0807	Regimental Picadilly		184x1219	-	-	-	White	Natural	4005-Y20R	20.6
0324	Silversands		208x1243	-	-	-	S146	Natural	3010-Y20R	33.1
0803	Solid Glam Picadilly		184x1219	-	-	-	White	Natural	5005-Y20R	27.8
1188	Travertino Beige		228x914	-	-	-	White	Stone	3005-Y80R	46.9
1189	Travertino Grey		228x914	-	-	-	White	Stone	3502-R	36.7
1089	Dalma Burgundy		-	-	-	701,3x701,3	White	Hammered	6005-Y80R	24.7
1088	Dalma Grey		-	-	-	701,3x701,3	White	Hammered	7005-R80B	19
1492	Oak Golden		-	-	-	701,3x701,3	White	Natural	4020-Y30R	27.9
0090	Oak Light		-	-	-	701,3x701,3	White	Natural	5500-N	21.1
0091	Osborn Natural		-	-	-	701,3x701,3	White	Hammered	5500-N	21.1
0062	Rough Textile Beige		-	-	-	701,3x701,3	White	Textile	5005-Y20R	25.4
0063	Rough Textile Grey		-	-	-	701,3x701,3	White	Textile	5500-N	21.1

Packaging

Product size (mm)	m ² /box	m ² /palette
Creation 70		
184 × 1219	3,36	215,32
184 × 1219*	3,14	213,53
208 × 1243	3,62	195,46
228 × 914	3,54	212,65
230 × 1500	3,11	204,93
457 × 914	3,76	203,09
610 × 610	3,35	187,54
914 × 914	4,18	204,84
MIX Planks	3,34	213,49
MIX Tiles	3,34	200,58

* Regimental Picadilly 0807

Product size (mm)	m ² /box	m ² /palette
Creation 70 Clic		
214 × 1239	1,59	85,86
242 × 1461	1,77	84,96
391 × 729	1,43	85,80
Creation 70 Looselay		
229 × 1220	1,67	80,2
600 × 600	1,44	72,0
914 × 914	1,67	80,2
Creation 70 Connect		
701,3 × 701,3	-	49,14

Exclusive embosses



Stone



Brushed



Saw effect



Natural



Hammered



Perforated



Textile





Rib Wood



**Ultra
Realistic
Embossing**

Luxury Vinyl Tile

Saga²

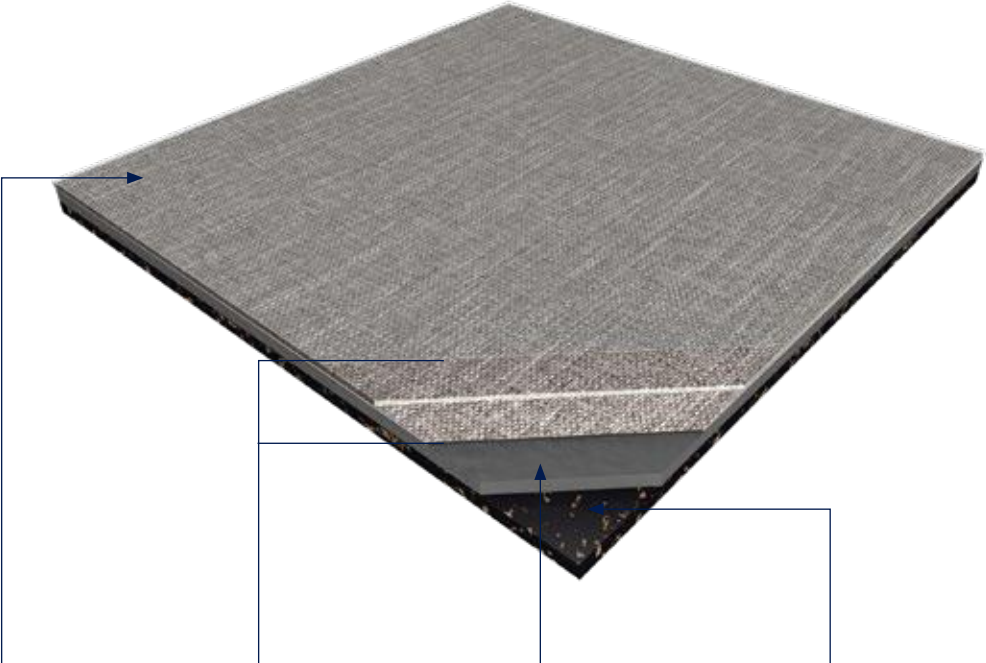

PROTECSOL®



Easy maintenance

4D DESIGN

MATT SURFACE



Natural look

CRISTAL WEAR LAYER



High definition design & color

STRUCTURED EMBOSS



Ultra realistic surface

DESIGNS

Exclusive designs

RESILIENT CORE



Noise absorption



Acoustic



Soft underfoot



Renovation ceramic 5 mm joint

CORK BACKING



15 dB Impact Sound Insulation



Environmental friendly



Easily removable

Formats (mm)



Protecsol®



Looselay
Removable

Saga²

Saga² is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in tiles. It consists in a 0.70 mm thick transparent wear layer, a design film, a calendered layer and a PVC/Cork sublayer which provides acoustic properties with 15 dB impact sound insulation and a walking noise < 65 dB. The overall thickness is 4.6 mm. It benefits from a **Protecsol®** surface treatment, making maintenance easier and eliminating the need for initial polishes.

Saga² is a looselay floorcovering, resistant to use (commercial / industrial use) of 34-43 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1. **Saga²** is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 55% of recycled content. It is REACH compliant. **The product emission rate of organic compounds is < 10 microgram/m³** (TVOC < 28 days – ISO 16000-6).



Comfort & Resistance



Acoustic



Renovation ceramic
5 mm joint



90° installation



Dock Grey

Creation
LVT

Saga²

Description

Total thickness	EN ISO 24346	mm	4.6
Thickness of wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/sqm	5595
Tile size	EN ISO 24342	mm	500 × 500
Number of tiles and sqm per box	-	-	10 / 2.50

Classification

Norm / Product specification	-	-	EN 652
European classification	EN ISO 10874	class	34-42
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet ⁽¹⁾	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10

Performances

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Dimensional stability	EN ISO 23999	%	≤ 0.15
Residual indentation	EN ISO 24343-1	mm	< 0.13
Castor chair test (type H)	ISO 4918	-	OK
Impact sound insulation	EN ISO 717-2	dB	15
Room impact	NF-S 31074	dB	< 65
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	Protecsol®
Chemical products resistance	EN ISO 26987	-	OK

Environment / indoor air quality

TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
Certification	-	-	Floorscore®

CE marking



EN 14041



(1) Ramp test with oil

Luxury Vinyl Tile

Saga²




Gentleman Blue




Rough Textile Grey 0063




Gentleman Grey 0088



Kadina City 0017




Barma Sweet 0021



Barma Mystery 0023




Gentleman Blue 0030




Fiber Silver 0028 METAL EFFECT



Dock Grey 0085




Spider Blue 0039



Mozaic Grey 0032



Fiber Heavy Metal 0027 METAL EFFECT



Dalma Grey 1088

Luxury Vinyl Tile


Saga²



Gentleman Beige / Amarante



Amarante Dark 0572




Fiber Copper 0026 METAL EFFECT



Gentleman Taupe 0089



Dock Taupe 0087



Dalma Burgundy 1089



Rough Textile Beige 0062




Gentleman Beige 0029



Spider Beige 0033



Amarante 0579





Barma Beige 0025



Albion 0577

Luxury Vinyl Tile

Creation 55

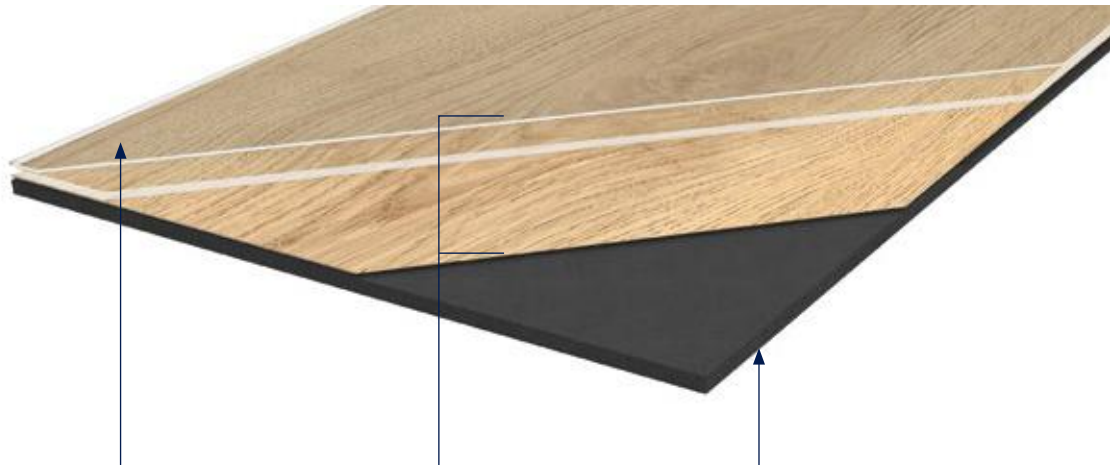

PROTECSHIELD™

ENHANCED PERFORMANCES



Micro scratch resistance



Easy maintenance

ULTRA MATT SURFACE



Natural look

4D DESIGN

CRYSTAL WEAR LAYER



Authentic Look

HIGH DEFINITION PRINTED FILM



Ultra realism

STRUCTURED EMBOSS



Ultra realistic surface

BEVELLED EDGES



Tiles & Planks effect

RESILIENT COMFORT CORE



Acoustic comfort



Walking comfort



Easy installation



Easy cutting

LVT decoratives strips

Format (mm) 4×914mm



Code: 3203 + Color code



100% Reach
Phthalate free



100% Recyclable
Up to 35% recycled content



TVOC emissions below
detection level
(TVOC < 10µg/m³ after 28 days)
No formaldehyde

Formats (mm)

184x1219

230x1500

152x762

610x610

914x914

457x914

Protecshield™



Creation 55

Creation 55 is a synthetic, decorative, flexible, antistatic abrasion group T floorcoverings available in tile or plank, with bevelled edges. It consists in a 0.55 mm thick transparent wear layer, a design film and a Resilient Comfort Core to provide softness and comfort surface. The overall thickness is 2.5 mm. They benefit from a cross-linked polyurethane surface treatment (**Protecshield™**), making maintenance easier and prevent from micro scratches.

Creation 55 is a glued floorcovering, resistant to use (commercial / industrial use) of 33 / 42 according to EN-ISO 10874 and has Bfl -s1 class for smoke emission according to EN 13501-1.

Creation 55 is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is 100% compliant with REACH. **The product emission rate of organic compounds is < 10 microgram/m³** (TVOC < 28 days – ISO 16000-6).

Can be combined with pre-adhesive underlayer

Gerflor Smart Fix 16dB



Code: 1698 - Format: 1m x 7.5ml

Creation 55

	Creation 55	Creation 55 Trend	Creation 55 Design
Description			
Total thickness	EN ISO 24346	mm	2.50
Thickness of wearlayer	EN ISO 24340	mm	0.55
Weight	EN ISO 23997	g/sqm	3850
Size	EN ISO 24342	mm	Planks - 184,15x1219,2 / 914,4x914,4 / 152x762 / 230x1500 Tiles - 457,2x914,4 / 609,6x609,6
Number of planks / tiles and sqm per box	-	-	15-5-33-9-9-9/ 3,36-4,18-3,82-3,11-3,76-3,35
Classification			
Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	33-42
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10
Performances			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	77
Impact sound insulation	EN ISO 717-2	dB	4
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.25
Dimensional stability (average measured value)	-	%	≤ 0.10
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN ISO 26987	-	OK
Environment / indoor air quality			
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
Certification	-	-	Floorscore®
CE marking			




EN 14041



Luxury Vinyl Tile

Creation 55 Solid Clic



PROTECSHIELD™

ENHANCED PERFORMANCES



Micro scratch resistance



Easy maintenance

ULTRA MATT SURFACE



Natural look

4D DESIGN

CRYSTAL WEAR LAYER



Authentic Look

HIGH DEFINITION PRINTED FILM



Ultra realism

STRUCTURED EMBOSS



Ultra realistic surface

BEVELLED EDGES



Tiles & Planks effect

DUOCORE 2.0 TECHNOLOGY

RESILIENT COMFORT CORE



Acoustic comfort



Walking comfort

NEW RIGID CORE



Renovation over ceramic tiles 6mm/2mm



Resistance against high temperature variation

EXCLUSIVE INTERLOCKING SYSTEM

ANGULAR ON LONG SIDE



Quiet installation

VERTICAL ON SHORT SIDE



Traffic resistance Durability



Fast & easy to install



Waterproof Joints



100% Reach Phthalate free



100% Recyclable Up to 55% recycled content



TVOC emissions below detection level (TVOC < 10µg/m³ after 28 days) No formaldehyde



Creation 55 Solid Clic

Creation 55 Solid Clic is a decorative, flexible, abrasion group T floorcoverings available in tiles and planks, with bevelled edges. It consists in a 0,55 mm thick transparent wear layer, a design film of 2 m width printed in high definition to have more variety in the design and the technology "Duo Core 2.0": combination of a rigid core back layer for easy renovation and a flexible core top layer to provide softness and comfort surface, the whole with a double reinforcement for enhanced durability. The overall thickness is 5 mm. They benefit from a cross-linked polyurethane surface treatment (**Protecshield™**), making maintenance easier and avoiding microscratches.

Creation 55 Solid Clic is an interlocking floorcovering assembled with a vertical system on the short side and a horizontal system on long side for a quick and solid installation. It has a European class (commercial / industrial use) 33/42 according to EN-ISO 10874 and has Bfl -s1 class for smoke emission according to EN 13501-1. **Creation 55 Solid Clic** is made with phthalate free plasticizers (except recycled content). It is 100% recyclable and made with a recycled content up to 55%. It is 100% compliant with REACH. **The product emission rate of organic compounds is < 10 microgram/m³** (TVOC < 28 days – ISO 16000-6).

To be combined with Gerflor acoustic underlayers

Gerflor Acoustic 15 dB



Code: 1798 - Format: 1m x 15ml

Gerflor Acoustic Plus 19 dB



Code: 0704 - Format: 0.98m x 15.3ml

Gerflor Silence Plus 19 dB



Code: 5949 - Format: 1.18m x 8.5ml

Creation 55 Solid Clic

Description

Total thickness	EN ISO 24346	mm	5.00
Thickness of wearlayer	EN ISO 24340	mm	0.55
Weight	EN ISO 23997	g/sqm	7781
Size	EN ISO 24342	mm	Planks - 212×1238,8 / 239,6×1460,8 Tiles - 388,8×728,7
Number of planks / tiles and sqm per box	EN ISO 24342	mm	7-6-6 / 1,84-2,10-1,70

Classification

Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	33-42
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10

Performances

Wear resistance	EN 660.2	mm ³	< 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	79
Impact sound insulation	EN ISO 717-2	dB	4
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≈ 0.05
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN 423	-	OK

Environment / indoor air quality

TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
Certification	-	-	Floorscore®

CE marking



Luxury Vinyl Tile

Creation 55 Rigid Acoustic



PROTECSHIELD™

ENHANCED PERFORMANCES



ULTRA MATT SURFACE



4D DESIGN

CRYSTAL WEAR LAYER



HIGH DEFINITION PRINTED FILM



STRUCTURED EMBOSS



BEVELLED EDGES



RIGID CORE TECHNOLOGY



INTEGRATED ACOUSTIC UNDERLAY

ACOUSTIC UNDERLAYER



INTERLOCKING SYSTEM

ANGLE TO ANGLE LOCKING SYSTEM



100% REACH
Phthalate free




100% RECYCLABLE
Up to 35% recycled content



TVOC emissions below detection level
(TVOC < 10µg/m³ after 28 days)
No formaldehyde

Formats (mm)



Protecshield™



Creation 55 Rigid Acoustic

Creation 55 Rigid Acoustic is a decorative flooring, rigid interlocking with acoustic layer, antistatic, abrasion group T floorcoverings available in tiles and planks, with bevelled edges.

It is made with :

- a 0,55 mm thick transparent wear layer to provide durability
- a high definition printing film to provide an hyper realistic design aspect
- a Full Rigid Board to provide high performances for heavy renovations
- an integrated underlayer 100% recyclable which provides a 19 dB sound reduction market.

The total thickness of the product is 6 mm. The produce is also using a cross-linked polyurethane surface treatment

(**Protecshield™**), making maintenance easier, durability longer, protecting from micro scratches, and providing an ultra-mat effect for more realistic look.

Creation 55 Rigid Acoustic is an interlocking floorcovering assembled with an angle/angle locking system to provide robust and easy installation. It has an European class (commercial/industrial) of 33/42 according to EN-ISO 10874 and has Bfl -s1 class for smoke emission according to EN 13501-1.

Creation 55 Rigid Acoustic is made with phthalate free plasticizers. It is 100% recyclable and made with up to 35% of recycled content. It is 100% compliant with REACH.

The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).



Ballerina

Creation
LVT

Creation 55 Rigid Acoustic

Description			
Total thickness	EN ISO 24346	mm	6.00
Thickness of wearlayer	EN ISO 24340	mm	0.55
Weight	EN ISO 23997	g/sqm	9480
Size	EN ISO 24342	mm	Planks - 125x750 / 177x1219 / 225x1524 Tiles - 457x914
Number of planks / tiles and sqm per box	EN ISO 24342	mm	16-8-5-4 / 1,50-1,73-1,71-1,67
Classification			
Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	33-42
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10
Performances			
Wear resistance	EN 660.2	mm³	< 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	81
Impact sound insulation	EN ISO 717-2	dB	19
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≤ 0.05
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN 423	-	OK
Environment / indoor air quality			
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10
Certification	-	-	Floorscore®
CE marking			





EN 14041



Luxury Vinyl Tile

Creation 55 Looselay

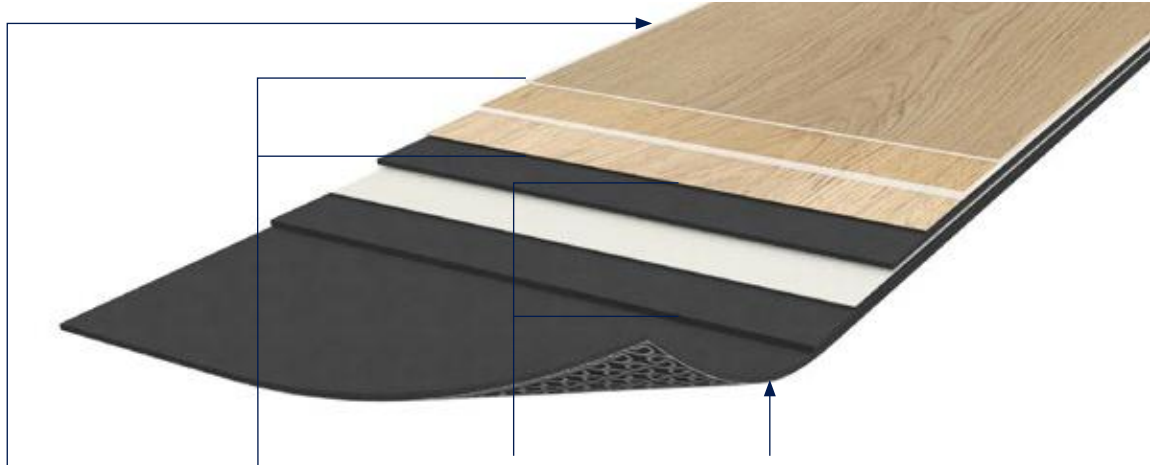

PROTECSHIELD™

ENHANCED PERFORMANCES



Micro scratch resistance



Easy maintenance

ULTRA MATT SURFACE



Natural look

4D DESIGN

CRYSTAL WEAR LAYER



Authentic Look

HIGH DEFINITION PRINTED FILM



Ultra realism

STRUCTURED EMOSS



Ultra realistic surface

BEVELLED EDGES



Tiles & Planks effect

RESILIENT CORE BOARD

RENOVATION



Over ceramic tiles
4mm/2mm

DIMENSIONAL STABILITY



Free adhesive
installation up to
30sqm

RESILIENT COMFORT CORE



Acoustic comfort



Walking comfort

REMOVABLE



suitable for raised
access Floor

WAFFLE BACKING



Perfect adherence
to the subfloor



No moisture if water
infiltration



100% Reach
Phthalate free




100% Recyclable
Up to 35% recycled content



TVOC emissions below
detection level
(TVOC < 10µg/m³ after 28 days)
No formaldehyde

Formats (mm)



**Looselay
Removable**


Creation 55 Looselay

Creation 55 Looselay is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in tiles and planks. It consists in a 0.55 mm thick transparent wear layer, a design film and a Duo Core Technology, made with a rigid core back layer reinforced with a fiber veil, combined with a flexible core top layer to provide softness and comfort surface. The overall thickness is 4.5 mm. It also includes anti-skid backing to allow an easy installation and a glue-free installation up to 30 sqm. It benefits from a cross-linked polyurethane surface treatment (**ProtecShield™**), making maintenance easier and eliminating the need for initial polishes.

Creation 55 Looselay is a looselay floorcovering, resistant to use (commercial / industrial use) of 33-42 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.

Creation 55 Looselay is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is REACH compliant. **The product emission rate of organic compounds is < 10 microgram/m³** (TVOC < 28 days – ISO 16000-6).

Explore the world of possibilities

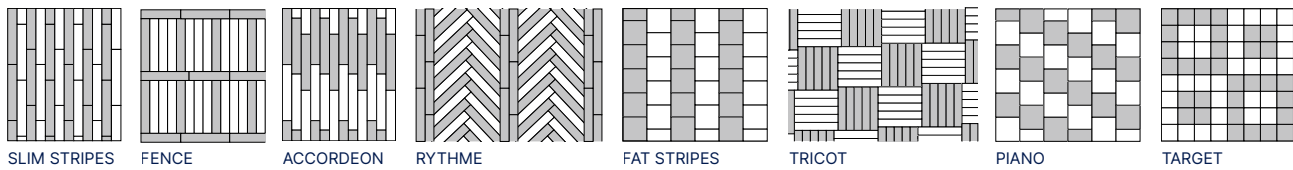

Quick & Easy to install



Installation with tackifier



Apply planks or tiles



Pressure roller



Easy to replace a plank

Please refer to Gerflor's installation guidelines.

Creation 55 Looselay

Description

Total thickness	EN ISO 24346	mm	4.50
Thickness of wearlayer	EN ISO 24340	mm	0.55
Weight	EN ISO 23997	g/sqm	7500
Size	EN ISO 24342	mm	Planks - 229x1220 Tiles - 500x500 / 600 x 600
Number of planks / tiles and sqm per box	-	-	8-8-6 / 2,23-2,0-2,16

Classification

Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	33-42
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10

Performances

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	73
Room sound insulation	EN ISO 717-2	dB	7
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	EN ISO 23999	%	≈ 0.05
Residual indentation	EN ISO 24343-1	mm	≤ 0.05
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN ISO 26987	-	OK

Environment / indoor air quality

TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
Certification	-	-	Floorscore®

CE marking





EN 14041



Luxury Vinyl Tile

Creation 55 Looselay Acoustic

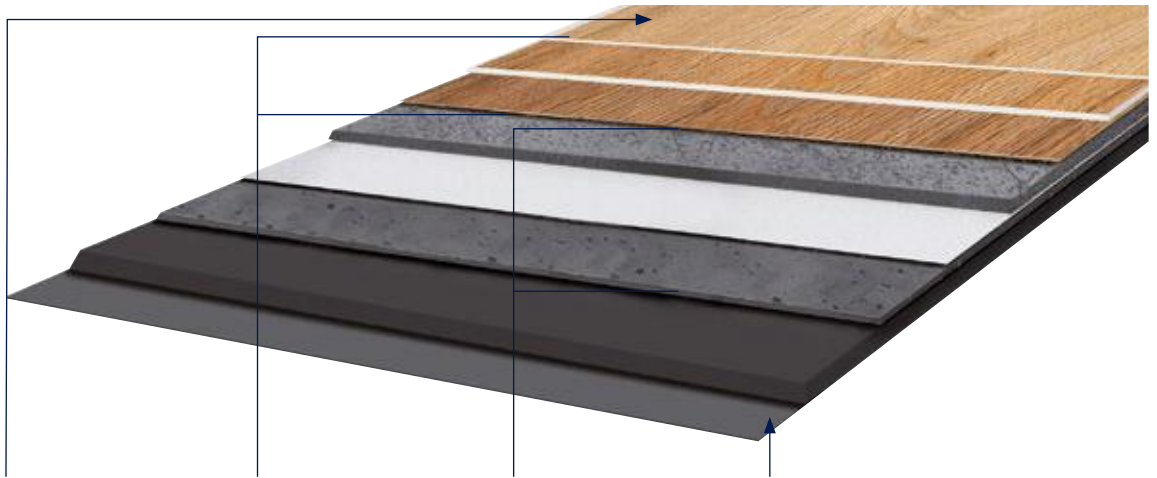

PROTECSHIELD™

ENHANCED PERFORMANCES



Micro scratch resistance



Easy maintenance

ULTRA MATT SURFACE



Natural look

4D DESIGN

CRYSTAL WEAR LAYER



Authentic Look

HIGH DEFINITION PRINTED FILM



Ultra realism

STRUCTURED EMOSS



Ultra realistic surface

BEVELLED EDGES



Tiles & Planks effect

RESILIENT CORE BOARD

RENOVATION



Over ceramic tiles
4mm/2mm

DIMENSIONAL STABILITY



Free adhesive
installation up to
30sqm

RESILIENT COMFORT CORE



Acoustic comfort



Walking comfort

REMOVABLE



suitable for raised
access Floor

WAFFLE BACKING



Perfect adherence
to the subfloor



No moisture if water
infiltration

INTEGRATED ACOUSTIC UNDERLAY

ACOUSTIC UNDERLAYER



Sound insulation 19dB



100% Reach
Phthalate free





100% Recyclable
Up to 35% recycled content



TVOC emissions below
detection level
(tvoc < 10ug/m³ after 28 days)
No formaldehyde

Formats (mm)



**Looselay
Removable**

Creation 55 Looselay Acoustic

Creation 55 Looselay Acoustic is a synthetic, decorative, flexible, antistatic, abrasion group T floorcoverings available in tiles and planks with bevelled edges. It consists in a 0.55 mm thick transparent wear layer, a design film and a Duo Core Technology, made with a rigid core back layer reinforced with a fiber veil, combined with a flexible core top layer to provide softness and comfort surface. The backing integrates an acoustic core reaching 19 dB acoustic impact noise reduction. The overall thickness is 5.5 mm.


They benefit from a cross-linked polyurethane surface treatment (**Protecshield™**), making maintenance easier and

eliminating the need for initial polishes.

Creation 55 Looselay Acoustic is a looselay floorcovering, resistant to use (commercial / industrial use) of 33-42 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.

Creation 55 Looselay Acoustic is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is REACH compliant. **The product emission rate of organic compounds is < 10 microgram/m³** (TVOC < 28 days – ISO 16000-6).

Explore the world of possibilities

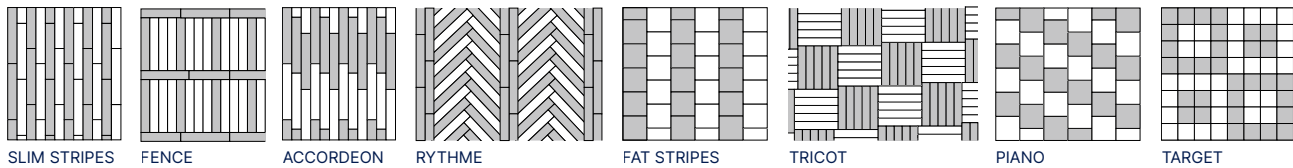

Quick & Easy to install



Installation with tackifier



Apply planks or tiles



Pressure roller



Easy to replace a plank

Please refer to Gerflor's installation guidelines.

Creation 55 Looselay Acoustic

Description

Total thickness	EN ISO 24346	mm	5.50
Thickness of wearlayer	EN ISO 24340	mm	0.55
Weight	EN ISO 23997	g/sqm	7600
Size	EN ISO 24342	mm	Planks - 229×1220 Tiles - 500×500
Number of planks / tiles and sqm per box	-	-	8-8 / 2,23-2,0

Classification

Norm / Product specification	-	-	EN ISO 11638 (EN 651)
European classification	EN ISO 10874	class	33-42
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10

Performances

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Room impact	NF S 31074	dB	70
Room sound insulation	EN ISO 717-2	dB	19
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	EN ISO 23999	%	≈ 0.05
Residual indentation	EN ISO 24343-1	mm	≤ 0.20
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN ISO 26987	-	OK

Environment / indoor air quality

TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
Certification	-	-	FloorScore®

CE marking



EN 14041



Luxury Vinyl Tile

Creation 55 HB 



Bostonian Oak Beige



Quartet 0503
DB 152 × 762 | RIGID AC 125 × 750



Quartet Fauve 0859
DB 152 × 762



Ballerina 0347
DB 152 × 762 | RIGID AC 125 × 750



Twist 0504
DB 152 × 762



Bostonian Oak Beige 0853
DB 152 × 762



DB
Creation 55
(Dry Back)

SOLID CLIC
Creation 55
Solid Clic


RIGID AC
Creation 55
Rigid Acoustic

LL
Creation 55
Looselay

LL AC
Creation 55
Looselay Acoustic



Quartet & Quartet Fauve

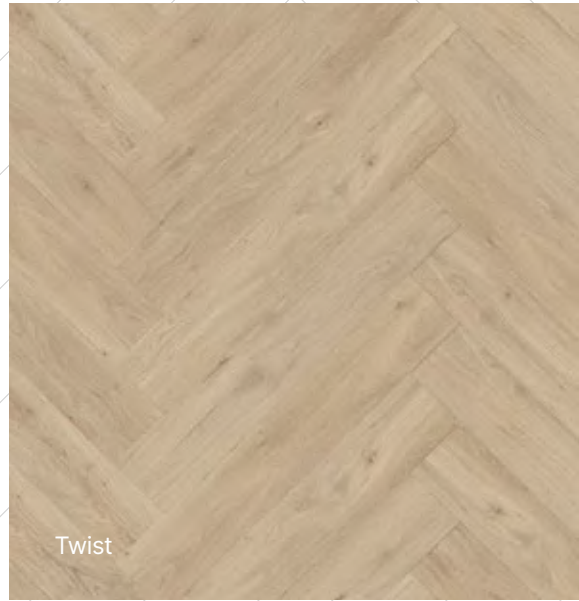

Twist



Ballerina



Quartet Fauve

Creation
LVT

Luxury Vinyl Tile

Creation 55 EIR



Emboss
in register



EIR : Emboss In Register



Charming Oak Brown 1280

DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219



White Lead Oak Dark Beige 1289

DB 184 × 1219



Charming Oak Nature 1277

DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219



White Lead Oak Blond 1288

DB 184 × 1219



Charming Oak Beige 1278

DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219



White Lead Oak Shadow Grey 1290

DB 184 × 1219



Charming Oak Grey 1279

DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219



**Emboss
in register**

DB
Creation 55
(Dry Back)

SOLID CLIC
Creation 55
Solid Clic

RIGID AC
Creation 55
Rigid Acoustic

LL
Creation 55
Looselay

LL AC
Creation 55
Looselay Acoustic



Lounge Oak Chestnut 1274
DB 230 × 1500 | **SOLID CLIC** 240 × 1461 | **RIGID AC** 225 × 1524



Lounge Oak Golden 1271
DB 230 × 1500 | **SOLID CLIC** 240 × 1461 | **RIGID AC** 225 × 1524



Lounge Oak Natural 1273
DB 230 × 1500 | **SOLID CLIC** 240 × 1461 | **RIGID AC** 225 × 1524



Lounge Oak Beige 1272
DB 230 × 1500 | **SOLID CLIC** 240 × 1461 | **RIGID AC** 225 × 1524



Creation
LVT

Charming Oak Brown

Luxury Vinyl Tile

Creation 55



Brownie 0459
DB 184 × 1219



Buffalo 0457
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Bostonian Oak 0871
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219
LL 229 × 1220



Amarante 0579
DB 184 × 1219



Michigan 0461
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219



Cedar Brown 0850
DB 230 × 1500 | **SOLID CLIC** 240 × 1461 | **RIGID AC** 225 × 1524



Quartet 0503
DB 184 × 1219 / 152 × 762 | **SOLID CLIC** 212 × 1239
RIGID AC 177 × 1219 / 125 × 750



Bostonian Oak Honey 0851
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219

DB
Creation 55
(Dry Back)

SOLID CLIC
Creation 55
Solid Clic

RIGID AC
Creation 55
Rigid Acoustic

LL
Creation 55
Looselay

LL AC
Creation 55
Looselay Acoustic



Long Board 0455

DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219
LL 229 × 1220 | **LL AC** 229 × 1220



Ballerina 0347

DB 184 × 1219 / 152 × 762 | **SOLID CLIC** 212 × 1239
RIGID AC 177 × 1219 / 125 × 750 | **LL** 229 × 1220 | **LL AC** 229 × 1220



Quartet Honey 0870

DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219
LL 229 × 1220



Honey Oak 0441

DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219
LL 229 × 1220 | **LL AC** 229 × 1220



Creation
LVT

Honey Oak / Carmel

Luxury Vinyl Tile

Creation 55



Cambridge



Rustic Oak 0445

DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219



Cambridge 0465

DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Quartet Fauve 0859

DB 184 × 1219 / 152 × 762 | **SOLID CLIC** 212 × 1239
RIGID AC 177 × 1219 | **LL** 229 × 1220



Swiss Oak Golden 0796

DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219
LL 229 × 1220 | **LL AC** 229 × 1220



DB
Creation 55
(Dry Back)

SOLID CLIC
Creation 55
Solid Clic

RIGID AC
Creation 55
Rigid Acoustic

LL
Creation 55
Looselay

LL AC
Creation 55
Looselay Acoustic



Mansfield Natural 0069
DB 184 × 1219



Bostonian Oak Beige 0853
DB 184 × 1219 / 152 × 762 | **SOLID CLIC** 212 × 1239
RIGID AC 177 × 1219 | **LL** 229 × 1220



Swiss Oak Beige 0848
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219



Malua Bay 0448
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219
LL 229 × 1220 | **LL AC** 229 × 1220



Twist 0504
DB 184 × 1219 / 152 × 762 | **SOLID CLIC** 212 × 1239
RIGID AC 177 × 1219 | **LL** 229 × 1220 | **LL AC** 229 × 1220



Cedar Pure 0849
DB 230 × 1500 | **SOLID CLIC** 240 × 1461 | **RIGID AC** 225 × 1524




Salento Light Grey 1287
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219



Salento Beige 1286
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219

Luxury Vinyl Tile

Creation 55

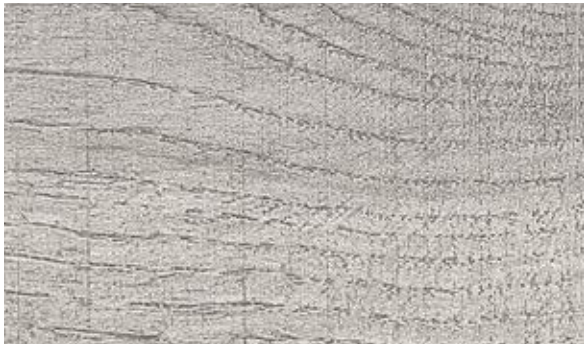

Swiss Oak Pearl 0846
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219
LL 229 × 1220 | **LL AC** 229 × 1220



Oxford 0061
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Palissandro Grey 1281
DB 230 × 1500 | **SOLID CLIC** 240 × 1461



Amador 0447
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219
LL 229 × 1220 | **LL AC** 229 × 1220



White Lime 0584
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 177 × 1219



Mansfield Light 0068
DB 184 × 1219



Arena 0060
DB 184 × 1219 | **SOLID CLIC** 212 × 1239
LL 229 × 1220 | **LL AC** 229 × 1220



Ranch 0456
DB 184 × 1219 / 230 × 1500 | **SOLID CLIC** 212 × 1239 / 240 × 1461
RIGID AC 177 × 1219 | **LL** 229 × 1220 | **LL AC** 229 × 1220

DB
Creation 55
(Dry Back)

SOLID CLIC
Creation 55
Solid Clic

RIGID AC
Creation 55
Rigid Acoustic

LL
Creation 55
Looselay

LL AC
Creation 55
Looselay Acoustic



Stripe Oak Ice 0858
DB 184 × 1219 | **SOLID CLIC** 212 × 1239




Urban
Street Beige



Urban Street Beige 1285
DB 914 × 914



Palissandro Beige 1282
DB 230 × 1500 | **SOLID CLIC** 240 × 1461

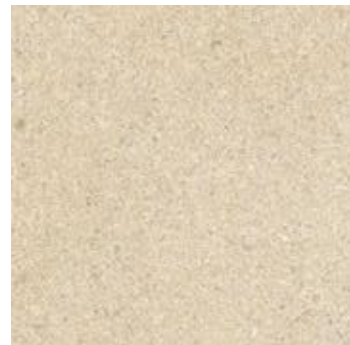

Curton Stone Light Beige 1276
DB 457 × 914 | **SOLID CLIC** 389 × 729
RIGID AC 457 × 914




Palissandro Beige



Paint Wood Taupe 0856
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Bloom Uni Taupe 0868
DB 610 × 610 | **SOLID CLIC** 389 × 729
RIGID AC 457 × 914 | **LL** 600 × 600



Fabrik Mix Jute 1268
DB 610 × 610 | **SOLID CLIC** 389 × 729




Curton Stone Light Grey 1275
DB 457 × 914 | **SOLID CLIC** 389 × 729
RIGID AC 457 × 914

Creation
LVT

Luxury Vinyl Tile

Creation 55



Fabrik Mix Indigo 1270
DB 610 × 610 | LL 600 × 600



Silver City 0373
DB 610 × 610



Parker Station 0374
DB 610 × 610 | **SOLID CLIC** 389 × 729
RIGID AC 457 × 914
LL 500 × 500 | **LL AC** 500 × 500



Ponto Cruz City 0878
LL 500 × 500




Riverside 0436
DB 610 × 610 | **SOLID CLIC** 389 × 729
RIGID AC 457 × 914 | LL 600 × 600




Fabrik Mix Dark Grey 1269
DB 610 × 610 | **SOLID CLIC** 389 × 729
LL 600 × 600



Ponto Cruz Navy 0876
LL 500 × 500



Carmel 0618
DB 457 × 914 | **SOLID CLIC** 389 × 729
RIGID AC 457 × 914 | LL 500 × 500
LL AC 500 × 500

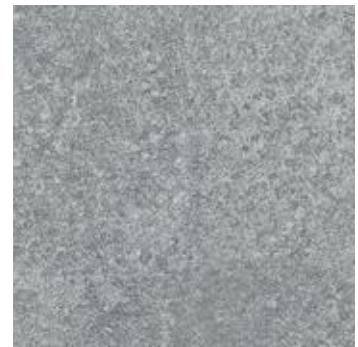

Bloom Uni Grey 0869
DB 610 × 610 | **SOLID CLIC** 389 × 729
RIGID AC 457 × 914 | LL 600 × 600



Fabrik Mix Dark Grey



Urban Street Medium 1284
DB 914 × 914 | **SOLID CLIC** 389 × 729
LL 600 × 600



Urban Street Light 1283
DB 914 × 914 | **SOLID CLIC** 389 × 729
LL 600 × 600



DB
Creation 55
(Dry Back)

SOLID CLIC
Creation 55
Solid Clic

RIGID AC
Creation 55
Rigid Acoustic

LL
Creation 55
Looselay

LL AC
Creation 55
Looselay Acoustic












Creation
LVT

Urban Street Medium / Urban Street Light

Luxury Vinyl Tile

Creation 55

	Dry Back	Solid Clic	Rigid Acoustic	Looselay	Looselay Acoustic	Skirting Matching Design	Coverstrip Matching Design	Emboss	NCS	LRV
Code Color Design										
0447 Amador	184 x 1219	212 x 1239	177 x 1219**	229 x 1220**	229 x 1220**	S004	S004	Saw Effect	5005-Y50R	25.1
0579 Amarante	184 x 1219	-	-	-	-	S005	S001	Brushed	5010-Y30R	21.3
0060 Arena	184 x 1219	212 x 1239	-	229 x 1220**	229 x 1220**	S026	S001	Saw Effect	4005-Y20R	37.2
0347 Ballerina	184 x 1219 152 x 762	212 x 1239	177 x 1219 125 x 750	229 x 1220	229 x 1220	S008	S008	Natural	4040-Y20R	28.4
0869 Bloom Uni Grey	610 x 610	389 x 729	457 x 914	600 x 600	-	S071	S071	Hammered	5005-B20G	23.2
0868 Bloom Uni Taupe	610 x 610	389 x 729	457 x 914	600 x 600	-	S072	S072	Hammered	4502-Y	28.5
0871 Bostonian Oak	184 x 1219	212 x 1239	177 x 1219	229 x 1220	-	S016	S016	Natural	5020-Y20R	26.4
0853 Bostonian Oak Beige	184 x 1219 152 x 762	212 x 1239	177 x 1219	229 x 1220	-	S017	S017	Natural	4005-Y20R	36.7
0851 Bostonian Oak Honey	184 x 1219	212 x 1239	177 x 1219	-	-	S019	S019	Natural	4020-Y20R	29.8
0459 Brownie	184 x 1219	-	-	-	-	S073	S001	Natural	6020-Y30R	10.7
0457 Buffalo	184 x 1219	212 x 1239	-	-	-	S075	S001	Brushed	6010-Y10R	16.3
0465 Cambridge	184 x 1219	212 x 1239	-	-	-	S065	S001	Natural	3030-Y20R	39.8
0618 Carmel	457 x 914	389 x 729	457 x 914	500 x 500	500 x 500	S020	S020	Hammered	6005-Y50R	19.2
0850 Cedar Brown	230 x 1500	240 x 1461	225 x 1524	-	-	S024	S024	Natural	5020-Y20R	21.3
0849 Cedar Pure	230 x 1500	240 x 1461	225 x 1524	-	-	S025	S025	Natural	3010-Y30R	39.8
1278 Charming Oak Beige	184 x 1219	212 x 1239	177 x 1219	-	-	S160	S001	EIR - Charming Oak	4010-Y50R	31.5
1280 Charming Oak Brown	184 x 1219	212 x 1239	177 x 1219	-	-	S161	S001	EIR - Charming Oak	6010-Y70R	13.4
1279 Charming Oak Grey	184 x 1219	212 x 1239	177 x 1219	-	-	S162	S001	EIR - Charming Oak	3000-N	36.2
1277 Charming Oak Nature	184 x 1219	212 x 1239	177 x 1219	-	-	S163	S001	EIR - Charming Oak	5010-Y30R	18.6
1276 Curton Stone Light Beige	457 x 914	389 x 729	457 x 914 *	-	-	S184	S184	Stone	2010-Y40R	48.9
1275 Curton Stone Light Grey	457 x 914	389 x 729	457 x 914 *	-	-	S185	S185	Stone	3005-Y20R	45.9
1269 Fabrik Mix Dark Grey	610 x 610	389 x 729	-	600 x 600	-	S165	S001	Hammered	6005-R50B	13.4
1270 Fabrik Mix Indigo	610 x 610	-	-	600 x 600	-	S166	S001	Hammered	5020-B	17.1
1268 Fabrik Mix Jute	610 x 610	389 x 729	-	-	-	S167	S001	Hammered	5005-Y50R	26.3
0441 Honey Oak	184 x 1219	212 x 1239	177 x 1219	229 x 1220	229 x 1220	S033	S033	Natural	4020-Y20R	27.7
0455 Long Board	184 x 1219	212 x 1239	177 x 1219	229 x 1220	229 x 1220	S034	S034	Brushed	4010-Y30R	24.8
1272 Lounge Oak Beige	230 x 1500	240 x 1461	225 x 1524	-	-	S168	S001	EIR - Lounge Oak	4010-Y30R	33.9
1274 Lounge Oak Chestnut	230 x 1500	240 x 1461	225 x 1524	-	-	S169	S001	EIR - Lounge Oak	5010-Y30R	20.5
1271 Lounge Oak Golden	230 x 1500	240 x 1461	225 x 1524	-	-	S170	S001	EIR - Lounge Oak	5020-Y20R	23.8
1273 Lounge Oak Natural	230 x 1500	240 x 1461	225 x 1524	-	-	S171	S001	EIR - Lounge Oak	4020-Y30R	30.2
0448 Malua Bay	184 x 1219	212 x 1239	177 x 1219	229 x 1220	229 x 1220	S035	S035	Brushed	2502-Y	47.1
0068 Mansfield Light	184 x 1219	-	-	-	-	S036	S001	Brushed	4502-Y	31.8
0069 Mansfield Natural	184 x 1219	-	-	-	-	S037	S001	Brushed	3010-Y20R	37.7
0461 Michigan	184 x 1219	212 x 1239	177 x 1219	-	-	S038	S038	Brushed	6020-Y30R	13.5
0061 Oxford	184 x 1219	212 x 1239	-	-	-	S043	S001	Brushed	5502-Y	19.2
0856 Paint Wood Taupe	184 x 1219	212 x 1239	-	-	-	S046	S001	Brushed	5502-Y	18.9
1282 Palissandro Beige	230 x 1500	240 x 1461	-	-	-	S176	S001	Stone	4010-Y50R	32.1
1281 Palissandro Grey	230 x 1500	240 x 1461	-	-	-	S177	S001	Stone	4005-R20B	38.4
0374 Parker Station	610 x 610	389 x 729	457 x 914	500 x 500	500 x 500	S047	S047	Hammered	8000-N	12.6
0878 Ponto Cruz City	-	-	-	500 x 500	-	-	-	-	5502-B	26.30
0876 Ponto Cruz Navy	-	-	-	500 x 500	-	-	-	-	3502-B	33.90
0503 Quartet	184 x 1219 152 x 762	212 x 1239	177 x 1219 125 x 750	-	-	S056	S056	Natural	5020-Y20R	19.4
0859 Quartet Fauve	184 x 1219 152 x 762	212 x 1239	177 x 1219	229 x 1220	-	S057	S057	Natural	4030-Y20R	23.9
0870 Quartet Honey	184 x 1219	212 x 1239	177 x 1219	229 x 1220	-	S058	S058	Natural	3040-Y20R	28.2
0456 Ranch	184 x 1219 230 x 1500	212 x 1239 240 x 1461	177 x 1219	229 x 1220	229 x 1220	S053	S053	Brushed	5005-Y50R	23.5
0436 Riverside	610 x 610	389 x 729	457 x 914	600 x 600	-	S032	S032	Hammered	6502-Y	16.7
0445 Rustic Oak	184 x 1219	212 x 1239	177 x 1219	-	-	S062	S062	Natural	4030-Y20R	20.4
1286 Salento Beige	184 x 1219	212 x 1239	177 x 1219	-	-	S186	S186	Natural	2010-Y40R	37.0
1287 Salento Light Grey	184 x 1219	212 x 1239	177 x 1219	-	-	S187	S187	Natural	2005-Y40R	46.6
0373 Silver City	610 x 610	-	-	-	-	S048	S001	Hammered	6502-Y	19.1
0858 Stripe Oak Ice	184 x 1219	212 x 1239	-	-	-	S009	S001	Natural	3502-Y	37.3
0848 Swiss Oak Beige	184 x 1219	212 x 1239	177 x 1219	-	-	S011	S011	Natural	3010-Y30R	40.1
0796 Swiss Oak Golden	184 x 1219	212 x 1239	177 x 1219	229 x 1220	229 x 1220	S015	S015	Natural	4030-Y20R	25.8
0846 Swiss Oak Pearl	184 x 1219	212 x 1239	177 x 1219	229 x 1220	229 x 1220	S014	S014	Natural	3502-Y	36.1
0504 Twist	184 x 1219 152 x 762	212 x 1239	177 x 1219	229 x 1220	229 x 1220	S039	S039	Natural	3010-Y30R	38.9
1285 Urban Street Beige	914 x 914	-	-	-	-	S178	S001	Hammered	4005-Y50R	31.2
1283 Urban Street Light	914 x 914	389 x 729	-	600 x 600	-	S094	S001	Hammered	3502-R	42.3
1284 Urban Street Medium	914 x 914	389 x 729	-	600 x 600	-	S180	S001	Hammered	4502-R	26.5
1288 White Lead Oak Blond	184 x 1219	-	-	-	-	S181	S001	EIR - White Lead Oak	3010-Y40R	29.6
1289 White Lead Oak Dark Beige	184 x 1219	-	-	-	-	S182	S001	EIR - White Lead Oak	5010-Y10R	25.3
1290 White Lead Oak Shadow Grey	184 x 1219	-	-	-	-	S183	S001	EIR - White Lead Oak	3502-Y	34.6
0584 White Lime	184 x 1219	212 x 1239	177 x 1219 **	-	-	S074	S074	Saw Effect	4005-Y20R	36.0

* Hammered emboss in Rigid Acoustic / ** Brushed emboss in Rigid Acoustic / Looselay / Looselay Acoustic
 Available with Creation 40

S001: White
S001: Aluminium


Packaging

Product size (mm)	m ² /box	m ² /palette
Creation 55 Trend		
184.15 × 1219.2	3.36	215.04
230 × 1500	3.11	214.59
152 × 762	3.82	213.92
457.2 × 914.4	3.76	218.08
609.6 × 609.6	3.35	187.60
Creation 55 Design		
184.15 × 1219.2	3.36	215.04
230 × 1500	3.11	214.59
914.4 × 914.4	4.18	192.28

Product size (mm)	m ² /box	m ² /palette
Creation 55 Solid Clic		
212 × 1238.8	1.84	104.8
239.6 × 1460.8	2.1	100.8
388.8 × 728.7	1.7	102
Creation 55 Rigid Acoustic		
125 × 750	1.50	84
177 × 1219	1.73	96.88
225 × 1524	1.71	92.34
457 × 914	1.67	93.52

Product size (mm)	m ² /box	m ² /palette
Creation 55 Looselay		
229 × 1220	2.23	124.88
500 × 500	2	128
600 × 600	2.16	95.04
Creation 55 Looselay Acoustic		
229 × 1220	2.23	124.88
500 × 500	2	128

Exclusive embosses for enhanced designs

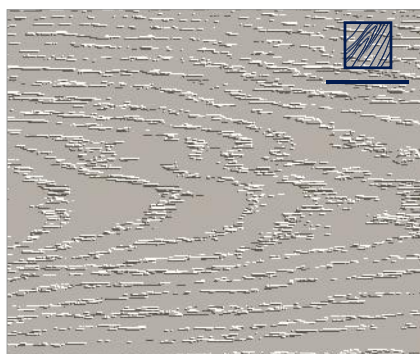

EIR - Charming Oak



Stone



Hammered




EIR - White Lead Oak



Saw effect



Natural

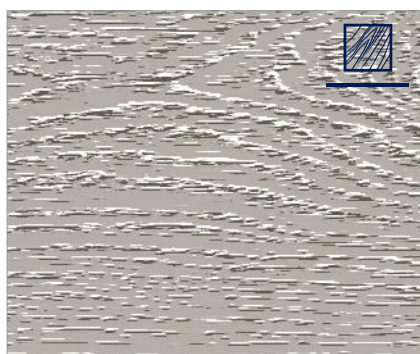

EIR - Lounge Oak





Brushed



Luxury Vinyl Tile

Creation 40

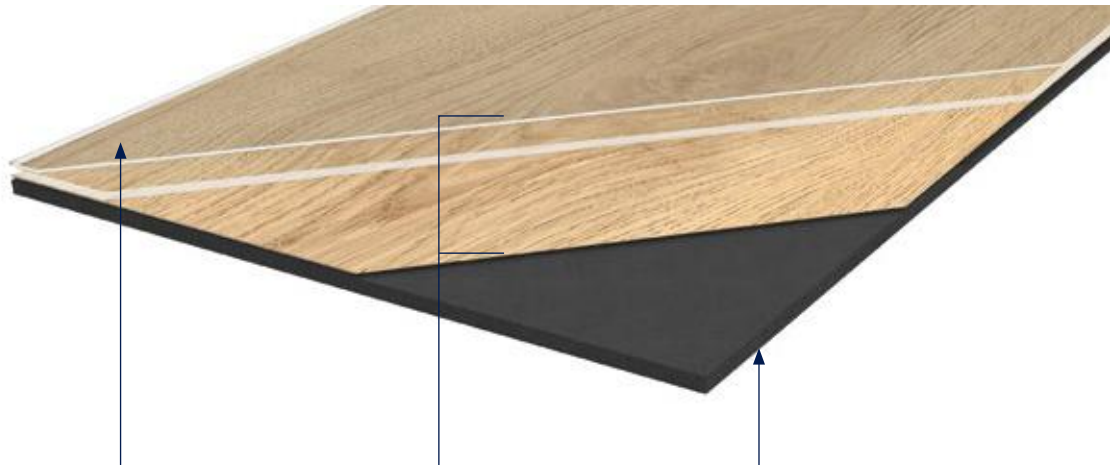

PROTECSHIELD™

ENHANCED PERFORMANCES



Micro scratch resistance



Easy maintenance

ULTRA MATT SURFACE



Natural look

4D DESIGN

CRYSTAL WEAR LAYER



Authentic Look

HIGH DEFINITION PRINTED FILM



Ultra realism

STRUCTURED EMBOSS



Ultra realistic surface

BEVELLED EDGES



Tiles & Planks effect

RESILIENT COMFORT CORE



Acoustic comfort



Walking comfort



Easy installation



Easy cutting

LVT decoratives strips

Format (mm) 4×914mm



Code: 3203 + Color code



100% Reach
Phthalate free



100% Recyclable
Up to 35% recycled content



TVOC emissions below
detection level
(TVOC < 10µg/m³ after 28 days)
No formaldehyde

Formats (mm)



Protecshield™



Glue down

Creation 40

Creation 40 Trend is a synthetic, decorative, flexible, antistatic abrasion group T floorcoverings available in tile or plank, with bevelled edges. It consists in a 0,4 mm thick transparent wear layer, a design film and a Resilient Comfort Core to provide softness and comfort surface. The overall thickness is 2 mm. They benefit from a cross-linked polyurethane surface treatment (**Protecshield™**), making maintenance easier and prevent from micro scratches.

Creation 40 Trend is a glued floorcovering, resistant to use (residential / commercial use) of 23 / 32 according to EN-ISO 10874 and has Bfl -s1 class for smoke emission according to EN 13501-1.

Creation 40 Trend is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is 100% compliant with REACH. **The product emission rate of organic compounds is < 10 microgram/m³** (TVOC < 28 days – ISO 16000-6).

Can be combined with pre-adhesive underlayer

Gerflor Smart Fix 16 dB



Code: 1698 - Format: 1m x 7.5ml

Please refer to Gerflor's installation guidelines.

Creation 40

Creation 40 Trend

Description			
Total thickness	EN ISO 24346	mm	2
Thickness of wearlayer	EN ISO 24340	mm	0.40
Weight	EN ISO 23997	g/sqm	3 180
Size	EN ISO 24342	mm	Planks - 184,15×1219,2 / 230×1500 Tiles - 457,2×914,4 / 609,6×609,6
Number of planks / tiles and sqm per box	-	-	21-13-11-13 / 4,71-4,49-4,6-4,83
Classification			
Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	23 - 32 - 41
Fire rating	EN 13501-1	class	B _{fl} -s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10
Performances			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	77
Impact sound insulation	EN ISO 717-2	dB	4
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.25
Dimensional stability (average measured value)	-	%	≤ 0.10
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN ISO 26987	-	OK
Environment / indoor air quality			
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
Certification	-	-	Floorscore®
CE marking			




EN 14041



Luxury Vinyl Tile

Creation 40 Solid Clic



PROTECSHIELD™

ENHANCED PERFORMANCES



Micro scratch resistance



Easy maintenance

ULTRA MATT SURFACE



Natural look

4D DESIGN

CRYSTAL WEAR LAYER



Authentic Look

HIGH DEFINITION PRINTED FILM



Ultra realism

STRUCTURED EMOSS



Ultra realistic surface

BEVELLED EDGES



Tiles & Planks effect

DUOCORE 2.0 TECHNOLOGY

RESILIENT COMFORT CORE



Acoustic comfort



Walking comfort

NEW RIGID CORE



Renovation over ceramic tiles 6mm/2mm



Resistance against high temperature variation

EXCLUSIVE INTERLOCKING SYSTEM

ANGULAR ON LONG SIDE



Quiet installation

VERTICAL ON SHORT SIDE



Traffic resistance Durability



Fast & easy to install



Waterproof Joints



100% Reach Phthalate free



100% Recyclable Up to 55% recycled content



TVOC emissions below detection level (TVOC < 10µg/m³ after 28 days) No formaldehyde

Formats (mm)



Protecshield™



Creation 40 Solid Clic

Creation 40 Solid Clic is a decorative, flexible, abrasion group T floorcoverings available in tiles and planks, with bevelled edges. It consists in a 0,45 mm thick transparent wear layer, a design film of 2 m width printed in high definition to have more variety in the design and the technology "Duo Core 2.0": combination of a rigid core back layer for easy renovation and a flexible core top layer to provide softness and comfort surface, the whole with a double reinforcement for enhanced durability. The overall thickness is 4,5 mm.

They benefit from a cross-linked polyurethane surface treatment (**Protecshield™**), making maintenance easier and avoiding microscratches.

Creation 40 Solid Clic is an interlocking floorcovering assembled with a vertical system on the short side and a horizontal system on long side for a quick and solid installation. It has a European class (residential / commercial / industrial use) 23/32/41 according to EN-ISO 10874 and has

Bfl -s1 class for smoke emission according to EN 13501-1.

Creation 40 Solid Clic is made with phthalate free plasticizers (except recycled content). It is 100% recyclable and made with a recycled content up to 55%. It is 100% compliant with REACH. **The product emission rate of organic compounds is < 10 microgram/m³** (TVOC < 28 days – ISO 16000-6).

To be combined with Gerflor acoustic underlayers

Gerflor Acoustic 15 dB



Code: 1798 - Format: 1m x 15ml

Please refer to Gerflor's installation guidelines.

Gerflor Acoustic Plus 19 dB



Code: 0704 - Format: 0.98m x 15.3ml

Gerflor Silence Plus 19 dB



Code: 5949 - Format: 1.18m x 8.5ml

Creation 40 Solid Clic

Description

Total thickness	EN ISO 24346	mm	4.50
Thickness of wearlayer	EN ISO 24340	mm	0.45
Weight	EN ISO 23997	g/sqm	7118
Size	EN ISO 24342	mm	Planks - 212×1238,8 / 239,6×1460,8 Tiles - 388,8×728,7
Number of planks / tiles and sqm per box	EN ISO 24342	mm	8-7-7/ 2,10-2,45-1,98

Classification

Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	23 - 32 -41
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10

Performances

Wear resistance	EN 660.2	mm ³	< 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	79
Impact sound insulation	EN ISO 717-2	dB	4
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≤ 0.05
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN 423	-	OK

Environment / indoor air quality

TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
Certification	-	-	Floorscore®

CE marking




EN 14041



Luxury Vinyl Tile

Creation 40 Rigid Acoustic

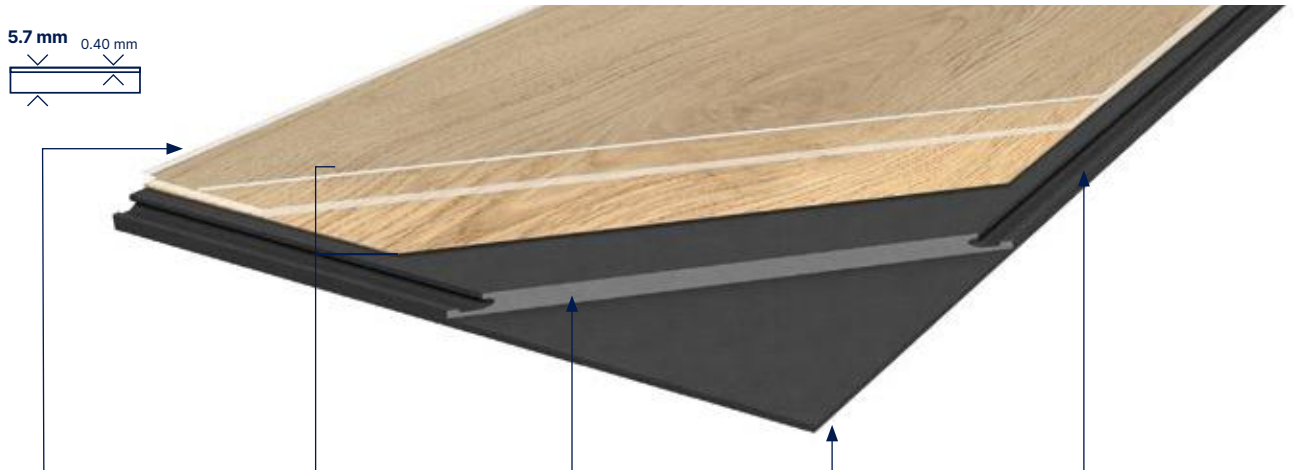

PROTECSHIELD™

ENHANCED PERFORMANCES



Micro scratch resistance



Easy maintenance

ULTRA MATT SURFACE



Natural look

4D DESIGN

CRYSTAL WEAR LAYER



Authentic Look

HIGH DEFINITION PRINTED FILM



Ultra realism

STRUCTURED EMBOSS



Ultra realistic surface

BEVELLED EDGES



Tiles & Planks effect

RCB-TECHNOLOGY PATENTED



Renovation over ceramic tiles 8mm/3mm

EASY INSTALLATION



Easy to handle (7kg/m²) and easy to install (30 % lighter than standard rigid planks)



Resistance against high temperature variation

INTEGRATED ACOUSTIC UNDERLAY

ACOUSTIC UNDERLAYER



Sound insulation 19dB



Absorbs default of the subfloor (up to 1mm unevenness)

INTERLOCKING SYSTEM

ANGLE TO ANGLE LOCKING SYSTEM



Standard laminate installation



100% Reach Phthalate free



100% Recyclable
Up to 35% recycled content



TVOC emissions below detection level
(TVOC < 10µg/m³ after 28 days)
No formaldehyde

Creation 40 Rigid Acoustic

Creation 40 Rigid Acoustic is a decorative flooring, rigid interlocking with acoustic layer, antistatic, abrasion group T floorcoverings available in tiles and planks, with bevelled edges. It is made with:

- a 0,40 mm thick transparent wear layer to provide durability
- a high definition printing film to provide high quality design & esthetism
- a Rigid Composite Board Technology, new generation of rigid board with patented production process which provides a 30% less heavier product than comparable products on the market
- an integrated underlayer 100% recyclable and which provides a 19 dB sound reduction.

The total thickness of the product is 5,7 mm. It also

uses a cross-linked polyurethane surface treatment (**Protecshield™**), making maintenance easier, durability longer, protecting from micro scratches, and providing an ultra-mat effect for more realistic look.

Creation 40 Rigid Acoustic is an interlocking floorcovering assembled with an angle/angle locking system to provide robust and easy installation. It has an European class (residential/commercial) of 23/32 according to EN-ISO 10874 and has Bfl -s1 class for smoke emission according to EN 13501-1.

Creation 40 Rigid Acoustic is made with phthalate free plasticizers. It is 100% recyclable and made with up to 35% of recycled content. It is 100% compliant with REACH.

The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).



Salento Beige

Creation 40 Rigid Acoustic

Description

Total thickness	EN ISO 24346	mm	5.70
Thickness of wearlayer	EN ISO 24340	mm	0.40
Weight	EN ISO 23997	g/sqm	7000
Size	EN ISO 24342	mm	Planks - 229×1250 / 229×1492 Tiles - 399×730
Number of planks / tiles and sqm per box	EN ISO 24342	mm	7-7-7/ 2-2,39-2,04

Classification

Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	23 - 32 - 41
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10

Performances

Wear resistance	EN 660.2	mm ³	< 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	80
Impact sound insulation	EN ISO 717-2	dB	19
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≤ 0.10
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN 423	-	OK

Environment / indoor air quality

TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
--------------------	-------------	--------------------------	------

CE marking



EN 14041



Luxury Vinyl Tile

Creation 40



Michigan 0461
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Quartet 0503
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Bostonian Oak 0871
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Cedar Brown 0850
DB 230 × 1500 | **SOLID CLIC** 240 × 1461 | **RIGID AC** 229 × 1492



Rustic Oak 0445
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Honey Oak 0441
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Quartet Honey 0870
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Quartet Fauve 0859
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250

DB
Creation 40 (Dry Back)

SOLID CLIC
Creation 40 Solid Clic

RIGID AC
Creation 40 Rigid Acoustic



Bostonian Oak Honey 0851
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250

Long Board 0455
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Ballerina 0347
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250

Swiss Oak Golden 0796
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250

Creation
LVT



Bostonian Oak Honey

Luxury Vinyl Tile

Creation 40



Twist 0504
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Swiss Oak Beige 0848
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Salento Beige 1286
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250




Cedar Pure 0849
DB 230 × 1500 | **SOLID CLIC** 240 × 1461 | **RIGID AC** 229 × 1492



Malua Bay 0448
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Salento Light Grey 1287
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250

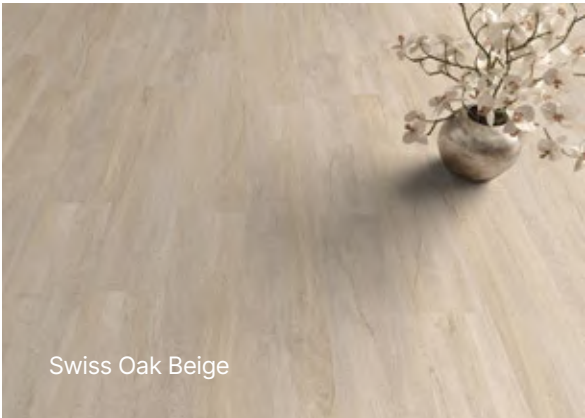

Swiss Oak Beige



Bostonian Oak Beige 0853
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250

DB
Creation 40 (Dry Back)

SOLID CLIC
Creation 40 Solid Clic

RIGID AC
Creation 40 Rigid Acoustic



Ranch 0456
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250

Amador 0447
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



White Lime 0584
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250

Swiss Oak Pearl 0846
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250

Creation
LVT



Curton Stone Light Beige

Luxury Vinyl Tile


Creation 40



Parker Station 0374
DB 610 × 610 | **SOLID CLIC** 389 × 729
RIGID AC 399 × 730



Riverside 0436
DB 610 × 610 | **SOLID CLIC** 389 × 729
RIGID AC 399 × 730



Carmel 0618
DB 457 × 914 | **SOLID CLIC** 389 × 729
RIGID AC 399 × 730




Bloom Uni Taupe 0868
DB 610 × 610 | **SOLID CLIC** 389 × 729
RIGID AC 399 × 730



Curton Stone Light Beige 1276
DB 457 × 914 | **SOLID CLIC** 389 × 729
RIGID AC 399 × 730



Curton Stone Light Grey 1275
DB 457 × 914 | **SOLID CLIC** 389 × 729
RIGID AC 399 × 730



Bloom Uni Grey 0869
DB 610 × 610 | **SOLID CLIC** 389 × 729
RIGID AC 399 × 730



DB
Creation 40 (Dry Back)

SOLID CLIC
Creation 40 Solid Clic







RIGID AC
Creation 40 Rigid Acoustic



Creation
LVT

Luxury Vinyl Tile

Creation 40

Code	Color Design	Dry Back	Solid Clic	Rigid Acoustic	Skirting Matching Design	Coverstrip Matching Design	Emboss	NCS	LRV
									
0447	Amador	184 × 1219	212 × 1239	229 × 1250	S004	S004	Saw Effect *	5005-Y50R	25.1
0347	Ballerina	184 × 1219	212 × 1239	229 × 1250	S008	S008	Natural	4040-Y20R	28.4
0869	Bloom Uni Grey	610 × 610	389 × 729	399 × 730	S071	S071	Hammered	5005-B20G	23.2
0868	Bloom Uni Taupe	610 × 610	389 × 729	399 × 730	S072	S072	Hammered	4502-Y	28.5
0871	Bostonian Oak	184 × 1219	212 × 1239	229 × 1250	S016	S016	Natural	5020-Y20R	26.4
0853	Bostonian Oak Beige	184 × 1219	212 × 1239	229 × 1250	S017	S017	Natural	4005-Y20R	36.7
0851	Bostonian Oak Honey	184 × 1219	212 × 1239	229 × 1250	S019	S019	Natural	4020-Y20R	29.8
0618	Carmel	457 × 914	389 × 729	399 × 730	S020	S020	Hammered	6005-Y50R	19.2
0850	Cedar Brown	230 × 1500	240 × 1461	229 × 1492	S024	S024	Natural	5020-Y20R	21.3
0849	Cedar Pure	230 × 1500	240 × 1461	229 × 1492	S025	S025	Natural	3010-Y30R	39.8
1276	Curton Stone Light Beige	457 × 914	389 × 729	399 × 730	S184	S184	Stone **	2010-Y40R	48.9
1275	Curton Stone Light Grey	457 × 914	389 × 729	399 × 730	S185	S185	Stone **	3005-Y20R	45.9
0441	Honey Oak	184 × 1219	212 × 1239	229 × 1250	S033	S033	Natural	4020-Y20R	27.7
0455	Long Board	184 × 1219	212 × 1239	229 × 1250	S034	S034	Brushed	4010-Y30R	24.8
0448	Malua Bay	184 × 1219	212 × 1239	229 × 1250	S035	S035	Brushed	2502-Y	47.1
0461	Michigan	184 × 1219	212 × 1239	229 × 1250	S038	S038	Brushed	6020-Y30R	13.5
0374	Parker Station	610 × 610	389 × 729	399 × 730	S047	S047	Hammered	8000-N	12.6
0503	Quartet	184 × 1219	212 × 1239	229 × 1250	S056	S056	Natural	5020-Y20R	19.4
0859	Quartet Fauve	184 × 1219	212 × 1239	229 × 1250	S057	S057	Natural	4030-Y20R	23.9
0870	Quartet Honey	184 × 1219	212 × 1239	229 × 1250	S058	S058	Natural	3040-Y20R	28.2
0456	Ranch	184 × 1219	212 × 1239	229 × 1250	S053	S053	Brushed	5005-Y50R	23.5
0436	Riverside	610 × 610	389 × 729	399 × 730	S032	S032	Hammered	6502-Y	16.7
0445	Rustic Oak	184 × 1219	212 × 1239	229 × 1250	S062	S062	Natural	4030-Y20R	20.4
1286	Salento Beige	184 × 1219	212 × 1239	229 × 1250	S186	S186	Natural	2010-Y40R	37.0
1287	Salento Light Grey	184 × 1219	212 × 1239	229 × 1250	S187	S187	Natural	2005-Y40R	46.6
0848	Swiss Oak Beige	184 × 1219	212 × 1239	229 × 1250	S011	S011	Natural	3010-Y30R	40.1
0796	Swiss Oak Golden	184 × 1219	212 × 1239	229 × 1250	S015	S015	Natural	4030-Y20R	25.8
0846	Swiss Oak Pearl	184 × 1219	212 × 1239	229 × 1250	S014	S014	Natural	3502-Y	36.1
0504	Twist	184 × 1219	212 × 1239	229 × 1250	S039	S039	Natural	3010-Y30R	38.9
0584	White Lime	184 × 1219	212 × 1239	229 × 1250	S074	S074	Saw Effect *	4005-Y20R	36.0

* Brushed emboss in Rigid Acoustic

** Hammered emboss in Rigid Acoustic

Packaging

Product size (mm)	m ² /box	m ² /pallet
Creation 40 Trend		
457.2×914.4	4.60	230
609.6×609.6	4.83	202.86
184.15×1219.2	4.71	263.76
230×1500	4.49	255.93

Product size (mm)	m ² /box	m ² /pallet
Creation 40 Solid Clic		
212×1238.8	2.10	113.50
239.6×1460.8	2.45	117.60
388.8×728.7	1.98	107.10

Product size (mm)	m ² /box	m ² /pallet
Creation 40 Rigid Acoustic		
229×1250	2	96.4
229×1492	2.39	114.8
399×730	2.04	114.2

Exclusive embosses



Stone



Saw effect



Brushed




Hammered



Natural

Luxury Vinyl Tile

Creation 30

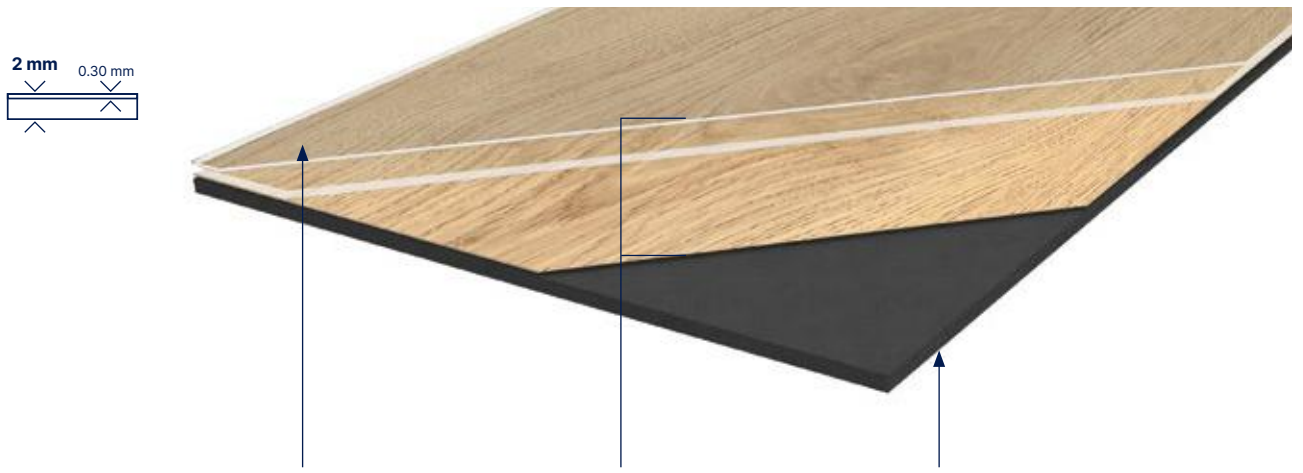

PROTECSHIELD™

ENHANCED PERFORMANCES


Micro scratch resistance


Easy maintenance

ULTRA MATT SURFACE


Natural look

4D DESIGN

CRYSTAL WEAR LAYER


Authentic Look

HIGH DEFINITION PRINTED FILM


Ultra realism

STRUCTURED EMBOSS


Ultra realistic surface

BEVELLED EDGES


Tiles & Planks effect

RESILIENT COMFORT CORE


Acoustic comfort


Walking comfort


Easy installation


Easy cutting

LVT decoratives strips

Format (mm) 4×914mm



Code: 3203 + Color code



100% Reach
Phthalate free




100% Recyclable
Up to 35% recycled content



TVOC emissions below
detection level
(TVOC < 10µg/m³ after 28 days)
No formaldehyde

Formats (mm)



Glue down

Creation 30

Creation 30 Design is a synthetic, decorative, flexible, antistatic abrasion group T floorcoverings available in tile or plank, with bevelled edges. It consists in a 0,3 mm thick transparent wear layer, a design film and a Resilient Comfort Core to provide softness and comfort surface. The overall thickness is 2 mm.

They benefit from a cross-linked polyurethane surface treatment (**Protecshield™**), making maintenance easier and prevent from micro scratches.

Creation 30 Design is a glued floorcovering, resistant to

use (residential / commercial use) of 23 / 31 according to EN-ISO 10874 and has Bfl -s1 class for smoke emission according to EN 13501-1.

Creation 30 Design is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is 100% compliant with REACH.

The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).

Can be combined with pre-adhesive underlayer

Gerflor Smart Fix 16 dB



Code: 1698 - Format: 1m x 7.5ml

Creation 30

Creation 30 Design

Description

Total thickness	EN ISO 24346	mm	2
Thickness of wearlayer	EN ISO 24340	mm	0.30
Weight	EN ISO 23997	g/sqm	3 460
Size	EN ISO 24342	mm	Planks - 184 × 1219 / 230×1500 Tiles - 457×914 / 610×610
Number of planks / tiles and sqm per box	-	-	15-11-9-9 / 3.36-3.80-3.76-3.35

Classification

Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	23 - 31
Fire rating	EN 13501-1	class	B _{fl} -s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 - Appendix B (DIN 51 130)	class	R10

Performances

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	77
Impact sound insulation	EN ISO 717-2	dB	4
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.25
Dimensional stability (average measured value)	-	%	≤ 0.10
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN ISO 26987	-	OK

Environment / indoor air quality

TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
Certification	-	-	Floorscore®

CE marking




EN 14041



Luxury Vinyl Tile

Creation 30 Solid Clic



PROTECSHIELD™

ENHANCED PERFORMANCES



ULTRA MATT SURFACE



4D DESIGN

CRYSTAL WEAR LAYER



HIGH DEFINITION PRINTED FILM



STRUCTURED EMBOSS



BEVELLED EDGES



DUOCORE 2.0 TECHNOLOGY

RESILIENT COMFORT CORE



NEW RIGID CORE



CUTTING



EXCLUSIVE INTERLOCKING SYSTEM

ANGULAR ON LONG SIDE



VERTICAL ON SHORT SIDE



100% Reach
Phthalate free




100% Recyclable
Up to 55% recycled content



TVOC emissions below
detection level
(TVOC < 10µg/m³ after 28 days)
No formaldehyde

Formats (mm)



Protecshield™



Creation 30 Solid Clic

Creation 30 Solid Clic is a decorative, flexible, abrasion group T floorcoverings available in tiles and planks, with bevelled edges. It consists in a 0,3 mm thick transparent wear layer, a design film of 2 m width printed in high definition to have more variety in the design and the technology "Duo Core 2.0": combination of a rigid core back layer for easy renovation and a flexible core top layer to provide softness and comfort surface, the whole with a double reinforcement for enhanced durability. The overall thickness is 4,5 mm.

They benefit from a cross-linked polyurethane surface treatment (**Protecshield™**), making maintenance easier and avoiding microscratches.

Creation 30 Solid Clic is an interlocking floorcovering assembled with a vertical system on the short side and a horizontal system on long side for a quick and solid installation. It has a European class (residential / commercial use) 23/31 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.

Creation 30 Solid Clic is made with phthalate free plasticizers (except recycled content). It is 100% recyclable and made with a recycled content up to 55%. It is 100% compliant with REACH. **The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).**

To be combined with Gerflor acoustic underlayers

Gerflor Acoustic 15 dB



Code: 1798 - Format: 1m x 15ml

Please refer to Gerflor's installation guidelines.

Gerflor Acoustic Plus 19 dB



Code: 0704 - Format: 0.98m x 15.3ml

Gerflor Silence Plus 19 dB



Code: 5949 - Format: 1.18m x 8.5ml

Creation LVT

Creation 30 Solid Clic

Description

Total thickness	EN ISO 24346	mm	4.50
Thickness of wearlayer	EN ISO 24340	mm	0.30
Weight	EN ISO 23997	g/sqm	7118
Size	EN ISO 24342	mm	Planks - 212x1238,8 / 240 x 1461 Tiles - 389 x 729
Number of planks / tiles and sqm per box	EN ISO 24342	mm	8-7-7/ 2,10-2,45-1,98

Classification

Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	23 - 31
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10

Performances

Wear resistance	EN 660.2	mm ³	< 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	79
Impact sound insulation	EN ISO 717-2	dB	4
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≈ 0.05
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN 423	-	OK

Environment / indoor air quality

TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
Certification	-	-	Floorscore®

CE Marking



EN 14041



Luxury Vinyl Tile

Creation 30



Brownie 0459
DB 184 × 1219



Bostonian Oak 0871
DB 184 × 1219 | SOLID CLIC 212 × 1239



Oak Fantasy Brown 1294
DB 184 × 1219 | SOLID CLIC 212 × 1239



Oak Fantasy Grey 1295
DB 184 × 1219 | SOLID CLIC 212 × 1239



Michigan 0461
DB 184 × 1219 | SOLID CLIC 212 × 1239



Amarante 0579
DB 184 × 1219



Quartet 0503
DB 184 × 1219 | SOLID CLIC 212 × 1239



Buffalo 0457
DB 184 × 1219

DB
Creation 30 (Dry Back)

SOLID CLIC
Creation 30 Solid Clic



Cedar Brown 0851
DB 230 × 1500 | **SOLID CLIC** 240 × 1461



Oak Fantasy Honey 1296
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Bostonian Oak Honey 0851
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Quartet Honey 0870
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Ballerina 0347
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Quartet Fauve 0859
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



White Lead Oak Dark Beige 1289
DB 184 × 1219



Swiss Oak Golden 0796
DB 184 × 1219 | **SOLID CLIC** 212 × 1239

Luxury Vinyl Tile

Creation 30



Honey Oak 0441
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Cedar Pure 0849
DB 184 × 1219 | **SOLID CLIC** 240 × 1239



Rustic Oak 0445
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Cambridge 0465
DB 184 × 1219



Long Board 0455
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



White Lead Oak Blond 1288
DB 184 × 1219



Braukerne Natural 1292
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Braukerne Beige 1293
DB 184 × 1219 | **SOLID CLIC** 212 × 1239

DB
Creation 30 (Dry Back)

SOLID CLIC
Creation 30 Solid Clic



Twist 0504
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Northwood Mokaccino 0817
DB 184 × 1219



Salento Light Grey 1287
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Salento Beige 1286
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Creation
LVT

Luxury Vinyl Tile

Creation 30



Chevron Hurricane 0809
DB 184 × 1219



Oxford 0061
DB 184 × 1219



Bostonian Oak Grey 0855
DB 184 × 1219



Amador 0447
DB 184 × 1219 | SOLID CLIC 212 × 1239



Ranch 0456
DB 184 × 1219 / 230×1500 | SOLID CLIC 212 × 1239



Paint Wood Taupe 0856
DB 184 × 1219



White Lead Oak Shadow Grey 1290
DB 184 × 1219



Swiss Oak Cashmere 0795
DB 184 × 1219



DB
Creation 30 (Dry Back)

SOLID CLIC
Creation 30 Solid Clic



Swiss Oak Beige 0848
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Malua Bay 0448
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Arena 0060
DB 184 × 1219



Bostonian Oak Beige 0853
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Swiss Oak Pearl 0846
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



White Lime 0584
DB 184 × 1219 | **SOLID CLIC** 212 × 1239



Stripe Oak Ice 0858
DB 184 × 1219



Northwood Macchiato 0816
DB 184 × 1219

Luxury Vinyl Tile

Creation 30




Durango Taupe 0751
DB 610 × 610



Curton Stone Light Grey 1275
DB 457 × 914
SOLID CLIC 389 × 729



Durango Moka 0750
DB 610 × 610



Curton Stone Light Beige 1276
DB 457 × 914
SOLID CLIC 389 × 729



Bloom Uni Taupe 0868
DB 610 × 610
SOLID CLIC 389 × 729



Reggia Ivory 0861
DB 457 × 914



Back Street 0748
DB 457 × 914



Urban Street Beige 1285
DB 610 × 610




Curton Stone Light Beige

DB
Creation 30 (Dry Back)

SOLID CLIC
Creation 30 Solid Clic



Oppland Stone



Oppland Stone 1291
DB 457 × 914



Parker Station 0374
DB 610 × 610
SOLID CLIC 389 × 729



Riverside 0436
DB 610 × 610
SOLID CLIC 389 × 729



Silver City 0373
DB 610 × 610



Urban Street Medium 1284
DB 610 × 610



Carmel 0618
DB 457 × 914
SOLID CLIC 389 × 729



Bloom Uni Grey 0869
DB 610 × 610
SOLID CLIC 389 × 729









Urban Street Light 1283
DB 610 × 610

Creation
LVT

Luxury Vinyl Tile

Creation 30

Code	Color Design	Dry Back	Solid Clic	Skirting Matching design	Coverstrip Matching design	Emboss	NCS	LRV
								
0447	Amador	184 x 1219	212 x 1239	S004	S004	Saw Effect	5005-Y50R	25.1
0579	Amarante	184 x 1219	-	S005	S001	Brushed	5010-Y30R	21.3
0060	Arena	184 x 1219	-	S026	S001	Saw Effect	4005-Y20R	37.2
0748	Back Street	457 x 914	-	S095	S001	Hammered	4502-Y	27.9
0347	Ballerina	184 x 1219	212 x 1239	S008	S008	Natural	4040-Y20R	28.4
0869	Bloom Uni Grey	610 x 610	389 x 729	S071	S071	Hammered	5005-B20G	23.2
0868	Bloom Uni Taupe	610 x 610	389 x 729	S072	S072	Hammered	4502-Y	28.5
0871	Bostonian Oak	184 x 1219	212 x 1239	S016	S016	Natural	5020-Y20R	26.4
0853	Bostonian Oak Beige	184 x 1219	212 x 1239	S017	S017	Natural	4005-Y20R	36.7
0855	Bostonian Oak Grey	184 x 1219	-	S018	S001	Natural	6005-Y20R	24.0
0851	Bostonian Oak Honey	184 x 1219	212 x 1239	S019	S019	Natural	4020-Y20R	29.8
1293	Braukerne Beige	184 x 1219	212 x 1239	S158	S001	Brushed	3010-Y40R	35.8
1292	Braukerne Natural	184 x 1219	212 x 1239	S159	S001	Brushed	3020-Y60R	29.3
0459	Brownie	184 x 1219	-	S073	S001	Natural	6020-Y30R	10.7
0457	Buffalo	184 x 1219	-	S075	S001	Brushed	6010-Y10R	16.3
0465	Cambridge	184 x 1219	-	S065	S001	Natural	3030-Y20R	39.8
0618	Carmel	457 x 914	389 x 729	S020	S020	Hammered	6005-Y50R	19.2
0850	Cedar Brown	230 x 1500	240 x 1461	S024	S024	Natural	5020-Y20R	21.3
0849	Cedar Pure	230 x 1500	240 x 1461	S025	S025	Natural	3010-Y30R	39.8
0809	Chevron Hurricane	184 x 1219	-	S030	S001	Natural	6502-Y	13.8
1276	Curton Stone Light Beige	457 x 914	389 x 729	S184	S184	Stone	2010-Y40R	48.9
1275	Curton Stone Light Grey	457 x 914	389 x 729	S185	S185	Stone	3005-Y20R	45.9
0750	Durango Moka	610 x 610	-	S164	S001	Hammered	6005-Y50R	20.5
0751	Durango Taupe	610 x 610	-	S093	S001	Hammered	3005-Y20R	37.7
0441	Honey Oak	184 x 1219	212 x 1239	S033	S033	Natural	4020-Y20R	27.7
0455	Long Board	184 x 1219	212 x 1239	S034	S034	Brushed	4010-Y30R	24.8
0448	Malua Bay	184 x 1219	212 x 1239	S035	S035	Brushed	2502-Y	47.1
0461	Michigan	184 x 1219	212 x 1239	S038	S038	Brushed	6020-Y30R	13.5
0816	Northwood Macchiato	184 x 1219	-	S040	S001	Brushed	1502-Y50R	67.8
0817	Northwood Mokaccino	184 x 1219	-	S041	S001	Brushed	3010-Y30R	39.3
1294	Oak Fantasy Brown	184 x 1219	212 x 1239	S172	S001	Brushed	7010-Y90R	8.7
1295	Oak Fantasy Grey	184 x 1219	212 x 1239	S173	S001	Brushed	6010-Y70R	11.4
1296	Oak Fantasy Honey	184 x 1219	212 x 1239	S174	S001	Brushed	5020-Y50R	19.5
1291	Oppland Stone	457 x 914	-	S175	S001	Hammered	7500-N	7.7
0061	Oxford	184 x 1219	-	S043	S001	Brushed	5502-Y	19.2
0856	Paint Wood Taupe	184 x 1219	-	S046	S001	Brushed	5502-Y	18.9
0374	Parker Station	610 x 610	389 x 729	S047	S047	Hammered	8000-N	12.6
0503	Quartet	184 x 1219	212 x 1239	S056	S056	Natural	5020-Y20R	19.4
0859	Quartet Fauve	184 x 1219	212 x 1239	S057	S057	Natural	4030-Y20R	23.9
0870	Quartet Honey	184 x 1219	212 x 1239	S058	S058	Natural	3040-Y20R	28.2
0456	Ranch	184 x 1219	212 x 1239	S053	S053	Brushed	5005-Y50R	23.5
0861	Reggia Ivory	230 x 1500	-	S054	S001	Stone	3010-Y20R	46.1
0436	Riverside	457 x 914	389 x 729	S032	S032	Hammered	6502-Y	16.7
0445	Rustic Oak	610 x 610	212 x 1239	S062	S062	Natural	4030-Y20R	20.4
1286	Salento Beige	184 x 1219	212 x 1239	S186	S186	Natural	2010-Y40R	37.0
1287	Salento Light Grey	184 x 1219	212 x 1239	S187	S187	Natural	2005-Y40R	46.6
0373	Silver City	184 x 1219	-	S048	S001	Hammered	6502-Y	19.1
0858	Stripe Oak Ice	610 x 610	-	S009	S001	Natural	3502-Y	37.3
0848	Swiss Oak Beige	184 x 1219	212 x 1239	S011	S011	Natural	3010-Y30R	40.1
0795	Swiss Oak Cashmere	184 x 1219	-	S012	S001	Natural	4010-Y30R	33.3
0796	Swiss Oak Golden	184 x 1219	212 x 1239	S015	S015	Natural	4030-Y20R	25.8
0846	Swiss Oak Pearl	184 x 1219	212 x 1239	S014	S014	Natural	3502-Y	36.1
0504	Twist	184 x 1219	212 x 1239	S039	S039	Natural	3010-Y30R	38.9
1285	Urban Street Beige	184 x 1219	-	S178	S001	Hammered	4005-Y50R	31.2
1283	Urban Street Light	610 x 610	-	S094	S001	Hammered	3502-R	42.3
1284	Urban Street Medium	610 x 610	-	S180	S001	Hammered	4502-R	26.5
1288	White Lead Oak Blond	610 x 610	-	S181	S001	Brushed	3010-Y40R	29.6
1289	White Lead Oak Dark Beige	184 x 1219	-	S182	S001	Brushed	5010-Y10R	25.3
1290	White Lead Oak Shadow Grey	184 x 1219	-	S183	S001	Brushed	3502-Y	34.6
0584	White Lime	184 x 1219	212 x 1239	S074	S074	Saw Effect	4005-Y20R	36.0

S001:
White

S001:
Aluminium

Packaging

Product size (mm)	m ² /box	m ² /pallet
Creation 30 Design		
457 × 914	3.76	248.16
610 × 610	3.35	234.50
184 × 1219	3.36	241.92
230×1500	3.80	250.80
Chevron 184 × 1219	3.14	251.20

Product size (mm)	m ² /box	m ² /pallet
Creation 30 Solid Clic		
212 × 1239	2.10	113.50
240 × 1461	2.45	117.60
389 × 729	1.98	107.10

Exclusive embosses



Stone



Saw effect



Brushed



Hammered



Natural

Luxury Vinyl Tile

My Creation / My Saga² **New**

Beyond the norm

As you are unique and each of your projects represents a new challenge, Gerflor gives you the chance to stand out, from 200 sqm.

One atmosphere, one style, one floor, but several possibilities...

My Creation _____

Available installations :

My Creation 70 Glue Down

My Creation 55 Glue Down

Available formats :

Lame 208 × 1243 mm

Dalle 496,5 × 996,5 mm



My Saga² _____

Available formats :

Dalle 500 × 500 mm





New My Creation and My Saga² collections are available on gerflor.com

Do not hesitate to contact your sales representative



3 Possibilities



1 - Colour

Set the tone of your project by recolouring the design of your choice in our Creation or Saga² ranges

Creation
LVT



2 - Collection


Leave a big impression on the atmosphere that you create thanks to our unique collection of 50 designs that reflect the major decorative trends that are popular today.

All of our customisable designs: myfloorbygerflor.com



3 - Customisation

Enhance the visual identity of your company or that of your clients by printing a logo and/or your own designs.



My Creation, My Saga²

Let's bring your inspiration to life together!

SKIRTING



ENTRANCE
MAT



Luxury vinyl tile

More than a floor...

Underlayer

Creation Solid Clic

Gerflor Acoustic 15 dB 



Code: 1798
Format: 1m x 15ml

Gerflor Acoustic Plus 19 dB 



Code: 0704
Format: 0.98m x 15.3ml

Gerflor Silence Plus 19 dB 



Code: 5949
Format: 1.18m x 8.5ml

Creation (Dry Back)*

Gerflor Smart Fix 16 dB 



Code: 1698
Format: 1m x 7.5ml

Creation
LVT

Design skirting



Vinyl Code: 6086 + Color code / MDF Code: 5947 + Color code



Design coverstrip



Code: 0647 + Color code - Format: 45mm x 0.90m
Available colors on gerflor.com


3 usages



1. Expansion gap



2. Ramp



3. Threshold

Entrance mat

Quickmat Tiles: Pre-adhesived planks (12mm thick)



* Except Creation 70





Technical Tiles


pages 214-229


218. Technical tiles - GTI®

- 218. GTI® Max
- 218. GTI® Pure
- 222. GTI® EL5

226. Technical tiles - Attraction®

Technical tiles

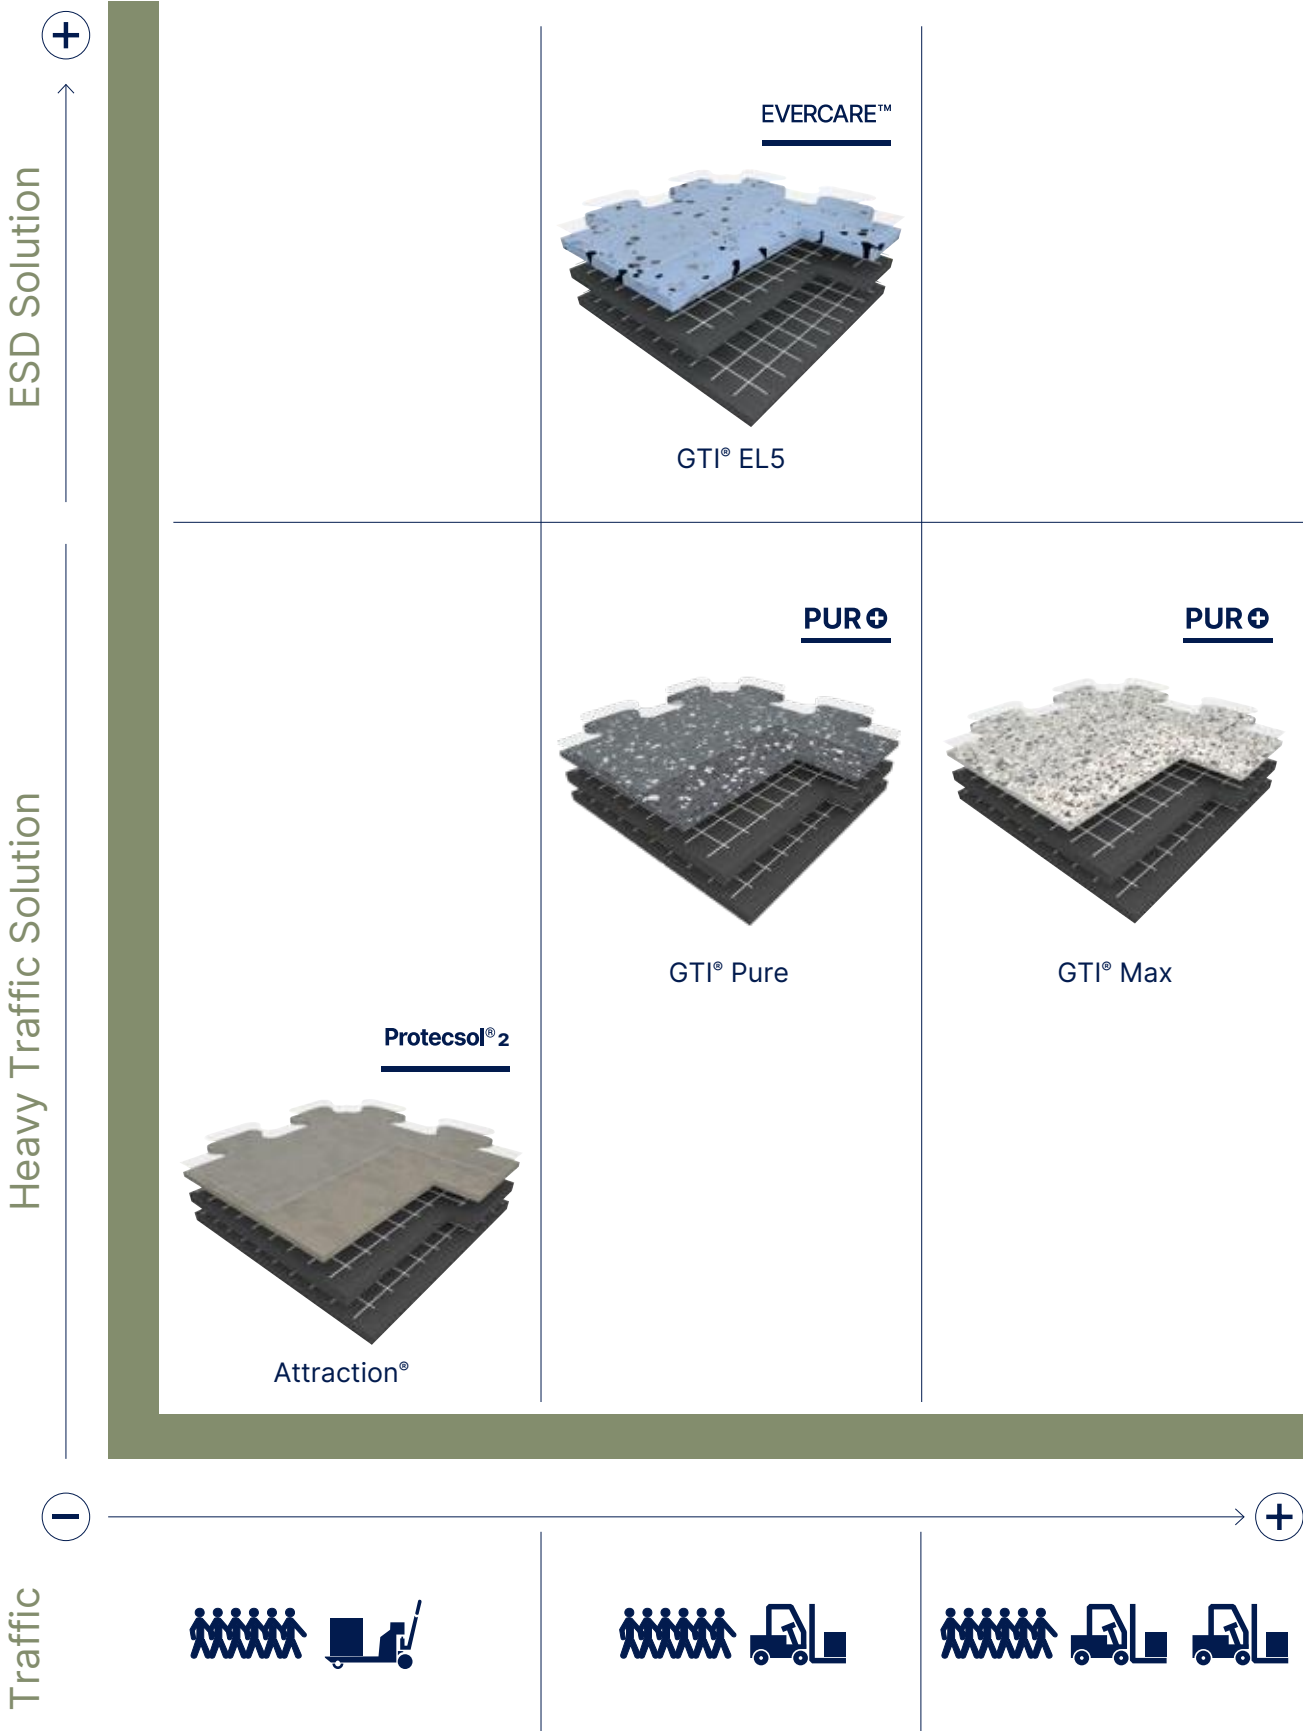

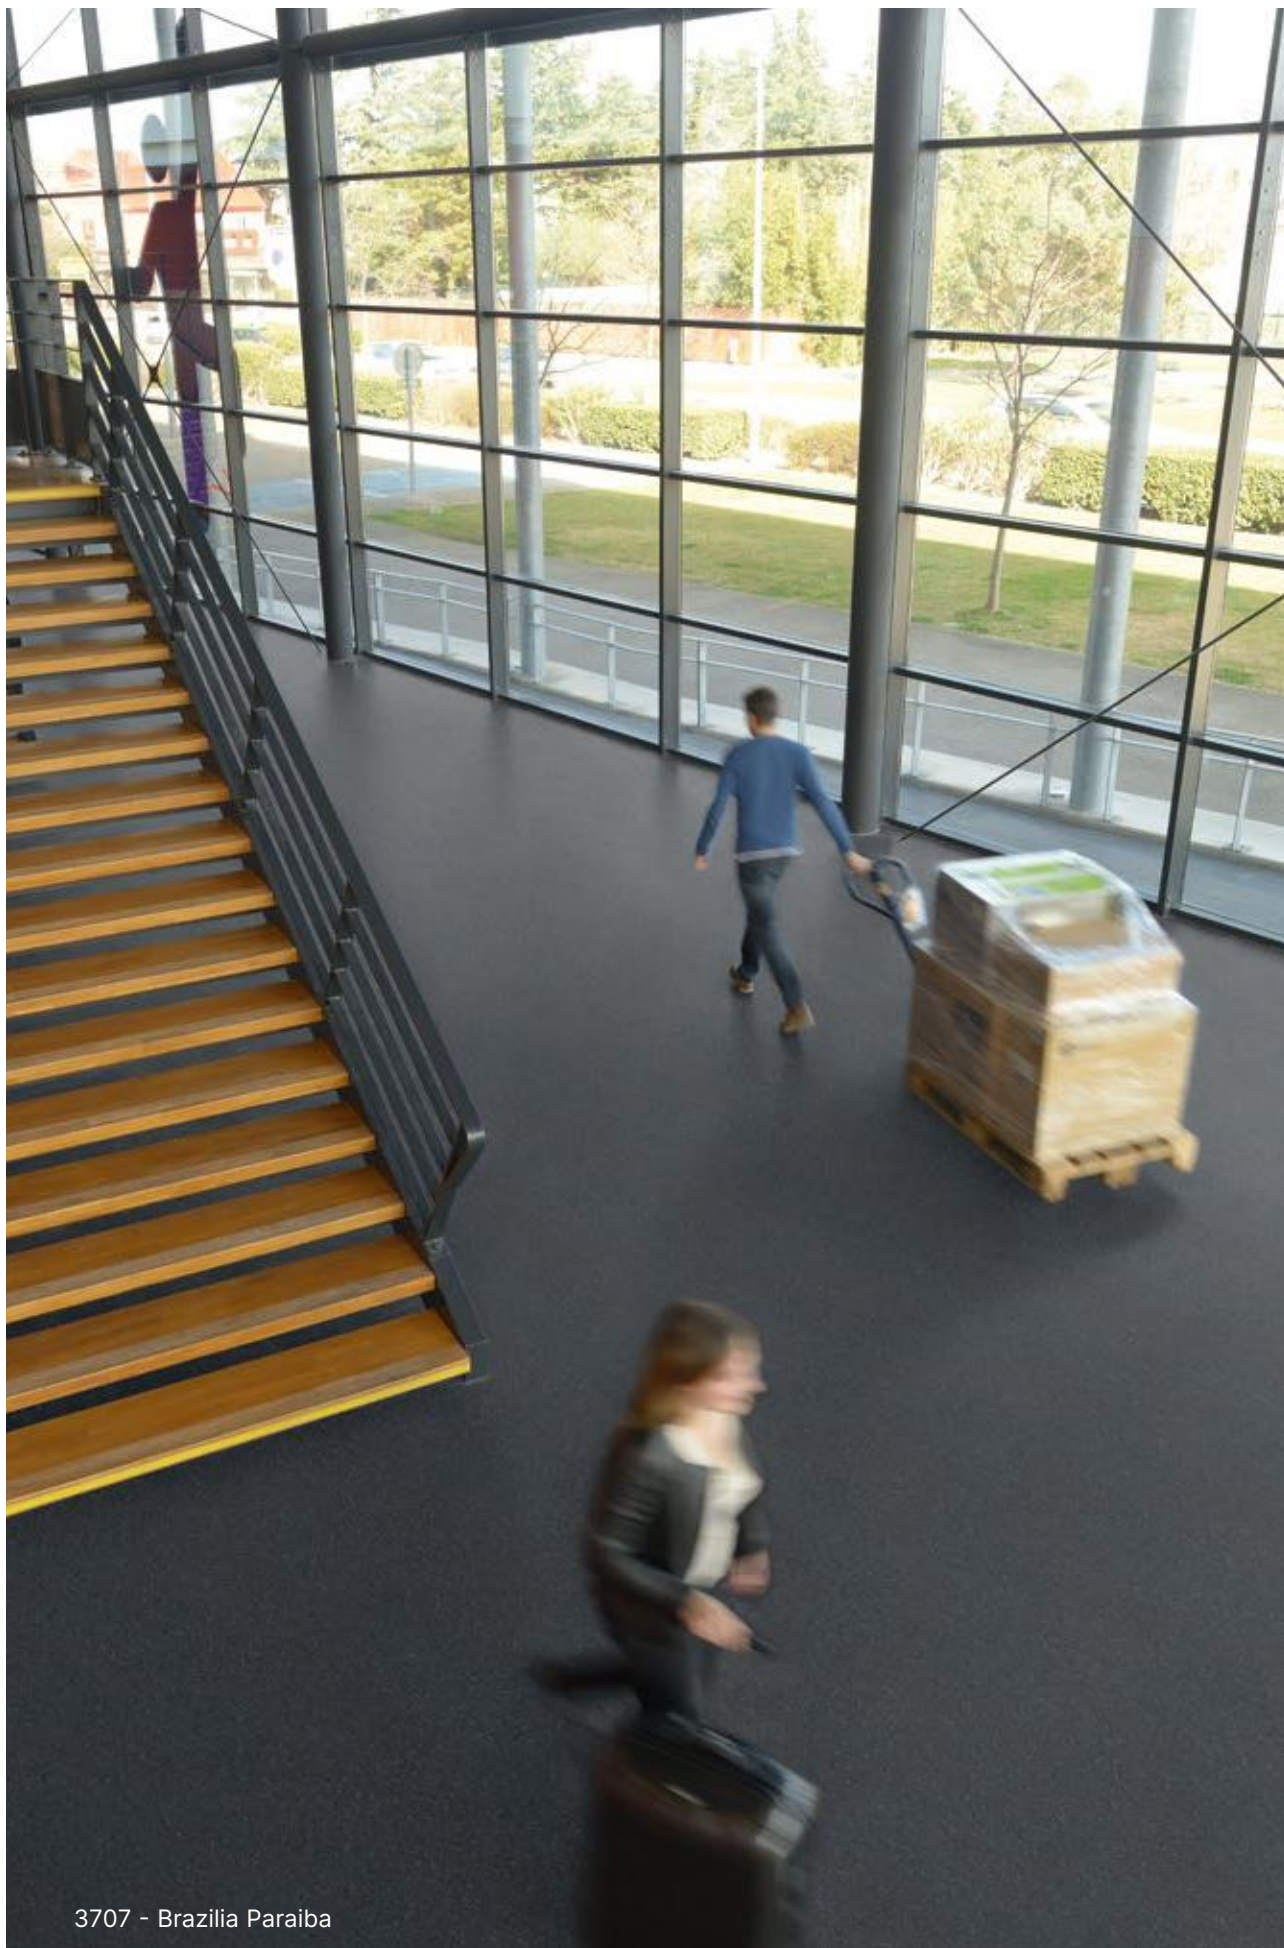


3707 - Brasília Paraíba

Technical
tiles


Technical tiles

GTI® Max - GTI® Pure

GTI® Max Connect & Cleantech



GTI® Max Connect

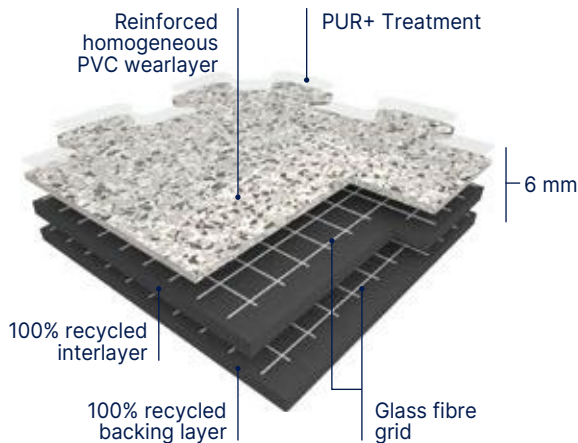

GTI® Max is a multi-layered interlocking looselay vinyl tile with polyurethane treatment (**PUR+**), 6 mm thick with a dovetail joint for the **Connect** configuration and with welded joints for the **Cleantech** configuration.


GTI® is manufactured by Gerflor using a continuous high pressure process, abrasion group T. The **GTI® Max** wearlayer is reinforced by specific oblong fillers that offers an outstanding resistance to traffic.

GTI® Max is reinforced with 2 glass fibre grids on either side of an intermediate pressed homogeneous layer.

GTI® Max backing is a 4 mm thick black pressed homogeneous sheet, its surface is a coloured and reinforced homogeneous sheet 2 mm thick. The product is 100% recyclable.

GTI® Max is made with a phthalate free plasticizer.


GTI® Max Cleantech

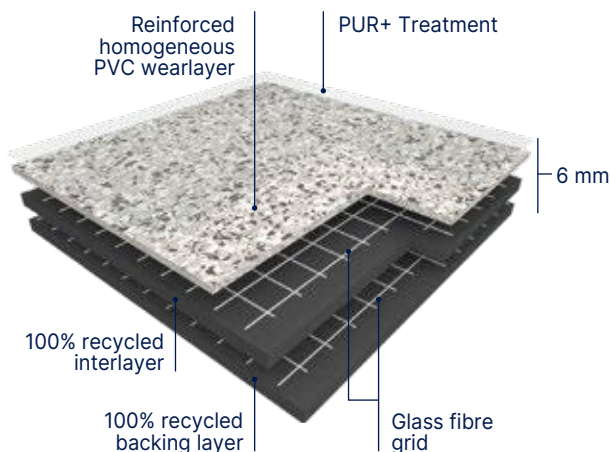

GTI® Access are ramps that provide continuity between the tile and the existing floor.

GTI® Corner enable covering of inaccessible corners or finishing central patterns.

GTI® Pure Connect

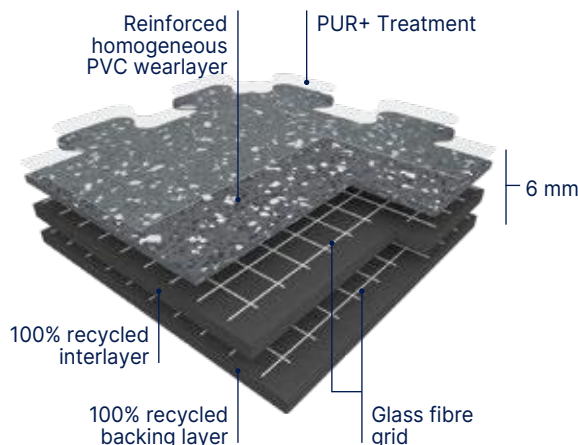

GTI® Pure is a multi-layered interlocking looselay vinyl tile with polyurethane treatment (**PUR+**), 6 mm thick with a dovetail joint for the **Connect** configuration.

GTI® Pure is manufactured by Gerflor using a continuous high pressure process, abrasion group T. The **GTI® Pure** wearlayer is a Pure vinyl homogeneous wear layer with no filler, incorporating very densely pressed coloured chips and without any transparent wear layer. It offers an outstanding abrasion and scratch resistance and an high resistance to traffic.

GTI® Pure is reinforced with 2 glass fibre grids on either side of an intermediate pressed homogeneous layer.

GTI® Pure backing is a 5 mm thick black pressed homogeneous sheet, its surface is a colored and reinforced homogeneous sheet 1 mm thick. The product is 100% recyclable.

GTI® Pure is made with a phthalate free plasticizer.



Removable R10 PUR+



- Resistant to heavy traffic
- Fast renovation: can be installed over existing floorcovering
- No subfloor preparation, no adhesive and no production stop (no loss of money)

- Polyurethane surface treatment PUR+ for ease of maintenance
- 6 Standard logos: Mix and match colours to create corners and walkways

			GTI® Max	GTI® Pure
Description				
Total thickness	EN ISO 24346	mm	6	6
Wearlayer thickness	EN ISO 24340	mm	2	1
Weight	EN ISO 23997	g/m ²	9365	8935
Size	EN ISO 24342	mm	635 × 635 Connect 600 × 600 Cleantech (without dovetail) ⁽¹⁾	635 × 635 Connect
Classification				
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10582
European classification	EN ISO 10874	class	34-43	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10	R10
Pendulum test	BS7976	-	Concrete emboss ⁽²⁾ : +36 PTV	Rice emboss ⁽²⁾ : Soft emboss ⁽²⁾
Performances				
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0
Wear group	-	group	T	T
Type Binder content	EN ISO 10582	type	I	I
Dimensional stability	EN ISO 23999	%	≤ 0.15	≤ 0.15
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10
Castor chair test (type W)	ISO 4918	-	OK	OK
Shore Hardness	EN ISO 868	H _d	≥ 55	-
Shifting resistance	CAHIER CSTB 3562	N/mm ²	≥ 30	-
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6
Surface treatment	-	-	PUR+	PUR+
Chemical products resistance	EN ISO 26987	-	OK	OK
Environment / indoor air quality				
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®
CE marking				
		EN 14041		

(1) Available upon request

(2) +36 PTV only for 7 references GTI® Max: Ermelino - Ora - Bora - Libeccio - Grecale - Sirocco - Tramontana

GTI® LOGOS



0001 Caution 0002 Forklift 0006 Pedestrian 0003 Arrow 0005 No entry 0004 Stop



Technical tiles

GTI® Max - GTI® Pure




Removable R10 PUR+ 100% recyclable

Rice Emboss

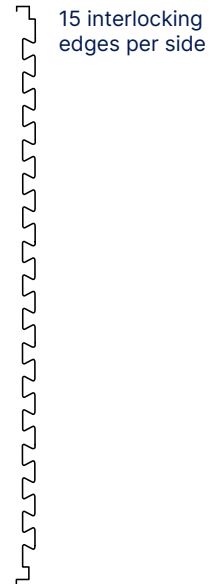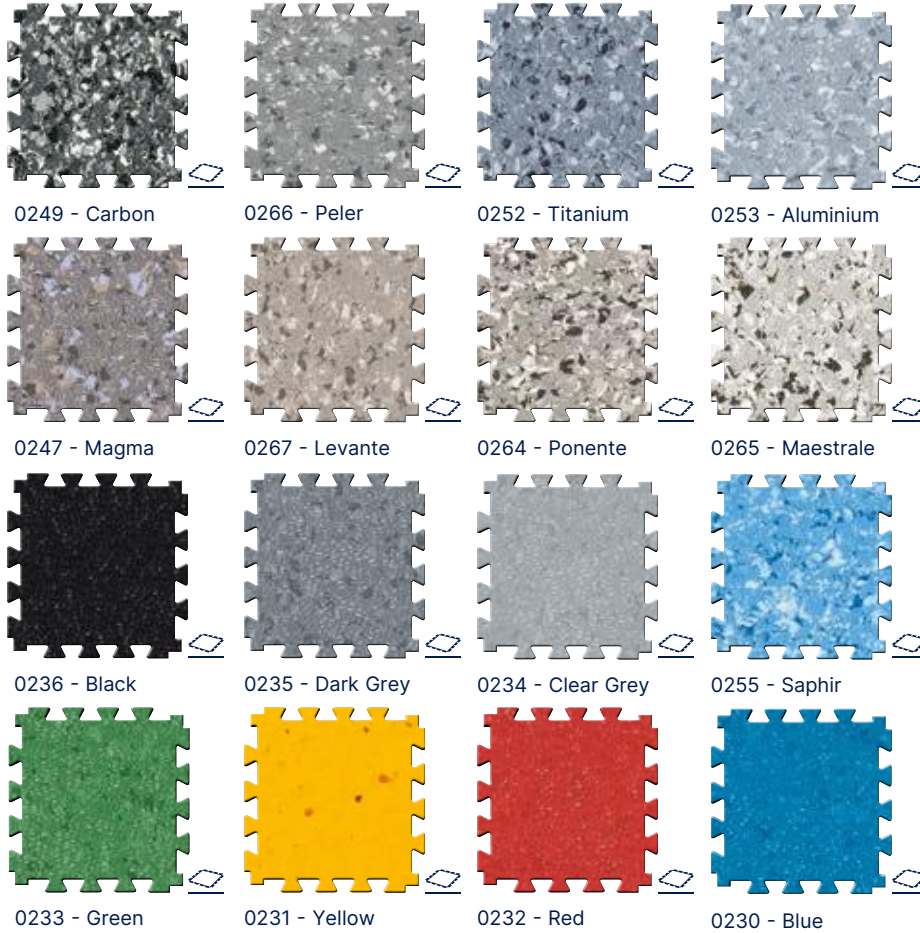

Concrete Emboss

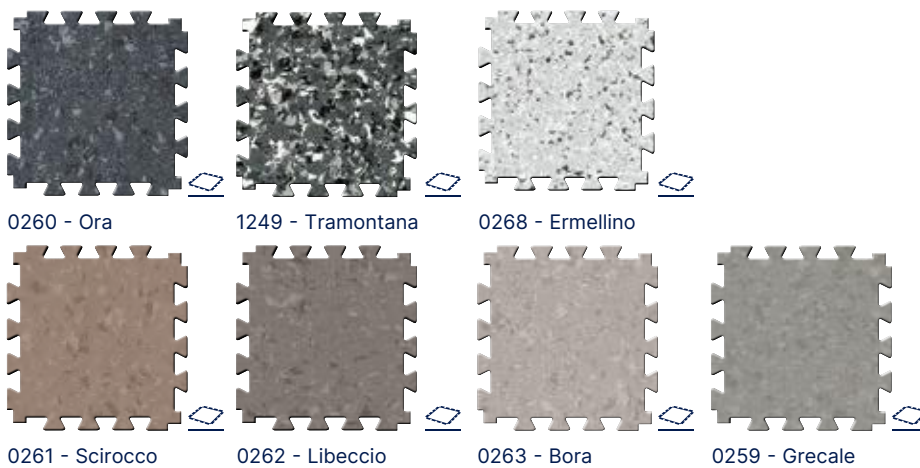

On order Moq: 500 sqm

All these colours are available in GTI® MAX CLEANTECH. For more details please contact your Gerflor representative.

GTI® Max - GTI® Pure



Removable


R10

PUR+




100% recyclable


Soft Emboss




2249 - Stromboli




2266 - Vesuvio



2252 - Teide*




2247 - Vulcano*



2267 - Fuji*



2264 - Piton



2265 - Merapi*

*On order Moq: 500 sqm

GTI® Pure



Removable

R10

PUR+



100% recyclable

Soft Emboss




2742 Times Square




2744 Queens Soft



2743 Central Park



2741 Brooklyn




2740 Harlem Soft



2745 Plaza


Accessories GTI® Max - GTI® Pure

Aluminium ramp
5-6 mm



Aluminium Ramp 5-6 mm /
Ref. 0505
+ Aluminium Corner 5-6 mm /
Ref. 1513
See page 332

High traffic pvc
Ramp 6 mm



Ref. 0500
See page 332

KIT ESPLANADE 9000



Ref. 1700
See page 335

Corner & Access


**GTI® CORNER
CONNECT**
320 × 320 mm



**GTI® ACCESS
CONNECT**
635 × 320 mm



**GTI® CORNER
CLEANTECH**
300 × 300 mm



**GTI® ACCESS
CLEANTECH**
600 × 300 mm




For more information, please refer to our GTI® MAX brochure.


Technical tiles

GTI® EL5


GTI® EL5 Connect & Cleantech



GTI® EL5 CONNECT

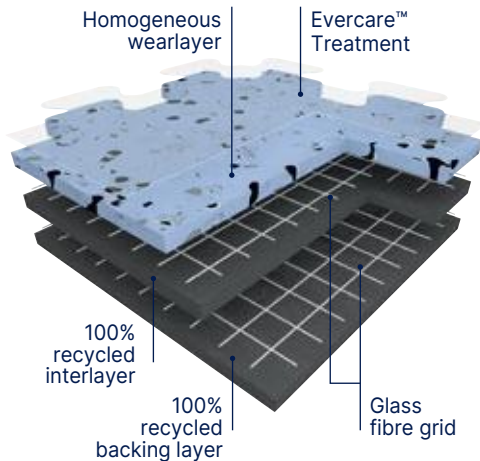

GTI® EL5 CLEANTECH

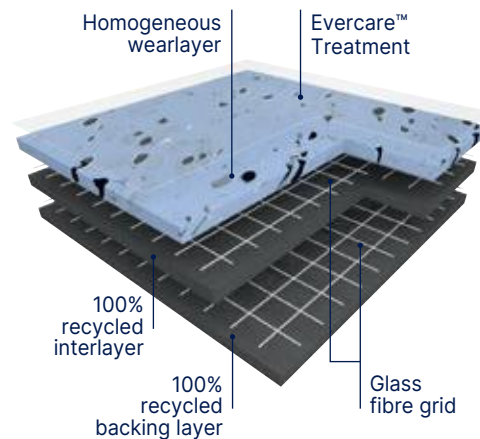

GTI® EL5 Connect is a multi-layered looselay vinyl tile, 6 mm thick, reinforced with 2 glass fibre grids.
GTI® EL5 Connect tiles can be installed using interlocking system with dove tails.

GTI® EL5 Cleantech is a multi-layered looselay vinyl tile, 6 mm thick, reinforced with 2 glass fibre grids.
GTI® EL5 Cleantech is available in **square format with welded joints** for clean environments and watertight systems requirements.

GTI® EL5 wearlayer is 2 mm vinyl homogeneous manufactured with continuous high pressure process, abrasion group P. It offers an outstanding resistance to traffic. This floorcovering is treated with **Evercare™** technology: the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. Evercare™ offers **easy maintenance and resistance against staining** of chemical products used in healthcare like betadine, eosin or anti-bacterial hand gel; **and decontamination protocols.**

This treatment has excellent maintenance characteristics; it requires no wax for life!

The carbon encapsulated granules throughout its full thickness and the **conductive backing** and **conductive surface treatment** ensure optimal and consistent conductive properties throughout its full life expectancy.

- $5 \times 10^4 \leq Rt \leq 10^6$ according to **EN 1081**

It has permanent antistatic properties.

- **< 2000 V** according to **EN 1815**

The product is non-emissive of volatile organic compounds with < 10 microgram/m³ (TVOC after 28 days ISO 16000-6).

Complementary Finishes

GTI® EL5 Connect		GTI® EL5 Cleantech	
		2715	Access
2717	Access	2716	Corner
		2722	Conductive Welding Rods





Removable R9

Evercare™



100% recyclable

Connect

- Fast Installation
- Resistance to heavy traffic

Cleantech

- Watertight System (hot welding)
- Resistance to heavy traffic

GTI® EL5

Description

Total thickness	EN ISO 24346	mm	6
Wearlayer thickness	EN ISO 24340	mm	2
Weight	EN ISO 23997	g/m ²	9240
Size	EN ISO 24342	mm	635 × 635 (Connect) 650 × 650 (Cleantech)

Classification

Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Electrical resistance ⁽¹⁾	EN 1081	Ohm	5×10 ⁴ ≤ Rt ≤ 10 ⁶
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R9

Performances

Wear resistance	EN 660.2	mm ³	≤ 4.0
Wear group	NF 189	group	P
Type Binder content	EN ISO 10582	type	I
Dimensional stability	EN ISO 23999	%	≤ 0.25
Castor chair test (type W)	ISO 4918	-	OK
Shore Hardness	EN ISO 868	H _D	≥ 90
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	Evercare™
Chemical products resistance	EN ISO 26987	-	OK

Environment / indoor air quality

TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
Certification	-	-	Floorscore®

CE marking



EN 14041



(1) Measured before installation

Technical tiles

GTI® EL5



GTI® Cleantech - 0354 Blue



Removable R9 Evercare™


GTI® EL5 CONNECT



635 × 635 mm




0353 Beige




0350 Light Grey



0352 Grey



0351 Black

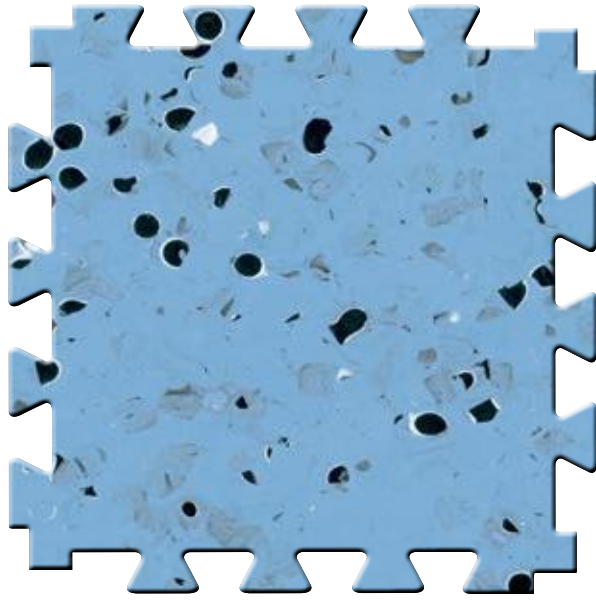

0354 Blue


^ Scale 1

Technical tiles


GTI® EL5 CLEANTECH




Removable R9 Evercare™




650 × 650 mm




0353 Beige




0350 Light Grey



0352 Grey



0351 Black

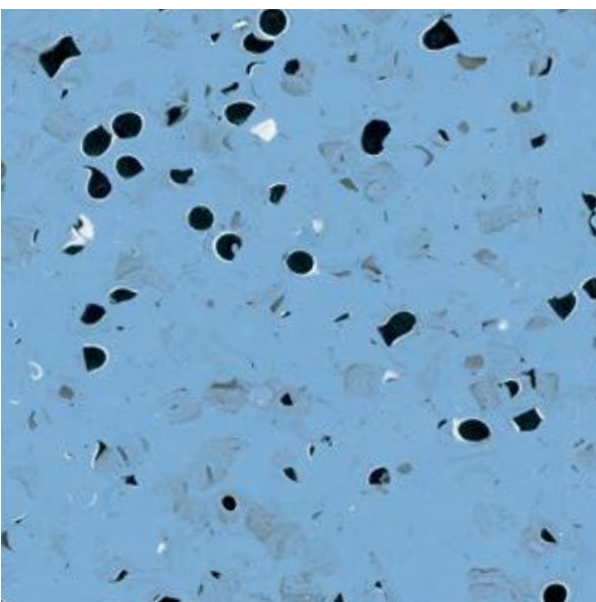


0354 Blue

^ Scale 1


Technical tiles

Attraction®

Attraction® Connect & Cleantech



Attraction® connect

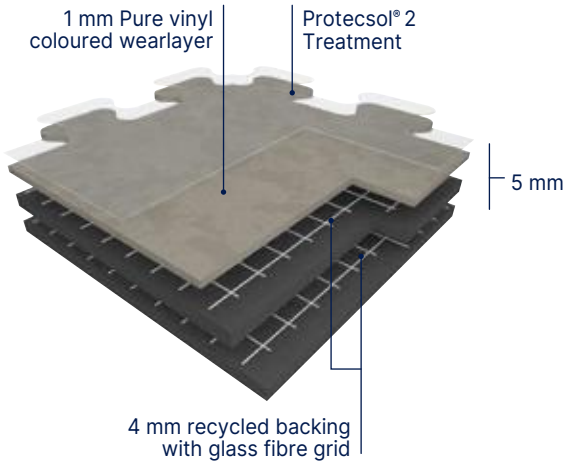

Attraction® is a semi-flexible tile constructed by compacting, at high temperature and over 3000 T, a 4 mm recycled backing and a 1 mm **Pure vinyl wear layer. This wear layer is incorporating very densely pressed coloured chips, with a mat finishing and without a transparent wear layer.** The product comprises a compact backing which is pressed and reinforced with two glass fibre grids.

Attraction® has a unique dovetail joint which allows fast loose lay installation and replacement.

Attraction® is treated with **Protecsol® 2**, a surface treatment obtained by UV laser crosslinking.

This **Protecsol® 2** ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

It has a Bfl-s1 fire classification in accordance with standard EN 13501-1. The products emission rate of volatile organic compounds is **< 10 microgram/m³ (TVOC after 28 days – ISO 16000-6)**.



It is made with a phthalate free plasticizer.

It is made of 100% controlled recycled materials.

It does not contain any heavy metals or CMR 1&2 and they are 100% compliant with REACH.

It is 100% recyclable and made with up to 80% recycled content.

Attraction® cleantech

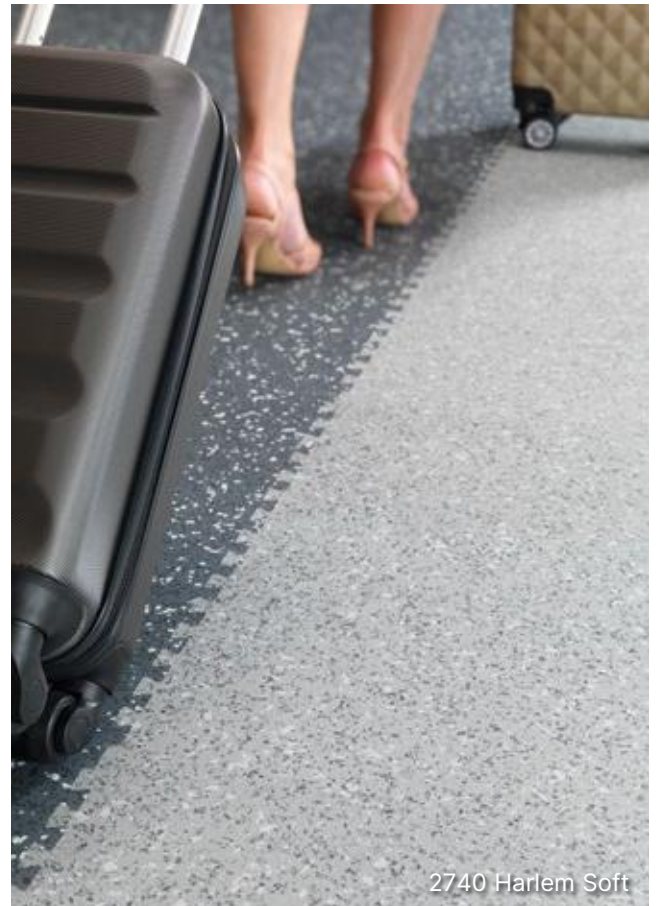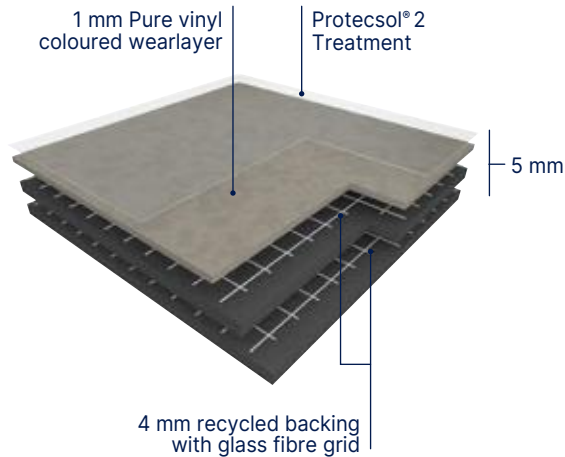

2740 Harlem Soft

Attraction®



Removable R10 ProtecSol® 2 100% recyclable

The Taralay Premium range in the looselay Attraction® format for an easy and longlasting renovation!

- Fast track and easy installation
- No immobilisation of the premises and no loss of turnover
- Little or no subfloor preparation
- Low maintenance cost: UV cured polyurethane ProtecSol® 2 treatment

Attraction®

Description			
Total thickness	EN ISO 24346	mm	5.00
Wearlayer thickness	EN ISO 24340	mm	1.00
Weight	EN ISO 23997	g/m ²	7420
Size	EN ISO 24342	mm	635 × 635 Connect 600 × 600 Cleantech (without dovetail) ⁽¹⁾
Classification			
Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815 IEC 61340-4-5	kV V	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10
Performances			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Type Binder content	EN ISO 10582	type	I
Dimensional stability	EN ISO 23999	%	≤ 0.25
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type W)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecSol® 2
Chemical products resistance	EN ISO 26987	-	OK
Environment / indoor air quality			
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
Certification	-	-	Floorscore®
CE marking			
	EN 14041	 	

(1) Available upon request

Technical tiles

Attraction®



Removable

R10

Protocols® 2




100% recyclable




8386 Boa Vista (Brazilia)



4342 Juara (Brazilia)



4343 Tokelau (Indiana)




4351 Greige (Osmoz)




8736 Recife (Brazilia)



4003 Tao (Indiana)



3709 Ceara (Brazilia)




8053 Anambas (Indiana)




4004 Pago (Indiana)




3707 Paraiba (Brazilia)



8837 Songo (Indiana)




4476 Wattaru (Indiana)



4146 Moheli (Indiana)



8157 Goias (Brazilia)



8577 Amazonas (Brazilia)



15 interlocking edges per side

All these colours are available in ATTRACTION® CLEANTECH. For more details please contact your Gerflor representative.

Attraction® - Neopolis




Removable

R10

Protacosol® 2




100% recyclable

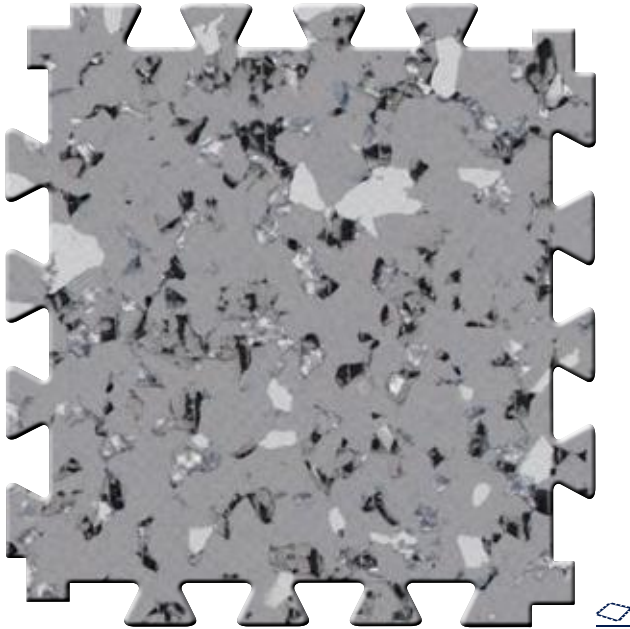


2740 Harlem Soft (Neopolis)

△ Scale 1



2742 Times Square (Neopolis)



2741 Brooklyn (Neopolis)




2743 Central Park (Neopolis)



2744 Queens Soft (Neopolis)



2740 Harlem Soft




2745 Plaza (Neopolis)


Technical tiles

Accessories Attraction®

Aluminium ramp
screwed - 5-6 mm



0505



1513

Kit Romat GT
for Attraction®



Ref. 1719

Corner & Access



**ATTRACTION
ACCESS**
635 × 320 mm



**ATTRACTION
CORNER**
320 × 320 mm

See page 332

For more information, please refer to our Attraction® brochure.





Technical Solutions

pages 230-255

234. EL5 / EL7 Solutions Dissipative & conductive floors

- 236. Dissipative floors
- 236. Mipolam EL7
- 236. Mipolam Robust EL7

- 237. Conductive floors
- 237. Mipolam EL5
- 237. Technic EL5
- GTI EL5 (See page 222)

238. Safety Floorings

- 240. Tarasafe Ultra Sparclean®
- 241. Tarasafe Standard - Plus - Super
- Tarasafe Ultra H₂O (See page 245)

242. Shower System

- 244. Elegance SD
- 245. Tarasafe Ultra H₂O
- 246. Tarasafe Design
- 248. Mural Calypso

250. Wallcoverings


- 252. Mural Ultra Design
- 254. Mural Club
- Mural Calypso (See page 248)

Technical solutions

EL5 / EL7
Solutions

Dissipative Floors

EN 1081 (Ω): $10^6 \leq Rt \leq 10^8$




Mipolam EL7




Mipolam Robust EL7

Slip Resistant
Floorings

SparClean® Treatment



Tarasafe Ultra




Tarasafe Design

Shower
System

Floorcoverings



Elegance SD




Tarasafe Ultra H₂O



Tarasafe
Standard / Ultra / Design

WallCoverings



Mural Calypso



Mural Club


Conductive Floors

EN 1081 (Ω): $10^4 \leq Rt \leq 10^6$




Mipolam EL5

EN 1081 (Ω): $10^4 \leq Rt \leq 10^6$




Mipolam Technic EL5

EN 1081 (Ω): $5 \times 10^4 \leq Rt \leq 10^6$




GTI EL5


PUR Treatment



Tarasafe Standard




Tarasafe Super




Tarasafe Plus

Wallcoverings



Mural Calypso



Mural Ultra Design


Technical solutions

EL5 / EL7 Solutions


Dissipative floors

Mipolam EL7 - Mipolam Robust EL7

Mipolam EL7

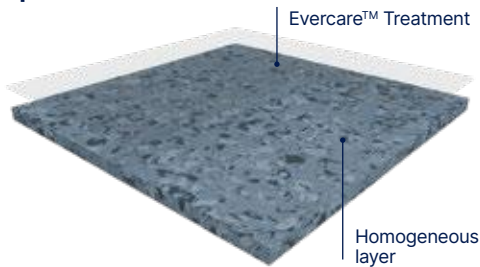

Mipolam Robust EL7

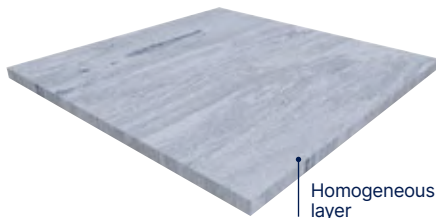

$10^6 \leq Rt \leq 10^8 \Omega$

Evercare™



100% recyclable

MIPOLAM EL7 is a dissipative flexible homogeneous vinyl floorcovering available in both sheet and tile form, calendered and compacted and comes in 10 colours. This floorcovering is treated with **EVERCARE™**: the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. Evercare™ avoids stain of chemical products used in healthcare like Betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring. According to ISO 21702, **MIPOLAM EL7** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **MIPOLAM EL7** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h. This treatment has excellent maintenance characteristics; it requires no wax for life! **MIPOLAM EL7** acts as a continuous dissipater $10^6 \leq Rt \leq 10^8$. The product has to be grounded with an ESD copper strip (see finishes) to meet its full performance. The product is non-reactive to residual indentation with a value ≤ 0.02 mm. The flooring has a binder content type II, is suitable for heavy duty traffic areas and has a Bfl-s1 fire resistance. The product is non-emissive of volatile organic compounds with <10 microgram/m³ (TVOC after 28 days ISO 16000-6).



$10^6 \leq Rt \leq 10^8 \Omega$



100% recyclable


MIPOLAM ROBUST EL7 is a dissipative flexible homogeneous vinyl floorcovering available in both sheet and tile. Calendered and compacted. It acts as a continuous dissipater $10^6 \leq Rt \leq 10^8$ (EN 1081).

Conductive floors


Mipolam EL5 - Mipolam Technic EL5



Mipolam EL5

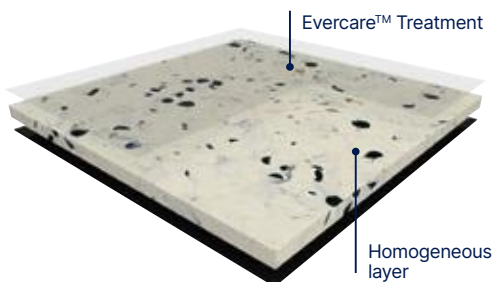

Mipolam Technic EL5

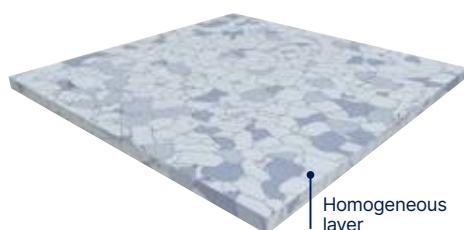

$10^4 \leq Rt \leq 10^8 \Omega$

Evercare™



100% recyclable

MIPOLAM EL5 is a conductive flexible homogeneous vinyl floorcovering available in sheet. The 2 mm homogeneous material incorporates carbon encapsulated granules throughout its full thickness. It has a **conductive backing** to ensure optimal and consistent conductive properties throughout its full life expectancy. This floorcovering is treated with **Evercare™**: the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. Evercare™ avoids stain of chemical products used in healthcare like Betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring. According to ISO 21702, **MIPOLAM EL5** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **MIPOLAM EL5** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h. This treatment has excellent maintenance characteristics; it requires no wax for life! **MIPOLAM EL5** acts as a continuous conductive $10^4 \leq Rt \leq 10^8$. The product has to be grounded with an ESD copper strip (see finishes) to meet its full performance. The product is non-reactive to residual indentation with a value ≤ 0.02 mm (EN ISO 24343-1). The flooring complies with the EN ISO 10874 (34-43) offering a binder content type II, is suitable for heavy duty traffic areas and has a Bfl-s1 fire resistance. The product is non-emissive of volatile organic compounds with <10 microgram/m³ (TVOC after 28 days ISO 16000-6).



$10^4 \leq Rt \leq 10^8 \Omega$



100% recyclable










MIPOLAM TECHNIC EL5 is a conductive flexible homogeneous compacted vinyl floorcovering available in tiles. The conductive carbon coated PVC pellets create a perfect conductive network for permanent conductive and antistatic properties throughout its full life expectancy. It acts as a continuous conductive $10^4 \leq Rt \leq 10^8$ (EN 1081).



100% recyclable

A complete range for Hi-tech applications: electronics and telecommunication areas, computer rooms, operating theatres, radiology...

- Compacted floorcovering for better hygiene, maintenance, and traffic resistance.
- Available in tiles and sheets with specific formats especially adapted to raised floors (608 × 608 mm).

			Mipolam EL7	Mipolam Robust EL7	Mipolam EL5	Mipolam Technic EL5
Description						
Total thickness	EN ISO 24346	mm	2	2	2	2
Weight	EN ISO 23997	g/sqm	3100	3300	2985	3800
Width of sheet	EN ISO 24341	cm	200	200	200	-
Length of sheet	EN ISO 24341	lm	20	20	20	-
Tile size	EN ISO 24342	mm	608 × 608	608 × 608	-	608 × 608
Number of tiles per package	-	-	20	20	-	20
Classification						
Norm / Product specification	-	-	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581
European classification	EN ISO 10874	class	34-43	34-43	34-43	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Electrical resistance ⁽¹⁾	EN 1081	Ohm	10 ⁶ ≤ Rt ≤ 10 ⁸	10 ⁶ ≤ Rt ≤ 10 ⁸	10 ⁴ ≤ Rt ≤ 10 ⁶	10 ⁴ ≤ Rt ≤ 10 ⁶
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2
Slip resistance wet	EN 16165:2021 – Appendix B (DIN 51 130)	class	R9	-	R9	-
Performances						
Type Binder content	EN ISO 10581	type	II	II	I	II
Dimensional stability	EN ISO 23999	%	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	≤ 0.40	≈ 0.25
Residual indentation (norm)	EN ISO 24343-1		≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10
Residual indentation (average measured value)	EN ISO 24343-1	mm	≈ 0.02	≈ 0.03	≈ 0.02	≈ 0.03
Castor chair test (type W)	ISO 4918	-	OK	OK	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Evercare™	-	Evercare™	-
Chemical products resistance ⁽²⁾	EN ISO 26987	-	OK	OK	OK	OK
Anti-bacterial activity (E.coli – S. aureus – MRSA) after 24h ⁽³⁾	ISO 22196	-	> 99% inhibits growth	-	> 99% inhibits growth	-
Anti-viral activity (human coronavirus) after 2h ⁽³⁾	ISO 21702	-	> 99.7% virucidal activity	-	> 99.7% virucidal activity	-
Environment / indoor air quality						
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10	< 10	< 10	< 10
Certification	-	-	Floorscore®	-	Floorscore®	-
CE marking						
						
			  			
			   			

(1) Measured before installation.

(2) Staining table available upon request.

(3) The implementation of an effective cleaning method is the best defence against infection

Important: please refer to Gerflor installation guidelines - www.gerflor.com

Technical solutions

Dissipative floors: Mipolam EL7 & Mipolam Robust EL7

Mipolam EL7




$10^6 \leq R_t \leq 10^8 \Omega$

Evercare™



100% recyclable

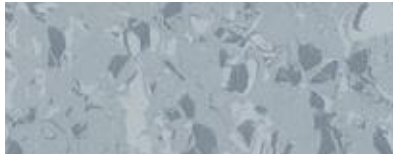


4120 Silver Grey



^ Scale 1



4166 Thistle



4159 Grey Storm



4101 Quartz



4120 Silver Grey



4116 Sapphire




4111 Raffia



4124 Smoked Opal



4110 Violet Grey



4144 Havana Brown



4132 Citrine



Mipolam Robust EL7



$10^6 \leq R_t \leq 10^8 \Omega$



100% recyclable



0003 Ivory



^ Scale 1



0005 Steel



0013 Pewter



0003 Ivory



0112 Storm



0306 Green



0002 Platinum



Conductive floors: Mipolam EL5 / Technic EL5 / GTI EL5

Mipolam EL5




$10^4 \leq R_t \leq 10^8 \Omega$

Evercare™




100% recyclable

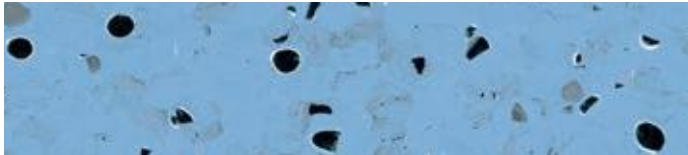


0354 Blue



^ Scale 1



0350 Light Grey



0353 Beige




0354 Blue



0352 Grey



0351 Black



0355 Green



Mipolam Technic EL5



$10^4 \leq R_t \leq 10^8 \Omega$



100% recyclable



0637 Light Blue



^ Scale 1



0635 White



0636 Grey




0637 Light Blue



0640 Beige



0638 Blue



0639 Green



GTI® EL5

GTI® EL5 (See page 222)



Removable R9

Evercare™




100% recyclable

Technical solutions

Safety Floorings - Tarasafe

Tarasafe Ultra: Sparclean® Treated

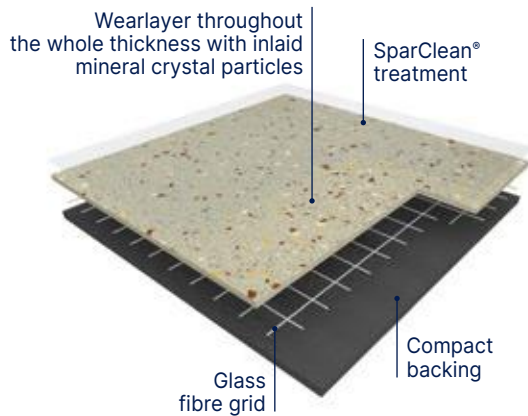


TARASAFE ULTRA is a slip resistant safety vinyl floorcoverings, wearlayer throughout the whole thickness and deeply inlaid mineral crystal particles (patented) and coloured chips for a decorative design. It is reinforced with a glass fibre grid and is available in a sheet format. The range is ideal for heavy traffic applications where slip resistance, durability, hygiene and easy maintenance are required. Suitable for most contract & commercial areas, this is a popular choice in the education and healthcare environments, the matt finish surface is also perfectly suitable for dementia care units. It is 100% recyclable, Floorscore® certified and do not contain any heavy metals or CMR 1&2. It is also 100% compliant with REACH. The product emission rate of volatile organic compounds is < 100 microgram/m³ (TVOC after 28 days – ISO 16000 -6). The **SparClean®** surface treatment improves the product performance in terms of stain and dirt resistance and designs last longer for extended durability. According to ISO 22196, **TARASAFE ULTRA** has **anti-bacterial activity** against MRSA of 99% after 24h.

Tarasafe Ultra H₂O

See page 245


Tarasafe Standard: PUR Treated

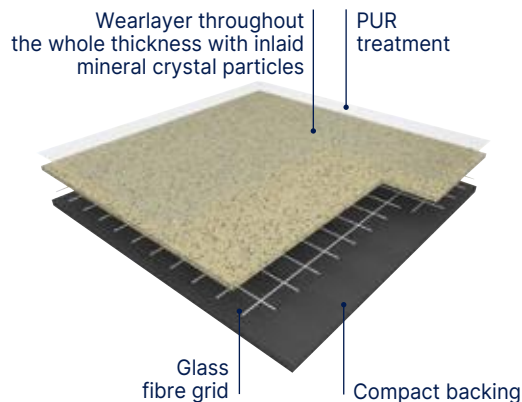


TARASAFE STANDARD with **PUR** surface treatment is a slip resistant safety vinyl floorcovering, wearlayer throughout the whole thickness and deeply inlaid mineral crystal particles (patented). It is reinforced by a glass fibre grid and available in a sheet format. It is an ideal solution for heavy traffic applications where slip resistance, durability, hygiene and easy maintenance are required. **TARASAFE STANDARD** is suitable for most contract & commercial areas. It is 100% recyclable, Floorscore® certified and does not contain any heavy metals or CMR 1&2, it is also 100% compliant with REACH. The product emission rate of volatile organic compounds is < 100 microgram/m³ (TVOC after 28 days – ISO 16000 -6). The **PUR** surface treatment improves the product performance in term of stain resistance and durability. According to ISO 22196, **TARASAFE STANDARD** has **anti-bacterial activity** against MRSA of 99% after 24h.

Tarasafe Plus / Tarasafe Super: Non-Treated

Tarasafe Super





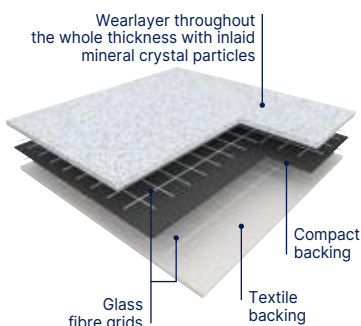



Tarasafe Plus



TARASAFE PLUS and **TARASAFE SUPER** are slip resistant safety vinyl floorcoverings, wearlayer throughout the whole thickness and deeply inlaid mineral crystal particles (patented). They are reinforced by a glass fibre grid and available in a sheet format. They are an ideal solution for heavy traffic applications where slip resistance, durability, hygiene and easy maintenance are required. **TARASAFE PLUS** comprises a textile backing for better adherence in wet areas. It helps reducing telegraphing. **TARASAFE SUPER** and **PLUS** are suitable for most contract & commercial areas. They are 100% recyclable, Floorscore® certified and do not contain any heavy metals or CMR 1&2, they are also 100% compliant with REACH. The product emission rate of volatile organic compounds is < 100 microgram/m³ (TVOC after 28 days – ISO 16000 -6).



- **Easy to clean and maintain:** due to a compacted non porous surface made of vinyl content
- **Permanent slip resistance:** dense concentration of deep inlaid mineral crystal particles throughout the wear layer
- **Enhanced colour, design and brightness:** due to the mineral crystal particles
- **Highest abrasion rating**
- **Indoor Air Quality:** low VOC emission

			Tarasafe			
			Ultra	Standard	Super	Plus
Description						
Total thickness	EN ISO 24346	mm	2.0	2.0	2.2	2.5
Thickness of wearlayer	EN ISO 24340	mm	0.85	0.85	1.12	1.14
Weight	EN ISO 23997	g/sqm	2460	2460	2880	3090
Width/Length of sheet	EN ISO 24341	cm/ml	200/20	200/20	200/20	200/20
Classification						
Norm/Product specification	-	-	EN ISO 10582		EN ISO 10582	
European classification	EN ISO 10874	class	34-43	34-43	34-43	
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	
Slip resistance: Pendulum Test (dry & wet)	EN 16165:2021 – Appendix C (BS 7976-2)	PTV	> 36	> 36	-	
Surface roughness Rz	-	µm	Rz ≥ 20	Rz ≥ 20	-	
Slip resistance wet: Ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10	R10	R12	R10
Slip resistance wet: Ramp test with water	EN 16165:2021 – Appendix A (DIN 51097)	class	B	B	-	
Slip resistance : Ramp test	EN 13845 (annex C)	class	ESf / ESb	ESf / ESb	-	
Performances						
Wear resistance	EN 660.2	mm ³	≤2	≤2	≤2	
Type Binder content	EN ISO 10582	type	I	I	I	
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.40	
Residual indentation: exigency	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.10	
Residual indentation (average measure)	-	mm	≈ 0.03	≈ 0.05	≈ 0.03	
Castor chair test (type W)	ISO 4918	-	OK	OK	OK	
Impact sound Insulation	EN ISO 717-2	dB	-	-	-	
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6	≥ 6	
Surface treatment	-	-	SparClean®	PUR	-	
Chemical products resistance	EN ISO 26987	-	OK	OK	OK	
Anti-bacterial activity (MRSA) ⁽¹⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	-	
Environment / indoor air quality						
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 100	< 100	< 100	
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	
CE marking						
						
			  			
						


Technical Solutions

(1) The implementation of an effective cleaning regime is the most important defence against infection.


Technical solutions

Tarasafe Ultra Sparclean®


 2 m R10 SparClean®
Compact




8709 Granite



8704 Pebble



4128 Ruby



7482 Halite




8717 Obsidian




8710 Basalt



8013 Jasper




4465 Cobalt

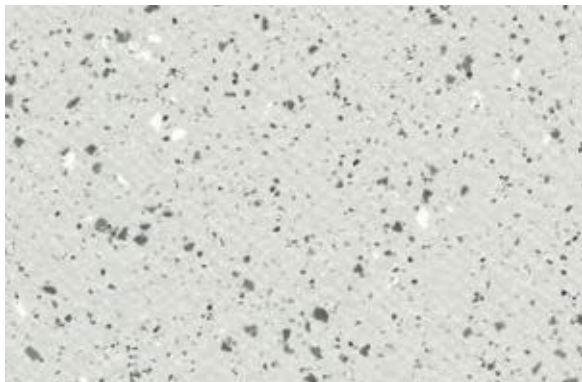

8701 Opal



^ Scale 1




7384 Citrine



4472 Moonstone




7383 Diopside




4470 Sapphire




8701 Opal




4323 Sandstone




4463 Aqua



4505 Peridot




4460 Topaz



4508 Jade



 Color reference available as Tarasafe Ultra H2O (R11).

Tarasafe Standard - Plus - Super

Tarasafe Standard


2 m R10 PUR
 Compact


Tarasafe Plus


2.5mm 2 m R10
 Compact
 Textile Backing

Tarasafe Super


2 m R12
 Compact



7302 Sahara


^ Scale 1



7618 Edelweiss





7731 Marbre⁽¹⁾





7386 Savana^{(1) (2)}





7767 Dove Grey^{(1) (2)}






7801 Noir




7312 Dune





7773 Storm




7115 Flame

7508 Avocado






7107 Poppy





7704 Sky Blue




7801 Noir




7438 Baleine⁽²⁾




7709 Royal Blue



Technical Solutions

(1) Tarasafe Plus - (2) Tarasafe Super

Technical solutions


Shower System

Elegance SD

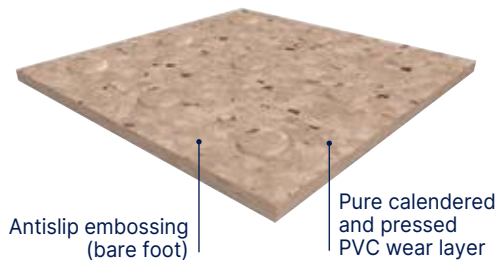


SHOWER SYSTEM ELEGANCE SD is a flexible homogeneous calendered compacted floorcovering available in 2 m sheet, with a non-directional polychrome design, to offer an even colour throughout the thickness. It should be hot welded with a CR 40 welding rod. **SHOWER SYSTEM ELEGANCE SD** is specifically embossed for wet barefoot traffic. **ELEGANCE SD** is compliant with antislip resistance norms (R9 according to DIN 51130 and B classification according to DIN 51097) for a **safe usage** in barefoot or shod applications such as showers. The Shower System enables access for all in showers especially for disabled people. It is made of 32% mineral material and 34% renewable material. It uses 100% controlled recycled material. The TVOC emissions in the air at 28 days (EN 16000) are < 10 microgram/m³. It is 100% recyclable.

Tarasafe Ultra H2O

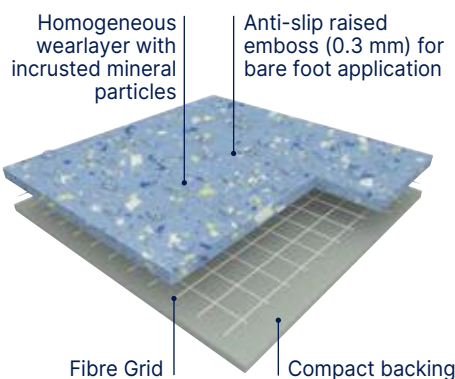


TARASAFE ULTRA H2O is a slip resistant vinyl floorcovering, wearlayer throughout the whole thickness and deeply inlaid mineral particles and coloured chips for a decorative design together with a raised emboss for better slip resistance. **TARASAFE ULTRA H2O** is an ideal solution for traffic applications where enhanced slip resistance with barefoot and durability are required such as wet areas. The specific embossing together with the mineral particles give a Class C barefoot slip resistance (DIN 51 097) and R11 slip resistance (DIN 51 130) which makes **TARASAFE ULTRA H2O** ideal for barefoot or shod applications. It is reinforced with a glass fibre grid in sheet form. Its homogeneous wear layer provides a group P of abrasion. According to ISO 22196, **TARASAFE ULTRA H2O** has **anti-bacterial activity** against MRSA of 99% after 24h. It does not contain any heavy metals or CMR 1&2 and it is 100% compliant with REACH. The product emission rate of volatile organic compounds is < 100 microgram/m³ (TVOC after 28 days – ISO 16000 -6). This product is 100% recyclable and contains 18% of mineral material and 22% of inexhaustible material.

Tarasafe Design

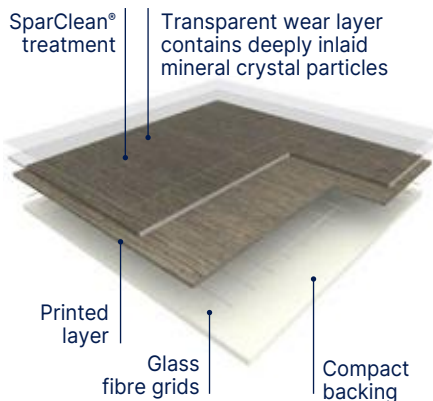

TARASAFE COMPACT DESIGN is a slip resistant vinyl floorcovering in sheet, which transparent wear layer contains deeply inlaid mineral crystal particles for durable shod (R10 according to DIN 51130) and barefoot (B according to DIN 51097) antislip performances. It is available in 6 realistic wood or mineral designs thank to a printed layer. It is reinforced with a glass fibre grid and treated with SparClean® surface treatment, a low maintenance cost effective solution providing extreme resistance from soiling and staining. According to ISO 22196, it has an **anti-bacterial activity** against MRSA of 99% after 24 hours. It is an ideal solution for applications where enhanced slip resistance, durability, hygiene and easy maintenance are required – such as for instance showers, changing rooms, sanitation facilities, laboratories... It does not contain any heavy metals or CMR 1&2 and are 100% compliant with REACH. The product emission rate of volatile organic compounds is < 100 microgram/m³ (TVOC after 28 days – ISO 16000-6). It is 100% recyclable.

Mural Calypso

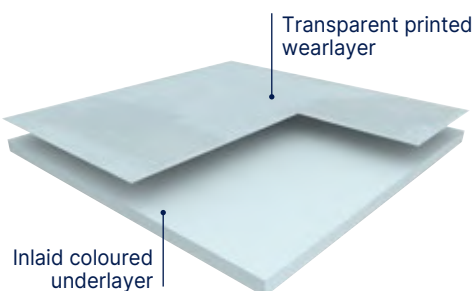

MURAL CALYPSO is a multilayered wall covering in 2 m width roll and with a **B-s2,d0 fire classification** according to EN 13501. It is hot welded with CR41 welding rods for a perfect water tightness. It is made of a printed transparent wear layer and a coloured under layer for a better aspect of the welding. This layer comprises 20% of recycled products. According to ISO 22196, **MURAL CALYPSO** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h. It does not contain any CMR 1 & 2 component and is 100% compliant with REACH. It is 100% recyclable. This wall covering is specially recommended for wet room areas and makes the installation in angles easier thanks to its flexibility. The Shower System is compliant with most laws on "access for all" thanks to the installation in shower without tray.

Gerflor also recommends the Tarasafe compact ranges with surface treatments (SparClean®: Design & Ultra / PUR: Standard) for the use in wet room areas. See pages 240-241

Elegance SD / Tarasafe Ultra H₂O / Tarasafe Design / Mural Calypso



100% recyclable

The SHOWER SYSTEM provides a safe and hygienic solution thanks to:

- Anti-slip resistance floorings
- 100% waterproof installation

			Elegance SD	Tarasafe Ultra H ₂ O	Tarasafe Design	Mural Calypso
Description						
Total thickness	EN ISO 24346	mm	2.4 (on grainside)	2.0 (on grainside)	2.0	0.92
Thickness of wearlayer	EN ISO 24340	mm	2.40	1.0	0.80	0.10
Weight	EN ISO 23997	g/sqm	3100	2400	2500	1610
Width/Length of sheet	EN ISO 24341	cm/ml	200/20	200/20	200/20	200/30
Classification						
Product specification	-	-	EN ISO 10581	EN ISO 10582	EN ISO 10582	EN 15 102
European classification	EN ISO 10874	class	34-43	34-43	34-43	-
Fire rating	EN 13501-1	class	Bfl-s1	Cfl-s1	Bfl-s1	B-s2,d0
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	-
Slip resistance - Pendulum Test (dry & wet)	EN 16165:2021 – Appendix C (BS 7976-2)	PTV	-	> 36	> 36	-
Surface roughness	-	µm	-	Rz > 20	-	-
Slip resistance wet - test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R9	R11	R10	-
Slip resistance wet - bare foot	EN 16165:2021 – Appendix A (DIN 51097)	class	B	C	B	-
Slip resistance - ramp test	EN 13845 (annex C)	class	-	ESf / ESb	ESf / ESb	-
Water tightness	EN 13553	-	OK	OK	OK	-
Slip resistance wet - areas	CTE	class	-	3	-	-
Performances						
Wear resistance	EN 660.2	mm ³	≤ 4.0	≤ 4.0	≤ 2.0	-
Type Binder content	ISO 10581	type	I	-	-	-
Type Binder content	ISO 10582	type	-	I	I	-
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.40	-
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.10	-
Residual indentation (measure)	-	mm	≈ 0.03	≤ 0.03	≤ 0.03	-
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25	0.25	-
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	-	-	SparClean®	-
Chemical products resistance	EN ISO 26987	-	OK	OK	OK	OK
Anti-bacterial activity ⁽¹⁾ (E. coli - S. aureus - MRSA)	ISO 22196	-	-	> 99% ⁽²⁾ inhibits growth	> 99% ⁽²⁾ inhibits growth	> 99% ⁽³⁾ inhibits growth
Environment / indoor air quality						
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10	< 100	< 100	-
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	-
CE marking						
	EN 15102		-	-	-	OK
	EN 14041					-
						-

(1) The implementation of an effective cleaning regime is the most important defence against infection.

(2) Anti-bacterial activity (MRSA)

(3) Anti-bacterial activity (E. coli - S. aureus - MRSA)

Technical solutions

Antislip Floorings - Elegance SD



100% recyclable



0705 Patisson




0704 Raspberry Grey

^ Scale 1



0329 Hazelnut



0705 Patisson



0322 Jicama




Antislip Floorings - Tarasafe Ultra H2O



100% recyclable



7720 Iceberg

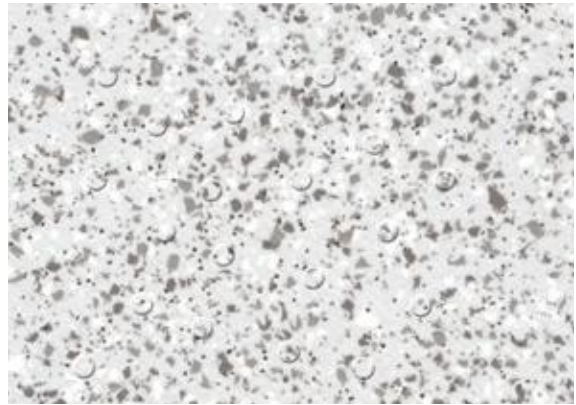

7720 Iceberg

^ Scale 1




7732 Gravel




7746 Stone




7325 Seashore




7418 Marine



7314 Sand



7413 Ocean Blue



7513 Seagrass



Technical solutions

Antislip Floorings - Tarasafe Design



100% recyclable



6079 Esterel Nut New



6079 Esterel Nut New

^ Scale 1



6078 Esterel Clear New



6083 Esterel Blossom New



5755 Lorca Natural New



6171 Lofter Dark Grey



6094 Infinity Sand



Technical solutions

Mural Calypso



Bs2d0



100% recyclable




7004 Prism Haze Pearl



^ Scale 1




7003 Prism Ice



7734 Manhattan Concrete



7728 Manhattan Stone



7721 Manhattan Mist



7009 Fossil Haze



7008 Fossil Ice




7004 Prism Haze Pearl




7002 Bamboo Lotus
Ⓢ



7744 Nordic Milk
Ⓢ



7611 Snow
Ⓢ



7711 Ice
Ⓢ



7000 Bamboo Snow Pearl
Ⓢ



7753 Nordic Zen
Ⓢ



7104 Melon
Ⓢ



7715 Crystal
Ⓢ



7001 Bamboo Haze Pearl
Ⓢ



7005 Blossom Snow Pearl
Ⓢ



7201 Moonlight
Ⓢ




7714 Frost
Ⓢ



7740 Fabric Silk
Ⓢ



7006 Blossom Haze Pearl
Ⓢ



7309 Lotus
Ⓢ



7408 Skyline
Ⓢ



7736 Fabric Wool
Ⓢ



7007 Blossom Lichen
Ⓢ



7311 Linen
Ⓢ



7012 Breeze
Ⓢ



7414 Fabric Denim
Ⓢ



7011 Lichen
Ⓢ



7712 Shadow
Ⓢ




7010 Haze
Ⓢ

Technical solutions

Wallcoverings

Mural Ultra Design / Mural Club / Mural Calypso

Mural Ultra Design

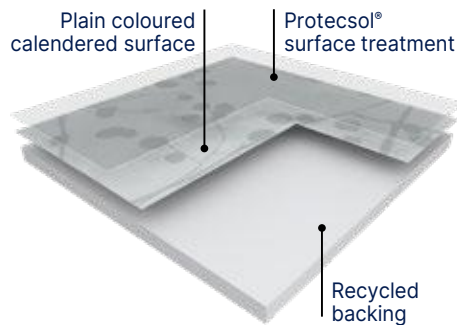

MURAL ULTRA DESIGN is a 2m width flexible wall covering vinyl sheet which has a thickness of 1.5mm for an extended durability. Fully resistant to impact (EN 259), **MURAL ULTRA DESIGN** acts as a buffer against damage from beds, trolleys, indoor motorized vehicles and other transportation systems. It is therefore ideal for use as a cladding in large public buildings such as hospitals, care institutions, dental and veterinary surgeries, schools, clean rooms, stores and supermarkets, warehouse and storage areas.


It is made of a 0.10mm printed design layer and a 1.4mm **coloured** resistance layer which will ensure a perfect welding aspect. It has a **B-s2,d0** fire classification (EN 13501-1) which complies with most European fire regulations.

According to ISO 22196, **MURAL ULTRA DESIGN** has anti-bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h00. It is made of a coloured backing which comprises up to **30%** recycled products. It is 100 % recyclable, and the components are 100% compliant with Reach

MURAL ULTRA DESIGN benefits from the Protectsol® surface treatment which ensures easy maintenance (EN 233) and avoids staining of chemical products (EN ISO 26987) used in healthcare like iodine alcohol, Betadine, eosin and antibacterial hand gel. It is also resistant to decontamination (class 3 according to ISO 14644-1). The joints are hot-welded to ensure perfect water-tightness.

MURAL ULTRA DESIGN can be welded with 2mm flooring to ensure a perfect hygiene by avoiding gaps.

Mural Club

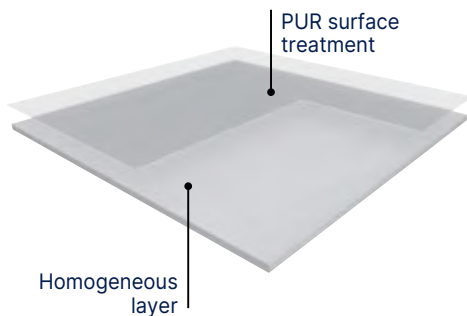

MURAL CLUB is a homogeneous wall covering in 2 m width roll and with a B-s2,d0 fire classification. It is designed to be a permanent wall covering. It is hot welded with CR40 welding rods for better hygiene. It is made of calendered layer with colour throughout the whole thickness for a nicer aspect of the welding. This layer comprises at least 10% of recycled products. It does not contain any CMR 1 & 2 component and is 100% compliant with REACH. It is 100% recyclable.

MURAL CLUB benefits from a **PUR** surface treatment which provides good resistance to chemical products and makes maintenance easier.

According to ISO 22196, **MURAL CLUB** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h.

Full resistant to impact, it acts as a buffer against damage from beds, trolleys and indoor motorized vehicles and other transportation systems. **MURAL CLUB** is fully impact resistant and is therefore ideal for use as a cladding in large public buildings such as hospitals care institutions dental and veterinary surgeries, clean rooms, stores and supermarkets, warehouse and storage areas.

Mural Calypso

See page 248

- Easily seam welded to produce continuous surfaces.
- Create a safe and hygienic environment.
- Flexible and easy to cover.
- Ideal for walls and ceilings.
- Recyclable and Eco responsible.

			Mural Ultra Design	Mural Club	Mural Calypso
Description					
Total thickness	EN ISO 24346	mm	1.5	1.00	0.92
Thickness of transparent decorative layer	-	mm	0.10	-	0.10
Thickness of resistance layer	-	mm	1.4	1.00	-
Weight	EN ISO 23997	g/sqm	2450	1780	1610
Width/Length of sheet	EN ISO 24341	cm/ml	200 / 21	200 / 30	200 / 30
Classification					
Product specification	-	-	EN 259-1	EN 15 102	EN 15 102
Fire rating	EN 13501-1	class	B-s2,d0	B-s2,d0	B-s2,d0
Performances					
Curving after exposure to heat	ISO 23999 - EN 434	-	≤ 2 mm	-	-
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	ProtecSol®	PUR	-
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK	OK	OK
Cleanability	EN 233		Washable and brushable	Washable and brushable	Washable and brushable
Emission of particles	ISO 14644-1	class	Class 3	-	-
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽²⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth
Resistance to impacts	EN 259-2	-	No visible bursting or cracking	-	-
Scratch resistance	NF EN 14565 annex A	-	No visible deterioration	-	-
Determination of flexibility	EN ISO 24344	-	No damage, no cracking	-	-
Resistance of welded joints	EN 684	N/50mm	≥ 250	-	-
Environment / air quality					
TVOC after 28 days	ISO 16516	µg/ m ³	<10	-	-
Recyclability	-	-	100%	-	-
Recycled content	-	-	Up to 30%	-	-
CE marking					



EN 15102

OK

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
 (2) The implementation of an effective cleaning regime is the most important defence against infection.

Technical solutions

Mural Ultra Design



Bs2d0

Protecsol®



100% recyclable

IN STOCK



8408 Skyline



^ Scale 1



8011 Lichen



8744 Nordic Milk




8309 Lotus



8002 Bamboo Lotus



8408 Skyline



8611 Snow



8000 Bamboo Snow Pearl



8711 Ice



8740 Fabric Silk



8721 Manhattan Mist




8010 Haze



8005 Blossom Snow Pearl




ON DEMAND
Minimum order quantity 500sqm



8201 Moonlight
Ⓞ



8712 Shadow
Ⓞ



8714 - Frost
Ⓞ



8003 Prism Ice
Ⓞ



8104 Melon
Ⓞ



8311 Linen
Ⓞ



8715 - Crystal
Ⓞ



8004 Prism Haze Pearl
Ⓞ



8001 Bamboo Haze Pearl
Ⓞ



8414 Fabric Denim
Ⓞ



8012 - Breeze
Ⓞ



8008 Fossil Ice
Ⓞ




8006 Blossom Haze Pearl
Ⓞ



8736 Fabric Wool
Ⓞ



8728 Manhattan Stone
Ⓞ




8009 Fossil Haze
Ⓞ



8007 Blossom Lichen
Ⓞ



8753 Nordic Zen
Ⓞ



8734 Manhattan Concrete
Ⓞ

Technical solutions

Mural Club



PUR



100% recyclable




0001 White



0005 Yellow


^ Scale1



0006 Grey



0004 Green



0003 Sand



0007 Blue



0001 White



Mural Calypso (See page 248)

Mural Calypso (See page 248)




Bs2d0



100% recyclable



7005 Blossom Snow Pearl

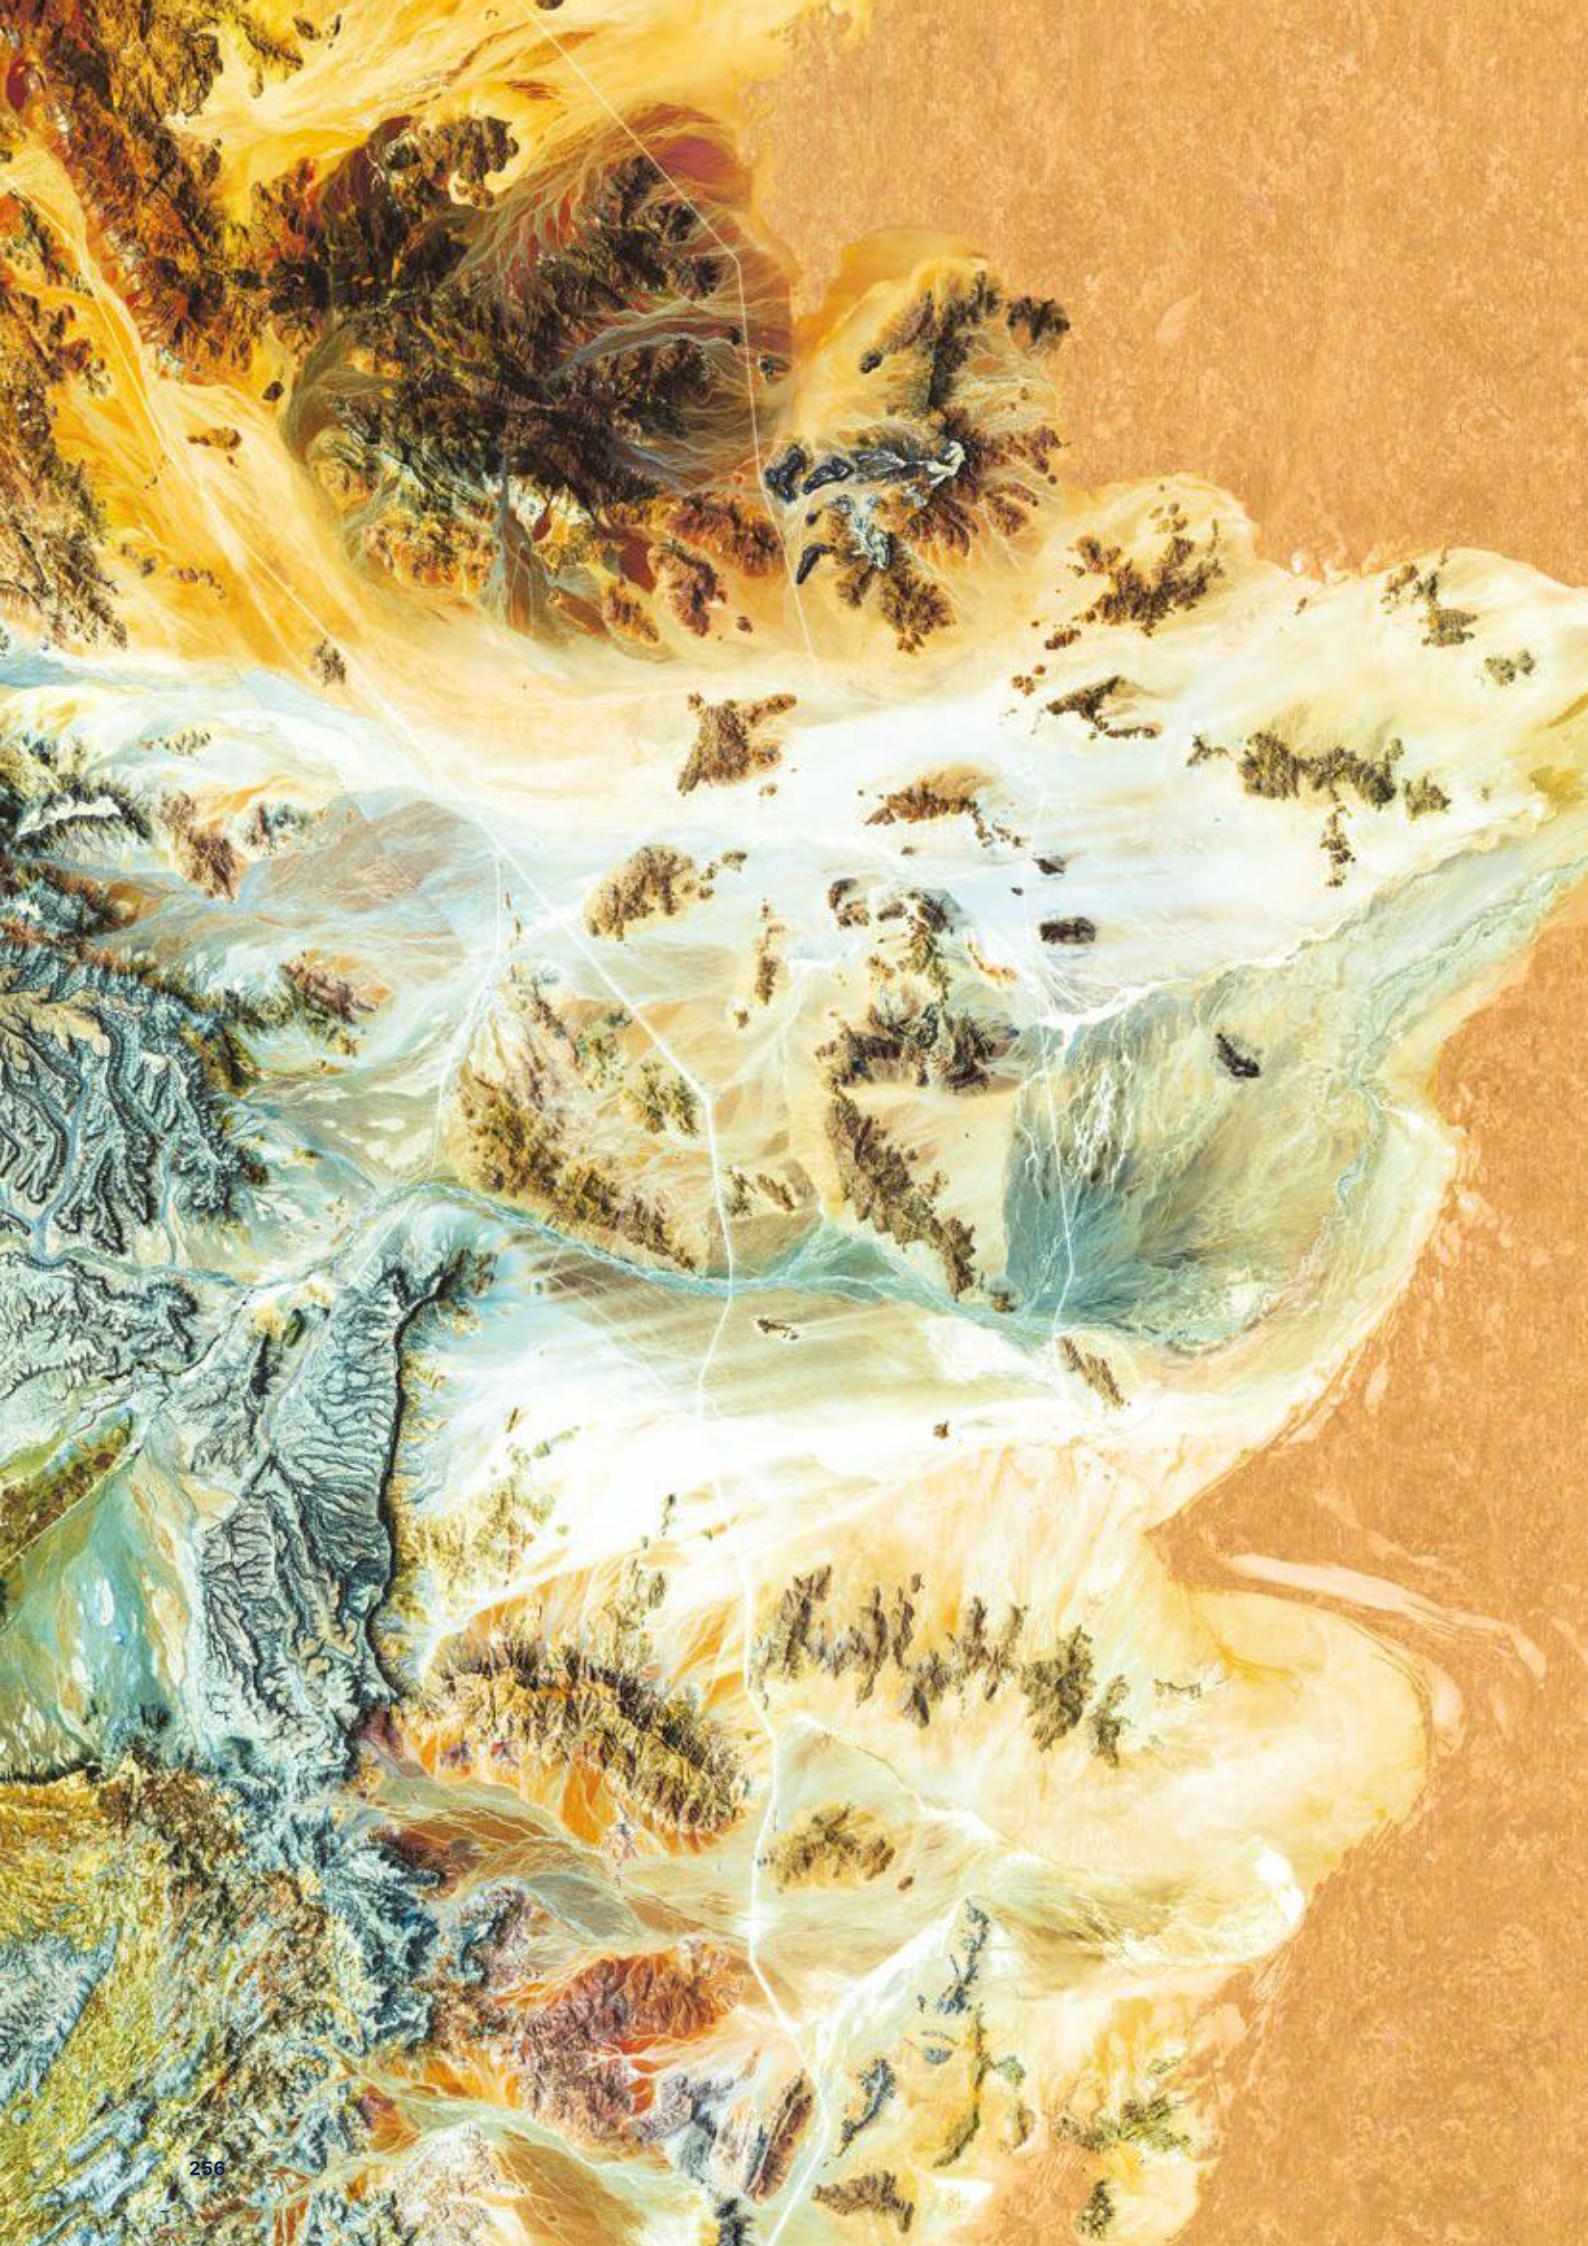

Creative by Nature

DLW Linoleum

pages 256-285

266. Compact Linoleum

- 268. Marmorette
- 271. Arabesque
- 272. Colorette
- 273. Uni Walton
- 274. Lino Art

278. Acoustic Linoleum

- 280. Marmorette Acoustic
- 280. Marmorette AcousticPlus
- 281. Colorette AcousticPlus
- 281. Uni Walton AcousticPlus
- 281. Lino Art Urban AcousticPlus

282. Technic Linoleum

- 283. Linodur -
High Mechanical Traffic Resistance
- 283. Marmorette LCH -
Dissipative Linoleum for ESD areas

KEY POINTS TO REMEMBER ABOUT GERFLOR DLW LINOLEUM

- 1** The DLW brand stands for **150 years of experience** and has been considered a **reference since its creation**.
- 2** The greenest solution on the market:
98% bio based material / 76% rapidly renewable / up to 40% recycled content.
- 3** **Unlimited possibilities** in terms of **creativity**, allowing unique and **differentiating designs**.
- 4** Adapted to numerous types of buildings, from **education** to **healthcare**, from **public buildings** to **offices**, thanks to a complete portfolio of **compact, acoustic, sport** and **industrial solutions**.

DLW Linoleum

Sustainable by Nature

Natural Composition

98%
Natural

76%
Rapidly
renewable

Up to
40%
Recycled content



Eco labels

Quality



Life Cycle Analysis




Indoor Air Quality



Cradle to Cradle Certified™ Silver⁽¹⁾

Developed using circular economy principles

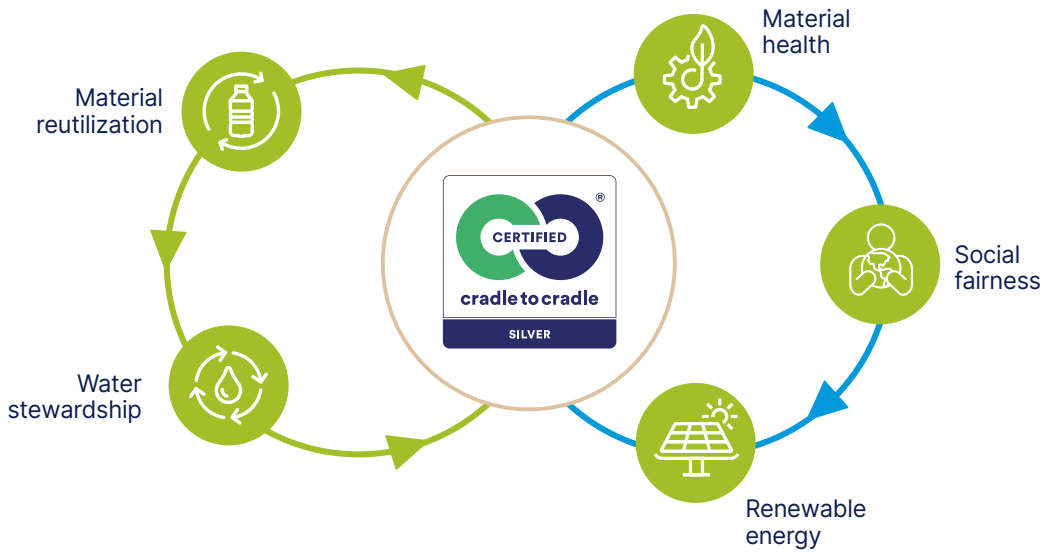

(1) Marmorette, Arabesque, Colorette, Uni Walton, Lino Art
Cradle Certified™ is a registered trademark of the Cradle to Cradle Products Innovation Institute.

Carbon neutral⁽²⁾

Third party certified EPD indicates carbon neutrality during the first stages of its life cycle.



DLW
Linoleum

(2) From Cradle to Gate: includes raw materials and manufacturing process (A1-A3 stages of EPD)
Source: Environmental Performance Declaration (EPD). Certified by Enea. More information on gerflor.com

DLW Linoleum

Protective by Nature



**New solvent-free surface protection,
developed exclusively for linoleum**

Extremely hard-wearing due to triple laser uv
cross-linking technology



Indoor Air Quality



- Very low VOC emissions
TVOC < 10 microgram/m³
after 28 days (ISO 16516)




- Certified according to the
most demanding standards



Natural Design

Matt Effect

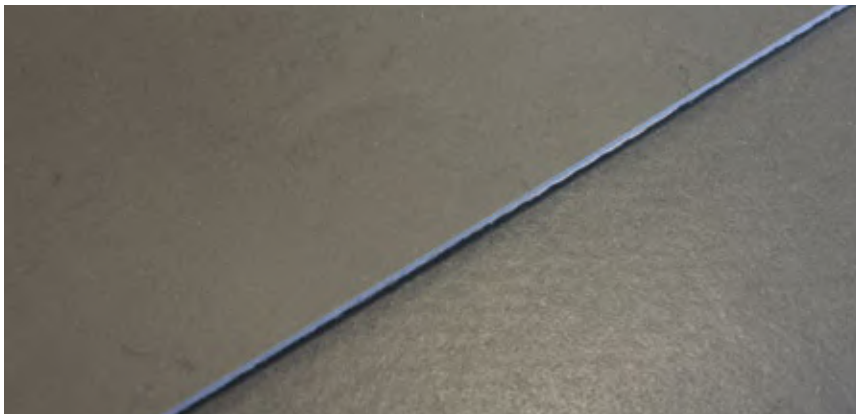

LPX / PUR / Others





Easy To Clean



Standard Linoleum



Neocare™

- Dirt and stain barrier
- Cost effective maintenance
- Easy cleaning with a mop or any modern cleaning equipment

Detailed cleaning protocol available on www.gerfor.com




Hygiene

DLW Linoleum floorings contribute to lower the microbe load (bacteria, virus, ...) and to minimise the risk of a contamination chain.

- Excellent resistance against disinfection chemicals
- Anti-viral and anti-bacterial activity



Durable



- No sealing and waxing needed
- Higher scratch resistance
- Easy to repair: in case of heavily damaged flooring, DLW linoleum can be easily repaired using the spray buffing method (red disk)

WAXING

Neocare™ is a high performing surface treatment protecting against dirt, stains and scratches and does not require any sealing & waxing throughout the life of the product. Waxing remains an option.



Black disk




Uni Walton
0100 Ocean Blue

262

Lino Art Flow
0030 Rain

DLW Linoleum

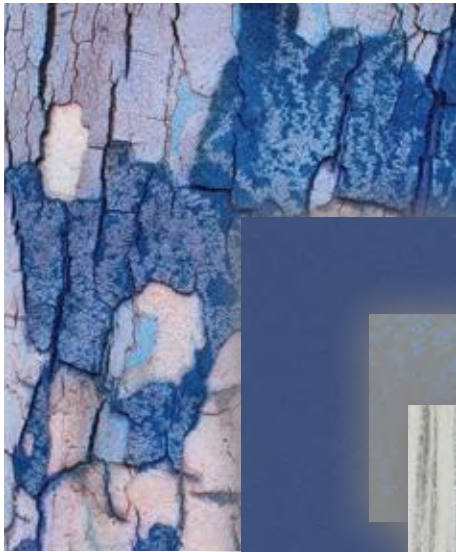

Lino Art Urban
0566 Shining Blue



Uni Walton
0100 Ocean Blue



Lino Art Flow
0030 Rain



Mix and match

Visualize your project

interiordesigner.gerflor.com



Lino Art Urban
0555 Flashy Street Grey




Lino Art Flow
0024 Magma



Marmorette
0117 Mandarin Orange



DLW Linoleum

			Marmorette		Arabesque / Colorette / Uni Walton	
Description			R10	Bfl-s1		
Total thickness	EN ISO 24346	mm	2.0 / 2.5 / 3.2	2.5	2.5	2.5
Backing	-	-	Jute fabric		Jute fabric	
Thickness of cork/foam backing	EN ISO 24340	-	-			
Weight	EN ISO 23997	g/sqm	2400 / 2900 / 3800	2900	2900	2900
Width of sheet	EN ISO 24341	cm	200		200	
Length of sheet	EN ISO 24341	m	20-31		20-31	
Classification						
Norm/Product specification	-	-	EN ISO 24011		EN ISO 24011	
European classification	EN ISO 10874	class	23 / 34 / 43		23 / 34 / 43	
Classement UPEC	-	-	U4P3E1/2C2		U4P3E1/2C2	
Avis Technique	-	-	12-12-1617_V1		12-12-1617_V1	
Fire rating**	EN 13501-1	class	Cfl-s1	Bfl-s1	Cfl-s1	
Slip resistance	EN 16165:2021 – Appendix B (DIN 51 130)	class	R9	R10	R9	R9
Impact sound insulation	EN ISO 717-2	dB	3 dB / 5 dB / 6 dB	5 dB	5 dB	5 dB
Performances						
Residual indentation	EN ISO 24343-1	mm	≤ 0.09 / ≤ 0.11	≤ 0.11	≤ 0.11	≤ 0.11
Colour fastness	EN ISO 105-B02	rating	≥ 6		≥ 6	
Vertical resistance	EN 1081	Ohm	-		-	
Point contact resistance	VDE 0100	kOhm	> 200		> 200	
Static electrical propensity	EN 1815	kV	≤ 2		≤ 2	
Castor chair test (Type W)	ISO 4918	-	OK		OK	
Flexibility	ISO 24344	mm	Ø 40 (2.5 mm)		Ø 40	
Flexibility / average measured value	ISO 24344	mm	Ø 30 (2.5 mm)		Ø 30	
Thermal resistance	EN 12667	(m ² /K)/W	0.012 / 0.015 / 0.018	0.015	0.015	0.015
Thermal conductivity	EN ISO 10456	W/(m.K)	0.17		0.17	
Surface treatment	-	-	Neocare™		Neocare™	
Chemical products resistance	EN ISO 26987	-	OK		OK	
Anti-bacterial activity (E. coli – S. aureus – MRSA) after 24 h***	EN ISO 22196 / JIS Z 2801	-	> 99.99% inhibits growth		> 99.99% inhibits growth	
Anti-viral activity (Human coronavirus) after 5 h***	ISO 21702	-	> 98.65% virucidal activity		> 98.65% virucidal activity	
Indoor air quality						
TVOC after 28 days	EN 16516	microgram/m ³	< 10		< 10	
Circular economy						
Certification	Cradle to Cradle	-	Silver	-	Silver	
CE marking						
	EN 14041 : 2004 AC : 2006	-				

* Roll dimension for SRP article code: R929/R930/R931/R932/R933/R934/R935: 1,96m x 18-29lm

** Glued according to certificate. DOP numbers available from your local branch.

*** The implementation of an effective cleaning method is the best defence against infection.





Depending on light exposure, the product color can vary, due to linoleum natural oxidization process. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.

Lino Art Urban / Flow / Metallic / Star	Marmorette Acoustic	Marmorette Acoustic Plus Colorette Acoustic Plus Uni Walton Acoustic Plus Lino Art Urban Acoustic Plus	Linodur	Marmorette LCH
2.5	4.0	4.0	4.0	2.5
Jute fabric	Cork and jute fabric backing	Foam backing	Jute fabric	Jute fabric
-	2	1.5	-	-
2900	3900	3500	4700	3000
200	200	200*	200	200
20-31	20-31	20-31*	app. 28	20 - 31
EN ISO 24011	EN 687	EN 686	EN ISO 24011	EN ISO 24011
23 / 34 / 43	23 / 33 / 41	23 / 33 / 41	23 / 34 / 43	23 / 34 / 43
-	-	-	-	-
-	-	-	-	-
Cfl-s1	Cfl-s1	Cfl-s1	Cfl-s1	Cfl-s1
R9	R9	R9	R10	R9
5 dB	15 dB	19 dB	8 dB	3 dB
≤ 0.11	≤ 0.40	≤ 0.30	≤ 0.20	≤ 0.15
≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
-	-	-	-	10 ⁶ ≤ R ≤ 10 ⁸
> 200	> 200	> 200	>200	>100
≤ 2	≤ 2	≤ 2	≤ 2	≤ 2
OK	OK	OK	OK	OK
Ø 40	Ø 60	Ø 40	Ø 60	Ø 40
Ø 30	Ø 30	Ø 35	Ø 50	Ø 30
0.015	0.04	0.044	0.023	0.015
0.17	0.17	0.0937	0.17	0.17
Neocare™	Neocare™	Neocare™	Neocare™	Neocare™
OK	OK	OK	OK	OK
> 99.99 % inhibits growth	> 99.99 % inhibits growth	> 99.99 % inhibits growth	> 99.99 % inhibits growth	> 99.99 % inhibits growth
> 98.65 % virucidal activity	> 98.65 % virucidal activity	> 98.65 % virucidal activity	> 98.65 % virucidal activity	> 98.65 % virucidal activity
< 10	< 10	< 10	< 50	< 10
Silver	Silver	Bronze	Silver	-



Compact Linoleum

Marmorette / Arabesque /
Colorette / Uni Walton / Lino Art _____

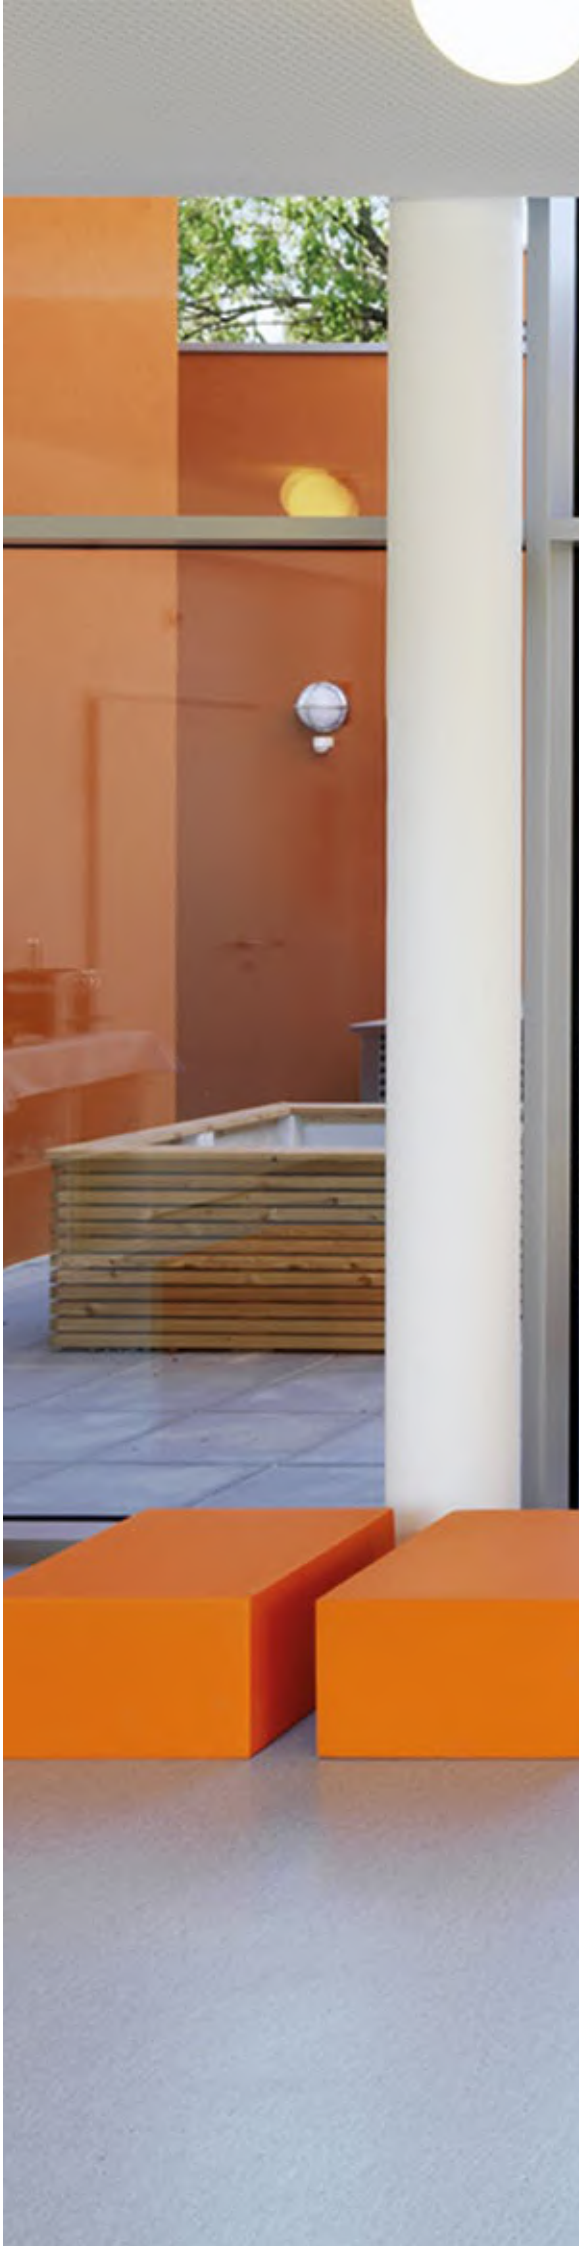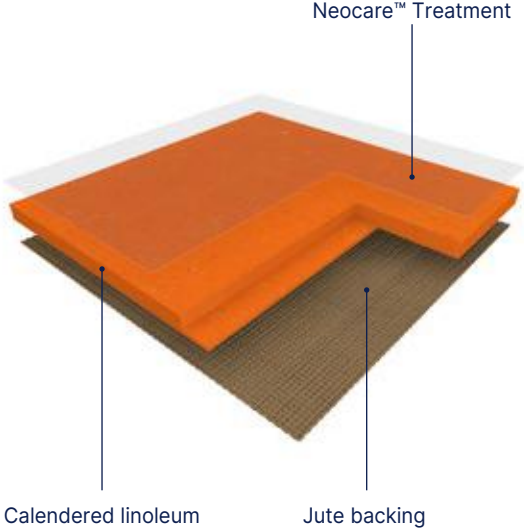



Marmorette / Arabesque / Colorette / Uni Walton / Lino Art _____

MARMORETTE is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2400g/sqm in 2.0mm, 2900g/sqm in 2.5mm and 3800g/sqm in 3.2mm. It features a marbled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among of which 76% are rapidly renewable.

ARABESQUE is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900g/sqm in 2.5mm. It features a marbled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among of which 76% are rapidly renewable.

COLORETTE is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900g/sqm in 2.5mm. It features a speckled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among of which 76% are rapidly renewable.

UNI WALTON is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900g/sqm in 2.5mm. It features a uni design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among of which 76% are rapidly renewable.

LINO ART is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900g/sqm in 2.5mm. It features a striated design (FLOW), a scattered metallic design (METALLIC), a scattered colour chips design (STAR), a concrete design (URBAN) and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among of which 76% are rapidly renewable.

ARABESQUE, COLORETTE, MARMORETTE, UNI WALTON, LINO ART

The floorings are produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring.

This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes.

The products ensure perfect indoor air quality (TVOC at 28 days (EN 16516) < 10 microgram/m³) and are classified A + (the best class) in the context of health labeling. It is Floorscore®, M1 and Blue Angel certified.

The floorings are 100% recyclable, are composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, are REACH compliant and rated Cfl-s1 for fire resistance.

Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the floorings are Cradle to Cradle certified™ Silver. They are Environmental Performance Declaration (EPD) certified by an external laboratory indicating carbon neutrality during the first stages of their life cycle ("from cradle to gate").

The Camouflage (Arabesque, Marmorette) or Uni (Colorette, Uni Walton, Lino Art) welding rod makes the connections between the strips invisible.

They are antistatic, antibacterial according to ISO 22196 / JIS Z 2801 and antiviral according to ISO 21702.

Compact Linoleum

Marmorette



Neocare™



0056 Foggy Blue
2.0 mm / 2.5 mm / 3.2 mm



0253 Pebble Grey
2.5 mm



0252 Light Grey
2.5 mm



0251 Cream
2.5 mm



0053 Ice Grey
2.0 mm / 2.5 mm / 3.2 mm



0254 Mineral Grey
2.5 mm




0155 Smoked Pearl
2.5 mm



0106 Hazelnut Shake
2.5 mm



0055 Ash Grey
2.0 mm / 2.5 mm / 3.2 mm



0166 Clay
2.5 mm



0091 Shiitake Mushroom
2.5 mm



0146 Beeswax Beige
2.5 mm



0054 Concrete Patty
2.5 mm



0158 Tabac Grey
2.5 mm



0153 Greystone Grey
2.5 mm



0090 Soapstone
2.5 mm



0160 Industrial Grey
2.0 mm / 2.5 mm



0050 Quartz Grey
2.0 mm / 2.5 mm / 3.2 mm



0164 Milk Coffee
2.5 mm



0003 Dark Brown
2.5 mm



0096 Midnight Grey
2.5 mm



0059 Plumb Grey
2.0 mm / 2.5 mm / 3.2 mm



0108 Mokka Brown
2.5 mm



0089 Pecan Pie
2.5 mm

Acoustic 15 dB in stock

AcousticPlus 19 dB in stock

R10: in stock

Bfl-s1: in stock

All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1500 sqm. Below 1500 sqm, use Korkment underlayer.
All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.

Marmorette



Neocare™

2.0mm

2.5mm

3.2mm



0070 Rocky Brown
2.0 mm / 2.5 mm / 3.2 mm

A+ R10 Bfl

^ Scale 1



0092 Beach
2.5 mm



0040 Light Sahara
2.0 mm / 2.5 mm

A+



0042 Shortcrust
2.5 mm




0072 Golden Yellow
2.5 mm



0172 Papaya Orange
2.5 mm



0076 Pale Yellow
2.5 mm



0098 Desert Beige
2.0 mm / 2.5 mm

A



0073 Spicy Orange
2.5 mm

A+



0173 Melon Orange
2.5 mm



0243 Marble Beige
2.5 mm



0045 Sand Beige
2.0 mm / 2.5 mm

A R10 Bfl



0117 Mandarin Orange
2.5 mm



0118 Chili Red
2.5 mm



0018 Lobster Red
2.5 mm

A+



0145 Banana White
2.5 mm



0119 Terracotta
2.5 mm



0019 Sunset Orange
2.5 mm

A



0075 Light Aurora
2.5 mm



0211 Pink
2.5 mm

Compact Linoleum

Marmorette



Neocare™

2.0mm

2.5mm

3.2mm



0130 Antique Green **A+**
2.5 mm



0049 Royal Blue
2.5 mm / 3.2 mm



0121 Blue Eyes
2.5 mm



0100 Frog Green
2.5 mm



0043 Leaf Green
2.5 mm



0148 Ink Blue
2.5 mm



0023 Dusty Blue **A R10 Bfl**
2.0 mm / 2.5 mm / 3.2 mm



0132 Lime Green **A+**
2.5 mm



0099 Grey Turquoise
2.5 mm



0128 Violet
2.5 mm



0122 Fluffy Blue
2.5 mm



0138 Khaki
2.5 mm



0022 Autumn Blue **A+**
2.5 mm / 3.2 mm



0224 Mystery Blue
2.5 mm



0026 Sky Blue
2.5 mm



0083 Jungle
2.5 mm



0136 Turquoise Bay
2.5 mm



0149 Dark Blue
2.5 mm



0028 Dive
2.5 mm



0129 Curacao Petrol



0129 Curacao Petrol **A+**

^ Scale 1

A Acoustic 15 dB in stock

A+ AcousticPlus 19 dB in stock

R10 R10: in stock

Bfl Bfl-s1: in stock

All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1500 sqm. Below 1500 sqm, use Korkment underlayer.
All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.


Arabesque



Neocare™



0304 Seravezza



0302 Antico
2.5 mm



0305 Monarca
2.5 mm



0303 Verona
2.5 mm



0306 Prato
2.5 mm



0301 Alcino
2.5 mm



0304 Seravezza
2.5 mm

^ Scale 1

Compact Linoleum

Colorette



Neocare™




0001 Banana Yellow




0001 Banana Yellow
2.5 mm




^ Scale 1



0052 Oxyd Grey
2.5 mm



0071 Straw Beige
2.5 mm



0073 Sand Yellow
2.5 mm



0132 Spicy Green
2.5 mm



0059 Stone Grey
2.5 mm



0058 Aluminium Grey
2.5 mm




0171 Sunrise Orange
2.5 mm



0006 Vivid Green
2.5 mm



0080 Elephant Grey
2.5 mm



0012 Light Beige
2.5 mm




0016 Deep Orange
2.5 mm



0123 Poppy Blue
2.5 mm



0081 Private Black
2.5 mm



0043 Light Mud
2.5 mm



0170 Kumquat Orange
2.5 mm



0004 Bluebird
2.5 mm



0118 Power Red
2.5 mm



0110 Cadillac Pink
2.5 mm



A+ AcousticPlus 19 dB in stock

All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1500 sqm. Below 1500 sqm, use Korkment underlayer.
All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.


Uni Walton



Neocare™



0100 Ocean Blue
2.5 mm ^ Scale 1

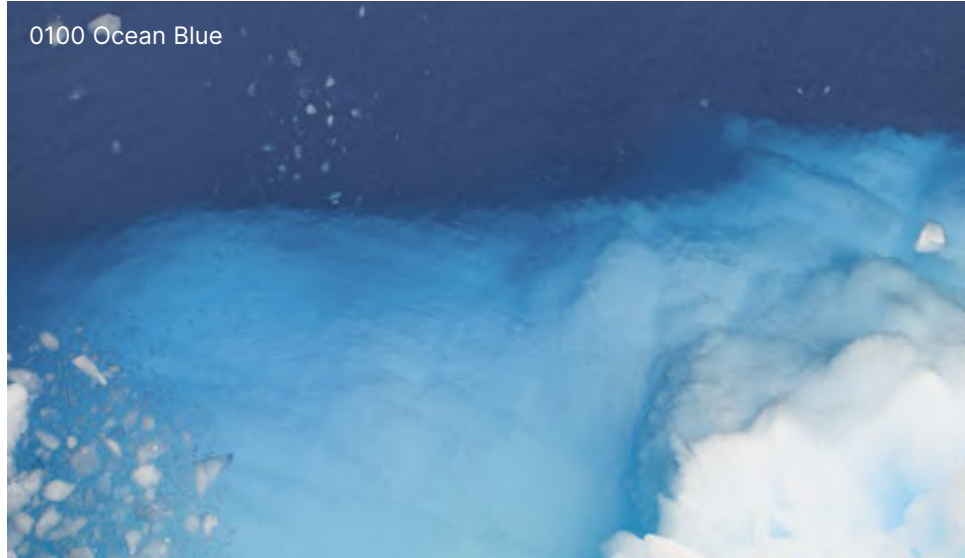


0100 Ocean Blue



0062 Mediterranean Orange
2.5 mm




0043 Neutral Beige
2.5 mm



0059 Frost Grey
2.5 mm




0095 Spring Blue
2.5 mm



0010 Pompeji Red
2.5 mm



0085 Warm Concrete Grey
2.5 mm



0081 Nickel Grey
2.5 mm




0083 Architects Grey
2.5 mm




0088 Chestnut
2.5 mm



0090 Olive
2.5 mm




0082 Broken Grey
2.5 mm



0080 Black
2.5 mm



0060 Deep Brown
2.5 mm



0058 Clay Grey
2.5 mm



0035 Racing Green
2.5 mm

DLW
Linoleum

A+ AcousticPlus 19 dB in stock

All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1500 sqm. Below 1500 sqm, use Korkment underlayer.
All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.

Compact Linoleum

Lino Art - Urban



Neocare™


2.5 mm



0554 Concrete Grey




0551 Flashy Asphalt Grey
2.5 mm

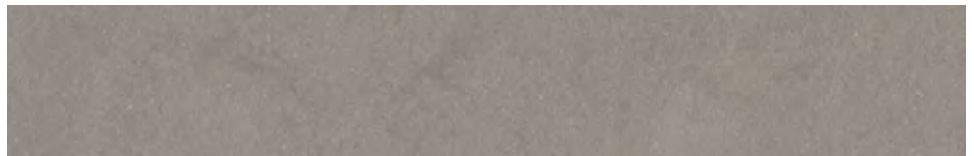

0554 Concrete Grey
2.5 mm


A+

^ Scale 1



0552 Silver Grey
2.5 mm

A+




0564 Natural Stone
2.5 mm

A+



0555 Flashy Street Grey
2.5 mm

A+



0550 Beton Soft Grey
2.5 mm




0567 Shining Green
2.5 mm




0556 Mud Grey
2.5 mm

A+



0557 Urban Grey
2.5 mm



0558 Screed Grey
2.5 mm

A+



0566 Shining Blue
2.5 mm




0562 Titan Grey
2.5 mm



0560 Bold Grey
2.5 mm

A+



0559 Vintage Grey
2.5 mm



0565 Graphite Grey
2.5 mm



0563 Zinc Grey
2.5 mm



0553 Dark Concrete Grey
2.5 mm

A+



0561 Pitch Black
2.5 mm

A+


A+ AcousticPlus 19 dB in stock

All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1500 sqm. Below 1500 sqm, use Korkment underlayer.
All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.

Lino Art - Star



Neocare™

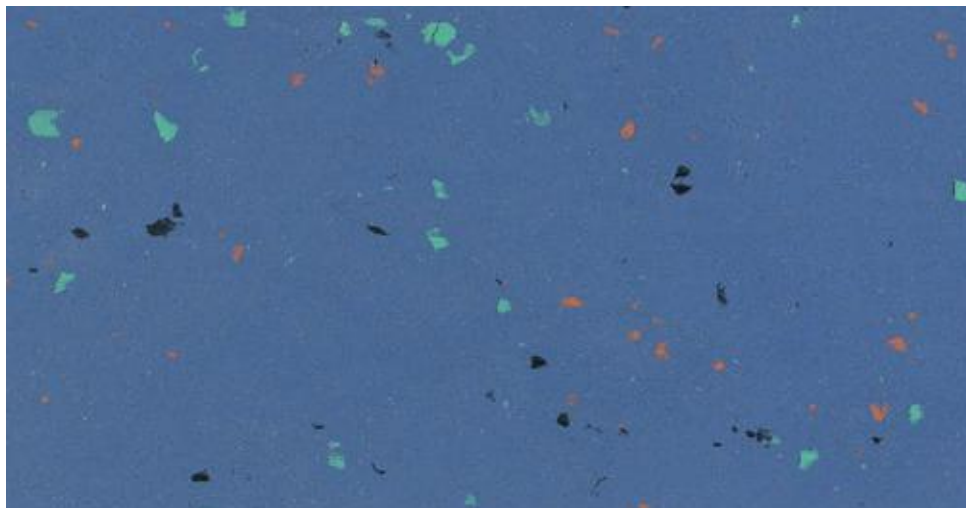

0025 Clear Blue
2.5 mm

^ Scale 1



0020 Aqua Turquoise
2.5 mm



0001 Lemon Yellow
2.5 mm



0092 Stratiatella
2.5 mm



0030 Apple Green
2.5 mm



0075 Apricot
2.5 mm



0059 Dusty Grey
2.5 mm



0023 Blue Turquoise
2.5 mm



0015 Glaring Red
2.5 mm



0090 Smooth Grey
2.5 mm



0094 Bubble Gum
2.5 mm




0085 Mid Grey
2.5 mm

Compact Linoleum

Lino Art - Metallic



Neocare™

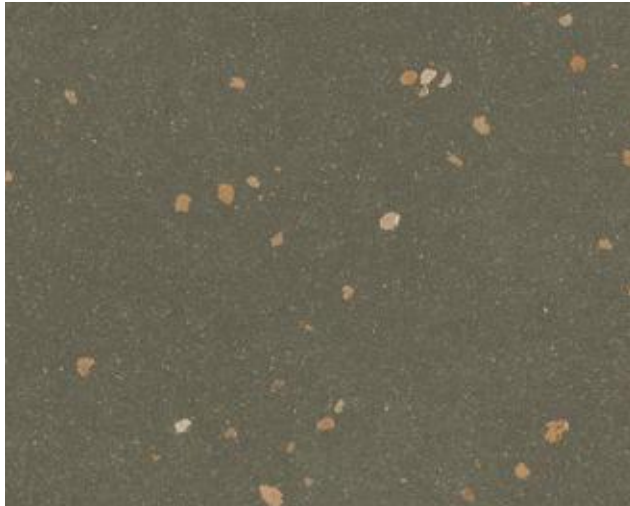

0072 Olive Green
2.5mm

^ Scale 1



0078 Petrol Blue
2.5 mm



0070 Cool Grey
2.5 mm



0083 Aluminio Light Grey
2.5 mm



0068 Bottle Green
2.5 mm



0074 Burned Siena
2.5 mm



0080 Firmament Black
2.5 mm



0076 Salsa
2.5 mm



0072 Olive Green

Lino Art - Flow



Neocare™



0030 Rain
2.5 mm


^ Scale 1




0030 Rain



0012 Waterfall
2.5 mm




0048 Travertin
2.5 mm



0043 Pulp Greige
2.5 mm



0024 Magma
2.5 mm



0036 Shaal Concrete
2.5 mm



0050 Grey Line
2.5 mm



0005 Bamboo
2.5 mm



0162 Bark
2.5 mm




0083 Light Grey
2.5 mm


All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1500 sqm. Below 1500 sqm, use Korkment underlayer.
All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.

Acoustic Linoleum


Marmorette AcousticPlus / Colorette AcousticPlus _____

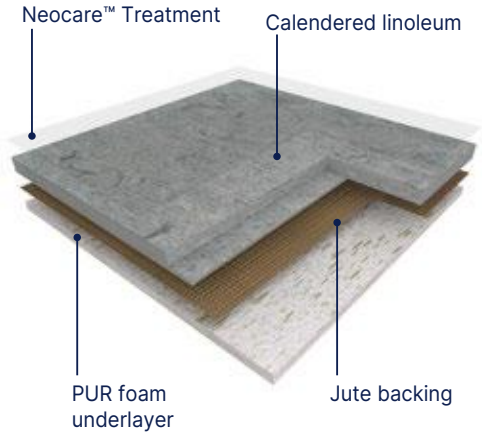

Marmorette Acoustic _____

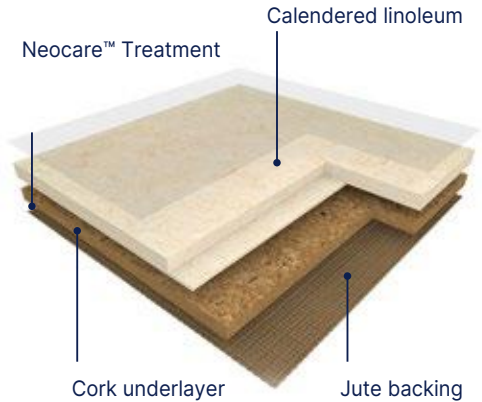

Korkment: Cork Acoustic Underlayer _____



2.0 mm underlayer (weight 1.2 kg/sqm)
15 dB impact sound reduction

Ref R1020102





Marmorette AcousticPlus / Colorette AcousticPlus Uni Walton AcousticPlus / Lino Art Urban AcousticPlus

MARMORETTE ACOUSTICPLUS is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a marbled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, minerals and jute fabric), rapidly renewable and features a 1,5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

COLORETTE ACOUSTICPLUS is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a speckled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, minerals and jute fabric), rapidly renewable and features a 1,5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

UNI WALTON ACOUSTICPLUS is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a uni design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, minerals and jute fabric), rapidly renewable and features a 1,5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

LINO ART URBAN ACOUSTICPLUS is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a concrete design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, minerals and jute fabric), rapidly renewable and features a 1,5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

Marmorette Acoustic

MARMORETTE ACOUSTIC is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3900g/sqm in 4.0mm. It features a marbled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 2mm cork underlayer, ensuring up to 15dB impact sound reduction.

Acoustic Linoleum

The floorings are produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes. The products ensure perfect indoor air quality (TVOC at 28 days (EN 16516) < 10 microgram/m³) and are classified A + (the best class) in the context of health labeling. They are Floorscore®, M1 and Blue Angel certified. The floorings are 100% recyclable, are composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, are REACH compliant and rated Cfl-s1 for fire resistance. Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the floorings are Cradle to Cradle certified™ Bronze (Marmorette AcousticPlus, Colorette AcousticPlus) and Cradle to Cradle certified™ Silver (Marmorette Acoustic). Their Environmental Performance Declaration (EPD) certified by an external laboratory, indicate carbon neutrality during the first stages of their life cycle ("from cradle to gate"). The Camouflage (Arabesque, Marmorette) or Uni (Colorette, Uni Walton, Lino Art) welding rod makes the connections between the strips invisible. They are antistatic, antibacterial according to ISO 22196 / JIS Z 2801 and antiviral according to ISO 21702.

Acoustic Linoleum

Marmorette Acoustic




15 dB

Neocare™



0019 Sunset Orange
4.0 mm

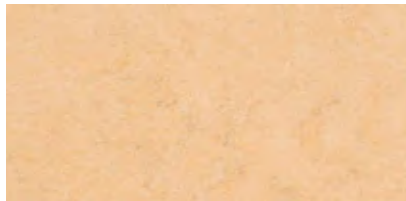

0098 Desert Beige
4.0 mm



0045 Sand Beige
4.0 mm



0059 Plumb Grey
4.0 mm



0053 Ice Grey
4.0 mm



0023 Dusty Blue
4.0 mm

*All other colours can be manufactured in Acoustic 15 dB version.
Special request - Minimum order quantity: 1500 sqm. Below 1500 sqm, use Korkment underlayer.*

Marmorette AcousticPlus



19 dB

Neocare™



0129 Curacao Petrol
4.0 mm



0130 Antique Green
4.0 mm




0022 Autumn Blue
4.0 mm



0132 Lime Green
4.0 mm




0018 Lobster Red
4.0 mm




0073 Spicy Orange
4.0 mm




0070 Rocky Brown
4.0 mm




0040 Light Sahara
4.0 mm




0164 Milk Coffee
4.0 mm




0158 Tabac Grey
4.0 mm



0096 Midnight Grey
4.0 mm



0059 Plumb Grey
4.0 mm



0053 Ice Grey
4.0 mm



0166 Clay
4.0 mm

All other colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.

Colorette AcousticPlus



19 dB

Neocare™



0001 Banana Yellow
4.0 mm



0170 Kumquat Orange
4.0 mm




0110 Cadillac Pink
4.0 mm



0132 Spicy Green
4.0 mm



0123 Poppy Blue
4.0 mm



0012 Light Beige
4.0 mm



0059 Stone Grey
4.0 mm



0080 Elephant Grey
4.0 mm




0004 Bluebird
4.0 mm

Uni Walton AcousticPlus **New**




19 dB


Neocare™



0085 Warm Concrete Grey
4.0 mm



0058 Clay Grey
4.0 mm



0083 Architects Grey
4.0 mm



0095 Spring Blue
4.0 mm



0090 Olive
4.0 mm




0010 Pompeji Red
4.0 mm

Lino Art Urban Acoustic Plus **New**



19 dB

Neocare™




0554 Concrete Grey
4.0 mm



0560 Bold Grey
4.0 mm



0553 Dark Concrete Grey
4.0 mm




0564 Natural Stone
4.0 mm



0558 Screed Grey
4.0 mm



0561 Pitch Black
4.0 mm



0552 Silver Grey
4.0 mm



0555 Flashy Street Grey
4.0 mm




0556 Mud Grey
4.0 mm

All other colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.

Technic Linoleum

Linodur - High Mechanical Traffic Resistance

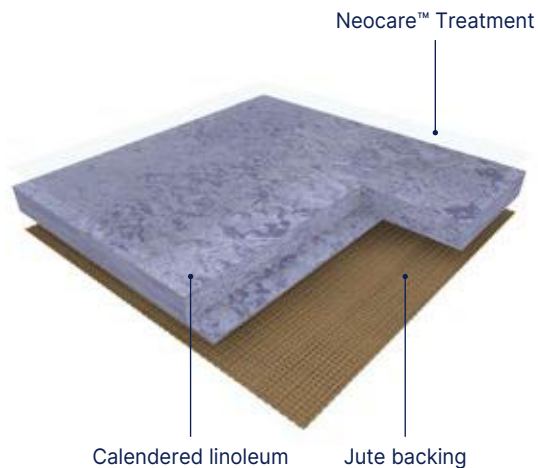

LINODUR is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high pedestrian and mechanical traffic areas. Its weight is 4700g/sqm in 4.0mm.

It features a modern design with a fine grain effect and is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among of which 76% are rapidly renewable. The flooring is produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring.

This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes.

The Camouflage welding rod makes the connections between the strips invisible.


It is antistatic, antibacterial according to ISO 22196 / JIS Z 2801.

The flooring is 100% recyclable, is composed of up to 32% recycled content and up to 40% recycled content, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance.

This product is manufactured in a plant awarded with ISO 9001 (quality), ISO 14 001 (environment) and ISO 50001 (energy) certifications.

The product also benefits from international certifications such as Floorscore® and Blue Angel (emissions).

Marmorette LCH - Dissipative Linoleum For ESD Areas

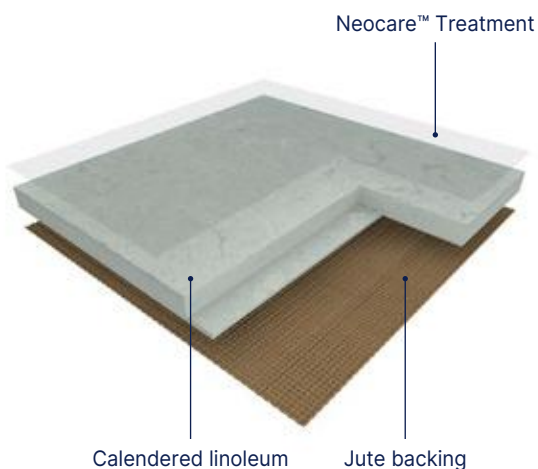

MARMORETTE LCH is a calendered linoleum compact dissipative floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas.

Its vertical resistance is $10^6 < R < 10^8 \Omega$.

Its weight is 3000g/sqm in 2.5mm.

It features a marbled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

The flooring is produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring.

This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes. The flooring is 100% recyclable, is composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance.

It is designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications.

The Camouflage welding rod makes the connections between the strips invisible.

It is antistatic, antibacterial according to ISO 22196 / JIS Z 2801.

Linodur - High Mechanical Traffic Resistance



Neocare™



1020 Spring Blue
4.0 mm

^ Scale 1




1024 Speckled Blue
4.0 mm



1056 Marble Grey
4.0 mm



0020 Spring Blue



1081 Sporty Black
4.0 mm



1011 Avocado Green
4.0 mm



1072 Peach Orange
4.0 mm

Marmorette LCH - Dissipative Linoleum for ESD areas



$10^6 \leq R \leq 10^8 \Omega$

Neocare™




0023 Dusty Blue
2.5 mm



0055 Ash Grey
2.5 mm

Finishes

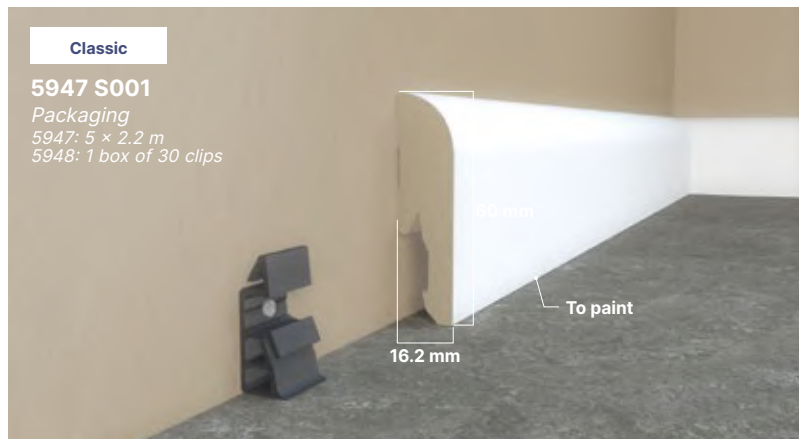

Classic

5947 S001

Packaging
5947: 5 × 2.2 m
5948: 1 box of 30 clips

MDF

 Color: White



Hygiene / Ultra Cleanliness

32 mm: 40126512

38 mm: 40146512

Packaging
30 × 2 lm strips

Cove Former

 Color: 6512



Hygiene / Ultra Cleanliness

Coved skirting of floor covering material

100 mm

Backing support

Flooring

Weld rod

60 mm

	Code
Compact 2.0 mm	8009999
Compact 2.5 mm	8019999
Compact 3.2 mm	8029999
Conductive (LCH)	8049999


HSLA

Welding rods



**Marmorette,
Arabesque & Linodur**

**Camouflage
welding rod:
invisible joints**

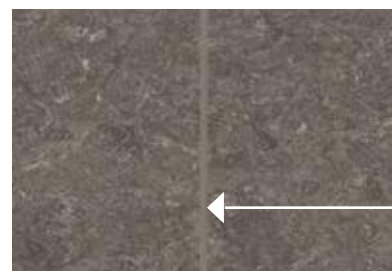

**Colorette,
Uni Walton &
LINO ART**

**Uni welding rod:
a large palett of colours**

Welding rod matching table available on: gerflor.com

Cleaning Neocare™-Treated Linoleum Floors

Marmorette / Arabesque / Colorette /
Uni Walton / Lino Art














 **Damp sweeping equipment**
Flexible mop preferably fitted with disposable, antistatic and/or pre-impregnated gauze strips

 **Single disk machine**

 **Manual washing equipment**
Disposable microfibre mop or gauze

 **Autoscrubber**

 **Mechanical cleaning disk**
3M (or equivalent) colour disks

	Equipment used	Cleaning products	Cleaning methods
First use	    or  if soiled	Neutral detergent or Alkaline detergent	<ul style="list-style-type: none"> • Damp sweeping • Mechanical washing at 160-200 rpm (with water recovery)
Daily cleaning	 	Neutral detergent / Disinfectant detergent ⁽¹⁾	<ul style="list-style-type: none"> • Damp sweeping • Manual washing with flat mop • Rinsing
OR			
Mechanical cleaning	 	Neutral detergent	<ul style="list-style-type: none"> • Damp sweeping • Mechanical washing at 160-200 rpm (with water recovery)
Deep cleaning	   or 	Alkaline detergent	<ul style="list-style-type: none"> • Damp sweeping • Mechanical washing at 160-200 rpm (with water recovery)

(1) In areas where disinfection is essential (e.g. operating theatres, hospital rooms, etc.), alternate between using neutral detergent and amine-free disinfectant detergent.

These cleaning instructions have to be adapted depending on traffic and location of the area.

Gerflor DLW flooring products are to be installed in full accordance with Gerflor DLW installation instructions and recognized trade standards.

An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Gerflor DLW flooring products should only be used as floorcoverings.

Note: Gerflor DLW reserve the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, check our website: www.gerflor.com

INSTALLATION & MAINTENANCE GUIDELINES AVAILABLE ON GERFLOR.COM







Sports Floorings

pages 286-319

- 292. **Taraflex® New**
Synthetic Sports Floorings
- 304. **Connor Sports®**
Hardwood Flooring System
- 306. **Sport Court®**
Outdoor Surfaces
- 312. **DLW New**
Linoleum Sports Floorings
- 316. **Powershock**
Fitness Rubber Solutions
- 319. **Our solutions
for your fitness center**

Gerflor, where champions play

TARAFLEX®

SPORTS

Indoor synthetic floors: the best performing products on the market

Taraflex® has been one of the pioneer in 1947 when developing synthetic floors and is today the world leading brand for indoor sports floor.

With a complete range of products, Gerflor offers the perfect solution adapted to all users and usages, from low impact activities through to elite and performance sports. Gerflor sets itself the highest standards when it comes to the environmental quality of its products.

Made in France 

Taraflex® sport floors are recognised all over the world

Every day
more than

6 millions children
play on a Taraflex®
sports floor.

Per year,

3 500

high level competitions
are played on a Taraflex®
sports floor.





**Hardwood flooring systems:
more than 100 years
of experience**



Founded in 1872, Connor Sports® is the market leader in portable and permanent hardwood sports flooring systems. Connor Sports® professional engineers lead the industry in new product design and development, setting the standard for innovative solutions in sports surfacing. In 1914, Connor Sports® installed the first basketball court in the USA. In the late 90's, Boston Celtics selected Connor Sports® to repurpose their famed parquet into a portable flooring system.

Please check availability in your zone with your local representative.



**Outdoor surfaces:
world's leading outdoor
sport surface**



In 1974, Sport Court® created the outdoor game court. Since then, over 150,000 courts have been installed worldwide. Sport Court®'s superior outdoor play surface is designed to:

- keep athletes safe
- allow for year-round sports activity
- eliminate costly annual maintenance



**Indoor sport areas:
historic leader in linoleum
sport flooring**



DLW Linoleum has been manufacturing high class sport linoleum for over 30 years and is proud to deliver uncompromising product quality. Adapted to both specific and multi-function use, linoleum high performance floors are a great option to address various applications, from kindergartens to multipurpose halls and fitness centres. Thanks to its acknowledged sustainable features, millions of square metres of sport linoleum have been installed over the years and still convince new generations of users.

Gerflor, supplier of major international sports events



Indoor sports surfaces





Outdoor game courts



Taraflex® Sport Floors

Why should you choose Taraflex®?

1 For performance

1 ProtecSol^{TRIPLE ACTION}

An intelligent surface with the unique and patented triple action ProtecSol®:

- ▶ Best solution to maximise both slide and grip
- ▶ A friction-burn free surface, on which the temperature during a fall is reduced by 25%
- ▶ Cost effective and easy to maintain

2 D-Max^{DURABILITY}


D-Max™ surface is a UNIQUE complex made up of calendered PVC sheets reinforced with a fibreglass grid.

- ▶ High durability
- ▶ Outstanding dimensional stability

3 CXP^{COMFORT} HD


Taraflex® Double Density Technology

- ▶ Best shock absorption properties

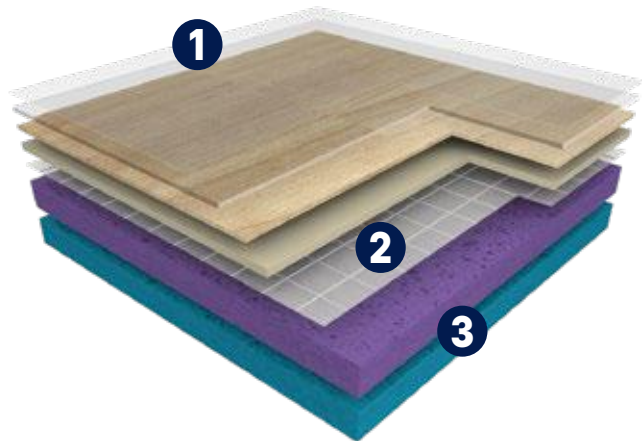

2 For protection


The floor that brings **immediate protection on impact** to all users when falling, diving or sliding on the floor.

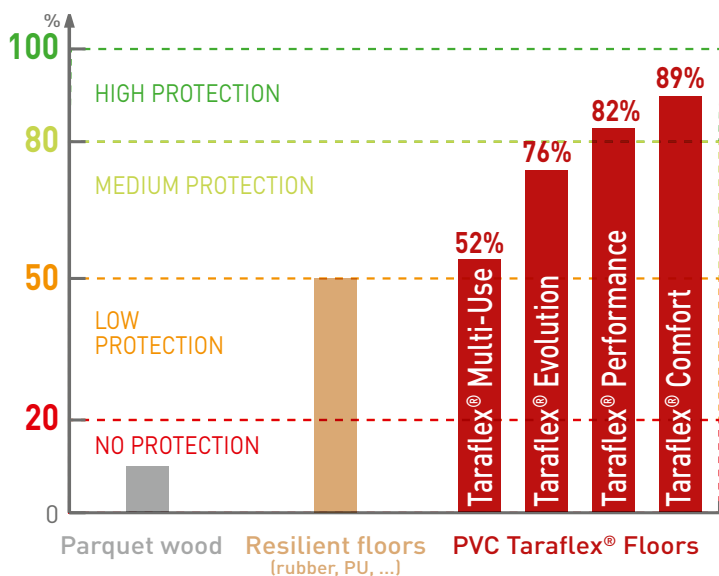

Gerflor offers Taraflex® Comfort, a P3 floor with **the highest level of comfort on the market.**

3 For safety


Shock absorption **minimises the force** of impact on the body and reduces long term injury risk.

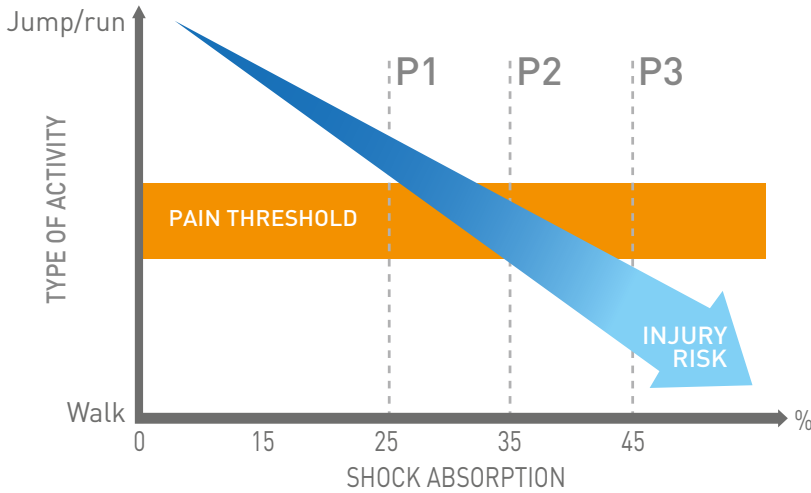

With a complete range of shock absorption P1/P2/P3, Gerflor provides the right solution and the best safety for every user.

4 For durability

Taraflex® technologies ensure long-lasting **high performance**

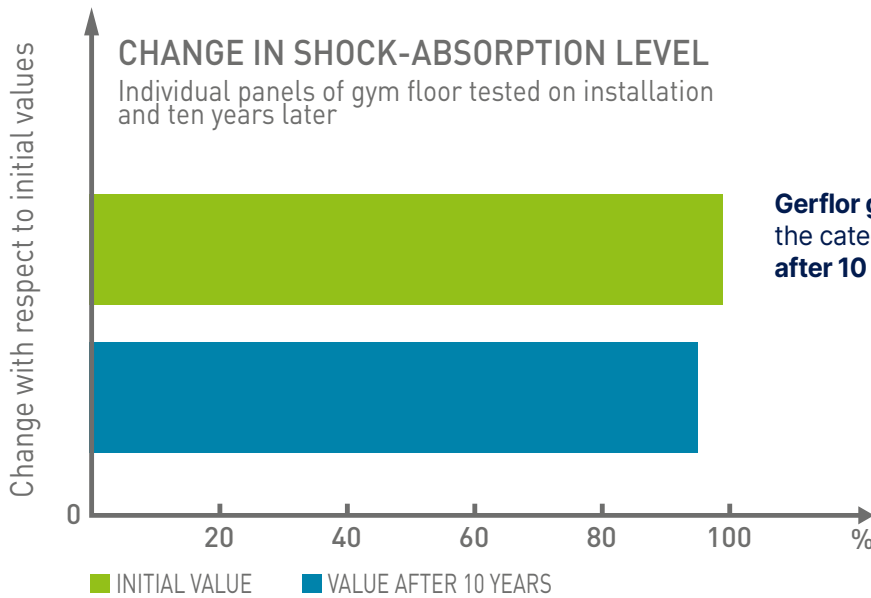

*Gerflor's internal ageing tests

Partner of major sports events




Taraflex® Sport Floors

How to choose the right floor?

Multisport

Taraflex® **Evolution**
The reference in sports flooring

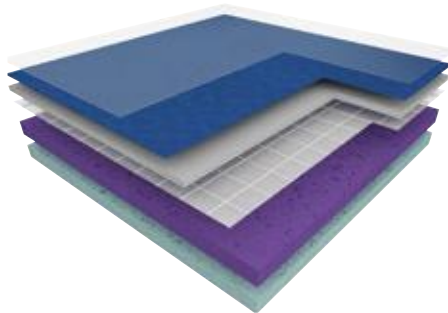

EDUCATION, CLUB
& COMPETITION

P1

THICKNESS


7,5 mm

ALSO AVAILABLE WITH **Dry-Tex™**

ALSO AVAILABLE IN
TARAFLEX® EVOLUTION SL 



Taraflex® **Performance**
Best balance of sport performance and safety

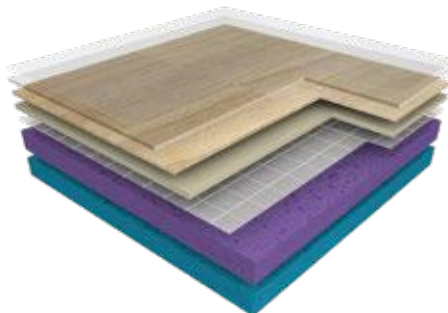

EDUCATION, CLUB
& COMPETITION

P2

THICKNESS


9 mm

ALSO AVAILABLE WITH **Dry-Tex™**

ALSO AVAILABLE IN
TARAFLEX® PERFORMANCE SL 



Taraflex® **Comfort**
Maximum protection and safety

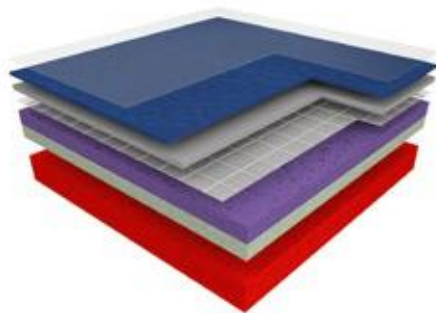

EDUCATION, CLUB
& COMPETITION

P3

THICKNESS

12,5 mm




P1, P2, P3: point elastic sports flooring classification according to EN 14904

Multipurpose

Taraflex® Multi-Use

Performance & very high indentation resistance

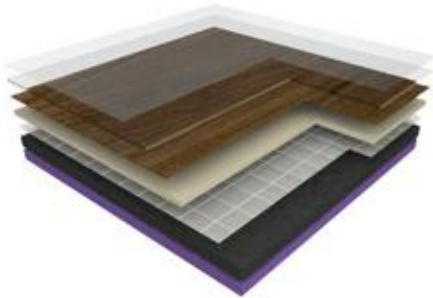

SPORT &
NON-SPORT
ACTIVITIES

P1


THICKNESS

6,2 mm



Heavy duty multi purpose

Heavy load resistance and shock absorption

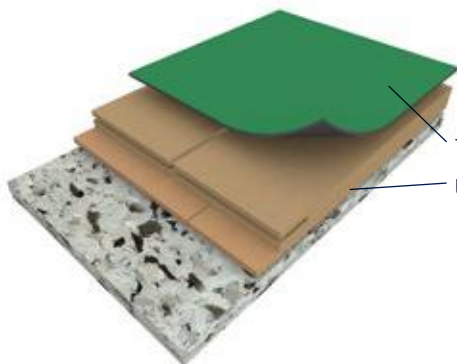

Taraflex® Surface

Under-carriage system

A3

A4*

*depending on the under-carriage system



Taraflex® Sport Floors


A large palette of colours and designs

Natural and vibrant colours for multisports


All colours are available with
 TARAFLEX® SURFACE TARAFLEX® COMFORT
 TARAFLEX® PERFORMANCE AND TARAFLEX® EVOLUTION



5763 - Maple Sun / Y = 40.2



6873 - Anthracite / Y = 20.5



6830 - Black / Y = 3.1



6557 - Forest / Y = 10.9



6430 - Blue / Y = 8.0



5742 - Wood Oak / Y = 26.3



6347 - Beige / Y = 39.7




3764 - Taupe / Y = 17.9



6758 - Silver Gray / Y = 32.6




6350 - Light Cherry / Y = 43.3



2404 - London Light Blue / Y = 33.8




6559 - Spring / Y = 47.1



6570 - Mint Green / Y = 16.6



6445 - Lagoon / Y = 24.9



6211 - Gold / Y = 41.5




6159 - Pink / Y = 19.1



6180 - Red / Y = 9.8



6038 - Terracotta / Y = 19.9



6431 - Teal / Y = 19.2




6146 - Coral / Y = 27.8

Modern and urban designs for multi-activities

All colours are available with
TARAFLEX® MULTI-USE



6844 - Black Strips / Y = 14.5

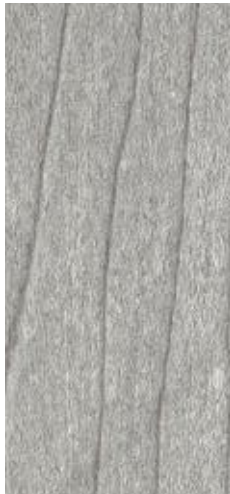

6391 - Maple Stone / Y = 30.6



6373 - Maple Ocean / Y = 21.1



6390 - Maple Lava / Y = 9.7




6392 - Maple Earth / Y = 10.2



6379 - Maple Desert / Y = 23.2



6350 - Light Cherry Design / Y = 43.3

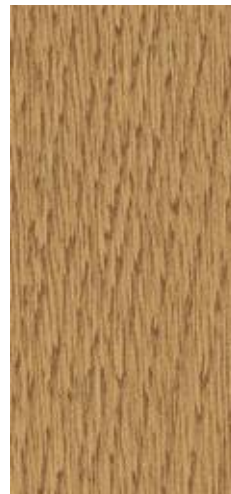

5742 - Wood Oak / Y = 27.8



2790 - Polished Concrete Dark Grey / Y = 15.3



2791 - Polished Concrete Light Grey / Y = 27.4



6180 - Red / Y = 9.8



6557 - Forest / Y = 10.9



6430 - Blue / Y = 8.0



6758 - Silver Gray / Y = 32.6


Taraflex® Sport Floors

Specific applications

Racket sports

- ▶ **Racket sport floors** should offer an excellent compromise between slide and grip for lateral moves, accelerations and changes of direction.
- ▶ Gerflor offers a complete range of solutions for racket sports with different types of installation methods (portable and permanent floors) to meet player's expectations and facilities needs.

Taraflex® Table Tennis

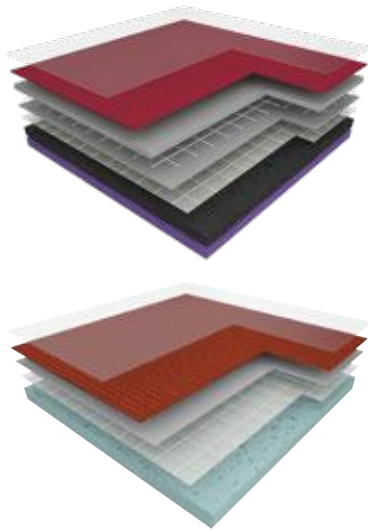

Permanent solution

THICKNESS

4,5 mm

6,2 mm

P1

Portable solution

THICKNESS

3,7 mm




Engineered and developed in partnership with the international Table Tennis federation (ITTF)



PERMANENT SOLUTION
6109
Framboise

PORTABLE SOLUTION
6109
Framboise

Taraflex® Badminton

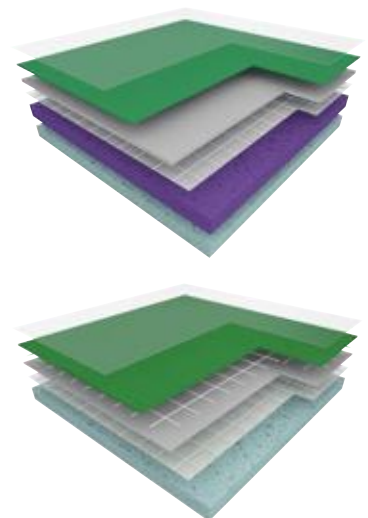

Permanent solution

THICKNESS

4,5 mm

7,5 mm

P1

Portable solution

THICKNESS

3,9 mm

The ultimate floor for badminton movements




PERMANENT SOLUTION
6570
Mint Green

PORTABLE SOLUTION
6570
Mint Green

Disability and rolling sports

- ▶ Taraflex® Sports Floorings are recognised all over the world for all types of sports. Cushioned floors, with high IPI values offer the best solution for sitting sports.


Taraflex® Multi-Use

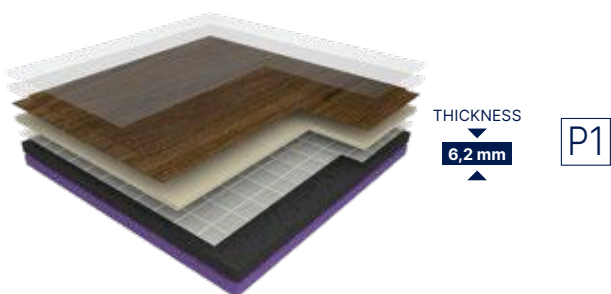


The ideal combination between sports performance and resistance to rolling loads



Taraflex® Surface

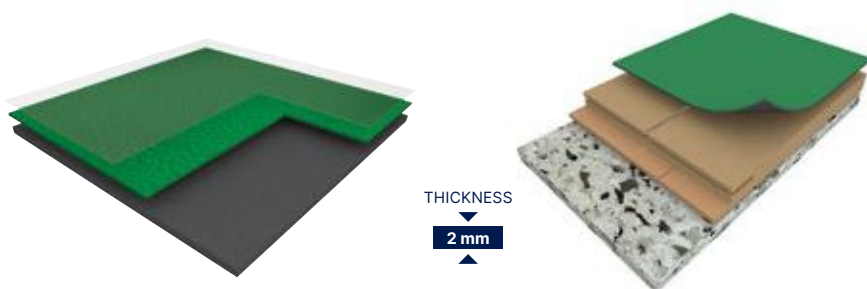

Taraflex® Comfort

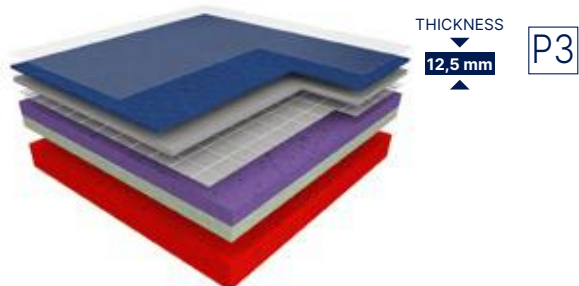






The perfect solution for safety and protection



Taraflex® Sport Floors

Technical Data

Description	Standard	Requirement	Units	Taraflex® Surface	Taraflex® Multi-Use	Taraflex® Evolution	Taraflex® Performance	Taraflex® Comfort
Dry-Tex™ System	-	-	-	-	-			-
Taraflex® SL (Sustainable and Looselay)	-	-	-	-	-			-
Product Description								
Surface treatment	-	-	-	Triple-Action Protecsol®	Triple-Action Protecsol®	Triple-Action Protecsol®	Triple-Action Protecsol®	Triple-Action Protecsol®
Surface complex	-	-	-	D-Max™	D-Max™	D-Max™	D-Max™	D-Max™
Foam	-	-	-	-	CXP-HD +™	CXP-HD™	CXP-HD™	CXP-HD™
Thickness	EN ISO 24346	-	mm	2	6.2	7.5	9	12.5
Weight	EN ISO 23997	-	kg/m²	2.9	4.2	4.6	5.2	5.1
Length*	EN ISO 24341	-	lm	26.5 Max	26.5 Max	26.5 Max	26.5 Max	26.5 Max
Width	EN ISO 24341	-	lm	1.5	1.5	1.5	1.5	1.5
Sport Properties								
Shock absorption	EN 14808	≥ 25	%	-	P1	P1	P2	P3
Vertical deformation	EN 14809	≤ 3.5	mm	≤ 2	≤ 2	≤ 2	≤ 3	≤ 3.5
Sliding coefficient	EN 13036-4	80 to 110	-	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110
Ball bounce	EN 12235	≥ 90	%	≥ 90	≥ 90	≥ 90	≥ 90	≥ 90
Ball speed	ITF	-	-	-	-	-	-	-
Technical Characteristics								
Abrasion resistance	EN ISO 5470-1	≤ 1000	mg	≤ 350	≤ 350	≤ 350	≤ 350	≤ 350
Impact resistance	EN 1517	≥ 8	N/m	≥ 8	≥ 8	≥ 8	≥ 8	≥ 8
Indentation resistance	EN 1516	≤ 0.5	mm	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5
Classification								
Fire	EN 13501-1	-	-	B _{fl} -s1	C _{fl} -s1	C _{fl} -s1	C _{fl} -s1	C _{fl} -s1
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽¹⁾	ISO 22196	-	-	> 99% inhibits growth				
CE Marking								
	EN 14 904	-	-	Fire Sliding Coefficient Abrasion Resistance Rolling load Resistance	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Rolling load Resistance			


The proposed specifications fall within the tolerance limits usually accepted in this sector whilst still complying with standards.

(1) The implementation of an effective cleaning method is the best defence against infection

* For different roll lengths please contact us

INSTALLATION ON DAMP SUBFLOOR

Gerflor provides installation on Isolsport (free floating underlay) or Taraflex® Dry-Tex™ System or Taraflex® SL. Please contact your sales representative for more information.

Taraflex® Badminton			Taraflex® Table Tennis			Taraflex® Bateco	Taraflex® Isolsport
Portable	4.5	7.5	Portable	4.5	6.2		
-	-		-	-	-	-	-
-	-	-	-	-	-	-	-
Triple-Action Protecsol®	PUR Protect®	Triple-Action Protecsol®	Triple-Action Protecsol®	PUR Protect®	Triple-Action Protecsol®	-	-
100% Pur PVC	100% Pur PVC	D-Max™	100% Pur PVC	100% Pur PVC	D-Max™	-	-
CXP	CXP	CXP-HD™	CXP	CXP	CXP-HD+™	-	-
3.9	4.5	7.5	3.7	4.5	6.2	1.5	1.65
1.95	2.6	4.6	1.9	2.6	4.2	2.05	1.35
16 STD	20.5 STD	26.5 Max	16 STD	20.5 STD	20.5 STD	20 / 30	45 Max
3 x 2.7	1.5	1.5	1.5	1.5	1.5	1.5	2
-	-	P1	-	-	P1	-	-
≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	-	-
80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	-	-
-	≥ 90	-	-	≥ 90	≥ 90	-	-
-	-	-	-	-	-	-	-
≤ 350	≤ 350	≤ 350	≤ 350	≤ 350	≤ 350	≤ 300	-
-	-	≥ 8	-	-	≥ 8	-	-
≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5
B _{fl} -s1	C _{fl} -s1	C _{fl} -s1	B _{fl} -s1	C _{fl} -s1	C _{fl} -s1	B _{fl} -s1	C _{fl} -s1
> 99% inhibits growth							
Fire	Fire Sliding Coefficient Abrasion Resistance Rolling load Resistance	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Rolling load Resistance	Fire Sliding Coefficient Abrasion Resistance	Fire Sliding Coefficient Abrasion Resistance Rolling load Resistance	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Rolling load Resistance		Fire


Taraflex® Sport Floors

Innovative services to make your floor unique



Personalise your sports floor using the digital printing process

- ▶ **Choose from collection**
choose one of our designs from our catalogue (examples shown below)
- ▶ **Change colour**
recolour the standard design of your choice
- ▶ **Customise**
create your own design

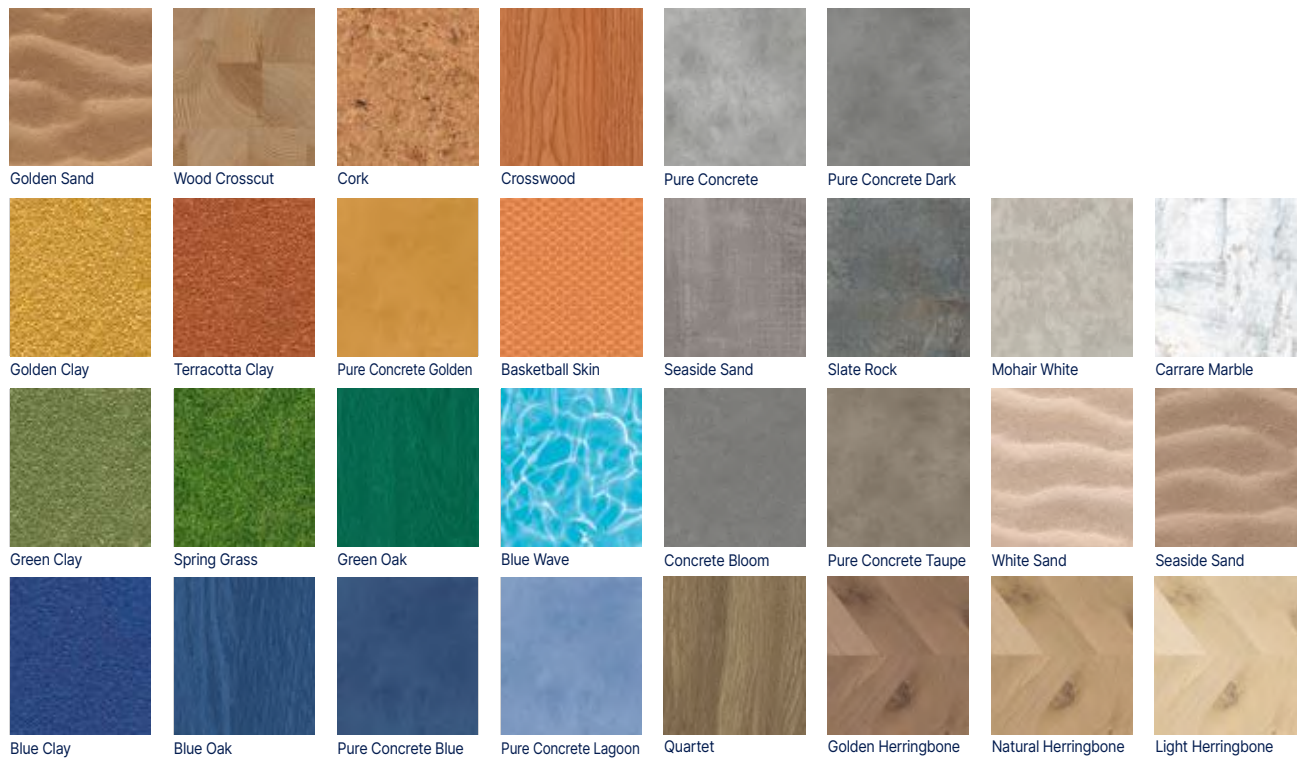

Available with all Taraflex® floors
More designs available, visit our website:
mytaraflex.gerflor.com
Minimum Order Quantity : 240m² / special price /
each request subject to individual study*
*Contact your local sales representative for more details.



3D Court Designer

For a 3D visualisation of your project



1

Choose your surface:
monosport or multisports



2

Choose your colours



3

Visualise
your sport hall

Available on: courtdesigner.gerflor.com

My Logos

For a stunning result





Customise your floor
with your city or club colours thanks
to the waterjet cutting technology

For further information, please contact your local Gerflor representative.

Interior designer

For a realistic view of your environment

- ▶ **Download your picture and include the floor**
- ▶ **Or change the floor colours in selected pictures**

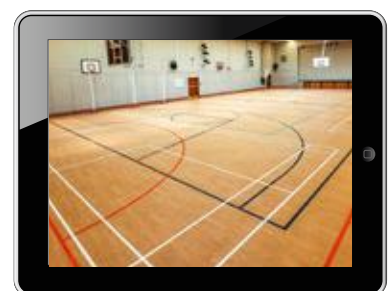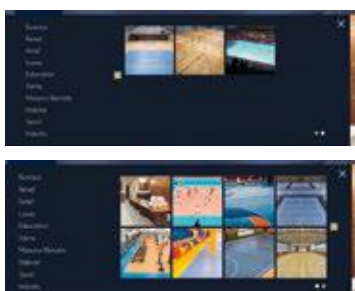

Available on: interiordesigner.gerflor.com

Connor Sports® Hardwood Flooring Systems



Where Champions Play™

Top competitions take place on Connor Sports®

BASKETBALL

- ▶ 2020 Olympic Games (Tokyo)
- ▶ 2019 FIBA World Cup (China)
- ▶ 2016 Olympic Games (Rio)
- ▶ NCAA Final Four since 2006 (USA)



Champions deserve exceptional sport surface



So we select exceptional maple lumber for them

Connor Sports® hand selects north american maple trees grown north of the 35th parallel, where the shorter growing season produces a more dense and uniform woodgrain excellent for sports flooring.



Since its establishment in 1897, the Maple Flooring Manufacturers Association (MFMA) is the authoritative source of technical and general information about maple flooring and related sports flooring systems. Connor Sports® is a charter member of the MFMA and the 1st member of that group to be certified by the Rainforest Alliance.



Connor Sports® is proud to be the only ZeroWaste company in the sports flooring industry. Recycling, avoiding waste, developing innovative technology and a strong environmental consciousness are a major part of Connor Sports® corporate policy.



Connor Sports® works with FSC (Forest Stewardship Council®). This organization oversees high conservation value forest and protects the communities and indigenous people that rely on the forest. FSC ensures that everyone delivers the most environmentally friendly product.

Champions of sport

Hardwood systems for professional teams

More than half of the teams in the NBA have purchased a Connor Sports® hardwood system:



Boston Celtics



Brooklyn Nets



Philadelphia 76ers



Oklahoma City Thunder



Atlanta Hawks



Golden State Warriors



Sacramento Kings



Utah Jazz



Milwaukee Bucks

More information on gerflor.com

Sport Court® Outdoor Surfaces

Gerflor, Where Champions Play™



Sharing more than sport!

Bring people together for unforgettable moments and lifetime memories

With our modular PowerGame+ tiles, we offer everyone the opportunity to share such memorable sport and recreational experiences.

Our premium surfaces are not only fun, great-looking and safe to play on, but they can also be easily installed in all facilities. You can be sure you're providing the ideal playing outdoor surface for every practice and ambitions, from children to champions.

Designed for multi-sports

Sport Court® surfaces are designed for a wide variety of sports. All game courts can be easily configured to accommodate basketball, futsal, handball, tennis and more, without compromising on playability or safety.

A number of temporary or permanent applications are possible, from multi-sport school facilities to multi-use game areas to all kinds of sporting events.



Event-based courts



School facilities



Multi-Use Game Areas

Sport Court® Outdoor Surfaces

They trust us

Partner of sports federations

Sport Court® surfaces are used at the highest levels of competition by leading sports federations around the world. Our courts are perfect for both temporary events and permanent installations.

150 000


courts installed since 1974




Long-lasting aesthetics

Design a court that makes an impression. With a selection of 10 fade-resistant tile colours, you have more ways to customise the look of your playing surfaces to fit your requirements, whether you want a fun colourful court, or to customise it with your company's or school's colours.


Choose your colours




STEEL BLUE




BRIGHT BLUE




DARK BLUE




GREEN




BLACK




GRAY



KIWI



TERRACOTTA



GRANITE



BRIGHT RED



Customise your court by easily adding logos and game lines, and make it uniquely yours!

Optimal playability and safety

Powergame+ tiles provide exceptional protection against abrasion, head injuries and joint strain. Extensive third-party testing ensures that athletes of any age remain safe while playing and competing on Sport Court® surfaces.

Accomodate many sports with unmatched playability and safety




Powergame+ enhances game experience

- Highly versatile multisport surface
- Same dribbling response as a hardwood flooring
- Remarkably stable surface

Powergame+ provides a unique balance between safety, comfort and durability


- High tile stability optimises ball rebound and game performance
- Improved water drainage enables faster drying and playability after rain
- Low skin abrasion protects players when falling without compromising on traction

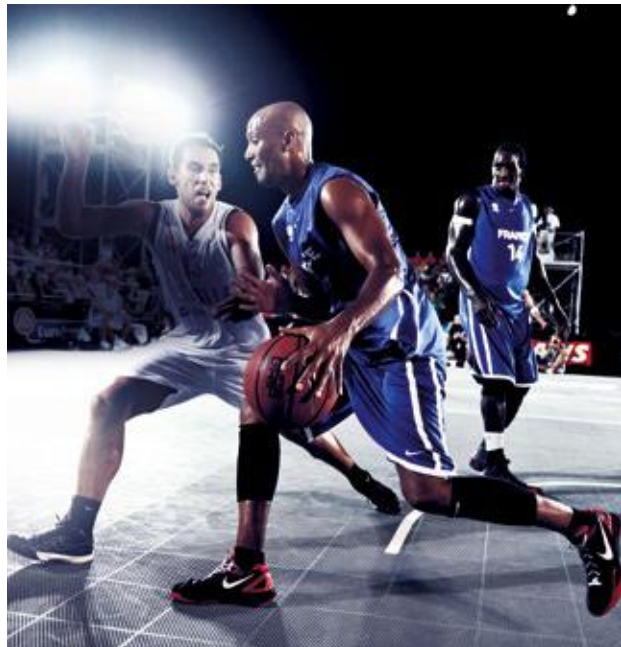

Superior Impact Protection

A head impact from just 10 cm above a concrete surface can cause a concussion. Sport Court® tiles are significantly more forgiving, with PowerGame+ reducing the likelihood of a serious head injury from a fall of 50 cm

Critical Fall Height is a test used in conjunction with the European Standards EN 1177-2018, used for evaluating playground surfaces, such as sand, wood chips, resilient rubber and asphalt.

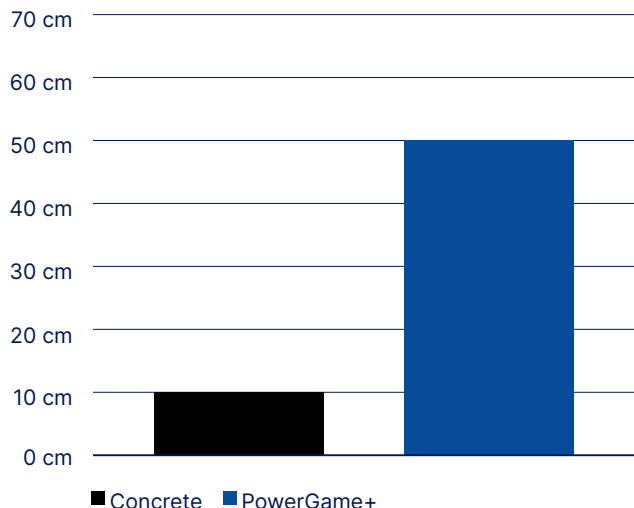

Sport Court® Outdoor Surfaces

Save time and money

Easy installation and maintenance

The simple and strong interlocking system enables the installation of a 1,000 sqm court in 4h



1,000M² COURT = 4H COURT INSTALLATION + 2H GAME LINE PAINTING

WITH A 4-PERSON TEAM




The next step in multi-sports outdoor surfacing


POWERGAME+



Made in France
Designed to provide the highest levels of safety and playability. PowerGame+ is the perfect choice for your facility.

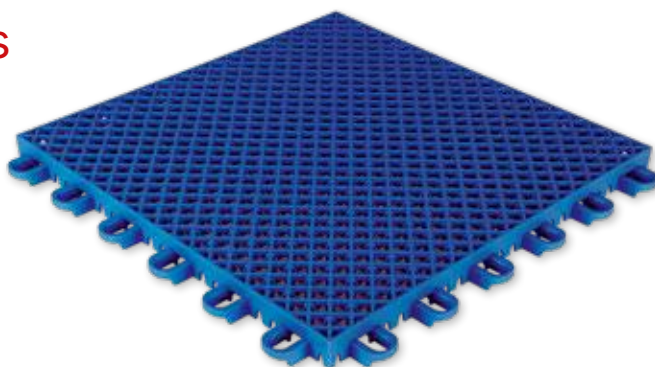


Long-lasting aesthetics



UV protection

Outstanding colour durability

Durabilité et confort de jeu



Wide and deep connection loops

High stability and durability over installation and removal, safety of the players

Optimal playability

Optimal grid design

Double-grid structure for faster drying, reduced water rebound, and optimal safety



Top-grid:

"Open Diamond" design
For better drainage



Lower grid:

"Saddle" Shape
To prevent water retention

A greater court with finishing profiles

Discover our complete range of finishing profiles, adapted to every court configuration.

Edge male
30,5 × 9,5 × 1,9 cm

Edge female
30,5 × 9,5 × 1,9 cm

Corner Edge
9,5 × 9,5 × 1,9 cm

Polypropylene Profiles

- Easy and fast installation
- Beautiful additional elements to finish the court

Corner & Ramp Edges
148 × 19 × 2,4 cm

Metal Profiles


- Resistance to harsh weather conditions and to vandalism thanks to the anchored installation
- Beautiful additional elements to finish the court

Linoleum Sports Floorings

Colorette Sport / Linodur Sport / Marmorette Sport




Colorette Sport

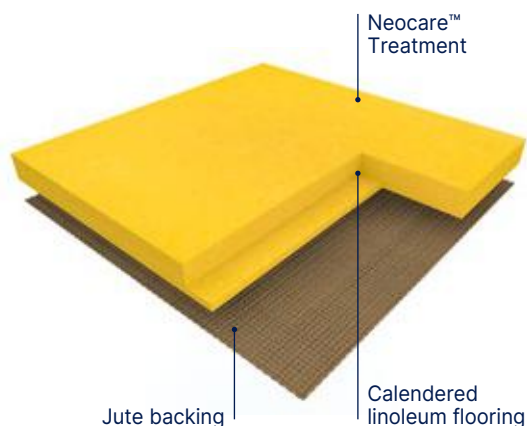


COLORETTE SPORT is a calendered linoleum compact floorcovering in sheet, 2 m wide, compatible with Gymflex II rubber underlay for a point elastic installation. Its weight is 4700 gr/sqm in 4.0 mm. It features a speckled design. It is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among which 76% are rapidly renewable. The flooring is produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes. The flooring is 100% recyclable, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance. The product also benefits from international certifications such as Floorscore® and Blue Angel (emissions). Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the flooring is certified "Cradle to Cradle Silver". Its Environmental Performance Declaration (EPD) certified by an external laboratory, indicates carbon neutrality during the first stages of its life cycle ("from cradle to gate").

Linodur Sport

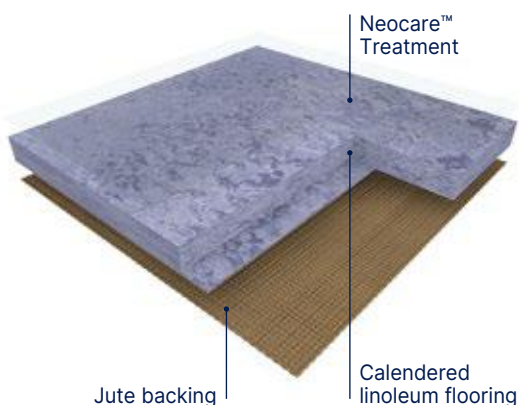

LINODUR SPORT is a calendered linoleum compact floorcovering in sheet, 2 m wide, compatible with Gymflex II rubber underlay for a point elastic installation. Its weight is 4700 gr/sqm in 4.0 mm. It features a modern design with a fine grain effect. It is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among which 76% are rapidly renewable. The flooring is produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes. The flooring is 100% recyclable, is composed of up to 32% recycled content, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance. The product also benefits from international certifications such as Floorscore® and Blue Angel (emissions). Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the flooring is certified "Cradle to Cradle Silver". Its Environmental Performance Declaration (EPD) certified by an external laboratory, indicates carbon neutrality during the first stages of its life cycle ("from cradle to gate").

Marmorette Sport

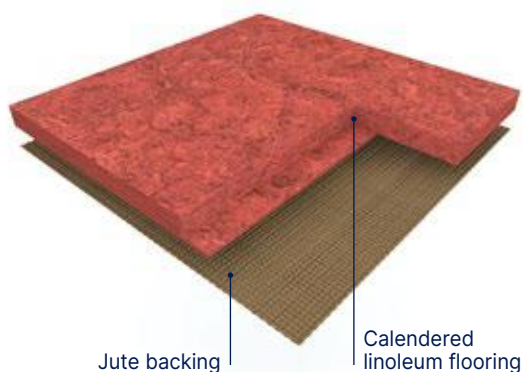

MARMORETTE SPORT is a calendered linoleum compact floorcovering in sheet, 2 m wide. Its weight is 3800 gr/sqm in 3.2 mm. It features a marbled design. It is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among which 76% are rapidly renewable. The flooring is 100% recyclable, is composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance. The product also benefits from international certifications such as Floorscore® and Blue Angel (emissions). Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the flooring is certified "Cradle to Cradle Silver". Its Environmental Performance Declaration (EPD) certified by an external laboratory, indicates carbon neutrality during the first stages of its life cycle ("from cradle to gate").

Colorette Sport / Linodur Sport / Marmorette Sport



			Colorette Sport	Linodur Sport	Marmorette Sport
Description					
Total thickness	EN ISO 24346	mm	4.0	4.0	3.2
Backing	-	-	Jute fabric	Jute fabric	Jute fabric
Weight	EN ISO 23997	g/sqm	4700	4700	3800
Width of sheet	EN ISO 24341	cm	200	200	200
Length of sheet	EN ISO 24341	m	Ca. 28	app. 28	app. 28
Material content	-	-	98% natural materials (bio-based & mineral), among which 76% are rapidly renewable, 100 % recyclable	98% natural materials (bio-based & mineral), among which 76% are rapidly renewable, recycled content up to 32%, 100 % recyclable	98% natural materials (bio-based and mineral) : linseed oil, wood flour, resins, cork, minerals, jute fabric, among which 76% are rapidly renewable. 100 % recyclable, contains up to 40 % recycled
Classification					
Norm / Product specification	-	-	EN 14904 / DIN V 18032-2 2001/04	DIN EN 14904 DIN V 18032-2	EN 14904 / DIN 18032-2
European classification	EN ISO 10874	class	23 / 34 / 43	23 / 34 / 43	23 / 34 / 43
Fire rating	EN 13501-1	class	Cfl-s1 ⁽¹⁾	Cfl-s1 ⁽¹⁾	Cfl-s1 ⁽¹⁾
Dynamic friction coefficient	DIN V 18032-2 2001/04	μ	0.4 - 0.6 OK	0.4 - 0.6 OK	0.4 - 0.6 μ - Fulfilled
Sliding Coefficient	EN 13036 - 4	-	80 - 110 OK	80 - 110 OK	80-110 - Fulfilled
Impact sound insulation	EN ISO 717-2	dB	6	8	6 dB
Performances					
Residual indentation	EN ISO 24343-1	mm	≤ 0.20	≤ 0.20 OK	≤ 0.15
Indentation resistance	EN 1516	mm	≤ 0.5 OK	≤ 0.5 OK	-
Slip resistance	EN 16165 App B (DIN 51130)	class	R10	R10	-
Colour fastness	EN ISO 105 - B02	degree	≥ 6	≥ 6	≥ 6
Point contact resistance	VDE 0100	-			p ≥ 0.20 Fulfilled
Light reflection	DIN 5036-3	-	p ≥ 0.20 OK (except colours 1004,1080 und 1118)	p ≥ 0.20 OK (except colours 1013,1024,1059,1073,1081)	-
Static electrical propensity	EN 1815	kV	≈ 2	≤ 2	app. 2.0
Castor chair test (Type W)	ISO 4918	-	OK	OK	OK
Thermal resistance	EN 12667	(m²K)/W	0.023	0.023	0.018
Thermal conductivity	EN ISO 10456	W/(m.K)	0.17	0.17	0.17
Chemical products resistance	EN ISO 26987	class	Excellent ⁽²⁾	Excellent ⁽²⁾	OK
Impact resistance	EN1517	N/m	≥ 8 OK	≥ 8 OK	-
Abrasive wear resistance	EN ISO 5470-1	mg	≤ 1000 OK	≤ 1000 OK	-
Gloss level	EN ISO 2813	-	OK	OK	-
Surface Treatment	-	-	NEOCARE™	NEOCARE™	-
Anti-viral activity (Human coronavirus) after 5 h ⁽³⁾	ISO 21702	-	> 98.65 % virucidal activity	> 98.65 % virucidal activity	-
Anti-bacterial activity (E. coli – S. aureus – MRSA) ⁽³⁾	EN ISO 22196 (JIS Z 2801)	-	> 99.99% inhibits growth after 24h	> 99.99% inhibits growth after 24h	-
Indoor air quality (TVOC after 28 days)	EN 16516	μg/m³	< 30	< 50	-
Circular Economy					
Certification	Cradle to Cradle	-	Silver	Silver	Silver
CE Marking					
	EN 14904: 2006	-			

(1) Glued according to certificate.

DOP numbers available from your local branch.

(2) Resistant to non-colouring alcohol-based sanitisers, domestic chemicals and acid and alkaline solutions for short periods.

(3) The implementation of an effective cleaning method is the best defence against infection.



Depending on light exposure, the product color can vary, due to linoleum natural oxidation process. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.

Linoleum Sports Floorings

Linodur Sport



Neocare™

4 mm




1048 Country Beige




1074 Straw Yellow



1049 Cliff Grey




1072 Peach Orange



1011 Avocado Green




1056 Marble Grey



1059 Slate Grey




1073 Glowing Rock



1026 Lagoon



1057 Heaven Blue



1081 Sporty Black



1013 Lava Red



1024 Speckled Blue



1020 Spring Blue

Marmorette Sport



3,2 mm



1076 Pale Yellow



1070 Rocky Brown



1172 Papaya Orange



1048 Cranberry Red



1053 Ice Grey



1050 Quartz Grey



1132 Lime Green



1026 Sky Blue

Colorette Sport



Neocare™



1118 Power Red



1171 Sunrise Orange




1001 Banana Yellow




1132 Spicy Green



1080 Elephant Grey




1004 Bluebird



1123 Poppy Blue



1574 Pure Green



1059 Stone Grey



1052 Oxid Grey




1012 Light Beige



1559 Vintage Grey



Linogym II - 10 mm

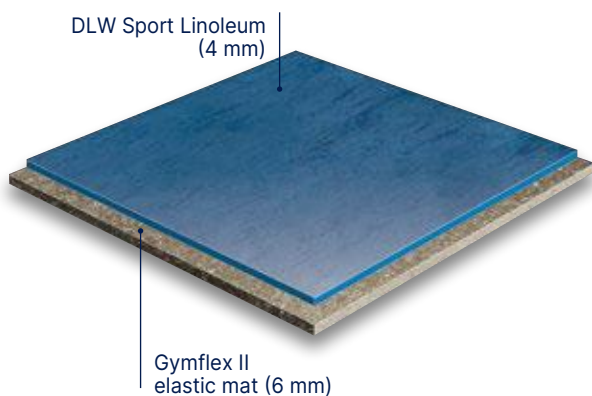

Ideally suited for kindergardens. With a 26% impact absorption rate, **LINOGYM II SYSTEM** provides outstanding cushioning qualities.

THE LINOGYM II SYSTEM – point-elastic flooring!

LINOGYM II SYSTEM brings together the best of Sport Linoleum and elastic matting. It consists of the 6 mm elastic matting Gymflex II on which a 4 mm Sports Linoleum (Linodur or Colorette) will be installed. With a 26% impact absorption rate, **LINOGYM II SYSTEM** provides outstanding cushioning qualities. The elastic matting is made of PUR foam, rubber powder and binder.

Powershock Fitness Rubber Solutions



High impact rubber solutions for fitness


Powershock 80

Cardio & Free-weight zone

POWERSHOCK 80 is:

- ✓ Highly **durable**
- ✓ **Easy to clean and maintain**
- ✓ **Highly resistant** to static loads and to dumbbells thanks to the vulcanization process of this 8 mm vulcanized rubber

Vulcanized rubber is a chemical process through high pressure and temperature enables the sulfur atoms to form links and bridges between long chains of rubber molecules. This increases the overall strength and durability of the rubber.

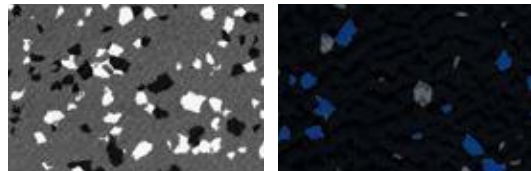


Dark Grey

Black



8 mm
Interlocking tiles with dovetail edges

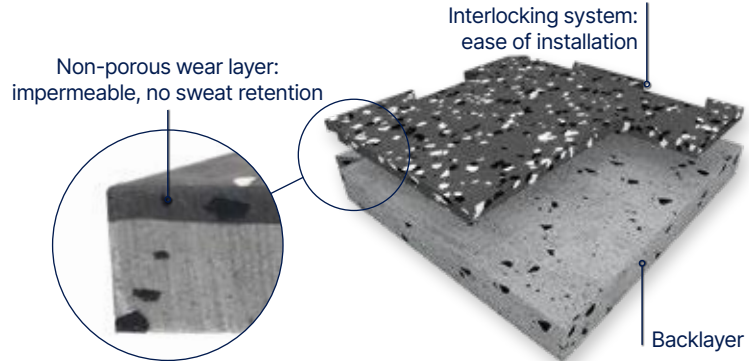

Non-porous wear layer: impermeable, no sweat retention

Interlocking system: ease of installation


Backlayer

Accessories

(available from Romus)



Aluminium reducer
Unit : 3 lm



Multilevel coverstrip
Unit : 2,7 lm


Powershock 300

Crossfit & Heavy-weight area

POWERSHOCK 300

avoids deep-impact damage while providing an outstanding sound deadening, as well as:


- ✓ high **shock absorption**
- ✓ **Sound insulation** of 24 dB
- ✓ great **protection of the subfloor** being a 30 mm high impact rubber.



Dark Grey




30 mm
Tiles with pre-installed connector pins

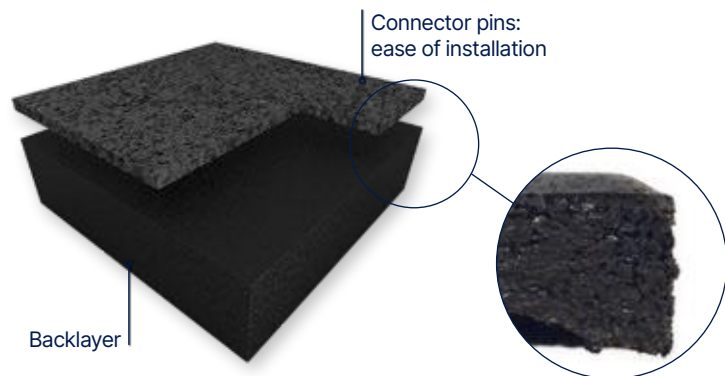


Connector pins: ease of installation

Backlayer

Accessories



Ramp edge rubber 30 mm
1 lm




Corner ramp edge rubber
30 mm
2 units (1000 x 250 mm)

Powershock Fitness Rubber Solutions


Technical Data

					Powershock	
					300	80
					Crossfit & heavy-weight area	Cardio & free-weight area
Description						
Thickness	NF EN ISO 24346	mm		30 (± 2)		8
Weight	NF EN ISO 23997	kg/tile		6,8 (±0,2)		11,9
Size	NF EN ISO 24342	mm		500 × 500 (±0,8 %)		980 × 980 (incl. dovetails)
Classification						
Fire resistance	EN 13501-1	class		Cfl,s1		Bfl,s1
VOC	ISO 16000-6	class		A+		A+
Performance						
Dimensional stability	NF EN ISO 23999	%		< 0,1		< 0,3
Abrasion	EN ISO 5470-1	g		1,5		< 0,5
Light resistance	EN ISO 20105 - B02	level		3		4
Indentation resistance	EN 1516	mm		0,12		< 0,1
Slip resistance in dry condition	EN 13036-4	unit		80-110		80-110
Sound insulation	EN ISO 717/2	dB		24		13
Hardness shore A	Int.	-		60		> 75

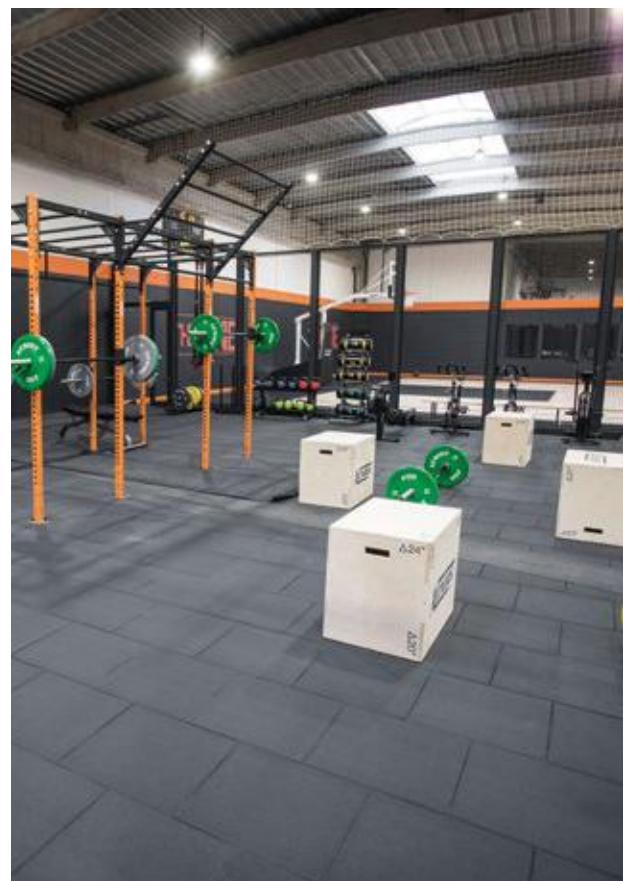

Our solutions for your fitness center

Each zone in your club has different constraints and requirements; we have solutions for each one of them.

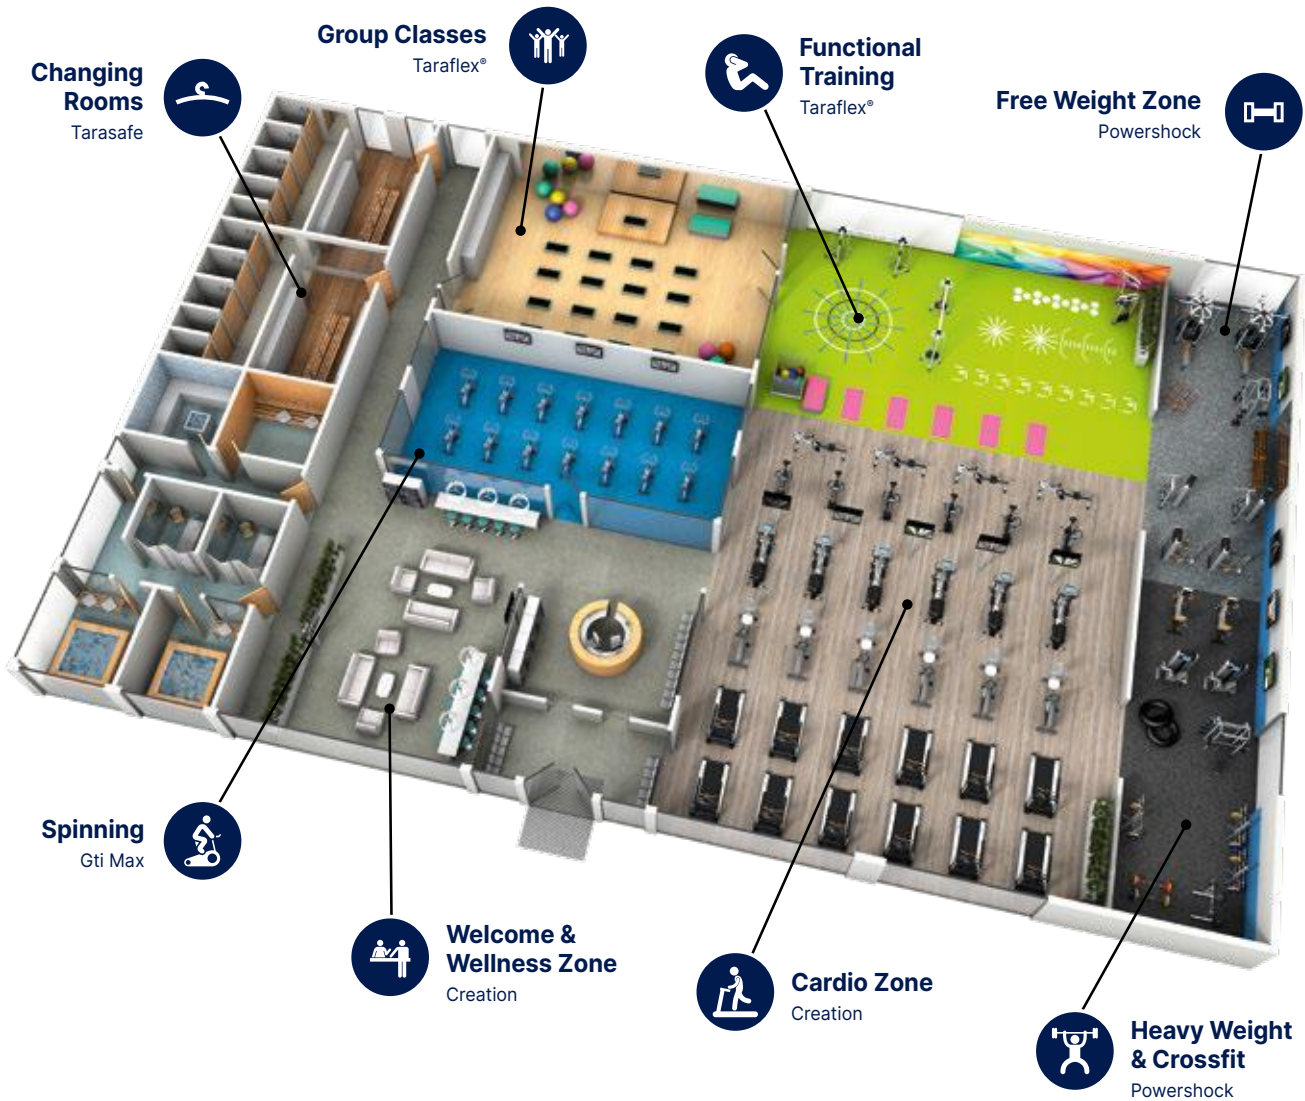

Welcome Zone



Functional Training



Spinning Zone



Cardio Zone



Group Classes



Weightlifting Zone

Sports
Floorings





Finishes

pages 320-351

322. Finishes

336. Technical Solutions

346. Sports Finishes

Finishes

- 323. Skirting and coving solutions**
- 328. Stair solutions**
- 330. Profile solutions**
- 333. Welding solutions**
- 334. Entrance solutions**


FOCUS

Gerflor provides a complete range of solutions including skirting, stairs, profiles and welds.




Finishes


Skirting and coving solutions




Flexible full cove former




Full cove former
Clip system




Capping strip




Capping strip -
Clip system




PVC Cove former



Design skirting (MDF)



Design skirting (PVC)




Semi-rigid skirting


There are two ways of finishing the junction between the floor and wall:

- 1 Installing the PVC covering up to the edge of the wall and using a skirting insert.

This is cost effective and time saving.

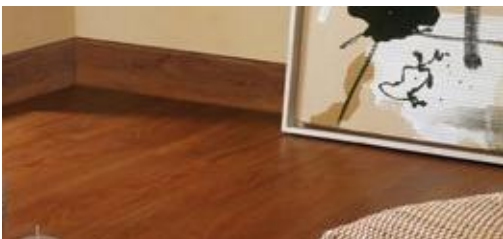

Skirting




- 2 Making a cove.

This solution makes it easier to clean inside angles and edges. It gives a waterproof connection wall/floor covering.



Coving








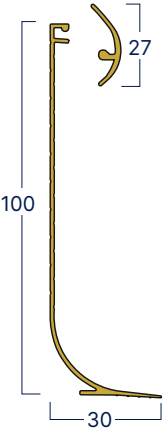


Cove former




Finishes

Coving solutions

PVC CAPPING STRIPS

Description	 <p>FLEXIBLE FULL COVE FORMER</p> <p>PVC profile combining the cover former and the capping strip into a single product.)</p> <ul style="list-style-type: none"> Adapted to the hospital sector and any room requiring a waterproof skirting <p>0488</p>	 <p>FULL COVE FORMER CLIP-SYSTEM</p> <p>PVC profile combining the cover former and the capping strip into a single product.</p> <ul style="list-style-type: none"> Adapted to the hospital sector and any room requiring a waterproof skirting. <p>0487</p>	 <p>P1509 / P769</p> <p>Finishes that can be welded to the floor covering.</p> <ul style="list-style-type: none"> Do not use in commercial kitchens and showers <p>0496 0493</p>
Colours			
Benefits	<ul style="list-style-type: none"> Maximum floor covering thickness 4 mm Guarantees watertightness Quick to install  <p>Packaging 15 × 3 lm strips</p>	<ul style="list-style-type: none"> Maximum floor covering thickness 4 mm Guarantees watertightness Quick & easy to install thanks to the capping strips with clip  <p>Packaging 20 × 3 lm strips</p>	<ul style="list-style-type: none"> P769: Adapted to 2 mm floors P1509: Adapted to 2.2 mm floors   <p>Packaging Packaging 30 × 3 lm strips 2 rolls of 25 lm</p>
Tips	<ul style="list-style-type: none"> Heat the skirting with a heat gun in order to match the shape of the wall Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting 	<ul style="list-style-type: none"> Heat the skirting with a heat gun in order to match the shape of the wall Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting 	<ul style="list-style-type: none"> May also be used as a floor stopping profile Weld with SG916 Use either a double bonding adhesive, a dispersion contact adhesive or a two-side adhesive compatible with the PVC skirting


PVC CAPPING STRIPS



CAPPING STRIPS

Rigid capping strip with flexible lip
 ▶ Do not use in commercial kitchens and showers


0491



CAPPING STRIP CLIP SYSTEM

Rigid clipped finishing profile with 2 flexible lips
 ▶ Capping strip that covers the skirting



0486




PVC COVE FORMER

This accessory allows the floor-wall cove to be formed

4011 - 4012 - 4014



- ▶ Maximum covering thickness: 4 mm
- ▶ **Hygienic**
- ▶ **Easy to install**



Packaging
15 × 3 lm strips

- Slightly heat the strip if it whitens once installed
- Use a miter shear for a perfect cut
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting


- ▶ Maximum floor covering thickness: 4 mm
- ▶ Good watertight seal for finishing floor-wall coves and floor-wall systems notably in industrial kitchens
- ▶ **Easy to install** thanks to the clip system



Packaging
20 × 3 lm strips

- Heat the profile with a heat gun (temperature about 150°C) for the installation of the external corners
- Use a miter shear for a perfect cut
- Use SG916 for a perfect finish of the internal corners
- Slightly heat the profile if it whitens once installed
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting

- ▶ Its rounded shape **makes it easier to clean** the floor-wall junction ▶ Propose une meilleure esthétique
- ▶ Gives a better look
- ▶ Limits the risk of piercing the floor covering
- ▶ **Prevents accumulation** of dirt and bacteria

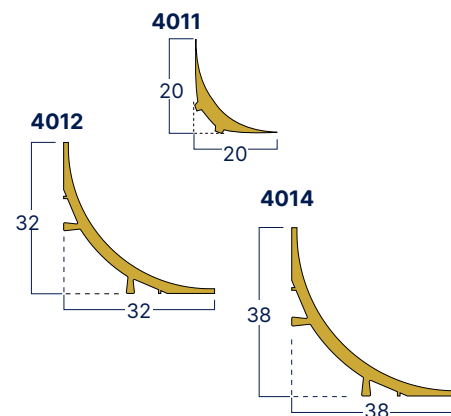

Packaging
30 × 2 lm strips

- Use a miter shear for a perfect cut






Colours and images are not contractual.

Finishes


Skirtings

DESIGN SKIRTING (PVC)

PVC DESIGN SKIRTING ENDCAP

<p>Description</p>	 <p>6086</p> <p>SKIRTING (PVC) Vinyl Design Skirting for a perfect finish of Gerflor floorcoverings. 100% watertight, it could be installed in all environment.</p>	 <p>6087</p> <p>ENDCAP (PVC) These caps allow to cover PVC Design Skirting side.</p>
<p>Colours</p>	 Anthracite grey 0001	
<p>Benefits</p>	<ul style="list-style-type: none"> Thin and discrete, it ensures an elegant finish and hides the dilatation gaps Designs of the Creation 30, Creation 55 and Rigid 30 collections are available Some Creation 70 designs are available The skirting is also available in a paintable white version  <p>Packaging 6 × 2 m</p>	<ul style="list-style-type: none"> PVC cap, aluminum color, fits all our PVC Design Skirtings Can be used for one side of the skirting or the other  <p>Packaging Bag of 10 reversible caps</p>
<p>Tips</p>	<ul style="list-style-type: none"> Use a wood saw with fine teeth Use a mitre box for the corner Do not screw or nail For more information contact the customer service <ul style="list-style-type: none"> Cut one end, glue it, press it 	


PVC CAPPING STRIPS



5947

SKIRTING (MDF)
MDF Design Skirting for a perfect finish of Gerflor floorcoverings.

PVC CAPPING STRIPS




0483 - 0482 - 0477

VYNAFLEX
Semi-rigid PVC skirting to be placed on the wall

	Blanc 0822		Perle 0436		Nuage 0434
	Beige 0454		Gris 0430		Noir 6512
	Noisette 3013				


- ▶ Available in all designs of Creation 30, Creation 55, Top Silence and Rigid collection
- ▶ Some Creation 70 designs are available
- ▶ It ensures an elegant finish and hides the dilatation gaps
- ▶ The skirting is also available in a paintable white version

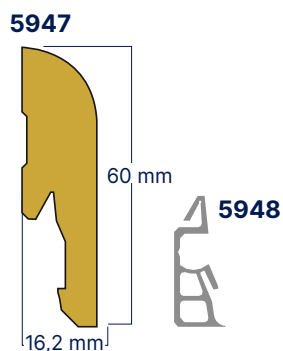

Packaging

5947: 5 × 2.2 m
5948: 1 box of 30 clips

- ▶ Solid colour
- ▶ Resistant to washing waters

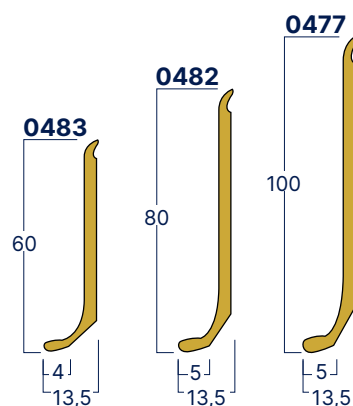

Packaging

0483 / 0477: 25 × 3 lm strips
0482: 32 × 3 lm strips

- Use a wood saw with fine teeth
- Use a mitre box for the corner
- For more information contact the customer service

- Use skirting corner Cutter to handle internal and external angles
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting
- Apply an adhesion primer if the sub-floor is porous

Colours and images are not contractual.

Finishes

Stair solutions

Gerflor has developed 2 solutions for installing a Vinyl floor on stairs to complement its range of floors:


1 Tarastep

- Install the base of the finishing clip onto the flat angle of the stair
- Install the Tarastep
- Clip the stair clip system

Adapted to rounded stair nosing.

Mill the angle for straight stair nosing.


For bird's beak stair nosing, fill the void beforehand.

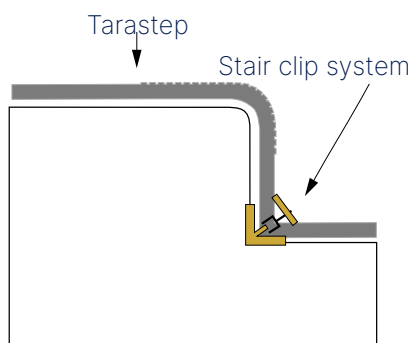

2 Stair nosing insert


- Install the vinyl flooring and the stair nosing by starting at the bottom of the stair
- Install the riser
- Install the stair nosing
- Install the flat of the stair
- Weld

Adapted to straight stair nosing, rounded stair nosing and bird's beak stair nosing.

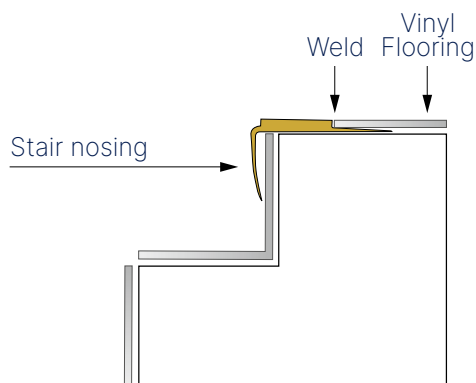

STAIR NOSING INSERT

Description



ALUMINIUM STAIR NOSING
T67 ALU
 ▶ Landing/stair harmony
 ▶ Guarantees floor covering durability


0503

Colours



- ▶ For a state-of-the-art stair finish
- ▶ Delivered with a black strip made out of carborandum for an improved anti-sliping action of the stair nosing

Benefits

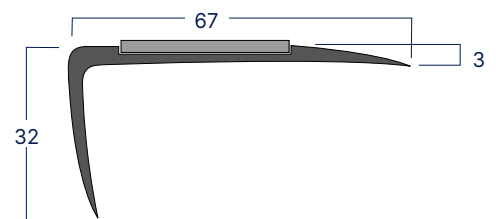


Packaging

10 × 3 lm strips + 10 carborandum strips

Tips


- Secure with flat head cross head countersunk stainless steel screws (not included)

STAIR NOSING INSERT



GROOVED PVC STAIR NOSING
T49/4R - T49/3R - T49/2R
Straight angles

0424 - 0462 - 0461



GROOVED PVC STAIR NOSING
T27/3R
Rounded angles
and bird's beak

0467


- Grooves provide anti-slip protection
- Landing/Stair harmony
- Ensures floor covering durability




T49/4R - T49/3R - T49/2R
▸ Adapted to 2, 3 or 4 mm floor covering
▸ Weldable

T27/3R
▸ Adapted to 3 mm floor covering
▸ Weldable


T49/2R - 0461




T49/4R - 0424



T49/3R - 0462



T27/3R - 0467



Packaging
10 × 3 lm strips

Packaging
10 × 3 lm strips


- Do not apply adhesive to the vertical part of the stair nosing
- Double bonding

Colours and images are not contractual.


Finishes

Profile solutions

Our profiles provide solutions to several problems concerning links between floors, walls or bare spots depending on the flooring thickness and technical requirements.




Diminishing profile




Connection profile



Aluminium coverstrip



Ramp edges



Aluminium profiles


They in particular, allow two types of connections to be dealt with:

1 Connecting profiles

The connections between two floor coverings

- Floor/Floor
- Floor/wall


Allow the link between two floor coverings with different thicknesses.









2 Ramp edges

The vinyl floor/bare spot connections

Protect the edging and prevent the floor covering from delaminating.

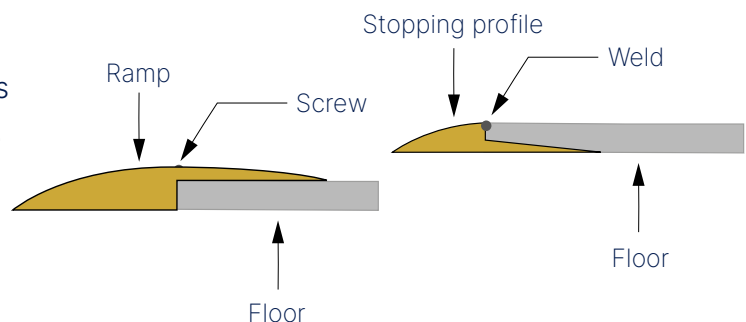











PVC profiles

	FLOOR TO WALL CONNECTING PROFILE	FLOOR TO FLOOR CONNECTING PROFILE	RAMP EDGES
Description	 <p>DIMINISHING PROFILE</p> <ul style="list-style-type: none"> ▸ Coving/wall covering connection ▸ Used in laboratories, hospital shower systems, commercial kitchens <p>0490</p>	 <p>P1509</p> <ul style="list-style-type: none"> ▸ These products allow the link between two-floor coverings to be made <p>0496</p>	 <p>P769</p> <ul style="list-style-type: none"> ▸ Connect other surfaces and vinyl floors <p>0493</p>
Colours	<ul style="list-style-type: none"> Noir 6512 	<ul style="list-style-type: none"> Noir 6512 Gris 4203 	<ul style="list-style-type: none"> Noir 6512 Gris 4203
Benefits	<ul style="list-style-type: none"> ▸ Makes it easier to link the floor covering and wall ▸ Hygienic. Avoids bacteria accumulation ▸ Prevents the floor covering from tearing, improves durability and ensures watertightness  <p>Packaging 2 rolls of 25 lm</p>	<ul style="list-style-type: none"> ▸ Junction between two floors of 2.2 mm and 5 mm ▸ Floor covering can be welded to profile to create a watertight seal ▸ Can also be used as a finishing profile  <p>Packaging 30 × 3 lm strips</p>	<ul style="list-style-type: none"> ▸ Floor covering welding system ▸ Suitable for 2 mm floors ▸ Ensures watertight seal ▸ Can also be used as a capping strip  <p>Packaging 2 rolls de 25 lm</p>
Tips	<ul style="list-style-type: none"> • Bonding with acrylic adhesive 	<ul style="list-style-type: none"> • Polychloroprene double bonding 	<ul style="list-style-type: none"> • Double bonding

Colours and images are not contractual.

Finishes

Aluminium Ramp Edges

	SCREWED	LOOSELAY	
Description	 <p>ALUMINIUM RAMP 2.8 MM</p> <ul style="list-style-type: none"> ▸ Access ramps resistant to high traffic and humidity <p>0504</p>	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>ALUMINIUM RAMP 5-6 MM</p> <p>0505</p> </div> <div style="text-align: center;">  <p>ALUMINIUM CORNER 5-6 MM</p> <p>1513</p> </div> </div> <p style="text-align: center;">▸ Access ramps resistant to high traffic and humidity</p>	 <p>PVC RAMP 6 MM</p> <p>0500</p>
Colours	 0001	 0001	
Benefits	<p>Product suitable for floor coverings of:</p> <ul style="list-style-type: none"> ▸ 2-3 mm (Creation 70, Creation 55, Creation 30, ...)  <p>0504</p> <p>Packaging 10 × 3 lm ramps</p>	<ul style="list-style-type: none"> ▸ Smooth shape for more utilisation comfort ▸ Connectors for a perfect connection of 2 profiles ▸ Pre-assembled corners for an easier installation and a perfect finish <p>Products suitable for floor coverings of:</p> <ul style="list-style-type: none"> ▸ 5-6 mm (Attraction®, GTI® MAX, Creation 70 Clic, Creation 55 Solid Clic, Creation 30 Solid Clic, ...) <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>0505</p> </div> <div style="text-align: center;">  <p>1513</p> </div> </div> <p>Packaging 5 × 3 lm ramps (0505) / 4 corners (1513)</p>	<ul style="list-style-type: none"> ▸ Product suitable for floor coverings of 6mm (GTI®) ▸ Easy to install & and no floor damage : time saving ▸ Unbreakable & less scratches : fewer replacing costs ▸ Easy to cut  <p>0500</p> <p>Packaging 8 lengths x 2 lm / box</p>
Tips	<ul style="list-style-type: none"> • Delivered with fixation kit • Screwing of the ramp to the floor with flat cross head countersunk stainless steel screws (Aluminium ramp 5-6 mm and aluminium corner) 	<ul style="list-style-type: none"> • Looselay installation without damaging the subfloor (looselay ramp) 	

Welding solutions

HOT WELD

Description




WELDING RODS

- This is used for all types of PVC floors, for coving sport floors
- Ensures a complete watertight seal

Gerflor has a large range of rods available

Ø 4 mm / Ø 4.1 mm / Ø 5 mm / Ø 6 mm



The welding rod is placed in the chamfer between two floor coverings. When heated, it melts and fills the entire space to ensure complete watertight seal.



WELDING ROD AND FLOORING MATCHING TOOL

<http://www.gerflor.com/servicesprofessionals/welding-rods-matching.html>

Benefits

Product suitable for floor coverings of:

- **CR40:** Floor/floor weld - Code 0585
- **CR50:** Welding of sport floors - Code H209

Specific weld rods

- **CR50:** Weld, Tarasafe Plus, floor repairs on special order - Code H009
- **CA72:** Triangular rod for commercial kitchen floor to base welding - Code H007
- **CR60:** Welding of sport floors, repair on special order - Code H011
- **BBR40:** 100% Bio-based plasticizer rod for Mipolam Symbioz
- **MCR40:** Multicolor rod for Mipolam Accord & Affinity - Code H058

Packaging

CR40, BBR40, CR50, CA72: 100 lm. coil
 CR60: 60 lm. coil
 MCR40: 50 lm. coil

Please contact us for further information on weld rods

Tips

- For a better weld the correct grooving should be performed.
- Use an adapted nozzle (Ultra Speed Nozzle).

Colours and images are not contractual.

Finishes

Entrance Solutions

Three cleaning zones to be covered at the entrance to a building

Each zone has a specific "cleaning" role:



Zone 1




Ribbed Rubber Insert

Romat
Frequent traffic (500 p/day) 

Romat GT
Heavy traffic (500 to 2,000 p/day) 

Reversible
Intensive traffic (> 2,000 p/day) 


Zone 2



Textile Insert

Romat
Frequent traffic (500 p/day) 

Romat GT
Heavy traffic (500 to 2,000 p/day) 

Rubber Grate Insert
Romat reverse
Intensive traffic (> 2,000 p/day) 

Zone 3



Dirt-Trapping Mat

Ronet
Frequent traffic (500 p/day) 

Roclean
Heavy traffic (> 500 p/day) 

Entrance Mats

- Eliminate dust, moisture and other residue from visitors' feet as efficiently as possible at the entrance of a building.
- Prevent premature soiling and wear of floor coverings.

QUICKMAT TILES



Modular entrance mat that can be incrustated in Gerflor LVT floor covering without damaging the subfloor. It helps to scratch the underside of shoes and protects the building from outside dirt. For areas with frequent pedestrian traffic (up to 2000 people per day).

▸ Packaging: 1 sqm box

QUICKMAT TILES
Ref. 1725 - 23 × 75 cm planks

QUICKMAT PROFILES
Réf. 1726 - tube of 4×2 lm profiles

QUICKMAT TILE ANGLES
Réf. 1727 - (box of 4 angles)

LOOSELAY ROMAT GT - INSERT KIT



For pedestrian traffic only.

Entrance mat affording floors of buildings efficient and sustainable protection from pedestrian traffic by forming a barrier to outside dirt. Thanks to its loose-lay installation, the mat can be installed without damaging the surface. Adapted for an important pedestrian traffic (up to 2000 people per day).

This kit contains:

- 1 mat
- 4 frames composed of 4 lower and 4 upper profiles
- 4 external pre-assembled corners
- 60 5-7 screws
- 1 Installation guideline

Ref. 1719 - 1.5 × 1 m

KIT ESPLANADE 9000



Kit for the incrustation of an ESPLANADE 9000 mat in an area covered with Attraction®, GTI®, Creation 55 Solid Clic, Creation 70 Clic. The closed conception of the mat enable to scratch the underside of shoes and increase the durability of the floors. It resists to intense pedestian traffic (up to 5000/day) and to mecanial traffic.

▸ Packaging: 2.5 sqm kit: 3 mats modules, 4 upper and 4 lower profiles, screws.

Ref. 1700 - 1.5 × 1.5 m

Technical Solutions

337. Shower system

338. Accessibility

340. LVT Underlayers

342. Specific products

343. Isolating membranes

343. ESD copper strip

344. Adhesives and tapes

FOCUS

Gerflor offers a full range of technical solutions such as the shower system, copper strips, adhesives or tools in order to provide all the technical requirements on site.




Technical Solutions


Shower System

A complete floor and wall solution with a choice of two floor coverings, one wall covering and seven accessories.


- Safety: Grained floor covering with slip resistance (Elegance SD, Tarasafe Ultra H2O, Standard, Geo, Ultra Compact)
- Watertight system floor/wall junction
- System which guarantees hygiene
- Combination of colours: 31 wall references and 16 floor references
- Access for all




Cove former for internal wall angles CA 12 - H204




Perfect CR 40 wall weld 0585




Diminishing profile - 0490



Clean Corner System IN 058S



Clean Corner System OUT 058R



Cove former 4011



Tarafoam: acoustic insulation sublayer - 997C



Inox grid - 090C



Drains PVC 090A-Vertical 090B-Horizontal



Réhausse de siphon 090D



Couteau compas 090E



Shower threshold - 0469

The threshold has been developed in 3 colours: grey, beige and blue in order to answer to the specific requirement of Alzheimer units (no contrast).

- gris
- beige clair
- bleu

More information on gerflor.com

Technical Solutions


Accessibility





WARNING SURFACES

ALERTILE, SELF-ADHESIVE OR WELDABLE TACTILE SLAB

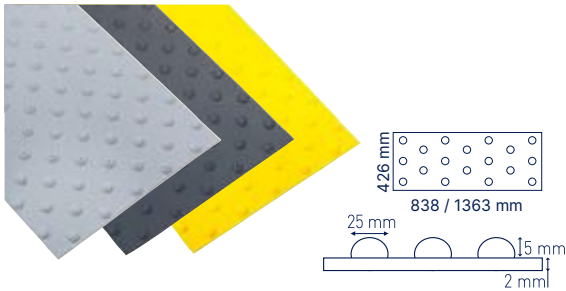

Dimensions: 426 × 1363 mm / 426 × 838 mm
 Packaging: 8 units per box (838 mm)
 4 units per box (1363 mm)
 Codes: 059B (838 mm) / 059A (1363 mm)

EASYPLOT, THE AESTHETIC SOLUTION FOR WARNING




Packaging: Kit of 198 studs (6 planks de 33 studs)
 approx. 1.3 m x 0.4 m
 Codes: 059C (Grey, Black) - 059D (Alu)



GUIDING

EASYGUIDE, THE SELF-ADHESIVE SOLUTION FOR GUIDING

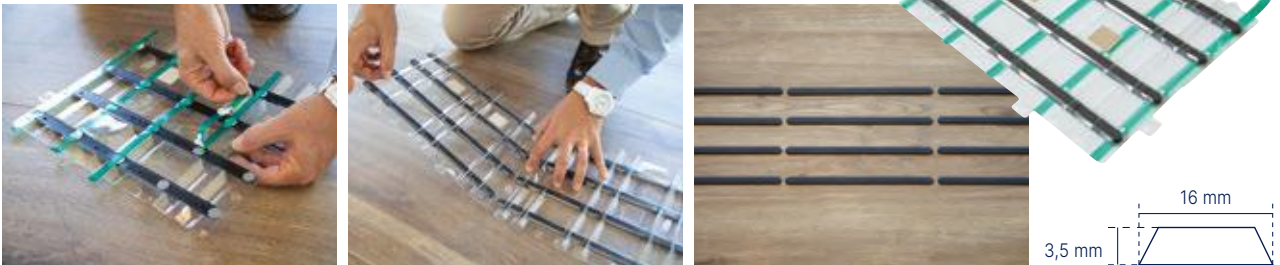

Packaging: Box of 6 slabs 300 × 220 mm (4 bars/slab) for 1.8 m of guideline
 Code E219




SIGNAGE

Personalised cut-to-size system



For more information, please refer to the "A Global Solution for Accessibility" brochure.

For more information, please refer to the "Creative Design Service"

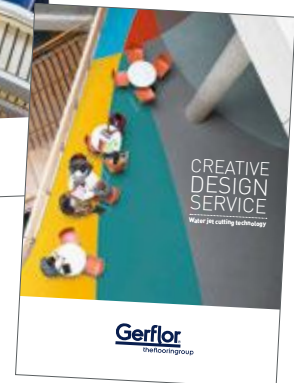

Technical Solutions

LVT Underlayers

CREATION 30/40/55 SOLID CLIC & CREATION 70 CLIC

CREATION 40/55 SOLID CLIC - HOME CLIC

Description

GERFLOR ACOUSTIC 15 DB



1798

- Sound absorption underlay in roll

GERFLOR SILENCE PLUS 19 DB



5949

- Sound absorption underlay in accordion

Benefits

- Reduces impact noise up to **15 dB**
- Adapted to the same traffic than the LVT but semi-industrial or industrial application
- Thickness: **0.93 mm**

- Reduces impact noise up to **19 dB**
- Adapted to the same traffic than the LVT but semi-industrial or industrial application
- Thickness: **1.5 mm**

Packaging
1798 - 1 × 15 lm = 15 sqm

Packaging
5949 - 1.18 × 8.5 lm = 10 sqm


Tips

- Underlay is rolled on reverse
- Refer to technical installation guidelines to check the approved products

- Printed side on top
- Refer to technical installation guidelines to check the approved products

CREATION 70 CLIC + 30/40/55 SOLID CLIC

GERFLOR ACOUSTIC PLUS 19 DB

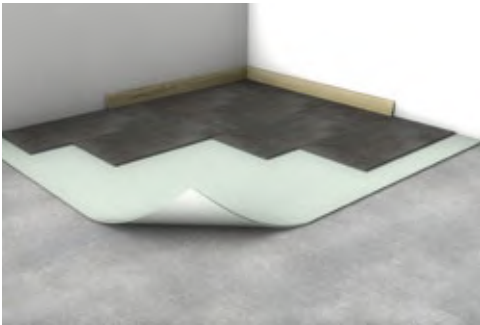

0704

- Sound absorption underlay in roll

- Reduces impact noise up to **19 dB**
- Adapted to the same traffic than the LVT but semi-industrial or industrial application
- Thickness: **1.2 mm**

Packaging

704 - 0,98 × 15,3 lm = 15 sqm

- Unroll the underlay
- Refer to technical installation guidelines to check the approved products

CREATION 30/40/55

GERFLOR SMART FIX 16 DB



1698

- Underlay with self-adhesive surface
- Sound absorption underlay in roll

- For a loose lay installation of LVT dry back.
- Reduces impact noise up to **16 dB**
- Adapted to the same traffic than the LVT but semi-industrial or industrial application
- Thickness: **2 mm**

Packaging

1 × 7.5 lm = 7.5 sqm

- Fleece side: on the subfloor
- Adhesived side: under the LVT
- Refer to technical installation guidelines to check the approved products

Technical Solutions

Specific Products

Gerflor offers a set of products providing solutions to specific problems such as accessibility, insulation, maintenance of floors and electrical conductivity of our floors.



ISOLATING MEMBRANES



ESD COPPER STRIP




WATERTIGHT



RESISTANT & DURABLE



CLEAN

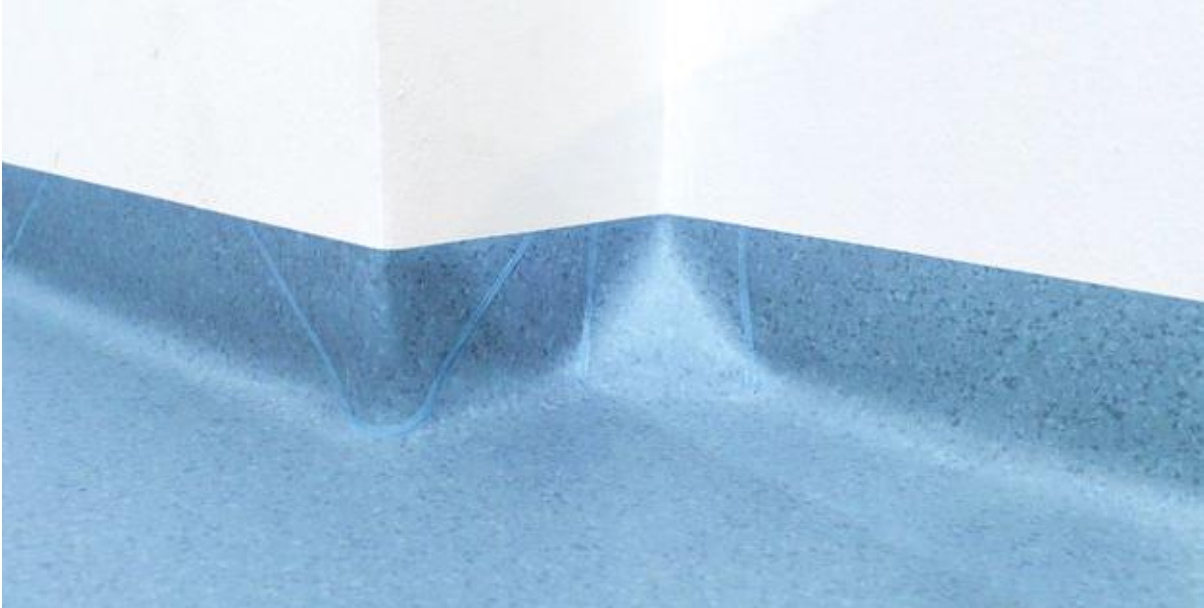

CLEAN CORNER SYSTEM FOR ALL GERFLOR FLOORS



	ISOLSPORT	TARAFOAM	COPPER STRIP
Description	 <p>0829 0002 VINYL ISOLATING MEMBRANE Specially designed for sports For installation on concrete subfloors</p>	 <p>997C 6792 COMFORT VERSION OF THE SHOWER SYSTEM</p>	 <p>0586 0001 ESD COPPER STRIP Copper strip enabling earthing</p>
Benefits	<ul style="list-style-type: none"> ▸ Vinyl isolating membrane, double side on non woven glass fibre with backing design made up of 3-branch star foam pads. ▸ Its design enables loose laying on sensitive subfloors (risks of humidity, coated, etc.) when it is associated with a Taraflex® sporting floor. The raised effect allows humidity to circulate. ▸ Thickness: 1.7 mm 	<ul style="list-style-type: none"> ▸ Provides acoustic insulation for the shower system (15 dB) and comfort under foot. ▸ Thickness: 2 mm 	<ul style="list-style-type: none"> ▸ For electro-conductive floor coverings such as Elegance EL5, Technic EL5, GTI® EL5, Affinity EL7, Robust EL7 ▸ Width 10 mm, thickness 0.08 mm
Tips	<p>Packaging 1 × 45 lm roll</p> <ul style="list-style-type: none"> • Bond well at doors with PU adhesive to prevent delamination. • Keep the raised surface, floor side, on the periphery • Edge to edge installation 	<p>Packaging Roll of 2 m x 20 lm - 40 m²</p> <ul style="list-style-type: none"> • Levels out around the edge of the room • Acrylic bonding • Edge to edge installation 	<p>Packaging 1 × 200 lm roll</p> <ul style="list-style-type: none"> • Prevent discontinuity between the angles by folding it back onto itself

Colours and images are not contractual.

Technical Solutions

Adhesives and Tapes

Gerflor has developed specific bonding solutions to make it easier to install its products.

	ADHESIVES	HOOK & LOOP AND DOUBLE SIDED TAPE FOR TEXTILE BACKING
Description	<p>GERPUR</p>  <p>086C 0083 Specially designed for sports Only for Dry Tex™ System (bonding of Taraflex sport floors with non-woven backing)</p>	<p>D75</p>  <p>0534 0001</p>
		Width: 75 mm
Benefits	<ul style="list-style-type: none"> ▸ Bonding on new and old humid concrete subfloor ▸ Mono component PU adhesive, reactive to humidity which enables the DTX material to be fully bonded in humid environment (no restriction of humidity levels with the exception of surface water) ▸ Consumption: 400 to 450 g/m² <p>Packaging 15 kg bucket</p>	<ul style="list-style-type: none"> ▸ D75 enables installation of vinyl floor coverings with textile backing on the perimeter and under joints. ▸ Time saving and cleanliness by comparison with a bonded system. ▸ No gumming time and no smell. <p>Packaging 1 × 25 lm roll</p>
Tips	<ul style="list-style-type: none"> • To be applied with ergonomic trowel for rigid adhesive and B1 blade 	


hop HOLDING TAPE New

NON-MIGRATING DOUBLE SIDED TAPES

hop HOLDING TAPE

FIX&FREE 100

FIX&FREE 740



059E0001

058U 0001

058W 0001

Width: 96 mm

Width: 100 mm

Width: 740 mm

- ▶ Reinforced tape : durable
- ▶ Easy to position
- ▶ No transfer to surface underneath
- ▶ Easy to remove without damaging the support
- ▶ Makes welding easier

- ▶ New double-sided tapes in order to install and uninstall our floorcovering easily, without damaging the subfloor. This is particularly useful for "ephemeral areas" (in retail for instance) or for renovation of subfloor containing asbestos.
- ▶ Fix&Free 100 is suitable for textile backing floorcovering.
- ▶ Fix&Free 740 is suitable for Creation Clic and GTI®.
- ▶ Time saving and cleanliness by comparison with a bonded system.
- ▶ No gumming time and no smell.

Packaging
1 × 50 lm roll

Packaging
1 × 50 lm roll

Packaging
1 × 25 lm roll

Colours and images are not contractual.

Sports Finishes

- 347. Marking
- 348. Specific Products
- 350. Adhesives and Tapes
- 351. Tools - Sport



FOCUS

We provide finishing solutions suitable for sports floor coverings such as permanent or temporary line marking solutions.

Sports Finishes

Marking



PERMANENT GAME LINES (PAINT)

Description	Article code	Components
KIT TLD AQUA BASKET	085V0001	4 red paint's can, 4 hardener's can, 9 adhesive tapes and 1 roller
KIT TLD AQUA BADMINTON	085W0001	3 black paint's can, 3 hardener's can, 7 adhesive tapes and 1 roller
KIT TLD AQUA TENNIS	085X0001	3 white paint's can, 3 hardener's can, 7 adhesive tapes and 1 roller
KIT TLD AQUA HANDBALL	085Y0001	4 yellow paint's can, 4 hardener's can, 9 adhesive tapes and 1 roller
KIT TLD AQUA VOLLEY	085Z0001	2 blue paint's can, 2 hardener's can, 3 adhesive tapes and 1 roller

TEMPORARY GAME LINES (TAPE)

Description	Article code	Use
3M TAPES BLACK (**)	H1970002	For game lines
3M TAPES WHITE (**)	H1970004 (*)	For game lines - White = Tennis
3M TAPES RED (**)	H1970005	For game lines - Red = Basket
3M TAPES BLUE (**)	H1970006	For game lines - Blue = Volley



GAME LINE EQUIPMENT (PERMANENT & TEMPORARY)

Description	Article code	Use
GAME LINE MARKING DEVICE	087W0001	Circular line marking of up 9 m radius can be achieved with this device.

COMPONENTS

- ① Marking head with 50 mm adhesive marking tape
 - ② Marking head with 19 mm protective tape
 - ③ Extension poles
 - ④ Pole-connections
 - ⑤ Centre-part with 2 suction cups
 - ⑥ Sheet metal guides for straight lines
 - ⑦ Transporting case ABS
 - ⑧ Case for extension poles
- Circle cutter (optional for only 087X0001)

GAME LINE MARKING DEVICE AND CIRCLE CUTTER	087X0001
--	----------

(*) White color can be used for any other monosport court.
 (**) To be installed on Taraflex® Range except on canvas or tennis embossing.



Game Line Marking Device



Circle Cutter

Sports Finishes

Specific Products / Isolating membrane & cleaning detergents

	BATECO	SPORT FLOOR MAINTENANCE
Description	 <p>H3756801 (customized lengths) HM126801 (standard lengths at 20 lm) HM066801 (standard lengths at 30 lm)</p> <p>PROTECTIVE SURFACE</p> <p>Specially designed for sports Suitable for gymnasium / reception hall versatility</p>	 <p>085P 0001 TRACIFLEX</p> <ul style="list-style-type: none"> ▸ Multipurpose detergent for cleaning the vinyl sport floors (shoe marks and contact marks) ▸ Also suitable for floors which are difficult to clean ▸ For daily or weekly maintenance
Benefits	<ul style="list-style-type: none"> ▸ Protective surface made from black calendered and grained plasticised vinyl. ▸ Taraflex Bateco is especially designed to protect sport floors in the event of non-sports use of the room. It prevents marking by chairs, tables, heels on the sport floor. ▸ Thickness: 1.5 mm <p>Packaging 1 × 20 lm roll / 1 × 30 lm roll</p>	<ul style="list-style-type: none"> ▸ Removes resin from Handball courts ▸ Recommended in sport room  <p>Packaging 1 l can</p>
Tips	<ul style="list-style-type: none"> • Edge to edge installation • Strips can be secured with single-sided adhesive tape AT7 	<ul style="list-style-type: none"> • Traciflex may be sprayed on stubborn stains

Specific Products / Cleaning detergents

SPORT FLOOR MAINTENANCE



085E 0001

TANEX TROPHY

- Multipurpose detergent for cleaning the vinyl sport floors (shoe marks and contact marks)
- Also suitable for floors which are difficult to clean
- For weekly maintenance

- Pour l'ensemble des sols sportifs



Packaging
5 l can

PROTECSOL® FLOOR MAINTENANCE



085A 0010

SPRAY TARACLEAN

- Spray cleaner to remove occasional and tough stains, notably resin marks

- Suited to all types of floors treated with ProtecSol®
- Easy and quick to use

Packaging
Box of 12 pieces

Colours and images are not contractual.

Sports Finishes

Adhesives and Tapes

DOUBLE SIDED TAPES FOR SPORT FLOORS

Description	D210	AT7	TARAFIX SL New
	 <p>088T0001</p> <p>D210: SPECIAL DOUBLE-SIDED TAPE FOR WOOD FLOORS</p>	 <p>H206 0001</p> <p>SINGLE-SIDE TAPE</p>	 <p>06480001</p> <p>HOLDING STRIPS FOR TARAFLEX® SL SOLUTIONS</p>
Benefits	<p>Width: 96 mm</p> <ul style="list-style-type: none"> Adapted to temporary installation on wood floors Requires a test on site for validation <p>Packaging 0.096 × 45 lm roll (96 mm x 45 m)</p>	<p>Width: 100 mm</p> <ul style="list-style-type: none"> Black Bonds without leaving marks, non migrating <p>Holds strips:</p> <ol style="list-style-type: none"> During non sportive events Enables the material to be secured on the tube at the time of winding Holds strips during the storage time <p>Packaging 0.1 × 33 lm roll (100 mm x 33 m)</p>	<p>Width: 96 mm</p> <ul style="list-style-type: none"> Reinforced tape : durable Easy to position No transfer to surface underneath Easy to remove without damaging the support Makes welding easier <p>Packaging 0.096 × 25 lm roll</p>
Tips	<p>Required material:</p> <ul style="list-style-type: none"> Double side tape reel Unroller for double sided tapes H372001 	<p>Required material:</p> <ul style="list-style-type: none"> AT7 tape reel Unroller for single sided tapes H367 0003 	<p>Required material:</p> <ul style="list-style-type: none"> Unroller for single sided tapes H367 0003

Refer to the product glossary for information on colours and packaging

Tools - Sport

STORAGE EQUIPMENT




Description	Article Code	Use
NAIROD PALLET (brand new)	087Q0057	For transportation and storage of mobile court (160 × 120 × 180)
NAIROD PALLET (2 nd hand)	087Q0057	

Description	Article Code	Use
SERVING TROLLEY Portable floors	087A0035	To wind and unwind Bateco or portable floors
SERVING TROLLEY Bateco	088F0001	
UNWINDING TROLLEY Bateco	088D0001	

Description	Article Code	Use
STORAGE RACK FOR 4 ROLLS DPP4	087E0039	For BATECO storage
STORAGE RACK FOR 4 ROLLS DPP4	088N0001	For portable floors
STORAGE RACK FOR 6 ROLLS DPP6	088O0001	For BATECO storage
STORAGE RACK FOR 6 ROLLS DPP6	088K0001	For portable floors
STORAGE RACK FOR 8 ROLLS DPP8	087B0037	For BATECO storage
STORAGE RACK FOR 8 ROLLS DPP8	088S0001	For portable floors
STORAGE RACK FOR 10 ROLLS DPP10	088J0001	For BATECO storage
STATIC WALL STORAGE RACK	088E0001	

ACCESSORIES

Description	Article code	Use
CONES	087F0040	Special cones connect the inside cardboard tube with poles. This specific element is only suitable for round tubes poles
GUIDING POLE	H5390023	Fixed at the front of the storage rack to easily wind and unwind Bateco or portable floors
MOTORISED UNWINDING KIT	088G0001	Motorised system to easily wind and unwind Bateco or sports floors
HOLDING STRAP	H2950001	Holding strap to prevent roll unwinding



**087G0042
FRAME EXTENSION PAIR:**
The frame extension pair is only to support the roll hoist. It enables the lifting of rolls to the highest position on roll stands.

Only if roll length up to 28 lm, to be ordered with storage racks

**H4000012
ROLL HOIST PAIR:**
Additional device for easy upload or download of rolls.





Specifications

pages 352-359

354. Gerflor specifications

Gerflor Specifications

Healthcare - Hospital - Clinic - Retirement Home
Office - Administration



Mipolam Homogeneous		Premium		Taralay Multilayered						Technical Tiles			
Compact	Compact	Acoustic	Compact	Textile backing	Acoustic	Compact	Compact	Acoustic	Compact	Acoustic	Compact		
Homogeneous Flooring (Evercare™)	Homogeneous Flooring (PUR)	Premium Comfort / Taralay Millenium Acoustic	Premium Compact / Taralay Millenium Compact	Taralay Libertex	Taralay Impression Acoustic / Taralay Impression Hop Acoustic	Taralay Initial Comfort	Taralay Impression Compact / Taralay Impression Hop Compact	Taralay Initial Compact	Nerok 55/70	Tarastep Pro	Attraction®	GTI® Max / GTI® Pure	GTIEL5

HEALTHCARE - HOSPITAL - CLINIC

Reception	•		•										
Corridors	•		•	•									
Waiting room	•		•	•	•		•	•					
Bedroom	•		•		•		•	•					
Bathroom - Toilets													
Carerom - Medical - Sick bay	•		•	•	•		•	•					
Rehabilitation room			•		•								
Surgery	•		•	•	•		•	•					
Theatre block	•		•	•									
Intensive care unit	•		•	•									
Radiotherapy - Laboratory	•			•									
Laundry - Store room											•	•	•
Stairs										•			

RETIREMENT HOME

Reception	•		•	•			•	•					
Corridors	•		•	•	•			•	•				
Bedroom	•		•	•	•	•		•	•				
Bathroom - Toilets													
Living room			•	•	•			•	•				
Laundry - Store room											•	•	•

OFFICE - ADMINISTRATION












Reception	•		•	•			•						
Office			•	•	•			•	•				
Bathroom - Toilets													
Meeting room - Board room			•	•	•			•	•				
Computer room													•
Stairs										•			

• GERFLOR's recommendation

□ Other possible solutions

Gerflor Specifications

Education - Industry - Hotel - Restaurant

	Mipolam Homogeneous		Premium		Taralay Multilayered						Technical Tiles		
	 Compact	 Compact	 Acoustic	 Compact	 Textile backing	 Acoustic	 Compact	 Compact	 Acoustic	 Compact			
Homogeneous Flooring (Evercare™)	Homogeneous Flooring (PUR)	Premium Comfort / Taralay Millennium Acoustic	Premium Compact / Taralay Millennium Compact	Taralay Libertex	Taralay Impression Acoustic / Taralay Impression Hop Acoustic	Taralay Initial Comfort	Taralay Impression Compact / Taralay Impression Hop Compact	Taralay Initial Compact	Nerok 55/70	Tarastep Pro	Attraction®	GTI® Max / GTI® Pure	GTI® EL5

EDUCATION

Reception	•			•	•				•	•			
Corridors	•		•	•	•				•	•			
Classroom	•		•		•	•	•		•	•			
Dormitory room					•	•	•		•	•			
Changing room													
Bathroom - Toilets													
Meeting - Library			•		•	•	•		•	•			
Computer room			•			•	•						•
Laboratory	•			•					•	•			•
Student's residence					•	•	•			•			
Student's refectory	•		•			•							
Multipurpose room - Hall	•		•			•							
Stairs										•			

INDUSTRY

Clean room / Laboratory	•			•										•
Changing room	•			•										
Computer room														•
Production	•			•									•	
Stocking and Packaging areas													•	
Stairs										•				

HOTEL - RESTAURANT











Reception					•			•	•					
Bedroom					•		•							
Bathroom - Toilets														
Restaurant - Bar					•			•	•					
Conference - Exhibition	•			•	•			•	•					
Cinema - Show - Theatre			•			•								
Stairs										•				

• GERFLOR's recommendation

□ Other possible solutions

Gerflor Specifications

Retail - Housing - Kitchen

	Mipolam Homogeneous		Premium		Taralay Multilayered						Technical Tiles	
	 Compact	 Compact	 Acoustic	 Compact	 Textile backing	 Acoustic	 Compact			 Acoustic	 Compact	
Homogeneous Flooring (Evercare™)	Homogeneous Flooring (PUR)	Premium Comfort / Taralay Millennium Acoustic	Premium Compact / Taralay Millennium Compact	Taralay Libertex	Taralay Impression Acoustic / Taralay Impression Hop Acoustic	Taralay Initial Comfort	Taralay Impression Compact / Taralay Impression Hop Compact	Taralay Initial Compact	Tarastep Pro	Attraction®	GTI® Max / GTI® Pure	GTI EL5

RETAIL

Shop	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>		
Department store				<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>		
Supermarket				<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
Cafeterias			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>							
Stocking areas												<input checked="" type="checkbox"/>	
Stairs									<input checked="" type="checkbox"/>				

HOUSING

Dry Private room					<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>						
Damp Private room							<input checked="" type="checkbox"/>						
Reception area - Corridor - Landing					<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>		
Other private home													

KITCHEN

Collective kitchens													
Food preparation areas - Canteen													

• GERFLOR's recommendation

Other possible solutions

Installation & Maintenance instructions on gerflor.com

Creation LVT						Technical Solutions			Safety Flooring				DLW Lino		
Acoustic		Compact		Compact	Compact	Acoustic	Compact		Compact	Compact			Compact	Acoustic	LCH
Saga ²	Creation 70 Connect	Creation 70	Creation 55	Creation 40	Creation 30	EL5/EL7 solutions (Static control flooring)	Shower system	Wall covering	Tarasafe Ultra H2O	Tarasafe Ultra / Design (SparClean®)	Tarasafe Standard	Tarasafe Plus / Super	Linoleum Compact	Linoleum Acoustic	Linoleum Technical Solutions



	•	•	•												
		•	•												
•	•	•	•												

				•	•										
				•	•		•		•	•	•				
	•									•					
				•	•		•								

								•				•			
								•				•			


Gerflor web site

New design,
New navigation!

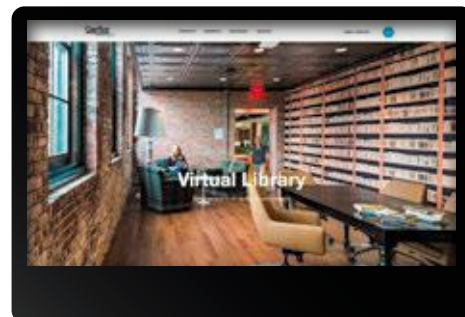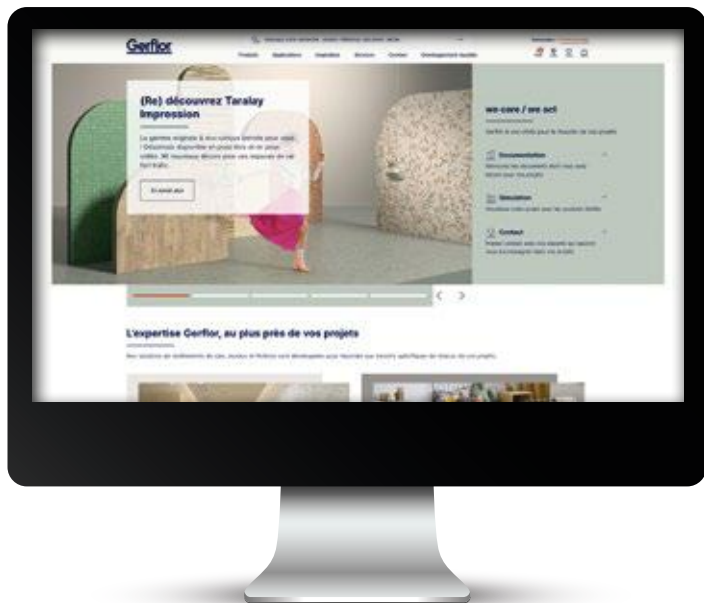

1 Virtual library
Access to all commercial and technical documentation that will help you developing your projects.

A website you can access on your tablet or smartphone everywhere!

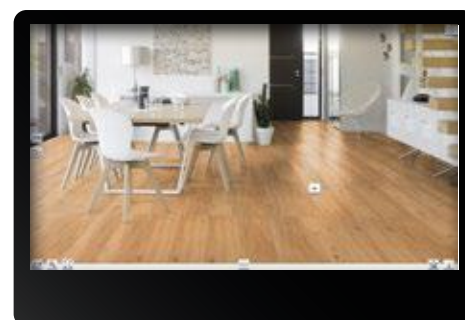

2 Interior designer
The Interior Designer provide you a real time simulation of the floor selected either in your own photo or in a pictures' gallery.



&



Follow us on social media!

Gerflor

Be connected!



#Gerflor



3 Store locator
Access to our distributor partners list and select the closest one.



we care / we act Our Commitments for a Sustainable future



CARBON FOOTPRINT*

-20 % kg CO₂ equivalent/m² between 2020 and 2025



BIOSOURCED CONTENT**

10 % by 2025



RECYCLED CONTENT

30 % by 2025



ADHESIVE FREE***

35 % by 2025



ANNUAL VOLUME RECYCLED

60 000 t by 2025



* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution