



NASA®




NS 212



NS 222




NS 242

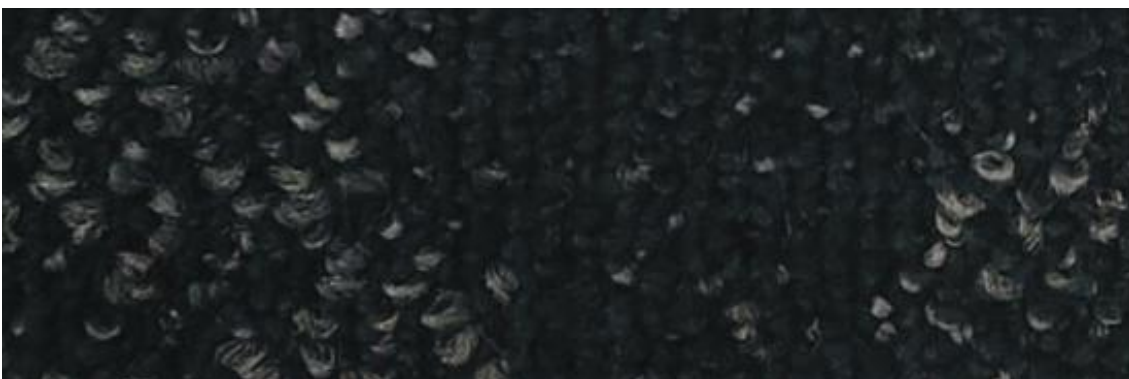

NS 232









Herringbone

NASA
NS. 212 WARM GREY




Horizontal
Ashlar

NASA
NS 222 MID GREY



Herringbone

NASA
NS 242 MOON STONE BLUE



Horizontal
Ashlar

NASA
NS-232 MID GREY



TILE SPECIFICATION

FIBRE	: OLEFIN PP
CONSTRUCTION	: Multi Level Scroll
MACHINE GAUGE	: 1/12"
PILE HEIGHT	: 5 mm
TOTAL HEIGHT	: 8 mm
PILE WEIGHT	: 700 gms/m ²
PRIMARY BACKING	: Non Woven Lutrador
SECONDARY BACKING	: PVC + Fibre Glass
SIZE PER TILE	: 50 cm x 50 cm
NO. OF TILES PER BOX	: 20 pcs per box (5m ²)
INSTALLATION	: Surface Tackifier
ANTISTATIC PROPERTIES	: Permanently Antistatic

PERFORMANCE SPECIFICATIONS


FLAMMABILITY
 KS K 0584 3.1 : char Lenght (cm) 7.1
COLOR FASTNESS TO LIGHT
 KS K 0700, FADE-O-METER, ISO BLUE SCALE (ISO GRADE 4): Above 4
RUBBING FASTNESS : Weight loss abrasion
 KS K 0818 : 29.7(mg)
ELECTROSTATIC PROPENSITY
 ISO/TR6356, STROLL METHOD : (Volt) 100

• Product specifications are derived from averages resulting from normal manufacturing tolerances in yarns, temperatures, humidity, and colour and colour may vary within normal industry tolerances.
 • Colours are subject to dye lot variations, exact conformity in colour between samples and the final product is not guaranteed (tolerance of min 5% is allowed)

INSTALLATION & MAINTENANCE

- Depending on the installations method, seams may remain visible and this should not be treated as an inherent flaw of carpet tiles.
- The subfloor must be dry, smooth, flat and free of dirt or any debris that could affect adhesions of Tiles on the floor.
- Chair pads are recommended under office chairs to preserve appearance retention, avoid premature wear to carpet tile.
- Carpet maintenance must be regularly be carried out to extend the life of the product.
- Regular use of vacuum - brushing cleaner is the best way to care for carpets.

RECOMMENDED INSTALLATIONS



WARRANTY:

- Lifetime Commercial Limited



Features & Certifications



01 100 2038345



1196595.1A



6LP100263



1196595.1D



BOMT20019176



K3L 20-D-000598



795/SJ-IND.8/TKDN/4/2021