



HIKVISION®

DISTRIBUTION BROCHURE FOR

HOT-SELLING PRODUCTS

H1 2025

About Hikvision


Hikvision is committed to serving various industries through its cutting-edge technologies of machine perception, artificial intelligence, and big data, leading the future of AIoT.

R&D Investment



Abundant Product & Solution Offerings

We develop nearly **30,000** hardware products and more than **200** software products with leading technologies, such as:



Video & Imaging Technology



Multi-Dimensional Perception



Artificial Intelligence

Securing a smarter future

At the forefront of security innovation, Hikvision aims to lay the foundation for a future that is not only safer, but also more intelligent for every user.



Advancing with integrated technologies

Hikvision is expanding from mere vision to multidimensional perception and empowering full products range with AI analytics for enhanced security. By seamlessly integrating cutting-edge technologies like audio & video linkage and multi-lens synergy, Hikvision sets a new standard in security intelligence.



Innovating through converged applications

Hikvision transforms from standalone products to integrated systems, offering one-stop solutions through its Hik-Partner Pro and Hik-Connect platforms. These solutions streamlines remote management and maintenance for small to medium-scale applications, delivering efficient services to residences, office, and retail spaces.

Contents

01 HIGHLIGHTS

- | | |
|---------------------------|-------------------------------------|
| 01 ColorVu 3.0 | 01 Audio 2.0 |
| 01 AcuSense 3.0 | 01 Motorization 2.0 |
| 02 Smart Hybrid Light | 02 Multi-lens Synergy |
| 02 Dual Detection | 02 Panoramic Cameras |
| 02 Deluxe 6 MP | 02 TandemVu PTZ Cameras |
| 03 Easy-to-use | 02 HeatPro VCA3.0 |
| 03 PT | 03 Audio and video integration |
| 03 Auto Configuration | 03 Two-way Audio |
| 03 Cloud-based Management | 03 Live Guard |
| 03 OTA | 03 Smarter Audio with Video Linkage |
| | 03 4-Wire HDTVI Intercom |

04 PRODUCT SHOWCASE

- | | |
|------------------------------|-------------------------------|
| 04 Network Cameras | 23 Access Control |
| 13 HeatPro Thermal Camera | 24 Entrance & Exit Management |
| 14 Network Video Recorders | 25 Security Inspection |
| 15 Turbo HD Cameras | 26 Intrusion Alarm |
| 17 DVR | 28 Audio |
| 18 Networking & Transmission | 29 Display |
| 21 Video Intercom | 29 Accessories |

30 SOFTWARE

- | |
|--------------------|
| 30 Hik-Partner Pro |
| 30 Hik-Connect |

31 SMB SOLUTIONS

- | |
|-----------------------------------|
| 32 SMB Solution for Houses |
| 32 SMB Solution for Small Offices |
| 33 SMB Solution for Stores |
| 33 SMB Solution for Farms |

34 TOWARDS A GREENER FOOTPRINT

Highlights

ColorVu 3.0

HikAI-ISP with AI noise reduction offers clearer motion images and static details; AI 3D LUT color correction shows the true colors of night scenes; Improved AI WDR auto turn on and off enables bright areas of an image are not overexposed.



AcuSense 3.0

With AcuSearch, users can focus on a specific target of interest with just one click and then display the relevant video immediately, greatly improving retrieval efficiency; Double algorithm upgrades of perimeter protection and Motion Detection 3.0, greatly reduce the false alarms caused by lights hitting stationary cars at night.



Audio 2.0

Arrayed Dual-Mic provides excellent noise reduction effect, enhanced vocal clarity & audio quality; Smart PA Speaker enables larger sound coverage, better warning effect and greater two-way audio.



Motorization 2.0


Transparent cover design without the need for disassembly fits perfectly with PTRZ cameras; Motorized adjustments eliminate the hassle of manual tuning and the risk of contamination; 5-axis adjustment further equips the day & night PTRZ with supplemental lighting.



Highlights

Smart Hybrid Light

Three supplemental lighting modes in one camera: 24/7 color, IR (B&W), or Smart. Distinguish persons and vehicles from other objects and ensure capturing critical details with event-triggered color images.

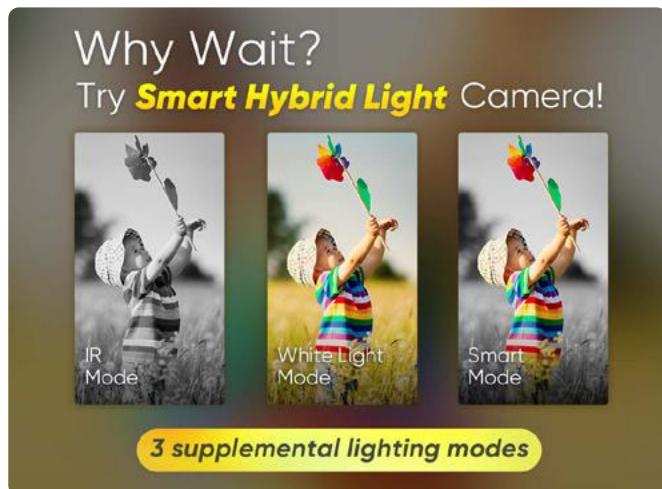

Dual Detection

Dual detectors that combine PIR and radar for accurate alarms.



Deluxe 6 MP

More 4 MP cost-effective cameras are available, not only with higher resolution, but also with upgraded hardware and software.



Multi-lens Synergy


Panoramic Cameras

One security camera with dual lenses, combining image fusion algorithm to stitch together a 180-degree horizontal field of view.



TandemVu PTZ Cameras

One camera provides the big picture and small details in tandem, delivering smart linkage for instant target tracking.

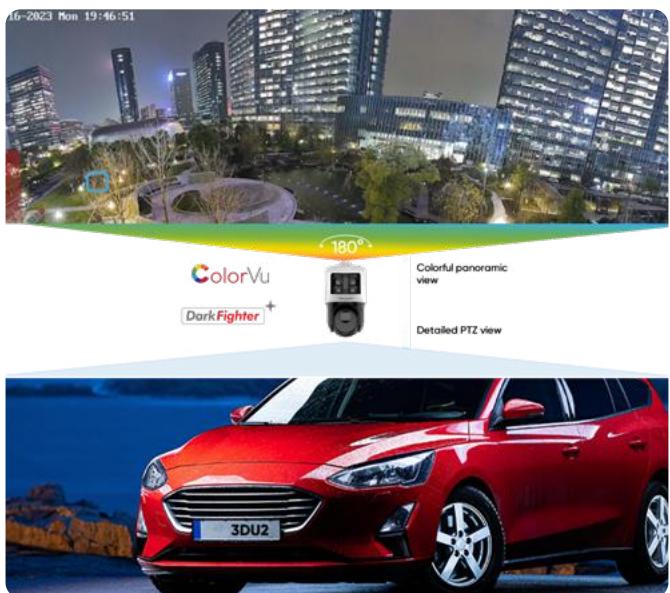

HeatPro VCA3.0

HeatPro Series Thermal Cameras boasts perimeter protection with unparalleled accuracy by VCA3.0 and fire prevention with superlative sensitivity.



Highlights

Easy-to-use

Easy Installation

PT

Pan and tilt, easy remote adjustment of any angle via Hik-Connect. All-in-one bracket for easy installation.



Easy Activation

Auto Configuration

The auto-active process enables automatic activation with intuitive result display.



Easy Management

Cloud-based Management

Cloud management through the Hik-Partner Pro (HPP) app streamlines setup, unifies networking and security management, and facilitates remote troubleshooting for smart managed switches.



Easy Upgrade

OTA

Over-the-air upgrades of EUI for NVR & DVR allow users to be informed of the latest system upgrades on multiple platforms.



Audio and video integration

Two-way Audio

Two-way audio with built-in microphone and speakers enables real-time communication, breaking the limits.



Live Guard

Proactive protection with real-time flashing light and audible warnings.



Smarter Audio with Video Linkage

The synchronized audio & video system enhances security and enables swift response to threats with powerful and timely deterrence.



4-Wire HDTVI Intercom

Powered by two-way audio TVI technology, Hikvision's 4-wire HD intercom solution delivers 720p image quality over 4-wire cables, contributing to enhanced residential security and convenience.



Network Cameras

Pro Series Smart Hybrid Light Cameras with ColorVu



DS-2CD2047G2H-LIU/SL

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



DS-2CD2147G2H-LISU

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment

**HOT**

DS-2CD2347G2H-LISU/SL

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio

**HOT**

DS-2CD2T4762H-LISU/SL

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



DS-2CD2067G2H-LIU/SL

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



DS-2CD2167G2H-LISU

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment

**HOT**

DS-2CD2367G2H-LISU/SL

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio

**HOT**

DS-2CD2T6762H-LISU/SL

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



DS-2CD2087G2H-LIU/SL

- 4K resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



DS-2CD2187G2H-LISU

- 4K resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment

**HOT**

DS-2CD2387G2H-LISU/SL

- 4K resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio

**HOT**

DS-2CD2T8762H-LISU/SL

- 4K resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



DS-2CD2647G2HT-LIZS

- 4 MP resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- IP67 and IK10



DS-2CD2667G2HT-LIZS

- 6 MP resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- IP67 and IK10



DS-2CD2687G2HT-LIZS

- 4K resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- IP67 and IK10



DS-2CD2747G2HT-LIZS

- 4 MP resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment
- IP67 and IK10



DS-2CD2767G2HT-LIZS

- 6 MP resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment
- IP67 and IK10



DS-2CD2787G2HT-LIZS

- 4K resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment
- IP67 and IK10

Network Cameras

Pro Series Cameras with Smart Hybrid Light



AcuSense 3.0

Audio20

NEW



DS-2CD2043G2-LI2U

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2143G2-LI2U

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



DS-2CD2343G2-LI2U

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2543G2-LI2U

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2T43G2-LI2U

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2063G2-LI2U

- 6 MP high performance resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2163G2-LI2U

- 6 MP high performance resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



DS-2CD2363G2-LI2U

- 6 MP high performance resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2563G2-LI2U

- 6 MP high performance resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2T63G2-LI2U

- 6 MP high performance resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2083G2-LI2U

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2183G2-LI2U

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



DS-2CD2383G2-LI2U

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2583G2-LI2U

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2T83G2-LI2U

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2643G2-LIZ2U

- 4 MP resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2663G2-LIZ2U

- 6 MP high performance resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2683G2-LIZ2U

- 4K ultra-high resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2743G2-LIZ2U

- 4 MP resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



DS-2CD2763G2-LIZ2U

- 6 MP high performance resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



DS-2CD2783G2-LIZ2U

- 4K ultra-high resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment

Network Cameras

Pro Series Cameras with Smart Hybrid Light



AcuSense 3.0

Audio2O

NEW



DS-2CD2043G2-LI2U/SL(RB)

- Smart Hybrid Light
- Person and vehicle classification
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio
- 120 dB true WDR technology
- IP67



DS-2CD2063G2-LI2U/SL(RB)

- Smart Hybrid Light
- Person and vehicle classification
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio
- 120 dB true WDR technology
- IP67



DS-2CD2083G2-LI2U/SL(RB)

- Smart Hybrid Light
- Person and vehicle classification
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio
- 120 dB true WDR technology
- IP67



DS-2CD2343G2-LI2U/SL(RB)

- Smart Hybrid Light
- Person and vehicle classification
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio
- 120 dB true WDR technology
- IP67



DS-2CD2363G2-LI2U/SL(RB)

- Smart Hybrid Light
- Person and vehicle classification
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio
- 120 dB true WDR technology
- IP67



DS-2CD2383G2-LI2U/SL(RB)

- Smart Hybrid Light
- Person and vehicle classification
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio
- 120 dB true WDR technology
- IP67



DS-2CD2643G2-LIZS2U/SL(RB)

- Smart Hybrid Light
- Person and vehicle classification
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio
- 120 dB true WDR technology
- Motorized varifocal lens
- IP67



DS-2CD2663G2-LIZS2U/SL(RB)

- Smart Hybrid Light
- Person and vehicle classification
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio
- 120 dB true WDR technology
- Motorized varifocal lens
- IP67



DS-2CD2683G2-LIZS2U/SL(RB)

- Smart Hybrid Light
- Person and vehicle classification
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio
- 120 dB true WDR technology
- Motorized varifocal lens
- IP67



DS-2CD2T43G2-LIS2U/SL(RB)

- Smart Hybrid Light
- Person and vehicle classification
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio
- 120 dB true WDR technology
- IP67



DS-2CD2T63G2-LIS2U/SL(RB)

- Smart Hybrid Light
- Person and vehicle classification
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio
- 120 dB true WDR technology
- IP67



DS-2CD2T83G2-LIS2U/SL(RB)

- Smart Hybrid Light
- Person and vehicle classification
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio
- 120 dB true WDR technology
- IP67

Network Cameras

Pro Series PTRZ Cameras



DS-2CD2746G2H-IPTRZS2U/SL(RB)

- Motorized Pan, Tilt, Rotate, Zoom
- Powered-by-DarkFighter technology
- 120 dB WDR
- Person and vehicle classification
- IP66, IK10
- Audio and alarm interface available
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio



DS-2CD2766G2H-IPTRZS2U/SL(RB)

- Motorized Pan, Tilt, Rotate, Zoom
- Powered-by-DarkFighter technology
- 120 dB WDR
- Person and vehicle classification
- IP66, IK10
- Audio and alarm interface available
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio



DS-2CD2786G2H-IPTRZS2U/SL(RB)

- Motorized Pan, Tilt, Rotate, Zoom
- Powered-by-DarkFighter technology
- 120 dB WDR
- Person and vehicle classification
- IP66, IK10
- Audio and alarm interface available
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio



DS-2CD2747G2H-LIPTRZS2U/SL(RB)

- Motorized Pan, Tilt, Rotate, Zoom
- 24/7 colorful imaging via ColorVu technology
- 130 dB WDR
- Person and vehicle classification
- IP66, IK10
- Audio and alarm interface available
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio



DS-2CD2767G2H-LIPTRZS2U/SL(RB)

- Motorized Pan, Tilt, Rotate, Zoom
- 24/7 colorful imaging via ColorVu technology
- 130 dB WDR
- Person and vehicle classification
- IP66, IK10
- Audio and alarm interface available
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio



DS-2CD2787G2H-LIPTRZS2U/SL(RB)

- Motorized Pan, Tilt, Rotate, Zoom
- 24/7 colorful imaging via ColorVu technology
- 130 dB WDR
- Person and vehicle classification
- IP66, IK10
- Audio and alarm interface available
- Arrayed Dual-Mic (-2U) & Smart PA Speaker (/SL)
- Two-way Audio

Pro Series Dual-Lens Stitched Cameras with ColorVu



DS-2CD2367G2P-LSU/SL

- 3 MP+3 MP resolution
- 180° seamless stitching
- ColorVu, F1.0 super aperture
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Strobe light and audio alarm



DS-2CD2387G2P-LSU/SL

- 4 MP+4 MP resolution
- 180° seamless stitching
- ColorVu, F1.0 super aperture
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Strobe light and audio alarm



Dual-lens Stitching



DS-2CD2T67G2P-LSU/SL

- 3 MP+3 MP resolution
- 180° seamless stitching
- ColorVu, F1.0 super aperture
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Strobe light and audio alarm



DS-2CD2T87G2P-LSU/SL

- 4 MP+4 MP resolution
- 180° seamless stitching
- ColorVu, F1.0 super aperture
- AcuSense: Motion Detection 3.0 & Perimeter Protection
- Strobe light and audio alarm

Pro Series Fisheye Cameras



DS-2CD2955G0-ISU

- 5 MP high resolution
- 180° fisheye view
- Audio and alarm interface
- AcuSense: Motion Detection 3.0 & Perimeter Protection

Network Cameras

Value Series Smart Hybrid Light Cameras with ColorVu



DS-2CD1027G2H-LIUF

- 1080P resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



HOT

DS-2CD1047G2H-LIUF

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



DS-2CD1067G2H-LIUF

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



DS-2CD1127G2H-LIUF

- 1080P resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



DS-2CD1147G2H-LIUF

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



DS-2CD1167G2H-LIUF

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



DS-2CD1327G2H-LIUF

- 1080P resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



HOT

DS-2CD1347G2H-LIUF

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



DS-2CD1367G2H-LIUF

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



DS-2CD1T27G2H-LIUF

- 1080P resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



DS-2CD1T47G2H-LIUF

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



DS-2CD1T67G2H-LIUF

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



DS-2CD1027G2H-LIUF/S(L)(RB)

- 24/7 colorful imaging
- Person and Vehicle Detection
- Smart Hybrid Light
- Provide real-time security via built-in two-way audio and strobe light alarm
- Support on-board storage up to 512 GB (SD card slot)
- IP67



DS-2CD1047G2H-LIUF/S(L)(RB)

- 24/7 colorful imaging
- Person and Vehicle Detection
- Smart Hybrid Light
- Provide real-time security via built-in two-way audio and strobe light alarm
- Support on-board storage up to 512 GB (SD card slot)
- IP67



DS-2CD1067G2H-LIUF/S(L)(RB)

- 24/7 colorful imaging
- Person and Vehicle Detection
- Smart Hybrid Light
- Provide real-time security via built-in two-way audio and strobe light alarm
- Support on-board storage up to 512 GB (SD card slot)
- IP67

Network Cameras



Value Series Smart Hybrid Light Cameras with ColorVu

**HOT****DS-2CD1327G2H-LIUF/S(L)(RB)**

- 24/7 colorful imaging
- Person and Vehicle Detection
- Smart Hybrid Light
- Provide real-time security via built-in two-way audio and strobe light alarm
- Support on-board storage up to 512 GB (SD card slot)
- IP67

**HOT****DS-2CD1347G2H-LIUF/S(L)(RB)**

- 24/7 colorful imaging
- Person and Vehicle Detection
- Smart Hybrid Light
- Provide real-time security via built-in two-way audio and strobe light alarm
- Support on-board storage up to 512 GB (SD card slot)
- IP67

**HOT****DS-2CD1367G2H-LIUF/S(L)(RB)**

- 24/7 colorful imaging
- Person and Vehicle Detection
- Smart Hybrid Light
- Provide real-time security via built-in two-way audio and strobe light alarm
- Support on-board storage up to 512 GB (SD card slot)
- IP67

**DS-2CD1T27G2H-LIUF/S(L)(RB)**

- 24/7 colorful imaging
- Person and Vehicle Detection
- Smart Hybrid Light
- Provide real-time security via built-in two-way audio and strobe light alarm
- Support on-board storage up to 512 GB (SD card slot)
- IP67

**DS-2CD1T47G2H-LIUF/S(L)(RB)**

- 24/7 colorful imaging
- Person and Vehicle Detection
- Smart Hybrid Light
- Provide real-time security via built-in two-way audio and strobe light alarm
- Support on-board storage up to 512 GB (SD card slot)
- IP67

**DS-2CD1T67G2H-LIUF/S(L)(RB)**

- 24/7 colorful imaging
- Person and Vehicle Detection
- Smart Hybrid Light
- Provide real-time security via built-in two-way audio and strobe light alarm
- Support on-board storage up to 512 GB (SD card slot)
- IP67

Value Series Dual-lens Panoramic Cameras

Dual-lens Stitching

**DS-2CD1363G2P-LIUF/SL**

- 180-degree image
- High quality imaging with 6MP resolution
- Smart Hybrid light
- Person and vehicle classification
- Built-in mic
- Two-way audio
- IP67

**DS-2CD1T63G2P-LIUF/SL**

- 180-degree image
- High quality imaging with 6MP resolution
- Smart Hybrid light
- Person and vehicle classification
- Built-in mic
- Two-way audio
- IP67

**DS-2CD1383G2P-LIUF/SL**

- 180-degree image
- High quality imaging with 8MP resolution
- Smart Hybrid light
- Person and vehicle classification
- Built-in mic
- Two-way audio
- IP67

**DS-2CD1T83G2P-LIUF/SL**

- 180-degree image
- High quality imaging with 8MP resolution
- Smart Hybrid light
- Person and vehicle classification
- Built-in mic
- Two-way audio
- IP67

**DS-2CD1367G2HP-LIUF/SL**

- 180-degree image
- High quality imaging with 6MP resolution
- 24/7 colorful imaging via ColorVu technology
- Smart Hybrid light
- Person and vehicle classification
- Built-in mic
- Two-way audio
- IP67

**DS-2CD1T67G2HP-LIUF/SL**

- 180-degree image
- High quality imaging with 6MP resolution
- 24/7 colorful imaging via ColorVu technology
- Smart Hybrid light
- Person and vehicle classification
- Built-in mic
- Two-way audio
- IP67

Network Cameras

PT Network Camera

**NEW****DS-2DE2C400MWG-E**

- 4 MP @20 fps, 2.8 mm/4 mm lens
- Two-way audio
- Pan: 0° to 345°, tilt: 0° to 80°
- Smart Hybrid Light
- 30 m white light and 30 m IR
- IP66

**NEW****DS-2DE2C400MWG-4G**

- 4 MP @ 25 fps, 2.8 mm/4 mm lens
- Two-way audio
- Pan: 0° to 345°, tilt: 0° to 80°
- Smart Hybrid Light
- 30 m white light and 30 m IR
- 4G communication
- IP66

**NEW****DS-2DE2C400MWG/W** (Use with Wi-Fi NVR)

- 4 MP @ 25 fps, 2.8 mm/4 mm lens
- Two-way audio
- Pan: 0° to 345°, tilt: 0° to 80°
- Smart Hybrid Light
- 30 m white light and 30 m IR
- W-Fi communication
- IP66

**DS-2DE2A404IWG-E**

- 4 MP @25/30 fps, 2.8 - 12 mm lens
- Two-way audio
- Pan: 0° to 355°, tilt: 0° to 90°
- 20 m IR
- IP66, IK10

**HOT****DS-2DE3A400BW-DE**

- 4 MP @25/30 fps, 2.8 mm/4 mm lens
- Two-way audio
- Pan: 0° to 350°, tilt: 0° to 90°
- 30 m white light
- IP66

**DS-2DE3A404IWG-E**

- 4 MP @ 25/30 fps, 2.8 mm - 12 mm lens
- Two-way audio
- Pan: 0° to 350°, tilt: 0° to 90°
- 30 m IR
- Built-in microphone and speaker
- Power-over-Ethernet
- IP66

**TandemVu****DS-2SE3C404MWG-E/14**

- Panoramic: 1/2.8" 4 MP CMOS, 2.8 mm, tilt: 7°-17°
- PTZ: 1/2.8" 4 MP CMOS, 4x optical zoom
- Pan: 0° to 350°, tilt: -5° to 90°
- 4 MP@25/30 fps
- Motion Detection 2.0
- Smart linkage between bullet and PTZ channels for auto tracking lite
- Audio alarm
- Built-in microphone and speaker
- 30 m white light and 40 m IR
- IP66

PTZ Network Camera

**DS-2DE3C210IX-DE(C1)[0-STD](T5)**

- 1/2.8" 2 MP CMOS, 10x optical zoom
- 2 MP @25/30 fps
- AcuSense, people counting
- Pan: 360° endless, tilt: -15° to 90°
- Strobe light and audio alarm
- 50 m IR
- IP66

**DS-2DE4425IW-DE**

- 1/2.8" 4 MP CMOS, 25x optical zoom
- 4 MP@25/30 fps
- AcuSense
- Pan: 360° endless, tilt: -15° to 90°
- 100 m IR
- IP66

**DS-2DE4A425IWG-E**

- 1/2.8" 4 MP CMOS, 25x optical zoom
- 4 MP@50/60 fps
- AcuSense, Auto tracking 2.0
- Pan: 360° endless, tilt: -5° to 90°
- 50 m IR
- IP66

**DS-2SE4C425MWG1-E/14**

- Panoramic: 1/3" 4 MP CMOS, 2.8 mm, tilt: 9°-21°
- PTZ: 1/2.8" 4 MP CMOS, 25x optical zoom
- Pan: 360° endless, tilt: -15° to 90°
- 4 MP@25/30 fps
- AcuSense
- Smart linkage between bullet and PTZ channels for auto tracking
- Strobe light and audio alarm
- Built-in microphone and speaker
- 30 m white light and 100 m IR
- IP66

**TandemVu****DS-2SE4C425MWG-E/26**

- Panoramic: 2 x 1/2.5" CMOS, 6 MP, 180° FOV
- PTZ: 1/2.8" 4 MP CMOS, 25x optical zoom
- Pan: 360° endless, tilt: -15° to 90°
- 4 MP@25/30 fps
- AcuSense
- Smart linkage between bullet and PTZ channels for auto tracking
- 30 m white light and 100 m IR
- IP66

**DS-2DE5432IWG-E**

- 1/2.8" 4 MP CMOS, 32x optical zoom
- 4 MP@25/30 fps
- AcuSense
- Pan: 360° endless, tilt: -15° to 90°
- 150 m IR
- IP66

Network Cameras

Cable-Free

HOT

**NKS422W02H:**

2 MP Outdoor Wi-Fi Bullet Camera
2 MP Indoor Wi-Fi PT Turret Camera
4-ch NVS

- Easy and quick wireless installation
- All cameras can be linked with NVS at one time
- Secure and integrated video storage, all videos are stored in NVS
- Up to 512 GB Micro SD card storage capacity
- Remote mobile phone management, all functions can be performed through Hik-Connect, such as camera adding, two-way audio, live view, playback, etc.
- Accurate motion detection function
- Smart IR and white light
- Built-in mic and speaker for two-way audio
- 1 fixed PT turret camera and 1 fixed bullet camera, both with 2 MP resolution and 2.8 mm focal length

**NKS424W02H:**

4 MP Outdoor Wi-Fi Bullet Camera
4 MP Indoor Wi-Fi PT Turret Camera
4-ch NVS

- Easy and quick wireless installation
- All cameras can be linked with NVS at one time
- Secure and integrated video storage, all videos are stored in NVS
- Up to 512 GB Micro SD card storage capacity
- Remote mobile phone management, all functions can be performed through Hik-Connect, such as camera adding, two-way audio, live view, playback, etc.
- Accurate motion detection function
- Smart IR and white light
- Built-in mic and speaker for two-way audio
- 1 fixed PT turret camera and 1 fixed bullet camera, both with 4 MP resolution and 2.8 mm focal length

**NKS422W0H:**

2 MP Outdoor Wi-Fi Bullet Camera
2 MP Outdoor Wi-Fi Bullet Camera
4-ch NVS

- Easy and quick wireless installation
- All cameras can be linked with NVS at one time
- Secure and integrated video storage, all videos are stored in NVS
- Up to 512 GB Micro SD card storage capacity
- Remote mobile phone management, all functions can be performed through Hik-Connect, such as camera adding, two-way audio, live view, playback, etc.
- Accurate motion detection function
- Smart IR and white light
- Built-in mic and speaker for two-way audio
- 2 fixed bullet cameras with 2 MP resolution and 2.8 mm focal length

**NKS424W01H:**

4 MP Outdoor Wi-Fi Bullet Camera
4 MP Outdoor Wi-Fi Bullet Camera
4-ch NVS

- Easy and quick wireless installation
- All cameras can be linked with NVS at one time
- Secure and integrated video storage, all videos are stored in NVS
- Up to 512 GB Micro SD card storage capacity
- Remote mobile phone management, all functions can be performed through Hik-Connect, such as camera adding, two-way audio, live view, playback, etc.
- Accurate motion detection function
- Smart IR and white light
- Built-in mic and speaker for two-way audio
- 2 fixed bullet cameras with 4 MP resolution and 2.8 mm focal length

**NKS422W03H:**

2 MP Smart Hybrid Light Mini PT Camera
2 MP Outdoor Wi-Fi Fixed Bullet Camera
4-ch NVS

- Easy and quick wireless installation
- All cameras can be linked with NVS at one time
- Secure and integrated video storage, all videos are stored in NVS
- Up to 512 GB Micro SD card storage capacity
- Remote mobile phone management, all functions can be performed through Hik-Connect, such as camera adding, two-way audio, live view, playback, etc.
- Accurate motion detection function
- Smart IR and white light
- Built-in mic and speaker for two-way audio
- 1 fixed PT turret camera and 1 fixed Speed Dome camera, both with 2 MP resolution and 2.8 mm focal length

**NKS424W03H:**

4 MP Smart Hybrid Light Mini PT Camera
4 MP Outdoor Wi-Fi Fixed Bullet Camera
4-ch NVS

- Easy and quick wireless installation
- All cameras can be linked with NVS at one time
- Secure and integrated video storage, all videos are stored in NVS
- Up to 512 GB Micro SD card storage capacity
- Remote mobile phone management, all functions can be performed through Hik-Connect, such as camera adding, two-way audio, live view, playback, etc.
- Accurate motion detection function
- Smart IR and white light
- Built-in mic and speaker for two-way audio
- 1 fixed PT turret camera and 1 fixed Speed Dome camera, both with 4 MP resolution and 2.8 mm focal length

**DS-2CD1023G2-LIDUF/4G/SL**

- High quality imaging with 2 MP resolution
- Support person and vehicle detection Support 4G LTE data transmission
- Provide real-time security via built-in two-way audio
- Smart Hybrid Light: advanced technology up to 30 meters
- Support on-board storage up to 512 GB (SD card slot)
- Water and dust resistant (IP67)
- Efficient H.265+ compression technology

**DS-2CD1043G2-LIDUF/4G/SL**

- High quality imaging with 4 MP resolution
- Support person and vehicle detection Support 4G LTE data transmission
- Provide real-time security via built-in two-way audio
- Smart Hybrid Light: advanced technology up to 30 meters
- Support on-board storage up to 512 GB (SD card slot)
- Water and dust resistant (IP67)
- Efficient H.265+ compression technology

Network Cameras

Solar-powered Network Cameras



DS-2XS2T41G1-ID/4G/C05S07

- 4 MP@15fps, 4 mm/6 mm lens
- PIR + Radar to reduce false alarms
- Built-in two-way audio
- Support 4G communication
- Solar panel: 6.5W, Battery: 51.46WH



DS-2XS2T47G1-LDH/4G/C18S40

- 4 MP@15fps, 4 mm/6 mm lens
- ColorVu with 24/7 colorful imaging
- Built-in two-way audio
- Support 4G communication
- Solar panel: 40W, Battery: 180WH



NEW

DS-2XS3Q47G1-LD(H)/4G/C18S40
DS-2XS3Q47G1-LDW(H)/C18S40

- 4 MP@15fps
- Wi-Fi: 2.8 mm/4 mm/6 mm lens, 4G: 4 mm/6 mm lens
- Pan: 0° to 340°, Tilt: -5° to 105°
- ColorVu with 24/7 colorful imaging
- Built-in two-way audio
- Support 4G/Wi-Fi communication
- Solar panel: 40W, Battery: 180WH



NEW

DS-2DE2C400IWG-K/4G/C05S10

- 4 MP @ 12.5/15 fps, 2.8 mm/4 mm lens
- PIR + Radar to reduce false alarms
- Pan: 0° to 340°, tilt: 0° to 80°
- Built-in two-way audio
- 30 m IR
- 4G wireless connection
- Solar panel: 10W; Battery: 50WH
- IP66

HeatPro Thermal Camera

HeatPro Thermal Camera



DS-2TD2628/QA

- 256x192 @ 12 μm, NETD < 40 mK; Optical 4MP
- 3 mm/7 mm/10 mm
- 80m Perimeter protection (Line crossing/ Intrusion)
- -20-150°C temperature range with ±8°C accuracy
- Strobe light and audible warning
- IP67, IK10



DS-2TD2617/QA

- 160x120 @ 17 μm, NETD < 40 mK; Optical 4MP
- 3 mm/6 mm/10 mm
- 50m Perimeter protection (Line crossing/ Intrusion)
- -20-150°C temperature range with ±8°C accuracy
- Strobe light and audible warning
- IP67, IK10



HOT

DS-2TD1228/QA

- 256x192 @ 12 μm, NETD < 40 mK; Optical 4MP
- 2mm/ 3 mm/7 mm
- 60m Perimeter protection (Line crossing/ Intrusion)
- -20-150°C temperature range with ±8°C accuracy
- Strobe light and audible warning
- IP67



HOT

DS-2TD1217/QA

- 160x120 @ 17 μm, NETD < 40 mK; Optical 4MP
- 2mm/ 3 mm/6 mm
- 30m Perimeter protection (Line crossing/ Intrusion)
- -20-150°C temperature range with ±8°C accuracy
- Strobe light and audible warning
- IP67



DS-2TD2628T/QA

- 256x192 @ 12 μm, NETD < 40 mK; Optical 4MP
- 3 mm/7 mm
- Anomaly temperature detection and smoke detection
- -20-550°C temperature range with ±2°C or ±2% accuracy
- Strobe light and audible warning
- IP67, IK10



DS-2TD1228T/QA(B)

- 256x192 @ 12 μm, NETD < 40 mK; Optical 4MP
- 2mm/ 3 mm/7 mm
- Anomaly temperature detection and smoke detection
- -20-550°C temperature range with ±2°C or ±2% accuracy
- Strobe light and audible warning
- IP67



HM-TD3028T/Q(B)

- 256x192 @ 12 μm, NETD < 40 mK; Optical 4MP
- 90°/50° HFOV
- Anomaly temperature detection
- -20-550°C temperature range with ±2°C or ±2% accuracy
- Smart whitelight supplement
- IP67



HM-TD3118T/Q

- 160x120 @ 12 μm, NETD < 40 mK
- 110°/90° HFOV
- Anomaly temperature detection
- -20-550°C temperature range with ±2°C or ±2% accuracy
- Smart whitelight supplement
- IP67



HM-TD1017

- 160x120 @ 17 μm, NETD < 50 mK
- 110°/90° HFOV
- People number exception and people counting
- Healthy tracking for anomaly behavior detection
- 2.4GHz Wi-Fi
- Type-C and PoE



DS-2TD1228T/QA(B)

- 256x192 @ 12 μm, NETD < 40 mK; Optical 4MP
- 2mm/ 3 mm/7 mm
- Anomaly temperature detection and smoke detection
- -20-550°C temperature range with ±2°C or ±2% accuracy
- Strobe light and audible warning
- IP67



DS-2TD4228/S2

- 256x192 @ 12 μm, NETD < 35 mK; Optical 4MP, 4.8-153 mm, 32x
- Perimeter protection and anomaly temperature detection
- Fire and smoke detection
- -20-150°C temperature range with ±8°C accuracy
- Linkage smart tracking



DS-2TD4228T/S2

- 256x192 @ 12 μm, NETD < 35 mK; Optical 4MP, 4.8-153 mm, 32x
- Perimeter protection and anomaly temperature detection
- Fire and smoke detection
- -20-550°C temperature range with ±2°C or ±2% accuracy
- Linkage smart tracking

Network Video Recorders

I series with AcuSense



DS-7608NXI-I2(8P)/S(E)

- 8-ch IP video input; /P: PoE
- Up to $2 \times 32\text{MP}/8 \times 8\text{MP}/16 \times 4\text{MP}/32 \times 1080\text{p}$ decoding capability
- Up to 8-ch Motion Detection 2.0
- Up to 4-ch perimeter protection
- AcuSearch
- 2 SATA interfaces, up to 16 TB for each HDD
- Up to 80 Mbps incoming bandwidth

DS-7616NXI-I2(16P)/S(E)

- 16-ch IP video input; /P: PoE
- Up to $2 \times 32\text{MP}/8 \times 8\text{MP}/16 \times 4\text{MP}/32 \times 1080\text{p}$ decoding capability
- Up to 16-ch Motion Detection 2.0
- Up to 4-ch perimeter protection
- AcuSearch
- 2 SATA interfaces, up to 16 TB for each HDD
- Up to 160 Mbps incoming bandwidth

DS-7732NXI-I4(16P)/S(E)

- 32-ch IP video input; /P: PoE
- Up to $2 \times 32\text{MP}/8 \times 8\text{MP}/16 \times 4\text{MP}/32 \times 1080\text{p}$ decoding capability
- 32-ch Motion Detection 2.0
- 4-ch perimeter protection
- AcuSearch
- 4 SATA interfaces, up to 16 TB for each HDD
- Up to 256 Mbps incoming bandwidth

K series with AcuSense



HOT

DS-7604NXI-K1(4P)(D)

- 4-ch IP video input; /P: PoE
- Up to $2 \times 12\text{MP}$ or $4 \times 8\text{MP}$ or $8 \times 4\text{MP}$ or $16 \times 1080\text{p}$ decoding capacity
- Up to 4-ch Motion Detection 2.0
- Up to 1-ch perimeter protection
- AcuSearch
- 1 SATA interface, up to 16 TB for each HDD
- Up to 40 Mbps incoming bandwidth

DS-7608NXI-K1(8P)(D)

- 8-ch IP video input; /P: PoE
- Up to $2 \times 12\text{MP}$ or $4 \times 8\text{MP}$ or $8 \times 4\text{MP}$ or $16 \times 1080\text{p}$ decoding capacity
- Up to 8-ch Motion Detection 2.0
- Up to 1-ch perimeter protection
- AcuSearch
- 1 SATA interface, up to 16 TB for each HDD
- Up to 80 Mbps incoming bandwidth

DS-7608NXI-K2(8P)(D)

- 8-ch IP video input; /P: PoE
- Up to $2 \times 12\text{MP}$ or $4 \times 8\text{MP}$ or $8 \times 4\text{MP}$ or $16 \times 1080\text{p}$ decoding capacity
- Up to 8-ch Motion Detection 2.0
- Up to 2-ch perimeter protection
- AcuSearch
- 2 SATA interfaces, up to 16 TB for each HDD
- Up to 80 Mbps incoming bandwidth

DS-7616NXI-K2(16P)(D)

- 16-ch IP video input; /P: PoE
- Up to $2 \times 12\text{MP}$ or $4 \times 8\text{MP}$ or $8 \times 4\text{MP}$ or $16 \times 1080\text{p}$ decoding capacity
- Up to 16-ch Motion Detection 2.0
- Up to 2-ch perimeter protection
- AcuSearch
- 2 SATA interfaces, up to 16 TB for each HDD
- Up to 160 Mbps incoming bandwidth

76Q series



DS-7604NI-Q1(4P)(D)

- 4-ch IP video input; /P: PoE
- Up to 1-ch@8 MP/3-ch@4 MP/6-ch@1080p decoding capacity
- Up to 1-ch Motion Detection 2.0
- 1 SATA interface, up to 8 TB for each HDD
- Up to 40 Mbps incoming bandwidth

DS-7608NI-Q1(8P)(D)

- 8-ch IP video input; /P: PoE
- Up to 1-ch@8 MP/3-ch@4 MP/6-ch@1080p decoding capacity
- Up to 4-ch Motion Detection 2.0
- 1 SATA interface, up to 8 TB for each HDD
- Up to 80 Mbps incoming bandwidth

DS-7608NI-Q2(8P)(D)

- 8-ch IP video input; /P: PoE
- Up to 1-ch@8 MP/3-ch@4 MP/6-ch@1080p decoding capacity
- Up to 4-ch Motion Detection 2.0
- 2 SATA interfaces, up to 8 TB for each HDD
- Up to 80 Mbps incoming bandwidth



DS-7616NI-Q2(16P)(D)

- 16-ch IP video input; /P: PoE
- Up to 1-ch@8 MP/3-ch@4 MP/6-ch@1080p decoding capacity
- Up to 4-ch Motion Detection 2.0
- 2 SATA interfaces, up to 8 TB for each HDD
- Up to 160 Mbps incoming bandwidth

DS-7104NI-Q1(4P)(D)

- 4-ch IP video input; /P: PoE
- Up to $1 \times 6\text{MP}$ or $2 \times 4\text{MP}$ or $4 \times 1080\text{p}$ decoding capacity
- 1 SATA interface, up to 6 TB for each HDD
- Up to 40 Mbps incoming bandwidth

DS-7104NI-S1/W

- 4-ch IP video input;
- Up to 6MP;
- Wireless accessing with IP cameras;
- SD card storage, up to 512GB
- Up to 20 Mbps incoming bandwidth

Turbo HD Cameras

Smart Hybrid Light Cameras with ColorVu



DS-2CE10DF3T-LFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE12DF3T-LFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE70DF3T-LM(P)FS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE72DF3T-LMFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE10KF0T-L(P)FS

- 3K (5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE12KF0T-LFS

- 3K (5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE70KF0T-LM(P)FS

- 3K (5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE72KF0T-LFS

- 3K (5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE10KF3T-LSYE

- 3K (5 MP 16:9), 2.8 mm, 3.6 mm fixed lens
- 24/7 color imaging with F1.0 aperture
- Smart Hybrid Light with ColorVu
- 130 dB true WDR technology
- 3D DNR technology delivers clean and sharp images
- Water and dust resistant (IP67)
- Anti-corrosion design (NEMA4X)



DS-2CE12KF3T-LSYE

- 3K (5 MP 16:9), 2.8 mm, 3.6 mm fixed lens
- 24/7 color imaging with F1.0 aperture
- Smart Hybrid Light with ColorVu
- 130 dB true WDR technology
- 3D DNR technology delivers clean and sharp images
- Water and dust resistant (IP67)
- Anti-corrosion design (NEMA4X)



DS-2CE72KF3T-LSYE

- 3K (5 MP 16:9), 2.8 mm, 3.6 mm fixed lens
- 24/7 color imaging with F1.0 aperture
- Smart Hybrid Light with ColorVu
- 130 dB true WDR technology
- 3D DNR technology delivers clean and sharp images
- Water and dust resistant (IP67)
- Anti-corrosion design (NEMA4X)

Turbo HD Cameras

Smart Hybrid Light Cameras

Smart Hybrid Light



1080P **DIGITAL WDR** **%** **Microphone**

DS-2CE16DOT-LPFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



1080P **DIGITAL WDR** **%** **Microphone**

DS-2CE17DOT-LFS

- 2 MP, 2.8 mm, 3.6 mm ,6mmfixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



1080P **DIGITAL WDR** **%** **Microphone**

DS-2CE76DOT-LP(M)FS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



1080P **DIGITAL WDR** **%** **Microphone**

DS-2CE18DOT-LFS

- 2 MP, 2.8 mm, 3.6 mm and 6mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



3K **DIGITAL WDR** **%** **Microphone**

DS-2CE16KOT-LFS

- 3K (5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



3K **DIGITAL WDR** **%** **Microphone**

DS-2CE17KOT-LFS

- 3K (5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



3K **DIGITAL WDR** **%** **Microphone**

DS-2CE76KOT-LP(M)FS

- 3K (5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



3K **DIGITAL WDR** **%** **Microphone**

DS-2CE78KOT-LFS

- 3K (5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



4K **IPB** **DIGITAL WDR** **%**

DS-2CE16UOT-LF

- High-quality imaging with 4K, 3840 × 2160 resolution
- 2.8 mm and 3.6 mm fixed focal lens
- Up to 30 m IR distance for bright night imaging
- Up to 20 m white light distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)
- Smart Hybrid Light



4K **IPB** **DIGITAL WDR** **%**

DS-2CE17UOT-LF

- High-quality imaging with 4K, 3840 × 2160 resolution
- 2.8 mm and 3.6 mm fixed focal lens
- Up to 40 m IR distance for bright night imaging
- Up to 40 m white light distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)
- Smart Hybrid Light



4K **IPB** **DIGITAL WDR** **%**

DS-2CE78UOT-LF

- High-quality imaging with 4K, 3840 × 2160 resolution
- 2.8 mm and 3.6 mm fixed focal lens
- Up to 40 m IR distance for bright night imaging
- Up to 20 m white light distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)
- Smart Hybrid Light

Turbo HD Cameras

Smart Hybrid Light Cameras with Two-way Audio

Smart Hybrid Light



DS-2CE16DOT-LP(X)TS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- 20 m white light and 25 m IR
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)
- —X:strobe light and audio alarm

DS-2CE16DOT-L(X)TS

- 2MP,2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- 20 m white light and 25 m IR
- Water and dust resistant (IP67)
- —X:strobe light and audio alarm

DS-2CE17DOT-L(X)TS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- 40 m white light and 40 m IR
- Water and dust resistant (IP67)
- —X:strobe light and audio alarm

DS-2CE70DOT-PTL(X)TS

- 2MP,2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- 20 m white light and 25 m IR
- —X:strobe light and audio alarm

DS-2CE78DOT-L(X)TS

- 2MP,2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- 20 m white light and 25 m IR
- —X:strobe light and audio alarm

DVR

Value series with Motion Detection 2.0



iDS-7204HQHI-M1/XT

- 4-ch analog video input
- Up to 5-ch IP video input (up to 2 MP)
- Up to 1080p lite@30 fps encoding capability
- Motion Detection 2.0 on all 4 channels
- Audio via coaxial cable
- 1 SATA interface



iDS-7208HQHI-M1/XT

- 8-ch analog video input
- Up to 10-ch IP video input (up to 5 MP)
- Up to 1080p lite@15 fps encoding capability
- Motion Detection 2.0 on all 8 channels
- Audio via coaxial cable
- 1 SATA interface



iDS-7216HQHI-M1/XT

- 16-ch analog video input
- Up to 18-ch IP video input (up to 5 MP)
- Up to 1080p lite@15 fps encoding capability
- Motion Detection 2.0 on all 16 channels
- Audio via coaxial cable
- 1 SATA interface

Pro series with AcuSense



iDS-7204HQHI-M1/XT

- 4-ch analog video input
- Up to 6-ch IP video input
- Up to 3K/5MP Lite@12fps encoding capability
- Motion Detection 2.0 on all 4 channels
- 2-ch perimeter protection
- 1-ch facial recognition
- 2-ch AcuSearch
- HDTVI Two-way Audio
- 1 SATA interface



iDS-7208HQHI-M1/XT

- 8-ch analog video input
- Up to 12-ch IP video input
- Up to 3K/5MP Lite@12fps encoding capability
- Motion Detection 2.0 on all 8 channels
- 4-ch perimeter protection
- 2-ch facial recognition
- 4-ch AcuSearch
- HDTVI Two-way Audio
- 1 SATA interface



iDS-7216HQHI-M1/XT

- 16-ch analog video input
- Up to 24-ch IP video input
- Up to 3K/5MP Lite@12fps encoding capability
- Motion Detection 2.0 on all 16 channels
- 8-ch perimeter protection
- 4-ch Facial Recognition
- 8-ch AcuSearch
- HDTVI Two-way Audio
- 1 SATA interface



iDS-7204HUHI-M1/X

- 4-ch analog video input
- Up to 8-ch IP video input
- Up to 4K/8MP@fps(1-ch), 3K/5MP@12fps encoding capability
- Motion Detection 2.0 on all 4 channels
- 4-ch perimeter protection
- 2-ch facial recognition
- 4-ch AcuSearch
- 1 SATA interface



iDS-7208HUHI-M2/X

- 8-ch analog video input
- Up to 16-ch IP video input
- Up to 4K/8MP@8 fps, 3K/5MP@12fps encoding capability
- Motion Detection 2.0 on all 8 channels
- 8-ch perimeter protection
- 4-ch facial recognition
- 8-ch AcuSearch
- 2 SATA interfaces



iDS-7216HUHI-M2/X

- 16-ch analog video input
- Up to 32-ch IP video input
- Up to 4K/8MP@8 fps, 3K/5MP@12fps encoding capability
- Motion Detection 2.0 on all 16 channels
- 8-ch perimeter protection
- 4-ch facial recognition
- 8-ch AcuSearch
- 2 SATA interfaces

Networking & Transmission

PoE Switch

**HOT**
DS-3E1106P-EI/M

- 4 × 100 Mbps PoE ports, 2 × 100 Mbps RJ45 ports
- Total PoE power budget 45W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure


DS-3E1310P-EI/M

- 8 × 100 Mbps PoE ports, 2 × Gigabit RJ45 ports
- Total PoE power budget 60W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure


DS-3E1105P-EI

- 4 × 10/100 Mbps PoE ports, 1 × 100 Mbps RJ45 port
- Total PoE power budget 60W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure


DS-3E1106P-EI

- 4 × 100 Mbps PoE ports, 2 × 100 Mbps RJ45 ports
- Total PoE power budget 60W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure


DS-3E1309P-EI

- 8 × 100 Mbps PoE RJ45 ports, 1 × Gigabit RJ45 ports
- IEEE 802.3at/af standard for PoE ports.
- Network topology management, alarm push, and network health monitor
- AF/AT camera can reach up to 300m in extend mode


DS-3E1318P-EI

- 16 × 100 Mbps PoE RJ45 ports, 2 × Gigabit combos
- IEEE 802.3at/af standard for PoE ports
- Network topology management, alarm push, and network health monitor
- AF/AT camera can reach up to 300m in extend mode


DS-3E1326P-EI

- 24 × 100 Mbps PoE RJ45 ports, 2 × Gigabit combos
- IEEE 802.3at/af standard for PoE ports
- Network topology management, alarm push, and network health monitor
- AF/AT camera can reach up to 300m in extend mode


DS-3E1106HP-EI

- 4 × 100 Mbps PoE RJ45 ports, 2 × 100 Mbps RJ45 ports
- IEEE 802.3at/af/bt standard for PoE ports
- Network topology management, and alarm push
- AF/AT camera can reach up to 300m in extend mode


DS-3E1310HP-EI

- 8 × 100 Mbps PoE RJ45 ports, 2 × Gigabit RJ45 ports
- IEEE 802.3at/af/bt standard for PoE ports
- Network topology management, and alarm push
- AF/AT camera can reach up to 300m in extend mode

**HOT**
DS-3E1506P-EI

- 4 × Gigabit PoE ports, 2 × Gigabit RJ45 ports
- Total PoE power budget 60W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure

**HOT**
DS-3E1510P-EI

- 8 × Gigabit PoE ports, 2 × Gigabit RJ45 ports
- Total PoE power budget 110W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure


DS-3E1518P-EI

- 16 × Gigabit PoE RJ45 ports, 1 × Gigabit RJ45 port, 1 × Gigabit fiber optical port
- Total PoE power budget 230W
- Unified cloud management for security systems
- Remote troubleshooting
- Visualized topology management


DS-3E1526P-EI

- 24 × Gigabit PoE RJ45 ports, 1 × Gigabit RJ45 port, 1 × Gigabit fiber optical port
- Total PoE power budget 370W
- Unified cloud management for security systems
- Remote troubleshooting
- Visualized topology management

Wireless Bridge

**NEW****NEW****NEW**
DS-3WF0FC-2N/O

- 1 km, 2.4Ghz, 300Mbps, 802.11n
- Built-in 7dBi 2 × 2 MIMO 35° antenna
- IP55 weatherproof

DS-3WF02C-5AC/0

- 5 km, 5Ghz, 867 Mbps, 802.11ac
- Built-in 12 dBi 2 × 2 MIMO antenna
- Quick match through DIP switch
- Adjustable transmission power up to 22 dBm
- IP55 weatherproof

DS-3WF02-5AC/D

- 5 km, 5Ghz, 867Mbps, 802.11ac
- Built-in 12 dBi 2 × 2 MIMO antenna
- Automatic pairing
- 2 × 100M Ethernet ports
- Standard PoE Input & output
- IP55 weatherproof

DS-3WF0EC-5ACT(B)

- 500m, 5Ghz, 867Mbps, 802.11ac
- Built-in 8 dBi 2 × 2 MIMO antenna
- Automatic pairing
- 2 × 100M Ethernet ports
- Standard PoE Input & output

DS-3WF0EC-2NT

- 500m, 2.4Ghz, 300Mbps, 802.11n
- Built-in 7 dBi 2 × 2 MIMO antenna
- Automatic pairing
- 2 × 100M Ethernet ports
- 12~24V Passive PoE

Networking & Transmission

Wireless Access Points & Smart Managed Router



DS-3WAP522-SI

- 1 Gigabit Port with PoE Input
- 802.11ac Wi-Fi 5 1167 Mbps
- 80+ Concurrent User Connections
- Auto RF Optimization
- Support Intelligent Fast Roaming

HOT

DS-3WAP622G-SI

- 1 Gigabit Port with PoE Input
- 802.11ax Wi-Fi 6 1775 Mbps
- 100+ Concurrent User Connections
- Auto RF Optimization
- Support Intelligent Fast Roaming

HOT

DS-3WAP521-SI

- 2 Gigabit LAN Ports with 1 PoE Input
- 802.11ac Wi-Fi 5 1167 Mbps
- 86 mm Wall Junction Box for Easy Installation
- 50+ Concurrent User Connections
- Auto RF Optimization
- Support Intelligent Fast Roaming



DS-3WAP621E-SI

- 2 Gigabit LAN Ports with 1 PoE Input
- 802.11ax Wi-Fi 6 2975 Mbps
- 86 mm Wall Junction Box for Easy Installation
- 70+ Concurrent User Connections
- Auto RF Optimization
- Support Intelligent Fast Roaming



DS-3WAP623E-SI

- 1 Gigabit Port with PoE Input
- 802.11ax Wi-Fi 6 2975 Mbps
- 100+ Concurrent User Connections
- Auto RF Optimization
- Support Intelligent Fast Roaming

HOT

DS-3WG105G-SI

- 2 Gigabit WAN Ports with 1 WAN/LAN Switchable
- 3 Gigabit LAN Ports with 2 LAN/WAN Switchable
- 12 W Power Budget, 1000 Mbps Throughput
- Recommend 100 Users Access
- Support Multiple VPNs
- Support Behavior Management

HOT

DS-3WG105GP-SI

- 1 Gigabit WAN Port
- 4 Gigabit PoE LAN Ports with 1 LAN/WAN Switchable
- 60 W PoE Power Budget, 1000 Mbps Throughput
- Recommend 100 Users Access
- Support Multiple VPNs
- Support Behavior Management



DS-3WG210GP-SI

- 2 Gigabit WAN Ports with 1 WAN/LAN Switchable
- 8 Gigabit PoE LAN Ports with 2 LAN/WAN Switchable
- 75 W Power Budget, 1000 Mbps Throughput
- Recommend 200 Users Access
- Support Multiple VPNs
- Support Behavior Management



DS-3WG507G-SI

- 3 Gigabit WAN Ports with 2 WAN/LAN Switchable
- 4 Gigabit LAN Ports with 3 LAN/WAN Switchable
- 1000 Mbps Throughput
- Recommend 500 Users Access
- Support Multiple VPNs
- Support Behavior Management



DS-3WR30X

NEW**Wi-Fi 6**

DS-3WR18X

**NEW****Wi-Fi 6**

DS-3WR12GC

**Wi-Fi 5**

DS-3WR12C

**Wi-Fi 5**

DS-3WR4G12C

**Wi-Fi 5**

DS-3WR3N

- 300Mbps
- 4 × RJ45, 10/100 Mbps
- Adaptive WAN Port
- 3 × 10/100/1000 Mbps
- Adaptive LAN Ports
- Wired Wireless Dual Gigabit
- Dual Band in One and 5G First



DS-3WR4G12C

**NEW****Wi-Fi 5**

DS-3WR4G3N

**Wi-Fi 4**

DS-3WRE12C

**Wi-Fi 5**

- 300Mbps
- 4 × RJ45, 10/100 Mbps
- auto-negotiation
- 5-dBi amplified antennas
- Dual antennas for maximum coverage



- AC1200 4G CAT4 Wireless Router
- Dual-band Wi-Fi
- 4G Boost Faster Speed
- Instantly Access a Mobile Network With a SIM Card

- 300Mbps 4G LTE Wi-Fi Router
- 4G Boost Faster Speed
- Instantly Access a Mobile Network With a SIM Card

Networking & Transmission

SOHO Switch

**DS-3E0105D-0**

- 5 x 100 Mbps Ethernet ports
- Support ADI/ADIX
- Store-and-forward switching
- Support MAC address auto-learning and aging
- Plug & play, easy to use

**DS-3E0508D-0**

- 8 x Gigabit Ethernet ports
- Support ADI/ADIX
- Store-and-forward switching
- Support MAC address auto-learning and aging
- Plug & play, easy to use

**DS-3E0108-0**

- 8 x 100M adaptive RJ45 ports
- Easy plug & play installation
- Desktop/wall-mounted installation
- Rugged metal case, exquisite design

**DS-3E0508P-0**

- Gigabit PoE and non-PoE ports for multiple use
- Plug & play with easy connection
- Built to last with a rugged metal case
- Desktop/Wall-mounted installation

**DS-3E0516-E(B)**

- 16 x 1000M Ethernet ports
- Support IEEE 802.3, IEEE 802.3u and IEEE 802.3x
- 1000M network access
- Wire-speed forwarding and non-blocking design
- Store-and-forward switching
- Fan-free design with high reliability

Video Intercom

IP Intercom Door Station

HOT

**DS-KV6133-ME1**

- 2 MP camera, H:129°, V:75°
- One-press to call
- IR illumination, WDR
- IP65, PoE
- Built-in card reader module
- Convenient Hik-Connect app mobile control

**DS-KV6133-WME1**

- 2 MP camera, H:129°, V:75°
- One-press to call
- IR illumination, WDR
- IP65, PoE, Wi-Fi
- Built-in card reader module
- Convenient Hik-Connect app mobile control

**DS-KV8113-WME1**

- 2 MP camera, H:124°, V:75°
- One-press to call
- IR illumination, WDR
- IP65 & IK08, PoE
- Built-in card reader module
- Convenient Hik-Connect app mobile control

IP Indoor Station

**DS-KH8350-WTE1**

- 7" IPS touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control

**DS-KH8381-WTE1**

- 7" IPS touch screen, 1024 x 600
- 8-ch alarm inputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control

**DS-KH6350-WTE1**

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control

**DS-KH6320-WTE1**

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control

**DS-KH6110-WE1**

- 4.3" touch screen, 1024 x 600
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Easy and quick setup

IP Kit

HOT

**DS-KIS603-P(C)****Door Station: DS-KV6113-WPE1(C)**

- 2 MP camera, H:131°, V:78°
- One-press to call
- IR illumination, WDR
- IP65, PoE, Wi-Fi
- Built-in card reader module
- Convenient Hik-Connect app mobile control

**DS-KIS604-S(C)****Door Station: DS-KV8113-WME1(C)**

- 2 MP camera, H:124°, V:75°
- One-press to call
- IR illumination, WDR
- IP65 & IK08, PoE
- Built-in card reader module
- Convenient Hik-Connect app mobile control

**DS-KIS608-P****Door Station: DS-KV6133-WME1**

- 2 MP camera, H:129°, V:75°
- One-press to call
- IR illumination, WDR
- IP65, PoE, Wi-Fi
- Built-in card reader module
- Convenient Hik-Connect app mobile control

Indoor Station: DS-KH6320-WTE1

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control

Indoor Station: DS-KH6320-WTE1

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control

Indoor Station: DS-KH6350-WTE1 White

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control

Video Intercom

2-Wire Kit



DS-KIS702Y

Door Station: DS-KD8003Y-IME2/Surface

- 2 MP camera, H:146°, V:82°
- One-press to call
- IR illumination, WDR
- IP65
- Modular design

Indoor Station: DS-KH6320Y-WTE2

- 7" touch screen, 1024 x 600
- 2-wire digital IP
- 8-ch alarm inputs
- TCP/IP, Wi-Fi
- Convenient Hik-Connect App mobile control
- Supports voice messages

Distributor: DS-KAD704Y

- Supports cascading
- Din rail mounting



KIS703Y-P

Door Station: DS-KB2412T-IM

- 2 MP camera, H:140°, V:85°
- One-press to call
- IR illumination
- IP65

Indoor Station: DS-KH6320Y-WTE2

- 7" touch screen, 1024 x 600
- 2-wire digital IP
- 8-ch alarm inputs
- TCP/IP, Wi-Fi
- Convenient Hik-Connect App mobile control
- Supports voice messages



DS-KIS704EY

Door Station: DS-KH7300EY-WTE2/White

- 2 MP camera, H:133°, V:82°
- One-press to call
- IR illumination, WDR
- IP65, IK08
- Modular design

Indoor Station: DS-KD7003EY-IME2

- 7" touch screen, 1024 x 600
- 2-wire HD
- 1-ch alarm input
- Wi-Fi
- Convenient Hik-Connect App mobile control
- Real plug & play

Distributor: DS-KAD704EY

- 4 interface indicators show device status, 1 Reset button
- Din rail mounting



4-Wire HD DS-KIS213

Door Station: DS-KB2422T-IM

- 2 MP camera, H:117°, V:70°
- HD TVI video quality
- IP65, metal
- One-press to call
- 4-wire plug & play interfaces

Indoor Station: DS-KH2230T

- 7" colorful TFT screen, 1024 x 600
- One-press to unlock the door
- 4-wire plug & play interfaces
- Supports monitoring door station and external analog camera



4-Wire Analog DS-KIS203

Door Station: DS-KB2421T-IM

- 2 MP camera
- Self-adaptive IR supplement
- One-press to call
- 4-wire plug & play analog interfaces
- IP65, anti-oxidant aluminum alloy

Indoor Station: DS-KH2220

- 7" colorful TFT screen, 1024 x 600
- One-press to unlock the door
- 4-wire plug & play analog interfaces
- Supports monitoring door station and external analog camera



4-Wire Hybrid DS-KIS313-P

Door Station: DS-KB2422T-IM

- 2 MP camera, H:117°, V:70°
- HD TVI video quality
- IP65, metal
- One-press to call
- 4-wire plug & play interfaces

Indoor Station: DS-KH6352-WTDE6

- 7" touch screen, 1024 x 600
- One-press to unlock the door
- 4-wire plug & play interfaces
- Wi-Fi
- Convenient Hik-Connect app mobile control

Access Control

MinMoe Face Recognition Terminals

MinMoe



DS-K1T320 Series

- New MinMoe value-series face recognition terminal, more cost-effective
- 2.4-inch non-touch screen, equipped with physical button design
- Capacity: 500 faces, 1000 cards, 1000 fingerprints
- Supports web configuration (PC and mobile)
- Supports AP mode



DS-K1T321 Series

- New MinMoe value-series face recognition terminal, more cost-effective
- 2.4-inch non-touch screen, equipped with physical button design
- Capacity: 500 faces, 3,000 cards, 3,000 fingerprints
- Supports web configuration (PC and mobile)
- Supports AP mode



DS-K1T343 Series

- 4.3-inch touch screen
- Capacity: 1,500 faces, 3,000 fingerprints, 3,000 cards



DS-K1T344 Series

- 4.5-inch touch screen, metal narrow frame design, showing toughness and fashion
- Users: 3000, Max.3000 faces capacity, Max.3000 fingerprints capacity, and Max.3000 cards
- Authentication methods: face\fingerprint\card\PIN code\Bluetooth\QR code
- Standard PoE power supply for equipment and locks (12 VDC/1 A output)
- Supports web configuration (PC and mobile)
- Supports alarm input and output
- Supports physical call button
- IP65



NEW

DS-K1T323 Series

- Access control & video & video intercom
- 2.4-inch non-touch screen
- Multiple authentication methods: face\fingerprint\card\Bluetooth\QR code
- Capacity: 1,000 users, 1,000 faces, 3,000 cards, 3,000 fingerprints
- Supports web configuration (PC and mobile)
- Supports AP mode
- PoE
- IP65



NEW

DS-K1T342-E1 Series

- 4.3-inch touch screen
- IP65
- Supports PoE to power the device and lock directly
- 1,500 faces, 3,000 fingerprint, 3,000 cards

Fingerprint and Card Terminals



DS-K1T805 Series

- IP65 & IK08 high protection levels
- Multiple authentication methods: fingerprint, card, PIN code, Bluetooth, etc.
- Easy to use: connect smart phone to Internet via AP mode directly for configuration/deployment
- Multiple applications: supports Hik-Connect, Mobile web, PC web, HikCentral Access Control



DS-K1T807 Series

- 2.4-inch non-touch screen
- Multiple authentication methods: card, fingerprint, PIN code, Bluetooth, QR code, etc.
- Capacity: 3000 cards, 3000 fingerprints
- Supports web configuration (PC and mobile)
- Supports AP mode
- PoE
- IP65



DS-K1T809 Series

- Metal appearance
- No Ethernet port(1T809E/MX support)
- Mobile web configuration(1T809E/MWX support)
- Supports AP mode(1T809E/MWX support)
- IP65



DS-K1T502 Series

- IP65 & IK09 high protection levels, zinc alloy material
- All-in-one: Manage access control, video intercom, and video security with one device
- Multiple authentication methods: fingerprint, card, PIN code, etc.
- Easy to use: connect smart phone to Internet via AP mode directly for configuration/deployment
- Multiple applications: supports Hik-Connect,Mobile web, PC web, HikCentral Access Control

Speed Gates & Turnstiles



DS-K3B220(L)X

304 stainless steel, outdoor

- Sleek and elegant, suitable for any scene
- Supports integration with any access control system
- Brushless motor guarantees first-class product performance
- Entry-level price brings high cost effectiveness



DS-K3G200(L)X

304 stainless steel, anti-tailgating, anti-vandal

- Compact and elegant design
- LX models can be integrated with any access control system
- Streamlined configuration, simple installation and ease of use



DS-K3G501B(L)X

304 stainless steel, outdoor, anti-tailgating

- The narrowest body is 200mm, slim and elegant
- Self-developed movement to ensure high performance and high quality
- Can be integrated with any access control system
- SUS316L stainless steel material can be customized
- IPX4

Entrance & Exit Management

ANPR Camera



DS-TCG406-E

- 4MP 1/1.8" progressive scan CMOS sensor
- Embedded IR and white
- Supplement lights
- Supports vehicle type/color/brand recognition
- Supports Wiegand for integration with access control systems

Barrier Gates



DS-TMG300-DR (3 m octagonal)

- Motor: DC brushless motor
- Boom Pole: 3 m octagonal pole, right direction
- Rising Speed & Falling Speed: 3 s
- Mean Cycles Between Failure (MCBF): 2,500,000
- Barrier Housing Material: Cold-rolled steel sheet
- Protection Rating: IP54



DS-TMG300-DR (3.4-6m)

- Motor: DC brushless motor
- Boom Pole: 3.4 m-6 m telescopic pole, right direction
- Rising Speed & Falling Speed: 6 s
- Mean Cycles Between Failure (MCBF): 2,500,000
- Barrier Housing Material: Cold-rolled steel sheet
- Protection Rating: IP54

Entrance & Exit Radar



DS-TMG035

- 60/79 GHz MMIC with higher resolution and more stable detection.
- Able to recognize the target moving direction.
- Convenient installation and maintenance with low manual workload and short working hour.
- Strong environmental adaptability.



DS-TMG300-DR/A/B (4m light)

- Motor: DC brushless motor
- Boom Pole: 4 m light pole, right direction
- Rising Speed&Falling Speed:3 to 6 s
- Mean Cycles Between Failure (MCBF): 2,500,000
- Barrier Housing Material: Cold-rolled steel sheet
- Body Indicators
- Protection Rating: IP54



DS-TMG301-DR (2+2m)

- Motor: DC brushless motor
- Barrier Boom: 2 m+2 m folding pole, right direction
- Rising Speed & Falling Speed:3 to 6 s
- Mean Cycles Between Failure (MCBF): 2,500,000
- Barrier Housing Material: Cold-rolled steel sheet
- Protection Rating: IP54

Security Inspection

Walk-Through Metal Detector



ISD-SMG118-N

Tunnel Size: 2204 mm(H) x 734 mm(W) x 405 mm(D)

- 18 Independent detection zones
- Detection accuracy: One coin size(approx. φ25mm) metal
- Multi-zones alarm; 4.3-inch color LCD display
- Power-on self-checking; Multi-sensitivity adjustable
- Networking, HikCentral Professional



ISD-SMG112-N

Tunnel Size: 2204 mm(H) x 734 mm(W) x 405 mm(D)

- 12 Independent detection zones
- Detection accuracy: One coin size(approx. φ25mm) metal
- Multi-zones alarm; 4.3-inch color LCD display
- Power-on self-checking; Multi-sensitivity adjustable
- Networking, HikCentral Professional



ISD-SMG118

Tunnel Size: 2204 mm(H) x 734 mm(W) x 405 mm(D)

- 18 Independent detection zones
- Detection accuracy: One coin size(approx. φ25mm) metal
- Multi-zones alarm; 4.3-inch color LCD display
- Power-on self-checking; Multi-sensitivity adjustable



ISD-SMG112

Tunnel Size: 2204 mm(H) x 734 mm(W) x 405 mm(D)

- 12 Independent detection zones
- Detection accuracy: One coin size(approx. φ25mm) metal
- Multi-zones alarm; 4.3-inch color LCD display
- Power-on self-checking; Multi-sensitivity adjustable



ISD-SMG111

Tunnel Size: 2204 mm(H) x 734 mm(W) x 405 mm(D)

- 11 Independent detection zones
- Detection accuracy: One coin size(approx. φ25mm) metal
- Multi-zones alarm; 4.3-inch color LCD display
- Power-on self-checking; Multi-sensitivity adjustable



ISD-SMG106C

Tunnel Size: 2204 mm(H) x 734 mm(W) x 405 mm(D)

- 6 Independent detection zones
- Detection accuracy: One coin size(approx. φ25mm) metal
- Multi-zones alarm; 4.3-inch color LCD display
- Power-on self-checking; Multi-sensitivity adjustable

Security Inspection

X-Ray Security Inspection System

NEW



ISD-SG6550SA-2CL

Tunnel Size: 650 mm(W) × 500 mm(H)

- Line Resolution: 36AWG standard, 38 AWG typical
Penetration: 8 mm standard, 10 mm typical
- Single-energy; Conveyor load: ≥ 100Kg, 0.2 m/s
- Intelligent Recognition, 7 categories with 15 types
- Video-package correlation; Package-package correlation



ISD-SG6040SA-2CL

Tunnel Size: 620 mm(W) × 420 mm(H)

- Line Resolution: 36AWG standard, 38 AWG typical
Penetration: 8 mm standard, 10 mm typical
- Single-energy; Conveyor load: ≥ 100Kg, 0.2 m/s
- Intelligent Recognition, 7 categories with 15 types
- Video-package correlation; Package-package correlation



ISD-SG5030SA-CL

Tunnel Size: 500 mm(W) × 300 mm(H)

- Line Resolution: 36AWG standard, 38 AWG typical
Penetration: 8 mm standard, 10 mm typical
- Single-energy; Conveyor load: ≥ 100Kg, 0.2 m/s
- Intelligent Recognition, 7 categories with 15 types
- Video-package correlation; Package-package correlation

Hand-Held Metal Detector

NEW



NP-SH100

- Multi-sensitivity adjustable
- Rechargeable battery
- Drop off proof: 1m
- Audible and visible, vibrate prompts
- Low battery alarm



NP-SMH003

- Multi-sensitivity adjustable
- Audible, vibrate prompts
- Low battery alarm

Intrusion Alarm

Wireless Intrusion Alarm

NEW

AX HOME Control Panel

DS-PA201PS-16WB

DS-PA201PS-32WE

- Budget-friendly
- 2000 m transmission distance
- Low power consumption & data usage
- Installation wizard
- User-friendly app
- Hassle-free installation
- Supports 24/7 monitoring with alarm response



Wireless Keyfob

DS-PKF201-WE/WA/WB

- Remote Arm/Disarm
- Custom keys for more advanced operations
- 900/500 m transmission distance
- Up to 2 years battery life



Wireless LED Keypad

DS-PK201B-WE/WA/WB

- One-Push FIRE, PANIC, and MEDICAL alarm
- Duress code used in emergency situation
- 1200/1000 m transmission distance
- LED indication for the system status
- Up to 2 years battery life



Wireless Magnetic Contact

DS-PD201MC-WE/WA/WB

- Door opening detection
- 25 mm gap detection
- 1600 / 1200 m transmission distance
- Up to 2 years battery life



Wireless PIR Detector

DS-PD201MC-WE/WA/WB

- Detection range: 10m / 90°
- 2 - 2.4 m mounting height
- 1600 / 1200 m transmission distance
- Up to 24 Kg pet immunity
- 3 levels sensitivity, High/Normal/Low
- Up to 2 years battery life



Wireless PIR-CAM Detector

DS-PD201P10-WE/WA/WB

- Detection range: 10m / 90°
- 2 - 2.4 m mounting height
- 1600 / 1200 m transmission distance
- Up to 10 Kg pet immunity
- Picture verification
- Up to 2 years battery life



Wireless Sounder Indoor

DS-PS201-WE/WA/WB

- strobe light and audio alarm
- 80-95 dB at 1 m distance
- 1600 / 1200 m transmission distance
- FIRE, PANIC, MEDICAL and INTRUSION alarm
- blue/red version available
- Up to 2 years battery life



AX HOME Kit

the kit includes:

- control panel
- keypad
- PIR
- magnetic contact
- sounder indoor
- keyfob
- AA batteries
- screwd package & sponge tape



AX HOME Kit

the kit includes:

- control panel
- PIR
- magnetic contact
- keyfob
- AA batteries
- screwd package & sponge tape

Intrusion Alarm

Wireless Intrusion Alarm

**HOT****AX PRO Control Panel****DS-PWA96-M-WE/WB**

- TCP/IP, Wi-Fi, and 3/4G network
- Video verification by mobile app
- Voice guide
- Supports 24/7 monitoring with alarm response
- kits available

**HOT****Wireless PIR-Camera Detector**
DS-PDPC12P-EG2-WE(B)/WB(B)

- Detection range: 12m / 85.9°
- Up to 20 pictures for verification
- 800 m transmission distance
- 3D optics design for creep zone detection
- Up to 5 years battery life

**Wireless PIR Detector**
DS-PDP15P-EG2-WE/WB

- Detection range: 12m / 85.9°
- 1600 / 1200 m transmission distance
- 3D optics design for creep zone detection
- Up to 5 years battery life

**HOT****Magnetic Contact**
DS-PDMC-EG2-WE(B)/WB(B)

- Door opening detection
- 42 mm gap detection
- 1600 / 1200 m transmission distance
- Up to 5 years battery life

**Wireless PIR AM Curtain Detector**
DS-PDC10AM-EG2-WE/WB

- Supports dual-curtain detection via bracket
- 5 m / 10 m 5° detection range and angle
- 2-3.5 m installation height
- 1600 / 1000 m transmission distance
- Up to 5 years battery life

**Wireless Triple Signal Detector with Cam**
DS-PDTT15AM-LM-WE/WB

- 2*PIR + 24 GHz Microwave for reliable detection
- Up to 20 pictures for verification
- 15 m / 90°@180° adjustable
- 1600 / 1000 m transmission distance
- Up to 5 years battery life

**Wireless Smoke Detector**
DS-PDSMK-E-WE/WB

- >85 dB buzzer
- Inter-link function support
- 1600 / 1000 m transmission distance
- Up to 10 years battery life

**HOT****Wireless LCD Keypad**
DS-PK1-LT-WE/WB

- LCD screen and LED to indicate system status
- 1200 / 800 m transmission distance
- Up to 2 years battery life

**Wireless Keyfob**
DS-PKF1-WE/WB

- Quick arm / disarm
- 900 / 500 m transmission distance

**Wireless External Sounder**
DS-PS1-E-WE/WB

- 110 dB
- 1,200 / 900 m transmission distance

**Wall Switch****DS-PM1-01H-WE/WB**

- Smart design for putting into hiding places
- Automation operating, one button turn on/off from app / Keyfob / Keypad
- Supports setting scenarios by different events

Audio

Network Audio



DS-QAZ1307G1T-E

- Max. Acoustic Pressure: 121 dB SPL
- Rated Power: 7W
- Frequency Response: 100Hz to 20kHz
- Support live/scheduled/alarm/emergency broadcast
- Support 2-way audio



DS-QAZ1120G1R-B

DS-QAZ1120G1R-B/BLACK

- Rated Power: 20 W
- Full frequency 5.25" ×1
- Max. Acoustic Pressure: 103dB SPL
- Frequency Response: 130 Hz to 17.5 kHz
- Support live/scheduled/alarm/emergency broadcast
- Support 2-way audio
- Support up to 1 x 20W sub speaker



DS-QAZ1630G1-BE

DS-QAZ1630G1-BE/BLACK

- Rated Power: 30 W
- Tweeter 1" ×1, Woofer 6.5" ×1
- Max. Acoustic Pressure: 104dB SPL
- Frequency Response: 80Hz to 20kHz
- Support live/scheduled/alarm/emergency broadcast
- Support 2-way audi



NEW



DS-QAZ1506G1-BE

DS-QAZ1506G1-BE/BLACK

- Rated Power: 6 W
- Full frequency 6.5" ×1
- Max. Acoustic Pressure: 94dB SPL
- Frequency Response: 140 Hz to 15 kHz
- Support live/scheduled/alarm/emergency broadcast
- Support 2-way audio
- Suitable for non ceiling scenarios



DS-QAZ1606G1-BE

DS-QAZ1606G1-BE/BLACK

- Rated Power: 6 W
- Full frequency 6.5" ×1
- Max. Acoustic Pressure: 94dB SPL
- Frequency Response: 140 Hz to 15 kHz
- Support live/scheduled/alarm/emergency broadcast
- Support 2-way audio
- Support up to 6 x 6W sub speakers



DS-QAE1A80G1-VB

- Support live/schedule broadcast
- Support alarm input/alarm schedule/audio linkage
- Multiple audio input:MIC/USB/Bluetooth/RCA
- Support 2-zones volume adjustment
- Remote control, 2-zones 80W output
- Built-in eMMC

Analog Audio



DS-QAE0206G1-V

- Rated Power: 6 W
- Full frequency 5.25" ×1
- Max. Acoustic Pressure: 98 dB SPL
- Rated Power: 6 W
- Frequency Response: 90 Hz to 20 kHz
- Support speaker spring terminal audio line input



DS-QAZ0610G1

DS-QAZ1606G1-BE/BLACK

- Rated Power: 10 W
- Tweeter 1" ×1, Woofer 6.5" ×1
- Max. Acoustic Pressure: 98 dB SPL
- Frequency Response: 120 Hz to 20 kHz
- Support audio line input



DS-QAZ0610G1

DS-QAZ0610G1/BLACK

- Rated Power: 10 W
- Tweeter 1" ×1, Woofer 6.5" ×1
- Max. Acoustic Pressure: 98 dB SPL
- Frequency Response: 120 Hz to 20 kHz
- Support audio line input
- Suitable for non ceiling scenarios
- Support 2-way audio
- Suitable for non ceiling scenarios



NEW



DS-QAE0120G1R

DS-QAE0120G1R/BLACK

- Rated Power:
70 V: 5 W/10 W/15 W/20 W
100 V: 5 W/10 W/15 W/20 W
- Full frequency 5.25" ×1
- Max. Acoustic Pressure: 103 dB SPL
- Frequency Response: 130 Hz to 17.5 kHz



DS-QAE0330G1T-V

- Rated Power:
70V/2.5W/5W/7.5W/15W/30W
100V: 5W/10W/15W/30W
- 34-core Mids & Tweets 2"×1
- Max. Acoustic Pressure: 120 dB SPL
- Frequency Response: 250 Hz to 8 kHz



DS-QAE0A60G1-VB

- Rated Power: 60 W
- Frequency Response:
USB, Bluetooth: 20 Hz to 20kHz;
MIC, RCA Input: 20 Hz to 8 kHz
- Audio input: USB/Bluetooth/MIC/RCA
- Support two-zone volume adjustment
- Support multiple amplifiers cascaded via RCA cables



NEW



DS-QAE0A120G1-VB6

- Rated Power: 120 W
- Audio input: EMC IN *1, 6.5 mm Microphone *2, AUX IN *2, Bluetooth, USB2.0
- Support 6-zone volume adjustment
- Support multiple amplifiers cascaded via RCA cables



NEW



DS-QAE0A240G1-VB6

- Rated Power: 240 W
- Audio input: EMC IN *1, 6.5 mm Microphone *2, AUX IN *2, Bluetooth, USB2.0
- Support 6-zone volume adjustment
- Support multiple amplifiers cascaded via RCA cables



NEW



DS-QAE0M0G01

- Frequency Response: 20 Hz to 20 kHz
- Support paging function
- Supports connection to amplifier/PC/NVR



Display

Monitors

**DS-D5022F2-1V2(EU)**

- 1080 p
- 21.5"
- VA Panel
- 250nits
- 12V DC
- HDMI,VGA,Audio out

**DS-D5022F2-2P2**

- 1080 p
- 21.5"
- IPS Panel
- 250nits
- 12V DC
- HDMI,VGA,Audio out

**DS-D5022F2-1V2S(EU)**

- 1080 p
- 21.5"
- VA Panel
- 250nits
- 12V DC
- HDMI,VGA,Speaker

**DS-D5024F2-AV2(EU)**

- 1080 p
- 23.8"
- VA Panel
- 250nits
- 12V DC
- HDMI,VGA,Audio out

**DS-D5027F2-1P2(EU)**

- 1080 p
- 27"
- IPS Panel
- 300nits
- 7 x 24 h
- 12V DC
- HDMI,VGA,Audio out

**DS-D5032F3-1V0S(EU)**

- 1080 p
- 31.5"
- VA Panel
- 300nits
- 110-220V AC,build in Powersupply
- HDMI,VGA,Speaker

Accessories

UPS

NEW

**DS-UPS600**

- Capacity 600VA, 360W
- Wide input voltage range
- Built-in AVR
- Overload and short circuit protection
- Compact design

**DS-UPS1000**

- Capacity 1000VA, 600W
- Wide input voltage range
- Built-in AVR
- Overload and short circuit protection
- Compact design

**DS-UPS2000**

- Capacity 2000VA, 1200W
- LCD display
- Wide input voltage range
- Built-in AVR
- Overload and short circuit protection
- USB port for communication
- Compact design

**DS-UPS3000**

- Capacity 3000VA, 1800W
- LCD display
- Wide input voltage range
- Built-in AVR
- Overload and short circuit protection
- USB port for communication
- Compact design

Network Cable

**CATE5E Cable
DS-1LN5E-E/E**

- UTP CAT 5E, 305 meters
- Core diameter: 0.45 mm
- Solid-Bare Copper (99.95%)
- Sheath color Black

**CAT6 Cable with CPR Fca
DS-1LN6U-SCO (Orange sheath)
DS-1LN6U-G (grey sheath)**

- UTP CAT6, 305 meters
- Core diameter: 0.55 mm
- Solid-Bare Copper (99.95%)

**CAT6 Cable with UL CM CPR Eca
DS-1LN6-UE-W (black/blue/white)
DS-1LN6-UU (black/orange)**

- UTP CAT6, 305 meters
- Core diameter: 0.53 mm, 0.56 mm
- Solid-Bare Copper (99.95%)

Software



Hik-Partner Pro

Security Business Assistant. At Your Fingertips.

Seamless delivery just via mobile app

- Autodevice discovery in the LAN
- Automated device setup
- Easy handover to end users

Remote maintenance improves efficiency

- Remote parameter configuration
- Remote firmware upgrading
- Remote password resetting

Subscription services for ongoing revenues

- Health monitoring
- Subscription plan management



Hik-Connect

Unified Security, From Residence to Business

Team Mode for SMB & enterprise use

- Accessible via web portal / mobile app
- Streamlined multi-site management
- Precise role-based permissions
- Serverless deployment & scalability
- Seamless integration with OpenAPI

Personal Mode for individual use

- Interact with taps and swipes
- Remote management on the go
- Accurate and timely notifications
- Stay secure with all data encrypted

Solutions for **Small- & Medium-sized Businesses**

Grow your business with
one-stop SMB solutions




SMB Solutions

SMB Solution for Houses




SMB Solution for Small Offices

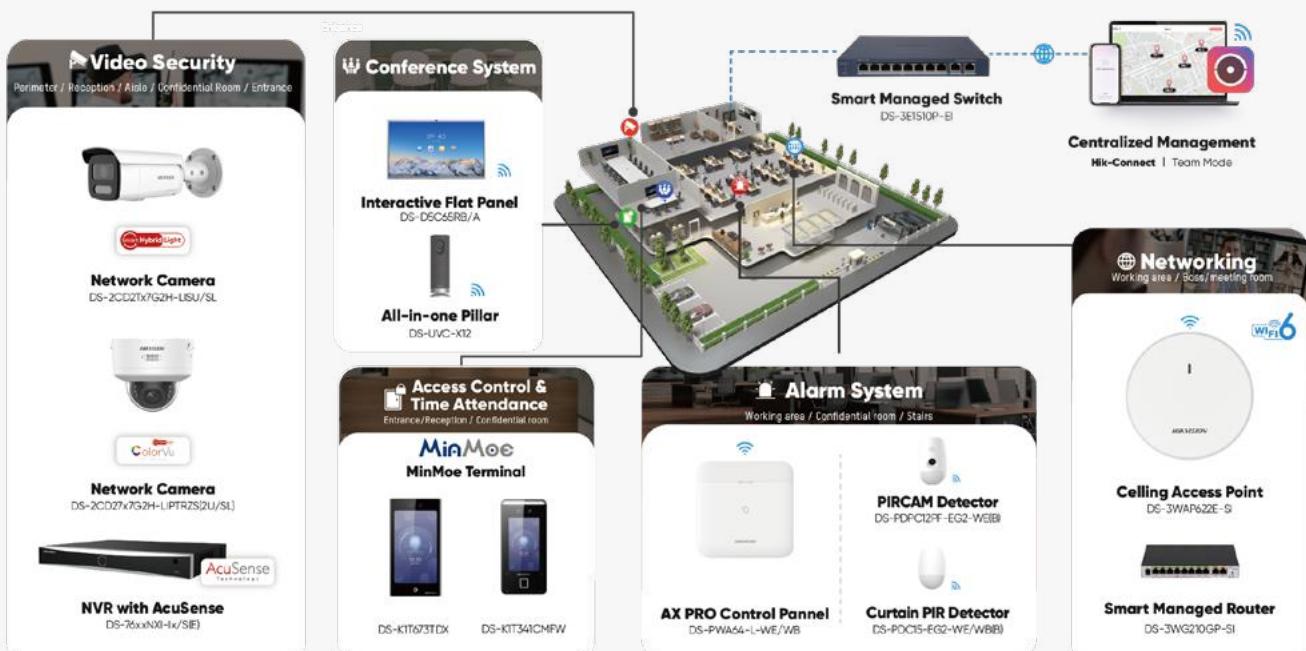


SMB Solutions

SMB Solution for Stores

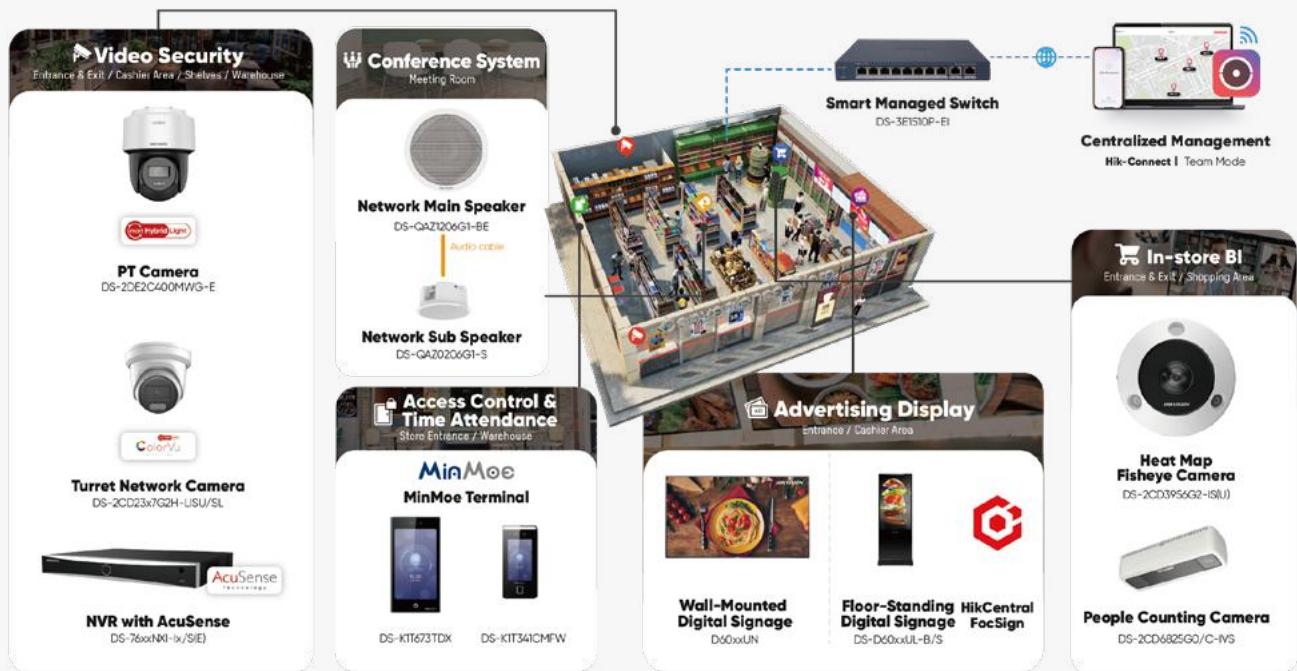

SMB Solution for Farms

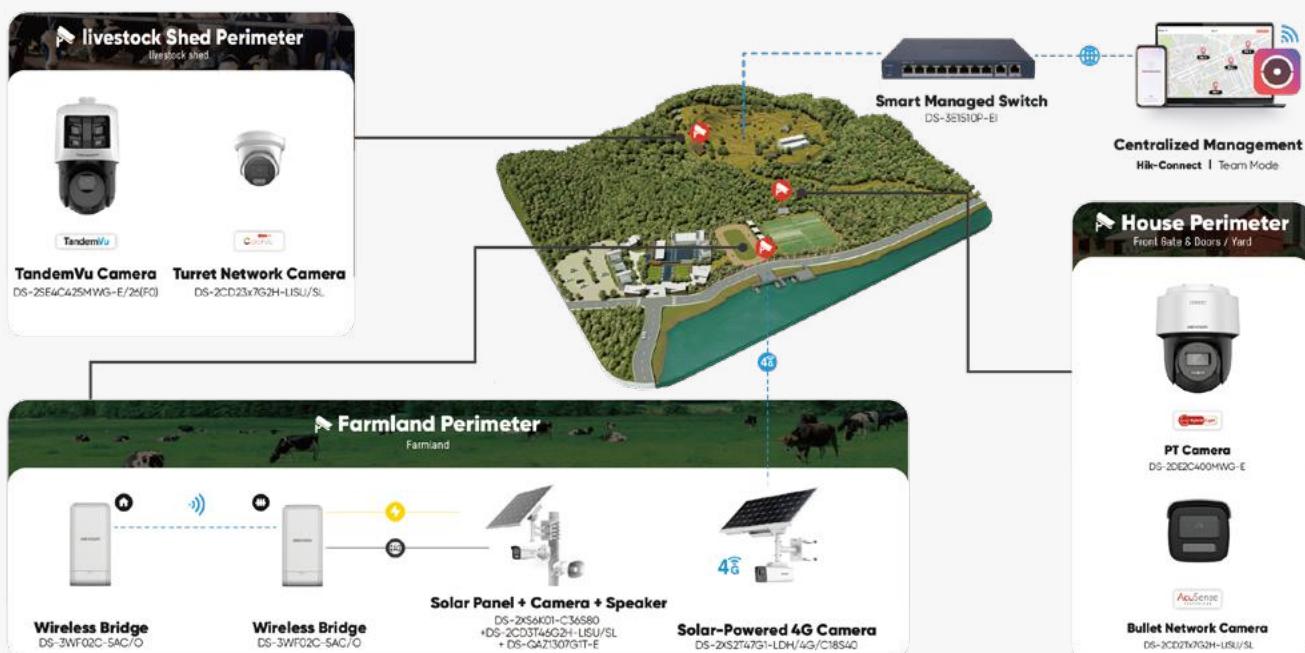

Towards a Greener Footprint



Green Manufacturing

Cleaner Energy

In 2022 alone, Hikvision purchased **32,852 MWh** of green energy, including solar, wind and hydro power, and generated **4,508.3 MWh** of photovoltaic power ourselves.

Cleaner Materials

Wherever possible, we use clean materials in the manufacture of products. For example, we use a no-paint process to minimize pollutant emissions when producing our turnstiles.

Cleaner Packaging

Using folded cardboards instead of polyethylene to cushion the interior of product packaging alone can reduce our plastic use by **27.9 tons** per year.



Green Operations

Cloud-based R&D Platform

Providing 4,200 virtual machines on 500 computing service nodes, Hikvision's R&D cloud platform cuts electricity consumption by nearly **5,000 MWh** and carbon emissions by nearly **4,000 tons** per year.

Smarter Energy Consumption


AI-powered sensors detect the presence of people in our meeting rooms and automatically turn off lights and air conditioning when a room is empty.

Sustainable Water Use

We control the total amount of stormwater runoff and improve the way stormwater is recycled and reused in our office parks.

'Green Office' Initiatives

We implement a paperless office philosophy. Where possible, meetings are held online and printed materials are replaced by their digital equivalents. We also encourage low-carbon business travel.

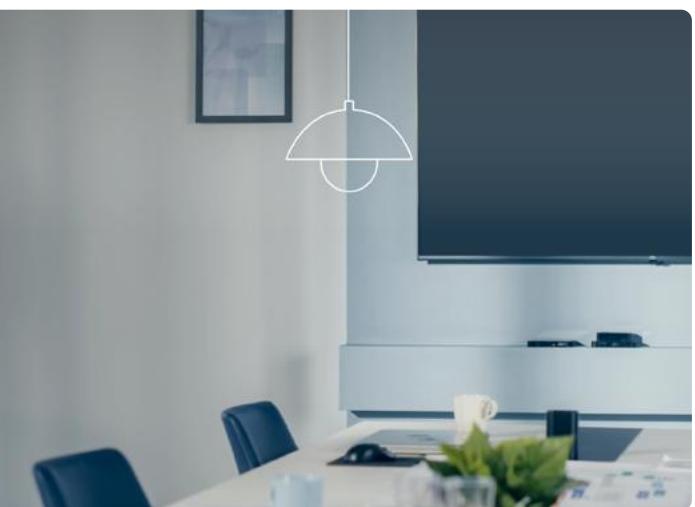

HIKVISION DISTRIBUTION
BROCHURE FOR
HOT-SELLING PRODUCTS



www.hikvision.com
support@hikvision.com



HIKVISION®