





**HIKVISION**<sup>®</sup>  
DISTRIBUTION BROCHURE FOR  
**HOT-SELLING  
PRODUCTS**

# About Hikvision

Hikvision is committed to serving various industries through its cutting-edge technologies of machine perception, artificial intelligence, and big data, leading the future of AIoT.

## R&D Investment

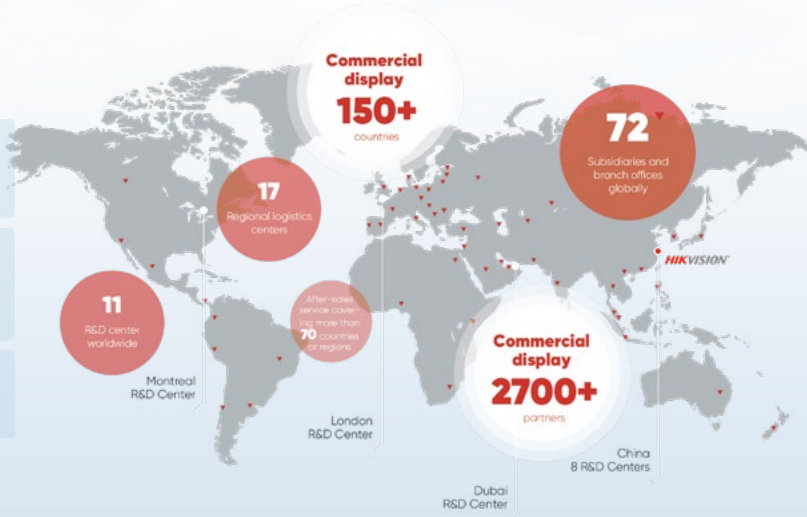

## Abundant Product & Solution Offerings

We develop nearly **30,000** hardware products and more than **200** software products with leading technologies, such as:



Video & Imaging Technology



Multi-Dimensional Perception



Artificial Intelligence

## Securing a smarter future

At the forefront of security innovation, Hikvision aims to lay the foundation for a future that is not only safer, but also more intelligent for every user.



### Advancing with integrated technologies

Hikvision is expanding from mere vision to multidimensional perception and empowering full products range with AI analytics for enhanced security. By seamlessly integrating cutting-edge technologies like audio & video linkage and multi-lens synergy, Hikvision sets a new standard in security intelligence.



### Innovating through converged applications

Hikvision transforms from standalone products to integrated systems, offering one-stop solutions through its Hik-Partner Pro and Hik-Connect platforms. These solutions streamlines remote management and maintenance for small to medium-scale applications, delivering efficient services to residences, office, and retail spaces.

# Contents

## 01 HIGHLIGHTS

- 01 ColorVu
- 01 AcuSense
- 01 Deluxe 6MP
- 01 Dual Detection
- 01 Smart Hybrid Light

- 01 Multi-lens Synergy
- 01 Panoramic Cameras
- 01 TandemVu PTZ Cameras

## 02 Easy-to-use

- 02 PT
- 02 Auto Configuration
- 02 Cloud-based Management
- 02 OTA

## 02 Audio and Video Integration

- 02 Two-way Audio
- 02 Live Guard
- 02 Smarter Audio with Video Linkage
- 02 4-Wire HDTVI Intercom

## 03 PRODUCT SHOWCASE

- 03 Network Cameras
- 08 Network Video Recorders
- 09 Turbo HD Cameras
- 10 DVR
- 11 Networking & Transmission
- 13 Video Intercom

- 14 Access Control
- 14 Entrance & Exit Management
- 15 Intrusion Alarm
- 16 Audio
- 17 Display
- 16 Accessories

## 18 SOFTWARE

- 18 Hik-Partner Pro
- 18 Hik-Connect

## 18 SMB SOLUTIONS

- 18 Residential Solution
- 19 Multi-Store Solution
- 19 Office Solution

## 20 TOWARDS A GREENER FOOTPRINT

# Highlights


## ColorVu

F1.0 Super Aperture and advanced sensor to ensure excellent color imaging in ultra-low light. Moreover, the emerged “ColorVu + X” combined with other Hikvision’s advanced technology (“X”) brings more amazing possibilities.



## AcuSense

Powered by deep-learning algorithms, AcuSense technology for perimeter protection based on human-vehicle detection includes **Motion Detection 2.0** and **video content analysis (VCA)** that warns before an event occurs. It also includes **AcuSearch** for quick post-event retrieval, allowing users to pinpoint specific targets of interest with just one click.

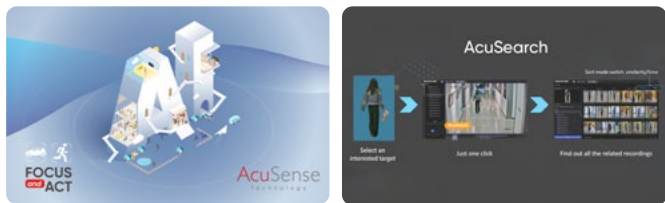


## Deluxe 6MP

More 6MP cost-effective cameras are available, not only with higher resolution, but also with upgraded hardware and software.




## Dual Detection

Dual detectors that combine PIR and radar for accurate alarms.

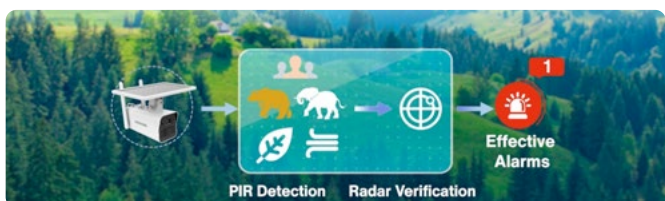

## Smart Hybrid Light

Three supplemental lighting modes in one camera: 24/7 color, IR (B&W), or Smart. Distinguish persons and vehicles from other objects and ensure capturing critical details with event-triggered color images.

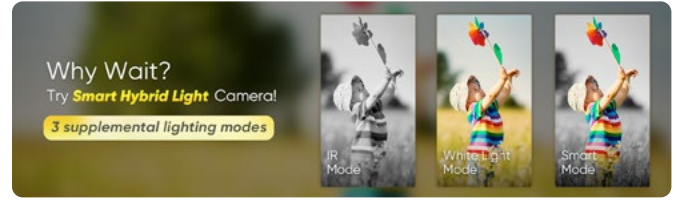

## Multi-lens Synergy


### Panoramic Cameras

One security camera with dual lenses, combining image fusion algorithm to stitch together a 180-degree horizontal field of view.



### TandemVu PTZ Cameras

One camera provides the big picture and small details in tandem, delivering smart linkage for instant target tracking.

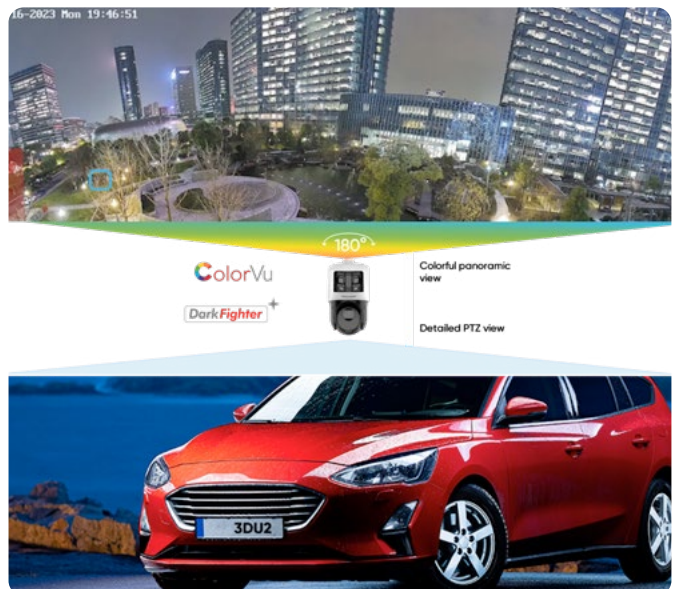


# Highlights

## Easy-to-use

### Easy Installation

#### PT


Pan and tilt, easy remote adjustment of any angle via Hik-Connect. All-in-one bracket for easy installation.

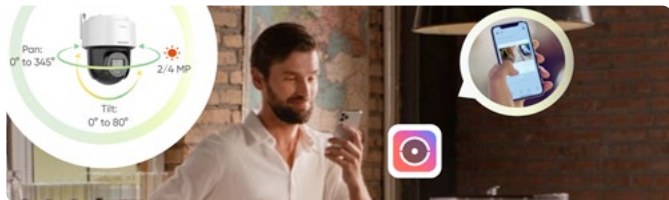

### Easy Activation

#### Auto Configuration

The auto-active process enables automatic activation with intuitive result display.

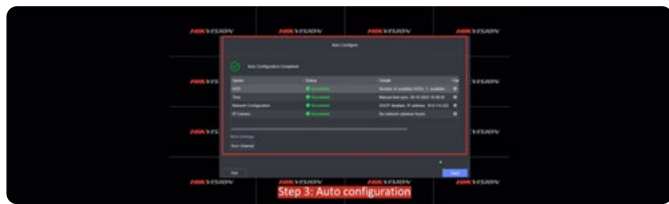

### Easy Management

#### Cloud-based Management

Cloud management through the Hik-Partner Pro (HPP) app streamlines setup, unifies networking and security management, and facilitates remote troubleshooting for smart managed switches.



### Easy Upgrade

#### OTA

Over-the-air upgrades of EUI for NVR & DVR allow users to be informed of the latest system upgrades on multiple platforms.



## Audio and video integration

### Two-way Audio

Two-way audio with built-in microphone and speakers enables real-time communication, breaking the limits.



### Live Guard

Proactive protection with real-time flashing light and audible warnings.



### Smarter Audio with Video Linkage

The synchronized audio & video system enhances security and enables swift response to threats with powerful and timely deterrence.



### 4-Wire HDTVI Intercom

Powered by two-way audio TVI technology, Hikvision's 4-wire HD intercom solution delivers 720p image quality over 4-wire cables, contributing to enhanced residential security and convenience.



# Product Showcase

## Network Cameras



Pro Series Smart Hybrid Light Cameras with ColorVu



**DS-2CD2047G2H-LIU/SL**

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD2147G2H-LISU**

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment



**HOT**

**DS-2CD2347G2H-LISU/SL**

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



**HOT**

**DS-2CD2T47G2H-LISU/SL**

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD2067G2H-LIU/SL**

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD2167G2H-LISU**

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment



**HOT**

**DS-2CD2367G2H-LISU/SL**

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



**HOT**

**DS-2CD2T67G2H-LISU/SL**

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD2087G2H-LIU/SL**

- 4K resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD2187G2H-LISU**

- 4K resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment



**HOT**

**DS-2CD2387G2H-LISU/SL**

- 4K resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



**HOT**

**DS-2CD2T87G2H-LISU/SL**

- 4K resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD2647G2HT-LIZS**

- 4 MP resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- IP67 and IK10



**DS-2CD2667G2HT-LIZS**

- 6 MP resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- IP67 and IK10



**DS-2CD2687G2HT-LIZS**

- 4K resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- IP67 and IK10



**DS-2CD2747G2HT-LIZS**

- 4 MP resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment
- IP67 and IK10



**DS-2CD2767G2HT-LIZS**

- 6 MP resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment
- IP67 and IK10



**DS-2CD2787G2HT-LIZS**

- 4K resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment
- IP67 and IK10

# Network Cameras

## Pro Series Smart Hybrid Light Cameras

Smart Hybrid Light

NEW



**DS-2CD2043G2-LI2U**

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2143G2-LI2U**

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



**DS-2CD2343G2-LI2U**

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2543G2-LI2U**

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2T43G2-LI2U**

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2063G2-LI2U**

- 6 MP high performance resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2163G2-LI2U**

- 6 MP high performance resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



**DS-2CD2363G2-LI2U**

- 6 MP high performance resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2563G2-LI2U**

- 6 MP high performance resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2T63G2-LI2U**

- 6 MP high performance resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2083G2-LI2U**

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2183G2-LI2U**

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



**DS-2CD2383G2-LI2U**

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2583G2-LI2U**

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2T83G2-LI2U**

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2643G2-LI2U**

- 4 MP resolution, vari-focal
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2663G2-LI2U**

- 6 MP high performance resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2683G2-LI2U**

- 4K ultra-high resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



**DS-2CD2743G2-LI2U**

- 4 MP resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



**DS-2CD2763G2-LI2U**

- 6 MP high performance resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



**DS-2CD2783G2-LI2U**

- 4K ultra-high resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment

# Network Cameras



## Value Series Smart Hybrid Light Cameras with ColorVu



### DS-2CD1027G2H-LIUF

- 1080P resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



### DS-2CD1127G2H-LIUF

- 1080P resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



### DS-2CD1327G2H-LIUF

- 1080P resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



### DS-2CD1T27G2H-LIUF

- 1080P resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



### DS-2CD1047G2H-LIUF

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



### DS-2CD1147G2H-LIUF

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



### DS-2CD1347G2H-LIUF

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



### DS-2CD1T47G2H-LIUF

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



### DS-2CD1067G2H-LIUF

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



### DS-2CD1167G2H-LIUF

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



### DS-2CD1367G2H-LIUF

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



### DS-2CD1T67G2H-LIUF

- 6 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



Network Cameras

Value Series Smart Hybrid Light Cameras



**DS-2CD1023G2-LIUF/SL**

- 1080P resolution
- Smart Hybrid Light
- Motion Detection 2.0
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD1123G2-LIUF**

- 1080P resolution
- Smart Hybrid Light
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



**DS-2CD1323G2-LIUF/SL**

- 1080P resolution
- Smart Hybrid Light
- Motion Detection 2.0
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD1043G2-LIUF/SL**

- 4 MP resolution
- Smart Hybrid Light
- Motion Detection 2.0
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD1143G2-LIUF**

- 4 MP resolution
- Smart Hybrid Light
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



**DS-2CD1343G2-LIUF/SL**

- 4 MP resolution
- Smart Hybrid Light
- Motion Detection 2.0
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD1063G2-LIUF/SL**

- 6 MP resolution
- Smart Hybrid Light
- Motion Detection 2.0
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD1163G2-LIUF**

- 6 MP resolution
- Smart Hybrid Light
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



**DS-2CD1363G2-LIUF/SL**

- 6 MP resolution
- Smart Hybrid Light
- Motion Detection 2.0
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD1623G2-LIZSU/SL**

- 2 MP resolution, varifocal
- Smart Hybrid Light
- Motion Detection 2.0
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD1643G2-LIZSU/SL**

- 4 MP resolution, varifocal
- Smart Hybrid Light
- Motion Detection 2.0
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD1663G2-LIZSU/SL**

- 6 MP resolution, varifocal
- Smart Hybrid Light
- Motion Detection 2.0
- Strobe light and audio alarm, Built-in two-way audio



**DS-2CD1723G2-LIZSU**

- 2 MP resolution, varifocal
- Smart Hybrid Light
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



**DS-2CD1743G2-LIZSU**

- 4 MP resolution, varifocal
- Smart Hybrid Light
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



**DS-2CD1763G2-LIZSU**

- 6 MP high performance resolution, varifocal
- Smart Hybrid Light
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08

## Network Cameras



### Pro Series Dual-Lens Stitched Cameras with ColorVu



#### DS-2CD236762P-LSU/SL

- 3 MP+3 MP resolution
- 180° seamless stitching
- ColorVu, F1.0 super aperture
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Strobe light and audio alarm



#### DS-2CD238762P-LSU/SL

- 4 MP+4 MP resolution
- 180° seamless stitching
- ColorVu, F1.0 super aperture
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Strobe light and audio alarm



#### DS-2CD2T6762P-LSU/SL

- 3 MP+3 MP resolution
- 180° seamless stitching
- ColorVu, F1.0 super aperture
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Strobe light and audio alarm



#### DS-2CD2T8762P-LSU/SL

- 4 MP+4 MP resolution
- 180° seamless stitching
- ColorVu, F1.0 super aperture
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Strobe light and audio alarm

### Pro Series Fisheye Cameras



#### DS-2CD295560-ISU

- 5 MP high resolution
- 180° fisheye view
- Audio and alarm interface
- AcuSense: Motion Detection 2.0 & Perimeter Protection

### Solar-powered Network Cameras



#### DS-2XS2T41G1-ID/4G/C05S07

- 4 MP@15fps, 4 mm/6 mm lens
- PIR + Radar to reduce false alarms
- Built-in two-way audio
- Support 4G communication
- Solar panel: 6.5W, Battery: 51.46WH



#### DS-2XS2T47G1-LDH/4G/C18S40

- 4 MP@15fps, 4 mm/6 mm lens
- ColorVu with 24/7 colorful imaging
- Built-in two-way audio
- Support 4G communication
- Solar panel: 40W, Battery: 180WH



#### DS-2XS3Q47G1-LD(H)/4G/C18S40 DS-2XS3Q47G1-LDW(H)/C18S40

- 4 MP@15fps
- Wi-Fi: 2.8 mm/4 mm/6 mm lens, 4G: 4 mm/6 mm lens
- Pan: 0° to 340°, Tilt: -5° to 105°
- ColorVu with 24/7 colorful imaging
- Built-in two-way audio
- Support 4G/Wi-Fi communication
- Solar panel: 40W, Battery: 180WH

### PT Network Camera



#### DS-2DE3A400BW-DE

- 4 MP@25/30 fps, 2.8 mm/4 mm lens
- Two-way audio
- Pan: 0° to 350°, tilt: 0° to 90°
- 30 m white light
- IP66



#### DS-2DE2C400MWG-E

- 4 MP@20 fps, 2.8 mm/4 mm lens
- Two-way audio
- Pan: 0° to 345°, tilt: 0° to 80°
- Smart Hybrid Light
- 30 m white light and 30 m IR
- IP66



#### DS-2DE2A404IW-DE3

- 4 MP@25/30 fps, 2.8 - 12 mm lens
- Two-way audio
- Pan: 0° to 355°, tilt: 0° to 90°
- 20 m IR
- IP66, IK10



#### DS-2DE2C400SCG-E

- 4 MP@25/30 fps, 2.8 mm/4 mm lens
- Two-way audio
- Pan: 0° to 340°, tilt: -5° to 105°
- 30 m white light
- IP66

### PTZ Network Camera



#### DS-2DE4425IW-DE

- 1/2.8" 4 MP CMOS, 25x optical zoom
- 4 MP@25/30 fps
- AcuSense
- Pan: 360° endless, tilt: -15° to 90°
- 100 m IR
- IP66



#### DS-2DE4A425IWG-E

- 1/2.8" 4 MP CMOS, 25x optical zoom
- 4 MP@50/60 fps
- AcuSense, Auto tracking 2.0
- Pan: 360° endless, tilt: -5° to 90°
- 50 m IR
- IP66



#### DS-2SE4C425MWG-E(14F0)

- Panoramic: 1/3" 4 MP CMOS, 2.8 mm
- PTZ: 1/2.8" 4 MP CMOS, 25x optical zoom
- 4 MP@25/30 fps
- AcuSense, Smart linkage
- Pan: 360° endless, tilt: -15° to 90°
- 30 m white light and 100 m IR
- IP66



#### DS-2DE7A412MCG-EB

- 1/1.8" 4 MP CMOS, 12x optical zoom
- 4 MP@25/30 fps
- AcuSense, Auto tracking 2.0, Live Guard
- Pan: 360° endless, tilt: -15° to 90°
- 100 m white light or 150 m IR
- IP66

## Network Video Recorders

### I series with AcuSense



#### DS-7608NXI-I2(/8P)/S(E)

- 8-ch IP video input; /P: PoE
- Up to 2-ch@32MP/8-ch@8MP/16-ch@4MP/32-ch@1080p
- Up to 8-ch Motion Detection 2.0
- Up to 4-ch perimeter protection
- AcuSearch
- 2 SATA interfaces, up to 14 TB for each HDD
- Up to 80 Mbps incoming bandwidth



#### DS-7616NXI-I2(/16P)/S(E)

- 16-ch IP video input; /P: PoE
- Up to 2-ch@32MP/8-ch@8MP/16-ch@4MP/32-ch@1080p
- Up to 16-ch Motion Detection 2.0
- Up to 4-ch perimeter protection
- AcuSearch
- 2 SATA interfaces, up to 14 TB for each HDD
- Up to 160 Mbps incoming bandwidth



#### DS-7732NXI-I4(/16P)/S(E)

- 32-ch IP video input; /P: PoE
- Up to 2-ch @ 32MP/8-ch@8MP/16-ch@4MP/32-ch@1080p
- 32-ch Motion Detection 2.0
- 4-ch perimeter protection
- AcuSearch
- 4 SATA interfaces, up to 14 TB for each HDD
- Up to 256 Mbps incoming bandwidth

### K series with AcuSense

**HOT**



#### DS-7604NXI-K1(/4P)

- 4-ch IP video input; /P: PoE
- Up to 1-ch@12 MP or 2-ch@8 MP or 4-ch@4 MP or 8-ch@1080p decoding capacity
- Up to 4-ch Motion Detection 2.0
- Up to 1-ch perimeter protection
- 1 SATA interface, up to 10 TB for each HDD
- Up to 40 Mbps incoming bandwidth



#### DS-7608NXI-K1(/8P)

- 8-ch IP video input; /P: PoE
- Up to 1-ch@12 MP or 2-ch@8 MP or 4-ch@4 MP or 8-ch@1080p decoding capacity
- Up to 8-ch Motion Detection 2.0
- Up to 1-ch perimeter protection
- 1 SATA interface, up to 10 TB for each HDD
- Up to 80 Mbps incoming bandwidth



#### DS-7608NXI-K2(/8P)

- 8-ch IP video input; /P: PoE
- Up to 2-ch@12 MP or 3-ch@8 MP or 6-ch@4 MP or 12-ch@1080p decoding capacity
- Up to 8-ch Motion Detection 2.0
- Up to 2-ch perimeter protection
- 2 SATA interfaces, up to 10 TB for each HDD
- Up to 80 Mbps incoming bandwidth



#### DS-7616NXI-K2(/16P)

- 16-ch IP video input; /P: PoE
- Up to 2-ch@12 MP or 3-ch@8 MP or 6-ch@4 MP or 12-ch@1080p decoding capacity
- Up to 16-ch Motion Detection 2.0
- Up to 2-ch perimeter protection
- 2 SATA interfaces, up to 10 TB for each HDD
- Up to 160 Mbps incoming bandwidth

### 76Q series



#### DS-7604NI-Q1(/4P)(D)

- 4-ch IP video input; /P: PoE
- Up to 1-ch@8 MP/3-ch@4 MP/6-ch@1080p decoding capacity
- Up to 1-ch Motion Detection 2.0
- 1 SATA interface, up to 8 TB for each HDD
- Up to 40 Mbps incoming bandwidth



#### DS-7608NI-Q1(/8P)(D)

- 8-ch IP video input; /P: PoE
- Up to 1-ch@8 MP/3-ch@4 MP/6-ch@1080p decoding capacity
- Up to 4-ch Motion Detection 2.0
- 1 SATA interface, up to 8 TB for each HDD
- Up to 80 Mbps incoming bandwidth



#### DS-7608NI-Q2(/8P)(D)

- 8-ch IP video input; /P: PoE
- Up to 1-ch@8 MP/3-ch@4 MP/6-ch@1080p decoding capacity
- Up to 4-ch Motion Detection 2.0
- 2 SATA interfaces, up to 8 TB for each HDD
- Up to 80 Mbps incoming bandwidth



#### DS-7616NI-Q2(/16P)(D)

- 16-ch IP video input; /P: PoE
- Up to 1-ch@8 MP/3-ch@4 MP/6-ch@1080p decoding capacity
- Up to 4-ch Motion Detection 2.0
- 2 SATA interfaces, up to 8 TB for each HDD
- Up to 160 Mbps incoming bandwidth

## Turbo HD Cameras

Smart Hybrid Light Cameras with ColorVu



### DS-2CE10DF3T-LFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE12DF3T-LFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE70DF3T-LM(P)FS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE72DF3T-LMFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE10KF0T-L(P)FS

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE12KF0T-LFS

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE70KF0T-LM(P)FS

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE72KF0T-LFS

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)

Smart Hybrid Light Cameras



### DS-2CE16D0T-LPFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE17D0T-LFS

- 2 MP, 2.8 mm, 3.6 mm, 6mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE76D0T-LP(M)FS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE18D0T-LFS

- 2 MP, 2.8 mm, 3.6 mm and 6mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE16K0T-LFS

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE17K0T-LFS

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE76K0T-LP(M)FS

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



### DS-2CE78K0T-LFS

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)

**DVR**

*Value series with Motion Detection 2.0*



**DS-7204HGHI-M1**

- 4-ch analog video input
- Up to 5-ch IP video input (up to 2 MP)
- Up to 1080p lite@30 fps encoding capability
- Motion Detection 2.0 on all 4 channels
- Audio via coaxial cable
- 1 SATA interface



**DS-7208HGHI-M1**

- 8-ch analog video input
- Up to 10-ch IP video input (up to 5 MP)
- Up to 1080p lite@15 fps encoding capability
- Motion Detection 2.0 on all 8 channels
- Audio via coaxial cable
- 1 SATA interface



**DS-7216HGHI-M1**

- 16-ch analog video input
- Up to 18-ch IP video input (up to 5 MP)
- Up to 1080p lite@15 fps encoding capability
- Motion Detection 2.0 on all 16 channels
- Audio via coaxial cable
- 1 SATA interface

*Pro series with AcuSense*



**iDS-7204HQHI-M1/S**

- 4-ch analog video input
- Up to 6-ch IP video input (up to 6 MP)
- Up to 3K/5 MP lite@12 fps, 1080p@15 fps encoding capability
- Motion Detection 2.0 on all 4 channels
- 2-ch perimeter protection
- Audio via coaxial cable
- 1 SATA interface



**iDS-7208HQHI-M1/S**

- 8-ch analog video input
- Up to 12-ch IP video input (up to 6 MP)
- Up to 3K/5 MP lite@12 fps, 1080p@15 fps encoding capability
- Motion Detection 2.0 on all 8 channels
- 4-ch perimeter protection
- Audio via coaxial cable
- 1 SATA interface



**iDS-7216HQHI-M1/S**

- 16-ch analog video input
- Up to 24-ch IP video input (up to 6 MP)
- Up to 3K/5 MP lite@12 fps, 1080p@15 fps encoding capability
- Motion Detection 2.0 on all 16 channels
- 4-ch perimeter protection
- Audio via coaxial cable
- 1 SATA interface



**iDS-7204HUHI-M1/S**

- 4-ch analog video input
- Up to 8-ch IP video input (up to 8 MP)
- Up to 8 MP@8 fps (channel 1), 3K/5 MP@12 fps encoding capability
- Motion Detection 2.0 on all 4 channels
- 4-ch perimeter protection
- Audio via coaxial cable
- 1 SATA interface



**iDS-7208HUHI-M2/S**

- 8-ch analog video input
- Up to 16-ch IP video input (up to 8 MP)
- Up to 8 MP@8 fps, 3K/5 MP@12 fps encoding capability
- Motion Detection 2.0 on all 8 channels
- 4-ch perimeter protection
- Audio via coaxial cable
- 2 SATA interfaces



**iDS-7216HUHI-M2/S**

- 16-ch analog video input
- Up to 32-ch IP video input (up to 8 MP)
- Up to 8 MP@8 fps, 3K/5 MP@12 fps encoding capability
- Motion Detection 2.0 on all 16 channels
- 4-ch perimeter protection
- Audio via coaxial cable
- 2 SATA interfaces

# Networking & Transmission

## PoE Switch



**DS-3E1106P-EI/M**

- 4 × 100 Mbps PoE ports, 2 × 100 Mbps RJ45 ports
- Total PoE power budget 45W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure




**DS-3E1310P-EI/M**

- 8 × 100 Mbps PoE ports, 2 × Gigabit RJ45 ports
- Total PoE power budget 60W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure



**DS-3E1105P-EI**

- 4 × 10/100 Mbps PoE ports, 1 × 100 Mbps RJ45 port
- Total PoE power budget 60W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure



**DS-3E1106P-EI**

- 4 × 100 Mbps PoE ports, 2 × 100 Mbps RJ45 ports
- Total PoE power budget 60W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure



**DS-3E1309P-EI**

- 8 × 100 Mbps PoE RJ45 ports, 1 × Gigabit RJ45 ports
- IEEE 802.3at/af standard for PoE ports.
- Network topology management, alarm push, and network health monitor
- AF/AT camera can reach up to 300m in extend mode



**DS-3E1318P-EI**

- 16 × 100 Mbps PoE RJ45 ports, 2 × Gigabit combs
- IEEE 802.3at/af standard for PoE ports
- Network topology management, alarm push, and network health monitor
- AF/AT camera can reach up to 300m in extend mode



**DS-3E1326P-EI**

- 24 × 100 Mbps PoE RJ45 ports, 2 × Gigabit combs
- IEEE 802.3at/af standard for PoE ports
- Network topology management, alarm push, and network health monitor
- AF/AT camera can reach up to 300m in extend mode



**DS-3E1106HP-EI**

- 4 × 100 Mbps PoE RJ45 ports, 2 × 100 Mbps RJ45 ports
- IEEE 802.3at/af/bt standard for PoE ports
- Network topology management, and alarm push
- AF/AT camera can reach up to 300m in extend mode



**DS-3E1310HP-EI**

- 8 × 100 Mbps PoE RJ45 ports, 2 × Gigabit RJ45 ports
- IEEE 802.3at/af/bt standard for PoE ports
- Network topology management, and alarm push
- AF/AT camera can reach up to 300m in extend mode



**DS-3E1506P-EI**

- 4 × Gigabit PoE ports, 2 × Gigabit RJ45 ports
- Total PoE power budget 60W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure



**DS-3E1510P-EI**

- 8 × Gigabit PoE ports, 2 × Gigabit RJ45 ports
- Total PoE power budget 110W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure



**DS-3E1518P-EI**

- 16 × Gigabit PoE RJ45 ports, 1 × Gigabit RJ45 port, 1 × Gigabit fiber optical port
- Total PoE power budget 230W
- Unified cloud management for security systems
- Remote troubleshooting
- Visualized topology management



**DS-3E1526P-EI**

- 24 × Gigabit PoE RJ45 ports, 1 × Gigabit RJ45 port, 1 × Gigabit fiber optical port
- Total PoE power budget 370W
- Unified cloud management for security systems
- Remote troubleshooting
- Visualized topology management

## Wireless Bridge



**DS-3WF0FA-2N/0**

- Up to 1km wireless transmission distance
- 300 Mbps 802.11n wireless bridge
- Built-in 7dBi 2 × 2 MIMO antenna
- Visualized topology management
- Real-time alarm push technology



**DS-3WF02C-5AC/0**

- All Gigabit LAN ports
- TDMA supported
- Quick match through DIP switch
- Visualized topology management
- Up to 5km wireless transmission distance



**DS-3WF0EC-5ACT**

- Up to 500m wireless transmission distance
- 867 Mbps 802.11ac wireless bridge
- Built-in 8 dBi 2 × 2 MIMO antenna
- Visualized topology management
- Real-time alarm push technology



**DS-3WF0BC-2NT**

- Up to 200m wireless transmission distance
- 300 Mbps 802.11n wireless bridge
- Built-in 7dBi 2 × 2 MIMO antenna
- Visualized topology management
- Real-time alarm push technology

## Networking & Transmission

### Wireless Access Points & AC Router

NEW



#### DS-3WAP522-SI

- 1167 Mbps
- 1 GE RJ45
- Access [256/80]
- Spatial Stream: 2.4G 2x2 MIMO, 5G 2x2 MIMO



#### DS-3WAP622G-SI

- 1800 Mbps
- 1 GE RJ45
- Access [256/100]
- Spatial Stream: 2.4G 2x2 MIMO, 5G 2x2 MIMO



#### DS-3WAP622E-SI

- 3000 Mbps
- 1 2.5GE RJ45
- Access [256/100]
- Spatial Stream: 2.4G 2x2 MIMO, 5G 2x2 MIMO



#### DS-3WAP521-SI

- 1200 Mbps
- 2 GE RJ45
- Access [128/50]
- Spatial Stream: 2.4G 2x2 MIMO, 5G 2x2 MIMO



#### DS-3WAP621E-SI

- 1200 Mbps
- 2 GE RJ45
- Access [256/70]
- Spatial Stream: 2.4G 2x2 MIMO, 5G 2x2 MIMO



#### DS-3WG105G-SI

- 5 GE RJ45
- 100 Users
- 32-Aps
- AC 1000 Mbps



#### DS-3WG105GP-SI

- 4 GE PoE, 1 GE RJ45
- 100 Users
- 32-Aps
- AC 1000 Mbps
- PoE 54w



#### DS-3WG210GP-SI

- 8 GE PoE, 2 GE RJ45
- 200 Users
- 150-Aps
- AC 1000 Mbps
- PoE 75w



#### DS-3WG507G-SI

- 5 GE RJ45, 1 GE SFP, 1 GE Combo
- 500 Users
- 200-Aps
- AC 1000 Mbps
- Rack

### Wireless Router



#### DS-3WR126C

- 1200 Mbps Wi-Fi 5
- 4 × RJ45, Gigabit auto-negotiation
- 4 × 5-dBi antennas
- Dual band - smart signal switching



#### DS-3WR4612C

- AC1200 dual-band Wi-Fi
- 4G boosts faster speed
- Instantly access a mobile network with a SIM card



#### DS-3WR15X

- 1500 Mbps Wi-Fi 6
- 1 × Gigabit adaptive WAN port, 3 × Gigabit adaptive LAN ports
- Wired wireless dual Gigabit
- APP management
- Dual band in one and 5G first

### SOHO Switch



#### DS-3E0105D-0

- 5 x 100 Mbps Ethernet ports
- Support ADI/ADIX
- Store-and-forward switching
- Support MAC address auto-learning and aging
- Plug & play, easy to use



#### DS-3E0508D-0

- 8 x Gigabit Ethernet ports
- Support ADI/ADIX
- Store-and-forward switching
- Support MAC address auto-learning and aging
- Plug & play, easy to use



#### DS-3E0108-0

- 8 × 100M adaptive RJ45 ports
- Easy plug & play installation
- Desktop/wall-mounted installation
- Rugged metal case, exquisite design



#### DS-3E0508P-0

- Gigabit PoE and non-PoE ports for multiple use
- Plug & play with easy connection
- Built to last with a rugged metal case
- Desktop/Wall-mounted installation



#### DS-3E0516-E(B)

- 16 × 1000M Ethernet ports
- Support IEEE 802.3, IEEE 802.3u and IEEE 802.3x
- 1000M network access
- Wire-speed forwarding and non-blocking design
- Store-and-forward switching
- Fan-free design with high reliability

## Video Intercom

IP Kit

HOT



DS-KIS603-P(C)

**Door Station: DS-KV6113-WPE1(C)**

- 2 MP Camera, H:131°, V:78°
- One-press to call
- IR illumination, WDR
- IP65, PoE, Wi-Fi
- Built-in card reader module
- Convenient Hik-Connect App mobile control

**Indoor Station: DS-KH6320-WTE1**

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect App mobile control
- Supports voice messages
- Elevator access control



DS-KIS604-S(C)

**Door Station: DS-KV8113-WME1(C)**

- 2 MP camera, H:124°, V:75°
- One-press to call
- IR illumination, WDR
- IP65, PoE
- Built-in card reader module
- Convenient Hik-Connect APP mobile control

**Indoor Station: DS-KH6320-WTE1**

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect App mobile control
- Supports voice messages
- Elevator access control



DS-KIS606-P

**Door Station: DS-KV6113-PE1(C)**

- 2 MP camera, H:131°, V:78°
- One-press to call
- IR illumination, WDR
- IP65, PoE
- Built-in card reader module
- Convenient Hik-Connect App mobile control

**Indoor Station: DS-KH6110-WE1**

- 4.3" touch screen, 1024 x 600
- Wi-Fi
- Convenient Hik-Connect App mobile control
- Easy and quick set-up

2-Wire Kit



KIS702Y-P

**Door Station: DS-KD8003Y-IME2**

- 2 MP camera, H:146°, V:82°
- One-press to call
- IR illumination, WDR
- IP65
- Modular design

**Indoor Station: DS-KH6320Y-WTE2**

- 7" touch screen, 1024 x 600
- 2-wire digital IP
- 8-ch alarm inputs
- TCP/IP, Wi-Fi
- Convenient Hik-Connect App mobile control
- Supports voice messages

**DS-KAD704Y**

- Supports cascading
- Din rail mounting



KIS703Y-P

**Door Station: DS-KB2412T-IM**

- 2 MP camera, H:140°, V:85°
- One-press to call
- IR illumination
- IP65

**Indoor Station: DS-KH6320Y-WTE2**

- 7" touch screen, 1024 x 600
- 2-wire digital IP
- 8-ch alarm inputs
- TCP/IP, Wi-Fi
- Convenient Hik-Connect App mobile control
- Supports voice messages

4-Wire Kit



4-Wire HD  
DS-KIS212

**Door Station: DS-KB2412T-IM**

- 2 MP camera, H:130°, V:70°
- HD TVI video quality
- One-press to call
- 4-wire plug & play analog interfaces

**Indoor Station: DS-KH2230T**

- 7" colorful TFT screen, 1024 x 600
- One-press to unlock the door
- 4-wire plug & play analog interfaces
- Supports monitoring door station and external analog camera



4-Wire Analog  
DS-KIS203T

**Door Station: DS-KB2421T-IM**

- 2 MP camera
- Self-adaptive IR supplement
- One-press to call
- 4-wire plug & play analog interfaces
- IP65, anti-oxidant aluminum alloy

**Indoor Station: DS-KH2220**

- 7" colorful TFT screen, 1024 x 600
- One-press to unlock the door
- 4-wire plug & play analog interfaces
- Supports monitoring door station and external analog camera



4-Wire Hybrid  
DS-KIS303-P

**Door Station: DS-KB2421T-IM**

- 2 MP camera
- Self-adaptive IR supplement
- One-press to call
- 4-wire plug & play analog interfaces
- IP65, Anti-oxidant aluminium alloy

**Indoor Station: DS-KH6320-WTDE1**

- 7" touch screen, 1024 x 600
- 2-ch alarm inputs and 2-ch alarm outputs
- TCP/IP, Wi-Fi
- Convenient Hik-Connect APP Mobile Control
- Support voice messages
- Elevator access control



## Access Control

### MinMoe Face Recognition Terminals

### MinMoe

### Fingerprint and Card Terminals



#### DS-K1T320 Series

- New MinMoe value series face recognition terminal, more cost-effective
- 2.4-inch non-touch screen, equipped with physical button design
- Capacity: 500 faces, 1000 cards, 1000 fingerprints
- Support web configuration (PC and mobile)
- Support AP mode



#### DS-K1T321 Series

- New MinMoe value series face recognition terminal, more cost-effective
- 2.4-inch non-touch screen, equipped with physical button design
- Capacity: 500 faces, 3,000 cards, 3,000 fingerprints
- Support web configuration (PC and mobile)
- Support AP mode



#### DS-K1T343 Series

- 4.3 inch touch screen
- Capacity: 1,500 faces, 3,000 fingerprints, 3,000 cards



NEW

#### DS-K1T342-E1 Series

- 4.3 inch touch screen
- IP65
- Supports PoE to power the device and lock directly
- 1,500 faces 3,000 fingerprint 3,000 cards



#### DS-K1T805 Series

- IP65 & IK08 high protection levels
- Multiple authentication methods: fingerprint, card, PIN code, Bluetooth, etc.
- Easy to use: connect smart phone to Internet via AP mode directly for configuration/ deployment
- Multiple applications: supports Hik-Connect, Mobile web, PC web, HikCentral Access Control



#### DS-K1T502 Series

- IP65 & IK09 high protection levels, zinc alloy material
- All-in-one: Manage access control, video intercoms, and video security with one device
- Multiple authentication methods: fingerprint, card, PIN code, etc.
- Easy to use: connect smart phone to Internet via AP mode directly for configuration/ deployment
- Multiple applications: supports Hik-Connect, Mobile web, PC web, HikCentral Access Control

### Speed Gates & Turnstiles



#### DS-K3B220(L)X

Stainless Steel 304, outdoor

- Sleek and elegant, suitable for any scene
- Supports integration with any access control system
- Brushless motor provides first-class product performance guarantee
- Entry-level price brings high cost effectiveness



#### DS-K3G200(L)X

Stainless steel 304, anti-tailgating, anti-vandal

- Compact and elegant design
- LX models can be integrated with any access control system
- Streamlined configuration, simple installation and ease of use



#### DS-K3G501(L)X

Stainless steel 304, outdoor, anti-tailgating

- The narrowest body is 200mm, slim and elegant
- Self-developed movement to ensure high performance and high quality
- Can be integrated with any access control system
- SUS316L stainless steel material can be customized

### Metal Detector



- 12 Independent detection zones
- Support for two relay alarm outputs
- Adjustable zone sensitivity
- Support for automatic frequency selection
- Networking with the HikCentral Professional Platform



- 6 Independent detection zones
- Detect metal objects as small as coins
- Adjustable zone sensitivity
- Visual and auditory warnings

## Entrance & Exit Management

### ANPR Camera



#### DS-TCG406-E


- 4MP 1/1.8" progressive scan CMOS
- Embedded IR and white supplements lights
- Supports vehicle type/color/brand recognition
- Supports Wiegand, connectable with access control system

### Barrier Gates



#### DS-TMG300-DR (3 m octagonal)

- Motor: DC brushless motor
- Boom Pole: 3 m octagonal pole, right direction
- Rising Speed & Falling Speed: 3 s
- Mean Cycles Between Failure (MCBF): 2,500,000
- Barrier Housing Material: Cold-rolled sheet



#### DS-TMG300-DR (3.4-6m)

- Motor: DC brushless motor
- Boom Pole: 3.4 m-6 m telescopic pole, right direction
- Rising Speed&Falling Speed: 6 s
- Mean Cycles Between Failure (MCBF): 2,500,000
- Barrier Housing Material: Cold-rolled sheet



#### DS-TMG300-DR/A/B (4m light)

- Motor: DC brushless motor
- Boom Pole: 4 m light pole, right direction
- Rising Speed&Falling Speed: 3 to 6 s
- Mean Cycles Between Failure (MCBF): 2,500,000
- Barrier Housing Material: Cold-rolled sheet
- Body Indicators



#### DS-TMG301-DR (2+2m)

- Motor: DC brushless motor
- Barrier Boom: 2 m+2 m folding pole, right direction
- Rising Speed&Falling Speed: 3 to 6 s
- Mean Cycles Between Failure (MCBF): 2,500,000
- Barrier Housing Material: Cold-rolled sheet

NEW

# Intrusion Alarm

## Wireless Intrusion Alarm



**HOT**



### AX PRO Control Panel DS-PWA96-M-WE/WB

- TCP/IP, Wi-Fi, and 3/4G network
- Video verification by mobile app
- Voice guide
- Supports 24/7 monitoring with alarm response
- kits available



**HOT**



### Wireless PIR-Camera Detector DS-PDPC12P-EG2-WE(B)/WB(B)

- Detection range: 12m / 85.9°
- Up to 20 pictures for verification
- 800 m transmission distance
- 3D optics design for creep zone detection
- Up to 5 years battery life



### Wireless PIR Detector DS-PDP15P-EG2-WE/WB

- Detection range: 12m / 85.9°
- 1600 / 1200 m transmission distance
- 3D optics design for creep zone detection
- Up to 5 years battery life



**HOT**



### Magnetic Contact DS-PDMC-EG2-WE(B)/WB(B)

- Door opening detection
- 42 mm gap detection
- 1600 / 1200 m transmission distance
- Up to 5 years battery life



### Wireless PIR AM Curtain Detector DS-PDC10AM-EG2-WE/WB

- Supports dual-curtain detection via bracket
- 5 m / 10 m 5° detection range and angle
- 2-3.5 m installation height
- 1600 / 1000 m transmission distance
- Up to 5 years battery life



### Wireless Triple Signal Detector with Cam DS-PDTT15AM-LM-WE/WB

- 2\*PIR + 24 GHz Microwave for reliable detection
- Up to 20 pictures for verification
- 15 m / 90°@180° adjustable
- 1600 / 1000 m transmission distance
- Up to 5 years battery life



### Wireless Smoke Detector DS-PDSMK-E-WE/WB

- >85 dB buzzer
- Inter-link function support
- 1600 / 1000 m transmission distance
- Up to 10 years battery life



**HOT**



### Wireless LCD Keypad DS-PK1-LT-WE/WB

- LCD screen and LED to indicate system status
- 1200 / 800 m transmission distance
- Up to 2 years battery life



### Wireless Keyfob DS-PKF1-WE/WB

- Quick arm / disarm
- 900 / 500 m transmission distance



### Wireless External Sounder DS-PS1-E-WE/WB

- 110 dB
- 1,200 / 900 m transmission distance



### Wall Switch DS-PM1-01H-WE/WB

- Smart design for putting into hiding places
- Automation operating, one button turn on/off from app / Keyfob / Keypad
- Supports setting scenarios by different events

Wired Intrusion Alarm



**HOT**



**AX HYBRID PRO Control Panel DS-PHA64-LP**

- LAN, PSTN, Wi-Fi, GPRS or 3G/4G
- 8 on-board zones and 4 on-board outputs
- Compatible with wireless detectors via receiver, suitable for different scenarios
- Supports 24/7 monitoring with alarm response
- Speed-X technology, speed-x technology for extended communication distance
- kits available



**Wired Internal 18 m PIR detector DS-PDP18-EG2**

- Detection range: 18 m / 85.9°
- Selectable EOL resistors – tamper, fault and burglary alarm
- Wide voltage - 9 to 16 V wide voltage adaptation



**BUS PIRCAM DS-PDPC12P-EG2**

- Detection range: 12 m / 85.9°
- Up to 20 pictures, with 1920 \* 1080p resolution
- 3D optics design for creep zone detection



**Wired Double PIR Detector DS-PDP18-HM**

- High/Low mount adjustment for flexible installation
- Tamper protection
- Adjustable sensitivity
- Digital temperature compensation



**Wired Magnetic Contact DS-PD1-MC-MS**

- Metal shell
- Metal surface installation
- 40 mm detection gap



**Output Expander DS-PM1-04H-H**

- 4 on-board outputs, supporting 100-240 V and up to 16A
- Supports cascade connection up to 5,400 m
- 1 power output for wired detectors



**Input Expander DS-PM1-I802-H**

- 8 on-board wired zones
- 2 on-board outputs
- Supports cascade connection up to 5,400 m
- 1 power output for wired detectors



**HOT**



**Wired LCD Keypad DS-PK1-LRT-HWE/HWB**

- LCD screen display
- Supports fire / panic / medical alarm keys
- Supports company name, phone number, time display, zone alarm details, etc.
- Supports 2 on-board alarm inputs and 1 on-board alarm output



**Wired Sounder DS-PS1-R**

- Up to 105 dB at 30 cm
- Red/ blue model for option

Audio

Network Audio

**NEW**



**DS-QAZ1307G1T-E**

- Max. Acoustic Pressure: 121 dB SPL
- Rated Power: 7W
- Frequency Response: 100Hz to 20kHz
- Support live/scheduled/alarm/emergency broadcast
- Support 2-way audio



**DS-QAZ1110G1-B**

- Max. Acoustic Pressure: 98dB SPL
- Rated Power: 10 W
- Frequency Response: 100 Hz to 20 kHz
- Support live/scheduled/alarm/emergency broadcast
- Support 2-way audio



Main Speaker



**DS-QAZ1206G1-BE**  
Supports up to 1 x 6 W sub speaker

- Max. Acoustic Pressure: 100 dB SPL
- Rated Power: 6 W
- Frequency Response: 300 Hz to 15 kHz
- Support live/scheduled/alarm/emergency broadcast



**DS-QAE1A80G1-VB**

- Support live/schedule broadcast
- Support alarm input/alarm schedule/ audio linkage
- Multiple audio input: MIC/USB/Bluetooth/RCA
- Support 2-zones volume adjustment
- Remote control, 2-zones 80W output
- Built-in eMMC

Analog Audio

**NEW**



**DS-QAE0206G1-V**

- Max. Acoustic Pressure: 98 dB SPL
- Rated Power: 6 W
- Frequency Response: 90 Hz to 20 kHz
- Support speaker spring terminal audio line input



**DS-QAE0420G1-V**

- Max. Acoustic Pressure: 96 dB SPL
- Rated Power: 20 W
- Frequency Response: 100 Hz to 20 kHz
- Support speaker spring terminal audio line input



**DS-QAE0A60G1-VB**

- Rated Power: 60 W
- Frequency Response: USB, Bluetooth: 20 Hz to 20 kHz; MIC, RCA Input: 20 Hz to 8 kHz
- Audio input: USB/Bluetooth/MIC/RCA
- Support two-zone volume adjustment
- Support multiple amplifiers cascaded via RCA cables

## Display

### Monitors



#### DS-D5022FN00

- 21.5 inch, 1080 p
- Input: HDMI/VGA
- View angle: 178°/178°
- VESA bracket



#### DS-D5024FN10

- 23.8 inch, 1080 p
- Input: HDMI/VGA
- View angle: 178°/178°
- VESA bracket



#### DS-D5027FN

- 27 inch, 1080 p
- Input: HDMI/VGA
- View angle: 178°/178°
- VESA bracket



#### DS-D5022FC-C

- 21.5 inch, 1080 p
- Input: HDMI,VGA,BNC,speaker,USB
- View angle: 178°/178°
- VESA bracket
- 7 × 24 h



#### DS-D5024FC-C

- 23.8 inch, 1080 p
- Input: HDMI,VGA,BNC,speaker,USB
- View angle: 178°/178°
- VESA bracket
- 7 × 24 h



#### DS-D5032FC-A

- 31.5 inch, 1080 p
- Input: HDMI, VGA, BNC, speaker, USB
- View angle: 178°/178°
- VESA bracket
- 7 × 24 h

## Accessories

### UPS

NEW



#### DS-UPS600

- Capacity 600VA, 360W
- Wide input voltage range
- Built-in AVR
- Overload and short circuit protection
- Compact design



#### DS-UPS1000

- Capacity 1000VA, 600W
- Wide input voltage range
- Built-in AVR
- Overload and short circuit protection
- Compact design



#### DS-UPS2000

- Capacity 2000VA, 1200W
- LCD display
- Wide input voltage range
- Built-in AVR
- Overload and short circuit protection
- USB port for communication
- Compact design



#### DS-UPS3000

- Capacity 3000VA, 1800W
- LCD display
- Wide input voltage range
- Built-in AVR
- Overload and short circuit protection
- USB port for communication
- Compact design

### Network Cable



#### CATE5E Cable DS-1LN5E-E/E

- UTP CAT 5E, 305 meters
- Core diameter: 0.45 mm
- Solid-Bare Copper (99.95%)
- Sheath color Black



#### CAT6 Cable with CPR Fca DS-1LN6U-SCO (Orange sheath) DS-1LN6U-G (grey sheath)

- UTP CAT6, 305 meters
- Core diameter: 0.55 mm
- Solid-Bare Copper (99.95%)



#### CAT6 Cable with UL CM CPR Eca DS-1LN6-UE-W (black/blue/white) DS-1LN6-UU (black/orange)

- UTP CAT6, 305 meters,
- Core diameter: 0.53 mm, 0.56 mm
- Solid-Bare Copper (99.95%)

# Software



## Hik-Partner Pro

Security Business Assistant. At Your Fingertips.

### Seamless delivery just via mobile app

- Auto device discovery in the LAN
- Automated device setup
- Easy handover to end users

### Remote maintenance improves efficiency

- Remote parameter configuration
- Remote firmware upgrading
- Remote password resetting

### Subscription services for ongoing revenues

- Health monitoring
- Subscription plan management



## Hik-Connect

Unified Security, From Residence to Business

### Team Mode for SMB & enterprise use


- Accessible via web portal / mobile app
- Streamlined multi-site management
- Precise role-based permissions
- Serverless deployment & scalability
- Seamless integration with OpenAPI

### Personal Mode for individual use

- Interact with taps and swipes
- Remote management on the go
- Accurate and timely notifications
- Stay secure with all data encrypted

# SMB Solutions

## Residential Solution

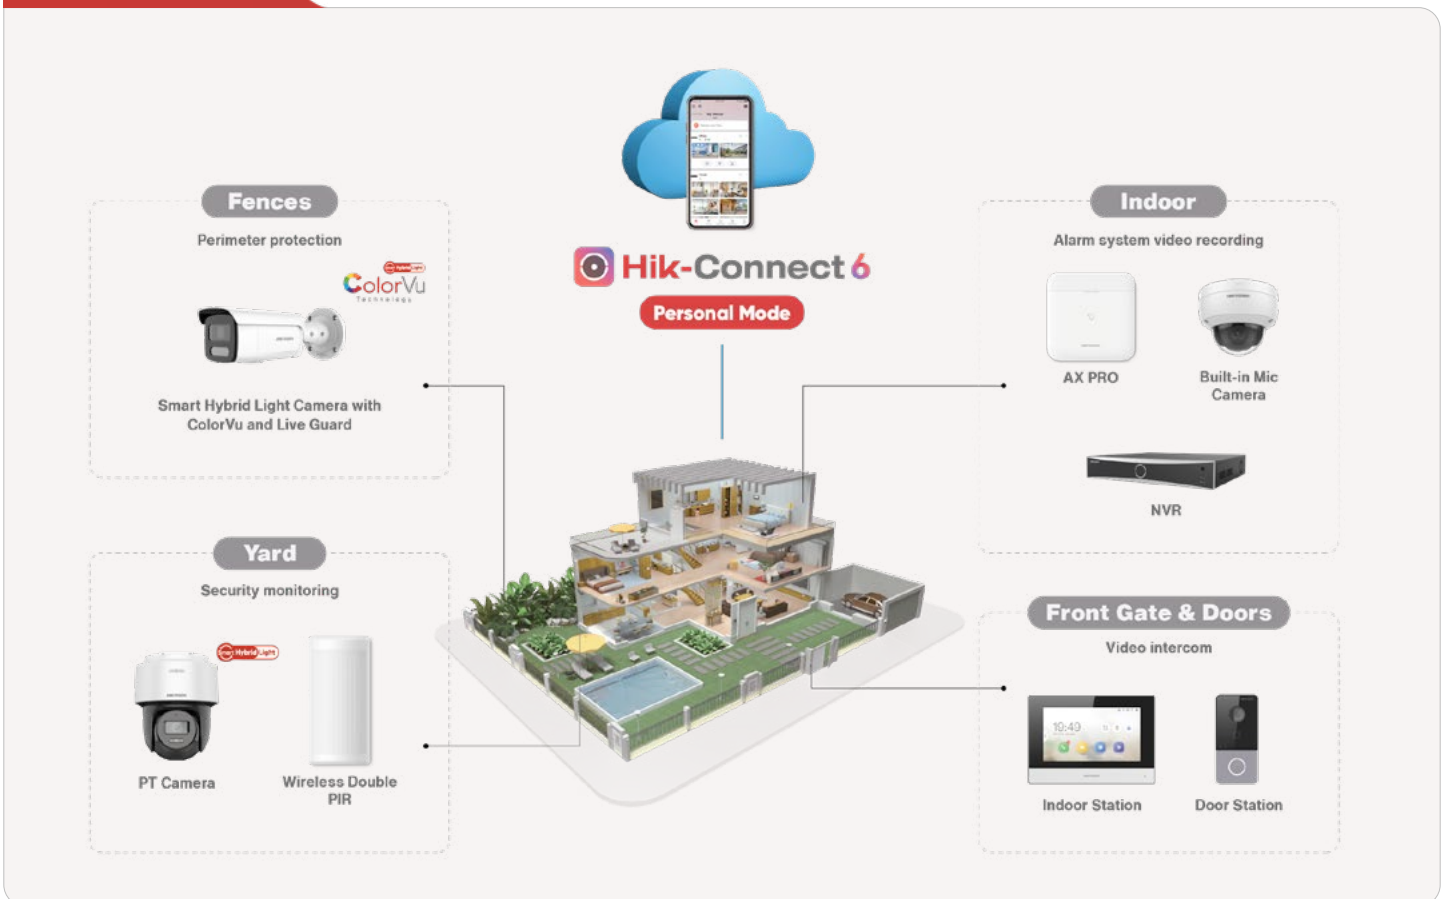

# SMB Solutions

## Multi-Store Solution

**Store Entrance**

**ColorVu Technology**

**Camera with ColorVu**

- 24/7 colorful imaging
- Visual & auditory warnings
- Three supplemental lighting modes

**Store Entrance**

**AX PRO Alarm System**

- Long-range signal transmission
- Wireless emergency button
- Remote configuration via app

**Shopping Area**

**Smart Hybrid Light PT Camera**

- Motion Detection 2.0
- Two-way audio
- Three supplemental lighting modes

**NVR**

**Warehouse**

**MinMoe**

**MinMoe Facial Terminal**

- 7-inch touch screen
- Deep learning face recognition
- Supports face, fingerprint & card recognition

**Hik-Connect 6 Team Mode**

**Smart Managed Switch**

## Office Solution

**Reception**

**AX PRO Alarm System**

- Easy installation via wireless transmission
- Video verification via IPC or PIRCAM

**Office Door**

**MinMoe**

**MinMoe Facial Terminal**

- Fast facial recognition <0.2 s
- Top security with face anti-spoofing

**Lobby**

**ColorVu Technology**

**Camera with ColorVu**

- 24/7 colorful imaging
- Visual & auditory warnings

**NVR**

**Vehicle Entrance**

**MinMoe**

**MinMoe Facial Terminal**

- Flexible control with face, keyfob and QR code
- Two door control with a security unit expand

**Hik-Connect 6 Team Mode**

**Smart Managed Switch**

# Towards a Greener Footprint



## Green Manufacturing

### Cleaner Energy

In 2022 alone, Hikvision purchased **32,852 MWh** of green energy, including solar, wind and hydro power, and generated **4,508.3 MWh** of photovoltaic power ourselves.

### Cleaner Materials

Wherever possible, we use clean materials in the manufacture of products. For example, we use a no-paint process to minimize pollutant emissions when producing our turnstiles.

### Cleaner Packaging

Using folded cardboards instead of polyethylene to cushion the interior of product packaging alone can reduce our plastic use by **27.9 tons** per year.



## Green Operations

### Cloud-based R&D Platform

Providing 4,200 virtual machines on 500 computing service nodes, Hikvision's R&D cloud platform cuts electricity consumption by nearly **5,000 MWh** and carbon emissions by nearly **4,000 tons** per year.

### Smarter Energy Consumption


AI-powered sensors detect the presence of people in our meeting rooms and automatically turn off lights and air conditioning when a room is empty.

### Sustainable Water Use

We control the total amount of stormwater runoff and improve the way stormwater is recycled and reused in our office parks.

### 'Green Office' Initiatives

We implement a paperless office philosophy. Where possible, meetings are held online and printed materials are replaced by their digital equivalents. We also encourage low-carbon business travel.

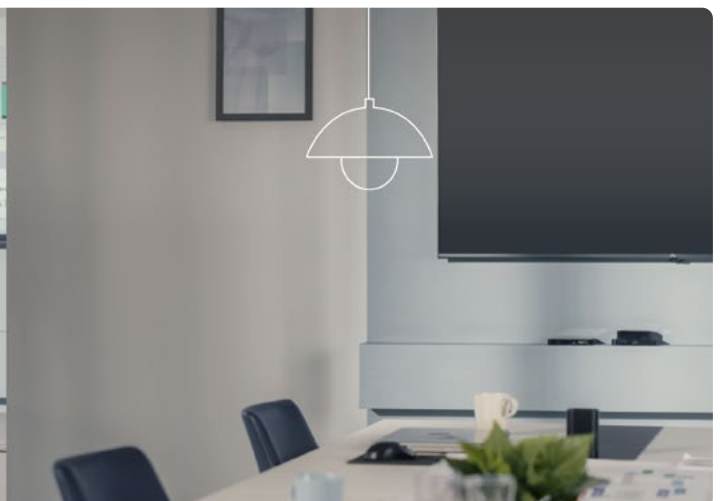

HIKVISION DISTRIBUTION  
BROCHURE FOR  
**HOT-SELLING PRODUCTS**



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



**HIKVISION**<sup>®</sup>