



SHANGHAI LINK Instruments Catalogue

- Optometry Equipments
- Ophthalmic Equipments
- Laboratory Equipments
- Tools and Accessories
- Frame Displays

Shanghai Link Instrument Co., Ltd

Shanghai Link Instruments Co.,Ltd.



Brief Introduction

- Shanghai Link Instruments Co.,Ltd. located in Nanxiang Hi-tech Park Innovation Center, it is one of the biggest specialized manufactures engaged in development, production, sales and service in optical field. We possess a high-tech research team, advanced instruments and a welleducated staff team.
- Our main products include: Combined Table, Auto Refractometer, Lens Meter, Chart Projector, Ophthalmic Microscope, AB Scanand other processing equipments including Lens Edger etc. The company has passed ISO9001, some of the products have passed CE. Now most of products have been sold to Europe, America, Southeast Asia and Africa, etc.
- We focus on devoting innovative achievement in optical field and establishing excellent brand. We provide with not only superior products with fashionable design, but also high-quality service. We start from the details, will be your trustworthy cooperators!

CONTENTS

Part A Optometry Equipments

Chair and Stand Unit	2
Auto Refractometer/Keratometer	8
Manual Refractometer	19
Auto Lensmeter	21
Hand Lens Meter	29
Phoropter	32
Auto Phoropter	35
Auto Chart Projector	38
LCD Chart Projector	39
Near Vision Tester/Eyesight Improver	43
PD Meter/PD Ruler	44
Electric Table	46
Phoropter Arm	52
Pneumatic Chair	53
Trial Lens Set	53
Children Frame	55
Trial Frame	55
Near Visual Acuity Chart	56
Visual Acuity Chart	56
Trial Clip	58
Cross Cylinder	58
Multi-Pinhole Occluder	58
Board Lens	58
Flipper	58
Hand Occluder	58
Red and Green Lens	59
Prism Bar	59
Maddox Test	59
Loose Prisms	60
Loose Prisms with handle	60

Part B Ophthalmic Equipments

Slit Lamp	61
Accessories	72
Accessories For Slit Lamp And	
Microscope	73
Eyepiece Adaptor	74
Adaptors	76
Portable Slit Lamp	77
Keratometer	80
Aspherical Lens	80
Portable Keratometer	81
Tonometer	81
Applanation Tonometer	82
Rebound Tonometer	83
Vision Screener	84
Rechargeable Ophthalmoscope	85
Indirect Ophthalmoscope	85
Ophthalmostatometer	85
Ophthalmoscope(AC)	86
Binocular Indirect Ophthalmoscope	
Rechargeable	87
Indirect Ophthalmoscope	88
Rechargeable Retinoscope	88
Rechargeable Retinoscope	
and Rechargeable Ophthalmoscope	88
Ophthalmoscope + Rechargeable	
Streak Retinoscope	88
Ophthalmoscope&Otoscope	90
Ophthalmoscope	
and Retinoscope Wall Mount System	91
Ophthalmoscope	

and Otoscope Wall Mount System	92
Binocular Loupes	93
Operation Microscope	94
Retinal Camera	101
Fundus Camera	105
Hand-held Fundus Camera	106
Perimeter	109
A Scan & Pachymeter	111
AB Scan	113
Portable UBM	118
Phaco Emulsifier	119
YAG Laser	120
Confocal Retina Ophthalmoscope	121
Non Contact Tonometer	122
Optical Coherence Tomography	124
Operation Table	127

Part C Laboratory Equipments

AAuto Lens Edger	128
Pattern Maker	132
Groovering Machine	132
Layout Blocker	133
Three-hole Driller	134
Drilling Machine	134
Saw Machine	136
Auto Polisher	136
Hand Edger	136
Ultrasonic Cleaner	138
Frame Heater	141

UV Tester	143
Color-Alterable Lens Tester	143
UV&Photochromic Lens Tester	143
Tinting Machine	144
Torch Pen	144
Radian Apparatus	144
Thickness Apparatus	144


Part D Tools andAccessories

Pliers and Tools Set	145
Job Trays	159
Wheels and Suckers	160
Adhesive Tape	165
Nose Pads and Screws	166
Lens Cleaner	181

Part E Frame Displays

Frame Display	183
---------------	-----

Chair and Stand Unit



▶ CT-200

● Features :

- Smart design, special table structure, save space
- Conveniently to use, one of the ideal unit for foreign users

● Specification :

Unit size: 1100x1000x2110mm

Table Size: 840x405mm

Table movable range: 400mm

Table rotation range: 90°

Chair up and down range: 180mm

Chair rotation range: 60°

Chair loading ability: 150kg

Swing arm oscillation angle: 30°

Electric Voltage: AC220V/110V 50/60HZ

Weight: 95kg



CE

▶ CT-350

● Features:

- Electric power, chair 90° reclining.
- The arm can right up and down, rotate 90°.
- Small tabletop can move left and right.
- Tabletop can rotate 90°, can up and down.

● Specification:

Unit Size: 1030x1080x1920mm

Table Size: 1030x480x120mm

Drawersize Size: 550x340x60mm

Arm Movable Rang: 300mm

Tabletop Retation Range: 90°

Chair Lifting Height: 160mm

Power of Lamp: 20w

Power: 120w

Input Voltage: AC110V/220(60/50Hz)

Weight: 220kg



CT-360

Features:

1. Table material ABS hard plastic, can slide left and right, rotate 90 degrees outwards;
2. Place two instruments;
3. The seat has functions of rotation, aerodynamic reclining, movement, and electric lifting
4. Mechanical swing arm feels good and accurate positioning;
5. The appearance of the cabinet is atmospheric and stable;
6. Rechargeable ophthalmoscope ophthalmoscope socket;
7. It can increase the matching use of the slit lamp, and charge according to the actual situation;
8. Seat color can be customized and charge according to actual situation;

Specification:

Maximum size: 1200×1055×1850mm
Table size: 890×405mm
Table rotation angle: 90°
Table moving distance: 335mm
Swing arm angle: 60°
Seat rotation angle: 45°
Seat height: 150mm (550–700mm)
Seat load: 250kg
Seat moving distance: 150mm
Seat armrest load: 100kg
Seat reclining angle: 120–140°
Spotlight light source: LED (24V 5W white light)
Voltage: AC220V / 110V 50 / 60HZ
Gross weight: 200kg
Packing size: 1200×1100×1050mm
Packing volume: 1.38 cubic




Option1 the interface for slit lamp



Option2 Don't need the interface.





CT-450S

Features:

1. Table material ABS hard plastic, can slide left and right, rotate 90 degrees outwards;
2. The table is a wireless switch, which can rotate freely and steplessly;
3. Put three instruments;
4. The seat has functions of rotation, aerodynamic reclining, movement, and electric lifting;
5. Mechanical swing arm feels good and accurate positioning;
6. The appearance of the cabinet is atmospheric and stable;
7. Rechargeable ophthalmoscope ophthalmoscope socket;
8. Seat color can be customized and charge according to actual situation;

Specification:

Maximum size: 1200×1055×1850mm

Table size: 400×490mm

Table rotation angle: 360°

Swing arm angle: +35°

Swing arm rotation range: 60°

Seat rotation angle: 45°

Seat height: 150mm (550–700mm)

Seat load: 250kg

Seat moving distance: 150mm

Seat armrest load: 100kg

Seat reclining angle: 120–140°

Spotlight light source: LED (24V 5W white light)

Voltage: AC220V / 110V 50 / 60HZ

Gross weight: 210kg

Packing size: 1200×1100×1050mm

Packing volume: 1.38 cubic



CT-500

Features:

1. Table material ABS hard plastic, can slide left and right, rotate 90 degrees outwards;
2. Place two instruments;
3. The seat has functions of rotation, aerodynamic reclining, movement, and electric lifting;
4. Mechanical swing arm feels good and accurate positioning;
5. The cabinet is small in size and stable in construction;
6. Rechargeable ophthalmoscope ophthalmoscope socket;
7. It can increase the matching use of the slit lamp, and charge according to the actual situation;
8. Seat color can be customized and charge according to actual situation;

Specification:

Maximum size: 1100x800x2100mm
Table size: 890x405mm
Table moving angle: 90°
Table moving distance: 335mm
Swing arm angle: +35°
Swing arm rotation range: 60°
Seat rotation angle: 45°
Seat height: 150mm (550–700mm)
Seat load: 250kg
Seat moving distance: 150mm
Seat armrest load: 100kg
Seat reclining angle: 120–140°
Light source: LED (5V1A 3.6W)
Voltage: AC220V / 110V 50 / 60HZ
Gross weight: 180kg
Packing size: 1200x1100x1050mm
Packing volume: 1.38 cubic




Option1 the interface for slit lamp



Option2 Don't need the interface.



Chair and Stand Unit



CT-600

Features:

1. The table material is made of high-density coated film, which can be lifted electrically.
2. Can be rotated manually (can be positioned arbitrarily);
3. Mechanical swing arm feels good and accurate positioning;
4. Rechargeable ophthalmoscope ophthalmoscope socket;
5. The cabinet is small and compact, and the site is stable;
6. Optional EC-A seat for use;

Specification:

Maximum size: 1400×800×2100mm

Table size: 400×500mm

Swing arm angle: +35°

Swing arm rotation range: 60 °

Table lifting range: 180mm (870–1050mm)

Light source: LED (5V1A 3.6W)

Voltage: AC220V / 110V 50 / 60HZ

Gross weight: 110kg

Packing size: 1200×1100×1050mm (including seat)

Packing volume: 1.38 cubic meters (including seats)
Specific to actual shipment



CT-800

Features:

- Adopt Europe style in appearance designing and rotation type table for optometry
- Supply for full auto digital systematical view tester and eyesight lamp house
- The design reflects the high standard of personalized optometry space
- It can perfectly carry out processes of optometry

Specification:

Unit Size: 2000×1200×1670mm

Table size: 400×300mm

Chair up and down range: 200mm

Chair loading ability: 200kg

Adjustable backrest range: 180°

Electric Voltage: AC220V/110V 50/60HZ

Weight: 160kg



Alternative color of chairs:



CT-1000

Features:


- ◆ An automatic and full functional Chair & Stand Unit, automatic functions are realized in different parts: automatic table moving, automatic tableboard up and down, automatic column up and down, automatic phoropter arm.
 - ◆ European smart design style in appearance, which looks simple and fashionable.
 - ◆ Different instruments can be equipped on it: Auto Refractometer/Auto Phoropter/Slit Lamp/Auto Lensmeter/Trial Lens Set.
 - ◆ Equipped with drawer for trial lens set, enough storge space is provided with.
 - ◆ Wireless operation ways are provided with, such as Operation Panel/Mobile Control/Tablet Control.
 - ◆ Leather chair with linear motor makes a quiet operation.
 - ◆ An ideal Combi Unit for eye clinic, hospitals, optcail shops etc.
1. The table material is made of high-density film-coated board, which can be rotated by 90 degrees, which can place two instruments
 2. The table can be moved left and right by electric and up and down by electric, and the operation is stable;
 3. The column swing arm can move left and right electrically and up and down electrically, and runs smoothly;
 4. Seat can be moved forward and backward, and electric reclining and electric lifting;
 5. According to different customer groups, three different reset modes can be set;
 6. Equipment color can be customized and charge according to actual situation.

Specification:

Maximum size:	1200×1300×1800mm
Table size:	950×450mm
Small table size:	620×400mm
Drawer size:	520×350mm
Control mode:	film button / phone remote control / flat panel remote control
Configuration equipment:	computer refractometer / electric cattle eye / slit lamp / focus meter
Table rotation angle:	90°
Countertop left and right movement distance:	400mm
Countertop up and down distance:	120mm
Column (cattle eye arm) left and right moving distance:	400mm
Column (cattle eye arm) up and down distance:	120mm
Chair left and right movement distance:	150mm
Chair up and down distance:	150mm
Chair back angle:	120-140 °
Chair armrest load:	100kg
Chair loading ability:	300kg
Chair height:	1400mm
Lamp:	LED (220 / 110V 9W)
Voltage:	AC220V / 110V 50 / 60HZ
Gross weight:	220kg
Packing size:	1600×1050×1020mm
Packing volume:	1.7 cubic



Auto Refractometer/Keratometer



▶ AR-950

● Features :

- AR-950 Auto refractometer
- Adopt ARM process and latest image proc-ess technique, which make the measurement be more quickly.
- Proven optical system and auto fog chart, which makes the measurement be more accuracy.
- As small as 2.0mm pupil diameter can be measured.
- 5.7"LCD color display.
- Pupil distance auto measured available.
- New compact design enchances patient interaction.
- Support Date connection with external machines, such as computerized vision tester and auto projector.

Measurement Range:	Sphere:-20D~+20D(VD=12mm)0.125D/0.25D steps Cylinder -8D~+8D 0.125D/0.25D steps Axis angle 1°~180° steps
Pupillary Distance:	45~85mm 1mm steps
Vertex Distance:	0/12/13.75/15mm
Minimum Pupil Diameter:	2.0mm
Chart:	Auto Fog Chart
Date Saving:	10 Measuredvalues for both eyes
Display:	5.7"LCD(color)
Specification:	Print: Built-in Thermal Printer Power Supply: AC 220V, 50Hz or 110V, 60Hz
Dimensions/Weight:	288(W) *500 (D)*480(H) 14kg
Output:	RS-232
Power Save:	5/10 min(Selectable)



▶ AR-1000A/ARK-1000A

● Features :

- New color LCD screen
- New display and operation menu
- Faster and more accurate measurement
- More broad measurement range of Min. Pupil size to suit the people all over the world
- Shell color: grey

● Specification :

Measuring Range:	Sphere:-20~+20D(VD=12) 0.12D/0.25D step Cylinder:-8 ~+8D 0.12D 0.12D/0.25D step Axis:0 ~180 ° step: 1 °
Pupil Distance:	45 ~88mm, step: 1mm
Vertex Distance:	0mm, 12mm, 13.75mm
Min.Pupil Size:	Ø2.0mm
Chart:	Auto fog
Display:	5.7 " Color LCD
Print:	Thermal Printer
Electric Voltage:	100~240V, 50/60HZ
Dimensions:	484(L)×282(W)×440(H)mm
Weight:	~20KGS



ARK-980


Features:

- ◆ New light path design
- ◆ Perfect imaging effect
- ◆ Smooth image analysis
- ◆ Proven processing technology
- ◆ Accurate measurement results
- ◆ Electric lifting forehead
- ◆ Automatic paper cutting thermal printer
- ◆ Powerful and easy to operate
- ◆ Leading technology in the world
- ◆ Main technical data
- ◆ Hartman imaging analysis and process technology, accurate measurement result
- ◆ New optical design, clear human eye image effect
- ◆ High speed image acquisition system, advanced image deal and analysis
- ◆ Auto Focus and auto measurement
- ◆ The Screen can be Free rotation up, down, left and right
- ◆ Automatic up and down function for the chin rest
- ◆ High speed printer, can cut printing paper automatically

Specification:

Vertex distance:	0.0,12.0,13.75, 15.0
Sphere:	-20.00~+20.00D (0.01/0.06/0.12/0.25D step)(VD=12mm)
Axis:	1°~180°(1° step)
Cylinder form:	-、 +、 ±
Pupil distance:	10-86mm
Min. pupil diameter measurable:	∅ 2.0mm
Measuring light Energy:	<30uw(Insure measuring safety)
Radius of curvature:	5.0-10.0mm(0.01mm unit)
Corneal Power:	33.00D-67.00D (In case that the corneal equivalent refractive power is 1.3375)
Corneal Astigmatism:	0.00-15.00d(0.06D/0.12D/0.25D Unit)
Data Storing:	Each 10 measured values of left eyes and right eyes
Axis:	1-180 degree
chart auto chart	
Monitor:	SHARP10.4" TFT LCD touch screen(Angle of view adjustable)
Built-in printer:	57mm thermal printer, auto paper-cutting
Electrical:	AC 100-250V,50/60HZ
N.W:	22 kgs
G.W:	26.5 kgs
Packing size:	(L) 600mm x (W) 400mm x (H) 600mm





▶ ARK-1500

● Features :

- Bigger, better monitor and icon-display menu for easier operation and settings
- With high quality of hexagon prism and highly sensitive CCD, it provides unmatched accuracy and reliability
- Just move, it will automatically focus the eye and get the value
- Operator can easily adjust the chinrest with switch located on the operator side and enables speedy reading
- Tilting screen function that allows wide variance of access whether the operator is sitting or standing

● Specification :

Range of measurement	
Sphere	-20~+20D(VD=12) 0.125D step
Cylinder	-8~+8D 0.125D step
Axis	0°~180° (1°step)
PD	045-88mm, 1mm step
VD	0mm, 12mm, 13.75mm
Min Pupil Size	ø2.0mm
Keratometry	
Radius of curvature	5.0~10mm(increment:0.01mm)
Comeal power	33.75~67.50D(when corneal equivalent refractive index is 1.337) (increment selectable from 0.12, 0.25D)
Comeal astigmatism	0.0~0.8D(increment selectable from 0.12, 0.25D)
Axis	1~180° (increment 1°)
Comeal diameter	2.0~14.0mm (increment 0.1mm)
Memory of data	10 measurement value for each right and left eye
Others	
Chart	Follow-up colorful fogging chart system
Display	7" TFT LCD
Print	Thermal print
Power supply	220V±10% 50Hz 60VA
Dimension	514mm*284mm*465mm
Weight	~15.5KG



▶ AR-1800/ARK-1800


● Features :

- 7" TFT LCD monitor, Bigger, better monitor and icon-display menu for easier operation and setting.
- Refractive measurement with Hexagon prism, With high quality of hexagon prism and highly sensitive CCD, it provides unmatched accuracy and reliability.
- Auto focus function, Just move, it will automatically focus the eye and get the value.
- Motorized chinrest, Operator can easily adjust the chinrest with switch located on the operator side and enables speedy reading.
- Tilting Screen, Tilting Screen function that allows wide variance of access whether the operator is sitting or standing.

● Specification :

Refractometer	
Vertex distance	0mm, 12mm, 13.75mm
Spherical	-20m-1—+20m-1(VD=12mm)0.12/0.25m-1 Step
Cylinder form	-8m-1—+8m-1(VD=12mm)0.12/0.25m-1 Step
Axis	0—180° 1° Step
Cylinder form	—、+、±
Pupil distance	45-88mm,1mm Step
Min. pupil size	2.0mm
Keratometry	
Radius of curvature	5.0~10mm(increment:0.01mm)
Corneal diopter	33.75m-1—67.5m-1(when comerequivalent refractive index is 1.337)
Corneal astigmatism	0.0-8.0m-1(increment selectableform 0.12,0.25m-1)
Axis	1~180° (ncrement 1°)
Corneal diameter	2.0~14.0mm (increment 0.1mm)
Others	
Chart	Auto fog
Memory of data	10 measure valure for each right and left eye
Display	7" LCD
Print	Thermal printer
Power supply	90V—264V~ 50 Hz/60Hz
Dimension	492mmx280mmx476mm
Weight	15.5Kg





▶ ARK-2000

● Features :

- Three kinds of measurement model is optional. With corneal curvature and dioptre measurement function
- Most each record 10 times, automatic display representative value
- Intuitive interface, convenient adjustment, the VD value, the precision and print mode, etc
- Automatic mist target, effectively reduce the measurement error caused by adjusting
- One key lock function, Convenient and practical
- Fast thermal printer

Measurement mode	K/R mode	Refractive and Keratometer measurement.
	REF mode	Refractive measurement
	KEF mode	Corneal curvature measurement
Refractive measurement	Vertex Distance	0.0, 12.0, 13.75, 15.0 mm
	Sphere	-20.00~+20.00D (0.12/0.25D step)(VD=12mm)
	Cylinder	0.00~±10.00D (0.12/0.25D step)
	Axis	1°~180°(1° step)
	Pupil Distance	30~85 mm
	Min. pupil diameter measurable	∅ 2.0mm
	Target	Automatic fogging target
Corneal curvature measurement	Radius of curvature	5~10mm(0.01mmstep)
	Corneal Refraction	33.00~67.00D(0.12/0.25Dstep)
	Corneal Astigmatism	0.00~-15.00D(0.12/0.25Dstep)
	Angle of corneal	1°~180°(1°step)
	Corneal diameter	2.0~12.00mm
Hardware Specification	Monitor	5.7 inch Color LCD
	Printer	Fast thermal printer
	Power saving function	OFF, 5, 15 mins (selectable)
	Power supply	AC110~220 V,50/60HZ
	Dimensions/weight	288(W)×500(D)×480(H)mm/14kg



CE

▶ ARK-3000


● Features:

- New generation Auto Ref/Keratometer-completer Automatic functions;
- Automatic focus function, which makes measurement be more convenient;
- Automatic or manual measurement models are alternative;
- Automatic up and down function for the chin rest, operator can easily adjust height of chin rest.
- Screen ' angle could be adjusted according to operator's request;
- Printer can cut printing paper automatically

● Specification:

Measuring Range:	Sphere: -20.00~+20.00D (In case of VD=12mm) Cylinder: 0.00~±10.00D (0.12/0.25D step) Axis: 0 ~180 ° step: 1 °
Pupil Distance:	10 ~80mm, step: 1mm
Vertex Distance:	0mm, 12mm, 13.75mm
Min.Pupil Size:	Ø2.0mm
Chart:	Auto fog
Display:	5.7" TFT LCD
Print:	Thermal Printer
Electric Voltage:	100~240V, 50/60HZ
Dimensions:	484(L)×282(W)×440(H)mm
Weight:	~17KGS





ARK-4000

Features:

- ◆ Humanized detail design
- ◆ Comfortable operation and smooth measurement
- ◆ Adjustable LCD screen for convenient measurement
- ◆ Hartmann's Principle
- ◆ New light path design, clear human eye imaging effect
- ◆ High-speed image acquisition system, advanced image processing and analysis
- ◆ The screen can be rotated freely up and down
- ◆ Automatic eye tracking for lifting, automatic measurement
- ◆ Electric lifting amount tow
- ◆ Off-speed printer, automatic paper cutting

Specification:

Corneal apex distance:	0.0, 12.0, 13.75, 15.0
Spherical mirror degree:	-20.00D ~ + 20.00D (VD = 12mm, 0.01, 0.06, 0.12, 0.25 units)
Cylindrical power:	0.00D ~ + 10.00D (0.06, 0.12, 0.25 units)
Axis position:	1 ° ~ 180 ° (1 ° unit)
Astigmatism symbol:	-, +, ±
Interpupillary distance:	10 ~ 86mm
Minimum pupil diameter:	2.0mm
Measurement completion time:	<0.5 seconds.
Pupil diameter:	2.00-8.00mm
Measure light energy:	<30uw (ensure measurement safety)
Cornea curvature radius:	5.0 ~ 10.0mm (0.01mm accuracy)
Cornea diopter:	33.00D ~ 67.0D (when the corneal equivalent diopter is 1.3375)
Corneal astigmatism:	0.00D-15.00D (0.06D / 0.12D / 0.25D units)
Stored data:	10 measurements each
Axis position:	1 ° ~ 180 °
Visual target:	Guided cloud map
Display:	8-inch TFT touch screen (adjustable viewing angle)
Printer:	57mm thermal printer, automatic paper cutting
Power supply:	AC 100 ~ 250V, 50 / 60Hz, wide power supply
Net weight:	22 kg
Gross weight:	26.5 kg
Packing size:	(L) 680mm x (W) 400mm x (H) 640mm



▶ ARK-7000


● Features:

- New optical system, unique imaging impression
- Hartman imaging analyzing and processing technology, accurate measurement result
- TFT touch screen, can move front and back freely
- Motorized chinrest
- Manual focusing, auto measuring

● Specification:

Vertex Distance(VD)	0.0, 12.0, 13.75, 15.0
SPH	-30.00D~+25D(VD=12mm, 0.01, 0.06, 0.12, 0.25 unit)
CYL	0.00~+10.00D(0.06, 0.12, 0.25 unit)
Axix(Ax)	1°-180° (1° unit)
Cylinder Form	-, +, -+
Puiple Distance(PD)	10~86MM
Minimum Pupil Diameter	2.00mm
Measuring Time	< 0.5s
Pupil Diameter	2.00-8.00mm
Measuring light Energy	<30uw(Insure measuring safety)
Radius of Curvature	5.0~10.0mm(0.01mm unit)
Corneal Power	33.00D~67.00D(In case that the corneal equivalent refractive power is 1.3375)
Corneal Astigmatism	0.00~-15.00d(0.06D/0.12D/0.25D Unit)
Data Storing	Each 10 measured values of left eyes and right eyes
Axis	1°~180°
Chart	Auto fog
Monitor	7" TFT LCD touch screen(Angle of view adjustable)
Built-in printer	57mm thermal printer
Electrical Power	AC 100~250V,50/60HZ
N.W	16kgs
G.W	19.5kgs
Dimensions(packing)	(L)650mm X (W)400mm X (H)620mm





▶ ARK-7800

● Features :

- New optical system, unique imaging impression
- Hartman imaging analyzing and processing technology, accurate measurement result
- TFT touch screen, can move front and back freely
- Motorized chin rest
- Auto paper-cutting printer
- Auto tracking and focusing during measuring

● Specification :

Vertex Distance(VD)	0.0, 12.0, 13.75, 15.0
SPH	-30.00D-+-25D(VD=12mm), 0.01, 0.06, 0.12, 0.25 unit
CYL	0.00-+-10.00D(0.06, 0.12, 0.25 unit)
Axix(AX)	1-180 degree(1 unit)
Cylinder form	-, +, -+
Puiple distance(PD)	10-86MM
Minimum time	< 0.5s
Pupil Diameter	2.00-8.00
Measuring light Energy	<30uw(Insure measuring safety)
Radius of curvature	5.0-10.0mm(0.01mm unit)
Corneal Power	33.00D-67.00D(In case that the corneal equivalent refractive power is 1.3375)
Corneal Astigmatism	0.00-15.00d(0.06D/0.12D/0.25D Unit)
Data Storing	Each 10 measured values of left eyes and right eyes
Axis	1-180 degree
chart	auto chart
Monitor	SHARP7" TFT LCD touch screen(Angle of view adjustable)
Built-in printer	57mm thermal printer, auto paper-cutting
Electrical	AC 100-250V,50/60HZ
N.W	22kgs
G.W	26.5kgs



▶ ARK-8000/ARK-8000B


● Features:

- Wide 7 inch Touch-screen panel .Auto Ref-keratometer SINGLE LTL is equipped with a wide 7 inch color LTL LCD with touch-screen panel to use all the functions with ease.
- The corrct position of patient's eye is available to be found automatically by internal-software without operation of joystick.Further,SINHLE LTL is also available to align and measure automatically with touching of screen only.
- The LCD screen enables operator to measure in comfortable position even when the patient's eyelid needs to be opened by operator.
- SINGLE LTL provides the patients with the comfortable measuring environment by adopting Chin-rest and Head-rest with soft material of silicon rubber
- External thermal-printer equipped with auto loading&cutting can be connected with also connected with other devices such as auto vision-tester,PC,auto lensmeterand so on
- It allow to connectwith other devices such as auto vision-tester,auto lensmeter,PC as well as EMR/EHR protocol system

● Specification:

Refractometer Measurement	Sphere	- 2.5 ~ + 2.5 D (V D 1.2 M M) (0.01/0.12/0.25 Steps)
	Cylinder	0~±10D(0.01/0.12/0.25 Steps)
	Axis	1-180°(1° Steps)
	Required minimum pupil	2.0mm
Keratometer Measurement	Radius curvature	5.00 ~ 10.00 mm (0.01 mm Steps)
	Refractive power	67.50-33.75D (n=1.3375) (0.01/0.12/0.25 Steps)
	Astigmatism	0~±10D(0.01/0.12/0.25 Steps)
	Astigmatism axis	1-180°(1° Steps)
	Peripheral measurement	6.0mm(r=7.8)
Size Measurement	0~12.7mm	
Special Function	PK(Peripheral Keratometry)ILLUM(Retro-illumination) SIZE(Cornea/Pupil size)	
Target chart	Auto fog system with scenery chart/Auto fog system with dots chart(Optional)	
Display	Tiltable wide 7 inch TFT LCD	
	Luminance 400cd/m ²	
	Resolution 800*480 Pixels	
Print	8000: External printer with auto loading&cutting 8000B: with built-in printer	
Interface	RS-232C(RX/TX),D-sub(Video out),RFID(Optional)	
Dimension	458(W)*210(D)*405(H)	
Weight	Approx.19KG	
Power Supply	AC 100.240V 50/60Hz	
Power Consumption	55~85 VA	





ARK-8500

Features:

- ◆ Hartman Type Refractor
- ◆ High Definition Clear Retina Image with New Optics
- ◆ Adapted High Speed Image Acquisition and Image Identification
- ◆ Flip Monitor
- ◆ Auto Horizontal, Vertical and Back Force Motorized Focus
- ◆ High Speed and Auto Cut Printer

Specification:

VD Range:	0.0, 12.0, 13.75, 15.0
Spherical Range:	-20.00D ~ + 20.00D (VD = 12mm, 0.01, 0.06, 0.12, 0.25 Increments)
Cylinder Range:	0.00D ~ + 10.00D (0.06, 0.12, 0.25 Increments)
Axis:	1° ~ 180° (1° Increments)
Cylinder Symbol:	-, +, ±
PD:	10 ~ 86mm
Mini Pupil Size:	2.0mm
Average Measurement Time:	<0.5 seconds.
Pupil Distance:	2.00-8.00mm
Max Brighness:	<30uw (safety Assure)
Curvature Radius:	5.0 ~ 10.0mm (0.01mm Increments)
Refractive Power:	33.00D ~ 67.0D (when the corneal equivalent diopter is 1.3375)
Corneal Power:	0.00D ~ -15.00D (0.06D / 0.12D / 0.25D Increments)
Date Save:	10 Group Left/Right Eye
Axis:	1° ~ 180°
Target:	Auto Fog
Monitor:	9-inch TFT Touch Screen (Flip)
Printer:	57mm Width, Auto Cut
Power:	AC 100 ~ 250V, 50 / 60Hz, Wide Voltage
Net Weight:	22 kgs
Gross Weight:	26.5 kgs
Packing:	(L) 680mm x (W) 400mm x (H) 640mm




▶ HAR-100/HAR-100A

● Features :

Non-contact and non-invasive	The light power is safe for eyes;The working distance of the instrument is 35cm(14inches)
Low cooperation need	It do not need too much cooperation of children.It is suitable for infants and disabled individuals.
Automatic operation by one key	Complete the automatic detection of two eyes just need one key operation.A speedy and intelligent design.
Easy to carry	Small and lightweight body and printer.Easy to carry.It is suitable for any outdoor screening.
Accurate result	The advanced optical detection principle provides an accurate result:including myopia,hyperopia,astigmatism,axial and anisometropia.
Comprehensive detection modes	Infant mode is specially designed for the babies'refraction characteristic;Myopia mode is specially designed for common myopia people and high myopia people;(HAR-880 only) Adult mode is suitable for all adults.
Dual mode distance hint	Through ultrasonic measurement of distance,it adopts sound and visual color light prompt the distance.
High performance battery	Short charging time and can use for a long time.
Large storage capacity	420 data storage.
Ultrasonic distance measurement	Automatic monitoring the detection distance through audible and visual hint.
Aiming	The cross-shape is luminous and easy for aiming.
Printer	Thermal printer by infrared connection.
Weight	0.9KG

	HAR-100	HAR-100A
WORKING DISTANCE	Adult/enfant mode: 335 ± 10mm	Adult/enfant mode: 335 ± 10mm, myopia mode:268 ± 10mm
DISTANCE DETECTION	Automatic, with audible and visual cues	Automatic, with audible and visual cues
DATA ACQUISITION TIME	2s/eye	2s/eye
RELIABILITY MEASURE	Indicates number of and variation among measurements for the given eye	Indicates number of and variation among measurements for the given eye
BATTERY VOLTAGE	d.c.11.1V	d.c.11.1V
BATTERY VOLTAGE	More than 6 hours of continuous usage	More than 6 hours of continuous usage
LOW-BATTERY WARNING:	Indicates 15 minutes usage remains	Indicates 15 minutes usage remains
WAVELENGTH	850 ± 20nm	850 ± 20nm
OUTPUT OF THE LASER RADIATION	150~200μW	150~200μW
DETECTION MODES	Adult Mode, enfant mode	Adult Mode, enfant mode,myopia mode
SPHERE RANGE	+8.0 to -6.0 Diopters	+8.0 to -9.0 Diopters
SPHERE TOLERANCE	± 0.5 Diopters	± 0.5 Diopters
CYLINDER RANGE	+3 Diopters	+3 Diopters
CYLINDER TOLERANCE	± 0.5 Diopters	± 0.5 Diopters
AXIS OF ASTIGMATISM RANGE	1° ~ 180°	1° ~ 180°
AXIS OF ASTIGMATISM TOLERANCE	0.25D~1.00D : ± 10° 1.25D~3.00D : ± 5°	0.25D~1.00D : ± 10° 1.25D~3.00D : ± 5°





▶ MRT-180

● Features :

- Streamline design and attractive appearance
- Metal material and gorgeous color. A variety of colors to be chosen
- Easy operation: suitable for children, adolescents and adults
- Easy to carry, suitable for all kinds of occasions
- Self-check, do not need others' help
- Professional website service, interaction, sharing, and vision data permanent preservation

● Specification :

Suitable for	Children, adolescents and adults
Color	China Red(R), Sapphire(B), Harvest Yellow(G), Pink Dream (P), Roland Purple(V), Titanium crystal Gray(S)
Spherical range	-12D to +6D
Spherical degree wide interval	0.5D
Spherical degree of tolerance	±0.25D
Lighting	LED backlight, and the light is uniformity, constant, not reflective and not dazzling
Switch mode	LED lamp touch switch, instrument will shut down automatically after three minutes' shelving
Power	Three 7# batteries(AAA)
Service	Professional service website, Users can input personal vision information, Forecasts user's vision direction according to historical data, Provide vision care knowledge and glasses reference information, etc.
Net weight	299g
Packing size	200mm(L)X100mm(W)X65mm(H)



▶ AL-950


● Features :

- Green LED light source, ABBE compensation no required
- Hartman testing method, CPU high-speed precise computing
- Automatic identifying the lens type, Automatic measurement, Automatic reading and memorying the data
- 5.7 inch high resolving power LED screen
- Broad contents, strong performances, simple and convenient operation
- Latest international designing concept of collecting technology, mode and individuality

● Specification :

1.Measuring range	Sphere: 0 to $\pm 35D$ (0.01D/0.06D/0.12D/0.25D steps)
	Cylinder: 0 to $\pm 10D$ (0.01D/0.06D/0.12D/0.25D steps)
	Axis: 0° to 180° (1° step)
	ADD: 0 to 10D (0.01D/0.06D/0.12D/0.25D steps)
	Prism: 0 to 15 Δ (0.01 Δ)
2.Cylinder mode:	+, +/-, -
3.Prism mode:	X-Y: cartesian coordinates H:I,O; V:U,D.
	P-B: polar coordinates
	mm: mm expression
4.Reading resolving power:	0.01D,0.06D,0.12D,0.25D
5.PD measure	
6.Measure single vision lens,bifocal lens,trifocal lens and progressive lens,etc	
7.Contact lens measure	
8.UV transmissivity	
9.Measurable transmissivity:	> 10%; >20% at $\pm 10D$ and over
10.Contact lens:	0 to $\pm 25D$, BC 6.00 to 9.00
11.Display:	5.7 TFT LCD
12.Menu:	readable diagram, easy operation
13.Lens diameter:	20mm~100mm
14.Power source:	AC100($\pm 10\%$)~240($\pm 10\%$)V, 50/60HZ, 40VA
15.Power consumption:	40W
16.Weight:	4kg
17.Dimensions:	190x210x420mm (WxDxH)
18.Environmental condition:	
Temperature:	5°C~40°C (in usage)
	-20°C~60°C (in storage/transference)
Humidity:	30~85% (non-condensing) (in usage)
	10~95% (in storage/transference)
Atmospheric pressure:	700~1060hpa
Altitud:	up to 2000m
Others:	no harmful dust or smoke
19.Optional accessories :	printer(built-in thermosensitive paper size:57mm)





▶ AL-360/AL-360A

● Features :

- Compact and light
- Tilting TFT color LCD touch screen (AL-360: 5.6 inch, AL-360A: 7 inch) clear view, easy and convenient operation.
- Built-in thermal printer, and also can be connected to computer, and display the data on computer.
- Built-in UV tester
- PD measuring
- Automatic recognition of single and progressive lens
- Memory Function

● Specification :

Measure scope	
Sphere	0~±25D 0.01/0.12/0.25D steps
Cylinder	0~±9.99D 0.01/0.12/0.25D steps
Axis	0°~180° (1°step)
ADD	0~+9.99D 0.01/0.12/0.25D steps
prism degree	0~15 Δ 0.01/0.12/0.25 Δ steps
mode	
cylinder	+,+/-,-
prism	X-Y,P-B
Contact lens	Soft/hard
Measuring mode	Single/progressive/ automatic recognition contact lens
Others	
Diameter of lens	Ø 20~108mm
PD:	45~90mm, 0.25mm steps
Speed	0.1S
ABBE	30~60
Display	TFT LCD (5.6") ,LFT LCD (7")
Printer	Thermal print
Dimensions	222(D)×161(W)×372(H)mm
Package	515(H)×320(W)×360(D)mm
Weight	~5KG
Power supply	100~120V/200~220V 50/60HZ



AL-360



AL-360A

▶ AL-600

● Features:

- touch screen
- Can measure UV
- High precision
- 0.01 degrees
- Fast response
- Green light source

● Specification:

Measuring Range:

SPH: 0~±25D(0.01D,0.06D,0.12D,0.25D)

CYL: 0~±10D(0.01D,0.06D,0.12D,0.25D)

AXIS: 0~180°(1°)

PRISM: 0~10Δ(0.01Δ)

ADD: 0~+10D(0.01D,0.06D,0.12D,0.25D)

UV: 395nm(1%,5%)

Lens Diameter: Φ10mm~Φ90mm

Measuring MODE:

CYLINDER: (MIX)/+/-

PRISM: 100-120V~/200-240V~ 50/60HZ

Weight: 7Kg



▶ AL-850

● Features:

- The only lensmeter equipment at present that can measure accurately the low-degree lens below ± 0.12 in the country.
- This lensmeter equipment that can measure accurately the colored lens with a degree of transparency of 10%.
- This lensmeter equipment that can accurately and quickly measure the progressive lens.
- The only lensmeter equipment that can display the pupil diameter.
- This equipment can measure the pupil distance, and is equipped with UV meter and built-in thermo sensitive printer.
- It is characterized with fast measuring speed, clear interface, convenient operation, accuracy and good repeatability etc.
- It has PD, UV and Print functions

● Specification:

Measuring Range:

Sphere: -25~+25D (0.01D, 0.12D, 0.25D steps)

Cylinder: -10 ~+10D (0.01D, 0.12D, 0.25D steps)

Prism: 0~10Δ(0.01Δ, 0.12Δ, 0.25Δ steps)

Add: 0~10D (0.01D, 0.12D, 0.25D steps)

Axis: 0 ~180 ° step: 1 °

Pupil Distance: 80mm(Optional)


Display: 5.7" CSTN color LCD

Print: Built-in thermosensitive printer,
paper size 38mm(Optional)

Electric Voltage: 100-120V~/200-240V~ 50/60HZ

Weight: 7Kg





AL-800

Features:

- ◆ HD touch LCD display
- ◆ High-end process precision assembly
- ◆ Modern and simple appearance
- ◆ Fast and automatic recognition of progressive multifocal lenses
- ◆ Green LED light source does not need ABBE coefficient compensation
- ◆ Optimized and upgraded Hartmann multi-point measurement technology

Specification:

Measuring range

Ball mirror: 0 to $\pm 35D$ (reading accuracy 0.01D/0.06D/0.12D/0.25D)

Measuring range		Accuracy
$<0D. \geq -5D$	$>0D. \leq +5D$	± 0.06
$<-5D. \geq -10D$	$>+5D. \leq +10D$	± 0.09
$<-10D. \geq -15D$	$>+10D. \leq +15D$	± 0.12
$<-15D. \geq -20D$	$>+15D. \leq +20D$	± 0.18
$<-20D. \geq -35D$	$>+20D. \leq +35D$	± 0.25

Cylinder: 0 to $\pm 10D$ (reading accuracy 0.01D/0.06D/0.12D/0.25D)

Cylindrical axis position: 0° to 180° (reading accuracy 1°)

ADD: 0 to $10D$ (reading accuracy 0.01D/0.06D/0.12D/0.25D)

Prism: 0 to 10Δ (0.01 Δ)

Measuring range	Accuracy
$>0\Delta. \leq 5D$	0.1 Δ
$>5\Delta. \leq 15D$	0.2 Δ

Cylinder mode: +, + / -, -

Prism representation mode: X-Y: Cartesian coordinates H: I, O. V: U, D

P-B: Polar coordinates mm: X and Y are both expressed in mm

Reading resolution: 0.01D/0.06D/0.12D/0.25

Interpupillary distance measurement function

Can measure lens with high refractive index, polarization, high dispersion, solar film, multi-focus, scratch, etc. single light, double light, triple light, progressive multifocal light, etc.

UV / blue light transmittance measurement function

Contact lens measurement function

Measurable lens: $>10\%$; the transmittance of lens when the power exceeds $10D$ is required $>20\%$

Contact lenses: 0 to $\pm 25D$, BC 6.00 to 9.00

Display: 7.0-inch HD touch LCD monitor

Menu: user-friendly design, easy to operate

Applicable lens diameter: 20mm - 100mm

Power supply: AC100($\pm 10\%$)-240($\pm 10\%$)V 50/60Hz 40VA

Maximum power: 40W

Weight: 6.8kgs

Instrument specifications: 550mm (L) \times 350mm (W) \times 350mm (H)

Environmental conditions

- a. Temperature:** 5-40C (use temperature)
-20-60 °C (storage / transport temperature)
- b. Humidity:** 30-85% (non-condensing) (use humidity)
10- 95% (storage / transport humidity)
- c. Atmospheric pressure:** 700-1060hpa
- d. Altitude:** up to 2000m
- e. Other:** no harmful dust and smoke

Optional accessories: printer (built-in thermal printer, paper width: 57mm)



▶ AL-900


● Features :

- Accurately measuring the low-degree lens below $\pm 0.12D$.
- Measuring the colored lens with 10% transmittance.
- Displaying the PH value in screen.
- Measuring the progressive lens accurately and quickly.
- Optionally installing PD measuring instrument, UV measuring instrument and thermal printer.
- User friendly interface with easy operation; fast measurement, high accuracy and good repetition.

● Specification :

SPHERE	-25.00D- +25.00D
CONTACT LENS	-25.00D- +25.00D(BC=6.00-9.00)
	(0.01D/0.12D/0.25DSTEPS)
CYLINDER	0.00D- $\pm 10.00D$ (-,MIX,+)
	(0.01D/0.12D/0.25DSTEPS)
AXIS	0°-180°(1°STEPS)
ADD	0.00D- $\pm 10.00D$ (Add and Ad2)
	(0.01D/0.12D/0.25DSTEPS)
PRISM	0.00 Δ -10.00 Δ (horizontal ,vertical)
	(0.01D/0.12D/0.25DSTEPS)
PRISM MODE	Δ , θ ,Base in/Out,Base Up/Down
PD MEASURING	20.0-49.5MM
LENS DIAMETER	$\Phi 20MM$ - $\Phi 100MM$
CONTACT LENS DIAMETER	$\Phi 5MM$
UV	> 10% ($\pm 15.00D$ - $\pm 25.00D$, > 20%)
ABBE	20-60
DISPLAY	5.7 inch LCD
PRINTER	Thermo sensitive printer
DATO INTERFACE	RS-232
POWER	AC 100 ($\pm 10\%$)-240 ($\pm 10\%$) V 50/60HZ 40VA
DIMENSIONS	190(W) \times 205(D) \times 418(D)MM
WEIGHT	4.5KG





▶ AL-980

● Features :

- 7.0-inch HD touch color display
- Streamlined, faddish, abundant and atmospheric design
- Green LED light source, ABBE compensation no required
- Food-grade ABS material case, zero failure rate quality standard
- Rapidly and automatically determine and measure the progressive lens in high precision
- Upgraded Hartmann intelligent measurement technology, faster, more accurate and more stable

● Specification :

Sphere:		0 to ± 35D (0.01D/0.06D/0.12D/0.25D steps)
Measuring range		Accuracy
<OD, ≥-5D	>OD, ≤+5D	±0.06
< -5D, ≥-10D	>+5D, ≤+10D	±0.09
<-10D, ≥-15D	>+10D, ≤+15D	±0.12
<-15D, ≥-20D	>+15D, ≤+20D	±0.18
<-20D, ≥-35D	>+20D, ≤+35D	±0.25
Cylinder:		0 to ± 10D (0.01D/0.06D/0.12D/0.25D steps)
Axis:		0° to 180° (1° steps)
ADD:		0 to 10D (0.01D/0.06D/0.12D/0.25D steps)
Prism:		0 to 15△(0.01△)
Measuring range		Accuracy
>0△, ≤5△		0.1△
>5△, ≤15△		0.2△
Cylinder mode:		+, +/-, -
Prism mode:	X-Y:	Cartesian Coordinates H: I, O, V: U, D
	P-B:	Polar Coordinates
	mm:	mm expression
Reading resolving power:		0.01D/0.06D/0.12D/0.25D
PD measure		
Measure single vision lens, bifocal lens, trifocal lens and progressive lens, etc.		
Contact lens measure		
UV transmissivity test		
Measurable transmissivity:		>10%; >20% at ± 10D and over
Contactlenses:		0 to + 25D, BC 6.00 to 9:00
Display:		7.0-inch HD touch color display
Menu:		readable diagram, easy operation
Lens diameter:		20mm-100mm
Power source:		AC100 (±10%) -240 (±10%) V 50/60Hz 40VA
Power consumption:		40W
Weight:		6.8kgs
Dimensions:		565mm*350mm*355mm (W*D*H)
Environmental condition		
a. Temperature:		5-400C(In usage) -20-600C(In storage/transference)
b. Humidity:		30-85% (Klon-condensing) (In usage) 10-95% (In storage/transference)
c. Atmospheric pressure:		700-1060hpa
d. Altitud:		up to 2000m
e. Others:		No harmful dust or smoke
Optional accessories:		printer (built-in thermosensitive paper size: 57mm)



▶AL-1000

● Features:

- With PD Meter +Pupil Height+ +Improved Printer + UV + Bluetooth+ Blue light
- New capacitive touch panel with high resolution
- Measurement of PD, PH and PCL (Progressive Channel Length)
- The wavelength of UV and green light can be measured simultaneously
- Bluetooth, RS232 serial port, USB, WIFI, 4 forms of data communication

● Configuration:

Range of measurement

Sphere: 0~±25m, 0.01/0.12/0.25m steps

Cylinder: 0~±9.99m, 0.01/0.12/0.25m steps

Axis: 0-180° (1°step)

Addition: 0~±9.99m, 0.01/0.12/0.25m steps

Prism: 0~15cm/m, 0.01/0.12/0.25m steps

Cylinder: +, +/-, -

Prism: X-Y, P-B

Contact lens: Soft/hard lens

Measurement mode: Single/progressive/automatic recognition

Diameter of lens: Φ12-Φ112mm

PD: 40-90mm (0.5mm step)

Measuring speed: 0.1 second

Abbe number: 30~60

Display: 7"LCD/TFT

Printer: Thermal printer


Dimension: 180mm*255mm*455mm

Package: 12kg

Weight: 12kg

100-240V 50-60HZ 25VA






AL-1200

Features:

- ◆ 7.0-inch high-definition touch color LCD display.
- ◆ Upgraded Hartmann intelligent measurement technology, faster, more accurate and stable.
- ◆ Streamlined, stylish, absolute and atmospheric design.
- ◆ Food grade ABS material shell, zero failure rate quality standard.
- ◆ Green LED source without ABBE coefficient compensation.
- ◆ Automatically identify and measure various lenses, high refractive index, polarized light, etc.
- ◆ Determine and measure progressive lenses quickly, automatically, and with high precision.
- ◆ Distance and height measurement: The display shows an electronic rangefinder for quick and easy measurements.

Specification:

Sphere:	0~±25m, 0.01/0.06/0.12/0.25m steps
Cylinder:	0~±10m, 0.01/0.06/0.12/0.25m steps
Axis:	0~180° (1°step)
Addition:	0~±10m, 0.01/0.06/0.12/0.25m steps
Prism:	0~0.01cm/m steps
Cylinder:	+, +/-,-
Prism:	X-Y, P-B
Contact lens:	Soft/hard lens

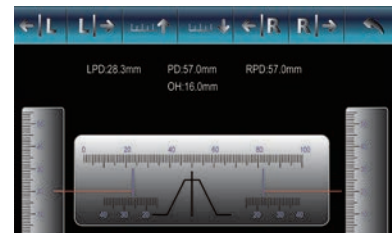

▶ HLM-120

● Features :

- Outer reading, $\pm 25D$ measurement
- Wide field of vision observation
- Compensation Prism Available
- AC/DC

● Specification :

Ranges of Measurement:	0 to $\pm 25D$
Minimum:	Outer Reading 0.125D
Inner Reading:	0.125D graduation up 0 to $\pm 5D$ And 0.25D graduations over $\pm 5D$ to $\pm 25D$
Digital:	0.01D
Cylinder Axis Range:	0~180°
Prismatic Power Range:	0~5 Δ prism diopters 1 Δ graduations with prism compensation device 0~20 Δ Prism diopters, 1 Δ graduations
Prismatic Base Angle:	0~180°
Eyepiece Adjustment:	$\pm 5D$
Dimension of Objective Lens:	$\Phi 16\sim\Phi 86mm$
Overall Size:	275x120x430mm
Weight:	4kg
Lighting Bulb:	~220V/-3V 3W or ~110V/-3V 3W



CE

▶ HLM-150

● Features :

- Internal reading
- $\pm 25D$ measurement
- Wide field of vision observation
- Compensation Prism Available
- AC/DC


● Specification :

Ranges of Measurement:	0 to $\pm 25D$
Minimum:	Internal Reading 0.125D
Inner Reading:	0.125D graduation up 0 to $\pm 5D$ And 0.25D graduations over $\pm 5D$ to $\pm 25D$
Digital:	0.01D
Cylinder Axis Range:	0~180°
Prismatic Power Range:	0~5 Δ prism diopters 1 Δ graduations with prism compensation device 0~20 Δ Prism diopters, 1 Δ graduations
Prismatic Base Angle:	0~180°
Eyepiece Adjustment:	$\pm 5D$
Dimension of Objective	$\Phi 16\sim\Phi 86mm$
Lens:	
Overall Size:	275x120x430mm
Weight:	4KG
Lighting Bulb:	~220V/-3V 3W or ~110V/-3V 3W



CE

Hand Lens Meter



▶ HLM-200

● Features :

- Outer reading
- $\pm 25D$ measurement
- Wide field of vision observation
- Compensation Prism Available

● Specification :

Ranges of Measurement:	0 to $\pm 25D$
Minimum:	Outer Reading 0.125D
Inner Reading:	0.125D graduation up 0 to $\pm 5D$ And 0.25D graduations over $\pm 5D$ to $\pm 25D$
Digital:	0.01D
Cylinder Axis Range:	0~180°
Prismatic Power Range:	0~5 Δ prism diopters 1 Δ graduations with prism compensation device 0~20 Δ Prism diopters, 1 Δ graduations
Prismatic Base Angle:	0~180°
Eyepiece Adjustment:	$\pm 5D$
Dimension of Objective Lens:	$\Phi 16 \sim \Phi 86mm$
Overall Size:	275x120x430mm
Weight:	4KG
Lighting Bulb:	~220V/-3V 3W or ~110V/-3V 3W



CE

▶ HLM-220

● Features :

- Internal reading
- $\pm 25D$ measurement
- Wide field of vision observation
- Compensation Prism Available

● Specification :

Ranges of Measurement:	0 to $\pm 25D$
Minimum:	Outer Reading 0.125D
Inner Reading:	0.125D graduation up 0 to $\pm 5D$ And 0.25D graduations over $\pm 5D$ to $\pm 25D$
Digital:	0.01D
Cylinder Axis Range:	0~180°
Prismatic Power Range:	0~5 Δ prism diopters 1 Δ graduations with prism compensation device 0~20 Δ Prism diopters, 1 Δ graduations
Prismatic Base Angle:	0~180°
Eyepiece Adjustment:	$\pm 5D$
Dimension of Objective Lens:	$\Phi 16 \sim \Phi 86mm$
Overall Size:	275x120x430mm
Weight:	4KG
Lighting Bulb:	~220V/-3V 3W or ~110V/-3V 3W



CE

▶ HLM-250

● Features :

- Internal Reading
- ± 25 diopter measurement
- Large arrange of observation
- LED green light, low-power
- Use medical power adapter, more secure
- Support the use of external battery

● Specification :

Range of measurement:	$-25m^{-1} \sim +25m^{-1}$
Minimum scale value :	$-5m^{-1} \sim +5m^{-1}$: $0.125m^{-1}$; $-5m^{-1} \sim -25m^{-1}$; $5m^{-1} \sim +25m^{-1}$: $0.25m^{-1}$
Astigmatism axis of cylindric lens:	$0 \sim 180^\circ$ Minimum scale value 1°
Prism diopter:	Standard model: $0 \sim 5cm/m$ Minimum scale value $1cm/m$ Strengthened model (with prism compensator): $0 \sim 20cm/m$ Minimum scale value $1cm/m$
Prism basal angle:	$0 \sim 180^\circ$ Minimum scale value 1°
Regulation of ocular visibility:	$-5m^{-1} \sim +5m^{-1}$
Size of lens:	$\varnothing 16mm \sim \varnothing 80mm$
Overall dimensions of device:	$280mm (L) \times 150mm (W) \times 450mm (H)$
Weight:	Standard model: $4.9kg$ / Strengthened Model: $5kg$
Lighting lamp:	$6V / 2A 12W$



▶ HLM-300


● Features :

- External Reading
- ± 25 diopter measurement
- Large arrange of observation
- LED green light, low-power
- Use medical power adapter, more secure
- Support the use of external battery

● Specification :

Range of measurement:	$-25m^{-1} \sim +25m^{-1}$
Minimum scale value :	$-5m^{-1} \sim +5m^{-1}$: $0.125m^{-1}$; $-5m^{-1} \sim -25m^{-1}$; $5m^{-1} \sim +25m^{-1}$: $0.25m^{-1}$
Astigmatism axis of cylindric	$0 \sim 180^\circ$ Minimum scale value 1°
lens:	
Prism diopter:	Standard model: $0 \sim 5cm/m$ Minimum scale value $1cm/m$ Strengthened model (with prism compensator): $0 \sim 20cm/m$ Minimum scale value $1cm/m$
Prism basal angle:	$0 \sim 180^\circ$ Minimum scale value 1°
Regulation of ocular visibility:	$-5m^{-1} \sim +5m^{-1}$
Size of lens:	$\varnothing 16mm \sim \varnothing 80mm$
Overall dimensions of device:	$280mm (L) \times 150mm (W) \times 450mm (H)$
Weight:	Standard model: $4.9kg$ / Strengthened Model: $5kg$
Lighting lamp:	$6V / 2A 12W$





▶ VT-10 (Phoropter)

● Features :

- Adopting ergonomic operation with large scale and improving performance.
- Automatically interlock between cross -cylinder lens and lens coordinates

● Specification :

Sphere range: -19.00D~+16.75 (Step: 0.25D)

Cylinder range: 0.00D ~ -6.00D (Step: 0.25D)

(0.00D to 8.00D with additional lens of-2.00D)

Cylinder axis: 0 to 180°, 5°steps

Cross Cylinder: ±25 diopters


Cross-cylinder lens: ±0.25D

Rotary prisms: 0Δ to 20Δ, 1Δ steps

P.D.adjustment: 48-75mm, 1mm steps

Dimensions: 345×295×85(mm)

Net weight: 4.5Kg



CE

▶ VT-20

● Features :

- Elegant design for the appearance and easy and flexible optical lens dials.
- Precise optical lens with top-grade coating
- Top-grade quality View Tester in Far East.Capable of checking up all-sided visual functions, accurate and comfortable in measurement.Uses rotating disc to locate the sphere
- Can make sphere power adjust in 3.00d big scope
- Cleverly designed to operate the cross cylinder. Supplementary fittings are supplied for nearsightClear scale, convenient and durable operating .This is suitable for eyesight examination in spectacles shops, department of ophthalmology in hospitals, schools and enterprises
- Two colors choice

● Specification :

Sphere powers range: +16.75D to-19.00D, with minimum reading 0.25D or 0.12D When +0.12D auxiliary lens or optional±0.12D lens is in use +26.75D to -29.00D (When optional ±10.00D lens is in use)

Cylinder power range: 0 to-6.00D, with minimum reading 0.25D or 0.12D (when auxiliary lens is in use) 0 to-8.00D (when-2.00D auxiliary lens is in use)

Astigmatic axis scale: 0 to 180° in 5° stepsCross cylinder:±0.25D, reversal type (synchronized with astigmatic axis)

Rotary prism: 0 to 20Δ in 1Δ stepInterpupillary adjustment: 48mm to 80mm in 1mm step (right and left synchronized)Forehead rest adjustment: 16mm backward and forward

Convergence: The optical axes of the lenses are aligned at a distance of 400mm from the vertexes of the corneas (2mm each for right and left inward) Interpupillary distance enabling convergence=57mm to 80mm

Corneal distance device: 2mm forward and 5mm backward from standard plane; with scale

Effective field of view: 19mm

Weight: 5kgs

Size: 291—323×315×85



CE

▶ VT-25

● Features:

- Unique butterfly appearance designs
- Comprehensive review visual function, measurement is accurate, convenient
- Manufacturing technology exquisite, comfortable feel
- Optical lens adopt advanced coating

● Specification:

Sphere power:	-19.00m ⁻¹ ~+16.75m ⁻¹ (step: 0.25m ⁻¹)
Cylinder power:	0~-6.00m ⁻¹
Prism axis:	0~180° (step: 5°, can be estimated to read 1°)
Rotary prism:	0~20Δ (step: 1Δ)
Prism substrate:	0~360° (step:5°, can be estimated to read 1°)
Cross Cylinder:	±0.25m ⁻¹
PD adjustment:	50mm~75mm (step: 1mm)
Forehead rest adjustment:	16mm
Vertex corneal distance:	13.75mm
Product size:	320mm*305mm*100mm
Carton size:	485mm*485mm*245mm
Product weight:	net weight: 4.75kg/ gross weight: 6.55kg



CE


▶ VT-15

● Features:


- Adopting ergonomic operation with large scale and improving performance.
- Automatically interlock between cross -cylinder lens and lens coordinates

● Specification:

Sphere range:	-19.00D~+16.75 (Step: 0.25D)
Cylinder range:	0.00D ~ -6.00D (Step: 0.25D) (0.00D to 8.00D with additional lens of -2.00D)
Cylinder axis:	0 to 180°, 5°steps
Cross Cylinder:	±25 diopters
Cross-cylinder lens:	±0.25D
Rotary prisms:	0Δ to 20Δ, 1Δ steps
P.D.adjustment:	48-75mm, 1mm steps
Dimensions:	345×295×85(mm)
Net weight:	4.5Kg

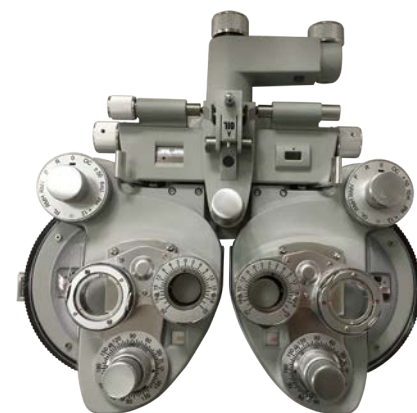

CE FDA



▶ VT-30

● Features :

- Unique design of butterfly-shape appearance.
- Capable of checking up all-sided visual functions, accurate and comfortable in measurement.
- Exquisite manufacturing technique, with comfortable feel.
- High grade plated-film used in all optic lenses.

● Specification :

Sphere power:	Range:-19.00D~+16.75D Step: 0.25D; When applied with auxiliary lens +0.12D Step:0.12D
Cylinder power:	Range:0~-6.00D;When applied with auxiliary cylinder lens: 0~-8.00D Step:0.25D;
	When applied with auxiliary cylinder lens +0.12D Step:0.12D
Cylinder axis:	Range:0~180°;Step:5°
Cross cylinder:	Cross cylinder lens synchronized with cylinder axis
Rotary prism:	Range:0~20△;Step:1△
PD adjustment:	50~75mm;Step:1mm
Convergence adjustment	∞,380mm(When PD 64mm)
Forehead rest adjustment:	16mm
Vertex corned distance:	13.75mm(From corneal point to standard lens surface)
Dimension:	335(L)*320(W)*98(H)mm
Weight:	5kg



CE FDA

▶ VT-300

● Features :

- 7.0-inch color LCD touch screen
- Stylish and compact design
- Auto detachment printer
- Independent PD adjustment
- Built-in LED for near vision illumination
- Data transmission with auto refractometer and auto projector



● Specification :

Sphere:	-19.00~+16.75D(0.25D/0.50D/1.00D/3.00D steps)
Cylinder:	-6.00D~+6.00D 0.25D steps
Axis angle:	0~180°(1°/5°steps)
Pupil distance:	Distant range 52~80mm Close range 48~76mm
	0.5/1mm steps
Rotary Prism:	0~20△(0.1△/0.5△/1△ steps)
Cross Cylinder	±0.25D
Lens:	
Retinoscope:	+1.50D(67cm),+2.00D(50cm)
Auxiliary Lens:	PH, Binoculus RMV/RMH RL(Right eye),GL(Left eye) Polaroid(Right eye 135°/45°),(Left eye 45°/135°) Prism(Right 3△BU, 6△BU),(Left 3△BD, 10△BI) Cross Cylinder Lens(±0.50D Axis=90°) PD Lens
Phoropter size:	365mm×280mm×110mm 3.8kg
Keyboard size:	230mm×195mm×190mm 1.2kg
Power Box:	236mm×126mm×115mm 2.1kg
Power supply:	AC220V 50Hz or AC110V 60Hz,90W

▶ VT-350


● Features :

- Compact and slim design, with smaller size, lens switch fast and smoothly, provide more comfortable optometry experience.
- Left and right PD independent adjustment, to achieve more accurate measurement.
- Dismountable face shield and forehead rest, easy to clean and maintain, provide clean testing environment.
- Near-point card with various charts. Built-in white LED lighting offers clear and safe illumination environment.
- Automatic convergence and PD adjustment during near point test.
- Use multi-coated lenses for better performance



● Specification :

Sphere	-19.00~+16.75D (0.25D/0.50D/1.00D/3.00D steps)
Cylinder	-6.00D~+6.00D 0.25D steps
Axis angle	0~180° (1°/5°steps)
Pupil distance	Distant range 52~80mm Close range 48~76mm 0.5/1mm steps
Rotary Prism	0~20△ (0.1△/0.5△/1△ steps)
Cross Cylinder Lens	±0.25D
Retinoscope	+1.50D (67cm),+2.00D(50cm)
Auxiliary Lens	PH, Binoculus (∅=1.0mm) RMV/RMH RL (Right eye),GL (Left eye) Polaroid (Right eye 135°/45°) (Left eye 45°/135°) Prism (Right 3△BU, 6△BU) (Left 3△BD, 10△BI) Cross Cylinder Lens(±0.50D Axis=90°) PD Lens
CV head size	381mm×286mm×111mm 3.8kg
Table size	243mm×171mm×7mm 0.5kg
Power supply	AC220V 50Hz or AC110V 60Hz,90W



DVT-1000

Features:

- ◆ Fast lens loading helps to minimize accommodation interference and fatigue of examinees eyes. Silent operation offers more comfort during exam.
- ◆ Wireless Communication with Auto Refractometer, LED Chart Projector and Unit Table via Bluetooth allows perfect data transmission regardless of working environment.
- ◆ Dual cross cylinder lens as well as Jackson cross cylinder lens supports highly accurate exams over astigmatism axis and visual acuity. Improved speed of lens movement prevents accommodation interfering exam and guarantees accurate astigmatic exam.
- ◆ Compatibility with polarized LCD chart provides even economic efficiency. (Both linear and circular polarization).
- ◆ Slimmer design even prevents minimum mechanical interference during exam and enables easy monitoring over patients. Easily input optometry date. Optometrist can input the data of patient directly to save time.
- ◆ Diversification of near vision exam is realized through highly reliable near vision test charts, visual function test and various refraction charts.
- ◆ Graphical representation displayed on screen guides test process easier, faster and professional in real time.
- ◆ Exam can be carried out with tablet panel, for examiners' preferences easily. (Tablet PC OS : Android 5.0 / Resolution 2860x1600).
- ◆ Bluetooth printer on operation panel supports easy use of printer and even replacing paper at one go.

Specification:

I. Basic technical parameters

Spherical lens: -29.00 ~ + 26.75D
(Step: 0.12D / 0.25D / 0.5D / 1D / 2D / 3D)

Cylindrical lens: 0.00 ~ -5D
(Step: 0.25D / 0.5D / 1D / 2D / 3D)

Cylinder Axis: 0 ~ 180 ° (Step: 1/5/15/30/45 °)

Working distance: 35 ~ 70 cm (Step: 5 cm)

Rotary Prism: 0 ~ 20 Δ (Step: 1 Δ / 2 Δ)

Crossed Cylinder: Jackson Crossed Cylinder 0.25D
Jackson Crossed Cylinder 0.50D

Double cross cylinder (separating prism)

Retinoscopy Lens: + 1.5D, + 2.0D (test distance 67cm, 50cm)

II. Auxiliary lenses

1. Pinhole lens Φ 1mm
2. Markov lever Right eye (horizontal Markov lever), left eye (vertical Markov lever)
3. Red-green filter right eye (red), left eye (green)
4. Polarizing filter right eye (135 °, 45 °), left eye (45 °, 135 °)
5. Separation prism right eye (6 Δ BU), left eye (10 Δ BI)
6. Fixed Cross Cylinder Jackson Cross Cylinder 0.50D, Axis fixation 90 °
7. Vision 32 °

III. Data link with optometry series and focal length meter series;

IV. Light body and ultra-low sound;

Maximum size: 600x400x200mm

Host size: 360x85x360mm

Flat size: 247x179x4.68mm

Tablet resolution: 2860x1600

Flat screen: 10.1 inches

Voltage: AC 100-240V 50 / 60Hz

Power: 90W

Weight: 7.5kg

Packaging volume: 0.05 cubic

Packing size: 520x450x220mm

Packaging material: aluminum alloy box



▶ AV-3

● Features :

- Contour design is elegant
- Colorful screen with sphere fast rotating disk
- The unique Cross Cylinder design, convenient and flexible
- Can be easily used to measure near visual acuity
- It can connect with Refractometer ARK-7000

● Specification :

Control System:	Touch Panel Control
Dimension And Weight:	Main body:377(L)×306(W)×127(H)mm Keyboard:250(W)230(D)210(H)mm Carton:Main body:430(L)370(W)205(H)mm Keyboard:310(W)310(D)280(H)mm
Main body N.W.:	5.3KG,G.W.:7.2KG
Keyboard N.W.:	2KG,G.W.:3.0KG
Power Source:	DC12V



▶ ACP-200

● Features :


- New design makes it look more modern
- Inspecting 30 charts and 35 masks
- Provide with five kinds of chart of binocular balance, single vertical line, single horizontal line and single chart modes
- Provide with different charts (Chart A, B and C) in order to satisfy needs of different countries
- Filter function can be realized red / green display
- High-definition projection screen

● Specification :

Projection distance:	1.5m-6m
Charts:	30 kinds
Filtering function:	Red/Green
Speed of chart conversion:	0.03S
Program:	2 sets program, each program contains up to 30 steps
Light:	Halogen lamp(12V, 50W)/LED (5V,5W)
Auto-off function:	5 minutes
Voltage:	AC220V/110V 50/60HZ
Dimensions:	300(L) ×230(W) ×240(H)
Net Weight:	6Kg



Auto Chart Projector



▶ ACP-350



















● Features :

- By the way of double locating, it would correct errors automatically.
- Offering more clear and sharp pictures.
- Increase the picture density; there are 5 icons in one line.
- The charts are bigger; Size: 33CM×22.5CM (in 5M refraction)
- Projected by wireless remote controller.
- Able to project the charts one by one.
- Standard accessories, the metal board is covered by bias material.



● Specification :

Projection distance:	2-6(M)
Projection magnification:	30 × (in 5M refraction)
Projection size:	330 × 225mm, Ø275mm (in 5M refraction)
Numbers of charts:	33
Chart change-over:	3 frame/sec
Numbers of masks:	open 1, horizontal line vertical line 8, single isolation 16, r and g 1
Tilt range:	10 ° horizontally as well as vertically
Projection lamp:	6V 20W (halogen lamp)
Automatic shut-off mechanism:	5 minutes
Electricity:	AC 110V/60HZ or 220V/50HZ
Power consumption:	65W
Dimension:	196(W)×292(L)×234(H)(MM)
Weight:	6.5KGS

E _{0.05}	MEW _{0.1} EME _{0.15}	MWME _{0.2} EMEW _{0.3} WMEE _{0.4}	EMW _{0.5} WEW _{0.6} MWEM _{0.7}	WME _{0.8} EMW _{0.9} MWEM _{1.0}	WME _{1.0} EMW _{1.2} MWEM _{1.5}	FVN _{0.1} ZPD _{0.15}
TDEPA _{0.2} VLNEK _{0.3} DAOFR _{0.4}	ECKHD _{0.5} FZDKV _{0.6} OFLCN _{0.7}	APEDT _{0.8} TZVEA _{0.9} OHPNF _{1.0}	KENLV _{1.0} EVOTD _{1.2} VKDZF _{1.5}	8 _{0.05}	592 _{0.1} 638 _{0.15}	35698 _{0.2} 68239 _{0.3} 86953 _{0.4}
23586 _{0.5} 69328 _{0.6} 92563 _{0.7}	38965 _{0.8} 59682 _{0.9} 95836 _{1.0}	63589 _{1.0} 86395 _{1.2} 39826 _{1.5}	 _{0.05}	 _{0.2}  _{0.4}	 _{0.6}  _{0.8}  _{1.0}	
						
						

LCP-100

Features:

- ◆ LINK LCD Chart Projector LCP-100 has multiple extended functions, 21.5 inch LED backlit screen.
 - ◆ Various kinds of tests meet the diverse needs of the measurement.
 - ◆ Quick test list – Pick ten or less frequently used tests to establish your own quick test list.
 - ◆ It can be connected with computer, DVD player or input with multi – media signal through VGA/AV/YPBPR/USB connections as a multi – media player.
 - ◆ Excellent programming give full play to the features of CPU.
1. Without polarization;
 2. Not online;
 3. Adjustable screen brightness;
 4. The distance can be set from 1–6 meters;
 5. Infrared remote control;
 6. International C standard, national standard E standard, alphabet visual standard, children visual standard, digital visual standard, astigmatic visual standard, cross visual standard, binocular balanced visual standard, color blindness visual standard, etc.

Specification:

Maximum size: 510x350x120mm (including bottom corner)

Screen: 21.5 inches (495x285mm)

Screen ratio: 16: 9

Screen resolution: 1920x1080


Voltage: AC220V / 110V 50 / 60HZ (to DC12V)

Weight: 2.5kg

Packing volume: 0.05 cubic

Packing size: 660x160x470mm





▶ LCP-150

● Features:

- ◆ LINK LCD Chart Projector LCP-150 has multiple extended functions, 23 inch LED backlit screen, polarized charts is provided for binocular test.
- ◆ Various kinds of tests meet the diverse needs of the measurement.
- ◆ Quick test list – Pick ten or less frequently used tests to establish your own quick test list.
- ◆ It can be connected with computer, DVD player or input with multi – media signal through VGA/AV/YPBPR/USB connections as a multi – media player.
- ◆ Excellent programming give full play to the features of CPU.
 1. Without polarization;
 2. Can be used online or alone;
 3. Adjustable screen brightness;
 4. The distance can be set from 1–6 meters;
 5. Infrared remote control;
 6. International C standard, national standard E standard, alphabet visual standard, children visual standard, digital visual standard, astigmatic visual standard, cross visual standard, binocular balanced visual standard, color blindness visual standard, etc.

● Specification:

Maximum size: 600×430×150mm (including bottom corner)

Screen: 23 inches (530×305mm)

Screen ratio: 16: 9

Screen resolution: 1920×1080

Voltage: AC220V / 110V 50 / 60HZ (to DC12V)

Weight: 3.5kg

Packing volume: 0.05 cubic

Packing size: 660×160×470mm



▶ LCP-1200


● Features:

- ◆ LINK LCD Chart Projector LCP-100 has multiple extended functions, 27 inch LED backlit screen, polarized charts is provided for binocular test.
 - ◆ Various kinds of tests meet the diverse needs of the measurement.
 - ◆ Quick test list – Pick ten or less frequently used tests to establish your own quick test list.
 - ◆ It can be connected with computer, DVD player or input with multi – media signal through VGA/AV/YPBPR/USB connections as a multi – media player.
 - ◆ Excellent programming give full play to the features of CPU.
1. With 3D polarization;
 2. Can be used online or alone;
 3. Screen brightness can be adjusted;
 4. The distance can be set to 1–6 meters;
 5. Infrared remote control;
 6. International C standard, national standard E standard, alphabet visual standard, children visual standard, digital visual standard, astigmatic visual standard, cross visual standard, binocular balanced visual standard, color blind detection visual standard, etc.
 7. Polarized 3D can provide stereo polarized vision targets, which are necessary for stereo vision and binocular balance inspection;

● Specification:

Maximum size: 660×450×150mm (including bottom corner)
Screen: 27 inches (620×360mm)
Screen ratio: 16: 9
Screen resolution: 1920×1080
Voltage: AC220V / 110V 50 / 60HZ (to DC12V)
Weight: 4.5kg
Packing volume: 0.052 cubic
Packing size: 700×160×470mm





▶ LCP-200

● Features :

- LCD:17-inch XGA Panel
- Distance: 2 M -7M (in steps of 0.1M) / 6inch-24feet (in steps of 0.5 foot)
- Brightness: >160 cd/m²
- Optotype: E,C,Letter,Number,Children
- Test function:Schober Test,Worth Test,Cross Grid,Coincidence Test, ETDRS,Stereo Test,
- AstigmatismTest, Traffic light,Contrast Sensitivity Test, Fixation point Test, Ishihara Test,
- Cross cylinder, Red Green Panel
- Red Green Balance
- Mask type: Change of the background, Single mask, Horizontal mask,Vertical mask, Red/Green mask, Contrast sensitivity
- Visus unit: 5-Grade, Decimal, LogMAR, Snellen(ft), Snellen (M)
- Other functions: optotype random display
- Contrast adjustment of aptotype and EDTRS
- Auto entering standby mode
- Real time adjustment of red and green test chart
- Mirror image: Use with path folding mirror possible
- Video/audio displaying function

● Specification :


Power: Input: 110-230V AC +-10%, 50/60Hz

Output: 12V DC

Power consumption: 20 Watt(max)v

Vision chart Dimension: 420 mm×350 mm×40mm(L/W/H)

Net Weight: 2.0KGS

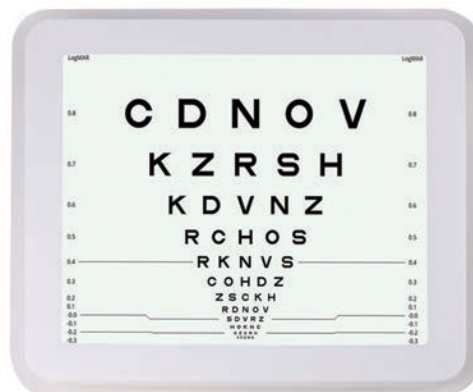

▶ NV-100 (Near Vision Tester)

● Features :

- The NV-100 near vision tester enables a complete refractive and binocular vision investigation to be carried out with the head and eyes in their normal posture at any working distance.
- The refractive tests include:
- Measurement of visual acuity using Snellen letter and illiterate E-chart, and Times Roman reading types.
- Accurate determination of presbyopic additions and other near corrections.
- Near vision astigmatism tests.
- Amplitude of accommodation including monocular measurements under binocular conditions.
- The Binocular balance tests include:
- Fixation disparity test for uncompensated heterophoria motor eye dominance.
- Accommodation-convergence relationship.
- Quantitative evaluation of foveal suppression in heterophoria patients.
- Near point of convergence.
- Targets for subjective cover tests for heterophoria and harmonious ARC.

● Specification :

Test Distance:	36cm
Distant Control:	60cm
Size:	220(H)x210(W)x42(D) mm
Weight:	780g
Power Supply:	LR6AA/1.5Vx3




▶ LK-N1202N/LK-N1202H

● Specification :

The Comparison of LK-N1202N/LK-N1202H		
Item	LK-N1202N	LK-N1202H
Application	myopia/amblyopia/hyperopia/strabismus	myopia/amblyopia/hyperopia/strabismus
Principle	Binocular Imaging and Tripartite Interaction in Vision	Binocular Imaging and Tripartite Interaction in Vision
Power Adaptor Input	AC220V±20V; 50Hz±1Hz	AC220V±20V; 50Hz±1Hz
Power Adaptor Output	DC12V,1.25A	DC12V,1.25A
Input Power	≤15VA	≤15VA
Audio	Dual input, input voltage≤0.5-3V,2x2W stereo sound	Dual input, input voltage≤0.5-3V,2x2W stereo sound
Video Input	PAL or NTSC format, Input voltage≤0.5-1.2Vp-p,HDMI signal input	PAL or NTSC format, Input voltage≤0.5-1.2Vp-p,HDMI signal input
Screen Definition	195PPI	292PPI
Screen Brightness	200cd/m ²	400cd/m ²
Screen Contrast	300/1	900/1
Distance of Visual	≤70mm	T≤70mm





▶ PD-1 (PD Ruler)



▶ PD-5

● Features :

- Digital PD Ruler
- It is a digital precision optical instrument used to measure distance. It employs precise optical structure, the line of light is very clear and precise.
- Separated measurement for left or right eye is available.

● Specification :

Electric Voltage: 23A 12V battery

Power: 5W

Weight: 0.2kg

Volume: 21.5(L)x12.2(w)x44(H)cm



▶ PD-28

● Specification :

Range of measurement: 45 to 82MM (both eyes), 22.5 to 41MM (each eye)
Indication error: ≤0.5 mm
Rounding error: ≤0.5 mm
Range of focusing point: 30 cm~∞
Electric Voltage: DC 3V (5# AA battery×2 pieces)
Time for automatic shut-off: 1 minute



CE


▶ ET-20(Electric Table)

● Specification :

Dimension of worktable: 480*400mm
Tabel movable distance: 180mm
Input voltage: AC110V/220(60/50HZ)
Max Loading: 75KG
Weight: 20KG



CE



ET-20S B

Features:

1. The motor rises and falls smoothly with low noise;
2. All-aluminum pillar body, fully oxidized, beautiful and atmospheric;
3. The bottom plate is integrated with sheet metal parts, which is firm and stable;
4. The table material is made of high-density film-coated board, which has strong practicability and comfortable touch;

Specification:

Maximum size: 600×440×630mm

Table size: 600×435mm

Raising range: 170mm (630–800mm)

Maximum load: 150kg

Voltage: 220V / 50Hz or 110V / 60Hz

Power: 50W

Weight: 20kg

Packing size: 720×570×450mm

Packaging volume: 0.2 cubic



ET-20S N

Features:

1. The motor rises and falls smoothly with low noise;
2. The table has a wire hole for easy threading;
3. All-aluminum pillar body, full oxidation treatment, beautiful atmosphere;
4. The table material is made of high-density film-coated board, which has strong practicability and comfortable touch;

Specification:

Maximum size: 650×440×600mm

Table size: 600×435mm

Lifting range: 170mm (650–820mm)

Maximum load: 150kg

Voltage: 220V / 50Hz or 110V / 60Hz

Power: 50W

Weight: 20kg

Packing size: 720×570×450mm

Packaging volume: 0.2 cubic



ET-20S L

Features:

1. The motor rises and falls smoothly with low noise;
2. The table has a wire hole for easy threading;
3. Two machines can be placed and work at the same time;
4. All-aluminum pillar body, fully oxidized, beautiful and atmospheric;
5. Using an oversized aluminum alloy base plate, which is firm and stable;
6. The table material is made of high-density film-coated board, which has strong practicability and comfortable touch;

Specification:

Maximum size:	800x440x650mm
Table size:	800x435mm
Lifting range:	170mm (650-820mm)
Maximum load:	150kg
Voltage:	220V / 50Hz or 110V / 60Hz
Power:	50W
Weight:	25kg
Packing size:	930x560x480mm
Packaging volume:	0.25 cubic



ET-30


Features:

1. The table material is made of ABS hard plastic, which can slide left and right, and can place two instruments;
2. The body is equipped with two 220 / 100V international universal sockets
3. Both sides of the table are equipped with mounting steel plates that can be installed with the slit lamp power box, which is beautiful and practical;

Specification:

Maximum size:	890x410x750mm
Table size:	800x435mm
Lifting range:	170mm (750mm -920mm)
Maximum load:	150kg
Voltage:	220V / 50Hz or 110V / 60Hz
Power:	50W
Weight:	45kg
Packing size:	1070x590x600mm
Packaging volume:	0.35 cubic





ET-40

Features:

- The unique feather of this machine is User-friendly design and stable mechanic structure.
 - Power box has a strong capacity to supply the electricity for optical instruments.
 - This table is suitable for hospitals, Ophthalmic Clinics and Optical stores.
1. The motor rises and falls smoothly with low noise;
 2. Countertop material particle board, strong practicability;

Specification:

Maximum size: 800×510×700mm

Table size: 780×500mm

Lifting range: 170mm (700– 870mm)

Maximum load: 60 kg

Voltage: 220V / 50Hz or 110V / 60Hz

Power: 50W

Weight: 35kg

Packing size: 930×560×480mm

Packaging volume: 0.25 cubic



ET-40A

Features:

1. The motor lifts smoothly;
2. Can hang manual bull's eye or electric bull's eye;
3. Configure the light source to facilitate optometry;

Specification:

Maximum size: 1800×710×450mm

Table size: 700×430mm

Lifting range: 170mm (750mm –920mm)

Maximum load: 80kg

Voltage: 220V / 50Hz or 110V / 60Hz

Power: 50W

Light source: 5V1A 3W

Gross weight: 35kg

Packing size: 930×570×510mm

Packaging volume: 0.27 cubic



ET-40S

Features:

1. A perfect combination system, versatility, ideal unit for slit lamp image system and other settings, equipment
2. The LCD stand can adjust the position and angle of the height type to meet the needs of different customers
3. Exquisite storage space for common items
4. Limit switch to protect customers' legs

Specification:

Maximum size: 1050x570x720mm
Table size: 1000x560mm
Lifting range: 170mm (650mm–820mm)
Maximum load: 70 kg
Voltage: 220V / 50Hz or 110V / 60Hz
Power: 50W
Weight: 40kg
Packing size: 1100x680x710mm
Packaging volume: 0.53 cubic



ET-50


Features:

1. Can accommodate 5–6 devices to work at the same time, convenient for optometry;
2. Table material, mold plate + imported film, different colors can be selected, can be customized;
3. The lifting system and the bottom plate are made of aluminum alloy, which is more beautiful and stable;

Specification:

Maximum size: 2450x560x650mm
Table size: 2410x560mm
Sector arc: 120° (1800mm arc)
Lifting range: 170mm (650mm–820mm)
Lifting structure: double lifting motor
Lifting error: ±5mm (balanced left and right)
Maximum load: 250kg
Voltage: 220V / 50Hz or 110V / 60Hz
Power: 100W
Weight: 90kg
Packing size: 2500x900x450mm
Packaging volume: 1 cubic





EC-A

Features:

1. Added weights on the seat, and the foot switch is convenient and comfortable to use;
2. It has the functions of rotation, tilting back and movement, and the motor can be lifted smoothly and comfortably;
3. Chair leather color can be customized;

Specification:

Maximum size: 900×650×1350mm

Seat cushion size: 500×480×120mm

Lifting range: 150mm (550–700mm)

Seat load: 250kg

Seat armrest load: 100kg

Seat reclining angle: 160°

Seat rotation angle: 45°

Voltage: 220V / 50Hz or 110V / 60Hz

Power: 50W

Packing size: 1050×690×810mm

Packaging volume: 0.56 cubic



EC-C

Features:

1. Added weights on the seat, and the foot switch is convenient and comfortable to use;
2. It has the functions of rotation, tilting back and movement, and the motor can be lifted smoothly and comfortably;
3. Chair leather color can be customized;

Specification:

Maximum size: 900×650×1400mm

Seat cushion size: 500×500×120mm

Lifting range: 150mm (550–700mm)

Seat load: 300kg

Seat armrest load: 100kg

Seat reclining angle: 160°

Seat rotation angle: 45°

Voltage: 220V / 50Hz or 110V / 60Hz

Power: 50W

Packing size: 1050×690×810mm

Packaging volume: 0.56 cubic



EC-E

Supporting the main skeleton 10mm thick

The main frame is made of 10mm thick steel plate, which is laser welded and integrated.

Support the entire body weight can afford: (500KG-800KG)

1000*320*80*10mm



Support plate 3mm thick

The main frame adopts 3mm thick steel plate, which is laser-cutting technology, CNC bending, spheronization and integrated molding.

Support the entire body weight can afford: (500KG)

1100*500*3mm



Headrest

1. Genuine leather sponge head pillow
2. Can be adjusted as needed

Specification:

Unit size: 950x710mmx1280mm

Chair up and down range: 440mm-590mm

Chair loading ability: 300kg-400kg

Chair arm loading ability: 100kg-200kg


Electric Voltage: AC220V/110V 50/60HZ

Weight: 110kg

Package: wooden case



Electric Chair/Phoropter Arm



EC-D



EC-D

PA-1

Features:

1. For fixing on the wall and hanging the bull's eye and the projector at the same time.

Specification:

Maximum size: 700×600×200mm

Swing arm angle: +35°

Maximum hanging weight: 80KG

Swing arm rotation angle: 90°

Packing size: 720×330×220mm

Packaging volume: 0.05 cubic



PA-1

Features:

1. Fixed use with column;

Specification:

Maximum size: 670×200×100mm

Swing arm angle: +35°

Maximum hanging weight: 80KG

Swing arm rotation angle: 90°

Packing size: 720×330×220mm

Packaging volume: 0.05 cubic



▶ PC-A PC-B PC-C PC-D



PC-A



PC-B



PC-C



PC-D

▶ TLS-68 (Trial Lens Set)

● Specification:

Trial Lens Set: 68 pieces

Spheres: 28pairs

Cylinders: 12pieces



CE

▶ TLS-104

Specification:

Spheres: 18 pairs each of concave and convex

Cylinders: 6 pairs each of concave and convex

Prisms: 2 pieces


Accessories: 6 pieces

Cross cylinder: x0.25



CE

Trial Lens Set



▶ TLS-158

● Specification:

Trial lens set 158PCS

Spheres: 25 pairs each of concave and convex

Cylinders: 12 pairs each of concave and convex

Prisms: 4 pieces

Accessories: 6 pieces

Cross cylinder: $\times 0.25$



CE

▶ TLS-232

● Specification:

232 pieces included, plastic rim, aluminum case

Sphere: 68 pairs

Cylinder: 38 pairs

Prism: 10 pieces

Accessories: 10 pieces

Inner dimensions: 318mm (L) \times 518mm (W) \times 35mm (H)

Outer dimensions: 355mm (L) \times 545mm (W) \times 100mm (H)

Weight: 4.8kg



CE

▶ TLS-266

● Specification:

267 pieces included, metal rim, aluminum case

Sphere: 80 pairs

Cylinder: 40 pairs

Prism: 14 pieces

Accessories: 13 pieces

Inner dimensions: 318mm (L) \times 518mm (W) \times 35mm (H)

Outer dimensions: 355mm (L) \times 545mm (W) \times 100mm (H)

Weight: 7kg



CE

▶ TLS-266B

● Specification:

267 pieces included, metal rim, aluminum case

Sphere: 80 pairs

Cylinder: 40 pairs

Prism: 14 pieces

Accessories: 13 pieces

Inner dimensions: 318mm (L) \times 518mm (W) \times 35mm (H)

Outer dimensions: 355mm (L) \times 545mm (W) \times 100mm (H)

Weight: 7kg



▶ CF-1

● Specification :

Fixed PD: 56 58 60 62 64 66 68 70

Package: 8 pairs/box

Net Weight: 40g/piece



CE

▶ CF-2

● Specification :

Fixed PD mentioned on the frame body

PD scale: --50/52/54/56/58/60/62/64/66/68

Package option: A: Individual box

B: PD50~56 4pcs in a blue box

PD58-68 6pcs in a blue box



CE

▶ AF4880 (Trial Frame)

● Features :

- Nose pad is optional
- Available for 4 lenses to be inserted at each side
- Length and angle of leg is adjustable
- Height of nose pad is adjustable
- Adjust the axis of astigmatism is convenient

● Specification :

Material: Metal

PD adjustable range: 48-80mm

Weight: 55g



CE

▶ STF5470 (Trial Frame)

● Features :

- Nose pad is optional
- Available for 4 lenses to be inserted at each side
- Length and angle of leg is adjustable
- Height of nose pad is adjustable
- Adjust the axis of astigmatism is convenient

● Specification :


Material: Titanium

PD adjustable range: 54-70mm

Weight: 48g



CE



▶ UTF5080

● Features :

- Available for 5 lenses to be inserted at each side
- Length, angle and shape of leg is adjustable
- Height of nose pad is adjustable
- Adjust the axis of astigmatism is convenient

● Specification :


PD Scale: 50-80cm

Net Weight: 61g



▶ NVC-01 NVC-02 NVC-03 (Near Visual Acuity Chart)

- LED backlighting(patent product).standardized and uniform illumination.Clearly printed optotypes.
- Double side display.Powered by lithium battery.With a stand(its gradient can be adjusted).
- With a cord to determine the test distance.With one pointer.



NVC-01



NVC-02



NVC-03



▶ VAC-01 (Visual Acuity Chart)

● Specification :

- Including optotype, astigmatism chart,red/green bar. Each part can be illuminated separately.
- Controlled by wireless remote.
- Test distance: 3 meters. 80cm×28.3cm×1.8cm
- The same is available for various distance in 2m,2.5m,4m,5m,6m.



ChartA



ChartB



ChartC

▶ VAC-02

- Including optotype, astigmatism chart, red/green bar.
- All the functional parts are illuminated at the same time.
- Controlled by wireless remote, or by manual.
- Test distance: 5 meters. 85cm×28.3cm×1.8cm



ChartA



ChartB

▶ VAC-03


- Snellen Chart
- Test distance: 6m
- Size: 71×28.3×1.8cm



▶ VAC-04

- C Ring Chart
- Test distance: 5m
- Size: 85×28.3×1.8cm





▶ TC-1



▶ BL-1 (Board Lens)

5pcs × 8 blades total 40 pcs



▶ CC-1 (Cross Cylinder)

x 0.25D x 0.50D



▶ FL-1 (Flipper)

- Spheres: Lenses Option: 0.25~3.00 (steps: 0.25)
- Red and Green Maddox Rod
- Prisms(Δ): 0.50, 1.00, 2.00, 3.00, 4.00, 5.00, 6.00, 7.00, 8.00, 9.00, 10.00



▶ MP-1 (Multi-Pinhole Occluder)


- Length: 244mm
- Dia: 60mm



▶ HO-1 (Hand Occluder)



▶ RG-1

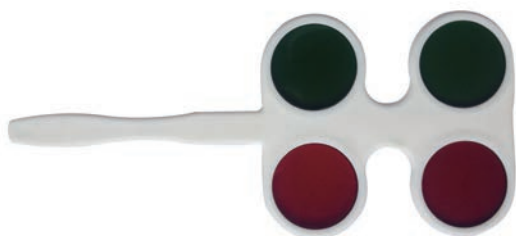

▶ MT-1 (Maddox Test)



▶ VB-15\HB-16 (Prism Bar)


- VB-15: Diopter(Δ):1,2,3,4,5,6,8,10,12,14,16,18,20,25,30
- HB-16: Diopter(Δ):1,2,4,6,8,10,12,14,16,18,20,25,30,35,40,45



VB-15




HB-16

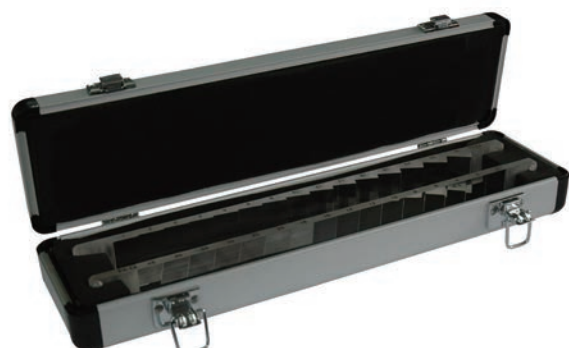

VB-15+HB-16

Loose Prisms



▶ LP-16 (Loose Prisms)

0.5, 1, 2, 4, 6, 8, 10, 12, 15, 20, 25, 30, 35, 40, 45, 50, RF



▶ LP-22

0.5, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 14, 16, 18, 20, 25, 30, 35, 40, 45, 50, RF



▶ LP-16H (Loose Prisms with handle)

▶ LP-22H



Slit Lamp

▶ SL-200

● Specification :

Microscope Type	Converging Stereoscope Microscope
Magnifications Selection	Two Steps Magnifications
Eyepiece	10x
Magnification Ratio	10x (18mm), 16x (14.5mm)
Diopter Adjustment	50mm ~ 82mm
Pupillary Adjustment	±5D
Side Shift	110mm
Depth Shift	90mm
Height Shift	30mm
Height Shift	80mm
Fixation Target	Red LED
Slit Width	0 ~ 10mm continuous(at10mm,slit becomes circle)
Slit Height	φ10mm,φ3mm,φ1mm,φ0.2mm
Filter	Heat Absorption,Red-free,Cobalt Blue
Illumination Bulb	12V 50W Halogen lamp
Input Voltage	220V/110V
Frequency	50H/60Hz
Power Consumption	68VA
Gross Weight	13KG
Net Weight	11KG
dimension	455mm(L)*385mm(W)*630MM(H)




CE

▶ SL-200A

● Specification :

Microscope	Microscope Type	Converging Stereoscope Microscope
	Magnification Selection	Two Steps Magnifications
	Eyepiece	10x
	Magnification Ratio (Field of View)	10x(18mm)、 16x(14.5mm)
	Pupillary Adjustment	50mm~82mm
Base	Diopter Adjustment	±5D
	Side Shift	110mm
	Depth Shift	90mm
Chin rest	Height Shift	30mm
	Height Shift	80mm
Illumination system	Fixation Target	Red LED
	Slit Width	0 ~ 9mm Continuous(at 9mm,slit becomes a circle)
	Slit Height	1 ~ 8mm Continuous
	Slit Angle	0° ~ 180° adjustable
	Diameter of Light Spot	φ9mm、 φ8mm、 φ5mm、 φ3mm、 φ2mm、 φ1mm、 φ0.2mm
	Filter	Heat Absorption,Grey,Red-free,Cobalt Blue,
Power	Illumination Bulb	12V 50W halogen lamp
	Input Voltage	110-240V AC
	Frequency	50/60Hz
Weight And Size	Power Consumption	68VA
	Gross Weight	18kg
	Dimension	690mm(L)×440mm(W)×420mm(H)





▶ SL-220S/SL-220

● Specification:

Microscope	Model	SL-220S	SL-220
	Type	Converging Stereoscope	
	Magnification change	Move the pole	
	Light source	LED lamp	
	Real fields of view	9mm-18mm	
	Stereoscopic angle : 13 degree	13 degree	
	Eyepiece	10X	10x, 16x
	Total magnification	10X, 16X	10x, 16x, 25x
	Field of View	10X:20mm, 16X:13mm, 25X:8mm	
	Range of adjusting the distance of pupil	54mm-92mm(>92mm)	
	Eyepiece diopter adjustment	≥±6D can reach ±8D(eyepiece10X);±15D (eyepiece16X);	
	Slit image width	0mm~14mm continuous	
	Slit image length	1mm~14mm continuous	
	Diameter of aperture	φ14mm, φ10mm, φ5mm, φ2mm, φ1mm, φ0.2mm	
	Slit angle	0~180 Rota table	
	Filter	Heat absorption, Grey, red free(Green), Cobalt blue	
	Illumination	DC5V LED lamp	
	Moving	Back and forth moving	90mm
Left and right moving		100mm	
Inching moving back and forth, right and left		15mm	
Up and down moving		30mm	
Jaw bracket part	Up and down moving	80mm	
	Fixation	Red LED (supply power:7V, 0.02W; the lamp itself: 2V,0.006W)	
Power	Input voltage	110-240V±10%	
	Input frequency	50/60Hz	
	Input power	10W	
	Safe standard of electric	IEC601-1,type I, BF Model	
Weight and Dimension	Packing box	720mm x 495mm x 480mm	
	Gross weight	25Kg	




▶ SL-230

● Specification :

Microscope	Type	Galileo parallel style
	Magnification change	Five magnification
	Eyepiece	12.5X
	Total magnification	6x 10x 16x 25x 40x
	Field of View	6X:33mm,10X:20mm,16X:13mm,25X:8mm,40X:5mm
	Range of adjusting the distance of pupil	55 mm-75 mm
	Range of adjusting eyepieces	-5D - +5D
	Magnification	0.794x
	Slit width	0mm-14mm
	Slit length	1mm-14mm
	Diameter of aperture	φ14mm,φ10mm,φ5mm,φ2mm,φ1mm,φ0.2mm
	Slit angle	0-180
	Filter	Heat absorption, Grey, red free(Green), Cobalt blue
	Bulb	LED DC5V
Moving	Forward and backward moving	90mm
	Left and right moving	100mm
	Handle moving	15mm
	Up and down moving	30mm
Jaw bracket part	Up and down moving	80mm
	Fixation	Red LED
Power	Input voltage	110-240V±10%
	Input frequency	50/60Hz
	Input power	3W
	Safe standard of electric	IEC601-1,type I, BF Model
Weight and Dimension	Packing box	720mm x 495mm x 480mm
	Gross weight	25Kg
	Net weight	21Kg





▶ SL-240S/SL-240

● Specification:

Microscope	Model	SL-240S	SL-240
	Type	Converging Stereoscope	
	Magnification change	Move the pole	
	Light source	halogen lamp	
	Real fields of view	9mm-18mm	
	Stereoscopic angle : 13 degree	13 degree	
	Eyepiece	10X	10x,16x
	Total magnification	10X,16X	10x,16x,25x
	Field of View	10X:20mm,16X:13mm,25X:8mm	
	Range of adjusting the distance of pupil	54mm-92mm(>92mm)	
	Eyepiece diopter adjustment	≥±6D can reach ±8D(eyepiece10X);±15D (eyepiece16X);	
	Slit image width	0mm~14mm continuous	
	Slit image length	1mm~14mm continuous	
	Diameter of aperture	φ14mm,φ10mm,φ5mm,φ2mm,φ1mm,φ0.2mm	
	Slit angle	0~180 Rota table	
	Filter	Heat absorption, Grey, red free(Green), Cobalt blue	
	Illumination	12v, 50w halogen bulb	
Moving	Back and forth moving	90mm	
	Left and right moving	100mm	
	Inching moving back and forth, right and left	15mm	
	Up and down moving	30mm	
Jaw bracket part	Up and down moving	80mm	
	Fixation	Red LED (supply power:7V, 0.02W; the lamp itself: 2V,0.006W)	
Power	Input voltage	110-220V±10%	
	Input frequency	50/60Hz	
	Input power	60VA	
	Safe standard of electric	IEC601-1,type I, BF Model	
Weight and Dimension	Packing box	720mm x 495mm x 480mm	
	Gross weight	25Kg	




▶ SL-250

● Specification :

Microscope	Type	Galileo parallel style
	Magnification change	Three/Five magnification
	Eyepiece	12.5X
	Total magnification	10x 16x 25x
	Field of View	6X:33mm,10X:20mm,16X:13mm,25X:8mm,40X:5mm
	Range of adjusting the distance of pupil	55 mm-75 mm
	Range of adjusting eyepieces	-5D - +5D
	Magnification	0.794x
	Slit width	0mm-14mm
	Slit length	1mm-14mm
	Diameter of aperture	φ14mm,φ10mm,φ5mm,φ2mm,φ1mm,φ0.2mm
	Slit angle	0-180
	Illumination angle	0,5,10,15,20
	Filter	Heat absorption, Grey, red free(Green), Cobalt blue
	Bulb	12v, 50w halogen bulb
Moving	Forward and backward moving	90mm
	Left and right moving	100mm
	Handle moving	15mm
	Up and down moving	30mm
Jaw bracket part	Up and down moving	80mm
	Fixation	Red LED
Power	Input voltage	110-220V±10%
	Input frequency	50/60Hz
	Input power	60VA
	Output voltage	Illumination:4.5V 9V 12V Fixation:6V
	Safe standard of electric	IEC601-1,type I, BF Model
Weight and Dimension	Packing box	720mmx495mmx480mm
	Gross weight	25Kg
	Net weight	21Kg





▶ SL-270

● Specification:

Microscope	Type	Galileo parallel style
	Magnification change	Three/Five magnification
	Eyepiece	12.5X
	Total magnification	6x 10x 16x 25x 40x
	Field of View	6X:33mm,10X:20mm,16X:13mm,25X:8mm,40X:5mm
	Range of adjusting the distance of pupil	55 mm-75 mm
	Range of adjusting eyepieces	-5D - +5D
	Magnification	0.794x
	Slit width	0mm-14mm
	Slit length	1mm-14mm
	Diameter of aperture	φ14mm,φ10mm,φ5mm,φ2mm,φ1mm,φ0.2mm
	Slit angle	0-180
	Illumination angle	0,5,10,15,20
	Filter	Heat absorption, Grey, red free(Green), Cobalt blue
	Bulb	12V, 50w halogen bulb
Moving	Forward and backward moving	90mm
	Left and right moving	100mm
	Handle moving	15mm
	Up and down moving	30mm
Jaw bracket part	Up and down moving	80mm
	Fixation	Red LED
Power	Input voltage	110-220V±10%
	Input frequency	50/60Hz
	Input power	60VA
	Output voltage	Illumination:4.5V 9V 12V Fixation:6V
	Safe standard of electric	IEC601-1,type I, BF Model
Weight and Dimension	Packing box	720mmx495mmx480mm
	Gross weight	25Kg
	Net weight	21Kg



▶ SL-280S


● Features :

- The Galilean-type magnification system provides the 10X, 16X and 25X three magnification (standard configuration) and 6X, 10X, 16X, 25X and 40X (professional configuration); there is no need to change the eyepieces.
- The CCD adaptor, digital camera and teaching tube are supported.
- It can provide with 0.5mm, 3.5mm, 8mm and 14mm (max) apertures; it is specially fit for the examination for contact lens and foreign body in cornea.
- The German imported Osram 12V30W halogen lamp and LED lamp are both available.
- The slit angle can turn over 180 degree, horizontal scanning is supported.
- Thermal safety, cobalt blue and red free filters are provided.

● Specification :

Microscope type	Galilean-Type	Magnification	SL-280S:3-STEP
Eye piece	12.5x	Total magnification Ratio	10x, 16x, 25x(standard configuration) 6x,10x, 16x, 25x,40x(professional configuration)
Range of pupil distance	55mm~78mm	Field of view	40x (Ø5.5mm), 25x (Ø8.5mm), 16x (Ø13.5mm), 10x(Ø22mm), 6x (Ø34.7mm)
Slit width	0 ~14mm adjustable	Adjustment of diopter	±6D
Slit angle	0°~180°	Slit height	1~14mm adjustable
Light spot diameter	φ14mm,φ8mm, φ3.5mm,φ0.5mm	Filter	Thermal safety,Red-free,Cobalt Blue
Illumination bulb	12V/30W Halogen Lamp	Dimension	740 x 450 x 500(mm)
Power	220V/110V~±10%		






▶ SL-290/SL-290 Image System

● Specification:

Microscope	Type	Galiean magnifying type of the binocular with cross angle type	
	Eyeiece	12.5X	
	Total magnifying ratio	Visual diameter	
	6X	φ37mm±1.2mm	
	10X	φ23mm±1.2mm	
	16X	φ14mm±1.2mm	
	25X	φ8.2mm±1.2mm	
	40X	φ5.7mm±1.2mm	
	Magnification errors	±5%	
	The range of adjusting intraocular distance	55mm~75mm	
	Adjusting diopter	-5D~+3D	
	Indication errors is less than or equal	±0.5D	
	The relatively errors of the magnification ratio between left and right system is less than or equal 2.5%		
The visual field of left and right is the same, not create two double images, can not be impartiality for left and right. On the object lens, the value is less than 0.2mm up and down. Less than 0.4mm for left and right.			
Definition:		Magnifying X	6 10 16 25 40
		Definition LP/MM	35 53 74.9 100 112
Illumination	Slitting width	0mm~10mm adjusting continuously	
	Slitting height	1mm~10mm adjusting continuously	
	Diameter of the light spot	φ10,φ8,φ5,φ3,φ1,φ0.2(mm)	
	Slitting angle	0°~180°adjusting continuously from horizontal to vertical	
	Swing scope of slit light	±15 C	
	Magnifying of illumination errors	0.7 ±8%	
	Slitting tilting	5°,10°,15°,20°four grades	
	Color filter	Heat filter, light-reducing filter, red filter and cobalt filter	
	Lighting bulb	12V30W halogen tungsten bulb	
	Move the pedestal	Back and forth moving	90mm±5mm
Left and right moving		120mm±8mm	accurately adjusting≥112mm
Move vertical direction		30mm±5mm	accurately adjusting≥25mm
X,Y move		15mm±5mm	accurately adjusting≥10mm
Jaw bracket part	Up and down moving	80mm	
	The sight-line fixing lamp	Red LED	
Electric power	Input voltage	110/220V~±1HZ	
	Input frequency	50/60HZ±1HZ	
	Input power	60VA	
	Output voltage	Illuminating lights 4.5V 6.0V 9V 10.5V 12V Sight-line fixing lamp 3.5V	
Lighting source	12V/50W halogen tungsten bulb Nikon D5300 or Canon 100D		

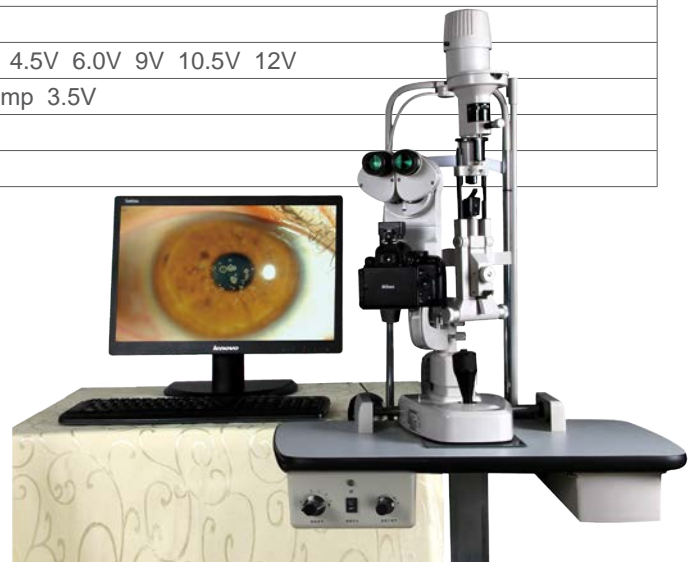

▶ SL-300S/SL-300

● Features :

- All the optical lenses are moistureproof, mildewproof and anti-reflected treated.
- Large spot diameter, slit length reach to 14mm, more comprehensive view of the eye condition.
- Osram light bulbs, small heat, high-brightness, spot uniformity
- Handrail design, user-friendly and the convenience of patients
- All the joints can be connected by accessories with international standards

● Specification :


Property of slit lamp	Microscope Type	Galilean stereoscopic microscope
	Magnification selection	SL-300S: 3 steps by drum rotation SL-300: 5 steps by drum rotation
	Eyepiece	12.5x
	Magnification Ratio (Field of view)	SL-300S: 10x (φ22.5mm) 、 16x (φ14mm) 、 25x (φ8.8mm) SL-300: 6x (φ33mm) 、 10x (φ22.5mm) 、 16x (φ14mm) 、 25x (φ8.8mm) 、 40x (φ5.5mm)
	PD adjustment	50mm ~ 80mm
	Diopter Adjustment	+7D ~ -7D
Base	Left and righth move	110mm
	Dolly move	90mm
	Up and down move	30mm
Chin rest	Up and down move	80mm
	Fixation lamp	red LED
Property of illumination	Slit width	0 ~ 14mm continuous (at 14mm,slit becomes a circle)
	Slit height	1 ~ 14mm continuous
	Slit angle	0 ~ 1800 continuous
	Slit beveling	50,10°,150,200
	Light spot diameter	Φ14mm ,Φ10mm,Φ5mm , Φ3mm ,Φ2mm , Φ1mm ,Φ0.2mm and Φ1-14mm continuous
	Filter	Heat Absorption ,Grey ,Red-Free ,Cobalt Blue
Power	Input voltage	110V/220V AC
	frequency	50/60 Hz
	Power consumption	68VA
Weight and size	G.W	20kg
	N.W	16kg
	Main dimension	690mm(L)× 440mm(W)× 420mm(H)

SL-300S



SL-300





SL-350S/SL-350

Features:

- ◆ The Galilean type microscope system adopts revolving drum
- ◆ The excellent optical system can give you a clear and clean image.
- ◆ The 14mm aperture can help you observe the whole cornea and iris easily, and it is convenient to examine the foreign object.
- ◆ The German imported 6V20W Osram halogen lamp can fully make use of every beam. It can make sure that you get the clean and clear image effect with the minimum illumination, at the same time can protect the patient's eye.
- ◆ The high eyepoint and open field eyepieces design can guarantee the clear image even when you wear glasses.
- ◆ The modular design can reserve the adapters, this is convenient to connect beam splitter, digital camera adapter and the CCD adapter, thus can upgrade to the digital camera system or the image capture system.
- ◆ The adapter function is good, digital single lens reflex camera and the digital vidicon are compatible.

Specification:

Microscope type:	Galilean-Type
Eye piece:	12.5×
Range of pupil distance:	55mm~78mm
Slit width:	0 ~14mm adjustable
Slit angle:	0°~180°
Light spot diameter:	φ14mm, φ10mm, φ5mm, φ3mm, φ2mm, φ1mm, φ0.2mm
Illumination bulb:	6V/20W Halogen Lamp
Power:	220V/110V~±10%
Magnification:	SL-350S: 3-STEP SL-350: 5-STEP
Total magnification Ratio:	10×, 16×, 25×(standard configuration) 40× (Ø5.5mm), 25× (Ø8.5mm),
Field of view:	16× (Ø13.5mm), 10×(Ø22mm), 6× (Ø34.7mm)
Adjustment of diopter:	±6D
Slit height:	1~14mm adjustable
Slit inclination:	5°, 10°, 15°, 20°
Filter:	Thermal safety, UV, Red-free, Cobalt Blue
Dimension:	740 x 450 x 500(mm)



▶ SL-350DC

● Features :

- This system was made up by the SL-350 slit lamp combining with the following accessories:
- digital camera adaptor, beam splitter, digital camera, and background illumination model (3V).
- Besides observing the eye diseases, it can take pictures, store and print the image. This is
- convenient to observe the patients' condition and evaluate the remedial effect.
- The high resolution ink jet printer, the image can be printed clearly.
- This system adopts the professional digital single lens reflex camera.


● Accessories :

	SL-350DC
Image System	Without
Beam Splitter	With
Digital Camera Adaptor	With
BacLite Background Illumination Model	With
MediView Image Process Software	Without
Digital Single Lens Reflex Camera(CANON EOS 600D)	With
Tonometer Adaptor included	With
computer	Without
Electric Table	With

● Specification :

Microscope type	Galilean-Type	Magnification	5-STEP
Eye piece	12.5x	Total magnification Ratio	10x, 16x, 25x(standard configuration)
Range of pupil distance	55mm~78mm	Field of view	40x (Ø5.5mm), 25x (Ø8.5mm), 16x (Ø13.5mm), 10x(Ø22mm), 6x (Ø34.7mm)
Slit width	0 ~14mm adjustable	Adjustment of diopter	±6D
Slit angle	0°~180°	Slit height	1~14mm adjustable
Light spot diameter	φ14mm, φ10mm, φ5mm,φ3mm, φ2mm, φ1mm, φ0.2mm	Slit inclination	5°, 10°, 15°, 20°
Illumination bulb	6V/20W Halogen Lamp	Filter	Thermal safety,UV,Red-free,Cobalt Blue
Power	220V/110V~±10%	Dimension	740 x 450 x 500(mm)





▶ SL-400

● Features :

- 14mm aperture provides broader and clearer field of view.
- Joystick is made by metal, and the overall appearance is fantastic, and at the same time it increases clinical operation space.
- Five-step drum magnification, Five-step drum magnification of eyepiece. Sclera vein could be observed under the 40X magnification.
- All the joints can be connected by accessories with with international standards.
- By stepless adjustable photoelectric box, it can provide all kinds of appropriate brightness of the lightening according to the clinical doctors' actual demand.
- Four different filters can be inserted into the illumination pathway. Anti-ultraviolet radiation filter ensures patients' safety during examination.

● Specification :

Microscope

Microscope Type Galilean Stereoscopic Microscope

Objective Magnification Five-step Drum Magnification

Eyepiece 12.5X

Magnifications 6.3X, 10X, 16X, 25X, 40X

Diopter Adjustment -5D~+5D

Pupil Distance 55mm~75mm

Field of view 6.3X=33mm, 10X=22.5mm, 16X=14mm,
25X=8.8mm, 40X=5.5mm

Illumination Assembly

Slit Width 0mm~14mm adjustable

Slit Height 1mm~14mm adjustable

Slit Angle 0°~180° adjustable

Slit Inclination 5°, 10°, 15°, 20°

Diameter of Light Spot ϕ 0.2mm, ϕ 1mm, ϕ 2mm, ϕ 5mm, ϕ 10mm,
 ϕ 14mm

Filters Heat Absorption, Grey, Redfree, Cobalt
Blue

Illumination Source 12V/30W Halogen Source

Power Supply

Input AC 110/220V 50Hz/60Hz



▶ Accessories for Slit Lamp Microscope

>Tonometer Adaptor



For R type Goldman applanation tonometer

(Supported model:
SL350/SL350S/SL360/SL360S/SL390H/SL390L)

> Tonometer Adaptor

For T type Goldmann applanation tonometer

(Supported model:
SL260/SL280/SL280S/SL350/SL350S/
SL350C/SL360/SL390H/SL390L



>Tonometer Adaptor



For 870 type applanation tonometer.

(Supported model: SL260/SL280/SL280S)

>Polarizer Filter Module

To reduce corneal reflection it can be mounted permanently on the slit lamp microscope and inserted or removed as required

(Supported model:
SL260/SL280/SL280S/SL350/SL350S/SL360/
SL360S/SL390H/SL390L



> Yellow Filter Module

To provide additional contrast to fluorescence in images, it can be mounted permanently on the slit lamp microscope and inserted or removed as required.

(Supported model:SL260/SL280/SL280S/SL350/
SL350S/SL360/SL360S/SL390H/SL390L)

> Yellow Filter

To provide additional contrast to fluorescence in images. It can be installed in front of the objective lens:

(Supported model:
SL260/SL280/SL280S/SL350/SL350S/
SL360/SL360S/SL390H/SL390L



>Amber Filter

To provide a clear and high contrast image with improved color depth. It can be permanently mounted in the slit illumination part. Assembled by factory ONLY. Please consult sales before ordering.

(Supported model:
SL260/SL280/SL280S/SL350/SL350S/SL360/
SL360S/SL390H/SL390L)



> Measuring Eyepiece

Equipped with a reticle plate inside, the eyepiece has a measuring function.

(Supported model:
SL260/SL280/SL280S/SL350/SL350S/SL360/
SL360S/SL390H/SL390L)




> Metal Plate


Install slit lamp to a metal plate instead of wooden plate now. With small size design, it is easy to move the whole slit lamp from one refractor to another without drilling any screw holes on the table top of the refractor.

> Slit Lamp Plate

The diameter of the joint pin is 19mm, available for most of the instrument stand.

With this plate the slit lamp table top can be installed to the lower slit lamp arm of instrument stand.





▶ Beam Splitter of slit lamp



66Vision



Zeiss



Topcon D2



Mediworks Beam Splitter



Kanghua



HAAG STREIT BQ900



CSO Integrate Beam Splitter



Zeiss Integrate Beam Splitter

▶ Beam Splitter of Microscope



Leica 844 Microscope Beam Splitter



Zeiss Microscope

▶ EA-1


● Features:

- Converts smart phones into professional digital eyepieces for the traditional optical instruments. Just attached the equipped smart phone to the slit lamps, microscopes, telescopes, Spotting Scope, Binocular or Monocular ect. With built-in camera app, you can take sharp images, capture videos, and then share all information via email, SMS, twitter facebook.

● Specification:

- Adjustable support case dimension makes it available for the most mainstream smart-phones. The sizes of the smart-phones can be from 4"to 5.5"
- Ultra-durable Polycarbonate plastic body with aluminum chuck.
- Three jaw aluminum chuck design for fast installation, easy Operation.
- Send out high-res images directly from your phone via email, SMS, twitter or 3rd party apps.
- It is designed to work with eyepieces that are 1in – 1.8in in diameter
- Work with Slit Lamp, Microscopes, Telescopes, Binoculars, Spotting scopes and other Optical Instruments





▶ Adaptors



Adaptor for all mobilephone



DV Camera Adaptor



CCD Adaptor



Canon Nikon Camera Adaptor



Iphone Adaptor

▶ Laser Goggles




532 Laser Goggles



810 Laser Goggles

▶ S150



● Specification:

Magnification: 6X

Illumination: ●●●

Slit Length: ≥ 12 mm

Slit Width (min): 0~12mm continuously adjustable

Filter: Cobalt blue filter

Power: Li-ion battery 3.7V/3400mAh


Illumination: LED bulb 3V/1W

Working Time: More than 6 hours

Recharging Time: 3.5 hours

Net Weigh: 240g (including battery)





▶ KJ5S1

● Features :

- The first portable slit lamp in China.
- Compact, hand-held, one hand operational
- High illumination white LED
- Fully charged can be used for 5-6 hours
- CE, ISO13485, ISO9001

● Specification :

Microscope type: converging microscope

Objective magnification: 1x

Eyepiece magnification: 10x, 16x

Diopter compensation $\pm 7D$

Pupil distance: 80mm

Slit width: 0-10mm continuously adjustable

Diameter of light spot: 1mm, 3mm, 5mm, 10mm

Filter: Heat-absorptin, Grey, Red-free, Cobalt blue

Slit angle: horizontal +30

Light source: white LED

Power: 7.2V 750Ah Li Battery, Rechargeable

Working Time: 5-6 hours

Packing Volume: 40cm×20cm×23cm

Net weight: 750g

Gross weight: 2600g



CE

▶ KJ5S3


● Features :

- High definition imaging
- Real-time focus system
- Super large touch screen
- Cloud service system

● Specification :

MODEL:	KJ5S3
MAGNIFICATION:	10X
WORKING DISTANCE:	80mm
SLIT WIDTH:	0-12mm continuously adjustable
APERYURE DISTANCE :	0.2mm,1mm,5mm,12mm
FILTER:	Heat-absorption,Red-free Cobalt blue
IMAGE RESOLUTION:	16MP
LIGHT SOURCE:	White LED
SCREEN:	3.97"
NICK NAME:	LINK
IMAGE/VIDEO FORMAT:	JPEG/3GP
POWER:	3.7VLithium Battery
TRANSMISSION:	WiFi,BT
STORAGE:	Internal capacity 16GB
INTERFACE:	Micro USB
SIZE:	140mm(W) x 118mm(D) x 225mm(H)
N.W.:	850g
PSAKING SIZE:	36*29*26mm





▶ 20D\78D\90D (Aspherical lens)



20D



78D



90D

▶ AK-800

● Specification:

Scale	Corneal radius of curvature	5.5-11mm
	Minimum reading	0.02mm
	Corneal refractive power	30-60D
	Minimum reading	0.25D
	Axis of corneal astigmatism	0-180°
	Minimum reading	1°
	Diopter adjusting scale	0-±5dotr
illumination Bulb	12V 50W halogen lamp	
Voltage/frequency	AC 110v/60Hz or 220V/50Hz	
Dimensions	450(L)*300(W)*450(H)mm	
Weight	16kg	



▶ AK-810

● Features:

Contact lens measurement

Replace the chin-rest with the supporting column and place the contact lens holder, with the contact lens attached to it, on top of the column. It will be possible to measure the radius of curvature of the concave or convex face, depending on which faces the instrument, in the same manner as when measuring the cornea.

LED LAMP

Applied which have long-life time,save energy and no heat.

● Specification:

Scale	Corneal radius of curvature	5.5-12mm
	Minimum reading	0.01mm
	Corneal refractive power	28D-60D
	Minimum reading	0.125D
	Axis of corneal astigmatism	0-180°
	Minimum reading	1°
	Diopter adjusting scale	0-±5dotr
illumination Bulb	12V 50W halogen lamp	
Voltage/frequency	AC 110v/60Hz or 220V/50Hz	
Dimensions	450(L)*300(W)*450(H)mm	
Weight	15kg	



▶ SW-100

● Features:

- Electronic and optical integration, ultra small corneal curvature tester, is mainly used to measure the corneal curvature radius and diopter, wireless output print data

● Specification:

Measuring range:	6.5mm~9.5mm	Precision:	±0.05mm
Resolution of curvature radius of cornea:	0.01mm		
Singel measuring time:	0.03s		
Output:	wireless infrared thermal printer		
	Can observe the eye directly through the screen.		
Weight:	<0.5Kg(with batteries)		
Dimension:	240mm×90mm×60mm		
Power:	500mW+15%		




▶ YZ-7A (Tonometer)

● Features:

- The product is designed and manufactured conforming to the international standard ISO/TR 8612---1997, which is reliable enough in quality, smart and portable in structure and convenient for use.
- Principle of design: use the pointer to press cornea and then measure the pressed depth, thus indirectly get the intraocular pressure.
- Schiotz type tonometer.
- All the parts contacting with cornea are made of stainless steel which is anti-acid and does no harm to issues.
- Safe, reliable, practical, accurate and portable.





▶ YZ-30R YZ-30T

● Specification:

It is suitable for top illumination type slit lamp

Measurement Range: 0-10.64kpa

Light Ring Displacement: $1.53 \times 2 = 3.06\text{mm}$

Diameter of the testing head: 7mm

Average Error: $\pm 70\text{pa}$


Type: R type/T ype



▶ YZ-30X

● Features:

- It's not only used to examine the eyes, but also measure the intraocular pressure while working under the slit lamp.
- Accurate measurement ensures the total tolerance less than 0.066KPa (0.5mmHg).
- Directly get the intraocular pressure.
- Measured intraocular pressure will not be affected by hardness of eye.
- Adjustable measuring pressure ensures the working stability and accurate measurement of tonometer in long time.

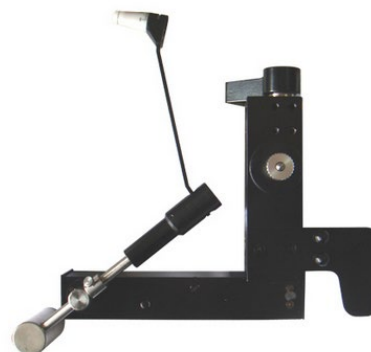

▶ SW-500


● Features :

- With vertical and horizontal two working modes, wireless output print data. The equipment is used to measure intraocular pressure, using the principle of: the probe hits the surfaces of different hardness at a certain speed, has different reaction when the probe rebounds.
- Be of advantages of high accuracy, portable, without anesthesia, without the cross-infection etc.

● Specification :

Measuring Range: 3mmHg~70mmHg
Measuring Error: $\pm 1.5\text{mmHg}$ ($3\text{mmHg} \leq \text{intraocular pressure} \leq 25\text{mmHg}$)
$\pm 2.5\text{mmHg}$ ($25\text{mmHg} \leq \text{intraocular pressure} \leq 70\text{mmHg}$)
Measurement can go along both in standing and lying posture
Wireless data printing.
Esay to learn ,easy to use
Lightweight and handy
No anesthesia, avoiding discomfort reaction





▶ SW-800

● Features :

- Binocular diopter measurement
- Pupil diameter measurement
- Auto operation distance in 1 meter
- Quick screening within 1 second
- Portable and light in weight
- Changeable and rechargeable battery
- Report output



● Specification :

Display screen:	Touch screen
Refractedetection:	Auto
Pupil diameter:	Range: 2.0mm~9.0mm
Spherical:	Range: -7.50D~+7.50D Accuracy: $\pm 0.25D$
Detection time:	$\leq 1S$
Fixation target:	Lights and sounds
Operating mode:	Binocular measurement
Working distance:	1m
Pupil distance:	Range: 35mm~80mm
Cylindrical:	Range: 0.00D~3.00D Accuracy: $\pm 0.50D$
Axis:	Range: 1° ~ 180° Accuracy: $\pm 10^{\circ}$
Others:	Applicable for different screening patterns in infants, children and adults.

▶ YZ-11D

● Features :

- Improved light path and excellent optical performance.
- Imported halogen bulb provides high and adjustable brightness and good color rendering.
- Smart, portable and convenient for mobile inspection.
- Equipped with special charger, quick and convenient recharging, against over recharging.
- Anti-recharging and anti-discharging function protects the battery.

● Specification :

Illumination Form: Large Spot, Small Spot, Slit, Net, Red Free
Diopter Compensation: 0 ±1 ±2 ±3 ±4 ±5 ±6 ±8 ±10 ±12 ±16 ±20 -25 -35D
Illumination Source: 3.5V/2.8W, Halogen Bulb
Input Voltage: AC220V/22V/50Hz/1Hz, AC110V/11V/60Hz/1Hz
Power(Main body of Ophthalmoscope): Li+ Battery Pack 3.7V, Rechargeable



▶ YZ-11 (Indirect Ophthalmoscope)

● Features :

- Elegant appearances.
- It is convenient for mobile inspection. Both common dry cell and rechargeable battery power are applicable.

● Specification :

Illumination Form: Large Spot, Middle Spot, Small Spot, Red Free
Diopter Compensation: 0 ±1 ±2 ±3 ±4 ±5 ±6 ±8 ±10 ±12 ±16 ±20 -25 -35D
Illumination Source: 2.6V/0.78W, Incandescent Bulb
Power : 2# Alkaline battery, rechargeable battery



▶ YZ-9 (Ophthalmostatometer)


● Features :

- The product can precisely measure the level of exophthalmia over the orbital margins, on the principal basis that both vertexes of cornea and scaleplate are projected to the front of prism by total reflection on the bevel, with the special structure of the isosceles right-angled triangle prism.

● Specification :

Measuring Range of the Exophthalmia: 0~35mm
Adjustable Range of the Orbital Distance: 80~120mm





▶ YZ-6F/YZ-6G

● Features :

- Excellent optical performance and continuously adjustable brightness, easy to observe the erect fundus image.
- Germany imported bulb provides the high color temperature, good color rendering, even light spot and sharp image.
- Complete types of light spots and filters meet various observation requirements.
- Soft rubber around the eyeholes protect user's eyes and stabilize the ophthalmoscope.
- New functions of soft starting and automatic turn-off extend the service life of bulb.
- Convenient to place and easy to operate. YZ6F replaced on the tabletop and YZ6G mounted on the wall.

● Specification :

Illumination Form: Large Spot, Small Spot, Slit, Net, Red Free

Diopter Compensation: 0 ±1 ±2 ±3 ±4 ±5 ±6 ±8 ±10 ±12 ±16 ±20 -25 -35D

Illumination Source: 3.5V/2.8W, Halogen Bulb

Input Voltage: AC220V/22V/50Hz/1Hz, AC110V/11V/60Hz/1Hz



YZ-6F



YZ-6G

▶ YZ-6H

● Features :

- LED cold light source. It is durable enough with the designed service life of 100000 hours.
- Low heat benefits from the cold light source.
- Imported bulb maintains 3200K color temperature for long time. The illumination is soft and more similar with sunlight.
- Ultraviolet radiation is eliminated to fully protect patient's eyes.
- Even light spot and sharp observed fundus image.
- Soft rubber around the eyeholes protect eyes and stabilize the ophthalmoscope.

● Specification :

Illumination Form: Large Spot, Small Spot, Slit, Net, Red Free

Diopter Compensation: 0 ±1 ±2 ±3 ±4 ±5 ±6 ±8 ±10 ±12 ±16 ±20 -25 -35D

Illumination Source: 3.5V/1W LED Bulb

Input Voltage: AC220V/22V/50Hz/1Hz, AC110V/11V/60Hz/1Hz



▶ YZ-25C

● Features :


- LED bulb(low-temperature,low-pressure,high-brightness) with long lifetime to make the illumination uniformly and bright.The illumination brightness can be adjusted continuously.
- Imaging clearly,strong dimensional sense and large field of view range.The main body part of this device adopts engineering plastics and is designed to be compact and exquisite.
- Super lightweight design, reduce fatigue,operation is very convenient.
- The portable power supply is suitable for surgery, ward round and consultation.
- This device is equipped with color filter,teaching mirror and sclera depressor to be more handy in operation.

● Specification :

Interpupillary Distance	52mm~74mm adjustable
Intensity of Illumination	Step-less adjustable with the maximum intensity no less than 500Lx
Headband	520~640mm in circumference,85~125mm in depth
Light Spots	Big spot, middle spot and small spot
Filters	Red-free, white and cobalt blue
Light Source	LED light
Source of Power	DC 7.4V
Charger	AC 100-240V, 50/60Hz;
Dimension of Main Part	142mm × 48mm × 128mm (long×breadth×high)
Weight of Main Part	230g



Indirect Ophthalmoscope



▶ YZ-25B

● Features :

- Advanced optical design avoids the glistening and provides the broad filed.
- Super-light one piece design.It's soft and comfortable enough to wear with the adjustable height and width.
- Equipped with +20D aspheric lens which provides clear image.

● Specification :

Visual Angle: $45^{\circ} \pm 5^{\circ}$

Pupil Distance: 52mm-74mm

Weight: $\leq 320\text{g}$ (excluding the head frame)

Adjustable Range of the Head Frame: Head Perimeter:530mm-630mm

Depth: 85mm-125mm

Illumination Source: 6V/10W halogen bulb

Input Voltage: AC220V22V/50Hz1Hz,AC110V11V/60Hz1Hz



▶ YZ-24B (Rechargeable Retinoscope)

● Features :

- The filament can be 360°rotated and upward and downward moved.
- Quickly and precisely measure the astigmatism axis. • The light can be converged, radiated and parallel
- Continuously adjustable brightness.
- Convenient quick recharging. • Anti-recharging and anti-discharging function protects the battery.
- Can also be connected with the head of ophthalmoscope.

● Specification :

Working Distance: 0.67m

Streak: 3mm-20mm

Illumination Source: 3.5V/2.8W halogen bulb

Streak Rotation: 360°

Input Voltage: AC220V22V/50Hz1Hz,AC110V11V/60Hz1Hz

Power(Main Body of Ophthalmoscope): Li+ battery pack DC:3.7V



▶ YZ-24B+YZ-11D (Rechargeable Retinoscope and Rechargeable Ophthalmoscope)



▶ DR-1900

● Specification :

- DR1900 Rechargeable Diagnostic Set
- 465-1902 Set complete with:3.5V Coaxial Ophthalmoscope,3.5V Rechargeable Retinoscope,2pcs of 489 Rechargeable Handle, DT802 Desk Charger,Power adapter,Carton Box.
- Ordering information
- Item Description
- 410-0010 3.5V Coaxial Ophthalmoscope
- 418-0012 3.5V Streak Retinoscope
- 489-0010 489 Rechargeable with battery
- 488-1000 DT802 Desk charger Set
- 410-0910 P49003.5V Spare bulb of ophthalmoscope
- 418-0910 R4180 3.5V Spare bulb of Streak Retinoscope



▶ YZ-24 (Streak Retinoscope)


● Features :

- The well positioned filament can be rotated for 360° and move upward and downward. Brightness of the streak can be adjusted.
- Quickly and precisely measure the astigmatism axis.
- The light can be converged, radiated and paralleled.
- Automatic turning off effectively protects the bulb.
- Two-steps adjustable brightness for bulb: S(Bright),W(Dark).

● Specification :

Working Distance:	1m
Streak:	3mm-20mm
Streak Rotation:	360°
Illumination Source:	3V/2.1W, Halogen Bulb
Input Voltage:	AC220V22V/50Hz1Hz, AC110V11V/60Hz





▶ KJ8C+KJ10C

● Specification:

KJ8C

Illumination form: Large light spot; small light spot; slit; central-net; red-free filter

Diopter compensation: 0, ± 1 , ± 2 , ± 3 , ± 4 , ± 5 , ± 6 , ± 8 , ± 10 , ± 12 , ± 16 , ± 20 , -25

Bulb: 2.5V, 1.6W halogen bulb

Battery : 2x1.5V dry cell

Packing size: 26cmx10cmx0.6cm

G weight: 0.15kg

KJ10C

Illumination form: Fibre optics

Magnification: 2.5X

Diameter of ear speculum: 2.5mm; 3mm; 4mm

bulb: 2.5V, 1.6W halogen bulb

Battery : 2x1.5V dry cell

Packing size: 26cmx10cmx0.6cm

G weight: 0.15kg



▶ DW-1100

485-1102: Set complete with: 3.5V Rechargeable Ophthalmoscope.3.5V Rechargeable Streak Retinoscope, 485 Wall Mount Transformer with handles, Power cable with plug, Metal plate, Carton Box

Ordering Information

Item: Description

410-0010: 3.5V Coaxial Ophthalmoscope

418-0012: 3.5V Streak Retinoscope

485-0100: 485 Wall Mount Transformer with 485 wall extension unit

992-020X: 020 2M Power cable with plug

410-0910: P4900 3.5V Spare bulb of ophthalmoscope

418-0910: R4 180 3.5v Spare bulb of Streak Retinoscope



▶ DW-1000

DW-1000 Set complete with : 3.5V Coaxial Ophthalmoscope, 3.5V Fiber Otoscope, 485 Wall Mount Transformer with handles, Specula dispenser, Ear-specular (2.7mm and 4.2mm, 35 pcs of each) Power cable with plug, Wooden plate (small size), Carton Box

Ordering Information

Item: Description

410-0010: 3.5V Coaxial Ophthalmoscope

461-0010: 3.5V Fiber Otoscope

461-0060: Specula Dispenser

485-0100: 485 Wall Mount Transformer with 485 wall extension unit

461-0075: Ear-specular (2.7mm) with 200pcs


461-0077: Ear-specualr (4.2mm) with 200pcs

992-020X: 020 2M Power cable with plug

410-0910: P4900 3.5V Spare bulb of ophthalmoscope

461-0910: T3100 3.5V Spare bulb of 3.5V otoscope






▶ DW-1050

- DW-1050 DW-1050 Set complete with : 3.5V Coaxial Ophthalmoscope, 3.5V Fiber Otoscope, 485 Wall Mount Transformer with handles, Specula dispenser, Ear-specular (2.7mm and 4.2mm, 35 pcs of each) Sphygmomanometer, Ear Therometer, Power cable with plug, Wooden plate (large size), Carton Box
- DW-1060 DW-1060 Set complete with : 3.5V Coaxial Ophthalmoscope, 3.5V Fiber Otoscope, 485 Wall Mount Transformer with handles, Specula dispenser, Ear-specular (2.7mm and 4.2mm, 35 pcs of each) Sphygmomanometer, Power cable with plug, Wooden plate (middle size), Carton Box

Item:	Description
410-0010:	3.5V Coaxial Ophthalmoscope
461-0010:	3.5V Fiber Otoscope
461-0060:	Specula Dispenser
485-0100:	485 Wall Mount Transformer
485-0080:	Sphygmomanometer
485-0085:	Ear Therometer
485-0088:	Ear Therometer Holder
461-0075:	Ear-specular (2.7mm) with 200pcs
461-0077:	Ear-specualr (4.2mm) with 200pcs
992-020X:	020 2M Power cable with plug
410-0910:	P4900 3.5V Spare bulb of ophthalmoscope
461-0910:	T3100 3.5V Spare bulb of 3.5V otoscope

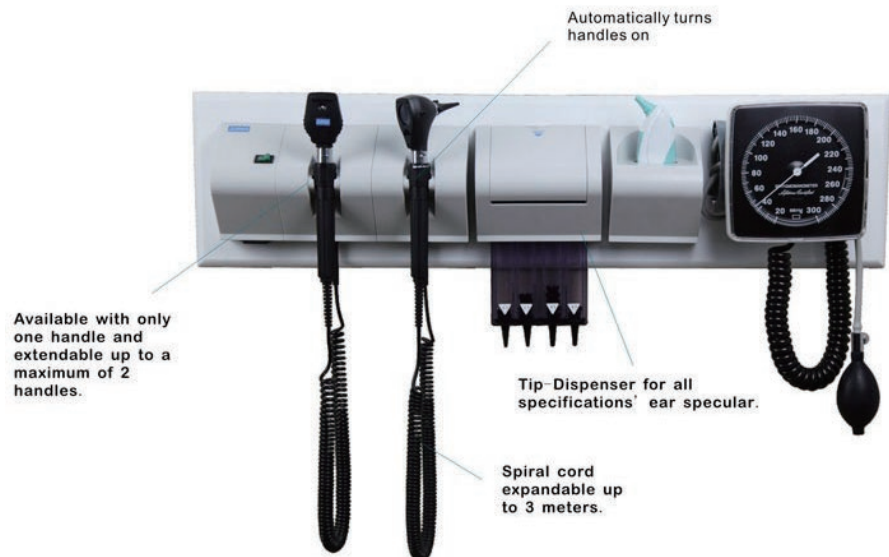

► SLE\SLF\SLH

Technical Data

2.5x is the most popular model. It offers the widest field of view and longest depth of focus.

Order Code	SLE2534	SLE2542	SLE2546	SLE2550
Magnification	2.5×	2.5×	2.5×	2.5×
Working Distance	340mm	420mm	460mm	500mm
Field of View	80mm	100mm	110mm	120mm
Weight without frame	71g	71g	71g	71g

3.0x is designed for dentists who need more magnification, which give you good field of view and depth of focus.

Order Code	SLE3034	SLE3042	SLE3046	SLE3050
Magnification	3.5×	3.5×	3.5×	3.5×
Working Distance	340mm	420mm	460mm	500mm
Field of View	70mm	84mm	92mm	100mm
Weight without frame	71.5g	71.5g	71.5g	71.5g

3.5x is the highest magnification available in Galilean Loupes, being suitable for specialist work within a smaller depth of view, and allows you to perform most dental procedures, such like cosmetic, crown and bridge etc..

Order Code	SLE3534	SLE3542	SLE3546	SLE3550
Magnification	3.5×	3.5×	3.5×	3.5×
Working Distance	340mm	420mm	460mm	500mm
Field of View	60mm	72mm	78mm	84mm
Weight without frame	72g	72g	72g	72g

► SLT

● Features:

- 2.5 and 3.0 magnifications available
- Extremely high resolution
- Precision Optics
- Custom Fit and Custom Working Distance
- Greatest Brightness and Depth of Field
- Ultra-lightweight, as little as 2 oz.(57g)(including the frame).



● Specification:

Magnification	Working distance	Field of view
2.5x	340mm/13"	60mm/2.4"
2.5x	420mm/17"	70mm/2.8"
2.5x	460mm/18"	80mm/3.1"
2.5x	500mm/20"	95mm/3.8"
Magnification	Working distance	Field of view
3.0x	340mm/13"	40mm/1.6"
3.0x	420mm/17"	46mm/1.8"
3.0x	460mm/18"	50mm/2.0"
3.0x	500mm/20"	54mm/2.1"

All lenses are multi-coated and anti-reflective, combining with infinity corrected optical system.




SLE



SLF



SLH



SM1000L

Features:

- OLYMPUS original optics with Zoom magnification
- Stereo and wide field of view with deep depth of field
- Motorized focus adjustment with foot control
- Prism design for better red reflex
- OLYMPUS quality ensures high and satisfied resolution
- Coaxial LED Light or Halogen Lamp illumination with long life time

Specification:

Optics	OLYMPUS
Eyepiece	10x wide field
Observation Angle	30°
Pupil distance	50–76mm
Diopter	±5D
Magnification	0.63/1.0/1.6/2.5/4.0
Field of View	10mm–63mm
Working Distance	≥170mm
Fine Adjustment	±20mm foot control
Light Source	LED
intensity	≥40,000Lux
Arm Extension	1100mm
Up and Down Adjustment	±150mm
Base	560mmx560mm
Foot Switch	Focus



SM2000J


Features:

- New design, portable, easy installation, flexible adjustment;
- Wide field of view, strong stereoscopic effect, depth field;
- Multi-function foot switch for easy and stable operation;
- It is used Japanese OLYMPUS main mirror (or GOOL main mirror);
- Coaxial lighting, halogen lamps, high quality light guiding fibers;
- Infinitely variable low noise, accurate positioning, good control.

Specification:

Type	OLYMPUS
Eyepiece	10x Wide field
Inclination Angle	45°
Pupillary Distance	50–76mm
Diopter Adjustment	±5D
Objective	φ45mm
Magnification	Matorized Zoom 4X 20X
Field of View	8mm–65mm
Working Distance	≥170mm
Fine Adjustment	±20mm Foot control
Type	Optical Fiber
Light Source	15V/150W Halogen Lamp or LED Light
Control	Stepless Control
Intensity	≥60,000 Lux
Power	~220V、50Hz
Length of Am Extended	840mm
Elevation	±100mm
Foot Switch	Motorized Focus and Zoom





SM2000L

Features:

- Operation microscope for ophthalmology
- Wet lab microscope for training
- Operation microscope for all surgery
- Video system and digital web set-up

Specification:

Optics	OLYMPUS
Eyepiece	10x wide field
Observation Angle	30°
Pupil distance	50–76mm
Diopter	±5D
x–y speed	2.2mm/sec foot control
Magnification	4X–20X motor control
Field of View	8mm–50mm
Working Distance	≥170mm
Fine Adjustment	±20mm foot control
Assist. Microscope	Stereo Coaxial
Magnification	4X、 7X
Light Source	Double Philip Tungsten Bulb, 15V 1501
intensity	≥80,000Lux
Arm Extension	1200mm
Up and Down Adjustment	±150mm
Base	560mmx560mm
Foot Switch	X–Y Focus/Magnification/Light



Wet-Lab


Features:

- Imported motor zoom device, low noise, good control performance;
- Concise appearance design, humanized operation, convenient installation and debugging;
- Same optical path assistant mirror, 4X, 7X;
- Equipped with an image recording system, a good platform suitable for teaching and training;

Specification:

Type	OLYMPUS
Eyepiece	10X wide angle
Inclination Angle	30°
Magnification	4X–20X motor control
Working Distance	200mm
Fine Adjustment	±20mm Foot control
Intensity	≥60,000 Lux
Red light reflection	Multi-focus multilayer reflection
Assistant mirror magnification	4x, 7x three-dimensional same optical path assistant mirror





SOM2000C

Features:

- Compact structure and complete functions.
- 4x~24x zoom magnifications, horizontal movement of foot control and fine focusing.
- Germany imported Schott optics ensure the sharp image and even field of view.
- Applied in operations and fine examinations of ophthalmology, ENT, surgery, etc.

Specification:

Eyepiece Magnification	12.5x/16B
Diopter Adjustment	±6D
Pupil Distance	50mm~75mm
Visual Angle of Eyepiece	30°~90°(Eyepiece moving between 0°~180° is optional)
Magnifications for Main Microscope (Diameter of Field)	4x~24x (41.5mm~7.5mm)
Objective Lens	f=200 (f=175/250/300 is optional)
Working Distance	190mm
Illumination Source	15V/150W, Medical Cold-reflection Halogen Bulb
Illumination Type	6°+0° Coaxial Illumination
Coaxial Illumination	≥40,000lx
Filters	Orange filter (cobalt filter is optional)
Reaching Radius of Arm	1020mm
Adjustable Vertical Range	250mm
Fine Focusing Range and Speed	30mm, ≤2mm/s
Speed for X-Y and Range	50mm×50mm, ≤2mm/s
Input Voltage	AC220V±22v/ 50Hz±1Hz, AC110V±11v/60Hz±1Hz
Power	200VA
Fuse	T4.0AL 250V (51S-040H)、 T8.0AL 125V (51S-080L)
Electrical Safety Standard	Executive Standard: GB9706.1-2007, Class I
Packing Volume	0.418m, 2 cartons
Total Weight	87kg



YZ20T9


Features:

- Advanced apochromatic technology and unique optical balanced technology effectively improves the color reversion and reduces surgeon's tiredness in operation
- Fine focusing knob is under the bottom of assistant binocular. The image of the assistant's microscope can be focused independently of the main surgeon, to avoid different diopters
- 20° oblique illumination can also be used as slit illumination. Slit width is continuously adjustable
- Can be applied in ophthalmology

Specification:

Eyepiece Magnification	12.5X/18B
Objective Lens	f=200
Working Distance	190mm
Magnifications for Main Microscope	4X、6X、10X、16X、25X
Magnifications for Assistant Microscope	6X、10X、14X
Diameter of Field	58mm、38mm、23mm、14mm、9mm
Adjustable Diopter	±7D
Adjustable Range for Pupil Distance	50mm~75mm
Maximal Resolution	119 LP/mm
Focus for Assistant Microscope	≥30mm
Illumination Source	12V/100W, cold reflection halogen bulb for medical use
Illumination Type	6° +0° coaxial illumination of cold light source and 20° Oblique Illumination (It can be used as slit illumination) Slit Width 1s adjustable
Coaxial Illumination	≥50000lx
Oblique Illumination	≥45000lx
Reaching Radius of Arm	1240mm
Adjustable Vertical Range	850mm~1350mm
Fine Focus Speed and Range	≤2mm/s, ≥50mm
Speed for X/Y and Range	≤2mm/s, 50mm×50mm
Input Voltage	AC220V±22V/50Hz±1Hz、AC110V±11V/60Hz±1Hz
Power	330VA
Fuse	AC250V T4.0A、AC125V T8.0A
Electrical Safety Standard	Executive standard GB9706.1-2007、Class I
Packing Volume	0.786m ³ , 5cartons
Total Gross Weight	213kg





YZ20P5

Features:

- All the lenses are multi-coated, mildewproof and anti-reflective
- Optional objectives: f250/f300/f350f/f400
- Column stand can be reflitted to holding stand. It can also be customized according to various operation requirements

Specification:

Eyepiece Magnification 12.5×

Objective Lens f=200

Working Distance 190mm

Magnifications for Main Microscope 5.3×,8×,12×

Diameter of Field Φ 37mm, Φ 25mm, Φ 16.7mm

Diopter Adjustment \pm 7D

Adjustable Range of Pupil Distance 50mm~80mm

Maximal Resolution 100LP/mm

Illumination Source 12V/100W,medical cold reflection halogen lamp

Illumination Type 6° +0 $^{\circ}$ Coaxial cold light source illumination

Coaxial Illumination \geq 30000x

Reaching Radius of Arm 870mm

Adjustable Vertical Range 700mm~1100mm

Fine Focusing Range 30mm

Voltage AC220V \pm 22 V / 50Hz \pm 1Hz,

AC110V \pm 11V /60Hz \pm 1Hz AC220V \pm 22v/ 50Hz \pm 1Hz,AC110V \pm 11v/60Hz \pm 1Hz

Power 120VA

Fuse AC250V T1.25A、
AC125V T2.5A

Executive Standard Electrical Safety Standard: GB9706.1-2007, type I

Packing Volume 0.2³m, 1 carton

Total Weight 41kg



▶ YZ50A


● Features:

- Split line provides the function of accurate focusing and makes the focusing more accurate and convenient;
- The use of pupil alignment spots eliminates stray light effectively;
- Targeting and focusing of infrared light improves greatly the feeling of patient comfort;
- Flash strength of eight adjustable forwards ensures suitable exposure;
- Functions of using periphery internal fixation standard, object images stitching and field-of-view can expanded to 77°
- Design of no eyepiece and colorful screen can target and focus conveniently and directly.
- With the function of right/left eye auto detection.

● Specification:

Images	Fundus color/red-free photography
View field	45°
Working Distance	41mm
Dioptric Compensation for Patient's Eyes	-34D~+35D total
	-15D~+13D with no dioptric lens
	-34D~-14D with minus dioptric lens
	+12D~+35D with plus dioptric lens
Min Pupil Diameter	Φ3.7mm
Internal Fixation Target	3 in center, 6 in the periphery with 60 ° detent interval
Backward and Forward Movement	45mm
Left and Right Movement	80mm
Up and Down Movement	30mm
Chinrest Movement	65mm
Input Voltage	AC220±22V/50Hz±1Hz,
	AC110V±11V/60Hz±1Hz
Input Power	300VA
Fuse	AC250V T3A
Light	12V/30W, Halogen
Electrical Safety Standard	GB9706.1-1995,ClassI Type B
Voltage Transformer Thermal Circuit Breaker	130°C





▶ LK-650

● Specification :

Parameter Model	LK-650A	LK-650B
Optical lens	Aspherics system	Aspherics system
Test mode	Non-mydiatic fundus	Non-mydiatic and FFA
Fundus Observation	Switching Optical anterior-posterior compensation lens	Moved platform
Focus	Split-line aligning focusing	
Digital Camera	CANON EOS Technology	
Color Image Resolution	5184*3456	
Monochrome Image resolution		1360*1024
Min.Pupil Size	3.3mm	
Compensation range	-25D ~ +30D	
Fundus observation para-position indication	Dots overlap	
Fixation target	External eye fixation lamp and 9 internal fixation target (LED dot matrix-Fully controlled by software)	
Maximum angle of view	45°	
Optical head tilting	N/A	Horizontal±30° Vertical±12.5°
Working distance	46mm (distance from examined eye to front of objective lens)	
software	Support Dicom 3.0, support hospital HIS/PACS system. Image processing, easily operate, strong analysis, support fundus Mosaic, image post processing, measurement, patient profile management	



LK-650A



LK-650B

▶ APS-AER Integrative

General

Mode: ASP-AER Integrative
 Working Mode: NON-Mydriatic
 Field of view: Up to 53 D
 Minimum pupil size: 3.5mm
 Patient diopter range: -10D to + 10D
 Observation light source: Infrared LED
 Eye fixation target: Internal LED + External LED
 Eye position aid: Alignment Dots
 Sensor resolution: 12M Max
 Display monitors: 7 Inch LCD+17 Inch post processing monitor
 Working distance: 40mm
 Base movement: F-B:50mm,L-R:90mm,U-D:30mm
 Fine adjustment: 15mm

Electrical

Power supply: AC 220V/110V 50Hz
 Working temperature: -5 degree -40 degree
 Working humidity: 0%-85%

Physical

Dimension: 487mm×310mm×630mm
 Weight: .32kg

Software

Image post processing: brightness,contrast,gamma,colour,smooth,sharp,etc.
 Focus processing: measure,mark,patching up,etc.
 Documents management: record,search,sort,report,etc.



CE

▶ APS-BER (Retinal Camera)

General

Working Mode: Non-Mydriation Color, Mydriatic FFA
 Eye position aid : Alignment dots
 Observing : Monitor + Anterior LCD
 Resolution: 12M Max
 B/W Resolution: 752×582
 Field of view : 45 degree
 Patient diopter range: 10D to +10D
 Working distance F-B : 40mm L-R:120mm U-D:80mm
 Horizontal tilting: ±30°
 Vertical tilting : ±12.5°
 Chin rest distance : 70mm
 Electric-table distance: 200mm
 Fixation: External LED+Internal target
 Light source: IR+LED+FLASH

Electrical

Power supply: AC 110V/220V 50Hz
 Working temperature: -5 degree -40 degree
 Working humidity: 0%-85%

Physical


Dimension: 350mm×550mm×600mm
 Weight: 50kg

Software

Image post processing: brightness,contrast,gamma,colour,smooth,sharp,etc.
 Focus processing: measure,mark,patching up,etc.
 Documents management: record,search,sort,report,etc.



CE



▶ APS-DER

Field Scope	up to 53°
Working distance	40mm
Non-mydratic Camera	Supporting
Minimum pupil diameter	3.3mm
Fundus fluorescein angiography	Flash and dynamic angiography
Observation light source	Infrared light
Refractive compensation range	$\geq \pm 15D$
Fixation	External fixation
	5 Internal fixation(9 internal fixation optional)
Assisted Alignment	Two round dots alignment
Focus way	Manual,Auto
Exposure way	Manual,Auto
Ineternet interface	Dicom 3.0 interface,LAN
The second viewing screen	Optional(7"LCD)
Eye position recognition	Auto
Working distance	Horizontal $\pm 30^\circ$ Up and down $\pm 12.5^\circ$
Working distance	42mm \pm 2mm
Moto-table	Electricmoto-table(elevator optional one)
Workstion	Electricmoto-table(elevator optional one)
Printer	High quality inkjet printer



▶ Reticam3000

ReticCam 3000 Plus: intelligent operation, high-resolution imaging

Reticam 3000 Plus is non-mydratic and fundus angiographic system with high resolution and is easy to operate. Equipped with Canon's super resolution camera, it not only presents high- definition fundus images ,but also includes powerful image analysis management system ,which provides necessary auxiliary approaches for fundus examination and mass screening in clinical ophthalmology and department of endocrinology .RetiCam 3000 Plus can also implement functions like cloud storage of data and distributed resource sharing by means of telemetry diagnosis system. so that doctors can read and analyze cases, and carry out telemedicine, etc..


Image Acquisition System

Acquisition mode	non-mydratic/ mydratic photograph; red free; eye's anterior segment photography; fundus fluoresceinangiography (optional)
Angle of vision	50°
Working distance	35 mm
Requirement for pupil	≥3.3mm
Digital acquisition form	external SRL
Sensor	218 megapixels
Diopter compensation	±25D
Anxiliary focus mode	double dot anxiliary focus

Others

Size	580mm(L)x200mm(W)x550mm(H)
Weight	20.3Kg
Power supply	220V/50HZ/5A





▶ HFC-100

● Features :

- High definition and stable image
- Non-mydratic and large field of view
- Easy one-handed operation and excellent portability
- Large data service and a variety of image acquisition mode
- Images real-time display, one button magnifying
- Non-mydratic and high definition imaging.
- Micro SD memory card up to 80,000 images
- USB and WiFi connection
- Low weight 450g , movable and portable
- Rechargeable battery provides up to more than 4 hours of continuous operation.
- Optional imaging modules for examination: posterior ophthalmoscope ,anterior segment ophthalmoscope, otoscope, rhinoscope, laryngoscope and dermatoscope

● Specification :

Model	HFC
FOV	40°
Minimum pupil	3mm
Refractive compensation	-20D~+20D
Light source	White LED/IR
Image resolution	1920×1080
Focus Mode	Manual
Screen	3.5" color
Power	≤6VA
Storage	8GB Micro SD card
Power supply	3.7VLithium Battery
Interface	Mini USB/Wifi
N. Weight	450g(Typical)
G. Weight	2.5kg
Size	160mm*90mm*190mm
Packing size	360mm*310mm*160mm



▶ HFC-150


● Features :

- Non-mydratic
- 3.97" Touch Screen
- 5 Internal Fixation Targets
- 45 ° Visual Field

● Specification :

Type	Non-mydratic
Filed of View	45 Degrees
Camera Sensor Resolution	5M Pixels
Fixation Targets	5 x LED, Internal
Minimum Pupil Size	3.5mm
Illumination	White LED & Infrared LED
Focusing	Manual
Focus Range	-20D-+20D
Display	3.97" Touch Screen
Image Format	JPEG(Photograph) ; 3GP(Video)
Type of Photography	Color,Mono,IR
Memory	16 GB Micro SD card
Data Connectivity	Micro USB; WiFi
Power Supply	Rechargeable Li-ion battery, 3. 7V
Charging Station	100-240VAC. 50/60HZ
Power Adaptor	5V DC, 2A
Dimensions	205mm x 123mm x 202mm (L/W/H)
Weight	420g
languages	Chinese,Chinese Traditional,English,Russian, French, German, Spanish, Portuguese, Italian





▶ HFC-200

● Features :

- Super high definition
- Manual/Auto focus system
- Super large touch screen
- Cloud service system

● Specification :


FOV	45°
Minimum pupil	2.5mm
Refractive compensation	-20D~+20D
Focus way	Auto/manual/real time auto focus
Fixation targets	8 internal targets fixation
Image resolution	16MP
Screen	3.97 inch TFT-LCD 800x480
Shoot type	IR/White LED
Packing size	360*290*210mm
Transmission and storage	Internal capacity 16GB;USB/WiFi/ BT/4G
Weight	560g
Power supply	Lithium Battery 3.7V 3400mAh
The battery continuously working time	6h(Standby time exceeds 24h)
Image/Video format	JPEG/3GP
Operating system	PC:Windows system APP:Android
ID Card reading and collection	Support
NFCcard reader	Support
Connect function	Professional software,APP,support DICOM,support cloud service system,patient data management software,support wireless printing




▶ APS-6000BER

● Specification:

Stimulus Type:	LED
Stimulator screen:	Hemispherical bowl, radius 30cm integrated
Stimulus Source:	Light emitting diode, wave length 580mm–650mm
Stimulus Size:	goldmann III
Stimulus Intensity:	≤1000 asb
Stimulus Duration:	Adjustable 0.2 to 2 seconds
Stimulus step:	total 27, step 1
Minimum inter-stimulus delay:	Adjustable 0.2 to 2 seconds
Background illumination:	4 asb
Lens holder diameter:	35mm (optional)
Stimulus points:	144(0–60°), 72(0–30°), 72(60–90°), 61(0–10° red), 114(blind spot)
Chin rest moving range:	vertical 70mm, horizontal 90mm
Fixation Method:	Automatic monitoring with two options. Available blind spot method, Eye tracking method. In both methods, fixation errors are to be immediately announced by visual and audible warnings. The standard video camera should provide visual of the patient's eye for additional monitoring.
Test Range:	Default test(0–60°), Yellow spot test (central 0–10°), Central 0–30° test, Quadrant test, Peripheral test (60–90°), Blind spot test, Custom test
Stimulator unit dimensions:	APS-6000B 67×66×38 cm (HxWxD) APS-6000C 75×60×65 cm (HxWxD)
Stimulator unit weight:	18 KG approx(APS-6000B) 40 KG approx(APS-6000C)
Stimulator unit power requirements:	110V/220V AC 50–60Hz

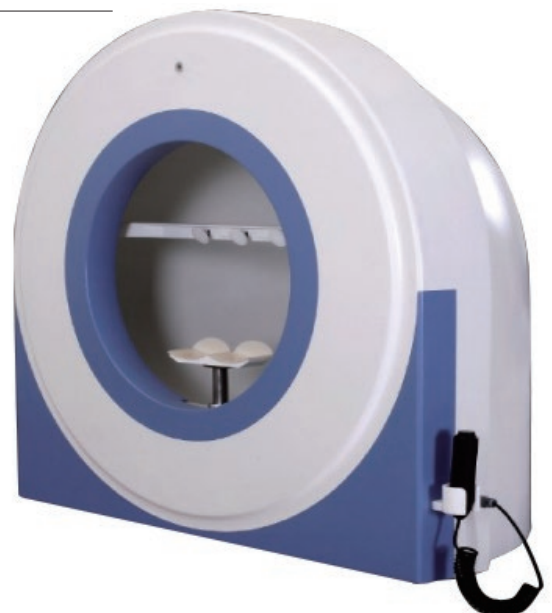



▶ APS-T00

Model	T00
Device Type	Integrated Type
Stimulate point appearing way	Optical projection
Detection method	Static perimetry
Detection range	0-90 degree
Background light	Yellow, white
Background brightness	White: 31.5asb, Yellow: 315asb
Visual Target Color	Red, blue, white
Visual Target Brightness	0asb~1000asb
Vision Target Interval Time	>/=200ms (customizable, no limit)
Visual target holding time	>/=200ms(customizable, no limit)
Brightness level	0-51db
Visual Target Size (Goldman)	I Grade II Grade III Grade IV Grade V Grade
Detection strategy	Full-threshold, fast threshold, custom, Two notation, three notation, quantify defects
Threshold policy	intelligent dynamic, fast intelligent dynamic, age-related, The threshold, a single strength
Threshold Test Mode	Center 10-2; Center 24-2; Center 30-2; Center 60-4; Nasal step; macula
Screening, special test mode	Center 40; Center 64; Center 76; 80; Center Armaly; Peripheral 60; Nasal step; Armaly Full Field Full Field 81; Full Field 120; Full Field 246; upper 36; upper 64; Esterman; Esterman
Fixation monitoring	Dynamic real-time video monitoring, physiological blind spot monitoring, Eye tracking curve, eye position offset alarm
Analysis Software	Reliability analysis, analysis of a single vision, triple report analyzes
Report Figure	Value, grayscale, the overall bias decibel chart, The overall deviation probability map, chart pattern deviation decibels, Pattern deviation probability plot, staring Figure



▶ ASP-100A

Nearly 20 years ultrasound research history, bring you ASP-100A series for ophthalmology biometry.

5.7" color LED touch screen, more convenient for your operation.

Immersion & contact methods, precise measurement.

Built-in thermal printer, realize print anytime.

I-station software enable massive storage, report transmission and print.

Sensitive, accurate measurement, show 8 groups with deviation meanwhile.

With IOP(intraocular pressure) adjustment after get tonometer measurement results.

A-San

10MHz red-light A scan probe

Resolution: 0.01mm

Accuracy: ± 0.1 mm

Gain adjustable: 0-120dB

Measurement range: 15~35mm(vel 1640m/s)

Measurements: ACD,Lens,Vitreous,and AXL

Examination modes: Support Normal,Cataract,Aphakic and Special eye model

Measurement mode: Immersion and contact,auto and manual

IOL formulas: SRK-II,SRK-T,BINKHORST,HOLLADAY,HOFFER-Q,HAIGIS

Pachymeter

20MHz angled pachymeter probe

Resolution: 1 μ m

Measurement range: 0.23~1.2mm

Accuracy: ± 0.01 mm

Single or nine points measurement,average reading increase accuracy

ASP-100A Biometer

Main unit

10.0MHz A probe

Gage block for A-Scan/Biometer

Power adapter

Touch screen pen

ASP-100P Pachymeter

Main unit

20.0MHz angled probe

Gage block for Pachymeter

Power adapter

Touch screen pen

ASP-100AP Biometer/Pachymeter

Main unit

10.0MHz A probe


20.0MHz angled probe

Two kinds of Gage blocks

Power adapter

Touch screen pen





▶ A Scan SW-1000

All touch screen, easy to operate
Large color display with backlight and brightness control
Portable design and light weight
Built-in thermal printer
Either combination unit (A+P) or single (A or P)

A Scan

Probe: 10MHz, with LED
Depth: 15mm~35mm
Precision: $\pm 0.05\text{mm}$
Examining Method: immersion and contact
Eye Mode: Phakic/Aphakic/Pseudo
IOL Formula: SRK-11, SRK-T, HOFFER-Q, HOLLADAY, BINKHORST-11, HAIGIS
Curve Freeze: control by foot switch
 Auto freeze and manual freeze

- Output: A scan table and calculation and thermal print
- Store: 10 cases(eyes), 5 reading each case
- Manual and auto modes

Pachymeter

Probe: 20MHz, angle of 45 degrees makes easier operation
Precision: 5um
Measuring range: 300um~1500um
Each grope is the average of 10 measures
Output: LCD display and thermal print
Display: Large color liquid-crystal screen
SINGLE mode and MAP mode



▶ ASP-100AB

Abundant data storage

Built-in 8GB D disk can store data, images and reports

USB Support U disk, software upgrade and one-key storage

DICOM3.0 Network port makes data transmission easily

Practical workstation

The system comes with simple, practical, easy-to-work software to print and manage data

Report-print, screen copy, IOL report, case reports with images

A scan parameter

10MHz with fixation Red Light

Resolution: 0.01mm

Accuracy: ± 0.1 mm

Measuring Range: 15~40mm

Measuring parameters: ACD, Lens, Vitreous body, AL

Measuring method: Contact and Immersion

Modes: Support Normal, Cataract, Aphakic and Special eye model

IOL formulas: SRK-T, SRK-II, BINKHORST, HOLLADAY, HOFFER-Q, HAIGIS Save up to 100 group of results

B scan parameter

10MHz probe, 10 frames/sec

Scanning Angle: 53°

Gain: 0~120dB adjustable, 8 steps manually adjustable TGC

Distance, circumference, area, volume and angle measurement

Pseudo-color: 8 kinds

Cineloop: 128 frames, measurement available

Post processing: 8 groups of curves

Standard configuration

Main unit

10MHz Mechanical sector B probe

10MHz imported A probe

Foot switch

Network cable

Workstation software

Optional configuration

Battery


Video recorder

Ethernet switch

Immersion shell

Print BOX





▶ AB Scan SW-2100

● Features :

- 10MHz B probe
- Software image workstation
- B,B+B,B+A,A modes
- Video review for 100 images
- PDF report output
- Optional 20MHz B Probe
- Vitreous plus fuction

● Specification :

A scan:

Probe:10MHz,with LED

Precision:±0.05mm

Depth:15-40mm

Measurement:10 Scanning results for each eye

IOL Formula:SRK-II,SRK-T,HOFFER-Q,HOLLADAY,BINKHORST-II,HAIGIS

Eye models:NORMAL/DENSE/APHAKIC/PMMA/SILICONE/ACRYLIC

B scan:

Probe:10MHz,magnetic driven,noiseless

Scanning Model:Sector Scanning

Resolution:Lateral ≤0.3mm; Vertical≤0.22mm

Output:PDF format case report,connect to normal printer

Scanning Angle:53°


Measure Model:distances,perimeter and area

Movies:100 images movie review,AVI ZIP JPG formal image output

Gray Scale:256

False Color:12 false colors.

Depth:60mm

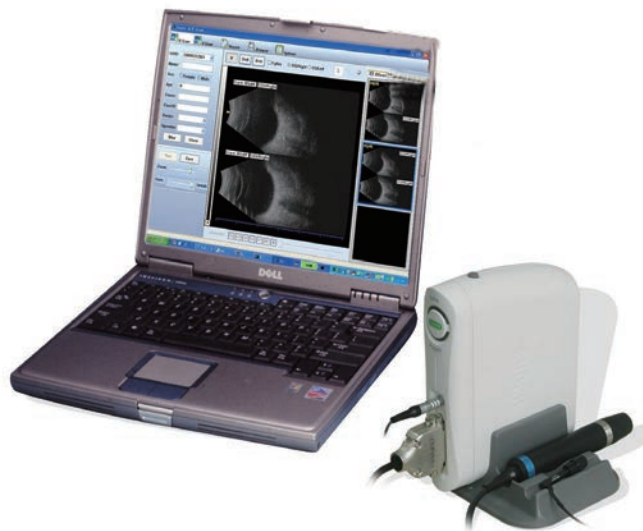

▶ AB Scan LK-2100S

● Features :

- Imaging Mode: B, B+A, B+B, A
- High Resolution Images
- Memory: up to 4 Images
- Zoom: 8 Steps
- Image Post Processing
- Distance Measurement
- 7" non-interlaced CRT Monitor
- Foldable Keyboard and Portable Design
- Trackball for Easy Measurement and Operation
- Real-time Clock
- Optional Image Output: Video Printer or Workstation



● Specification :

B-SCAN

Probe Frequency: 10MHz

Scanning Angle: 53°

Total Gain: ≥ 98 dB, adjustable

Resolution: axial ≤ 0.2 mm, lateral ≤ 0.4 mm

Zoom: 31mm ~ 63mm, 8 steps adjustable

Post Processing: 4 groups of curves (Linear, Logarithmic, Exponential, S-curves)

Multi-groups of Electronic Calipers for Distance Measurement

Various Area Measurement Methods

Gray Scale: 256 levels

A-SCAN

Probe: 10MHz with Fixation Red Light

Resolution: 0.01mm

Gain: ≥ 98 dB with an adjustable range of 0 ~ 59dB

Biometry Accuracy: $\leq \pm 0.06$ mm

Measuring Range: 16 ~ 39mm

Measuring Parameters: Anterior Chamber Depth, Lens Thickness, Vitreous Length, Axial Length

5 Different Measuring Modes: Automatic (Normal, Dense Cataract, Aphakic and Pseudo-aphakic) & Manual


5 Axial Readings

IOL Formula: SRK/II, SRK-T, BINKHO II, HOLLADAY, HOFFER-Q, HAIGIS

Others: AC 100~240V, 50/60Hz

Weight: 10Kg

Dimension: 360 x 300 x 260 mm



▶ AB Scan LK-2200

● Features :

- 8 Pseudo-color Mode
- High Resolution Images
- Imaging Mode: B, B+A, B+B, A
- Memory: up to 8 Images
- Zoom: from 34 ~ 60mm, 6 steps adjustable
- Variable Displaying Area
- 5 Segments Adjustable TGC
- Cineloop for 5.6sec
- Accurate Axial Measurement under B-mode (SMI-5)
- Manual Correction of Axial Measurement under A-mode (SMI-5)
- Multi-groups of Calipers for Distance Measurement
- Various Area Measurement Method
- Measuring Mode: Contact and Immersion
- Save up to 50 Groups of IOL Calculation Results
- 8 Groups' Average with Standard Deviation (S.D.)
- High Resolution Large Screen LCD Monitor
- B-Probe Protection: Hibernation after 10 minutes of Continuous Scanning
- Trackball for Easy Measurement and Operation
- Real-time Clock
- Optional Image Output: Video Printer or Workstation



● Specification :

B-SCAN

Probe Frequency: 10MHz

Scanning Angle: 53°

Resolution: axial ≤ 0.2mm, lateral ≤ 0.4mm

Zoom: 34mm ~ 60mm, 6 steps adjustable

TGC: -30dB ~ 0dB dynamic, 6 points manually adjustable

Dynamic Replay for 5.6 sec, 56 images displayed continuously or separately

Variable Delay Depth: 0 ~ 15 mm

Multi-groups of Electronic Calipers for Distance Measurement

Various Area Measurement Methods

Post Processing: 4 groups of curves (Linear, Logarithmic, Exponential, S-curve)

Total Gain: ≥98dB, adjustable

Gray Scale: 256 levels

A-SCAN

Probe: 10MHz with Fixation Red Light

Resolution: 0.01mm

Biometry Accuracy: ± 0.06 mm

Gain: ≥98dB with an adjustable range of 0 ~ 59dB

Measuring Range: 15 ~ 39mm

Measuring Parameters: Anterior Chamber Depth, Lens Thickness, Vitreous Length and Axial Length.

5 Different Measuring Modes: Automatic (for Normal, Dense Cataract, Aphakic and Pseudo-aphakic) and Manual 8 Groups' average with Standard Deviation (S.D.)

IOL Formula: SRK/T, SRK-II, BINKHOST-II, HOLLADAY, HOFFER-Q and HAIGIS

Save up to 50 groups of IOL calculation results and 4 groups of IOL constants


Others

AC 100 ~ 240V, 50/60Hz


Weight: 6Kg without LCD screen

Dimension: 460 x 420 x 80 mm


SW-6000




Main interface




Elevation Map




Combination View



Compare View



Contact Lenses Fitting



Keratoconus Screening

Specification:

Measuring method: Placido cone

Coverage: 0.25mm~11mm(Diameter)

Curvature radius: 6.35mm~9.53mm

Field of view: 11mm H x 11mm V

Illumination source: cone 760nm red LED

profile non-visible infrared 950nm red LED

fixation 530nm green LED

Diopter range: 28.0~65.5D

Placido rings: 32 rings


Measurement points: 11,520


Calibration ball: R 7.9375mm±0.001mm

Output: Optional printer

Weight: 5kg

Size: 360x380x450(mm)

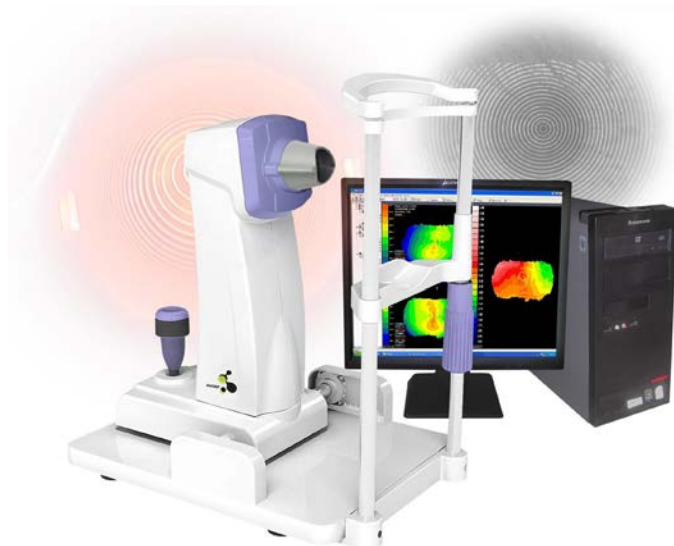



SW-3200

Features:

- Linear Scan and handheld probe
- Sulcus to sulcus measurement
- Full image mode and angle image mode display
- AOD and ACA measurement
- PDF Report output

Specification:

Frequency: 50MHz / 35MHz (optional)

Scanning Mode: Linear Scanning

Scanning Range: 16mmx9mm; 10mmx6.5mm

Image Resolution(full screen): 50 μ m

Output: PDF report output

Geometry Distortion: linear scan, no distortion, no compensation, undistorted image


Measurement: Distance, angle, perimeter, area

Working System: Windows XP / Vista


Display colors: 12 false colors




Sulcus to sulcus , angle to angle measurement.
Cornea and Anterior chamber measurement.




AOD and ACA measurement

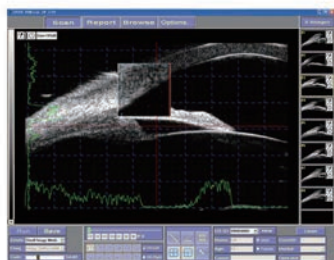


Magnify part of image
Size evaluation of image



U+A Mode



12 false colors

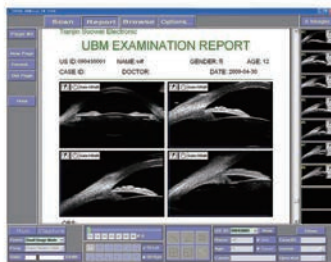

PDF report output



▾ LK-480A

● Features:


- All parts of the system are fully controlled and monitored by Microprocessor Technology:
- Smoothly and efficiently controlling the emulsifier process with digital frequency tracing technology of handpiece
- Easy operation and user-friendly interface with large TFT touch screen and functional menu
- Up to 10 sets of parameters preset meet different requirements and simplify the surgery operation
- Auto test checks tubing and handpiece problems (e.g.: block or leakage)
- The peristaltic pump gives complete control of aspiration flow rate as well as freedom from anterior chamber shallowing. This way can give stronger suction when working in I/A

- Built-in Vitrectomy and Cautery
- Intelligent Voice Reminder

● Specification:

Ultrasonic Emulsification (U/S)	
Frequency:	40kHz
Functional mode:	Continuance, Pulse, Linear, Burst
Continuance:	Emulsifying power Range: 0 ~ 100%
Pulse:	Frequency Range 1 ~ 99Hz
Linear:	Emulsifying power linearly controlled by the footswitch, varies between 0 ~ 100%
Burst-Stopping Time:	1.5 ~ 0s
Maximum Vacuum:	500 mmHg
Maximum Flux Rate:	40 ml/min
Irrigation/Aspiration Peristaltic Pump	
Flux Rate:	0 ~ 40 ml/min
Reflux Rate:	20 ml/min
Max Vacuum:	0 ~ 500 mmHg
VIT (Vitrectomy)	
Cutting Power Source:	Air Pump
Cutting Frequency:	20 ~ 600/min, step 10/min
Maximum Vacuum:	500 mmHg
Maximum Flux Rate:	40 ml/min
Cautery	
Maximum Power:	10 W ± 20 % (200Ω)
Type:	Bipolar
Power preset between:	0 ~ 100%





▣ LK-920

● Specification:

Laser Type:	Nd:YAG, Q-Switched
Wavelength:	1064 nm
Burst:	1,2,3 pulse per burst
Pulse Duration:	4.5 ns
Repetition Rate:	2.5Hz
Energy(Power):	A)1-pulse maximum output: 11mJ
	B)2-pulse maximum output: 9mJ
	C)3-pulse maximum output: 28mJ
	D)Output Energy Regulation: 100%~6% adjustable by 7 steps
Cone Angle:	18°
Spot Size:	30 um
Aiming Beam Wavelength:	633 nm
Cooling System:	Air Cooled
Dimension:	765mm × 610mm × 420mm
Weight:	19 Kg



► CRO-100

● Features :


- Confocal Laser Scanning
- High resolution video capture
- Multiband fluorescence imaging and photographing
- Non-mydratic and continuous shooting, smooth operation
- Using laser scanning technology
- High resolution is up to 1024 ×1024 pixels
- Non-mydratic, real-time display and dynamic capture
- Multi-optional imaging modes: FFA/ICGA/IR/RF/AF
- Suitable for minimum pupil size up to 2mm
- Low light photographing makes patients more comfortable

● Specification :

FOV	15°,30°,60°
Minimum pupil	2mm
Working distance	20mm
Horizontal moving range	Forward 95mm, left/right 100mm
Vertical moving range	30mm
Refractive compensation	-15D~+15D
Imaging mode	FFA/ICGA/IR/AF/RF
Laser specification	785nm/802nm, 488nm
Image resolution	5um
Image size	1024×1024
Interface	USB 3.0
Image format	JPEG, DCM
Power	100-240V~47-63HZ, 1.62-0.72
N.W.	6.25kg



Non Contact Tonometer



ST-1000

Features:

◆ Product features

Auto tonometer utilizes image control and feature recognition for auto 3-D positioning of xyz with reliable judgment and measurement results, and easy to operate. The air non-contact approach to measure IOP can also be used for corneal thickness (ST-1000P).

◆ Performance Features

1. Auto 3-D positioning of xyz results in precise and reliable measurement
2. Full-auto measurement for both right and left eye data without manual switch
3. Easy to operate the tonometer with color touch monitor
4. Stable data of IOP through soft air measurement
5. To compensate corneal thickness measurement of IOP

Specification:

Basic Specifications

Intraocular pressure (IOP) 1mmHg~ 30mmHg /1mmHg ~60mmHg
measuring range: (precision of 1mmHg)

Measuring system: dual sensor system of light and pressure

Working distance: ≥ 11 mm

R/L: automatic detection and display

Measuring result: 10 times per eye; 3 times result printing per eye

Recording: build-in printer

Measuring mode: auto/manual

Focus: when luminous spot is in the focus frame, 2 modes can be chosen.
auto mode: auto intraocular pressure measurement.
manual mode: when it's good focus, the frame will turn yellow into green, and click to start the measurement.

Error indication: if the measurement signal is weak, the IOP will be enclosed by (), or display "ERR "

Safety limit button: install measurement for minimum distance between head and patient

Safety functions: the distance between air nozzle and cornea is controlled in preset range(such as 11mm); it will stop going forward when the cornea is too closed to air head.

Movement range: ≥ 30 mm (front to back)/ 90mm(left to right)/ 30mm(vertical)

Jaw layer vertical movement: 0-65mm with under jaw layer

Display mode: 10.1-inch HDMI color LED touch manitor

Output port: USB2.0


Working platform: electric elevating platform

Others

Size 380 mm (L) x 460mm (W) x 505mm (H)

Weight: 19.7kg

Power supply: 220V/50HZ

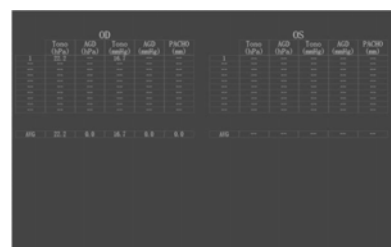

▶ Reichert 7

- Reichert 7, Reichert Technologies' seventh generation non-contact tonometer, is the most user friendly NCT ever. With a number of new features, including an easy to navigate touch screen interface and multiple-measurement mode, Reichert 7 will be a welcome addition to your practice. The totally automated operation results in error-free measurements and high patient throughput. Measurement speed and simplicity without sacrificing accuracy.

● Features :

Alignment is completely automated, no need for joysticks

No chinrest or elevation controls necessary – patients simply lean against the forehead rest

(Optional motorized chinrest is available, Catalog Number 16049)

Easy-to-use, touch screen user interface

One-touch, single or multiple-measurement mode

Clearly displays all measurement data

EMR connectivity via USB port

Internal printer simplifies record keeping

Multiple-measurement mode:

Reichert 7 features an all-new, one-touch, multiple-measurement mode that delivers 3 or 4 measurements with a single press. This new feature saves time, increases accuracy, and ensures the highest level of comfort for your patients.

User interface:

The touch screen interface features an easy-to-use, icon-based operating system enabling even inexperienced users to make measurements in seconds. The full color display guides the operator through the measurement process showing everything from the alignment of the eye, to the display of the readings. Set up menus and instrument options are also easily accessible and simple to navigate.

Soft puff and quiet operation:

Reichert 7 is designed to make the entire measurement process a comfortable and non-intimidating experience for patients. The instrument features the quietest operation and softest air puff of any NCT available.

Left/Right sliding headrest:

A sliding headrest enables easy patient positioning to ensure fast and comfortable measurements. The operator simply slides the headrest to the left or right position and the patient positions their head against the comfortable headrest pad. Reichert 7 automatically detects which eye is being measured.


Bright LED array for fast fixation:

The Reichert 7 nosepiece contains an array of bright LEDs. These provide an obvious visual cue to the patient for fast fixation and alignment, thereby reducing exam time.

Accuracy, simplicity, speed:

Operation of Reichert 7 is extremely quick. Patients simply lean against the forehead rest while the operator touches an icon on the screen to activate the fully automated alignment and IOP measurement process. The measurement is taken with speed and simplicity unlike any other NCT, without sacrificing accuracy.





OSE-2000/OSE-200AS

Features:

- High performance at a low price
- Modular design increases flexibility, reusability and maintainability. We can provide personalized design according to the customers' needs.
- With the powerful software, OSE-2000/OSE-2000AS has clear, easy-to-use interface and supports multi-language.
- Anterior segment analysis template
- Anterior segment with optional modules, OSE-2000/OSE-2000AS be able to observe and analyze the anterior segment.

Specification:

Tomographic imaging	
Purpose	Cross sectional imaging of the retina
Signal type	Photon scattering from tissue
Light source	Super luminescent diode, 830nm
Optical resolution	$\leq 0.75\text{mw}$ (on the cornea)
Axial resolution	6 μm in tissue
Lateral resolution	15 μm in tissue
Scanners	Galvanometer mirror
Scan mode	Line, concentric ring, repeat, arbitrary-angle
Scan rate	20,000, A-scans per second
Acquisition time	40 pictures per second
Scan depth	2mm in tissue
Fundus imaging	
Purpose	Fundus observation and real-time registration
Signal type	CCD imaging
Field angle	29°x23°
Viewing method	19-inch color flat panel display
Illumination	LED
Internal fixation	LED dot matrix
External fixation	Adjustable blinking LED
Minimum pupil diameter	2mm




Mocean 3000 Plus

Specification:

OCT Imaging	
Methodology	Spectral domain OCT
Optical source	Superluminescent diode (SLD), 840nm
Scan speed	Mocean 3000:18000 A-scans per second Mocean 3000 Plus:32000 A-scans per second
Axial resolution(optical)	5 microns(in tissue)
Tranverse resolution	15 microns(in tissue)
A-scan depth	2.1mm
Minimum pupil diameter	2.5mm
Scan patterns	Macula:HD line scan(6/12mm), 3D(6*6mm) scan, six-radial linescan(6mm) Disc: 3D(6*6mm)scan Anterior segment: radial scan,HDline scan
Fundus Imaging	
Methodology	Scanning laser ophthalmoscope (SLO)
Optical source	laser diode(LD),750nm
Live fundus imaging	live during scanning
Field of view	45 degrees
Software analysis	
Retina	Macular thickness analysis 3D and C-Scan analysis Ganglion cell volume analysis
Glaucoma	RNFL thickness analysis Progression analysis
Anterior segment	Corneal thickness analysis
Electrical and physical	
Weight	25kg
Dimension	540(L)*340(W)*624(H)mm
Fixation	internal,external
Diopter range	-20D to +20D(diopters)
Computer	
Processor	intel 15 quad-core CPU,4G DDR RAM
Operating system	Windows 7 professional 32 bit
Graphics	Quadro K600
Storage	1T hard disk
Display	22 LCD





OCT-500

Features:

◆ Compact Design


Everything is inside this compact body. No external computer is needed. Plug in the power cable, then you are ready to go.

◆ PC Inside

Data acquisition and processing are accomplished by the internal computer. The data can be transported via ethernet or external harddrive. Peripheral devices, such as keyboard or printer, can be connected to the computer ports.

◆ Easy Installation

No complex connection or setup. Compact body can fit in even small space.

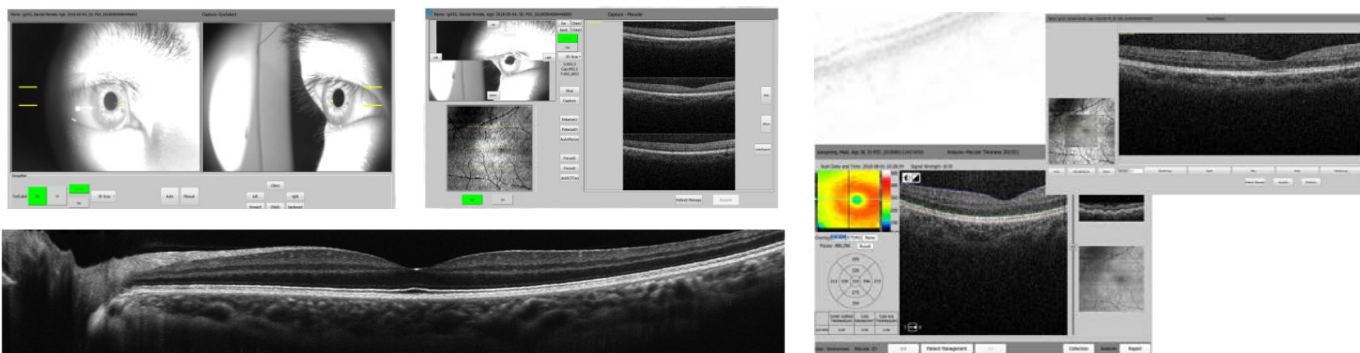

Specification:

Methodology: Spectral domain OCT

Axial resolution: $\leq 6\mu\text{m}$ (in tissue)

Transverse resolution: $\leq 20\mu\text{m}$ (in tissue)

Scan depth: ≥ 2.5 mm (in air)

Scan range: ≥ 6 mm

Scan speed: $\geq 24,000$ A-scans/sec, up to 36,000 A-scans/sec

Scan modes: 3D Raster Circle

Fundus image: OCT en face

Focus adjustment: -15D to $+15\text{D}$

Pupil diameter: ≥ 3 mm

OCT light source: 840 nm SLD


Optical power: $750\mu\text{W}$ (at cornea)

Operation: 13.3" touch screen, optional external mouse or keyboard

Power supply: 100–240 V, 50/60 Hz

Dimensions: 497 mm x 395 mm x 490 mm (L x W x H)

Weight: 34 kg (75 lbs)

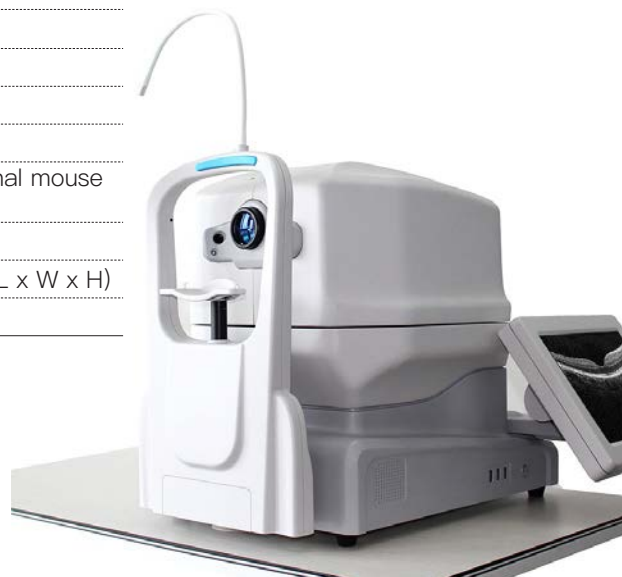

▶ OT-1000


● Features :

- This table is new product developed according to the requirements the hospital clinics, especially suitable for the ophthalmological surgery.
- The significant characteristic of this operation table lies in the lowest height of 500mm, convenient for the doctors to conduct ophthalmological operations with sitting posture, equipped with hand rests.
- The ascending and descending movement of the operation table is done by the electric handspike with safe buttons.

● Specification :

Length:	2100mm
Width:	550mm
Max Height:	770mm
Min Height:	520mm
Modulation Range of Ascending and Descending of the Head Plank:	100mm
Supply:	AC 220±10%, 50HZ
Volume:	2105×725×885mm





▶ ALE-410

- With the advanced technology and the imported PC wheel, SJG-5202 Automatic Edger(PC Lense Compatible) gives the best performance in processing PC lens, as well as the normal CR39 lens and the glass lens

● Specification:

Lens diameter: Ø22-Ø80mm
Lens gripping force: 0.45-1.0.Mps(multi-steps)
Stand Wheel diameter: Ø100mm
The speed of the sand wheel: 16.7m/s
Power: AC220V(110)/50Hz(60Hz),400VA
Working temperature: 5°C-40°C
Size of the machine: 510X410X470
Weight: 48Kg
Circulating water connection or city water connection(optional)



▶ ALE-510

- With the advanced technology and the imported PC wheel, SJG-5188 Automatic Edger(PC Lense Compatible) gives the best performance in processing PC lens, as well as the normal CR39 lens and the glass lens

● Specification:

Lens diameter: Ø18-Ø80mm
Lens gripping force: (multi-steps)
Stand Wheel diameter: Ø100mm
The speed of the sand wheel: 16.7m/s
Power: AC220V(110)/50Hz(60Hz),400VA
Working temperature: 5°C-40°C
Size of the machine: 510X410X470
Weight: 48Kg
Circulating water connection or city water connection(optional)



▶ ALE-1000B

● Specification:

AUTO LENS EDGER

Dimension: 25mmx510mmx510mm

Weight: 49kg

Voltage: AC 220v/110v 50/60Hz

Power: 550w

Size range: ø22–80m m

Clamping pressure: Third gear adjustable

Wheel diameter: ø100mm

AUTO LENS SACNNER

Dimension: 240mmx180mmx130mm

Weight: 5kg

Voltage: AC 220v/110v 30/60Hz


Power: 60w

Screen tilt angle: 20°–100°

Touch screen: 7inch capacitive screen

Quantity of connecting with
the main machine: 2 unit





▶ ALE-2000

● Features :

Auto Edger

- A variety of material of lens can be processed, rapid edging to be molding.
- Bevel or platband can be polished.
- Various grinding pressure meet the demands of different lenses.
- On-line function.

Tacer Center

- Integrating the optical scanning and center finding.
- Accurately getting the size and shape of sample lens only needs 3 seconds.
- Real-time image, leading and confirming if the lens arrives the most appropriate centric position.
- Automatically avoid the effect of lens degree, prism and artificial parallax .
- Simultaneously connect 2pcs Auto Edgers to build a machining center.

● Specification :



Auto Edger



Tacer Center

	Auto Edger	Tacer Center
Scanning sample lens:	YES	YES
Scanning frame:	NO	NO
Glass rough grinding wheel:	YES	YES
PC rough grinding wheel:	YES	YES
Bevel and rimless finishing fine grinding wheels:	YES	YES
Bevel and rimless finishing buffing wheels:	YES	YES
Automatic press-sucking:	NO	NO
Automatic slotting and safe-edging:	NO	NO
Graphic storage:	YES	YES
Bifocal lens making software:	YES	YES
Graphic rotating and editing:	YES	YES
Progressive Additional lens editing:	YES	YES
Software update:	YES	YES

▶ ALE-3000

● Features :

- A One-button operation, precise and fast scanning, accurate centering
- Super large touch screen, 1:1 ratio display, visual comparison between frame and scanned graphics
- Powerful and stable data processing, scanning graphics editable, multi-machines interconnection, greatly high cost-effective


EDGER TECHNICAL INDEXES

Graphic editable and scalable functions	
Bidirectional water jet and builtin lighting in processing cabin	
Max. number of stored images:	400pcs
Adjustable beveling position	
Lens Material:	Plastic, Polycarbonate, High index plastic, Glass, Trivex
Diameter of diamond wheels group:	100mm
Edging Mode:	Beveling(normal/auto/manual mode), Flat edging, Polishing
Max. Cutting Diameter:	80mm
Mini. Beveling Size:	22mm
Mini. Flat Edging Size:	20mm
Max. Frame Center Distance:	100mm
Display:	10.4 inch color TFT LCD touch screen with angle adjustable
Input Voltage:	AC220V, 50Hz / AC1 10V, 60Hz
Output Voltage:	DC5V3A. DC24V5.8A
Power Consumption:	1000WN. Weight: 48kg
Dimensions:	636mm x 452mm x 591mm

SCANNER/BL OCKER TECHNICAL INDEXES

Imaging System:	Dual center optical imaging system
Scanning and Positioning System:	Scanning imaging, precise center positioning
Scanning Time:	<3s
Scanning Precision:	0. 1mm
Display:	8 inch color TFT LCD touch screen
Power Supply:	AC100-240V 50/60Hz
N.Weight: Mini. Beveling Size:	9kg
Dimensions:	470mm x 230mm x 320mm





▶ PM-100

● Features :

- Lens clamping device, easy for operation.
- With three suction cup of Takubo, Briot and Topcon, easy to swap for a different lens edger.
- Cutting templates speed quickly and processing accurately.

● Specification :

Electric Voltage: 220V/50Hz or 110V/60Hz

Power: 50W

Weight: 4kg

Volume: 34(L)x21(W)x19(H)cm

Difference between model A and B: PM-100A: Stainless parts plus imported knives

PM-100B: Copper parts plus Chinese knives



CE

▶ GM-100 (Grooving Machine)

● Features :

- Manual adjustable, precise controlling
- Limited sizes of grooving:
 - for oblong corner lenses: $\varnothing 22 \times 50$
 - for round corner lenses: $\varnothing 22 \times 56$
- Adopt new cutter wheel for grooving
- Adopt low sound electric motor (100 Watt)



CE

▶ GM-150

● Features:

- Two choices of cutter: 0.55cutter and PC lens cutter
- Never hurt the lens (because the guide bar no need)
- Grooving available by the curve of the frame
- Any shape of lens is available
- Max.grooving: L54mm, W15mm
- Easy operation for anybody

● Specification:

Grooving depth: 0~0.7mm

Grooving width: 0.55~0.6mm

Lens edge thickness: 1.2~11.0mm

Available lens: 15-54mm

Lens motor speed: 2.5~3r/min

Cutter motor speed: DC110V4600r/min, DC220V4900r/min

Power supply: AC100~120V/60HZ, AC200~240V/50HZ

Dimensions(packing): 270mm(L)*230mm(W)*200mm(H)

Weight(packing): 3kgs



CE

▶ LB-100 (Layout Blocker)

● Features:


- Rapidly set the lens securely
- Precision compensation of the lens and suction cup position
- Bifocal lens can be positioned quickly and accurately

● Specification:

Electric Voltage: AC220V/110V 50HZ/60HZ



Three-hole Driller



▶ TH-100

● Features :

- Choose lens frame with supplementary lenses, drill three holes after that pupil height line and PD were drawn.
- And then replacing the pattern, it can and be directly installed and used at edge.

● Specification :

Electric Voltage: 220V/50HZ or 110V/60HZ

Power: 90W

Dimensions: 230(L)×130(W)×210(H)mm

Weight: 2.5kg



CE

▶ DM-100 (Drilling Machine)

Speed of revolution: 1400T/MIN

Electric Voltage: 220V/50HZ or 110V/60HZ

Weight: 4kg



CE

▶ DM-200

● Features:

- The operation procedures are highly intelligent and totally digital.
- Compared to the hole position of the pattern lenses, it has higher process accuracy whose process deviation is less than 0.075mm in both X-axis and Y-axis.
- It has auto position clamping equipment which allows remaining the same process accuracy after the change of clamps.
- The screen shows the drill position and coordinates data, and gives guidance to the operation.
- The hole position memory function allows to process the set hole positions continuously.
- There're two measure modes to choose which are original pattern measure mode and frame position measure mode.
- It has mirroring mode in the process.
- The head can automatically reposition if it's removed from its position accidentally.
- The instrument drills automatically in a set order, and can be corrected by pressing the number button if any hole is missed by wrong operations.

● Specification:

Voltage: AC100V-240V DC24V

Power: 50W


Weight: 5KG

Dimensions: 302x228x270mm

Drilling Speed: 1-5000rpm

Moving Range: X-axis 155mm Y-axis 38mm





▶ SM-100

● Features :

- Two pieces of rotated bits including 1.0MM and 0.8MM.
- Convenient and quick operation, improve the efficiency of the work.

● Specification :

Electric Voltage: 220V/50Hz or 110V/60Hz

Power: 100W

Dimensions: 230(L)x150(w)x160(H)mm

Weight: 1.5kg



▶ AP-100 (Auto Polisher)

● Specification :

Electric Voltage: AC220V/110V 50HZ/60HZ

Dimensions: 230(L)x150(w)x160(H)mm

Weight: 6.7kg



CE

▶ HE-50 (Hand Edger)

● Specification :

- Original appearance design
- Good adding and draining water system
- Selector switch to change the rotating direction
- Good grinding effects: smooth and fine



▶ HE-100

● Specification :

Wheel width:	35mm, right rough grinding 16mm, left fine grinding 19mm, edge trimming
Rough grinding:	180#, fine grinding: 240#, 280#, 320#(Optional)
Electric Voltage:	AC200-240V/50HZ AC110-120V/60HZ
Dimensions:	230(L)x150(w)x160(H)mm
Weight:	8kg



CE

▶ HE-150

● Features :

- High speed grinding wheel
- 3 wheels combination, rough, fine, polish/"V"
- With a special lamp, convenient operation

● Specification :

Electric Voltage:	AC200-240V/50HZ AC110-120V/60HZ
Dimensions:	395(L)x245(w)x295(H)mm
Weight:	9kg




▶ HE-200

● Specification :

Voltage:	110V/60Hz 220V/50Hz
Power:	120W
Weight:	15kg
Dimensions:	450x330x310mm





▶ HE-250

● Features :

- Three choices of configure:#750,#770 and #780
- Gracefull and generous appearance design
- Fireproof and disinfectant plastic cover
- Electronic induction switch
- Water circulation system inside

● Specification :

Power supply:	AC100-120V/60Hz AC200-240V/50Hz
Rated power(motor):	150W
Rated power(water pump):	3W
Width of diamond wheel:	35mm,30mm,20mm
	Diameter of diamond wheel:100mm
	Dimensions(packing)
	430mm(L)x270mm(W)x280mm(H)
G.Weight:	9.1kgs
N.Weight:	8kgs
Max.volume(waler container)	
	925ml w/o pump. 820ml w/pump



CE

▶ UC-100 (Ultrasonic Cleaner)

● Features :

- High efficient ultrasonic vibration system
- Good water-proof system inside
- Delicate design of cover reduce the noises effectively.

● Specification :

Electric Voltage: 220V/50Hz or 110V/60Hz

Power: 50W

Dimensions: 220(L)x195(w)x255(H)mm

Weight: 2kg



CE

▶ UC-120

● Features:

- Same features as the products in the standard series
- 3-minute automatic timer
- CD-2800 is the most influential model among all ultrasonic cleaners in China
- Its industrial design, sizes and Specification have become the basis for imitation by other companies.
- It has been a popular product on the market for eight consecutive years
- Annual volume over 250,000 units
- Accumulative volume over 2.37 million units



● Specification:

Tank Capacity:	600ml
Maximum Level:	500ml
Tank Material :	stainless steel SUS304
Power Supply:	26W AC100V,50/60Hz,35W AC100-120V,60Hz,50W AC220-240V,50Hz
Frequency:	42000Hz
Unit Size:	20x12.5x14cm(7.8"x4.9"x5.5")
Inner Carton Size:	26x16.7x18cm(10.2"x6.5"x7.0")
Master Carton Size:	54x53x38cm(21.2"X20.8"X14.9")
Net Weight:	0.78kg(1.7lb)
Unit Weight of inner carton:	1.1kg(2.4lb)
Qty per Master Carton:	12pcs/ctn
Gross Weight:	15.5kg(34.1 Lb/ctn)
20GP:	3000pcs
40GP:	6000pcs
40HQ:	6720pcs


▶ UC-150

- Same features as the products in the Standard series
- 3 timer settings: 3 min, 5min, and 10min
- The tank and the cleaning effect are the same as CD-2800
- Added a blue LED light on the lid compared to CD-3800B1
- Leak-proof is improved over CD-2800,same as CD-3800B1
- Same price but better price to performance ratio compared to CD-2800 and CD-3800B1

● Specification:

Tank capacity:	600ml	Maximum level:	500ml
Tank Material:	Stainless SUS304		
Power supply:	35w AC100-120V, 50/60Hz;		
		35w AC100-120V, 50/60Hz;	
		50W AC220-240V, 50Hz	
Frequency:	42,000Hz		
Unit size:	21.08x14.5x14.0 cm		
Inner Carton Size:	26.1x16.9x18.1		
Master Carton Size:	54.0x53.0x38.0cm		
Net Weight:	0.9kg (1.9lb)		
Unit Weight of Inner Carton:	1.2(2.6lb)		
Qty per Master Carton:	12pcs/ctn		
Gross Weight:	15.5kg/ctn(34.1lb/ctn)		





▶ UC-160

● Specification:

Tank Capacity:	600ml
Maximum:	500ml
Power Supply:	30W AC100V 50/60HZ
	35W AC100-120V 50/60HZ
	50W AC220-240V 50/60HZ
Digital timer settings:	180s-300s-480s-600s-90s
Frequency:	42000Hz
Tank Material:	Stainless steel SUS304
Tank Size:	16.1x8.5x5.0cm(6.34"x3.35"x1.97")
Unit Size:	20.4x14.0x13.0cm(8.04"x5.52"x5.12")
Inner Carton Size:	23.8x16.7x16.1cm(9.37"x6.58"x6.34")
Master Carton Size:	49.2x36.0x34.2cm(19.4"x14.2"x13.5")
NetWeight:	0.98kg(2.16lb)
Unit Weight of Inner Carton:	1.23kg(2.721b)
Qty per Master Carton:	8pcs/ctn
GrossWeight:	10.8kg(23.81b)



CE

▶ UC-180

● Specification:

Tank Capacity:	800ml
Maximum:	650ml
Power Supply:	48W AC100V 50/60HZ
	55W AC100-120V 50/60HZ
	55W AC220-240V 50/60HZ
Digital timer settings:	180s-300s-480s-90s-600s
Frequency:	42000Hz
Tank Material:	Stainless steel SUS304
Tank Size:	18.0x8.7x5.8cm(7.1"x3.4"x2.3")
Unit Size:	22.0x13.8x14.1cm(8.7"x5.4"x5.6")
Inner Carton Size:	25.6x17.2x17.2cm(10.1"x6.8"x6.8")
Master Carton Size:	52.5x35.5x36cm(21.1"x14.2"x14.4")
NetWeight:	1.27kg(2.8lb)
Unit Weight of Inner Carton:	1.6kg(3.5lb)
Qty per Master Carton:	8pcs/ctn
GrossWeight:	13.8kg(30.41b)



CE

▶ UC-200

● Specification :

Ultrasonic Frequency:	42,000 Hz
Tank Material:	Stainless steel SUS304
Volume:	1,300 ml
Time Control:	5 Cycles with Digital time display
Power supply:	AC 110-120V 60Hz AC 220-240V 50/60 Hz
Ultrasonic power:	60 W
Packing Size:	295x238x200mm (LxWxH)
Weight:	2.15kg



CE

▶ UC-250

● Specification :

Ultrasonic Frequency:	42,000 Hz
Tank Material:	Stainless steel SUS304
Volume:	1,400 ml
Time Control:	5 Cycles with Digital time display
Power supply:	AC 110-120V 60Hz AC 220-240V 50/60 Hz
Ultrasonic power:	60 W
Packing Size:	295x238x200mm (LxWxH)
Weight:	2.15kg



CE

▶ FH-50 (Frame Heater)

● Specification :

- It makes features of quick heating, big wind force, the frames uniform heating.
- Temperature adjustment function to ensure a desired temperature

Electric Voltage:	220V/50Hz or 110V/60Hz	Power:	450W
Temperature:	70°C-130°C		
Weight:	1kg		
Volume:	31(L)x13.5(w)x19(H)cm		




▶ FH-100 (Frame Heater)

● Specification :

- Rapid heating and strong air output
- Heat frame uniformly
- Temperature adjustment function to ensure a desired temperature

Heating heating(Max.):	110°
Power:	600W
Noise:	≤50dB(A)





▶ FH-120

● Features :

- Digital frame heater
- Electronic temperature control system
- Fireproof plastic cover

● Specification :

Power supply: AC100-120V/60Hz, AC200-240V/50Hz

Power rating: 600w

Rated power(motor): 6w

Rated power(heating wires): 240gs

Available temperature: 40℃-150℃

Wind speed: 1.8m/s

Dimensions(packing): 235mm(L)×125mm(W)×250mm(H)

Weight(packing): 1.66kgs



▶ FH-150

● Specification :

Power: 220V/50HZ or 110V/60HZ

Rated power: 550W

Size: 210×140×230MM

Temperature: 100℃



▶ FH-200

● Specification :

Voltage: 220V/50HZ OR 110V/60HZ

Rated Power: 250W

Size: 310 x250 x160mm

Temperature: 140℃



▶ UV-100

● Specification :

- Available for testing UV-400 lens, anti-radiation lens, true and false currency.
- Electric Voltage: 220V/50Hz or 110V/60Hz

Power: 20W

Dimensions: 260(L)x140(w)x105(H)mm

Weight: 0.6kg



▶ CA-100 (Color-Alterable Lens Tester)

● Specification :

The best merit is that it can make coloring lenses to color in a moment, it is an ideal instrument to the glasses factories and shops.

Voltage: 110V/60Hz 220V/50Hz

Power: 30W

Weight: 0.3kg

Dimensions: 220x110x115mm



▶ UP-100 (UV&Photochromic Lens Tester)

● Specification :

Combination tester available for testing UV-400 lens, anti-radiation lens, and photochromic lens.

Electric Voltage: 220V/50Hz or 110V/60Hz


Power: 30W

Dimensions: 240(L)x200(w)x175(H)mm

Weight: 1kg



Tinting Machine



▶ TM-100

● Specification:

Temperature: 0°C~100°C

Cup capacity: 1000ML

Voltage: 220V/50HZ or 110V/60HZ

Power: 1500W

Dimensions: 495(L)x295(w)x187(H)mm



▶ TP-1 (Torch Pen)



▶ TP-2/TP-3 (Torch Pen)



TP-2



TP-3


▶ RA-1 (Radian Apparatus)




▶ TA-1 (Thickness Apparatus)




Pliers and Tools Set

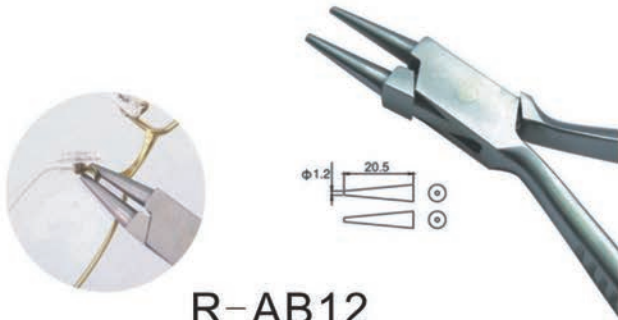

R-AB12

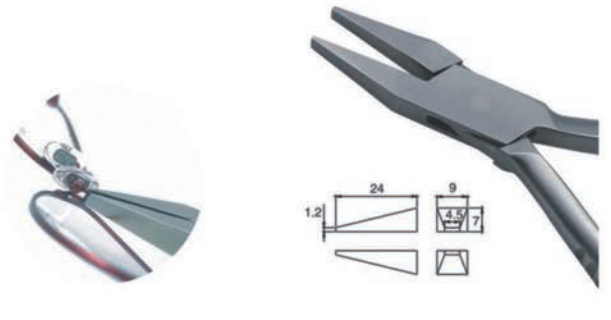


R-AB13

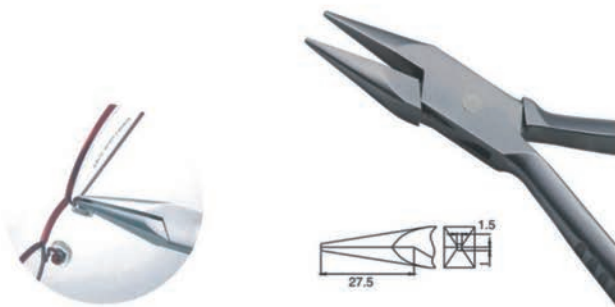

R-AB14





R-AB15

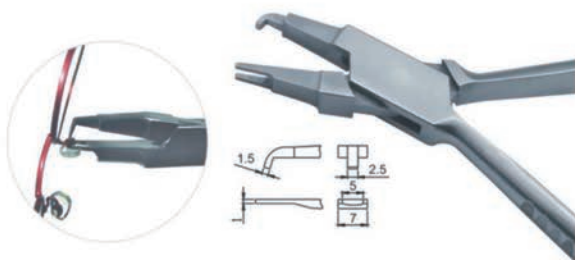


R-AB55


Pliers and Tools Set

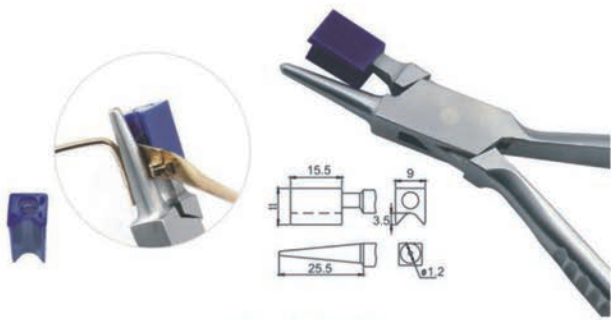

R-AB23

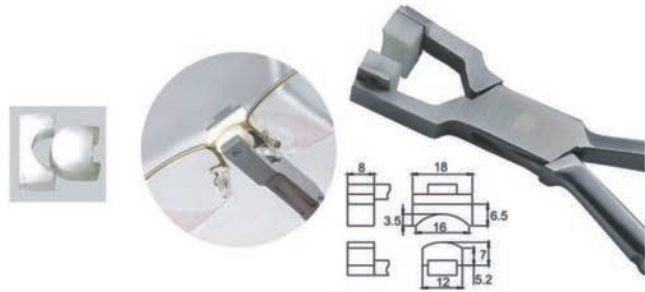


R-AB26

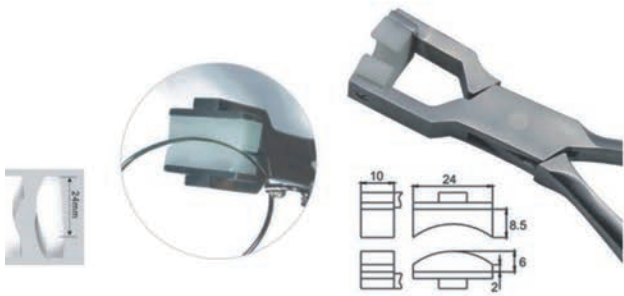


R-AB29




R-AB46

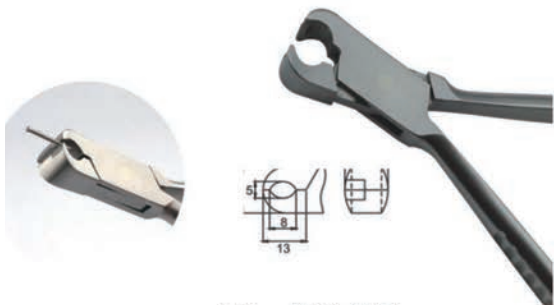


R-AB47

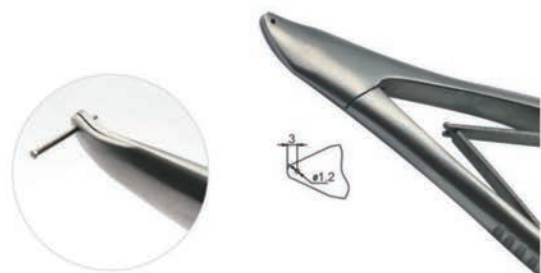

R-AB50

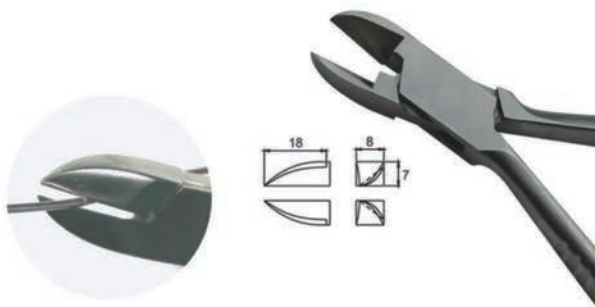


R-AB49

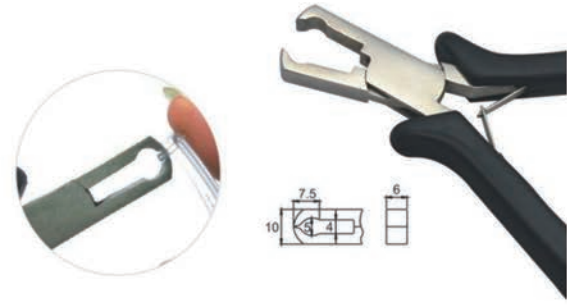

R-AB931




R-AB923

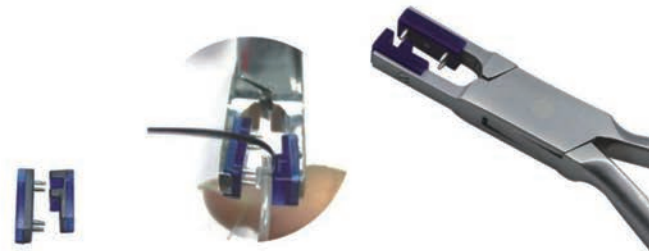

R-AB924

Pliers and Tools Set



R-B01A



To paste



To paste



Locking the positioning plate

Push with 931




Push with 924




Remove with 931



To bore with drill bit



Assemble



R-B01B

Item No. & Name		Qty	Photo	Details & Instructions
Item No. & Name	Qty	Photo	Functions	
Plier R-AB923	1pc			
Plier R-AB931	1pc			
Plier R-AB924	1pc			
Screwdriver QS-033	1pc			1.5
Screwdriver QS-034	1pc			1.6
Screwdriver QS-035	1pc			1.8
Screwdriver QS-035	1pc			1.8
Screwdriver QS-036	1pc			2.32
Screwdriver QS-036	1pc			2.57
Screwdriver QS-037	1pc			2.52
Screwdriver QS-037	1pc			2.82



R-B01C



R-B01D

Item No. & Name		Qty	Photo	Details & Instructions
Item No. & Name	Qty	Photo	Functions	
Plier R-AB08	1pc			
Plier R-AB21	1pc			
Plier R-AB14	1pc			
Plier R-AB923	1pc			
Plier R-AB931	1pc			
Plier R-AB924	1pc			

Item No. & Name		Qty	Photo	Details & Instructions
Item No. & Name	Qty	Photo	Functions	
Plier R-AB08	1pc			
Plier R-AB21	1pc			
Plier R-AB14	1pc			
Screwdriver QS-033	1pc			1.5
Screwdriver QS-034	1pc			1.6
Screwdriver QS-035	1pc			1.8
Screwdriver QS-035	1pc			1.8
Screwdriver QS-036	1pc			2.32
Screwdriver QS-036	1pc			2.57
Screwdriver QS-037	1pc			2.52
Screwdriver QS-037	1pc			2.82



PT001



PT002



PT003



PT004



PT005



PT006



PT007



PT008




PT009



PT010

Pliers and Tools Set



PT011



PT012



PT013



PT014



PT015



PT016



PT017



PT018



PT019



PT020



R-B08



R-B011



R-B010



R-B012



R-B013



R-B014




R-B015



R-B017

Pliers and Tools Set



QS032



QS031



QS033



QS006



QS003



⊕ 1.6

⊖ 1.8

QS005



⊕ 1.8

⊖ 1.6

QS029



⊕ 1.8

⊖ 1.8

QS034



⊕ 2.4

⊕ 1.8

⊕ 1.0

⊖ 2.4

⊖ 1.6

⊖ 1.5

QS014



⊖ 1.6

⊕ 1.8

QS020



⊖ 1.4 1.6 1.8 2.0

⊕ 1.4 1.6 1.8 2.0

QS021



⊖ 1.4 1.6 1.8 2.0

⊕ 1.4 1.6 1.8 2.0


QS022



⊖ 1.4 1.6 1.8 2.0

⊕ 1.4 1.6 1.8 2.0

QS018

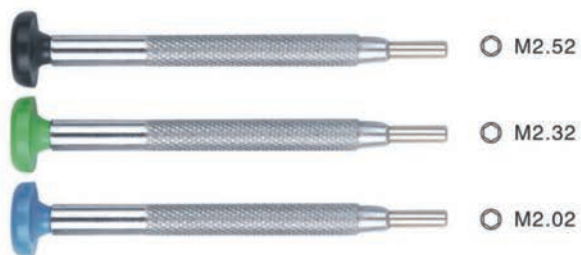


○ M2.52

○ M2.32

○ M2.02


QS019

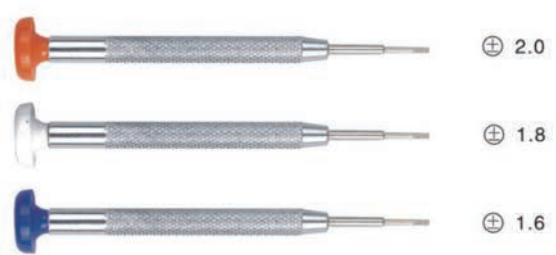

⊕ 2.0

⊕ 1.8

⊕ 1.6



QS002



QS016



QS017



QS008



QS010



QS011




QS016



QS017



QS004



SL017



SL018





- Size:**
- ⊖ 1.5
 - ⊖ 1.8
 - ⊕ 1.7
 - ⊕ 2.0
 - M2.02
 - M2.32
 - M2.52
 - ⊗ M2.56

SS001



- Size:**
- ⊖ 1.5
 - ⊖ 1.8
 - ⊕ 1.7
 - ⊕ 2.0
 - M2.02
 - M2.32
 - M2.52
 - ⊗ M2.56

SS002



- Size:**
- ⊖ 1.5
 - ⊖ 1.8
 - ⊕ 1.7
 - ⊕ 2.0
 - M2.02
 - M2.32
 - M2.52
 - ⊗ M2.56

SS003



- Size:**
- ⊖ 1.5
 - ⊖ 1.8
 - ⊕ 1.7
 - ⊕ 2.0
 - M2.02
 - M2.32
 - M2.52
 - ⊗ M2.56

SS005



- Size:**
- ⊖ 1.5
 - ⊖ 1.8
 - ⊕ 1.7
 - ⊕ 1.7
 - M2.02
 - M2.32
 - M2.52
 - ⊗ M2.56

SS006



- Size:**
- ⊖ 1.5
 - ⊖ 1.8
 - ⊕ 1.7
 - ⊕ 2.0
 - M2.02
 - M2.32
 - M2.52
 - ⊗ M2.56

SS011



- Size:**
- ⊖ 1.5
 - ⊖ 1.8
 - ⊕ 1.7
 - ⊕ 2.0
 - M2.02
 - M2.32
 - M2.52
 - ⊗ M2.56

SS012



- Size:**
- ⊖ 1.5
 - ⊖ 1.8
 - ⊕ 1.7
 - ⊕ 2.0
 - M2.02
 - M2.32
 - M2.52
 - ⊗ M2.56


SS013



- Size:**
- ⊖ 1.5
 - ⊖ 1.8
 - ⊕ 1.7
 - ⊕ 2.0
 - M2.02
 - M2.32
 - M2.52
 - ⊗ M2.56

SS014

Pliers and Tools Set



SL001



- ⊕ 1.0 1.2 1.5 1.7 2.0
- ⊖ 1.0 1.2 1.5 1.7 2.0
- M2.0 M2.3 M2.5 M2.8
- ⊗ M2.0 M2.5

SL002



- ⊕ 1.5 1.7 2.0 2.5
- ⊖ 1.5 2.0
- M2.0 M2.3 M2.5
- ⊗ M2.0 M2.5

SL003



- ⊕ 1.0 1.2 1.5 1.7 2.0
- ⊖ 1.0 1.2 1.5 1.7 2.0
- M2.0 M2.3 M2.5 M2.8
- ⊗ M2.0 M2.5
- ⊕ M1.0

SL006



- ⊕ 1.5 2.0
- ⊖ 1.5
- M2.0 M2.3 M2.5

SL005



- ⊕ 1.4 1.7 2.0 2.3
- ⊖ 1.4 1.7 2.0 2.3
- M2.0 M2.3 M2.5
- ⊗ M2.5

SL007



- ⊕ 1.5 1.7 2.0
- ⊖ 1.5 1.7 2.0
- M2.0 M2.3 M2.5
- ⊗ M2.5

SL010



- ⊕ 1.5 1.7 2.0
- ⊖ 1.5 1.7 2.0
- M2.0 M2.3 M2.5
- ⊗ M2.5

SL013



- ⊕ 1.5 2.0
- ⊖ 1.5 2.0

SL014



- ⊕ 1.5 2.0
- ⊖ 1.5 2.0

SL015



- ⊕ 1.4 1.6
- ⊖ 1.4 1.6 2.0
- M2.0 M2.3 M2.5
- ⊗ M2.3 M2.5

SL016



- ⊕ 1.7 ⊖ 1.8
- M2.0 M2.5

SL017



- ⊕ 1.7 ⊖ 1.8

SL009



- R-AB932
- R-AB931
- R-AB924
- ⊕ 1.0 1.5
- ⊖ 1.0 1.5
- M2.0 M2.5
- ⊗ M2.0 M2.5

SS007




- R-AB08
- R-AB931
- R-AB924
- ⊕ 1.0 1.5
- ⊖ 1.0 1.5
- M2.0 M2.5
- ⊗ M2.0 M2.5

SS010



- R-AB13
- R-AB21
- R-AB29
- ⊕ 1.0 1.5
- ⊖ 1.0 1.5
- M2.0 M2.5
- ⊗ M2.0 M2.5

Pliers and Tools Set



TF001



TF002



TF003



TF004



TF005



TF006



TF007



TF010



TF011



TF012



TF015



TF016



TF017



TF018




LK-006



LK-007

Model	Size	Weight/Piece	MOQ
LK-006S	244x170x45mm	157G	500
LK-006SH	244x170x55mm	170G	500
LK-006L	270x190x50mm	196G	500
LK-006LH	270x190x68mm	210G	500
LK-007S	254x170x42mm	160G	500
LK-007L	270x185x44mm	190G	500
LK-008S	232x156x42mm	170.5G	500
LK-008SH	232x156x52mm	200.5G	500

Wheels and Suckers



RGW-1

Size : 100/35WV/14



RGW-2

Size : 100/35W/14



RGW-3

Size : 100/20/14



RGW-4

Size : 100/30/14



RGW-5

Size : 114/20/16
iron core



RGW-6

Size : 110/20/16



RGW-7

Size : 170/20/14



RGW-9

Size : 110/20/20



RGW-10

Size : 110/20V/14



RGW-11

Size : 110/20/14



RGW-12

Size : PC/100/16/17



RGW-13

Size : Resin/100/16/17



RGW-14

Size : Polishing/100/11/17



RGW-15

Size : Glass/100/16/17



RGW-16


Size : 100/23V/17



Wheels and Suckers



Wheels and Suckers



LK-8219
WECO
24mm-SET-9pcs



LK-8220
WECO
24mm-SET-9pcs



LK-8221
Tianle
22mm-SET-9pcs



LK-8222
Supore
17.5mm-SET-9pcs




LK-8223
South Korea
25mm-SET-9pcs



LK-8224
New Century
20mm-SET-9pcs



LK-8225
Supore
20mm-SET-9pcs

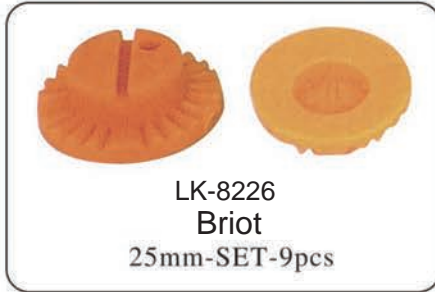

LK-8226
Briot
25mm-SET-9pcs



LK-8227
Briot
18mm-SET-9pcs



LK-8228
Essilor
25mm-SET-9pcs



LK-8229
Essilor
18mm-SET-9pcs



LK-8230
Essilor
18mm-SET-9pcs



LK-8231
Essilor
14mm-SET-9pcs



LK-8232
Essilor
18mm-SET-9pcs



LK-8233
New Century
22mm-SET-9pcs



LK-8234
South Korea
17.5mm-SET-9pcs



LK-8235
Nidek
25mm-SET-9pcs









LK-8236
Nidek
22mm-SET-9pcs

Wheels and Suckers



Wheels and Suckers

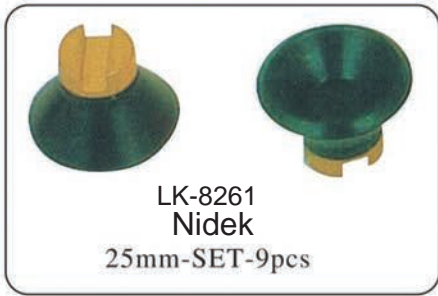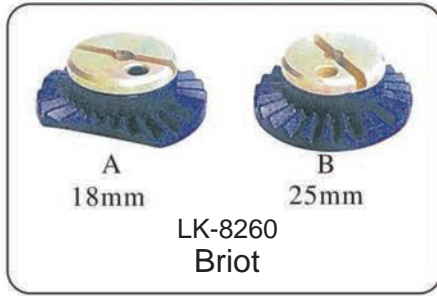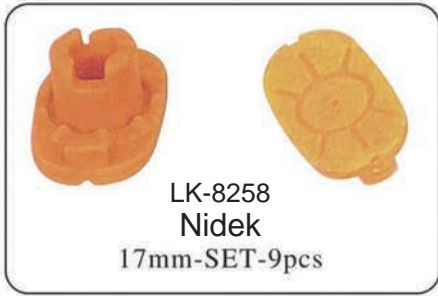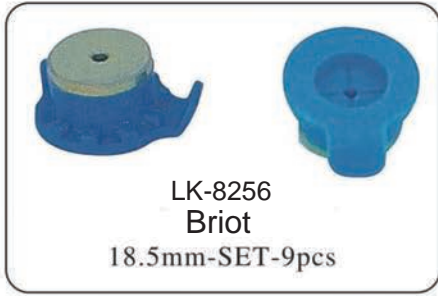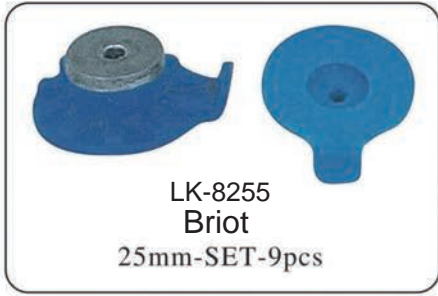

LK-8264 Jinggong
19mm



LK-8265 Langchi
20mm



LK-8266 WECO
19mm



LK-8267 Supore
19mm



LK-8268 Supore
17.5mm



LK-8270 Nidek
23.5*10mm



LK-8271 Nidek
18*10mm



LK-8272 Nidek
23.5*10mm



LK-8273 Nidek
16*10mm



LK-A23SH



LK-A23MMH




LK-A23NNH



LK-A23DH



LK-A23SR



LK-A23MR



LK-A23LR



LK-A23MMR



LK-A23NNR




LK-A23DR



LK-A23F

Name	Model	Size
Adhesive Tape(Essilor, Blue)	LK-A23SH	18mm
Adhesive Tape(For all, Blue)	LK-A23MH	21mm
Adhesive Tape(Briot/Weco, Blue)	LK-A23LH	24mm
Adhesive Tape(Nidek, Blue)	LK-A23MMH	17x30mm
Adhesive Tape(For all, Blue)	LK-A23NNH	18x32mm
Adhesive Tape(For all, Blue)	LK-A23DH	18x25mm
Adhesive Tape(Essilor, Red)	LK-A23SR	18mm
Adhesive Tape(For all, Red)	LK-A23MR	21mm
Adhesive Tape(Briot/Weco, Red)	LK-A23LR	24mm
Adhesive Tape(Nidek, Red)	LK-A23MMR	17x30mm
Adhesive Tape(For all, Red)	LK-A23NNR	18x32mm
Adhesive Tape(For all, Red)	LK-A23DR	18x29mm
Nonskid Adhesive Tape(For all, Crystal)	LK-A23F	Thickness:0.05mm


Nose Pads and Screws



Nose Pad/Silicone 硅胶鼻托

NO:
编号

Available Size
可选尺寸
(1:1)



L:13mm



CY001

L:14mm



CY002

L:15mm



CY003

L:16mm



CY004

Screw-in 锁式 push-in 卡式




L:12mm



CY005

L:13mm



CY006

L:14mm



CY007

L:15mm




CY008

Screw-in 锁式 push-in 卡式



L:12mm



CY009

L:13mm



CY010

L:14mm



CY011

L:15mm



CY012

L:16mm



CY013

Screw-in 锁式 push-in 卡式



φ 9mm



CY014

φ 11mm



CY015

φ 13mm




CY016

Screw-in 锁式 push-in 卡式




L:13mm




CY017

L:15mm



CY018

L:17mm



CY019

Screw-in 锁式 push-in 卡式

Nose Pad/Silicone

NO:


Available Size



Screw-in push-in




L:11mm



CY020

L:13mm



CY021



L:10.5mm



CY022



L:11mm



CY023

L:13mm




CY024

L:15mm



CY025

Screw-in push-in



φ 7mm



CY026

φ 9mm



CY027

φ 11mm



CY028

Screw-in push-in



L:13mm



CY029

L:14mm



CY030

L:15mm




CY031

L:16mm



CY032

Screw-in push-in



L:14mm



CY033

L:15mm



CY034

L:16mm




CY035

L:17mm





CY036

Screw-in push-in



Air nose pad

100% COMFORT

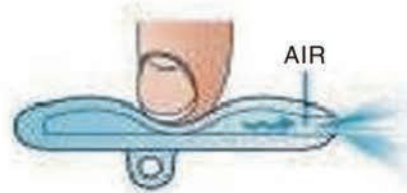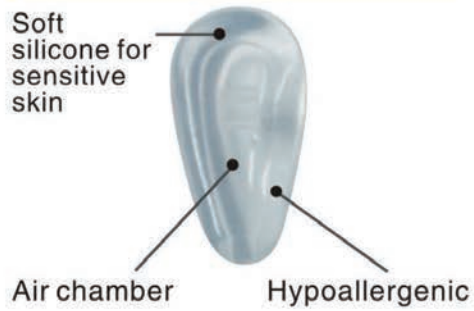

The weight of the frame is evenly spread



CY037



CY038



CY039



CY040



CY041



CY042



CY051



CY052

Nose Pad/Silicone Bride

NO:

Available Size

Screw-in push-in

35X15mm



CY067

40X15mm



CY068

45X15mm



CY069

52X15mm



CY070

14X18mm



CY071

15X25mm



CY072

17X25mm




CY073

17X23mm



CY074

Nose Pads and Screws



L:13mm



CY075

L:15mm



CY076

L:17mm



CY077

Screw-in push-in



L:11mm



CY078

L:13mm




CY079

L:15mm



CY080

Screw-in push-in



L:13mm



CY081

L:15mm



CY082



φ 9mm



CY083

Screw-in push-in



push-in
卡式

CY084



CY085

Screw-in push-in



CY086



CY088



CY090



CY091



CY092



CY093

Nose Pads and Screws



CY095



CY096



CY097



CY098



CY099



CY100



CY101



CY102



CY103



CY104



CY105



CY106



CY107



CY108



CY109



CY110



CY111



CY112



CY113



CY114



CY115



CY116



CY120



CY123



CY125



CY126




CY127



CY128

Nose Pads and Screws



NO.						Head	Slot	NO.						Head	Slot
S001			2.00	1.40	2.0			S021			1.60	1.00	4.20		
S002			2.00	1.40	2.2			S022			1.60	1.00	4.20		
S003			2.00	1.40	2.4			S023			1.80	1.20	3.60		
S004			2.00	1.40	2.6			S024			1.80	1.20	3.60		
S005			2.00	1.40	2.8			S025			2.50	1.40	3.00		
S006			2.00	1.40	3.0			S026			2.50	1.40	3.20		
S007			2.00	1.40	3.2			S027			2.50	1.40	3.60		
S008			2.00	1.40	3.4			S028			2.50	1.40	4.00		
S009			2.00	1.40	3.6			S029			2.50	1.40	6.00		
S010			2.00	1.40	3.8			S030			2.50	1.60	5.50		
S011			2.00	1.40	4.0			S031			2.50	1.60	5.00		
S012			2.00	1.40	4.5			S032			2.50	1.60	4.00		
S013			2.00	1.40	5.0			S033			1.40	1.00	5.80		
S014			2.50	1.40	5.0			S034			1.80	1.00	5.80		
S015			1.40	1.00	3.60			S035			1.80	1.20	6.00		
S016			1.40	1.00	3.60			S036			2.00	1.40	5.60		
S017			1.60	1.00	4.00			S037			2.00	1.40	6.00		
S018			1.60	1.00	3.60			S038			2.00	1.40	6.50		
S019			1.80	1.00	3.60			S039			2.00	1.40	7.00		
S020			1.80	1.00	3.60			S040			2.00	1.40	7.50		

Nose Pads and Screws



NO.						Head	Slot
S041			2.00	1.40	7.50		
S042			2.50	1.20	10.60		
S043			2.50	1.20	10.70		
S044			1.80	1.20	12.00		
S045			2.50	1.20	12.00		
S046			2.50	1.20	12.00		
S047			2.80	1.40	8.60		
S048			2.80	1.40	10.00		
S049			2.80	1.40	11.40		
S050			2.50	1.40	12.60		
S051			2.80	1.50	10.00		


NO.						Head	Slot
S052			2.00	1.40	2.40		
S053			2.00	1.40	3.00		
S054			2.00	1.40	3.60		
S055			2.00	1.40	4.00		
S056			2.00	1.40	2.80		
S057			2.00	1.40	3.20		
S058			2.00	1.40	3.80		
S059			2.80	1.40	3.60		
S060			2.80	1.40	5.00		
S061			2.80	1.40	6.00		
S062			3.00	1.60	4.00		

NO.						Head	Slot
S063			2.00	1.00	2.40		
S064			2.50	1.40	4.00		
S065			2.50	1.40	6.00		
S066			2.50	1.40	8.00		
S067			2.50	1.40	10.00		
S068			2.50	1.40	12.00		
S069			2.80	1.40	4.00		
S070			2.80	1.40	5.00		
S071			2.80	1.40	7.00		
S072			2.80	1.60	6.00		
S073			2.80	1.40	6.00		

NO.						Head	Slot
S074			2.00	1.40	3.00		
S075			2.00	1.40	3.60		
S076			2.00	1.40	4.00		
S077			2.00	1.40	3.40		
S078			2.00	1.40	11.80		
S079			2.00	1.40	12.80		

NO.						Slot
S080			2.50	1.20	4.00	
S081			2.50	1.40	4.00	
S082			2.50	1.20	4.00	
S083			2.50	1.40	4.00	

Nose Pads and Screws



NO.						Head	Slot
S084			2.00	1.40	7.50		
S085			2.50	1.20	10.60		
S086			2.50	1.20	10.70		
S087			1.80	1.20	12.00		
S088			2.50	1.20	12.00		
S089			2.50	1.20	12.00		
S090			2.80	1.40	8.60		
S091			2.80	1.40	10.00		

NO.			Style		
S095				1.20	2.50
S096				1.40	2.50
S097				1.20	2.50
S098				1.40	2.50
S099				1.40	2.50
S100				1.20	2.20
S101				1.40	2.20
S102				1.20	2.40
S103				1.40	2.40

NO.			Material		
S104			Plastic	1.20	2.50
S105			Plastic	1.40	2.50
S106			Plastic	1.40	3.00
S107			Steel	1.20	2.50
S108			Steel	1.40	2.50
S109			Steel	1.40	3.00
S110			Steel	1.40	2.50

S111			<table border="1"> <tr> <td>1.4mm</td> <td>0.8mm</td> <td>7.0mm</td> <td>10000</td> </tr> <tr> <td>1.5mm</td> <td>0.8mm</td> <td>7.0mm</td> <td>10000</td> </tr> </table>	1.4mm	0.8mm	7.0mm	10000	1.5mm	0.8mm	7.0mm	10000																											
1.4mm	0.8mm	7.0mm	10000																																			
1.5mm	0.8mm	7.0mm	10000																																			
S112			<table border="1"> <tr> <td>1.4mm</td> <td>0.8mm</td> <td>7.0mm</td> <td>10000</td> </tr> <tr> <td>1.5mm</td> <td>0.8mm</td> <td>7.0mm</td> <td>10000</td> </tr> </table>	1.4mm	0.8mm	7.0mm	10000	1.5mm	0.8mm	7.0mm	10000																											
1.4mm	0.8mm	7.0mm	10000																																			
1.5mm	0.8mm	7.0mm	10000																																			
S113			<table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> <th>D</th> <th></th> </tr> </thead> <tbody> <tr> <td>2.5mm</td> <td>0.5mm</td> <td>1.2 1.5 1.8</td> <td></td> <td>10000</td> </tr> <tr> <td>2.5mm</td> <td>0.5mm</td> <td>1.1 1.5</td> <td></td> <td>10000</td> </tr> <tr> <td>2.8mm</td> <td>0.5mm</td> <td>1.6</td> <td></td> <td>10000</td> </tr> <tr> <td>2.7mm</td> <td>0.5mm</td> <td>1.2 1.5 1.8</td> <td></td> <td>10000</td> </tr> <tr> <td>3.0mm</td> <td>0.5mm</td> <td>1.1 1.5 1.0 2.0</td> <td></td> <td>10000</td> </tr> <tr> <td>3.0mm</td> <td>0.8mm</td> <td>1.1 1.5 1.0 2.0</td> <td></td> <td>10000</td> </tr> </tbody> </table>	A	B	C	D		2.5mm	0.5mm	1.2 1.5 1.8		10000	2.5mm	0.5mm	1.1 1.5		10000	2.8mm	0.5mm	1.6		10000	2.7mm	0.5mm	1.2 1.5 1.8		10000	3.0mm	0.5mm	1.1 1.5 1.0 2.0		10000	3.0mm	0.8mm	1.1 1.5 1.0 2.0		10000
A	B	C	D																																			
2.5mm	0.5mm	1.2 1.5 1.8		10000																																		
2.5mm	0.5mm	1.1 1.5		10000																																		
2.8mm	0.5mm	1.6		10000																																		
2.7mm	0.5mm	1.2 1.5 1.8		10000																																		
3.0mm	0.5mm	1.1 1.5 1.0 2.0		10000																																		
3.0mm	0.8mm	1.1 1.5 1.0 2.0		10000																																		
S114 PVC帽			<table border="1"> <tr> <td>2.5mm</td> <td>1.2mm</td> <td>3.5mm</td> <td>10000</td> </tr> <tr> <td>2.5mm</td> <td>1.2mm</td> <td>3.5mm</td> <td>10000</td> </tr> </table>	2.5mm	1.2mm	3.5mm	10000	2.5mm	1.2mm	3.5mm	10000																											
2.5mm	1.2mm	3.5mm	10000																																			
2.5mm	1.2mm	3.5mm	10000																																			



SB001



Name	Type	Size	Qty
"+" screw	S016	1.4*1.0*3.6	100 pcs
"-" screw	S003	2.0*1.4*2.4	100 pcs
"-" screw	S006	2.0*1.4*3.0	100 pcs
"-" screw	S011	2.0*1.4*4.0	100 pcs
nut	S096	1.4	100 pcs
round head screw	S025	2.5*1.4*3.0	100 pcs
round head screw	S028	2.5*1.4*4.0	100 pcs
"-" round head screw	S029	2.5*1.4*6.0	100 pcs

SB002




Name	Type	Size	Qty
screw-in silicon nose pad (left)	CY001	L:13mm	10 pairs
screw-in silicon nose pad (right)	CY001	L:13mm	10 pairs
screw-in silicon nose pad	CY006	L:13mm	10 pairs
screw-in silicon nose pad	CY010	L:13mm	10 pairs
screw-in silicon nose pad	CY012	L:15mm	10 pairs
round silicon nose pad	CY014	L: 9mm	10 pairs
oval silicon nose pad	CY024	L:13mm	10 pairs
round silicon nose pad	CY027	L: 9mm	10 pairs

SB003



Name	Type	Size	Qty
"+" screw	S016	1.4*1.0*3.6	100 pcs
"-" screw	S003	2.0*1.4*2.4	100 pcs
"-" screw	S006	2.0*1.4*3.0	100 pcs
"-" screw	S011	2.0*1.4*4.0	100 pcs
nut	S096	1.4	100 pcs
round head screw	S025	2.5*1.4*3.0	100 pcs
round head screw	S028	2.5*1.4*4.0	100 pcs
"-" round head screw	S029	2.5*1.4*6.0	100 pcs
stainless steel tab washer	S109	1.4	100 pcs
copper cap	S101	1.4	100 pcs



SC004



Name	Type	Size	Qty
"+" screw	S016	1.4*1.0*3.6	100 pcs
"-" screw	S003	2.0*1.4*2.4	100 pcs
"-" screw	S006	2.0*1.4*3.0	100 pcs
"-" screw	S011	2.0*1.4*4.0	100 pcs
nut	S096	1.4	100 pcs
round head screw	S025	2.5*1.4*3.0	100 pcs
round head screw	S028	2.5*1.4*4.0	100 pcs
"-" round head screw	S029	2.5*1.4*6.0	100 pcs
stainless steel tab washer	S109	1.4	100 pcs
copper cap	S101	1.4	100 pcs
"-" screw	S047	2.8*1.4*8.6	100 pcs
Plum nut	S098	1.4	100 pcs

SC005



Name	Type	Size	Qty
screw-in silicon nose pad (left)	CY001	L:13mm	10 pairs
screw-in silicon nose pad (right)	CY001	L:13mm	10 pairs
screw-in silicon nose pad	CY006	L:13mm	10 pairs
screw-in silicon nose pad	CY010	L:13mm	10 pairs
screw-in silicon nose pad	CY012	L:15mm	10 pairs
round silicon nose pad	CY014	L: 9mm	10 pairs
oval silicon nose pad	CY024	L:13mm	10 pairs
round silicon nose pad	CY027	L: 9mm	10 pairs
silicon nose pad (left)	CY003	L:15mm	10 pairs
silicon nose pad (right)	CY003	L:15mm	10 pairs
screw-in silicon nose pad	CY017	L:13mm	10 pairs
screw-in silicon bridge	CY067	35*15mm	10 pairs
silicon nose pad	CY033	L:14mm	10 pairs

SC006




Name	Type	Size
screwdriver	QS032	1.8
screwdriver	QS032	1.8
tweezers	TF014	
"+" screw	S020	1.8*1.0*3.6
gold "+" screw	S020	1.8*1.0*3.6
1.0 cusp	S018	1.6*1.0*3.6
"-" screw	S014	1.8*1.2*3.6
gold nut	S099	1.4
nut	S096	1.4
"-" screw	S003	2.0*1.4*2.4
"-" screw	S006	2.0*1.4*3.0
"-" screw	S009	2.0*1.4*3.6
"-" screw	S011	2.0*1.4*4.0
"-" round head screw	S025	2.5*1.4*3.0
"-" round head screw	S028	2.5*1.4*4.0
"-" round head screw	S029	2.5*1.4*6.0
"plum flower" nut	S098	1.4
double plug	S111	1.5*0.8*7.0
PVC cap	S114	1.4
Pan head tapping screws with slot	S037	2.0*1.4*6.0
Pan head tapping screws with slot	S039	2.0*1.4*7.0
Pan head tapping screws with slot	S041	2.0*1.4*7.5
Pan head tapping screws with slot	S034	1.8*1.0*5.8
(gold) Pan head tapping screws with slot	S037	2.0*1.4*6.0
(gold) Pan head tapping screws with slot	S039	2.0*1.4*7.0
stainless steel sheet	S109	1.4
(gold)stainless steel tab washer	S110	1.4
Hexagon nuts	S101	1.4

SC008



Name	Type	Size
screwdriver	QS032	1.8
screwdriver	QS032	1.8
tweezers	TF014	
"+" screw	S016/S020	1.0*3.6
"-" round head screw	S029	2.5*1.4*6.0
"-" screw	S003	2.0*1.4*2.4
"-" screw	S006	2.0*1.4*3.0
nut	S096	1.4
"-" round head screw	S025	2.5*1.4*3.0
"-" round head screw	S028	2.5*1.4*4.0
"plum flower" nut	S098	1.4
Pan head tapping screws with slot	S038	2.0*1.4*6.5
screw-in silicon nose pad (left)	CY001	L:13mm
screw-in silicon nose pad (right)	CY001	L:13mm
screw-in silicon nose pad	CY006	L:13mm
screw-in silicon nose pad	CY010	L:13mm
screw-in silicon nose pad	CY012	L:15mm
round silicon nose pad	CY014	L: 9mm
oval silicon nose pad	CY024	L:13mm
round silicon nose pad	CY027	L: 9mm

Nose Pads and Screws



SC009



Name	Type	Size
screwdriver	QS032	1.8
screwdriver	QS032	1.8
tweezers	TF014	
"+" screw	S020	1.8*1.0*3.6
gold "+" screw	S020	1.6*1.0*3.6
1.0 cusp	S018	1.6*1.0*3.6
"+" screw	S024	1.8*1.2*3.6
gold nut	S099	1.4
nut		1.4
"-" screw	S003	2.0*1.4*2.4
"-" screw	S006	2.0*1.4*3.0
"-" screw	S009	2.0*1.4*3.6
"-" screw	S011	2.0*1.4*4.0
"-" round head screw	S025	2.5*1.4*3.0
"-" round head screw	S028	2.5*1.4*4.0
"-" round head screw	S029	2.5*1.4*6.0
"plum flower" nut	S098	1.4
double plug	S111	1.5*0.8*7.0
PVC cap	S114	1.4
Pan head tapping screws with slot	S037	2.0*1.4*6.0

SN001



Item Name	Model	Size	Quantity
Silicon nose pad	CY001L	13mm	20pairs
Silicon nose pad	CY001R	13mm	20pairs
Silicon nose pad	CY003L	15mm	20pairs
Silicon nose pad	CY003R	15mm	20pairs
Silicon nose pad	CY006	13mm	20pairs
Silicon nose pad	CY008	15mm	20pairs
Silicon nose pad	CY010	13mm	20pairs
Silicon nose pad	CY011	14mm	20pairs
Silicon nose pad	CY012	15mm	20pairs
Silicon nose pad	CY015	11mm	20pairs
Silicon nose pad	CY024	13mm	20pairs
Silicon nose pad	CY027	19mm	20pairs


SN002



Name	Type	Size
"-" screw	S003	2.0*1.4*2.4
"-" screw	S006	2.0*1.4*3.0
"-" screw	S010	2.0*1.4*3.8
"-" screw	S028	2.5*1.4*4.0
"-" screw	S029	2.5*1.4*6.0
"+" screw	S020	1.8*1.0*3.6
"-" screw	S019	1.8*1.0*3.6
"+" screw	S023	1.8*1.2*3.6
"-" screw	S024	1.8*1.2*3.6
"-" screw	S047	2.5*1.4*8.6
"+" screw	S003	2.0*1.4*2.3
"+" screw	S006	2.0*1.4*3.0
"+" screw	S010	2.0*1.4*3.8
"-" screw	S037	2.0*1.4*6.0

"-" screw	S040	2.0*1.4*7.5
hex nut	S096	1.4*2.5
hex nut	S095	1.2*2.5
"plum flower" nut	S098	1.4*2.5
"plum flower" nut	S097	1.2*2.5
metal gasket	S108	1.4*2.5
"plum flower" nut	S103	1.4*2.4
"plum flower" nut	S102	1.2*2.4
hex nut	S101	1.4*2.2
hex nut	S100	1.2*2.2
metal gasket	S107	1.2*2.5
double plug	S111	1.5*0.8*7.0
double plug	S111-1	1.4*0.8*7.0
PVC cap	S114	1.4
PVC gasket	S105	1.4*2.5
PVC cap	S113	1.4

Nose Pads and Screws



SN003



Name	Type	Size	Qty
"-" screw	S001	2.0*1.4*2.0	100 pcs
"+" screw	S001	2.0*1.4*2.0	100 pcs
"-" screw	S002	2.0*1.4*2.2	100 pcs
"+" screw	S002	2.0*1.4*2.2	100 pcs
"-" screw	S003	2.0*1.4*2.4	100 pcs
"+" screw	S003	2.0*1.4*2.4	100 pcs
"-" screw	S004	2.0*1.4*2.6	100 pcs
"+" screw	S004	2.0*1.4*2.6	100 pcs
"-" screw	S005	2.0*1.4*2.8	100 pcs
"+" screw	S005	2.0*1.4*2.8	100 pcs
"-" screw	S006	2.0*1.4*3.0	100 pcs
"+" screw	S006	2.0*1.4*3.0	100 pcs
"-" screw	S007	2.0*1.4*3.2	100 pcs
"+" screw	S007	2.0*1.4*3.2	100 pcs
"-" screw	S008	2.0*1.4*3.4	100 pcs
"+" screw	S008	2.0*1.4*3.4	100 pcs
"-" screw	S009	2.0*1.4*3.6	100 pcs
"+" screw	S009	2.0*1.4*3.6	100 pcs
"-" screw	S010	2.0*1.4*3.8	100 pcs
"+" screw	S010	2.0*1.4*3.8	100 pcs
"-" screw	S011	2.0*1.4*4.0	100 pcs
"+" screw	S011	2.0*1.4*4.0	100 pcs
"-" screw	S012	2.0*1.4*4.5	100 pcs
"+" screw	S012	2.0*1.4*4.5	100 pcs

"-" screw	S013	2.0*1.4*5.0	100 pcs
"+" screw	S013	2.0*1.4*5.0	100 pcs
"-" screw	S014	2.5*1.4*5.0	100 pcs
"-" screw	S015	1.4*1.0*3.6	100 pcs
"+" screw	S016	1.4*1.0*3.6	100 pcs
"-" screw	S024	1.8*1.2*3.6	100 pcs
Pan head tapping screws with slot	S033	1.4*1.0*5.8	100 pcs
hex nut	S095	1.2*2.5	100 pcs
hex nut	S096	1.4*2.5	100 pcs
"plum flower" nut	S097	1.2*2.5	100 pcs
"plum flower" nut	S098	1.4*2.5	100 pcs
hex nut	S099	1.4*2.5	100 pcs
hex nut	S100	1.2*2.5	100 pcs
hex nut	S101	1.4*2.2	100 pcs
"plum flower" nut	S102	1.2*2.4	100 pcs
"plum flower" nut	S103	1.4*2.4	100 pcs
PVC gasket	S104	1.2*2.5	100 pcs
PVC gasket	S105	1.4*2.5	100 pcs
PVC gasket	S106	1.4*3.0	100 pcs
Metal gasket	S107	1.2*2.5	100 pcs
Metal gasket	S108	1.4*2.5	100 pcs
Metal gasket	S109	1.2*3.0	100 pcs
double plug	S111	1.4*0.8*7.0	100 pcs
PVC cap	S114	2.5*1.2*3.5	100 pcs

Name	Type	Size	Qty
Silicone nose pad	CY001 L	13mm	50 pairs
	CY001 R	13mm	50 pairs
	CY002 L	14mm	50 pairs
	CY002 R	14mm	50 pairs
	CY005	13mm	50 pairs
	CY006	14mm	50 pairs
	CY009	12mm	50 pairs
	CY010	13mm	50 pairs
	CY014	9mm	50 pairs
	CY015	10mm	50 pairs
	CY016	11mm	50 pairs
	CY017	13mm	50 pairs

Silicone nose pad	CY018	14mm	50 pairs
	CY019	17mm	50 pairs
	CY020	11mm	50 pairs
	CY021	12mm	50 pairs
	CY022	10.5mm	50 pairs
	CY024	13mm	50 pairs
	CY025	15mm	50 pairs
	CY027	9mm	50 pairs
	CY030	14mm	50 pairs
	CY031	15mm	50 pairs
	CY034	15mm	50 pairs
	CY035	16mm	50 pairs

LC001

PET 20ml



LC002

PET 20ml



LC003

PET 20ml



LC004

PET 30ml



LC005

PET 30ml



LC006

PET 30ml



LC007

PET 50ml



LC008

PET 60ml



LC009

PET 120ml



LC010

PET 15ml



LC011

Alu 20ml



LC012

Alu 30ml



LC013

PE 50ml



LC014

PE 60ml



LC015


PE 50ml



LC018

PET 20ml





LC019

PET 30ml



LC020

Alu 30ml



LC021

PET 25ml



LC022

Anti fog 5g



Frame Display



LK-601



LK-602



LK-603



LK-604



LK-605




LK-606



LK-611



LK-701

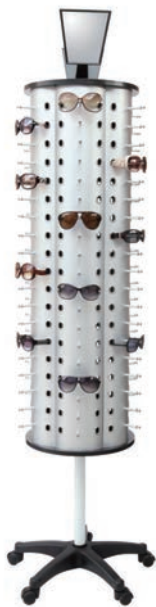

LK-702



LK-708




LK-711



LK-713

Frame Display



LK-714



LK-715



LK-717



LK-723



LK-727




LK-730



LK-731



LK-802B

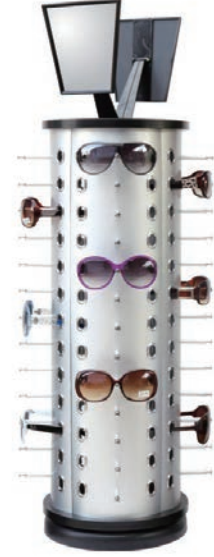

LK-803B



LK-804



LK-805



LK-806



LK-808



LK-809



LK-810



LK-811




LK-812



LK-815



LK-819



MR-01



MR-02



MR-03



MR-04






MR-05



MR-06


Exhibition

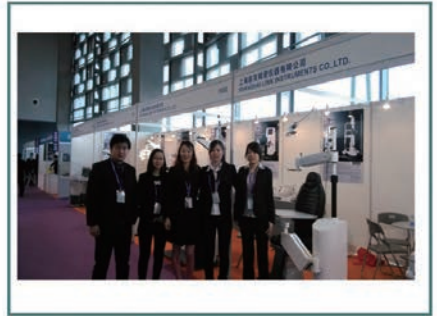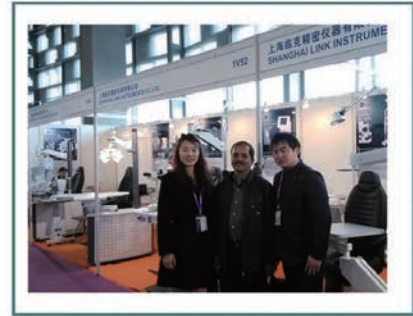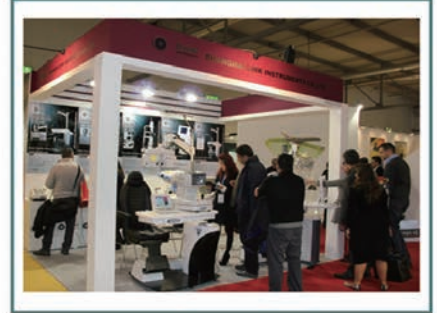

Better Detail For Better Quality!




2017 MIDO

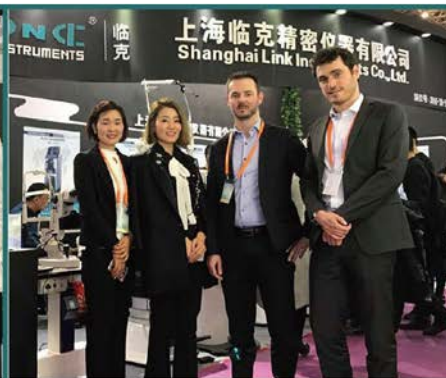

2017 SHAGNHAIR



2018 BEIJING



Exhibition



Our Team



Our Factory



Certificate of honor

CVE
AV TECHNOLOGY
EUROPEAN COMMUNITY – CERTIFICATE OF ADEQUACY
CERTIFICATE NUMBER GB/1067/5047/16 Issue 1 page 1 of 1

Manufacturer: Shanghai Link Instruments Co., Ltd
No.1588 Jiafeng Road, Shanghai, China

Certificate Holder: Shanghai Link Instruments Co., Ltd
No.1588 Jiafeng Road, Shanghai, China

Technical Reference/Date: LVD-GUTAD/9091/15/19 2016, 851045106193036030303/1/18, 87, 2016

Machine Type: Combines Table

Models: CY-200LCT-800 CT-560LCT-600LCT-450LCT-500 CT-400LCT-800 CT-500, CT-54LCT-200LCT-500 CT-56LCT-400LCT-400LCT-50

Trade Name: LINK

Applicable EC Directives: EMC Directive 2014/53/EU Annex II
LVD 2014/35/EU

Applicable Standards: EN 61326-1:2013 EN 61010-1:2010

Signature: W. Paul Francis
Laboratory Head

CE Mark: CE

Validity: 30th July 2018 to 31st December 2021

INGER CERTIFICATION ASSESSMENT SERVICES

MANAGEMENT SYSTEM CERTIFICATE
Certificate No.: 117 17 QM 0037 805
This is to certify the quality management systems of
SHANGHAI LINK INSTRUMENTS CO., LTD.

Unified Social Credit Code: 91310114557489114P
Registered Address: Area A, Building 11, No. 128 Dofei Road, Nanshang Town, Jiading District, Shanghai
Auditing Address: No. 1488 Jiafeng Road, Jiading District, Shanghai

has been assessed and registered as meeting the requirements of ISO 13485:2016 medical device quality management systems - Requirements for regulatory purposes

Assembly Production and Export of Ophthalmic Optical Instruments and Auxiliary Equipment (Phoropter, Chart Projector, Combined Table, Electric Table); Export of Ophthalmic Medical Optical & Ultrasonic Instruments (Auto Refractometer, Auto-Lensmeter, SH Lamp, Keratometer, Dual Lens Set, Slit Frame, Biometer, Ophthalmoscope, Retinoscope, Head Mirror, Ophthalmic Operating Microscope, Perimeter, Fundus Camera, Ophthalmic AD Ultrasonical Scanner, Corneal Topography, Phaco Simulator)

Signed by: [Signature]
Approval Date: 11 Aug. 2017
Expiry Date: 10 Aug. 2020

Shanghai Inger Certification Assessment Co., Ltd.
Certification No.: 001204-00110
Tel: 400-021-8000
Web: www.inger.com.cn
Add: Room 401, Huayuan Plaza, 200018 Xue Zhong Road, Xuhui District, Shanghai, China 200018

nqa global assurance

This is to certify that the Quality Management System of
Shanghai Link Instruments Co., Ltd.
Manage Address: 21, Building 1, No. 1988 Rumei Road, Jiading District, Shanghai, China
Registered Address: Area A, Building 5, No. 128 West Dofei Road, Nanshang Town, Jiading District, Shanghai, China

applicable to
Design, development and assembly of optical instruments (combined table, electric table) (excluding refractometer); export of optical instruments (chart projector, auto edger, lensmeter, slit lamp, auto refractometer and PD meter)

has been assessed and registered by NQA against the provisions of
ISO 9001:2008

This registration is subject to the company maintaining a quality management system, to the above standards, which will be monitored by NQA.
Please consult the website: www.nqa.com.cn

Certificate Number: 34968
Date: 20 March 2011
Review Date: 25 March 2014
Valid Until: 25 March 2017
EAC Code: [Code]

Certification Director: [Signature]
UKAS: [Logo]

中华人民共和国
PEOPLE'S REPUBLIC OF CHINA
医疗器械产品出口销售证明书
CERTIFICATE FOR EXPORTATION OF MEDICAL PRODUCTS

注册证号: 国械注准(2015)2011001
Certificate No.: 2015001

产品名称: 超声雾化器 | 雾化吸入器 | 雾化吸入器 | 雾化吸入器 | 雾化吸入器
Product Name: Ultrasonic Nebulizer | Nebulizer | Nebulizer | Nebulizer | Nebulizer

生产企业: 上海康尔医疗器械有限公司
Manufacturer: Shanghai Kang'er Medical Instrument Co., Ltd.

注册日期: 2015年12月24日
Registration Date: 2015-12-24

中华人民共和国
PEOPLE'S REPUBLIC OF CHINA
医疗器械产品出口销售证明书
CERTIFICATE FOR EXPORTATION OF MEDICAL PRODUCTS

注册证号: 国械注准(2015)2011001
Certificate No.: 2015001

产品名称: 超声雾化器 | 雾化吸入器 | 雾化吸入器 | 雾化吸入器 | 雾化吸入器
Product Name: Ultrasonic Nebulizer | Nebulizer | Nebulizer | Nebulizer | Nebulizer

生产企业: 上海康尔医疗器械有限公司
Manufacturer: Shanghai Kang'er Medical Instrument Co., Ltd.

注册日期: 2015年12月24日
Registration Date: 2015-12-24

中华人民共和国
PEOPLE'S REPUBLIC OF CHINA
医疗器械产品出口销售证明书
CERTIFICATE FOR EXPORTATION OF MEDICAL PRODUCTS

注册证号: 国械注准(2015)2011001
Certificate No.: 2015001

产品名称: 超声雾化器 | 雾化吸入器 | 雾化吸入器 | 雾化吸入器 | 雾化吸入器
Product Name: Ultrasonic Nebulizer | Nebulizer | Nebulizer | Nebulizer | Nebulizer

生产企业: 上海康尔医疗器械有限公司
Manufacturer: Shanghai Kang'er Medical Instrument Co., Ltd.

注册日期: 2015年12月24日
Registration Date: 2015-12-24

中华人民共和国
PEOPLE'S REPUBLIC OF CHINA
医疗器械产品出口销售证明书
CERTIFICATE FOR EXPORTATION OF MEDICAL PRODUCTS

注册证号: 国械注准(2015)2011001
Certificate No.: 2015001

产品名称: 超声雾化器 | 雾化吸入器 | 雾化吸入器 | 雾化吸入器 | 雾化吸入器
Product Name: Ultrasonic Nebulizer | Nebulizer | Nebulizer | Nebulizer | Nebulizer

生产企业: 上海康尔医疗器械有限公司
Manufacturer: Shanghai Kang'er Medical Instrument Co., Ltd.

注册日期: 2015年12月24日
Registration Date: 2015-12-24

中国眼镜协会
团体会员证书

COOA

商标注册证
商 标 注 册 证
第 901224 号

核定使用商品类别 29 类
核定使用商品名称 许瑞表

注册人: 上海康尔医疗器械有限公司

注册日期: 2015年12月24日

商标注册证
商 标 注 册 证
第 901224 号

核定使用商品类别 29 类
核定使用商品名称 许瑞表

注册人: 上海康尔医疗器械有限公司

注册日期: 2015年12月24日

商标注册证
商 标 注 册 证
第 901224 号

核定使用商品类别 29 类
核定使用商品名称 许瑞表

注册人: 上海康尔医疗器械有限公司

注册日期: 2015年12月24日

商标注册证
商 标 注 册 证
第 901224 号

核定使用商品类别 29 类
核定使用商品名称 许瑞表

注册人: 上海康尔医疗器械有限公司

注册日期: 2015年12月24日

商标注册证
商 标 注 册 证
第 901224 号

核定使用商品类别 29 类
核定使用商品名称 许瑞表

注册人: 上海康尔医疗器械有限公司

注册日期: 2015年12月24日



[Http://www.cnlink-group.com](http://www.cnlink-group.com)

Add.:No.1101 Huyi Highway,
Shanghai,201802,China
Tel:+86-21-69512871
Fax:+86-21-69512872
E-mail: sales@linkcsh.com
[Http://www.cnlink-group.com](http://www.cnlink-group.com)
[Http://linkcsh.en.alibaba.com](http://linkcsh.en.alibaba.com)
[Http://shlink.en.alibaba.com](http://shlink.en.alibaba.com)