

HVAC, REFRIGERATION, AND PLUMBING







DOWSIL

DOWFROST

FROTH-PAK™

GREAT STUFF

LUCAS OIL



Table of Contents

Lentus History	1
DOWSIL™ Sealants	2
Dow Glycol-Based Heat Transfer Fluids	4
Lucas Oil®	6
LENTEK™ Sealants	7
GREAT STUFF™ Spray Adhesives and Specialty Coatings	8
GREAT STUFF™ Foams	9
GREAT STUFF™ Work Wipes	9
GREAT STUFF™ Gloves	10





DOWFROST[™]

LUCAS OIL



GREAT STUFF

FROTH-PAK™



LENTUS HISTORY

Jim Hartlage (Lentus Founder) began working as a Lab Technician for Dow Corning in Elizabethtown, KY

Jim founded Accumetric, the first authorized repackager of Dow Corning Silicone Sealants

Dow, formerly known as Dow Corning, approached Jim and Jud Hartlage (Lentus President) to become Master Distributor for Dow Silicones

2012 Lentus was Founded on July 1

DOWSIL[™] Sealants 900-DAY SHELF LIFE. 100% SILICONE.







DOWSIL™ HVAC/R Sealant

A one-part RTV (Room-Temperature Vulcanizing), acetoxy cure silicone sealant.

APPLICATIONS:

- Heating
- Ventilation
- Air conditioning
- Refrigeration
- Sealing refrigeration and air conditioner interiors
- Sealing outdoor vents, pipe openings, and electrical penetrations
- Sealing around electrical boxes and equipment
- Joints in food, dairy, and beverage cooler display units

FEATURES:

- Tack-free in 15-20 minutes
- Adheres to most glass, plastic, metal, painted surfaces, fiberglass, and ceramic substrates
- Resistant to sunlight and weather extremes
- Meets FDA Reg 21 CFR 177.2600, NSF Standard 51, and UL Listed
- Remains flexible; will not become brittle, crack, shrink, or chalk

PART №	SIZE	COLOR	CASE / PALLET
4045031	305 mL	Aluminum	12 / 1,296
4128471	305 mL	Black	12 / 1,296
4045032	305 mL	Clear	12 / 1,296
4045033	305 mL	White	12 / 1,296

DOWSIL™ Tub/Tile/Ceramic Sealant

A one-part acetoxy cure silicone sealant designed for non-porous surfaces. Engineered to provide a durable, mildew-resistant seal. Ensures long-lasting performance in kitchens, bathrooms, and other moisture-prone areas. Ideal for use in conditions of high humidity and temperature extremes.

APPLICATIONS:

- Showers, tubs, sinks, and plumbing fixtures
- Saunas and hot tubs
- Drains
- Piping
- Floor seams
- Adhesive, sealant, or grout for ceramic tiles

- Cured sealant is mildewresistant
- Remains permanently flexible without shrinking, cracking, crumbling, or drying out
- Resists staining, spotting, and color changes
- Meets FDA Reg 21 CFR 177.2600 requirements

PART №	SIZE	COLOR	CASE / PALLET
4045034	305 mL	Almond	12 / 1,296
4045036	305 mL	Clear	12 / 1,296
4045038	305 mL	Trans White	12 / 1,296
4045039	305 mL	White	12 / 1,296
4045039	305 mL	White	12 / 1,296



DOWSIL Sealants 900-DAY SHELF LIFE. 100% SILICONE.

DOWSII

HI-TEMP RED

Agent d'Étanchille



DOWSIL™ Hi-Temp Sealant Red

High-temperature, one-part acetoxy cure silicone sealant with iron oxide to resist extreme heat exposure.


APPLICATIONS:

- Fired heaters
- Access doors and flanged pipe joints
- Flues on gas appliances
- Heating elements in appliances
- Plywood drying oven doors
- Windows in oven doors

FEATURES:

- Resistant to sunlight and weather extremes
- Fast cure, high strength
- Performs in high temperature applications, up to 500°F (260°C) continuously, and 550°F (288°C) intermittently
- Remains flexible; will not become brittle, crack, shrink, or chalk

^{*}Cost-effective alternative to DOWSIL™ 736



DOWSIL™ 700 Industrial Grade Silicone Sealant

Designed for general industrial sealing and adhesive applications.

APPLICATIONS:

- Sealing HVAC ducts and enclosures
- Weatherproofing outdoor units
- Sealing HVAC equipment
- Gasketing
- Vibration damping

FEATURES:

- One-part room temperature cure
- Free of any petroleum distillates
- Resistant to weathering and adverse conditions
- Long-lasting, airtight seals
- Meets FDA Reg 21 CFR 177.2600, NSF 51 food contact requirements, and UL QMF22



PART №	SIZE	COLOR	CASE / PALLET
4060123	300 mL	Aluminum	12 / 1,296
4060067	300 mL	Clear	12 / 1,296
4060069	300 mL	Black	12 / 1,296
4060068	300 mL	White	12 / 1,296

DOWSIL™ 732 Multi-Purpose Sealant

One-component, acetoxy-cure adhesive sealant engineered for general industrial sealing and bonding applications. Features extensive technical specifications for more regulated applications.

APPLICATIONS:

- Sealing gaps and joints in ductwork
- Weatherproofing outdoor units
- Gasketing
- Vibration damping

FEATURES:

- Non-sag, paste consistency
- Easy to apply
- Cures to a tough, flexible rubber
- Good adhesion to many substrates
- Excellent dielectric properties
- Meets MIL-A-46106, FDA Reg 21 CFR 177.2600, NSF 51, and NSF 61 requirements
- UL Listed

PART №	SIZE	COLOR	CASE / PALLET
1891961	90 mL	Aluminum	12 / 3,000
99179259	300 mL	Aluminum	12 / 1,296
2112531	90 mL	Black	12 / 3,000
99179209	300 mL	Black	12 / 1,296
3138356	90 mL	Clear	12 / 3,000
99179271	300 mL	Clear	12 / 1,296
3140717	90 mL	White	12 / 3,000
99179246	300 mL	White	12 / 1,296

DOWSIL™ 736 Heat Resistant Sealant

Non-slumping sealant designed for sealing and bonding applications exposed to temperatures as high as 600°F (315°C).

APPLICATIONS:

- Sealing and encapsulating heating elements in appliances
- Moving oven belts
- Bag filters on smokestacks
- Furnace maintenance and repairs
- Electrical enclosures and connections

- One-component silicone that will not sag or run
- Can be applied overhead or on side walls
- Designed to meet MIL-A-46106 Rev. B Spec
- Meets FDA Reg 21 CFR 177.2600, NSF 51 food contact requirements, and UL QMF22
- UL 94 HB compliant (low-flammability)

PART №	SIZE	COLOR	CASE / PALLET
2423472	90 mL	Red	12/3,000
99179248	300 mL	Red	12 / 1,296



Glycol-Based Heat Transfer Fluids



PROPYLENE GLYCOL

DOWFROST™ Heat Transfer Fluid

A formulation of 96.0% food-grade propylene glycol plus 4% food-grade corrosion inhibitors. Acceptable for use as a heat transfer fluid where there is a possibility of incidental food contact.

APPLICATIONS:

- Food production and processing
- Fermentation cooling
- Packaging carbonated beverages
- Plastic bottle blow molding
- Ice-making
- Refrigeration coil defrosting
- Geothermal

FEATURES:

- Made entirely from food grade raw materials conforming to FDA CFR 21 and NSF guidelines
- Made with pharmaceutical grade DOW Puraguard™ Propylene Glycol USP/EP
- Provides freeze protection to below -60°F (-51°C) and burst protection to below -100°F (-73°C), depending on concentration
- Industrially inhibited heat transfer fluid with an operating range of -50°F to 250°F (-46°C to





DOWFROST™ HD Heat Transfer Fluid

A formulation of 94.0% propylene glycol and a specially designed 6% package of industrial corrosion inhibitors.

APPLICATIONS:

- HVAC
- Chill water and hydronic heating systems
- Geothermal
- Snow melt and turf heating systems
- Solar hot water heating
- Fire water sprinkler systems
- Refrigeration
- Ice skating rinks
- Large-scale chiller systems
- Cold storage, refrigerated warehouse
- (TES)
- Thermal Energy Storage

- Engineered for closed loop HVAC systems with operating range of 50°F to 325°F (-46°C to 163°C)
- Made with pharmaceutical grade DOW Puraguard™ Propylene Glycol USP/EP
- Provides freeze protection to below -60°F (-51°C) and burst protection to below -100°F (-73°C), depending on concentration
- Industrial corrosion inhibitors offers additional protection for systems containing copper components
- Widely used wherever low toxicity, environmentally friendly heat transfer fluids are needed - school and hospitals
- Fluorescent yellow for leak detection

*Only select part numbers displayed. Contact Lentus for additional concentrations

PART №	PRODUCT	SIZE	COLOR	CASE / PALLET
9992103	DOWFROST™ HD	1 Gal Bottle	Yellow	4 / 108
9992102	DOWFROST™ HD	5 Gal Pail	Yellow	1/24
9992101	DOWFROST™ HD	55 Gal Drum	Yellow	1/4
9992158	DOWFROST™ HD 70	1 Gal Bottle	Yellow	4 / 108
9992157	DOWFROST™ HD 70	5 Gal Pail	Yellow	1/24
9992156	DOWFROST™ HD 70	55 Gal Drum	Yellow	1/4
9990323	DOWFROST™	1 Gal Bottle	Blue	4 / 108
9990321	DOWFROST™	5 Gal Pail	Blue	1/24
9990221	DOWFROST™	55 Gal Drum	Blue	1/4
9990623	DOWFROST™ 70	1 Gal Bottle	Blue	4 / 108
9990621	DOWFROST™ 70	5 Gal Pail	Blue	1/24
9990521	DOWFROST™ 70	55 Gal Drum	Blue	1/4
9995006	DOWCAL™ 200	1 Gal Bottle	Blue	4 / 108
9995005	DOWCAL™ 200	5 Gal Pail	Blue	1/24
9995000	DOWCAL™ 200	55 Gal Drum	Blue	1/4
9996003	DOWFROST™ LC 25	5 Gal Pail	Yellow	1/24
9996002	DOWFROST™ LC 25	55 Gal Drum	Yellow	1/4
9996001	DOWFROST™ LC 25	275 Gal Tote	Yellow	1/1

Glycol-Based Heat Transfer Fluids





DOWCAL™ 200 Heat Transfer Fluid

Aluminum safe glycol used in a wide range of industrial, construction, and infrastructure applications. Its low acute toxicity makes it especially suitable for applications where toxicity is a concern.

APPLICATIONS:

- Solar heating
- Floor heating
- Snow melting systems
- Process heating
- Heat recovery
- Cooling of electronic systems
- Wind turbine systems
- Photo-voltaic (PV) inverters
- Data center cooling
- Ice skating rinks

FEATURES

- Provides long lasting and efficient corrosion protection, particularly for aluminum alloys
- · Low acute oral toxicity
- Free of nitrite, borax, and CMR (carcinogenic, mutagenic and reprotoxic)
- Recommended operating temperature range between -50°F to 350°F (-46°C to 121°C)
- Long fluid lifetime, lowering maintenance cost
- Hard water stability to enable use with local tap water
- Compatible with commonly used elastomers



DOWFROST™LC 25 Heat Transfer Fluid

The optimal fluid for efficient heat removal in Datacom Equipment Cooling Systems (DECS) and Coolant Distribution Units (CDUs) located within server racks. A customized inhibitor package provides superior corrosion protection for liquid-cooled, direct-to-chip applications with high surface area copper components.

APPLICATIONS:

- Direct-to-chip liquid cooling systems
- Liquid-based Datacom Equipment Cooling System (DECS)
- Glycol Cooled Computer Room AC Units (CRAC)
- Pumped refrigerant and glycol loop heat exchangers

FEATURES:

- Engineered and optimized to specifically serve the emerging liquid cooling needs of the data center and Al industries
- Premium propylene glycol formulation composed of a unique blend of industrial corrosion inhibitors
- Provides exceptional freeze protection down to -60°F (-50°C) and burst protection down to -100°F (-73°C)
- Specially designed package protects against industrial corrosion
- Maintains functionality and protection in extreme conditions
- Fluorescent yellow for easy leak detection
- Thermal stability from -14°F to 195°F (-26°C to 91°C)
- Resists and prevents bio-fouling

ETHYLENE GLYCOL

DOWTHERM™ SR-1 Heat Transfer Fluid

A formulation of 95.5% ethylene glycol and a specially designed 4.5% package of industrial corrosion inhibitors.

APPLICATIONS:

- HVAC systems
- FSRU (Floating Storage Regasification Unit) for chillers, heat pumps, temperaturesensitive materials, deicing, defrosting, and dehumidifying
- Solar heating
- Ice skating rinks

- Manufactured with 100% virgin ethylene glycol and formulated with heavy-duty industrial inhibitor packages that prevent corrosion
- Provides freeze protection for the system loop down to 14°F (-10°C)
- Specifically engineered for metal components with a high copper surface area
- Cost-effective cooling solution vs air cooling systems
- Fluorescent pink for easy leak detection
- Recommended temperature range of -60°F (-51°C) to 250°F (121°C)









Lucas Oil® Penetrating Oil

Designed to loosen rusted-on nuts and bolts, finding its way between the tiniest of crevices between metal parts and lubricating them.

APPLICATIONS:

- Nuts, bolts, and hinges
- Bearings
- Valves
- Motors

FEATURES:

- Fortified with powerful corrosion inhibitors and wetting agents
- Slow evaporation that leaves a tenacious film that fights water and corrosion
- Use in any position, even upside down

PART №	SIZE	CASE / PALLET
11043	11 OZ Aerosol	12 / 1,296

Lucas Oil® Contact Cleaner

A unique blend of solvents, cleaning agents, and propellants designed to remove oil, dirt, and moisture that may interfere with electrical conductivity or cause malfunctions.

APPLICATIONS:


- Control boards, relays, switches, and sensors
- Capacitors
- Thermostat contacts
- Control panels
- Variable frequency drives

FEATURES:

- Superior cleaning and drying formula; dries quickly and leaves no residue
- Greater value compared to competitor's products
- Compatible with all metals and rubber seals
- Non-chlorinated and CFC-free
- 50-state VOC-compliant

*EXTREMELY FLAMMABLE. Do not store near fire, heated surfaces, sparks, or flames

PART №	SIZE	COLOR	CASE / PALLET
10799	14 OZ	Colorless	12 / 792



Smooth, tacky calcium-sulfonate grease enhanced with rust and oxidation inhibitors.

APPLICATIONS:

- Valves
- Fittings with high levels of stress or friction
- Numerous industrial applications, including wheel bearings and chassis lubrication

- NLGI #2
- Water-resistant
- Excellent mechanical stability
- Long storage life
- Enhanced tackiness enables longer performance
- Multi-purpose extreme pressure grease

PART №	SIZE	COLOR	CASE / PALLET
11025	11 OZ Aerosol	Clear	12 / 1,296
10005-30	14 OZ Cartridge	Red	30 / 1,800
10574	1 LB Tub	Red	12 / 1,200
10027	35 LB Pail	Red	1/24
10028	120 LB Keg	Red	1/8
10029	400 LB Drum	Red	1/4



Lucas Oil White Lithium Grease

Multi-purpose, high-quality NLGI #2 formulation.

APPLICATIONS:

- Latches and hinges
- HVAC systems with high-heat buildup
- Plain and anti-friction bearings operating under moderate load conditions

FEATURES:

- White and creamy in appearance
- Long-lasting and reduces wear
- Extreme friction reducer
- Provides water-resistance protecting metal parts
- Indoor and outdoor use
- Compatible with metal and plastic
- Doesn't drip or run

PART №	SIZE	COLOR	CASE / PALLET
10533	8 OZ Tube	White	12 / 840
10535	35 LB Pail	White	1/24



BEST

Lucas Oil® Tool Box Buddy

Long-lasting and super slick. Allows tools to run more easily and much longer. Superior lubricant packaged for the tool box.

APPLICATIONS:

- Fan and blower motors
- Hinges and moving parts
- Thermostat mechanisms
- Dampers and actuators
- Valves and fittings

FEATURES:

- Extends tool life
- Protects under extreme operating temperatures
- Disperses water
- Resists blowout

PART №	SIZE	COLOR	CASE / PALLET
10070	2 OZ	Clear	18 / 4,536

LENTEK[™] Sealants



LENTEK™ Insulating Foam Sealant

Fills and insulates gaps efficiently with the power of long-lasting, water-resistant, expanding foam. Provides a simple, cost-effective solution to eliminate unwanted airflow and improve energy efficiency.

APPLICATIONS:

- Wider gaps, joints, and cavities
- Insulating of door and window frames
- Penetrations in walls
- Insulating electrical outlets, water pipes, ducts, refrigerant lines, and condensate drain pans
- Vibration dampening
- Expansion joint filling
- · Sealing and air barrier

FEATURES:

- 18-month shelf life
- Triple expanding
- UL Classified
- Interior and exterior use
- Long-lasting, airtight, and weather-resistant seals
- Adheres to wood, metal, masonry, glass, and most common building materials


PART №	SIZE	COLOR	CASE / PALLET
2299120	12 OZ Straw Can	Tan	12/912

LENTEK™ Fireblock Foam Sealant

Impedes spread of fire and smoke through service penetrations. Fills and insulates gaps efficiently with the power of long-lasting, water-resistant, expanding foam. Orangecolored foam for easy identification and inspection.

- Seals service penetrations between floors and

- 18-month shelf life
- UL Classified
- B2 fire rating
- Adheres to wood, metal, masonry, glass, and most common building materials

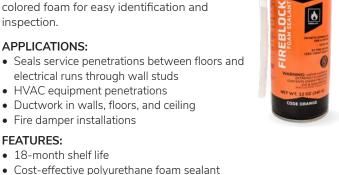

PART №	SIZE	COLOR	CASE / PALLET
2299121	12 OZ Straw Can	Orange	12/912

GREAT STUFF™ Spray Adhesives and Specialty Coatings





Heavy-Duty Web Spray Adhesive with Kevlar®


Heavy-Duty is an advanced web spray adhesive providing maximum strength and durability for permanent bonding on a wide array of heavy-weight materials.

APPLICATIONS:

- Insulation and cornerbead
- Tiling and flooring
- Fabric and carpet

FEATURES:

- Permanent bond strength
- Fast tack
- Web spray pattern
- Withstands extreme temperatures and conditions
- Preferred choice for heavier materials





Multi-Use Premium Mist Spray Adhesive with Keylar®

The only multi-use mist spray adhesive made with Kevlar[®]. It is an advanced mist spray adhesive that quickly bonds a wide array of materials suitable for pro and DIY projects.

APPLICATIONS:

- Fiberglass insulation
- Hard and porous surfaces
- Jobsite plastic film

FEATURES:

- Extra strength bonds
- Repositionable before curing
- Dries quickly and clear
- Low soak-in formula



PART №	SIZE	COLOR	CASE / PALLET
GSMA14101	14 OZ	Colorless	6 / 1,170

Extreme Seal with Kevlar®

The only flexible rubber sealant formulated with Kevlar[®]. It is the ultimate flexible rubber spray engineered with the pro in mind. Use to coat, repair, and prevent water and air leaks.

APPLICATIONS:

- Gutters and downspouts
- Roofing and chimney
- Foundation and weatherizing
- Rust protection

- Repairs and prevents water and air leaks
- Works with Great Stuff[™] insulating foam
- Stays where sprayed for less drip and mess
- Provides UV protection
- Paintable after curing

PART №	SIZE	COLOR	CASE / PALLET
GSEC14101	14 OZ	Clear	6 / 1,170
GSEW14101	14 OZ	White	6 / 1,170
GSEB14101	14 OZ	Black	6 / 1,170



GREAT STUFF™ Insulating Foams

Long-lasting, weather-resistant polyurethane foam sealant that fills, seals, and insulates gaps.

GREAT STUFF Pro[™] Gaps & Cracks

- Fireblock formulated
- Expands to fill, seal, and insulate gaps up to 3"
- III listed
- Reusable for 30 days when left attached to GREAT STUFF Pro™ Dispensing Gun
- Orange-colored foam

PART №	SIZE	PRODUCT	COLOR	CASE / PALLET
99108824	12 OZ	Gaps & Cracks Smart Dispenser	Tan	12 / 768
00157901	12 OZ	Gaps & Cracks Straw	Tan	12 / 768
00157911	20 OZ	Gaps & Cracks Straw	Tan	12 / 768
00341557	24 OZ	Gaps & Cracks Pro Gun Foam	Orange	12 / 768
00341558	30 OZ	Gaps & Cracks Pro Gun Foam	Orange	12 / 768
99112831	12 OZ	Fireblock Smart Dispenser	Orange	12 / 768



GREAT STUFF™ Gaps & Cracks

- Ready to use and easy to apply
- UL Listed
- Interior/exterior use
- Paintable, stainable, and sandable
- Helps keep insects, moisture/condensation and allergens out (GS-121)



GREAT STUFF™ Fireblock

- All direction dispensing
- Orange-colored foam for easy identification and inspection
- Tested according to ASTM E84, ASTM E814 (modified), and UL 1715
- Impedes the spread of fire and smoke through service penetrations



WORK WIPES

GREAT STUFF™ Heavy Duty Work Wipes

Durable and strong scrub removes uncured GREAT STUFF $^{\!\scriptscriptstyle\mathsf{M}}$ and more.

APPLICATIONS:

- Removes uncured foams, adhesives, silicones, and fillers
- Cleans up oil, paint, grease, grime, and other heavy messes

- Made with sustainable materials
- Large sized 9.8 in by 7.9 in
- Automotive, industrial, work, and household use
- 30 wet wipes per reusable package

PART №	SIZE	CASE
7500104	Case	24 Packs (2 Shelf Ready Boxes)
5900004	1/4 Pallet Display	8 Cases (192 Packs)







GREAT STUFF™ Nitrile with TentaGrip™ Disposable Glove

Offering a patent-pending TentaGrip[™] texture that revolutionizes grip, ensuring a secure hold in various applications and wet or dry conditions.

APPLICATIONS:

- Working with oily or greasy parts
- Handling small components
- Plumbing/HVAC

FEATURES:

- Safe for ESD sensitive applications
- FDA food safe certified (US FDA 21 CFR 177.2600)
- Chemical and puncture resistance
- Latex, powder, and silicone free
- Excellent wet grip

PART №	SIZE	EACH	CASE / PALLET
5000153	S/M	100 Gloves	10 Boxes / 480 Boxes
5000154	L	100 Gloves	10 Boxes / 480 Boxes
5000155	XL	100 Gloves	10 Boxes / 480 Boxes
5000156	S/M	10 Gloves	20 Packs / 1,920 Packs
5000157	L	10 Gloves	20 Packs / 1,920 Packs
5000158	XL	10 Gloves	20 Packs / 1,920 Packs





Industrial Grade Thickness



Touchscreen Compatible



Chemical Resistance

GREAT STUFF™ Latex / Nitrile Blend Disposable Glove

The puncture resistant gloves have the comfort and dexterity of latex and the durability and strength of nitrile, offering industrial grade protection.

APPLICATIONS:

- HVAC
- Plumbing

FEATURES:

- Puncture resistant
- Nitrile and latex blend blue disposable gloves
- Powder-free and polymer-coated



Industrial Grade Thickness



Touchscreen Compatible

PART №	SIZE	EACH	CASE / PALLET
5000089	L 100 Shelf Ready Case	100 Gloves	10 Boxes / 480 Boxes
5000090	XL 100 Shelf Ready Case	100 Gloves	10 Boxes / 480 Boxes
5900005	L 10 Shelf Ready Case	10 Gloves	20 Packs / 1,920 Packs
5900002	1/4 Pallet Display	100 Gloves	8 Cases (80 Boxes)



GREAT STUFF™ Cut Protection Work Gloves

Crafted with an HPPE/steel/fiberglass blend shell, these gloves offer 360° cut resistance, providing reliable protection in demanding environments. The reinforced thumb saddle offers enhanced durability.

APPLICATIONS:

- Sheet metal work
- Installation and servicing of HVAC units
- Installing heavy-duty refrigerant lines and pipes
- Working with sharp-edged tools

FEATURES:

- Sandy nitrile coating
- Breathable, and comfortable, and flexible for long wear
- Lightweight, 18-gauge liner
- Silicone and latex free
- Reinforced thumb saddle





PART №	SIZE	PACK	CASE / PALLET
5000143	S/M	12 Pairs	72 Pairs / 2,592 Pairs
5000112	L	12 Pairs	72 Pairs / 2,592 Pairs
5000113	XL	12 Pairs	72 Pairs / 2,592 Pairs
5000114	XXL	12 Pairs	72 Pairs / 2,592 Pairs





GREAT STUFF™ Impact Protection Work Gloves

Engineered for impact and cut resistance while ensuring a superior grip. With an HPPE/steel/fiberglass blend shell and high visibility back-of-hand impact guards, this glove is designed to protect against smash and pinch hazards while safeguarding your hands from all angles.

APPLICATIONS:

- Heavy-duty sheet metal work
- Installation and servicing of industrial HVAC units
- Removing or replacing heavy or damaged equipment
- Demolition and renovations of plumbing systems
- Working with sharp-edged tools

- High-visibility back-of-hand impact guards
- 360° cut resistance
- Sandy nitrile coating
- Reinforced thumb saddle
- Lightweight, 18-gauge liner
- Silicone and latex free





PART №	SIZE	PACK	CASE / PALLET
5000144	S/M	12 Pairs	36 Pairs / 1,440 Pairs
5000117	L	12 Pairs	36 Pairs / 1,440 Pairs
5000118	XL	12 Pairs	36 Pairs / 1,440 Pairs
5000119	XXL	12 Pairs	36 Pairs / 1,440 Pairs



GREAT STUFF™ Multi Purpose Work Gloves

The sandy nitrile coating offers abrasion resistance and ensures excellent performance in challenging environments, including those with grease, oils, and hydrocarbons. The elastic knit wrist fits securely, preventing dirt and debris from entering.

APPLICATIONS:

- Handling HVAC equipment
- Installing and servicing ductwork
- Maintenance tasks

FEATURES:

- Sandy nitrile coating
- Enhanced dexterity
- Comfortable and breathable
- Lightweight, 15-gauge liner
- Silicone and latex free





PART №	SIZE	PACK	CASE / PALLET
5000141	S/M	12 Pairs	72 Pairs / 2,592 Pairs
5000102	L	12 Pairs	72 Pairs / 2,592 Pairs
5000103	XL	12 Pairs	72 Pairs / 2,592 Pairs
5000104	XXL	12 Pairs	72 Pairs / 2,592 Pairs



GREAT STUFF™ Construction Work Gloves

Offers high visibility, abrasion resistance, and unparalleled grip in wet and dry conditions. The lightweight, 18-gauge liner enhances dexterity, allowing for precise handling of tools and materials, and the reinforced thumb saddle provides added durability.

APPLICATIONS:

- · Installing and removing fixtures
- Working with piping
- Ductwork assembly and installation
- Trenching and excavation work

- Sandy nitrile coating
- High visibility
- Breathable, comfortable, and flexible for long wear
- Lightweight, 18-gauge liner
- Silicone and latex free
- Reinforced thumb saddle







PART №	SIZE	PACK	CASE / PALLET
5000148	S/M	12 Pairs	72 Pairs / 2,592 Pairs
5000150	L	12 Pairs	72 Pairs / 2,592 Pairs
5000151	XL	12 Pairs	72 Pairs / 2,592 Pairs
5000152	XXL	12 Pairs	72 Pairs / 2,592 Pairs



WORK GLOVES SIZING CHART

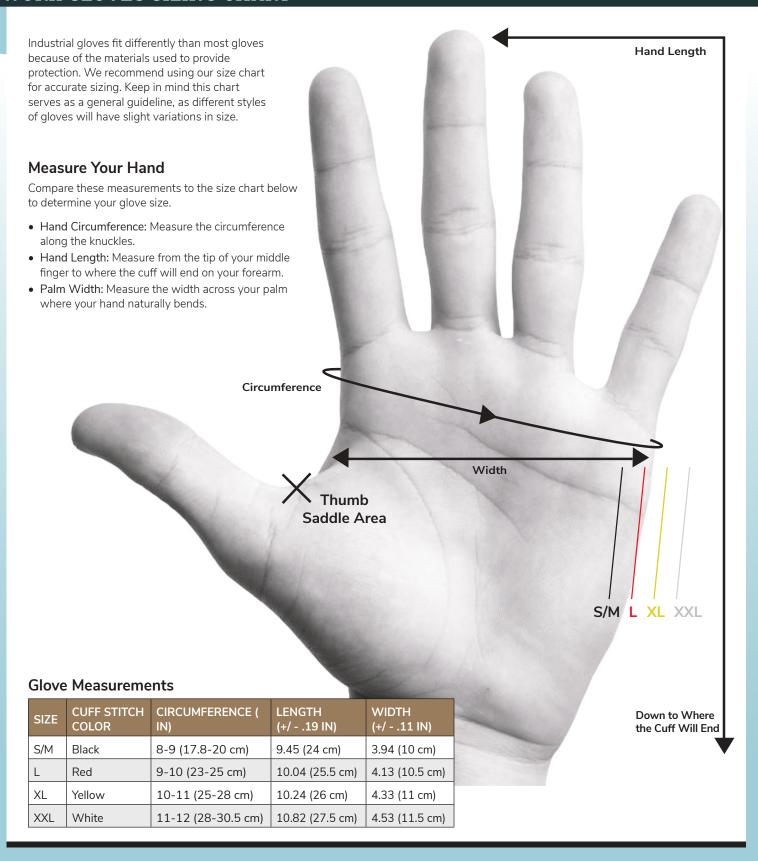

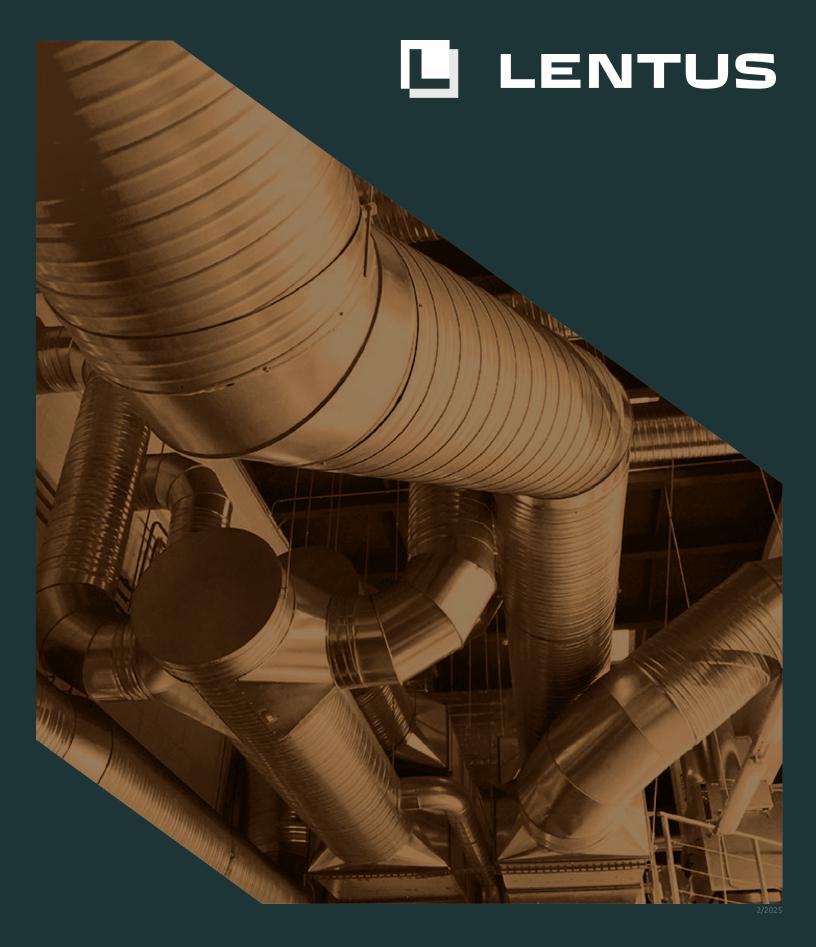





DOWSIL

DOWFROST*

FROTH-PAK™

GREAT STUFF

LUCAS OIL

