

SLA MAX

READY TO START
MAXIMUM POWER

Ready to use, SLA MAX batteries (AGM technology) are **Factory Activated, completely spill-proof, and require no maintenance.** Specially developed to meet the superior needs of big-engine bikes offering maximum performance, maximum reliability and extended life.

ORIGINAL EQUIPMENT
OEM
MANUFACTURER

**plug
and
play**



FACTORY ACTIVATED

AGM (Absorbent Glass Mat) technology.



READY TO USE

Just plug & play.



NO MAINTENANCE

VRLA (Valve Regulated Lead Acid) design.



SPILL-PROOF DESIGN

Factory sealed & electrolyte held in a glass fiber mat.



NO ACID HANDLING

Very safe.



EXTREME VIBRATION RESISTANCE

Reinforced battery case.



MAXIMUM STARTING POWER & EXTENDED CYCLE LIFE

20% higher than SLA CCA.




SUPERIOR CAPACITY

20% higher than SLA capacity.

MOUNTING ANGLES

HIGH INCLINATION
NON-SPILLABLE

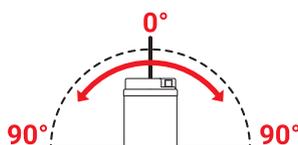

COMPATIBLE CHARGERS

BS 10 Battery size up to 20Ah

BS 30 Battery size up to 60Ah

BS 30 MAX Battery size up to 60Ah

BK 20 Battery size up to 40Ah

DID YOU KNOW?


SLA MAX range is a perfect solution for ATV, UTV, SSV, watercraft & snowmobile too!

SLA MAX batteries are non-spillable, so they're safe to ship and e-commerce ready!

FOR HARLEY DAVIDSON - BGZ SERIES


Developed to fit Harley Davidson bikes, the SLA MAX BGZ series thus offer maximum performance to big-engine vehicles with demanding requirements and extensive electronic equipment.

BS BATTERY TYPE	BS CODE	CAPACITY Ah (10Hr)	CAPACITY Ah (20Hr)	CCA A (-18°C)	DIMENSIONS (IN)			ASSEMBLY LAYOUT	TERMINAL	REPLACEMENT - MOST POPULAR MODELS	
					L	W	H			SLA / SLA MAX	MF / DRY
BGZ16H	300931	16	16.8	240	5,91	3,48	5,71			BTX14H BTX14	BTX14-BS
BGZ16HL	300932	16	16.8	240	5,91	3,48	5,71			BTX14HL BTX14L	BTX14L-BS
BGZ20H	300938	20	21.1	360	6,96	3,5	6,06			BTX20H	BTX20-BS
BGZ20HL	300939	20	21.1	360	6,96	3,5	6,06			BTX20HL	BTX20L-BS BTX20HL-BS BB18L-A
BGZ32HL	300935	32	33.7	500	6,69	5,2	6,89			BIX30HL BIX30L	BIX30L-BS BB30L-B



BUILT-IN COPPER NUTS

Enhanced conductivity (up to 50% more than standard terminal) & improved max torque strength (up to 13N.m).



FRONT & TOP CONNECTIONS

Designed to facilitate the mounting on Heavy Duty motorcycles.



TALLER PLATES

For enhanced CCA & Capacity.

SLA MAX U1-500 GR26-620

ORIGINAL EQUIPMENT
OEM
MANUFACTURER

**plug
and
play**

READY TO START
MAXIMUM POWER

Ready to use, these SLA MAX batteries (AGM technology) are **Factory Activated**, **completely spill-proof**, and **maintenance-free**. Specially engineered for ATV and UTV applications, they deliver reliable starting power, exceptional vibration resistance, and long-lasting performance even in the toughest off-road conditions.



FACTORY ACTIVATED

AGM (Absorbent Glass Mat) technology.



READY TO USE

Just plug & play.



NO MAINTENANCE

VRLA (Valve Regulated Lead Acid) design.



SPILL-PROOF DESIGN

Factory sealed & electrolyte held in a glass fiber mat.



NO ACID HANDLING

Very safe.



EXTREME VIBRATION RESISTANCE

Reinforced battery case.





MAXIMUM STARTING POWER & EXTENDED CYCLE LIFE

20% higher than SLA CCA.



SUPERIOR CAPACITY

20% higher than SLA capacity.

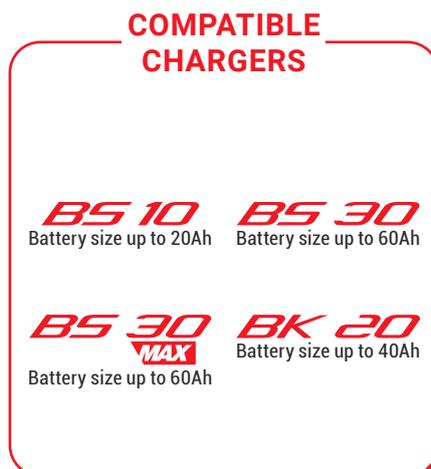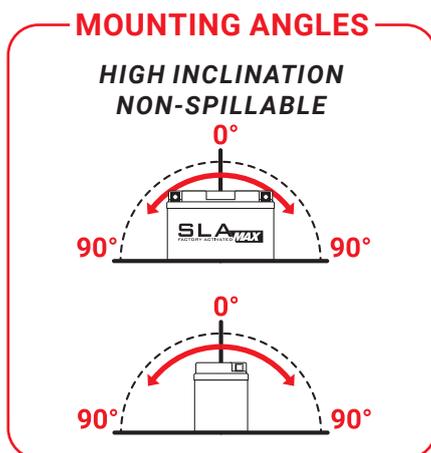

DID YOU KNOW?

Built to handle extreme terrain, mud, and weather, U1-500 and GR26-620 ensure maximum reliability and superior endurance.


FOR POLARIS, YAMAHA & KAWASAKI

Built with a reinforced casing and powerful starting capabilities, the U1-500 and GR26-620 deliver reliability and performance for latest ATVs, SSVs and UTVs.


BS BATTERY TYPE	BS CODE	CAPACITY Ah (10Hr)	CAPACITY Ah (20Hr)	CCA A (-18°C)	DIMENSIONS (IN)			ASSEMBLY LAYOUT	TERMINAL
					L	W	H		
U1-500	300899	30	31.6	500	7.67	4.92	6.92		
GR26-620	300692	51	53	570*	8.64	6.77	7.83		



REINFORCED CASING WITH GRID FRAMEWORK
For a maximum vibration resistance.



8,8 MM TERMINALS**
Specially designed for large SSV/UTV screws.



TALLER PLATES
For enhanced CCA & Capacity.

* 620 A (CA)
** U1-500 only



⊕ **SLA^{MAX}** ⊖
FACTORY ACTIVATED
INCREASED POWER

BS BATTERY

GR26-620

53.0Ah(20h)	570A(CCA) - 620A(CA)
51.0Ah(10h)	12V
16.8kg	NON-SPILLABLE
Charging Guide: Standard: S, I, X2-10h; Quick: 2S, 6A*1h	
SAE B21 1PP1	Made in China

BATTERY RANGE OVERVIEW



DRY BATTERY

CONVENTIONAL



Entry-level bikers with standards requirement.


MF BATTERY

MAINTENANCE FREE



Entry-level bikers seeking easiness.

	DRY BATTERY	MF BATTERY
TECHNOLOGY	Flooded dry	AGM/VRLA
FACTORY ACTIVATED READY TO USE	—	—
NO ACID HANDLING	—	—
NO MAINTENANCE	—	✓ ⁽¹⁾
NON-SPILLABLE	—	—
INCLINATION LEVEL		
OEM APPROVED	—	✓
EASY TO SHIP	—	—
TRANSPORT TYPE		

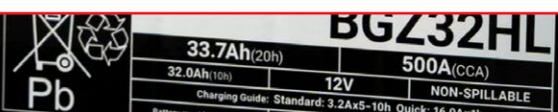

SLA
FACTORY ACTIVATED

READY TO START



Budget-conscious riders looking for performance and time-saving.

SLA MAX
FACTORY ACTIVATED

READY TO START
MAXIMUM POWER



Adventure riders with big engines seeking robust performance and durability.

LITHIUM
LiFePO4

INNOVATION FOR
HIGH PERFORMANCE



Demanding riders seeking for peak performance, lightweight and advanced technology.

LITHIUM MAX
LiFePO4

INNOVATION FOR
MAXIMUM PERFORMANCE




Selective riders aiming to meet the latest standards of modern vehicles.

AGM/VRLA

AGM/VRLA

LiFePO4

LiFePO4

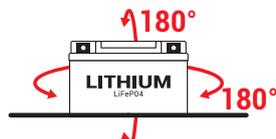

(1) Once activated | (2) According to ADR, IMDG & IATA regulations

UPGRADE CROSS REFERENCE CHART

DRY	MF	SLA	SLA MAX	LITHIUM
	BTZ5S/BTX4L-BS+	BTZ5S/BTX4L+		BSLi-02 ; BSLi-02 MAX
		BTZ6S/BTX5L		BSLi-02 ; BSLi-02 MAX
	BTZ7S-BS	BTZ7S		BSLi-02 ; BSLi-02 MAX
	BT7B-BS	BT7B-4		BSLi-03
		BTZ7V		BSLi-02 ; BSLi-02 MAX
		BTZ8V		BSLi-02 ; BSLi-02 MAX
	BT9B-BS	BT9B-4		BSLi-03
	BTZ10S-BS	BTZ10S		BSLi-04/06
	BTZ12S-BS	BTZ12S		BSLi-04/06 ; BSLi-09
	BT12B-BS	BT12B-4		BSLi-04/06
	BTZ14S-BS	BTZ14S		BSLi-04/06 ; BSLi-09
	BT14B-BS	BT14B-4		BSLi-04/06
51814 ; 51913			51913 MAX	BSLi-12
	BT12-10Z-BS	BT12-10Z		
	BT4B-BS	BT4B-5		
	BTR4A-BS	BTR4A-5		
	BTX4L-BS+/BTZ5S-BS	BTX4L+/BTZ5S		BSLi-02 ; BSLi-02 MAX
	BTX5L-BS	BTX5L/BTZ6S		BSLi-02 ; BSLi-02 MAX
		BTX6.5L		BSLi-02 ; BSLi-02 MAX
	BTX7L-BS	BTX7L		BSLi-02 ; BSLi-02 MAX
	BTX7A-BS	BTX7A		BSLi-03
	BTX9-BS	BTX9		BSLi-03
	BT12A-BS	BT12A		BSLi-04/06
	BTX12-BS	BTX12		BSLi-04/06
	BTX14-BS	BTX14	BTX14H MAX ; BGZ16H MAX	BSLi-04/06
	BTX14L-BS	BTX14L	BGZ16HL MAX	BSLi-08
BB14-A2 (12N14-4A) ; BB14-B2	BTX14AH-BS	BTX14AH/BB14-A2/B2	BTX14AH MAX	BSLi-04/06
BB14L-A2 (12N14-3A) ; BB14L-B2	BTX14AHL-BS	BTX14AHL/BB14L-A2/B2		BSLi-05
	BTX16-BS	BTX16	BTX16H MAX	BSLi-09
	BTX20-BS	BTX20H	BGZ20H MAX	BSLi-09
	BTX20CH-BS ; BTX20A-BS	BTX20CH		BSLi-09
BB18L-A	BTX20L-BS ; BTX20HL-BS	BTX20HL	BGZ20HL MAX	BSLi-10 ; BSLi-10 MAX
B50-N18L-A/A2/A3	BTX24HL-BS	BTX24HL/B50-N18L-A/A2/A3		BSLi-10 ; BSLi-10 MAX
BB30L-B	BIX30L-BS	BIX30L	BGZ3ZHL MAX	BSLi-10 ; BSLi-10 MAX
6N11A-1B ; 6N11A-3A		6N11A-1B/3A		
6N4-2A ; 6N4-2A-4		6N4-2A/A-4		
6N6-3B ; 6N6-3B-1		6N6-3B/B-1		
6N11A-4 ; 6N11A-4A		6N11A-4A		
B49-6		B49-6		
B38-6A		B38-6A		
12N5.5-3B		12N5.5-3B		BSLi-02 ; BSLi-02 MAX
12N5.5-4A ; 12N5.5-4B		12N5.5-4A/4B		
12N7A-3A		12N7A-3A/B		
BB3L-A ; BB3L-B		BB3L-A/B		BSLi-01
BB4L-B		BB4L-B		BSLi-02 ; BSLi-02 MAX
BB5L-B (12N5-3B)		BB5L-B		BSLi-02
BB7-A (12N7-4A)		BB7-A		BSLi-03
BB7C-A		BB7C-A		BSLi-02 ; BSLi-02 MAX
BB7B-B		12N7A-3A/B		
BB7L-B (12N7-3B) ; BB7L-B2		BB7L-B2		BSLi-02 ; BSLi-02 MAX
BB9-B (12N9-4B-1)	BT9A-BS	BB9-B		BSLi-03
BB10L-A2 ; BB10L-B2 ; BB10L-BP		BB10L-A2/B2		BSLi-05
BB12AL-A/A2		BB12AL-A2		BSLi-05
BB12A-A (12N12A-4A-1) ; BB12A-B		BB12A-A/B		BSLi-04/06
BB14A-A2 ; BB14A-A1		BB14A-A2		BSLi-04/06
BB14-A2 (12N14-4A) ; BB14-B2	BTX14AH-BS	BB14-A2/B2/BTX14AH	BTX14AH MAX	BSLi-04/06
BB14L-A2 (12N14-3A) ; BB14L-B2	BTX14AHL-BS	BB14L-A2/B2/BTX14AHL		BSLi-05
BB16AL-A2		BB16AL-A2		BSLi-05
BB16CL-B	BTX20HL-BS PW	BB16CL-B/BTX20HL PW		BSLi-10 ; BSLi-10 MAX
B50-N18L-A/A2/A3	BTX24HL-BS	B50-N18L-A/A2/A3/BTX24HL		BSLi-10 ; BSLi-10 MAX
53030		53030		BSLi-12 ; BSLi-12 MAX