

DOWNBLAST

BELT DRIVE CENTRIFUGAL ROOF EXHAUSTER



MODEL FEATURES

- Exhaust air up to 28,000 CFM in high static pressure applications up to 1-1/4" w.g.
- Attractive spun aluminum exterior
- Belt drives permit easy performance adjustments when needed
- Non-overloading backward inclined wheel for efficiency at higher static pressures
- cULus 705 Listed

APPLICATION CONSTRUCTION OPTIONS

MODEL NAME	TYPICAL APPLICATIONS
DB	Removal of clean air in general applications

MODEL OVERVIEW

Model DB belt drive fans are designed to exhaust air up to 28,000 CFM in high static pressure applications to 1-1/4". The aluminum exterior provides an attractive appearance. Belt drive results in lower operating RPM and sound levels, making the Model DB well suited to applications where quiet operation is important. Belt drive also permits easy performance adjustments when needed to balance the total ventilation system. The non-overloading backward inclined wheel with its higher static pressure capability makes this unit suitable for either ducted or nonducted applications. Its roof mounting permits location near the area to be ventilated, allowing short duct runs and more efficient operation.

DBs are primarily used for the exhaust of relatively clean air from a wide range of commercial, industrial and institutional environments such as manufacturing and assembly plants, office buildings, schools, hospitals, restaurants, athletic facilities and many others


Model DB is available in our Quickship program. Sizes 24-36 are available for next day, 3-day or 10-day shipping from stock.

Industry best 5 year fan housing warranty, 1 year motor warranty

DOWNBLAST

BELT DRIVE CENTRIFUGAL ROOF EXHAUSTER

CONSTRUCTION FEATURES AND OPTIONS

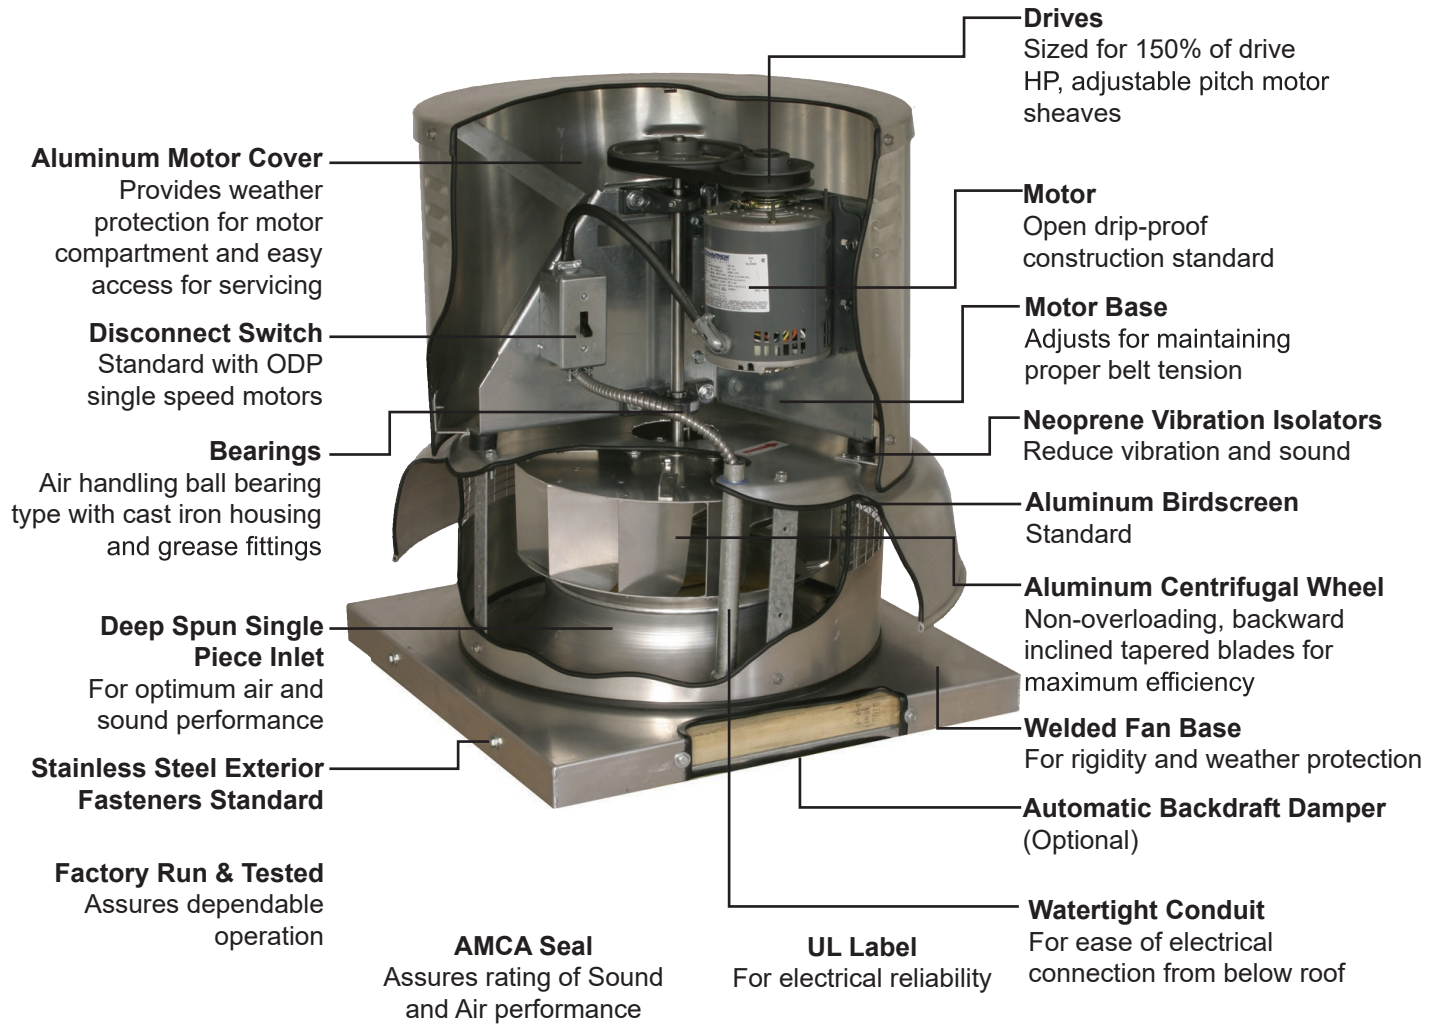

DOWNBLAST

BELT DRIVE CENTRIFUGAL ROOF EXHAUSTER

CONSTRUCTION/SPECIFICATION CHECKLIST

Housing

- Curb cap with integral deep spun inlet for efficient performance.
- Heavy-gauge aluminum for extra strength.
- Designed for maximum weather protection and attractive appearance.
- Heavy-gauge motor support for rigidity and strength.
- Neoprene isolators for reduction of vibration and sound.
- Quick-Release latches on motor cover for easy access to motor compartment.
- Water tight conduit tube for easy electrical connection from below roof.
- Aluminum birdscreen standard.
- Stainless steel fasteners on exterior.

Centrifugal Wheel

- All aluminum wheel.
- Backward inclined for efficiency at higher static pressure.
- Non-overloading for safe operation in ducted systems.
- Tapered blades for efficiency and quiet operation.
- Heavy aluminum hub for extra strength.
- Statically and dynamically balanced for smooth operation.

Motors

- 1 year warranty.
- Brands are nationally recognized and locally serviced.
- Single speed open drip-proof are standard.
- Explosion-proof, totally enclosed and two-speed motors are available.
- All motors are rated for continuous duty.
- 182T and larger motors shipped unmounted for field installation.
- Disconnect switch standard on single speed drip-proof and totally enclosed motors.

Drives

- Sized for minimum 150% of drive horsepower.
- Machined cast iron adjustable motor pulleys.
- Adjustable base for belt tensioning.
- Non-static oil resistant V-Belts.

Bearings

- Heavy-duty ball bearing type.
- Pre-lubricated and permanently sealed.
- 5 year warranty.

AMCA Seal

- Assures accuracy of Air and Sound Performance.

cULus Label


- cULus 705 listing assures electrical safety and reliability.
- cULus 705 must be specified when required.

DOWNBLAST


BELT DRIVE CENTRIFUGAL ROOF EXHAUSTER

OPTIONS/ACCESSORIES

Automatic Belt Tensioner: Available on sizes 6-24, The Automatic Belt Tensioners eliminate the need for regular manual retensioning of drives, and the risk of inadvertently over-tensioning drive components is avoided and overall drive operating efficiency is enhanced. Benefits include reduction in startup and maintenance costs, increased belt life, increased drive efficiency, and ensure drive components do not snag obstructions.

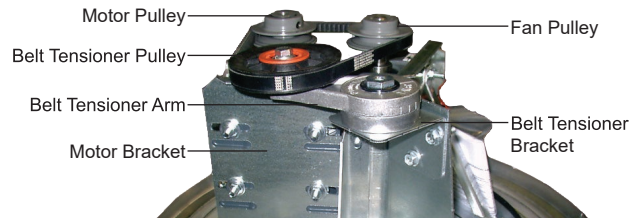

Roof Curb: Prefabricated heavy-gauge galvanized steel, welded construction, 12" high (other heights are also available) with 1-1/2" wood nailer. Assures perfect fit of exhaustor to roof opening. Options include burglar bars, single or double pitch construction and hinged curbs for easy duct access.




Sound Curb: Option of thermal acoustical lining or a complete maximum sound attenuating baffle system. Provision for mounting damper is available. Contact factory for information regarding effect on exhaustor air performance and sound level.

Motor Operated Damper: Motor operated aluminum damper for positive closure against backdraft.



Automatic Damper: Automatic aluminum damper for ease in installation and effective backdraft protection.

Companion Gravity Units: Model RCX-II comes in a wide range of sizes and air capacities to provide relief or intake air to the system. Curbs and dampers are available to fit all sizes. Spun aluminum hoods provide a pleasing appearance, complementing the Model DB exhaustor.




Special Coatings: Powered roof exhaustors often require special coatings for protective and decorative purposes. Available coatings include: Synthetic Resin, Epoxy, and Heresite (air-dried phenolic). Contact your representative or the factory for more information on available coatings and colors.

Curb Hinge Arrangement: The curb hinge arrangement provides easy access to the exhaust fan, backdraft damper, and duct for servicing and cleaning.

DOWNBLAST

BELT DRIVE CENTRIFUGAL ROOF EXHAUSTER

SIZE 24

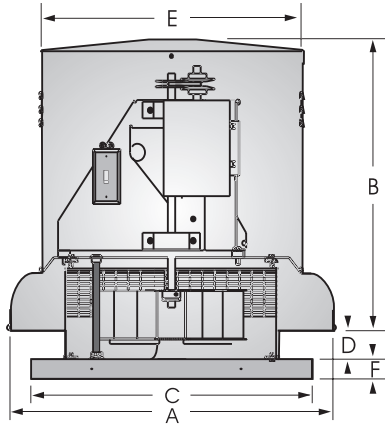

Dimensional Data										
Damper OD	Roof Opening	Curb OD	A	B	C	D	E	F	Fan Wt	Ship Wt
30	30-3/4	33-3/4	41-1/4	26-1/2	35-3/4	8-1/2	30	2-1/2	155	290

CFM / BHP @ Static Pressure / Sones											Drive Range	RPM	HP	Tip Speed
0	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1	1-1/4	Catalog Number				
3286 .09/5.1	2405 .10/3.9	-	-	-	-	-	-	-	-	2401	DP45	330	1/4	2102
3634 .12/6.1	2914 .14/5.2	-	-	-	-	-	-	-	-	2402		365	1/4	2325
3983 .16/7.2	3364 .18/6.6	1948 .15/4.8	-	-	-	-	-	-	-	2403		400	1/4	2548
4480 .23/9.0	3949 .25/8.4	3090 .25/6.9	-	-	-	-	-	-	-	2404		450	1/4	2867
4680 .26/9.7	4176 .28/9.2	3453 .29/7.8	1852 .22/6.8	-	-	-	-	-	-	2405		470	1/3	2994
4879 .30/10.2	4400 .32/9.7	3751 .33/8.6	2388 .27/7.3	-	-	-	-	-	-	2406	DP47	490	1/3	3121
5376 .40/11.7	4952 .42/11.3	4436 .44/10.8	2055 .41/9.0	-	-	-	-	-	-	2407		540	1/2	3440
5576 .44/12.4	5169 .47/11.9	4688 .49/11.5	3972 .48/9.8	2614 .40/8.8	-	-	-	-	-	2408		560	1/2	3567
5874 .52/13.4	5493 .55/12.9	5048 .57/12.5	4447 .57/11.2	3296 .50/9.9	1791 .38/9.8	-	-	-	-	2409	DP48	590	3/4	3758
6073 .57/14.2	5706 .60/13.5	5282 .63/13.2	4735 .63/12.1	3702 .57/10.6	2487 .48/10.8	-	-	-	-	2410		610	3/4	3886
6422 .68/15.6	6078 .71/14.9	5683 .74/14.3	5219 .75/13.8	4557 .73/12.2	3374 .63/11.3	1906 .49/11.1	-	-	-	2411		645	3/4	4109
6770 .80/17.0	6447 .83/16.4	6077 .86/15.9	5670 .88/15.3	5117 .87/14.0	4097 .79/13.1	3051 .70/12.4	-	-	-	2412	DP49	680	1	4332
7069 .91/18.3	6761 .94/17.7	6412 .97/17.2	6033 .99/16.7	5549 1.00/15.5	4848 .96/14.6	3773 .85/14.0	2570 .72/13.8	-	-	2413		710	1	4523
7467 1.07/20	7177 1.10/19.5	6854 1.14/19.0	6502 1.16/18.5	6096 1.18/17.9	5566 1.17/16.7	4594 1.07/16.0	3685 .97/15.4	2423 .80/15.3	-	2414		750	1-1/2	4778
7816 1.22/22	7540 1.26/21	7235 1.30/21	6904 1.33/20	6545 1.35/19.7	6077 1.35/18.6	5479 1.32/17.8	4451 1.18/17.2	3518 1.07/16.6	-	2415	DP51	785	1-1/2	5000
8164 1.40/23	7902 1.43/23	7613 1.47/22	7299 1.51/22	6968 1.53/21	6567 1.54/21	6073 1.53/19.7	5180 1.42/19.0	4360 1.31/18.4	-	2416		820	1-1/2	5223
8513 1.58/25	8262 1.62/24	7988 1.66/24	7691 1.70/24	7380 1.73/23	7029 1.74/23	6587 1.74/22	6059 1.71/21	5077 1.56/20	3286 1.29/20	2417		855	2	5446
8961 1.85/27	8723 1.89/27	8467 1.93/26	8190 1.97/26	7899 2.00/26	7590 2.03/25	7218 2.04/24	6775 2.02/24	6180 1.97/23	4490 1.69/22	2418	DP52	900	2	5733
9210 2.00/28	8979 2.05/28	8731 2.09/28	8464 2.13/27	8182 2.17/27	7888 2.19/27	7550 2.21/26	7136 2.20/25	6665 2.18/25	5053 1.91/23	2419		925	3	5892
9558 2.24/30	9337 2.28/30	9099 2.33/29	8846 2.37/29	8576 2.41/28	8299 2.44/28	7998 2.47/28	7631 2.47/27	7211 2.46/26	5760 2.22/25	2420		960	3	6115
9757 2.38/31	9541 2.43/30	9309 2.47/30	9062 2.52/30	8800 2.56/29	8530 2.59/29	8243 2.62/29	7902 2.63/28	7503 2.62/27	6189 2.42/26	2421	DP52	980	3	6243
9956 2.53/31	9744 2.58/31	9518 2.63/31	9278 2.67/30	9023 2.71/30	8760 2.75/30	8483 2.78/30	8166 2.79/29	7789 2.79/28	6753 2.67/27	2422		1000	3	6370

Power Ratings (BHP) does not include drive losses.

Performance certified is for installation type A - free inlet, free outlet.

Performance ratings include the effects of birdscreen in the airstream.


The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field



DOWNBLAST

BELT DRIVE CENTRIFUGAL ROOF EXHAUSTER

SIZE 30

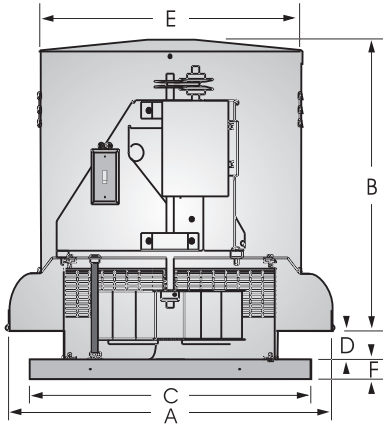

Dimensional Data										
Damper OD	Roof Opening	Curb OD	A	B	C	D	E	F	Fan Wt	Ship Wt
36	37-1/4	40-3/4	58-3/8	37	42-1/2	5-1/2	41	2-1/2	265	465

CFM / BHP @ Static Pressure / Sones											Drive Range	RPM	HP	Tip Speed
0	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1	1-1/4	Catalog Number				
4068 .09/2.7	2456 .09/2.5	-	-	-	-	-	-	-	-	3001	DP53	235	1/3	1871
4588 .13/3.4	3300 .14/3.2	-	-	-	-	-	-	-	-	3002		265	1/3	2110
5107 .18/4.2	4015 .19/3.6	1930 .15/3.4	-	-	-	-	-	-	-	3003		295	1/3	2349
5626 .24/5.0	4681 .26/4.1	3220 .24/3.6	-	-	-	-	-	-	-	3004		325	1/3	2588
6146 .32/5.8	5311 .34/4.7	4149 .33/5.0	-	-	-	-	-	-	-	3005	DP54	355	1/3	2827
6665 .40/6.6	5916 .43/5.3	4921 .43/6.2	3455 .38/6.1	-	-	-	-	-	-	3006		385	1/2	3066
7098 .49/7.3	6406 .51/5.9	5512 .52/6.6	4350 .49/6.4	2246 .38/6.8	-	-	-	-	-	3007		410	1/2	3265
7531 .58/8.1	6888 .61/6.7	6081 .62/7.1	5087 .60/7.0	3601 .53/6.9	-	-	-	-	-	3008		435	3/4	3464
8050 .71/9.1	7456 .74/7.6	6735 .76/7.7	5866 .75/8.5	4743 .71/8.2	2961 .59/8.1	-	-	-	-	3009	DP55	465	3/4	3703
8483 .83/9.8	7925 .86/8.4	7262 .89/8.2	6468 .89/8.9	5528 .85/8.8	4179 .77/8.0	-	-	-	-	3010		490	1	3902
8916 .97/10.6	8388 1.00/9.2	7775 1.03/8.7	7047 1.03/9.4	6215 1.01/9.2	5132 .95/8.6	3571 .82/8.8	-	-	-	3011		515	1	4101
9608 1.21/12.0	9124 1.25/10.6	8574 1.30/9.5	7937 1.30/10.2	7213 1.28/11.0	6385 1.25/9.0	5286 1.17/8.9	3788 1.02/8.7	-	-	3012		555	1-1/2	4419
10214 1.46/13.2	9761 1.49/11.7	9257 1.55/10.6	8683 1.55/11.0	8030 1.55/11.7	7315 1.53/12.6	6472 1.48/12.4	5352 1.38/12.2	3860 1.21/21.6	-	3013	DP56	590	1-1/2	4698
10820 1.73/14.5	10395 1.77/13.1	9928 1.84/11.8	9405 1.84/11.7	8817 1.85/12.6	8171 1.84/13.3	7460 1.80/13.0	6604 1.74/12.8	5497 1.62/12.7	-	3014		625	2	4977
11339 1.99/15.6	10936 2.03/14.2	10496 2.07/13.1	10010 2.10/12.6	9469 2.13/13.2	8871 2.12/14.0	8231 2.10/14.8	7507 2.05/14.6	6617 1.96/14.0	4024 1.61/13.8	3015		655	2	5215
11859 2.28/16.7	11474 2.32/15.4	11058 2.36/14.3	10605 2.40/13.4	10104 2.43/14.0	9552 2.43/14.7	8960 2.42/15.4	8319 2.38/15.1	7584 2.32/14.7	5573 2.07/14.5	3016		685	3	5454
12378 2.59/17.9	12011 2.64/16.5	11617 2.68/15.4	11190 2.72/14.4	10724 2.75/14.8	10213 2.77/15.4	9660 2.76/16.1	9076 2.73/16.9	8434 2.69/16.8	6767 2.49/17.9	3017	DP57	715	3	5693
12897 2.93/19.1	12546 2.98/17.9	12171 3.02/16.7	11768 3.06/15.7	11332 3.10/15.6	10857 3.13/16.2	10343 3.13/16.9	9798 3.11/17.6	9220 3.07/18.5	7827 2.93/19.4	3018		745	3	5932
13330 3.24/20	12991 3.29/18.9	12630 3.33/17.8	12245 3.37/16.8	11831 3.41/16.4	11383 3.45/16.9	10899 3.46/17.6	10381 3.45/18.3	9841 3.42/19.1	8602 3.31/19.8	3019		770	5	6131
13936 3.70/22	13612 3.75/20	13270 3.80/19.4	12907 3.84/18.3	12520 3.88/17.4	12104 3.92/18.0	11657 3.95/18.6	11179 3.95/19.3	10676 3.93/19.9	9580 3.84/21	3020		805	5	6410
14542 4.20/23	14232 4.26/22	13907 4.31/21	13563 4.35/19.9	13199 4.40/19.0	12811 4.44/19.1	12396 4.48/19.6	11954 4.49/20	11485 4.48/21	10487 4.41/22	3021	DP58	840	5	6689
15148 4.75/24	14851 4.81/23	14540 4.86/22	14214 4.91/22	13871 4.96/21	13507 5.00/20	13120 5.04/21	12709 5.07/21	12273 5.08/22	11344 5.03/23	3022		875	5	6967

Power Ratings (BHP) does not include drive losses.

Performance certified is for installation type A - free inlet, free outlet.

Performance ratings include the effects of birdscreen in the airstream.


The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field



DOWNBLAST

BELT DRIVE CENTRIFUGAL ROOF EXHAUSTER

SIZE 36

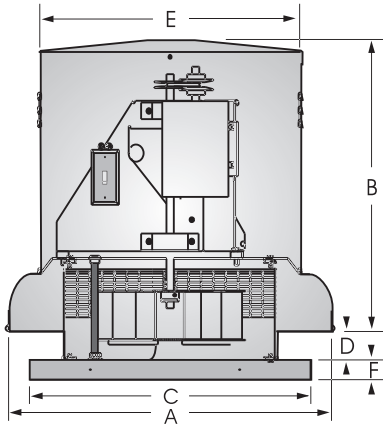

Dimensional Data										
Damper OD	Roof Opening	Curb OD	A	B	C	D	E	F	Fan Wt	Ship Wt
36	37-1/4	40-3/4	58-3/8	37	42-1/2	10	41	2-1/2	275	475

CFM / BHP @ Static Pressure / Sones											Drive Range	RPM	HP	Tip Speed
0	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1	1-1/4	Catalog Number				
5995 .16/3.9	3550 .14/3.0	-	-	-	-	-	-	-	-	3601	DP61	210	1/2	1945
6708 .22/4.9	4887 .22/4.1	-	-	-	-	-	-	-	-	3602		235	1/2	2177
7422 .30/5.9	5964 .31/5.2	-	-	-	-	-	-	-	-	3603		260	1/2	2408
8136 .40/7.0	6868 .42/6.4	4443 .35/5.6	-	-	-	-	-	-	-	3604		285	1/2	2640
8849 .51/8.2	7708 .53/7.7	5686 .48/6.8	-	-	-	-	-	-	-	3605	DP62	310	1/2	2871
9420 .62/9.2	8361 .64/8.8	6793 .62/8.0	4157 .49/7.1	-	-	-	-	-	-	3606		330	3/4	3057
10134 .77/10.1	9166 .80/9.7	7936 .80/9.1	5730 .68/8.3	-	-	-	-	-	-	3607	DP63	355	3/4	3288
10562 .87/10.7	9646 .90/10.3	8521 .91/9.7	6450 .80/8.9	3321 .57/8.8	-	-	-	-	-	3608		370	1	3427
10990 .98/11.3	10122 1.02/10.8	9075 1.02/10.3	7268 .94/9.7	5137 .80/9.0	-	-	-	-	-	3609		385	1	3566
11418 1.10/11.9	10593 1.14/11.4	9607 1.15/10.9	8102 1.09/10.3	6133 .96/9.7	-	-	-	-	-	3610		400	1-1/2	3705
11846 1.23/12.6	11060 1.27/12.0	10120 1.28/11.6	8852 1.25/10.9	6860 1.10/10.4	3994 .84/10.2	-	-	-	-	3611	DP64	415	1-1/2	3844
12275 1.37/13.3	11524 1.41/12.8	10623 1.43/12.2	9521 1.41/11.6	7583 1.26/11.1	5709 1.11/10.5	-	-	-	-	3612		430	1-1/2	3983
12703 1.52/14.3	11985 1.56/13.6	11118 1.58/13.0	10124 1.57/12.4	8417 1.45/11.8	6731 1.31/11.3	-	-	-	-	3613		445	1-1/2	4122
13416 1.79/15.5	12747 1.83/15.0	11931 1.86/14.6	11059 1.86/14.0	9774 1.79/13.3	7958 1.62/12.7	6170 1.44/12.2	-	-	-	3614		470	2	4353
13987 2.03/16.7	13351 2.08/16.2	12574 2.10/15.7	11770 2.11/15.2	10712 2.08/14.6	8982 1.90/14.1	7516 1.76/13.5	4507 1.34/13.2	-	-	3615	DP65	490	2	4539
14558 2.29/17.9	13953 2.34/17.4	13218 2.37/17.0	12453 2.38/16.5	11540 2.37/15.9	10114 2.23/15.2	8485 2.05/14.7	6849 1.86/14.2	-	-	3616		510	3	4724
15272 2.64/19.4	14701 2.69/18.9	14015 2.73/18.5	13287 2.74/18.1	12489 2.74/17.6	11391 2.67/17.0	9739 2.47/16.4	8401 2.32/15.8	6406 2.03/15.6	-	3617		535	3	4955
15986 3.03/21	15445 3.09/21	14803 3.12/20	14106 3.14/19.7	13387 3.15/19.3	12494 3.12/18.7	11151 2.96/18.2	9603 2.75/17.6	8338 2.59/17.1	-	3618		560	3	5187
16556 3.36/22	16038 3.42/22	15427 3.47/22	14754 3.49/21	14078 3.50/21	13283 3.49/20	12187 3.38/19.5	10640 3.15/19.0	9371 2.99/18.5	-	3619	DP66	580	5	5372
17698 4.11/25	17218 4.17/25	16663 4.22/24	16040 4.25/24	15416 4.27/24	14752 4.28/23	13951 4.25/23	12842 4.10/22	11372 3.85/21	8936 3.47/20	3620		620	5	5742
18269 4.52/26	17806 4.59/26	17275 4.64/26	16680 4.67/25	16072 4.69/25	15450 4.70/25	14727 4.69/24	13803 4.60/24	12509 4.37/23	10068 3.97/22	3621		640	5	5928
18840 4.96/28	18393 5.03/27	17884 5.08/27	17315 5.12/27	16722 5.14/27	16130 5.16/26	15470 5.15/26	14678 5.11/25	13586 4.93/25	11030 4.46/23	3622		660	5	6113

Power Ratings (BHP) does not include drive losses.

Performance certified is for installation type A - free inlet, free outlet.

Performance ratings include the effects of birdscreen in the airstream.


The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field



DOWNBLAST

BELT DRIVE CENTRIFUGAL ROOF EXHAUSTER

SIZE 42

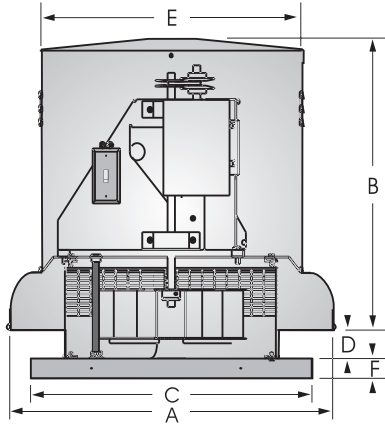

Dimensional Data										
Damper OD	Roof Opening	Curb OD	A	B	C	D	E	F	Fan Wt	Ship Wt
48	50-1/4	53-1/4	73	40-1/2	55	10	54-5/8	2-1/2	425	700

CFM / BHP @ Static Pressure / Sones											Drive Range	RPM	HP	Tip Speed
0	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1	1-1/4	Catalog Number				
8498 .22/4.8	4889 .20/4.4	-	-	-	-	-	-	-	-	4201	DP68	180	1/2	1966
9206 .28/5.5	6287 .28/5.1	-	-	-	-	-	-	-	-	4202		195	1/2	2129
9914 .35/6.3	7461 .36/5.9	-	-	-	-	-	-	-	-	4203		210	1/2	2293
10622 .43/7.1	8475 .45/6.8	-	-	-	-	-	-	-	-	4204		225	1/2	2457
11330 .52/7.9	9396 .55/7.6	4910 .40/7.4	-	-	-	-	-	-	-	4205	DP69	240	1/2	2621
12275 .66/9.0	10579 .70/8.8	7451 .62/8.6	-	-	-	-	-	-	-	4206		260	3/4	2839
12983 .78/9.8	11450 .83/9.5	8825 .78/9.2	-	-	-	-	-	-	-	4207		275	3/4	3003
13691 .92/10.5	12288 .97/10.2	10034 .94/9.9	4980 .63/9.8	-	-	-	-	-	-	4208		290	1	3167
14399 1.07/11.4	13101 1.12/11.0	11116 1.12/10.7	7740 .95/10.5	-	-	-	-	-	-	4209	DP70	305	1	3331
15343 1.29/12.7	14142 1.35/12.3	12411 1.36/11.9	9744 1.25/11.7	-	-	-	-	-	-	4210		325	1-1/2	3549
16051 1.48/13.6	14909 1.54/13.2	13323 1.56/12.9	11079 1.48/12.6	7073 1.16/12.6	-	-	-	-	-	4211		340	1-1/2	3713
16760 1.68/14.6	15670 1.75/14.3	14209 1.78/13.9	12276 1.73/13.6	9251 1.51/13.5	-	-	-	-	-	4212		355	2	3877
17468 1.91/15.7	16424 1.97/15.4	15097 2.01/15.1	13368 1.99/14.7	10756 1.81/14.6	-	-	-	-	-	4213	DP71	370	2	4040
17940 2.07/16.4	16925 2.13/16.0	15681 2.18/15.8	14051 2.17/15.5	11690 2.02/15.4	7879 1.61/15.3	-	-	-	-	4214		380	2	4150
18884 2.41/17.7	17921 2.47/17.5	16818 2.54/17.2	15321 2.54/16.9	13399 2.44/16.7	10674 2.19/16.6	-	-	-	-	4215		400	3	4368
20064 2.89/19.6	19158 2.96/19.4	18187 3.04/19.1	16827 3.05/18.9	15279 3.01/18.6	13084 2.82/18.5	10122 2.46/18.5	-	-	-	4216		425	3	4641
20536 3.10/20	19650 3.17/20	18722 3.26/19.9	17415 3.27/19.7	15970 3.25/19.4	13969 3.08/19.3	11354 2.79/19.2	-	-	-	4217	DP72	435	5	4750
21245 3.43/22	20388 3.50/21	19503 3.59/21	18303 3.62/21	16950 3.61/21	15203 3.49/21	12874 3.23/20	9401 2.69/20	-	-	4218		450	5	4914
21953 3.78/23	21123 3.85/23	20276 3.95/22	19182 4.00/22	17883 3.99/22	16350 3.91/22	14281 3.69/22	11720 3.34/22	-	-	4219		465	5	5078
22897 4.29/24	22101 4.36/24	21297 4.47/24	20323 4.53/24	19089 4.53/24	17764 4.50/24	16014 4.33/23	13804 4.04/23	10779 3.51/23	-	4220		485	5	5296
23605 4.71/26	22832 4.78/26	22057 4.88/25	21158 4.96/25	19975 4.96/25	18753 4.95/25	17204 4.82/25	15217 4.57/25	12857 4.20/25	-	4221	DP73	500	5	5460
23841 4.85/26	23076 4.92/26	22309 5.02/26	21432 5.11/26	20267 5.11/25	19070 5.11/25	17584 4.99/25	15675 4.75/25	13399 4.40/25	-	4222		505	5	5515

Power Ratings (BHP) does not include drive losses.

Performance certified is for installation type A - free inlet, free outlet.

Performance ratings include the effects of birdscreen in the airstream.


The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field



DOWNBLAST

BELT DRIVE CENTRIFUGAL ROOF EXHAUSTER

SIZE 48

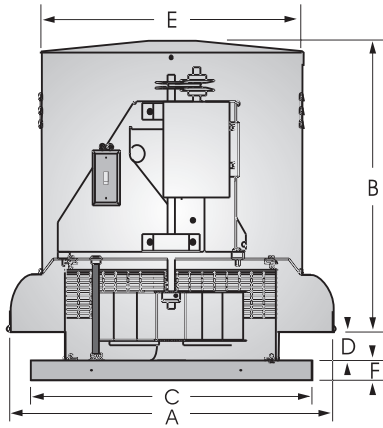

Dimensional Data									
Damper OD	Roof Opening	Curb OD	A	B	C	D	E	F	Fan Wt
48	50-1/4	53-1/4	73	40-1/2	55	13	54-5/8	2-1/2	550
									830

CFM / BHP @ Static Pressure / Sones											Drive Range	RPM	HP	Tip Speed
0	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1	1-1/4	Catalog Number				
9953 0.34/4.5	5916 0.29/4.5	-	-	-	-	-	-	-	-	4801	DP75	165	1/2	2037
10557 0.41/5.0	6969 0.37/5.0	-	-	-	-	-	-	-	-	4802		175	1/2	2161
11462 0.52/5.9	8336 0.49/5.7	-	-	-	-	-	-	-	-	4803		190	1/2	2347
12065 0.61/6.4	9166 0.58/6.3	-	-	-	-	-	-	-	-	4804		200	3/4	2470
13271 0.81/7.6	10719 0.79/7.5	6702 0.64/7.5	-	-	-	-	-	-	-	4805	DP76	220	3/4	2655
13875 0.93/8.2	11459 0.91/8.1	7978 0.78/8.0	-	-	-	-	-	-	-	4806		230	1	2841
14478 1.06/8.9	12182 1.04/8.8	9095 0.93/8.6	-	-	-	-	-	-	-	4807		240	1	2964
15383 1.27/9.6	13243 1.25/9.6	10571 1.16/9.3	6153 0.9/9.6	-	-	-	-	-	-	4808		255	1-1/2	3149
16891 1.68/10.9	14963 1.67/10.9	12732 1.59/10.6	9568 1.4/10.8	-	-	-	-	-	-	4809	DP77	280	1-1/2	3335
17494 1.87/11.4	15638 1.85/11.4	13535 1.78/11.1	10717 1.62/11.2	6483 1.27/11.8	-	-	-	-	-	4810		290	2	3582
18399 2.17/12.2	16641 2.16/12.2	14696 2.1/12.0	12255 1.95/12.1	8622 1.65/12.6	-	-	-	-	-	4811		305	2	3705
19304 2.51/13.1	17632 2.5/13.1	15818 2.44/13.0	13645 2.32/12.9	10639 2.06/13.4	6682 1.66/13.7	-	-	-	-	4812		320	3	3952
19605 2.63/13.4	17961 2.62/13.4	16186 2.56/13.4	14085 2.44/13.3	11250 2.21/13.7	7354 1.8/14.1	-	-	-	-	4813	DP78	325	3	4014
20812 3.14/14.9	19267 3.14/14.9	17627 3.09/14.9	15762 2.98/14.7	13440 2.79/14.8	10204 2.44/15.3	-	-	-	-	4814		345	3	4261
22018 3.72/16.5	20560 3.72/16.5	19033 3.67/16.5	17344 3.58/16.3	15351 3.42/16.2	12772 3.14/16.6	9329 2.7/17.0	-	-	-	4815		365	5	4508
22622 4.03/17.3	21204 4.03/17.3	19726 3.99/17.3	18109 3.9/17.1	16240 3.75/16.9	13902 3.5/17.2	10767 3.09/17.7	-	-	-	4816		375	5	4631
23828 4.72/18.9	22483 4.72/18.9	21094 4.68/18.9	19600 4.6/18.8	17926 4.46/18.6	15941 4.25/18.6	13412 3.92/19.0	10186 3.43/19.3	-	-	4817	DP79	395	5	4878
25034 5.47/21	23755 5.47/21	22443 5.44/21	21051 5.36/21	19525 5.24/20	17782 5.06/20	15680 4.79/20	12999 4.37/21	9847 3.83/21	-	4818		415	5	5310
25939 6.08/22	24705 6.09/22	23445 6.06/22	22117 5.99/22	20682 5.88/22	19077 5.71/21	17201 5.47/22	14891 5.11/22	12003 4.6/22	-	4819		430	7-1/2	5434
26543 6.52/23	25337 6.52/23	24108 6.49/23	22820 6.43/23	21438 6.32/23	19909 6.16/22	18154 5.94/22	16042 5.61/23	13404 5.14/23	-	4820		440	7-1/2	5619
27447 7.21/25	26282 7.21/25	25097 7.19/25	23864 7.13/25	22551 7.03/24	21121 6.88/24	19514 6.67/24	17637 6.38/24	15351 5.98/24	9773 4.83/25	4821	DP80	455	7-1/2	5804
28352 7.94/26	27224 7.95/26	26081 7.93/26	24896 7.87/26	23645 7.78/26	22297 7.64/25	20809 7.45/25	19114 7.19/25	17107 6.83/25	11869 5.73/26	4822		470	7-1/2	5990

Power Ratings (BHP) does not include drive losses.

Performance certified is for installation type A - free inlet, free outlet.

Performance ratings include the effects of birdscreen in the airstream.

The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field

