


# InertSearch™ for GC

InertCap® Applications

## High-octane gasoline

Data No. GA059-0000

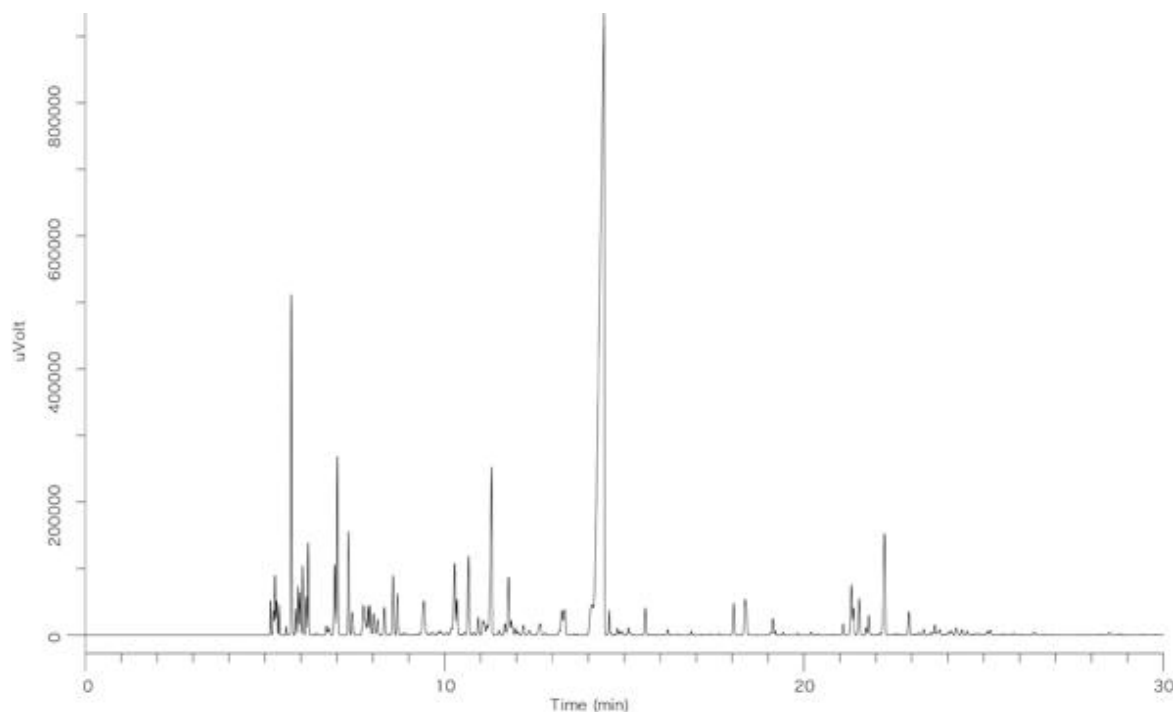

System : GC/FID  
Column : InertCap 1  
0.25mm I.D. × 60m df=0.25µm  
Column Temp. : 40°C (10min) → 5°C/min → 250°C (8min)  
Carrier Gas : He 140kPa  
Injection : Split 1:100 1µL  
250°C  
Detection : FID Range 10<sup>1</sup>  
Sample : Premium gasoline