




OLEFIN (PP)

BELLINI®


Tile Collection
Multi Level Scroll



BL 577

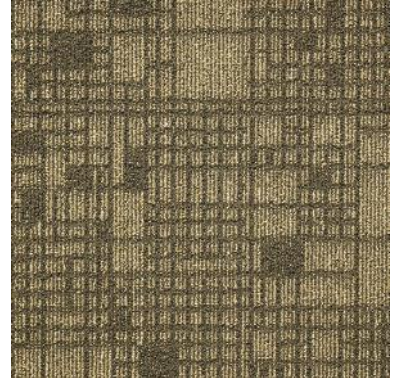

BL 574

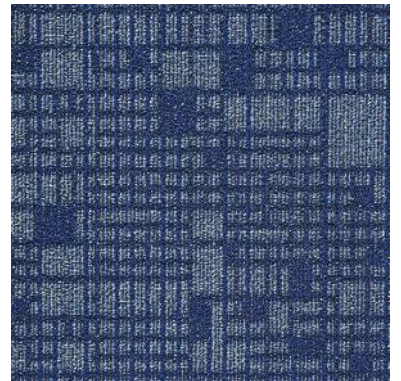

BL 575



BL 579
















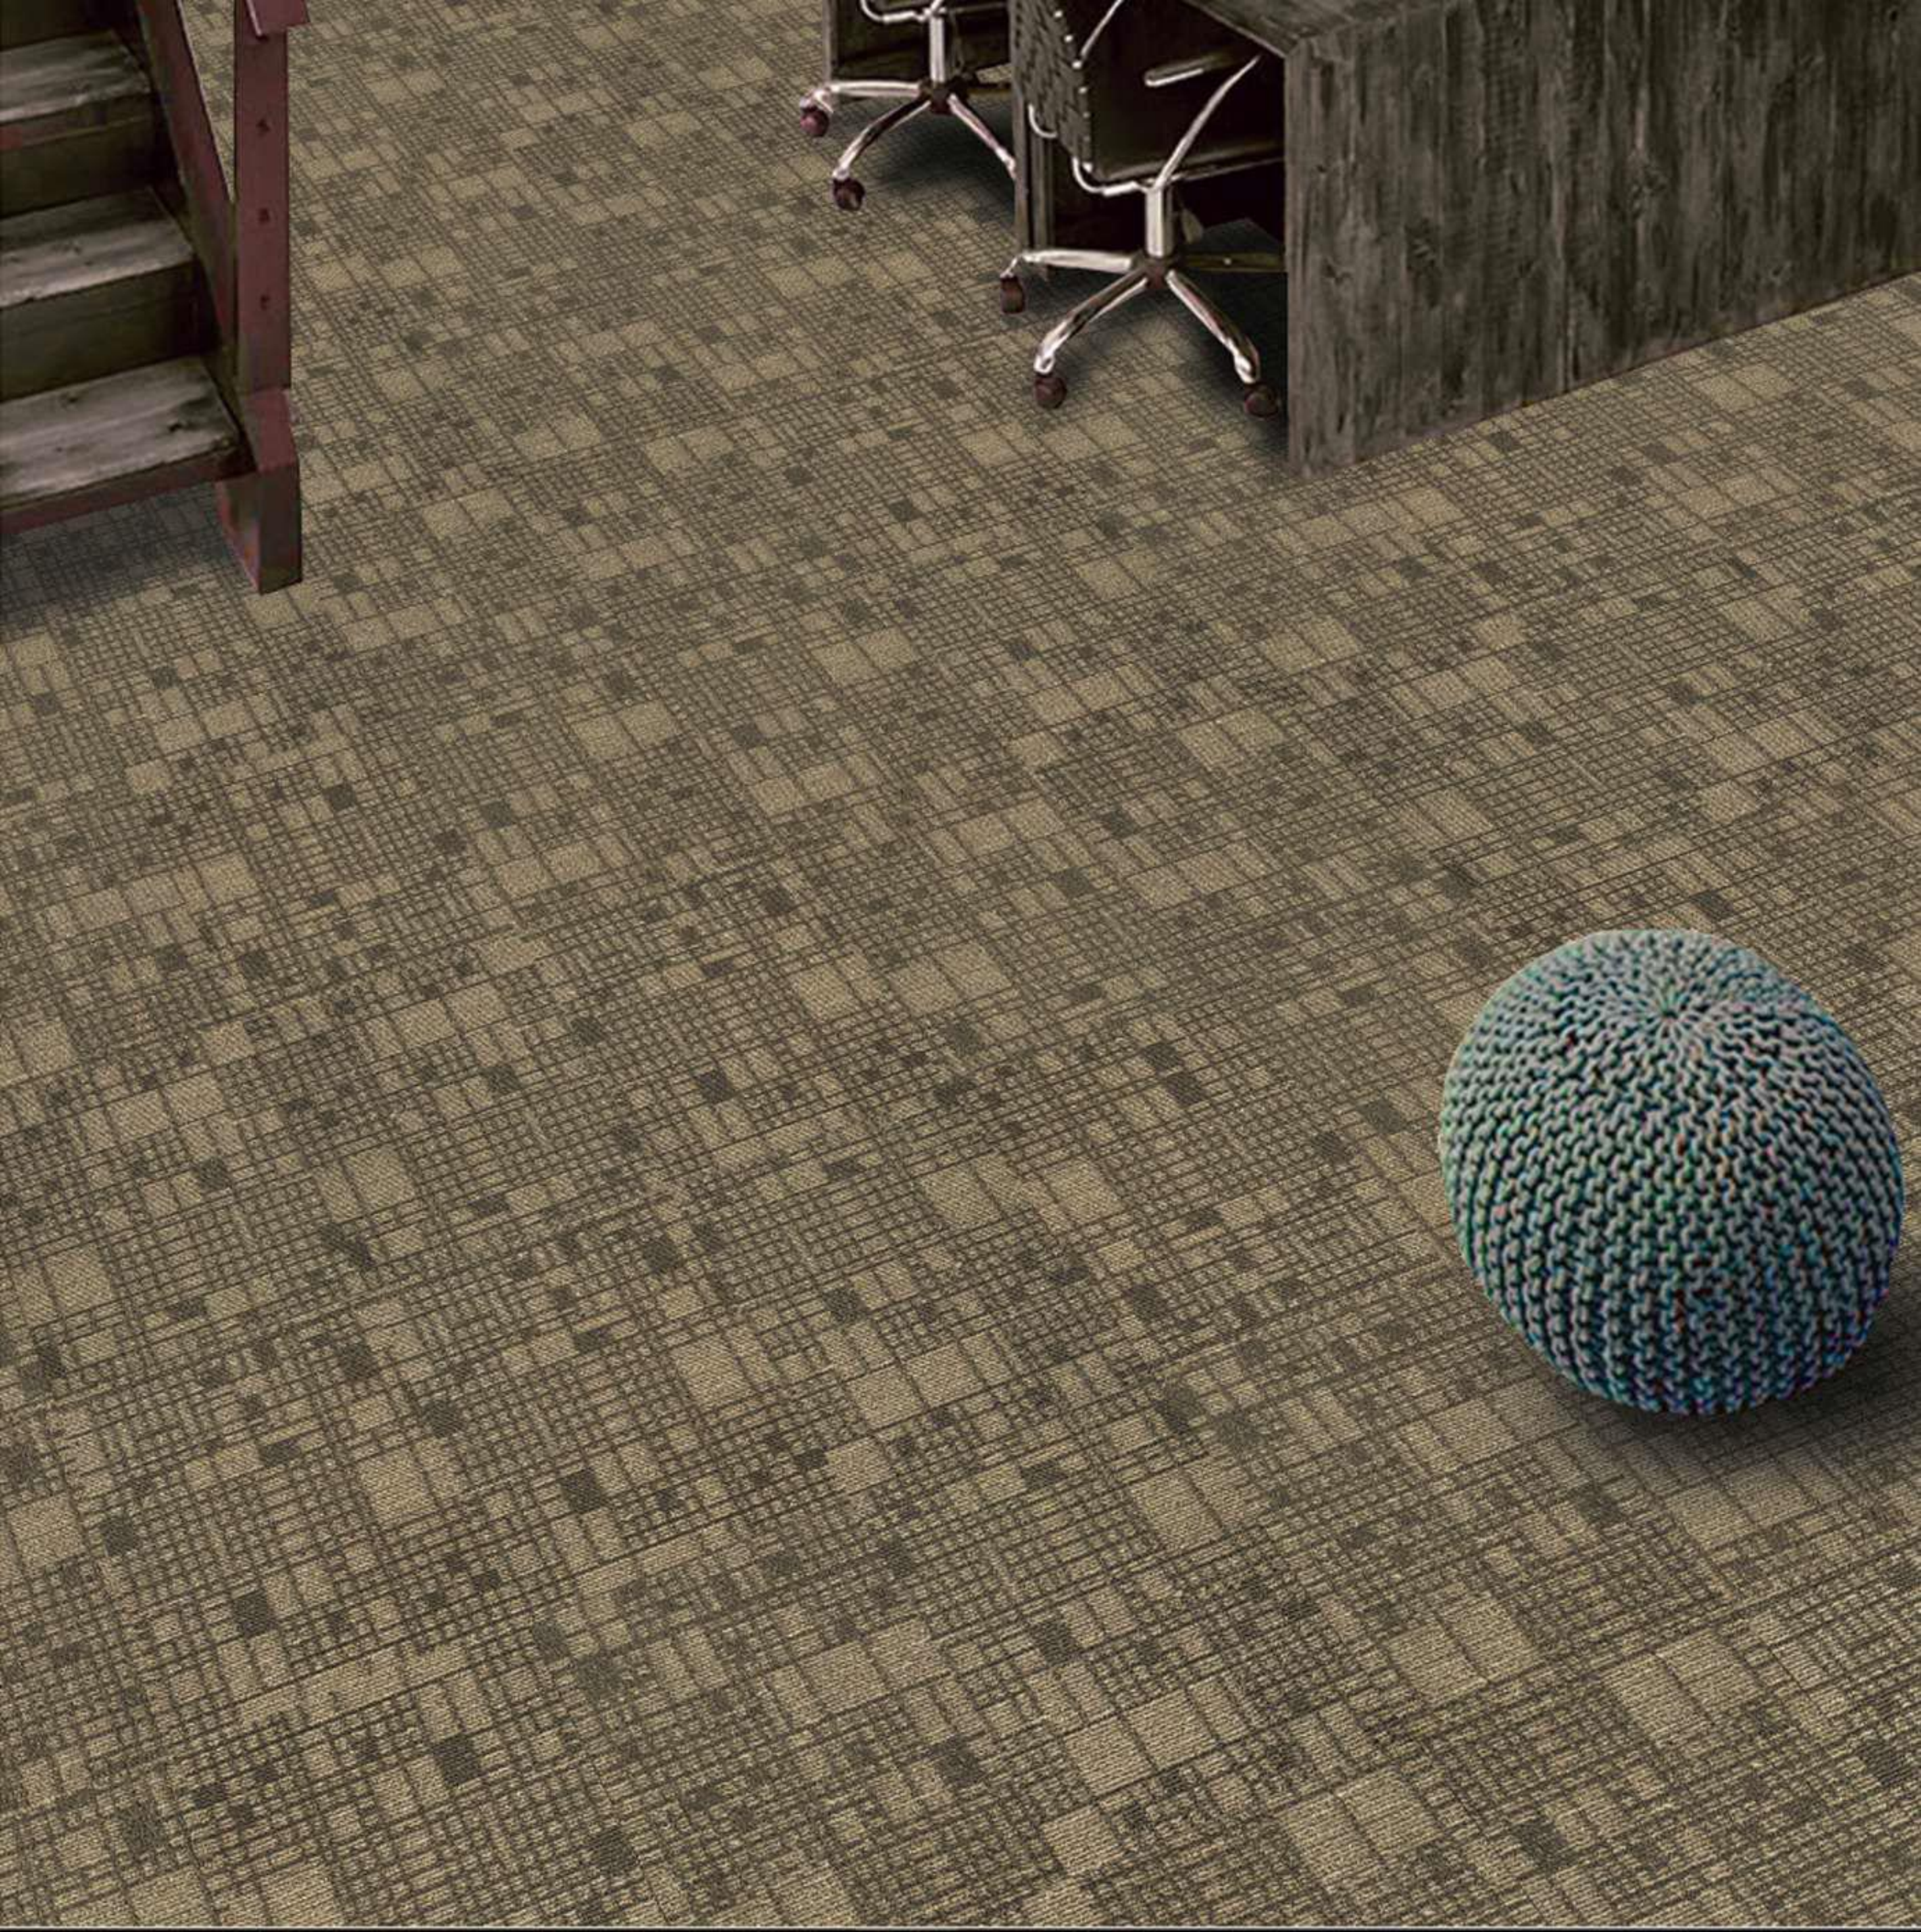



TILE SPECIFICATION

FIBRE	: OLEFIN PP
CONSTRUCTION	: Multi Level Scroll
MACHINE GAUGE	: 1/12"
PILE HEIGHT	: 5 mm
TOTAL HEIGHT	: 8 mm
PILE WEIGHT	: 700 gms/m ²
PRIMARY BACKING	: Non Woven Lutrador
SECONDARY BACKING	: PVC + Fibre Glass
SIZE PER TILE	: 50 cm x 50 cm
NO. OF TILES PER BOX	: 20 pcs per box (5m ²)
INSTALLATION	: Surface Tackifier
ANTISTATIC PROPERTIES	: Permanently Antistatic


PERFORMANCE SPECIFICATIONS

FLAMMABILITY
 KS K 0584 3.1 : char Lenght (cm) 7.1
COLOR FASTNESS TO LIGHT
 KS K 0700, FADE-O-METER, ISO BLUE SCALE (ISO GRADE 4) : Above 4
RUBBING FASTNESS
 KS K 0818 : Weight loss abrasion : 29.7(mg)
ELECTROSTATIC PROPENSITY
 ISO/TR6356, STROLL METHOD : (Volt) 100

• Product specifications are derived from averages resulting from normal manufacturing tolerances in yarns, temperatures, humidity, and colour and colour may vary within normal industry tolerances.
 • Colours are subject to dye lot variations, exact conformity in colour between samples and the final product is not guaranteed (tolerance of min 5% is allowed)

INSTALLATION & MAINTENANCE

- Depending on the installations method, seams may remain visible and this should not be treated as an inherent flaw of carpet tiles.
- The subfloor must be dry, smooth, flat and free of dirt or any debris that could affect adhesions of Tiles on the floor.
- Chair pads are recommended under office chairs to preserve appearance retention, avoid premature wear to carpet tile.
- Carpet maintenance must be regularly be carried out to extend the life of the product.
- Regular use of vacuum - brushing cleaner is the best way to care for carpets.



Features & Certifications

