

AGILOX OCF Datasheet



Find comprehensive details
and specifications of the
AGILOX OCF in the booklet.

www.scanlon.com

AGILOX OCF

Heavy Lifting

SWARM Intelligence

Omnidirectional

Energy Efficient

Open Interfaces

Analytics



The AGILOX OCF is a counterbalanced AMR designed for heavy-load transport on open and closed pallets, effortlessly navigating narrow aisles with its omnidirectional drive.

Available in various configurations, including lift capacity, fork length, and lift height. It handles both simple and complex material handling tasks with precision and efficiency.

Standard 1.6 m Lifting Heights

Fork Lengths 1200 | 1400 mm

Performance Data

1.600 mm **750 | 1.500 kg** **1,4 m/s**

Max. Lifting Height Max. Lifting Weight Max. Speed

1.200 mm

Max. Lifting Height

Dimensions

2.784 x 1.200 x 2.566 mm (L x W x H)

2.784 x 1.200 x 2.340 mm (L x W x H)

Specifications

3 Omnidirectional Drivers

Drive System

3.500 mm

Turning Circle

Dual Electric Spindles

Lift System

3.600 kg


Unit Weight

LiFePO4 with BMS 3 min charging = 1 h operation

Battery

Specification


Details


 Pallet 800 / 1.000 / 1.200 EUR format


 IBC Liquid Tank


 Boxes Plastic / wood / metal

 Palletboxes Plastic / wood / metal


 Dimensions Max xxx12 = Length: 1.200 mm
xxx12= Width: 4.000 mm
xxx14 = Length: 1.400 mm
xxx14 = Width: 4.000 mm

 Other types of carriers - inquiry to supplier

 NB: The vehicle is not limited by plastic wrap on the pallet's foot

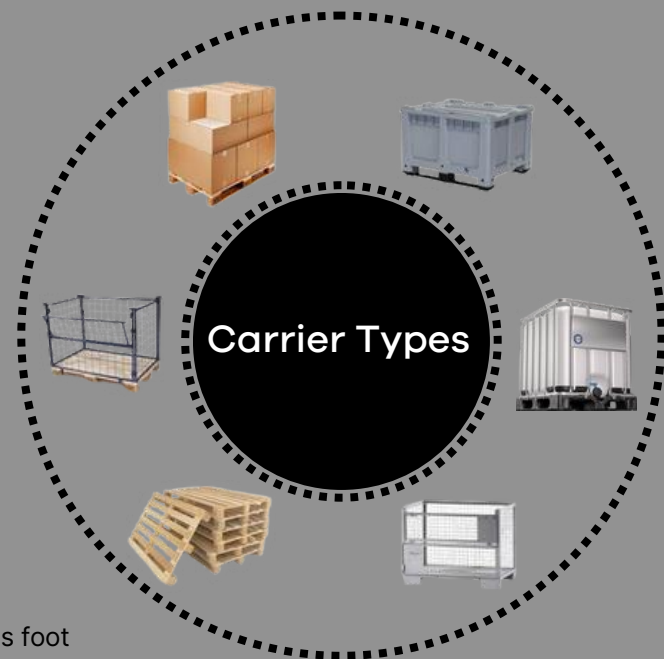

System Overview

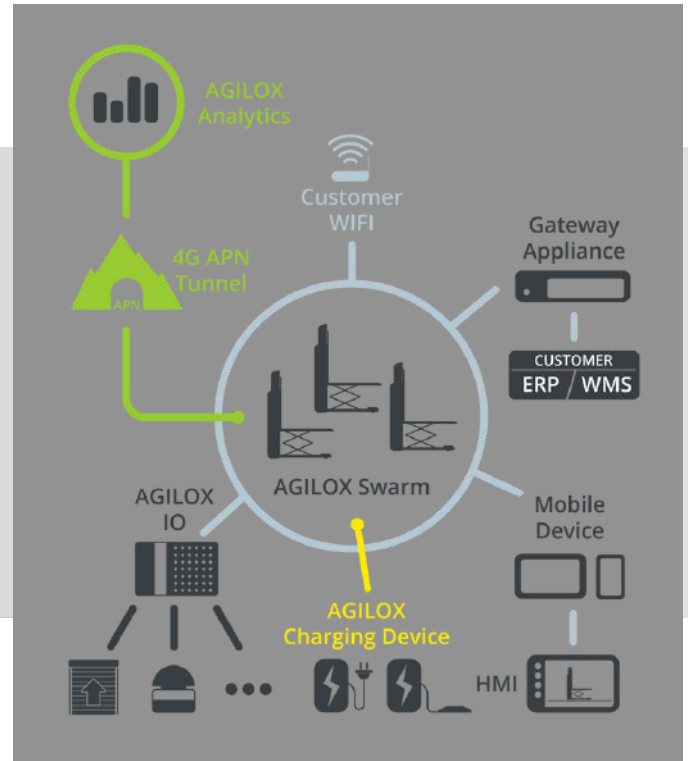

Efficient Charging

Operates 24/7 without battery replacement. 60 minutes of operation with just 3 minutes of charging.



Wi-Fi Connectivity

Requires customer-provided Wi-Fi for seamless communication between vehicles.



System Integration

Easily connects to customer ERP, WMS, or MES via AGILOX JSON API.



Swarm Intelligence

Decentralized navigation optimizes fleet coordination and efficiency.



Mobile Control

The AMRs are managed via smartphone, tablet, or any browser-enabled device.



User-Friendly HMI

The interface is accessible through a web browser, ensuring easy interaction at any time.



Seamless Infrastructure Integration

The IO Box enables connection with existing systems, such as roller doors and fire alarms.



Advanced Analytics

Real-time access to key performance data from anywhere.

HMI

Customer-friendly Interface



The control system features a user-friendly and flexible HMI, providing full control, real-time monitoring, and the ability to adjust autonomous mobile robots and system settings on any device.

Key Features

Open Interface

Seamless integration with existing systems.

Zoom function

Improved screen visibility for detailed operation.

Realtime Vehicle Overview

Instant status updates on all AGILOX units.

Direct Workflow Adjustments

Modify layouts and parameters instantly.

Heatmaps

Visualize movement patterns and optimize efficiency.

Comprehensive Tools

All necessary tools included, with error notifications via email or SMS.

Integrated Documentation

Always accessible and directly embedded.

AGILOX seamlessly integrates with customer management systems. Orders from WMS, ERP, PMS, or MES are automatically converted into transport requests. The integration is provided as a gateway solution with an API (REST) for communication, utilizing JSON scripts combined with OPC I/O.

Flexible Order Trigger Options

Easy Button

Operators can initiate transport orders via screen-configured buttons.

Scheduled Orders

Predefined transport tasks executed at specific times or intervals.

Sensor Activation

Automatic triggering based on PLC signals.

Software Integration

Seamless connectivity with customer management systems.

AGILOX Analytics

Performance Data

Easy Access

Analyze logistics data effortlessly via a browser.

Optimized Operations

Leverage real-time insights to improve fleet efficiency.

Maximum Security


Certified data center with highest security encryption.

Detailed Reports

3.5 billion + data points per vehicle for precise analysis.

Anywhere, Anytime

Access data from any device for continuous optimization.

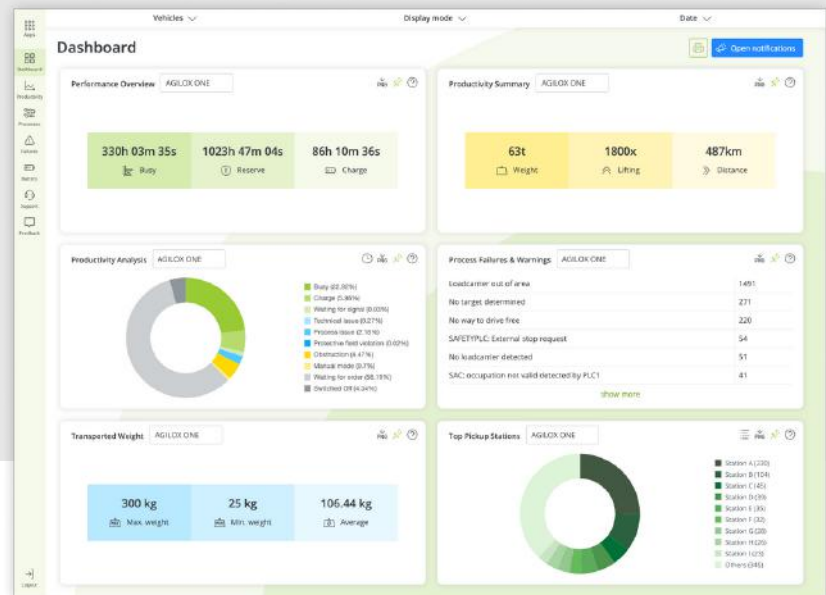

 **Safety in the Overview by**

APN connection

ISO 27001 certified data centers

Encryption according to highest standards

Embracing the Power of Simplicity



X-SWARM Technology

One for all. All for one. All for you

All Agilox AMRs communicate in real time, exchanging data on their position and status several times per second. They autonomously allocate tasks, manage the supply and removal of goods, efficiently navigate by identifying free routes, and effortlessly adapt to changes in their environment.



Plug & Perform

it's as easy as that

Plug & Perform technology allows for AMR deployment in under 12 hours, with workflows adaptable in minutes. Skip the long implementation times and high commissioning costs while easily integrating third-party modules, such as (high-)speed doors and IT systems. Built for open communication, the AMRs use Wi-Fi connectivity for smooth interaction and control.



Unique Simplicity

Because it's about ease of use

Engineered with a user-first approach, the technology is designed for intuitive and seamless operation. Hardware, controls, software, and cloud architecture are developed in-house and fully integrated to streamline every phase, from commissioning and operation to maintenance, control, and workflow adjustments.



Flexibility

Being flexible is a guarantee of success

The AMRs instantly adjust to changing requirements with a single click. Stations, map layouts, and entire workflows can be created, modified, or relocated effortlessly, without extra costs or external assistance.



Safety

It's also absolutely safe

The AMRs operate safely alongside employees, navigating shared travel and transport routes without incidents. Advanced safety sensors and a dynamic 360° protective field enable smooth and efficient performance in mixed traffic environments. They are certified to meet key industry safety standards, including CE, UL, and ISO 3691-4.



Supply Chain

Simply no more Standstill. 24/7

Maintain a seamless material flow with absolute flexibility, even in dynamic environments. In the event of a robot failure, the remaining AMRs in the swarm automatically take over to ensure uninterrupted operations. Prevent supply shortages and optimize transport throughput times with fully automated efficiency. Thanks to ultra-fast charging, AMRs are ready for use again within minutes, ensuring a perfectly synchronized material flow.

Features and Add-Ons



Obstacle Avoidance

3D sensor system improves safety in human-machine environments.



Signal Lighting

Multi-color signals (blue, green, red) for increased visibility, with additional fork-tip lights (white, yellow).



Charging Devices

Available as mobile or stationary units



ESD Protection

Prevents electrostatic charging in ESD-sensitive areas.



Rubber Guards

Front and fork-tip protection to deflect dirt.



Barcode Reader

Reads barcodes and QR codes for identification.



Lifting Aids

Specialized lifting equipment designed to ensure safe and efficient handling.




Safety & Scanners






The AMRs are equipped with advanced safety systems designed to protect employees, infrastructure, and the robots themselves.

Compliance with international standards such as **ISO 3691-4** and **EN1525**.

Drive Path Design

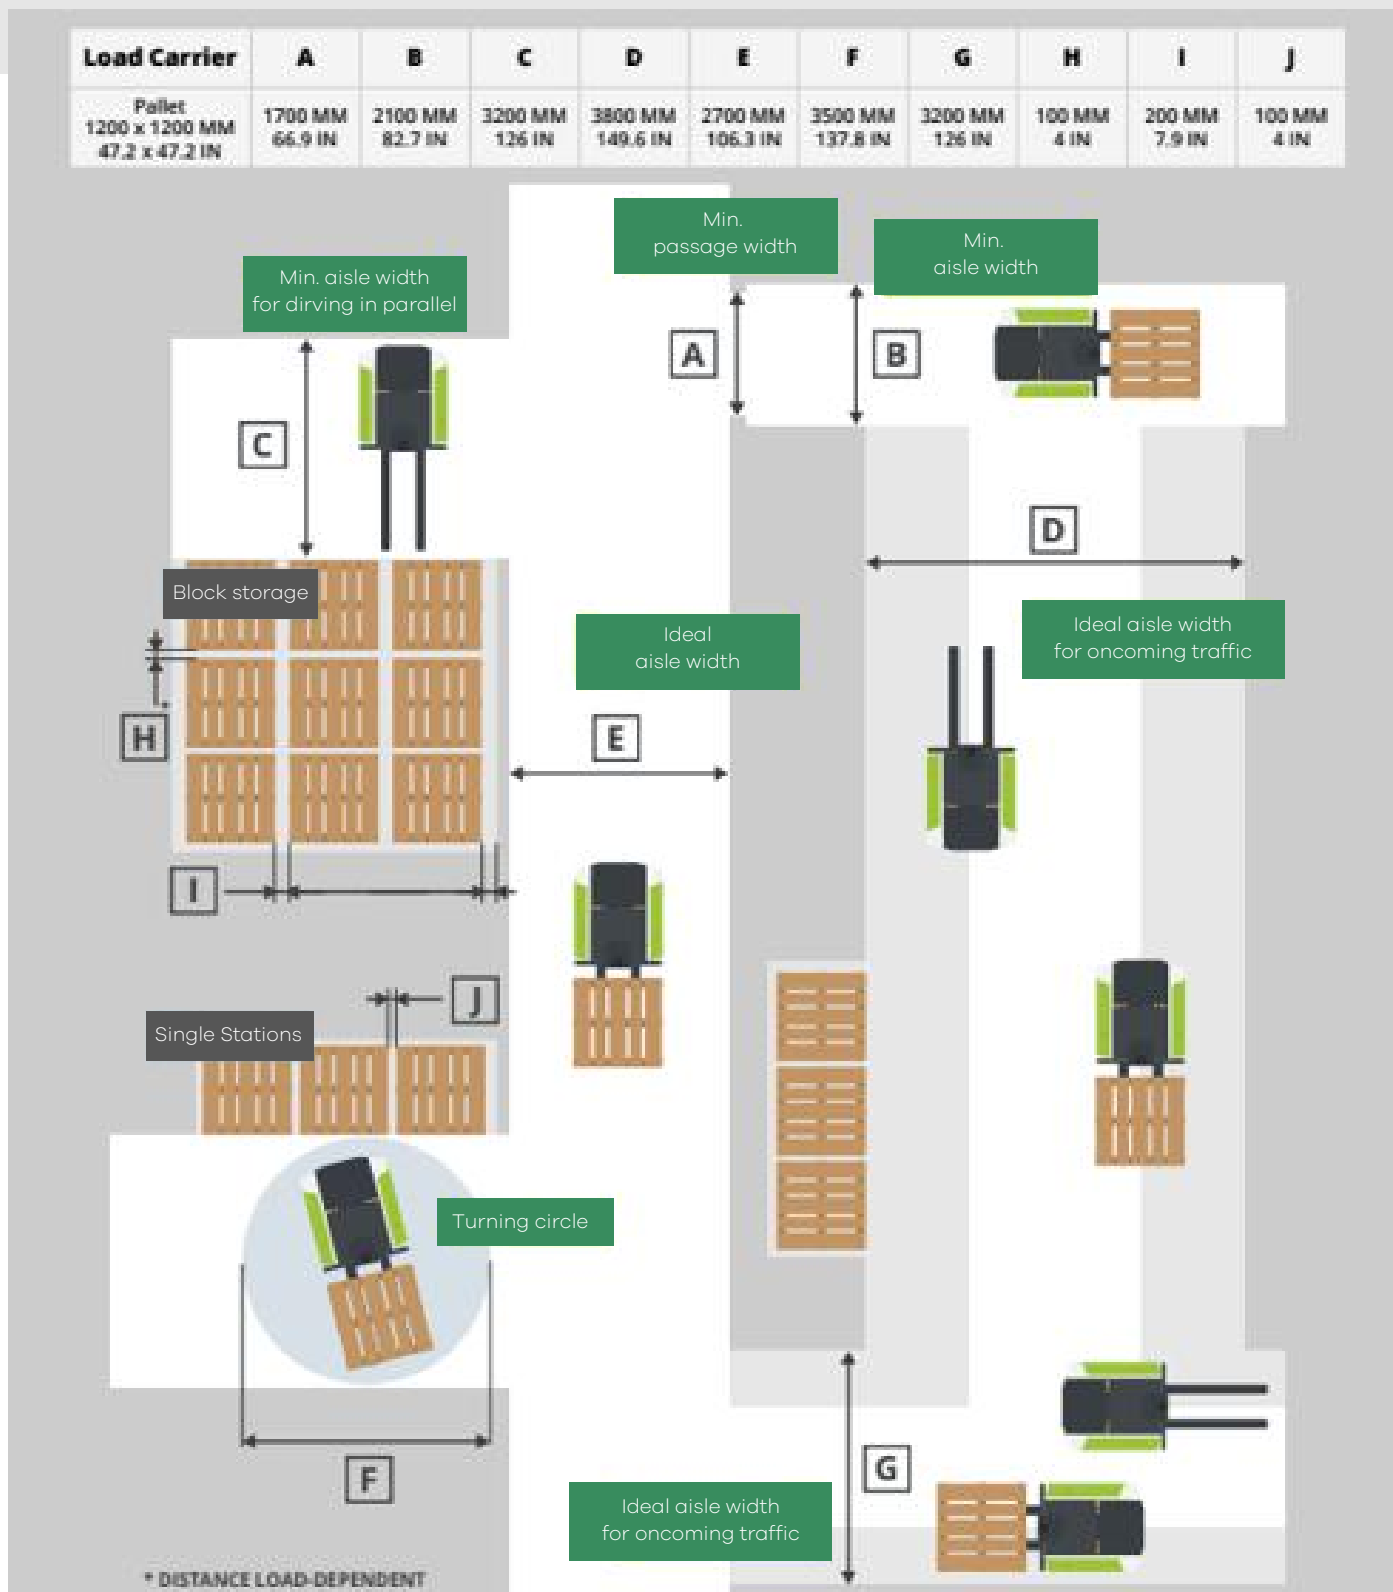

Dimensions

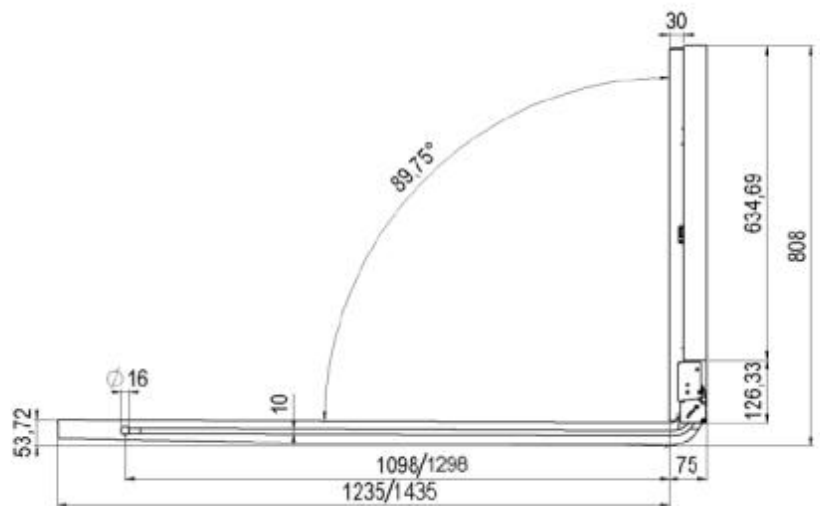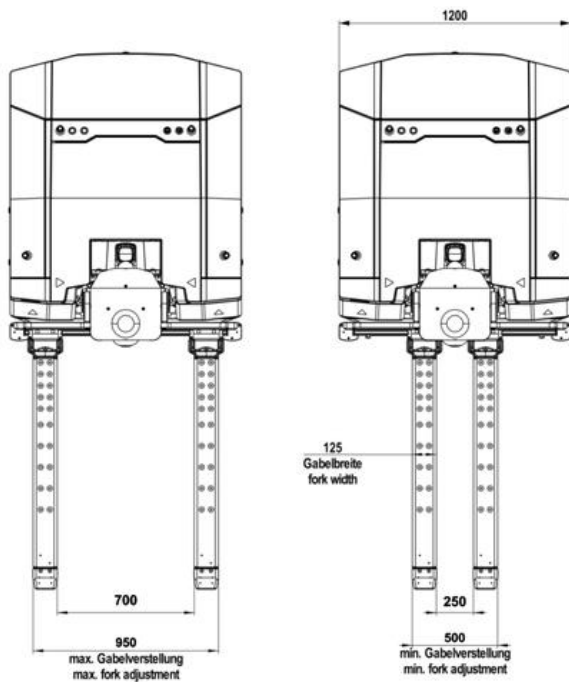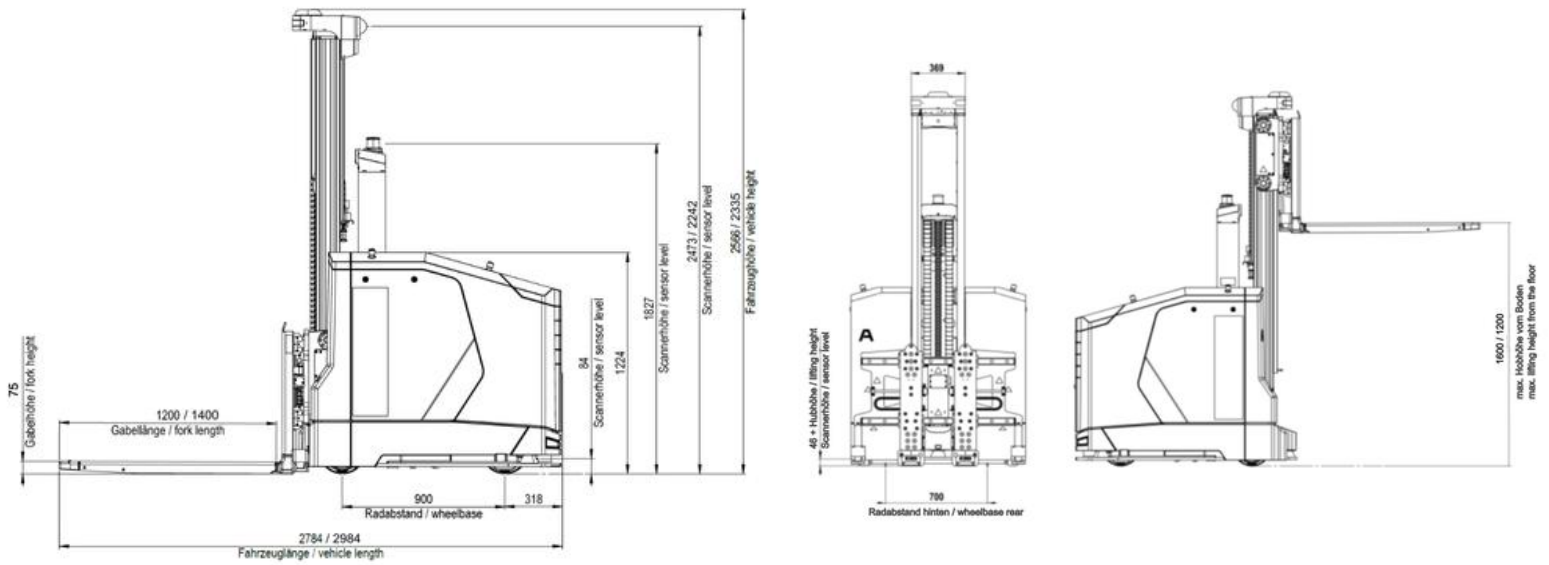


Variations



ONE Longer Forks 1400 | 1600 | 1800



NFK Mono Fork 1200 | 1400

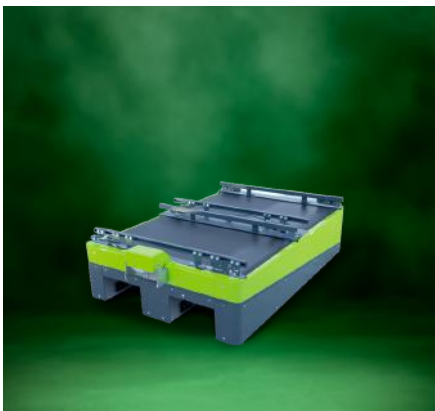

Box Carrier Different Variants



ODM Mono Fork 600 | 800



OCF Free Forks 1200 | 1400

Payload: 1.500 kg | 750 kg

Max. Lift Height:

1.600 mm = Vehicle Height 2,56 m

1.200 mm = Vehicle Height 2,34 m