




70

tapetex wall materials

est. 1975

A luxurious textile collection by Tapetex, Masters in textile wallcovering since 1975. Indulge in the beauty of unique natural materials, where the fusion of colors, textures, and designs spark inspiration. This is where craftsmanship blends effortlessly with nature and luxury.

A full-page background image showing a field of tall, slender plants with round, golden-brown seed pods. The scene is captured at sunset, with a warm, orange glow from the sun low on the horizon. The plants are in sharp focus in the foreground, creating a textured, organic feel.

Transcend the ordinary, natural products are the greatest luxury

This collection is a celebration of nature's finest materials and the moods they inspire. Designed to bring warmth, depth, and sophistication to any space, each piece embodies the harmony between organic beauty and refined craftsmanship.

Crafted from a variety of sustainable yarns, the collection reflects the richness of the earth's natural elements, from the soft textures of woven fibers to the subtle interplay of light and shadow. Every thread tells a story - of heritage, sustainability, and artistry - coming together to create a tactile experience that elevates interiors beyond the ordinary.

The result is more than just a decorative surface; it is an immersive expression of texture and tone, transforming walls into landscapes of beauty and emotion.

FIERO 70-Textile collection



NB: The portrayed colours may differ from reality.



70-2500 PRAIRIE SAND



70-2501 PORCELAIN



70-2502 ECRU



70-2503 CLAYSTONE



70-2504 ARTICHOKE



70-2505 COCOA



70-2506 SILVER



70-2507 MIST



70-2508 KOALA

Specification

| | |
|-------------------|--|
| Name | Fiero |
| Width approx. | 137 cm - 54" |
| Weight approx. | gr / lm : 647 oz / lnyd : 20.9 |
| Thickness | approx. 0.69 mm |
| Composition | linen : 26% viscose : 54% recycled polyester : 20% |
| Weaving technique | jacquard woven |
| Dyeing | yarn dyed |
| Backing | reinforced woodpulp : 70% recycled polyester : 30% |
| Repeat approx. | height : 19.1cm - 7.5" width : 137cm - 54" |
| Hanging | on repeat, non-reverse |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s2 d0). |
| Permeability rating | Test result 41 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s2-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 41, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach. The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 40 linear meter or 44 linear yards. However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



Forest Stewardship
Council, Certification
FSC A000531.



LENIRA 70-Textile collection



NB: The portrayed colours may differ from reality.



Specification

| | | | |
|-------------------|---------------------|---|------|
| Name | Lenira | | |
| Width approx. | 137 cm - 54" | | |
| Weight approx. | gr / lm | : | 300 |
| | oz / lnyd | : | 9.7 |
| Thickness | approx. 0.40 mm | | |
| Composition | linen | : | 100% |
| Weaving technique | plain woven | | |
| Dyeing | - | | |
| Backing | reinforced woodpulp | : | 70% |
| | recycled polyester | : | 30% |
| Repeat approx. | height | : | - |
| | width | : | - |
| Hanging | random | | |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s2 d0). |
| Permeability rating | Test result 46 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s2-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 46, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach.

The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 50 linear meter or 55 linear yards.

However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



Forest Stewardship
Council, Certification
FSC A000531.



SISU 70-Textile collection



NB: The portrayed colours may differ from reality.



Specification

| | | | |
|-------------------|---------------------|---|------|
| Name | Sisu | | |
| Width approx. | 137 cm - 54" | | |
| Weight approx. | gr / lm | : | 637 |
| | oz / lnyd | : | 20.5 |
| Thickness | approx. 0.79 mm | | |
| Composition | linen | : | 84% |
| | cotton | : | 10% |
| | nettle | : | 6% |
| Weaving technique | dobby woven | | |
| Dyeing | yarn dyed | | |
| Backing | reinforced woodpulp | : | 70% |
| | recycled polyester | : | 30% |
| Repeat approx. | height | : | - |
| | width | : | - |
| Hanging | random | | |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s2 d0). |
| Permeability rating | Test result 46 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s2-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 46, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach.

The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 40 linear meter or 44 linear yards.

However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



Forest Stewardship
Council, Certification
FSC A000531.



ELDOR

70-Textile collection



NB: The portrayed colours may differ from reality.



70-2560 FROSTED DEW



70-2561 COTTON



70-2562 PEACH



70-2563 WOOL



70-2564 ANGORA



70-2565 GLACIER



70-2566 MOCHA



70-2567 NIGHT

Specification

| | | | |
|-------------------|------------------------|---|---------------|
| Name | Eldor | | |
| Width approx. | 137 cm - 54" | | |
| Weight approx. | gr / lm | : | 630 |
| | oz / lnyd | : | 20.3 |
| Thickness | approx. 0.91 mm | | |
| Composition | linen | : | 16% |
| | viscose | : | 34% |
| | cotton | : | 21% |
| | recycled polyester | : | 29% |
| Weaving technique | jacquard woven | | |
| Dyeing | yarn dyed | | |
| Backing | reinforced woodpulp | : | 70% |
| | recycled polyester | : | 30% |
| Repeat approx. | height | : | 1.3cm - 0.51" |
| | width | : | 137cm - 54" |
| Hanging | on repeat, non-reverse | | |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s2 d0). |
| Permeability rating | Test result 41 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s2-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 41, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach.

The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 40 linear meter or 44 linear yards.

However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.




Forest Stewardship
Council, Certification
FSC A000531.



"Nostalgic"

Inspired by the refined elegance of classic tweed, Eldor captures a romantic and nostalgic spirit, radiating a timeless allure. Its rich, textured weave grabs attention with its lustrous yarn, catching light in a soft, nuanced way which creates depth and dimension.

Eldor is an invitation to indulge in luxury while embracing the reminiscent charm of a bygone era. It is a tribute to the past, where whispers in shades of gold and amber compose a gentle melody that lingers long after it fades.

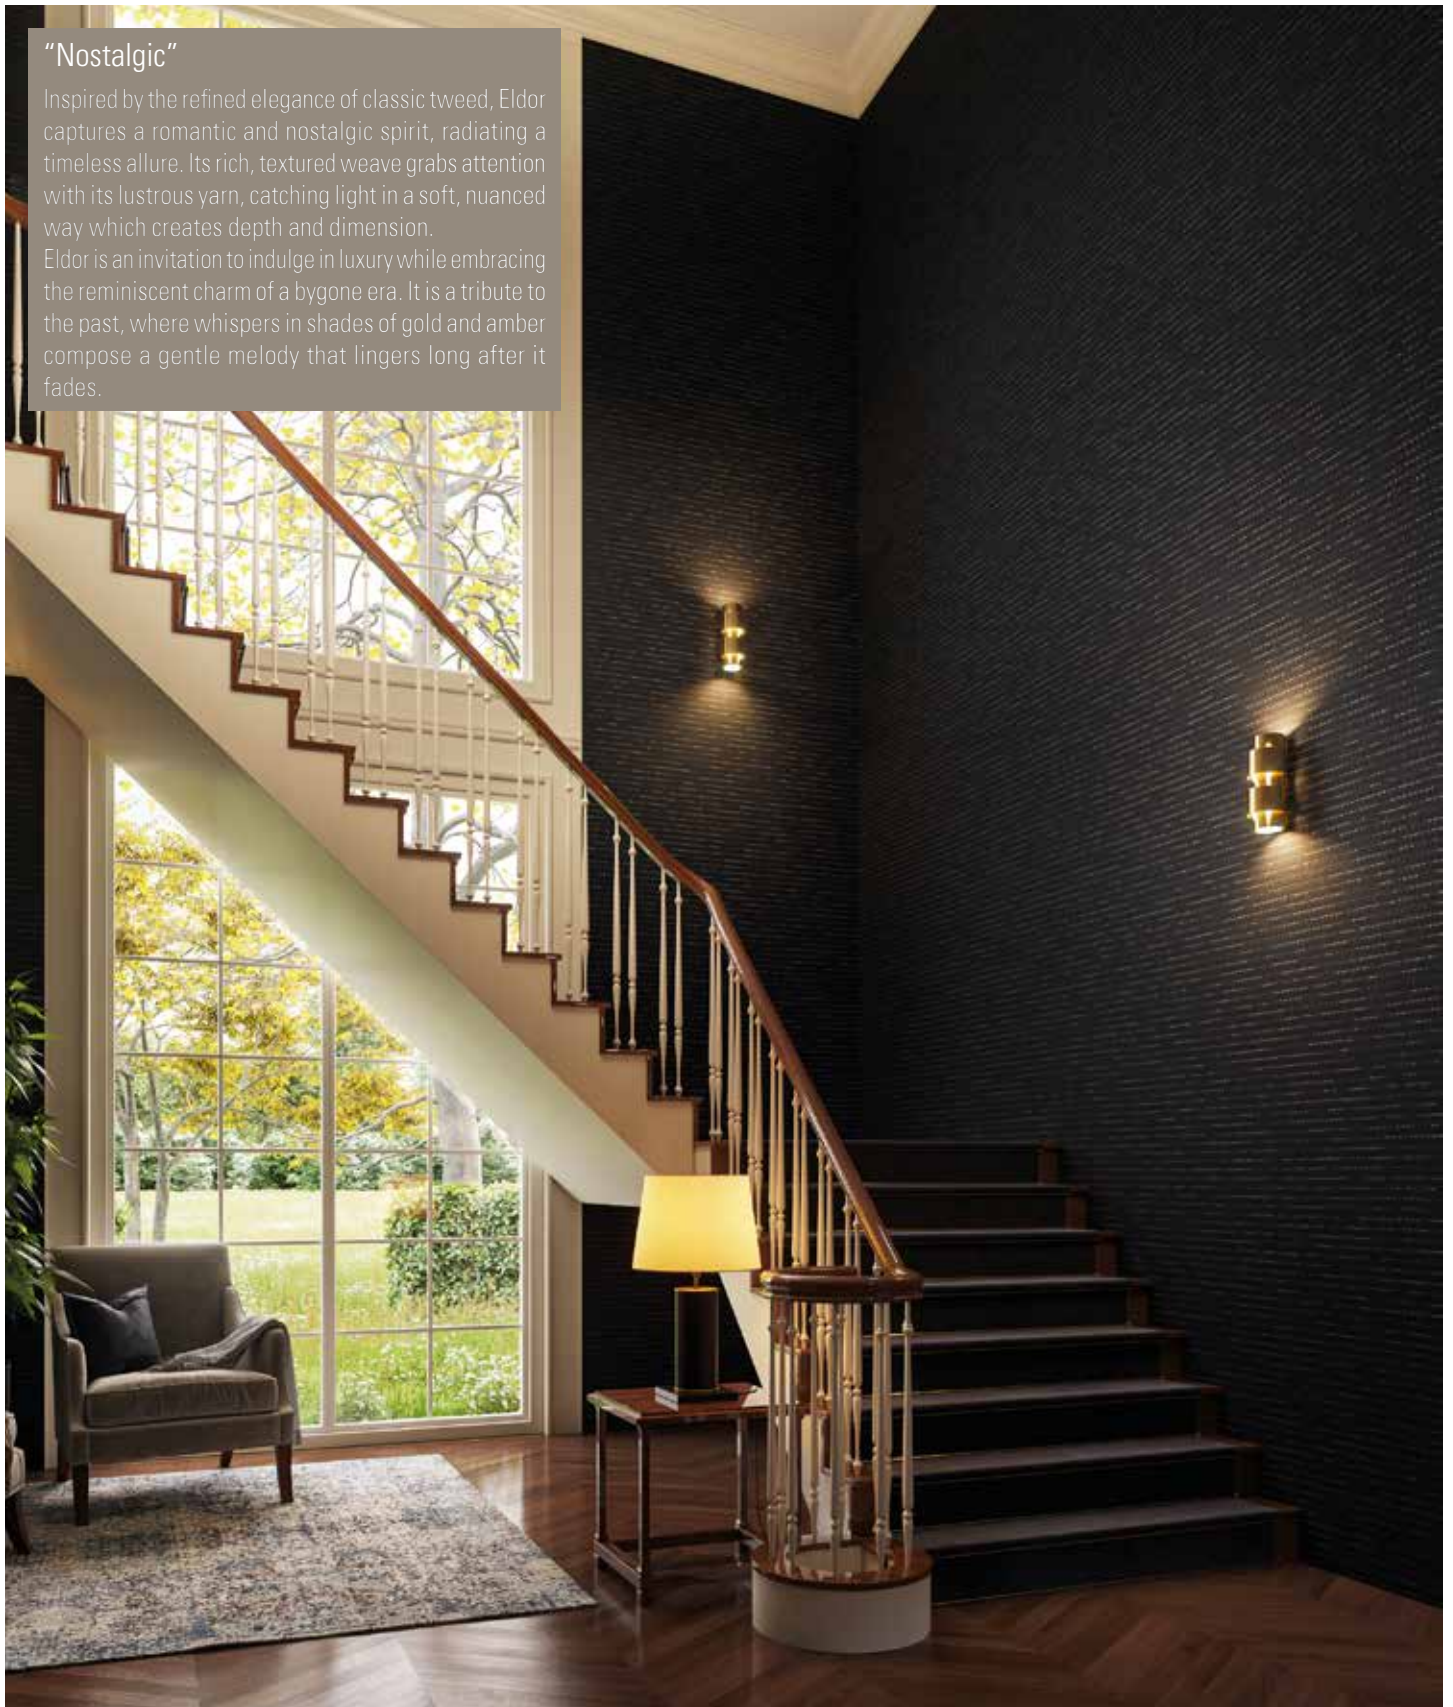

Eldor 70-2564

CALMA 70-Textile collection



NB: The portrayed colours may differ from reality.



Specification

| | |
|-------------------|---|
| Name | Calma |
| Width approx. | 137 cm - 54" |
| Weight approx. | gr / lm : 603 oz / lnyd : 19.4 |
| Thickness | approx. 0.60 mm |
| Composition | linen : 31% viscose : 69% |
| Weaving technique | plain woven |
| Dyeing | piece dyed |
| Backing | reinforced woodpulp : 70% recycled polyester : 30% |
| Repeat approx. | height : - width : - |
| Hanging | random |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s2 d0). |
| Permeability rating | Test result 46 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s2-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 46, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach.

The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 40 linear meter or 44 linear yards.

However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



Forest Stewardship
Council, Certification
FSC A000531.



ODYSSEA 70-Textile collection



NB: The portrayed colours may differ from reality.



70-2590 PALE JADE



70-2591 SALT



70-2592 LINEN



70-2593 HAIL



70-2594 CHAMBRAY



70-2595 CAPPUCCINO

Specification

| | | | |
|-------------------|---------------------|---|------|
| Name | Odyssea | | |
| Width approx. | 137 cm - 54" | | |
| Weight approx. | gr / lm | : | 603 |
| | oz / lnyd | : | 19.4 |
| Thickness | approx. 0.60 mm | | |
| Composition | linen | : | 31% |
| | viscose | : | 69% |
| Weaving technique | plain woven | | |
| Dyeing | piece dyed | | |
| Backing | reinforced woodpulp | : | 70% |
| | recycled polyester | : | 30% |
| Repeat approx. | height | : | - |
| | width | : | - |
| Hanging | random | | |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s2 d0). |
| Permeability rating | Test result 46 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s2-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 46, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach.

The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 40 linear meter or 44 linear yards.

However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



Forest Stewardship
Council, Certification
FSC A000531.



ILARA 70-Textile collection



NB: The portrayed colours may differ from reality.



70-2600 ROSEWOOD



70-2601 PURE WHITE



70-2602 ALABASTER



70-2603 SEA GLASS



70-2604 FERNWOOD



70-2605 BURNT ORANGE



70-2606 HAY

Specification

| | | | |
|-------------------|---------------------|---|------|
| Name | Ilara | | |
| Width approx. | 137 cm - 54" | | |
| Weight approx. | gr / lm | : | 329 |
| | oz / lnyd | : | 10.6 |
| Thickness | approx. 0.49 mm | | |
| Composition | linen | : | 60% |
| | silk | : | 11% |
| | recycled polyester | : | 29% |
| Weaving technique | jacquard woven | | |
| Dyeing | yarn dyed | | |
| Backing | reinforced woodpulp | : | 70% |
| | recycled polyester | : | 30% |
| Repeat approx. | height | : | - |
| | width | : | - |
| Hanging | random | | |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s1 d0). |
| Permeability rating | Test result 56 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s1-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 56, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach. The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 50 linear meter or 55 linear yards. However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



Forest Stewardship
Council, Certification
FSC A000531.



SOLENE 70-Textile collection



NB: The portrayed colours may differ from reality.



70-2610 THUNDER



70-2611 LATTE



70-2612 OAK



70-2613 GREIGE



70-2614 STORM CLOUD



70-2615 JEANS



70-2616 BASALT

Specification

| | | | |
|-------------------|---------------------|---|------|
| Name | Solene | | |
| Width approx. | 137 cm - 54" | | |
| Weight approx. | gr / lm | : | 589 |
| | oz / lnyd | : | 19.0 |
| Thickness | approx. 0.63 mm | | |
| Composition | linen | : | 20% |
| | wool | : | 45% |
| | recycled polyester | : | 35% |
| Weaving technique | plain woven | | |
| Dyeing | yarn dyed | | |
| Backing | reinforced woodpulp | : | 70% |
| | recycled polyester | : | 30% |
| Repeat approx. | height | : | - |
| | width | : | - |
| Hanging | random | | |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s1 d0). |
| Permeability rating | Test result 56 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s1-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 56, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach.

The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 40 linear meter or 44 linear yards.

However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.




Forest Stewardship
Council, Certification
FSC A000531.



NIVELIS 70-Textile collection



NB: The portrayed colours may differ from reality.

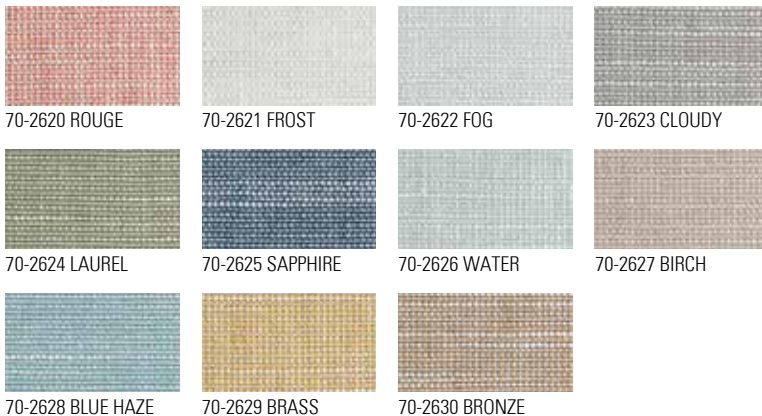

Specification

| | | | |
|-------------------|---------------------|---|------|
| Name | Nivelis | | |
| Width approx. | 137 cm - 54" | | |
| Weight approx. | gr / lm | : | 548 |
| | oz / lnyd | : | 17.7 |
| Thickness | approx. 0.74 mm | | |
| Composition | linen | : | 60% |
| | viscose | : | 40% |
| Weaving technique | plain woven | | |
| Dyeing | yarn dyed | | |
| Backing | reinforced woodpulp | : | 70% |
| | recycled polyester | : | 30% |
| Repeat approx. | height | : | - |
| | width | : | - |
| Hanging | random | | |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s2 d0). |
| Permeability rating | Test result 46 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s2-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 46, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach. The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 40 linear meter or 44 linear yards. However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



Forest Stewardship
Council, Certification
FSC A000531.



FORTE 70-Textile collection



NB: The portrayed colours may differ from reality.



70-2640 MOSS



70-2641 MARBLE



70-2642 SCULPTOR CLAY



70-2643 FLAX



70-2644 TITANIUM



70-2645 HAZELNUT



70-2646 TRUFFLE



70-2647 GRAPHITE

Specification

| | | | |
|-------------------|---------------------|---|------|
| Name | Forte | | |
| Width approx. | 137 cm - 54" | | |
| Weight approx. | gr / lm | : | 480 |
| | oz / lnyd | : | 15.5 |
| Thickness | approx. 0.77 mm | | |
| Composition | linen | : | 91% |
| | hemp | : | 9% |
| Weaving technique | dobby woven | | |
| Dyeing | piece dyed | | |
| Backing | reinforced woodpulp | : | 70% |
| | recycled polyester | : | 30% |
| Repeat approx. | height | : | - |
| | width | : | - |
| Hanging | random | | |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s2 d0). |
| Permeability rating | Test result 46 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s2-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 46, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach. The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 50 linear meter or 55 linear yards. However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



Forest Stewardship
Council, Certification
FSC A000531.



VALORA 70-Textile collection



NB: The portrayed colours may differ from reality.



70-2650 DUSK



70-2651 COCONUT



70-2652 RAFFIA



70-2653 BOULDER



70-2654 PRALINE



70-2655 RAVEN

Specification

| | | | |
|-------------------|---------------------|---|------|
| Name | Valora | | |
| Width approx. | 137 cm - 54" | | |
| Weight approx. | gr / lm | : | 774 |
| | oz / lnyd | : | 25.0 |
| Thickness | approx. 1.09 mm | | |
| Composition | linen | : | 15% |
| | cotton | : | 25% |
| | recycled polyester | : | 60% |
| Weaving technique | plain woven | | |
| Dyeing | yarn dyed | | |
| Backing | reinforced woodpulp | : | 70% |
| | recycled polyester | : | 30% |
| Repeat approx. | height | : | - |
| | width | : | - |
| Hanging | random | | |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s2 d0). |
| Permeability rating | Test result 41 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s2-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 41, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach.

The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 30 linear meter or 33 linear yards.

However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



Forest Stewardship
Council, Certification
FSC A000531.



LUDI 70-Textile collection



NB: The portrayed colours may differ from reality.



70-2660 MERLOT



70-2661 GARDENIA



70-2662 RUST



70-2663 LAGOON



70-2664 TARRAGON



70-2665 BLUEBERRY

Specification

| | | | |
|-------------------|---------------------|--------|--|
| Name | Ludi | | |
| Width approx. | 137 cm - 54" | | |
| Weight approx. | gr / lm | : 303 | |
| | oz / lnyd | : 9.8 | |
| Thickness | approx. 0.40 mm | | |
| Composition | linen | : 100% | |
| Weaving technique | plain woven | | |
| Dyeing | - | | |
| Backing | reinforced woodpulp | : 70% | |
| | recycled polyester | : 30% | |
| Repeat approx. | height | : - | |
| | width | : - | |
| Hanging | random | | |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s2 d0). |
| Permeability rating | Test result 46 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s2-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 46, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach.

The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 50 linear meter or 55 linear yards.

However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



Forest Stewardship
Council, Certification
FSC A000531.



AMARE 70-Textile collection



NB: The portrayed colours may differ from reality.



70-2680 CINNAMON



70-2681 SAND



70-2682 DRIFTWOOD



70-2683 HONEYCOMB



70-2684 MUD



70-2685 FOREST



70-2686 JACOBAN



70-2687 HIGHGATE



70-2688 RAIN



70-2689 DOLPHIN



70-2690 LAPIS



70-2691 CHARCOAL



70-2692 CRANBERRY

Specification

| | |
|-------------------|---|
| Name | Amare |
| Width approx. | 137 cm - 54" |
| Weight approx. | gr / lm : 506 oz / lnyd : 16.3 |
| Thickness | approx. 0.83 mm |
| Composition | wool : 70% recycled polyester : 30% |
| Weaving technique | dobby woven |
| Dyeing | yarn dyed |
| Backing | reinforced woodpulp : 70% recycled polyester : 30% |
| Repeat approx. | height : - width : - |
| Hanging | random |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s1 d0). |
| Permeability rating | Test result 57.4 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s1-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 57.4, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach.

The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 50 linear meter or 55 linear yards.

However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



Forest Stewardship
Council, Certification
FSC A000531.



SOFIA 70-Textile collection



NB: The portrayed colours may differ from reality.



70-2670 LAPIS



70-2671 SAND



70-2672 MUD



70-2673 DOLPHIN



70-2674 FOREST



70-2675 JACOBAN

Specification

| | | | |
|-------------------|---------------------|---|------|
| Name | Sofia | | |
| Width approx. | 137 cm - 54" | | |
| Weight approx. | gr / lm | : | 541 |
| | oz / lnyd | : | 17.5 |
| Thickness | approx. 0.84 mm | | |
| Composition | wool | : | 70% |
| | recycled polyester | : | 30% |
| Weaving technique | dobby woven | | |
| Dyeing | yarn dyed | | |
| Backing | reinforced woodpulp | : | 70% |
| | recycled polyester | : | 30% |
| Repeat approx. | height | : | - |
| | width | : | - |
| Hanging | random | | |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s1 d0). |
| Permeability rating | Test result 57.4 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s1-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 57.4, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach. The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 50 linear meter or 55 linear yards. However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



Forest Stewardship
Council, Certification
FSC A000531.



VIVEO 70-Textile collection



NB: The portrayed colours may differ from reality.



70-2700 BLACK PEPPER



70-2701 SUGAR



70-2702 CREAM



70-2703 DENIM



70-2704 TOPAZ



70-2705 RHINO



70-2706 GARNET



70-2707 HUNTER

Specification

| | | | |
|-------------------|---------------------|--------|--|
| Name | Viveo | | |
| Width approx. | 137 cm - 54" | | |
| Weight approx. | gr / lm | : 552 | |
| | oz / lnyd | : 17.8 | |
| Thickness | approx. 0.68 mm | | |
| Composition | cotton | : 52% | |
| | recycled polyester | : 48% | |
| Weaving technique | jacquard woven | | |
| Dyeing | yarn dyed | | |
| Backing | reinforced woodpulp | : 70% | |
| | recycled polyester | : 30% | |
| Repeat approx. | height | : - | |
| | width | : - | |
| Hanging | random | | |


Scan QR-code
for more details,
visuals and
video content.



Performance

Please contact info@tapetex.com for more detailed test reports.


| | |
|---------------------|--|
| Surface finish | A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. |
| Lightfastness | Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. |
| LRV values | Testing as per BS 8493:2008+A1:2010, Datacolor DC500. |
| Fire rating | ASTM E84 Class 1 or A and EUROCLASS (B s2 d0). |
| Permeability rating | Test result 41 as per ASTM E96-12, Method B, Water Vapor Transmission. |
| Indoor air quality | ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions". |
| REACH SVHC | Compliant as per Centexbel testing. |



Treated with a stain repellent finish



Lightfastness:
as per ISO
105-B02:2014
Xenotest



Light reflection:
as per BS 8493:
2008+A1:2010
Datacolor DC500



Fire resistant:
EU: B, s2-d0
US: ASTM E84
Class 1 or A



Permeability
rating: 41, as
per ASTM E96-
12 Method B



Indoor air
quality: ASTM
D6196, D5197
and D5116



Sustainability

All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach. The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 40 linear meter or 44 linear yards. However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



Forest Stewardship
Council, Certification
FSC A000531.



"Energetic"

Viveo is a celebration of energy and elegance, infused with the spirit of vigor. Its vibrant pulse and luxurious texture radiate a dynamic blend of colors, where light moves softly across a fusion of matt and shiny yarns. It is like the rush of wind against your skin, an electric thrill that awakens the senses - a symphony of motion that endlessly captivates.



Viveo 70-2705