



PRODUCT CATALOGUE

YOU ENVISION, WE BUILD!



VISION FLOORS

VINYL WOOD PLANKS

various sizes and colours



0917 833 9655 / (02) 7618 6971
vision.intlconstruct@gmail.com





GENERAL INFORMATION

COMPANY NAME:

Vision International Construction OPC

TIN NUMBER:

259-917-198-000

OFFICE ADDRESS:

888 Industrial Megacity, Highway 2000,
Phase 2, Taytay Rizal, CALABARZON,
Philippines

CONTACT NO.:

0917 833 9655/ 0917 122 6951
(02) 7618 6971

EMAIL ADDRESS:

vision.intlconstruct@gmail.com

Our objective is to provide our client with a superb experience when we are chosen to execute our projects.

Our emphasis on clear communication and follow through procedures ensures that client's objective is top priority in the planning and execution of all our process.

HISTORY & PHILOSOPHY

VISION INTERNATIONAL CONSTRUCTION OPC

is a privately owned company that was established last September 2020.

It takes on the role of Importer, Supplier, Trading Business, and Construction Services for small to medium projects and performs project management services to coordinates specialist trade for industrial and commercial projects.

We also provide design outputs and engineering solutions as value-added services to clients.

VISION

First in mind as the most valued business partner in importation, supply and installation in the field of construction.

MISSION

To make your vision a reality through meeting the requirements with the confidence of quality work and reasonable price in a timely manner.


OUR APPROACH TO PROJECT AND MANAGEMENT EXECUTION CAN BE SUMMARIZED AS FOLLOWS:

- Develop a comprehensive schedule and resource plan to achieve the project goals defined by the client.
- Maintain transparent communication with all stakeholders involved in the project.
- Monitor progress and make necessary adjustments to stay on track.
- Provide diligent oversight to ensure the quality of the work being performed.
- Successfully finalize and deliver the project within the designated timeframe.



OUR SUCCESSFUL PROJECTS

ALL OVER THE PHILIPPINES

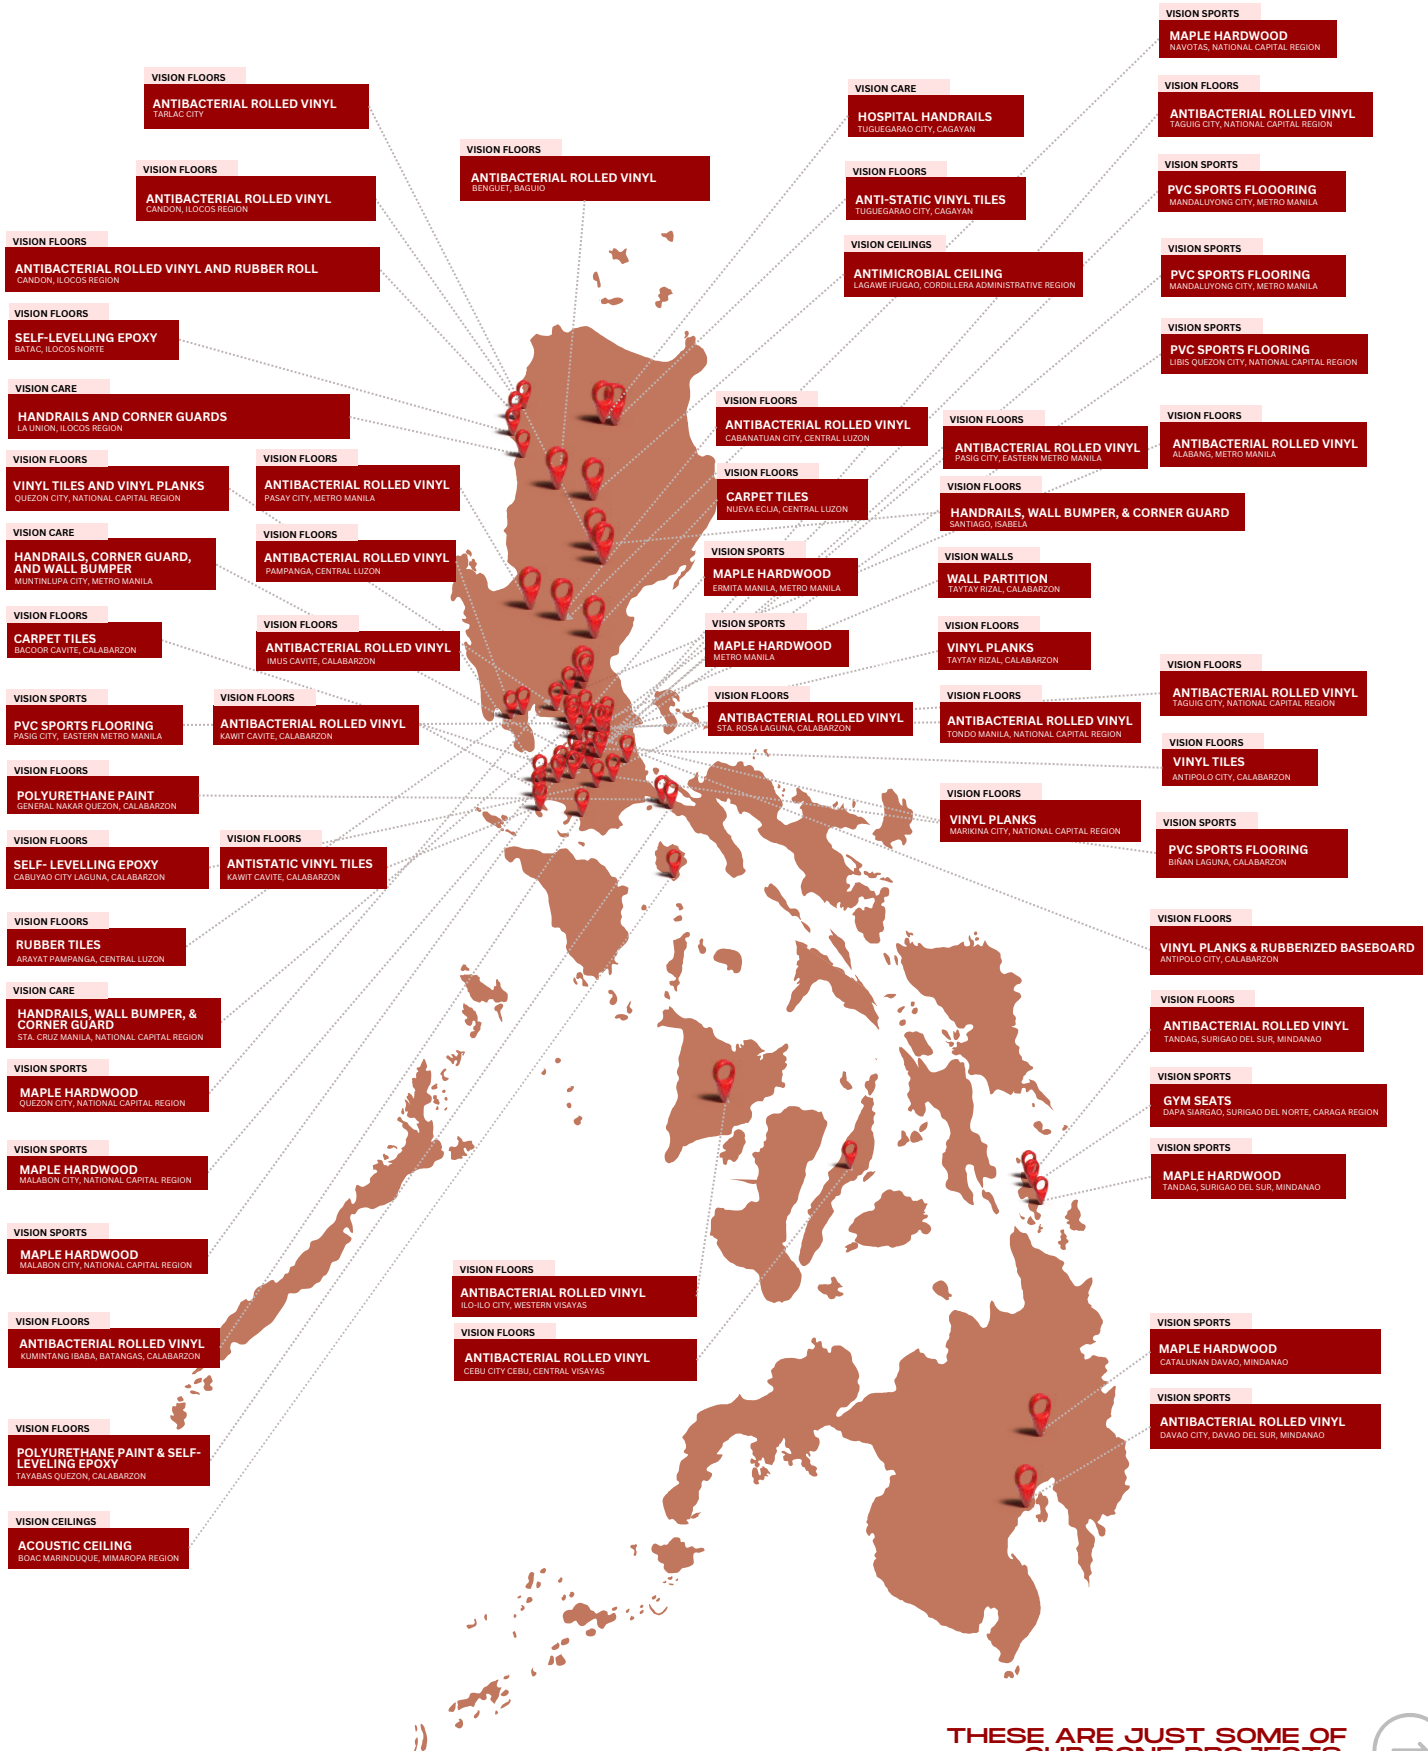


THESE ARE JUST SOME OF OUR DONE PROJECTS, BROWSE MORE...





BEST PRODUCTS WE OFFER

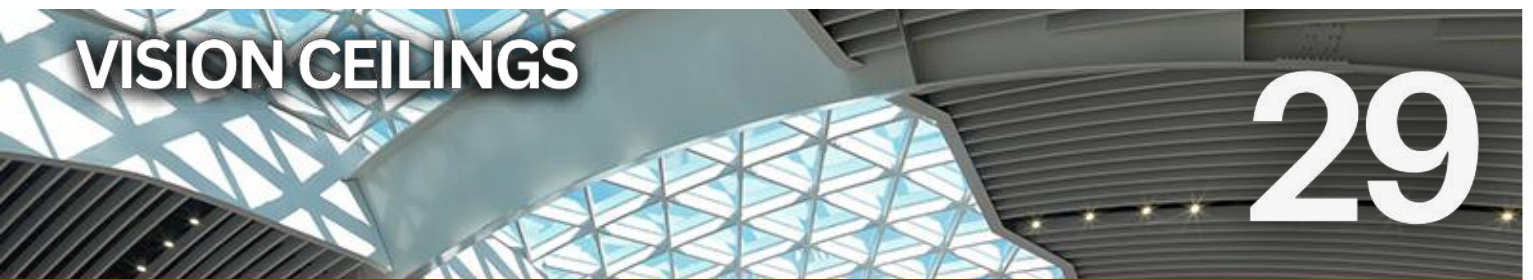



**YOU ENVISION,
WE BUILD.**

VISION FLOORS



VISION FLOORS

CONCRETE VINYL TILES
various sizes and colours



VISION FLOORS

CONCRETE VINYL TILES

SPECIFICATIONS

Size:
600mm x 600mm
Thickness: 3 mm; 4 mm
Packing:
20pcs/box

HOMOGENEOUS VINYL TILES

SPECIFICATIONS

Size:
300 mm x 300 mm
450 mm x 450 mm
Thickness: 2 mm; 3 mm
Packing:
55 pcs/box (2 mm)
37 pcs/box (3 mm)





**YOU ENVISION,
WE BUILD.**

VISION FLOORS | ANTISTATIC VINYL

ROLL TYPE



1.

TILE TYPE



2.

RAISED FLOORING




3.

1. ROLL TYPE

SPECIFICATIONS

Size: 2m x 20m
Thickness: 2 mm, 3 mm

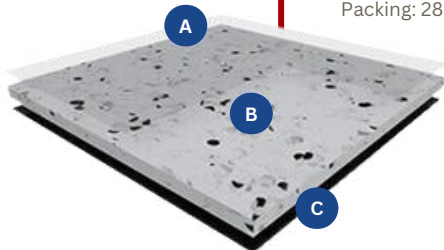

- A. Static conductive surface treatment
- B. Homogeneous static conductive layer with carbon black
- C. Backing treated with carbon black

2. TILE TYPE


SPECIFICATIONS

Size: 600 mm x 600 mm
610 mm x 610 mm
Thickness: 2 mm, 3 mm
Packing: 28pcs/box

3. RAISED FLOORING

SPECIFICATIONS

Dimension: 600 mm x 600 mm

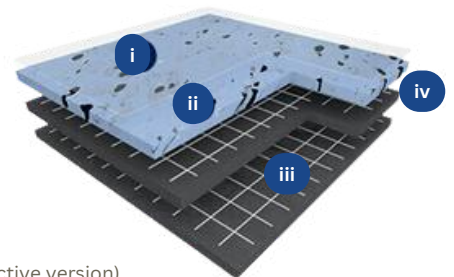

- i. Surface treatment (conductive version)
- ii. 2 mm thick homogeneous surface
- iii. Double fiber glass grid
- iv. Backing: mix between carbon granules and recycled vinyl



PLANK TYPE



SPECIFICATIONS

Size: 4 mm x 250 mm x 1000 mm
 Thickness: 4 mm
 Packing: 20pcs/box

TILE TYPE



SPECIFICATIONS

Size: 4mm x 500 mm x 500 mm
 Thickness: 4 mm, 6 mm
 Packing: 28pcs/box




PLAIN DESIGN



PATTERN DESIGN




CARPET PLANK



VCAT 2532



VCAT 2515




VCAT 2516




VCAT 2517



VCAT 2533



VCAT 2534




VCAT 2535



VCAT 2536




VCAT 2521

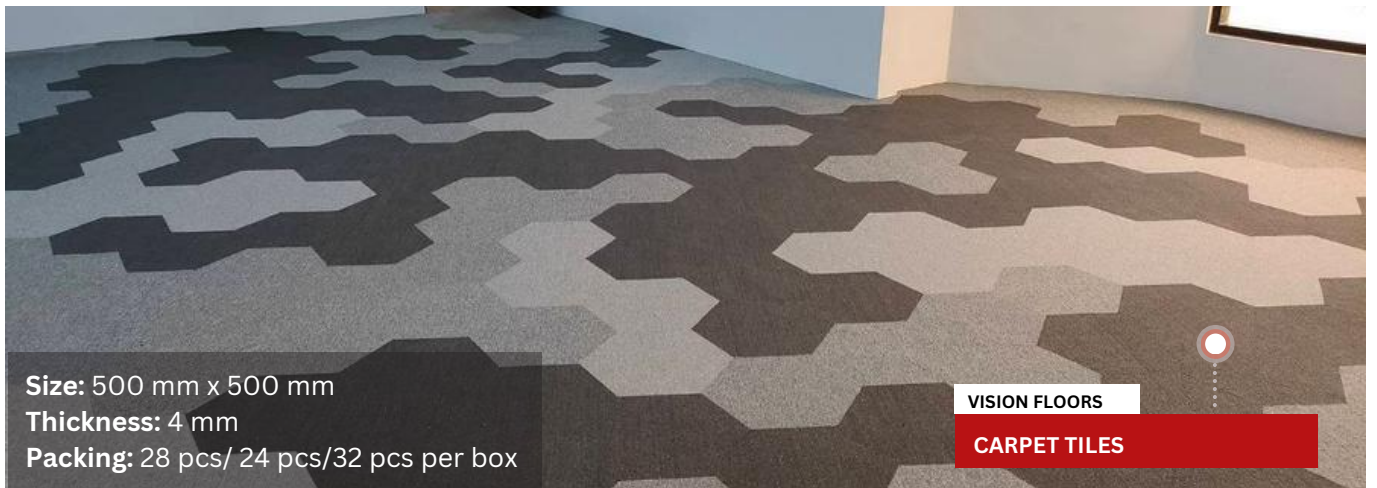

Size: 500 mm x 500 mm
 Thickness: 4 mm
 Packing: 28 pcs/ 24 pcs/32 pcs per box

**VISION FLOORS
CARPET TILES**

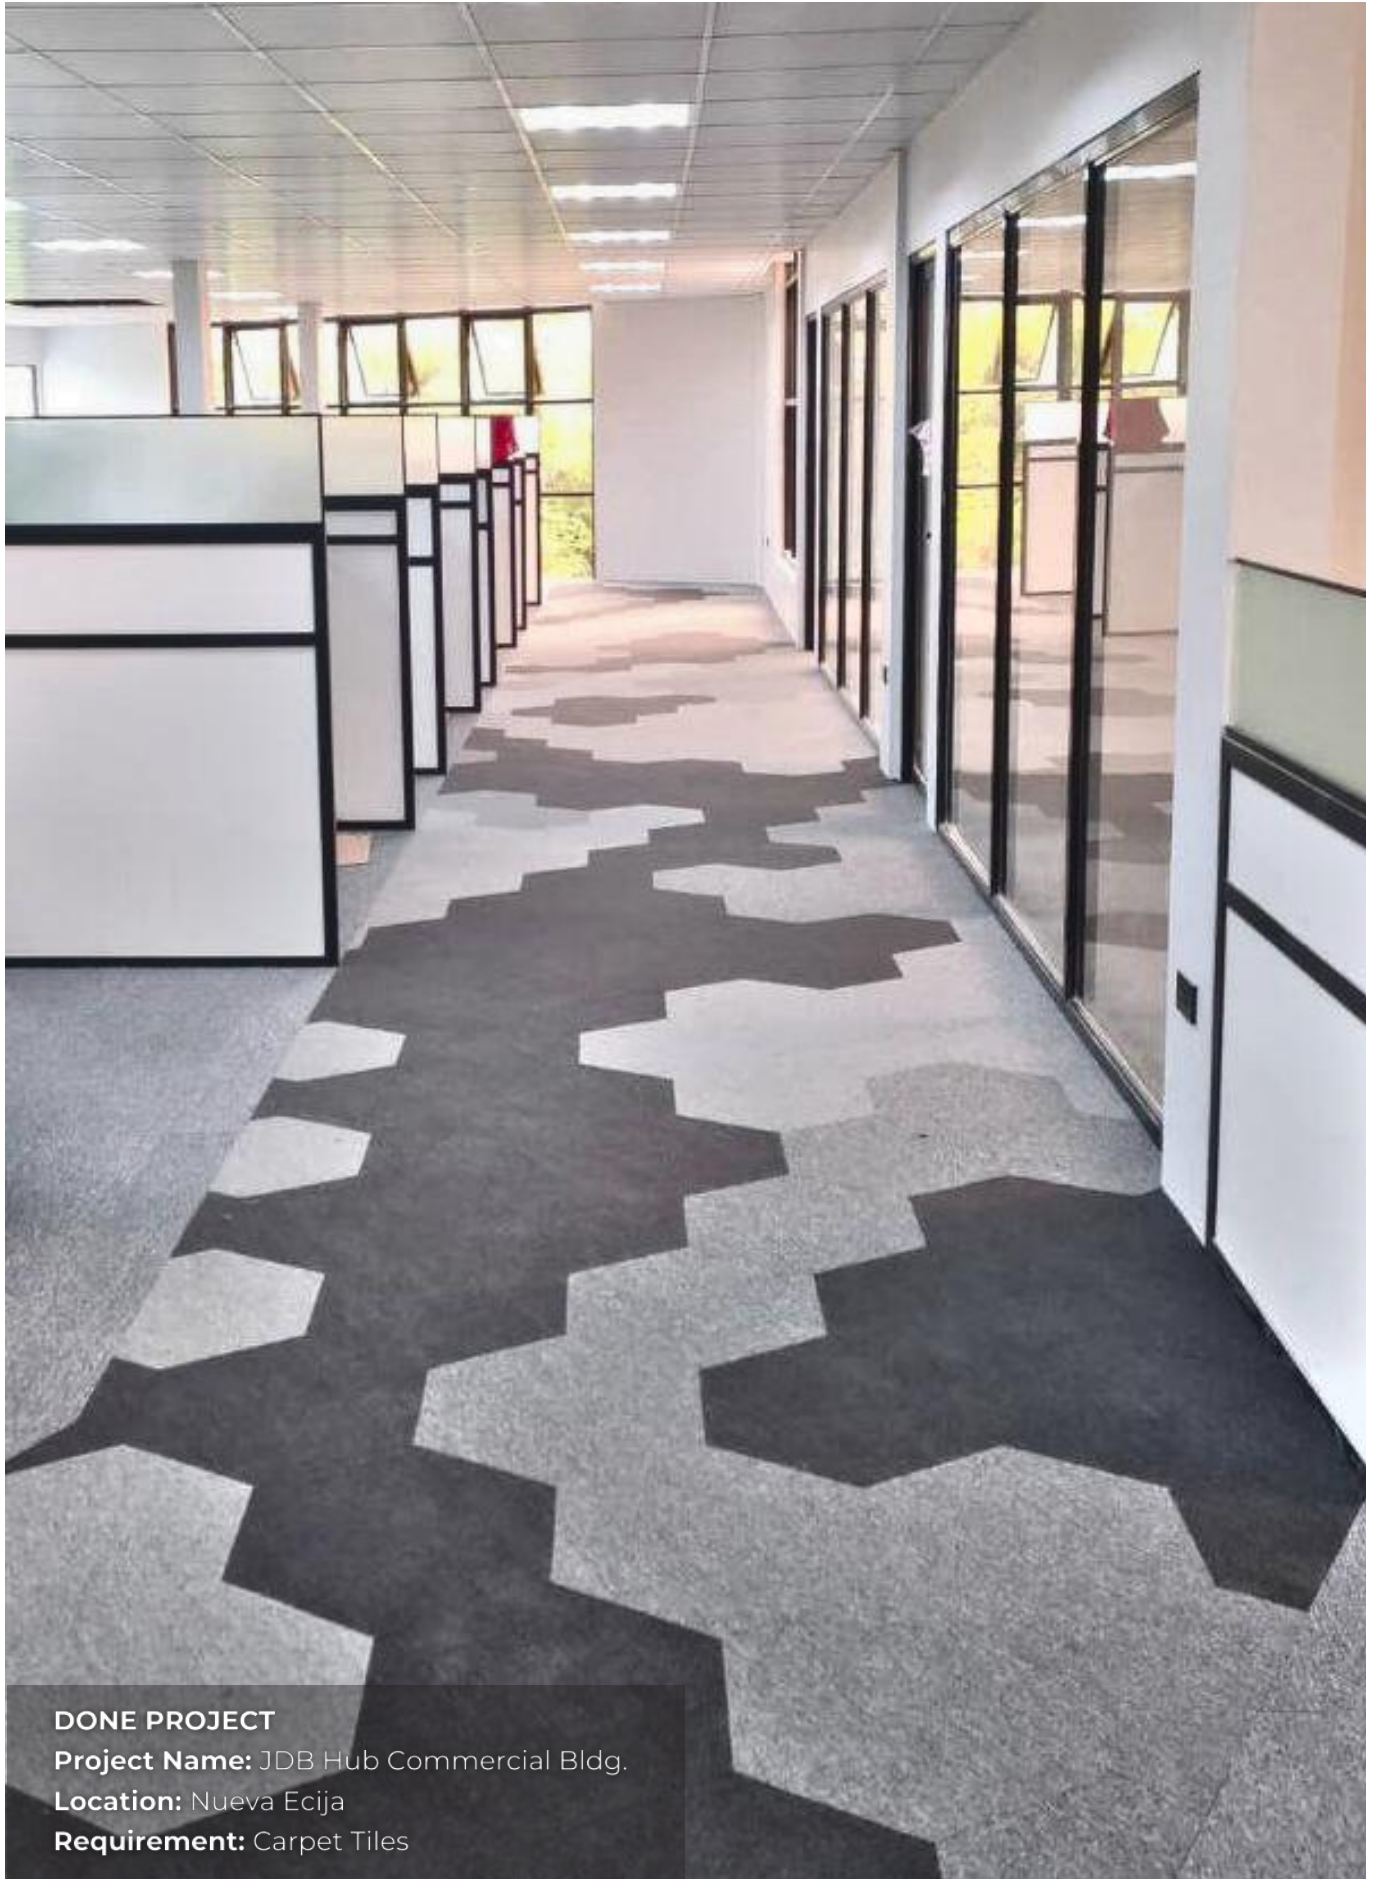

DONE PROJECT

Project Name: JDB Hub Commercial Bldg.

Location: Nueva Ecija

Requirement: Carpet Tiles




SPECIFICATIONS

Dimension: 2m x 20m
Thickness: 2mm, 3mm

VISION FLOORS



ANTIBACTERIAL ROLLED VINYL

Candon City Hospital

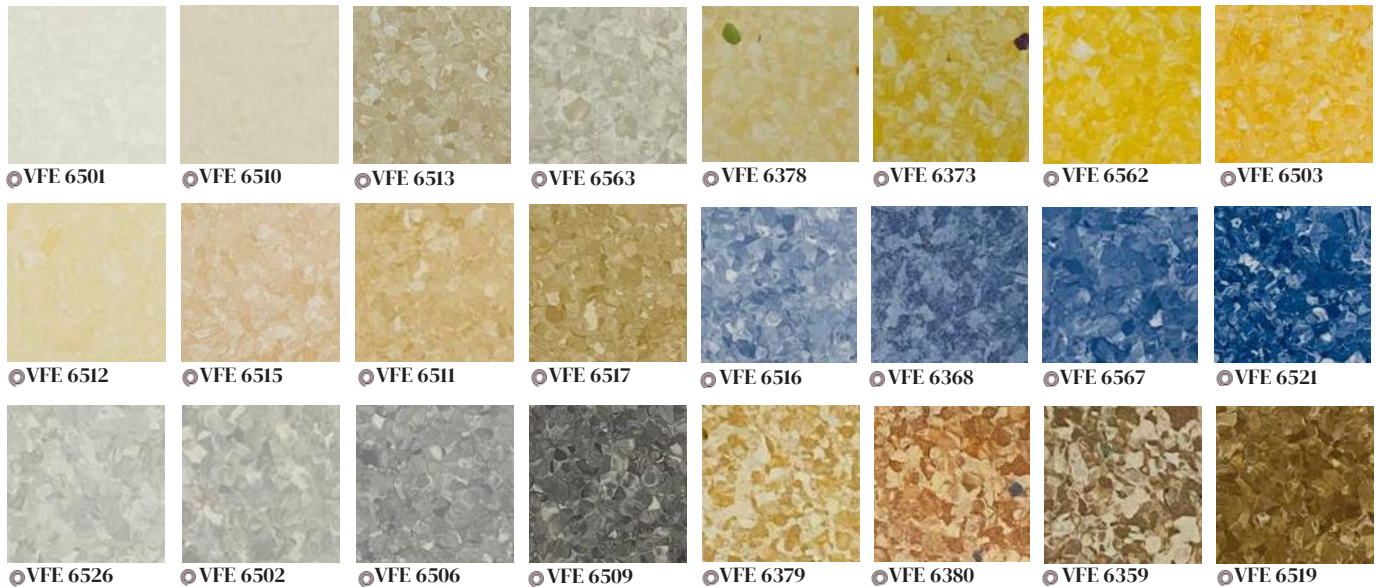



Type of flooring	EN649	
Classification	EN685	23/34/43
Special Treatment		PUR
Weight	EN430	2850g/m
Thickness	EN428	2.0mm
Width/Length	EN426	2m X 20m
Wear Group	EN660	
Residual Indentation	EN433	0.03mm
Dimensional stability	EN434	≤0.4% ≤0.5%
Resistance to chemicals	EN423	
Reaction to fire	EN 13501-1	B-s1 B1(B-s1.t0) Bfl-s1
Electrical Behavior	EN 1815	≤2kV
Impact sound reduction	EN ISO 717/2ALW	APPROX. +4dB
Color fastness to light	EN ISO 105-B02	2 6
Mold resistance	DIN EN ISO 846-A/C	
Slip resistance	DIN 51130	R9
Hazardous Substances Testing	GB 18586-2001	

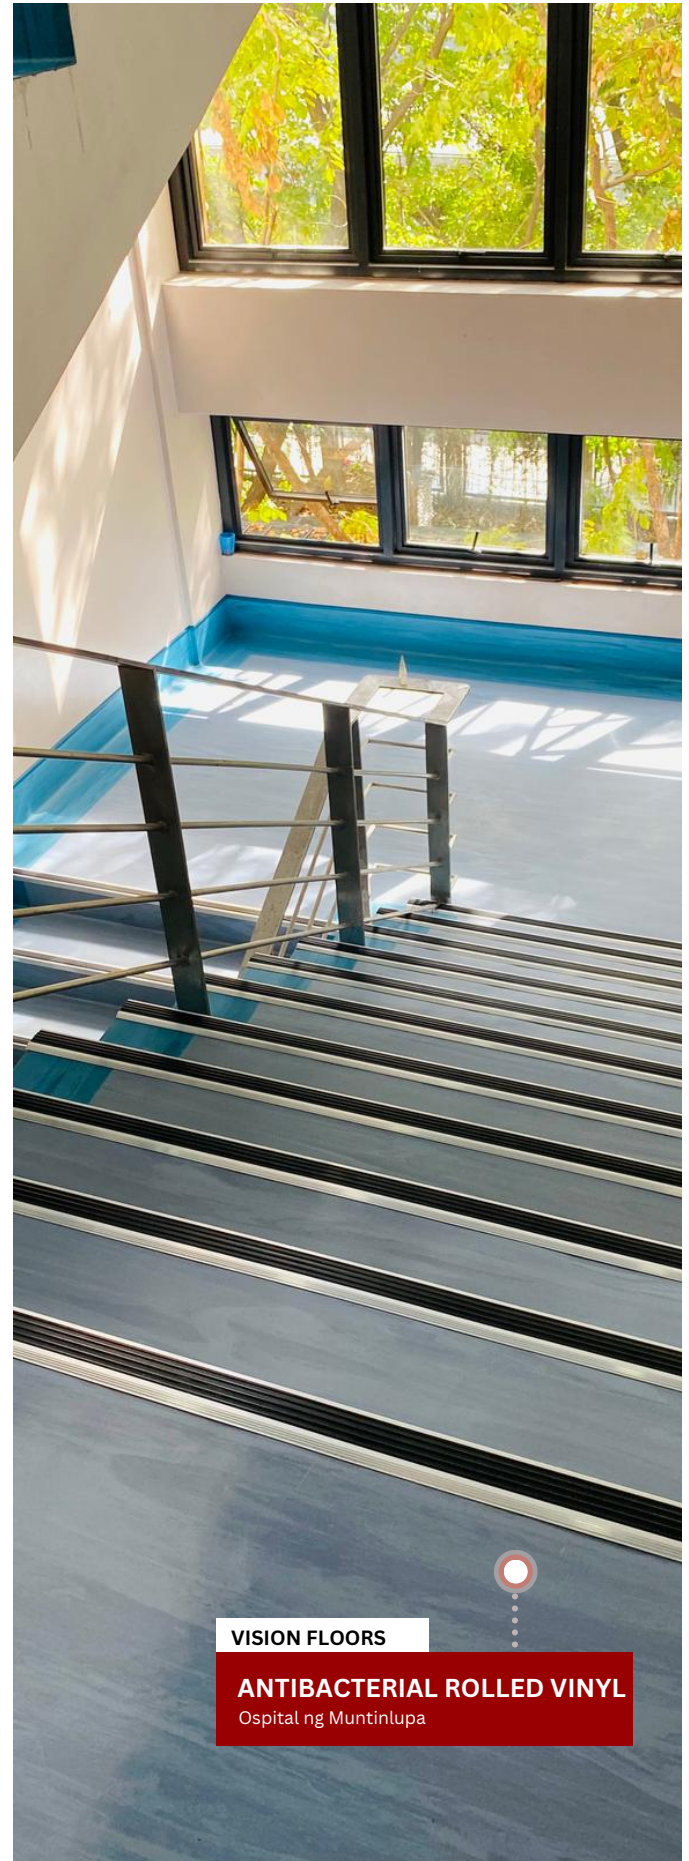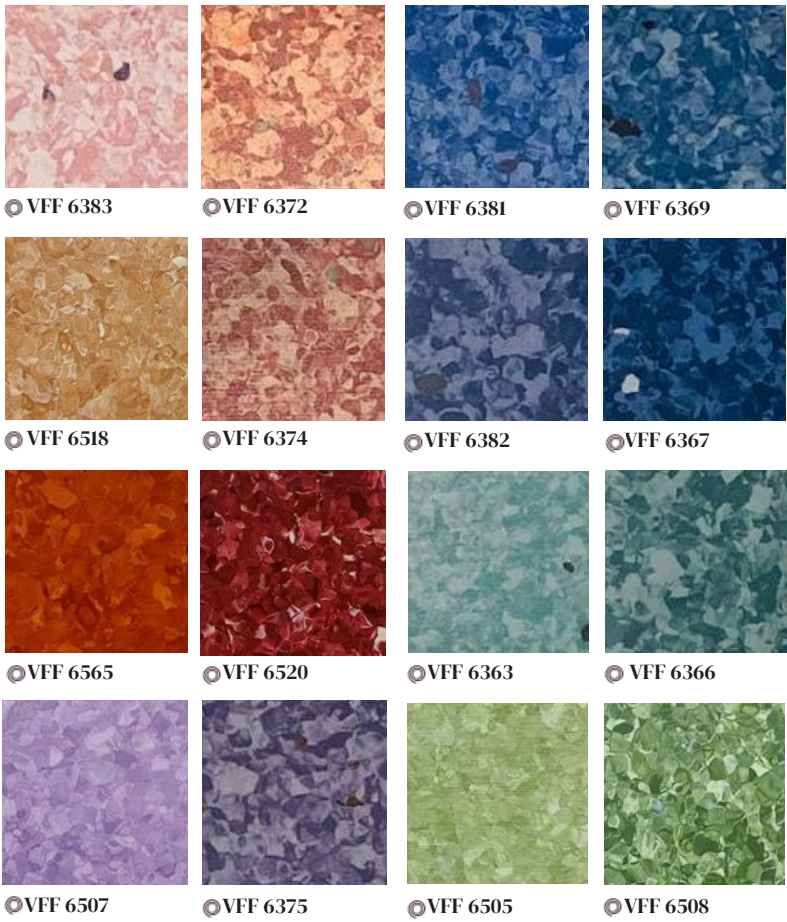

VISION FLOORS
ANTIBACTERIAL ROLLED VINYL
 Ospital ng Muntinlupa



TE BODY SOLUTIONS



GYM MAT

DIMENSION:
500 mm x 500 mm
THICKNESS:
20 mm; 25 mm

Density: 1.6 g/cm³
Polymer content: Approx. 20%
Bulk density: Approx. 320 g/l
Hardness: 40 Shore A MPa
Tensile strength: >6
Elongivity break: > 700 %
Grain size: 2,0 - 30,0 mm
Polymer base: 100% dyed through EPDM



Vision Floors Rubber tiles are incredibly durable, soft to the touch, and warm underfoot. This, along with the retro aesthetic of rubber tiles, makes it the perfect choice for any home or commercial space.



RUBBER TILES ROUND STUD

COLOR SELECTION



SPECIFICATIONS

DIMENSION:
500 mm x 500 mm

THICKNESS:
4.00 mm (0.5mm)

VISION FLOORS

RUBBER TILES

Dr. Jose Fabella Memorial Hospital, Manila



VISION FLOORS

VINYL WOOD PLANKS



VINYL WOOD PLANKS

SPECIFICATIONS


Dimension:

184 mm x 950 mm, 180 mm x 920 mm, 6" x 36"



Thickness: 2 mm, 3 mm



SPC FLOORING STRUCTURE

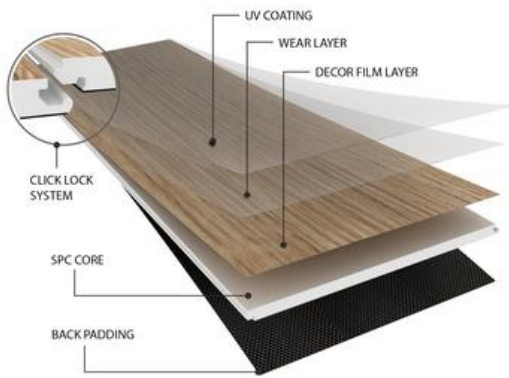

INSTALLATION METHODS

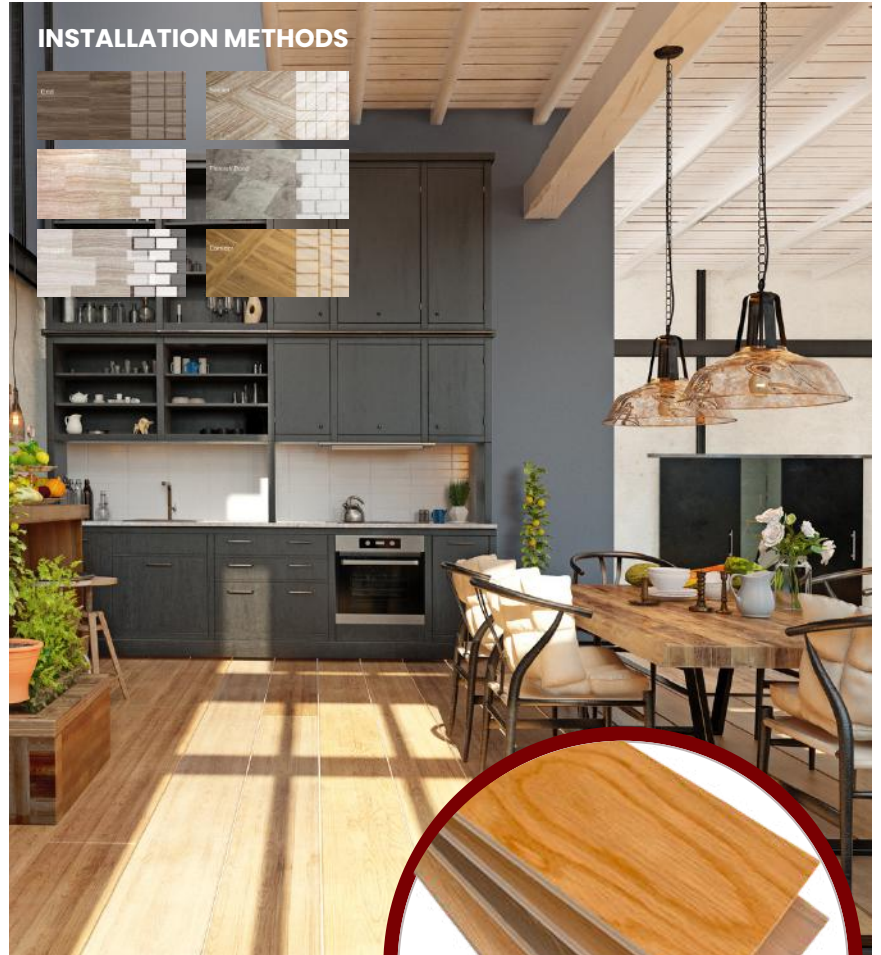

SPC PLANKS

SPECIFICATIONS

Dimension: 190 mm x 1210 mm

Thickness: 4 mm (1.5 mm backing)



ENGINEERED WOODS

SPECIFICATIONS

Dimension: 600 mm x 124 mm

Thickness: 15 mm



DONE PROJECT
Project Name: BDDRMO - Helipad
Location: Cavite
Requirement: Waterproofing & PU Epoxy



RUBBERIZED PAINT

It is mainly used for indoor sports. It is durable and can withstand heavy objects, spills, and if not fazed by possible abrasions.



POLYURETHANE PAINT

Preferably for outdoor sports. Suitable for heavy traffic and open space such as Open Basketball Courts. Flexible and elastic; resistant to scratch and can resist extreme temperature.



SELF-LEVELLING EPOXY

Harder and brittle than Epoxy Floor Coating. Usually used on heavy traffic areas like parking spaces.



BITUMINOUS MEMBRANE

Thickness: 3mm, Size: 5000




LIQUID MEMBRANE

WATERPROOFING



CAPPING SEAL



CAPPING SEAL

It is the perfect way to finish off your antibacterial rolled vinyl flooring installation.

Capping seals provide a neat, secure and hygienic finish at wall and floor junctions, where you cove your flooring up a wall. You use them with cove formers, in effect, forming a skirting.

WELDING ROD




WELDING ROD

It used to secure the junction between 2 rolls of antibacterial vinyl flooring and to prevent dirt and moisture from getting under two rolls of flooring.

A variety of weld rods exists to answer all the possible uses.

COVE FORMER



COVE FORMER

It supports your vinyl flooring as you neatly take it up the wall, forming a rounded angle skirting.

They help to both prevent any stress on your floor and reduce the risk of anything piercing it, maintaining the integrity of the floor for longer. They are ideal for use in areas that you keep clean by frequent mopping.

SELF-LEVELING COMPOUND



SELF-LEVELING COMPOUND

It is a specialized flooring material designed to create a smooth and level surface.

It is a mixture of cement, aggregates, and other additives that automatically levels itself when poured, eliminating the need for extensive manual leveling. Self-leveling compound is used to smooth uneven concrete or wooden floors. It is also known as self-leveling underlayment or floor leveler.

BASE BOARD



BASE BOARD

It is covering the lowest part of an interior wall. Its purpose is to cover the joint between the wall surface and the floor.

It covers the uneven edge of flooring next to the wall; protects the wall from kicks, abrasion, and furniture; and can serve as a decorative molding.


COPPER TAPE



COPPER TAPE

It refers to a thin strip of copper, often backed with adhesive.

STAIR TREAD




STAIR TREAD

It is the horizontal portion of a set of stairs on which a person walks.

The tread can be composed of wood, metal, plastic, or other materials. In residential settings, treads can be covered in carpeting. Stair treads can come in non-slip varieties, particularly in commercial or industrial locations.

STAIR NOSING



STAIR NOSING


It is the horizontal edge or projection of a stair tread that may extend past the riser or the back of the tread below. Stair nosing can be made from various materials, such as wood, metal, plastic, or rubber.

Stair nosing can enhance the safety, durability, and appearance of stairs by providing a non-slip surface, protecting the step from wear and tear, and defining the edge of the step.



**YOU ENVISION,
WE BUILD.**

VISION SPORTS

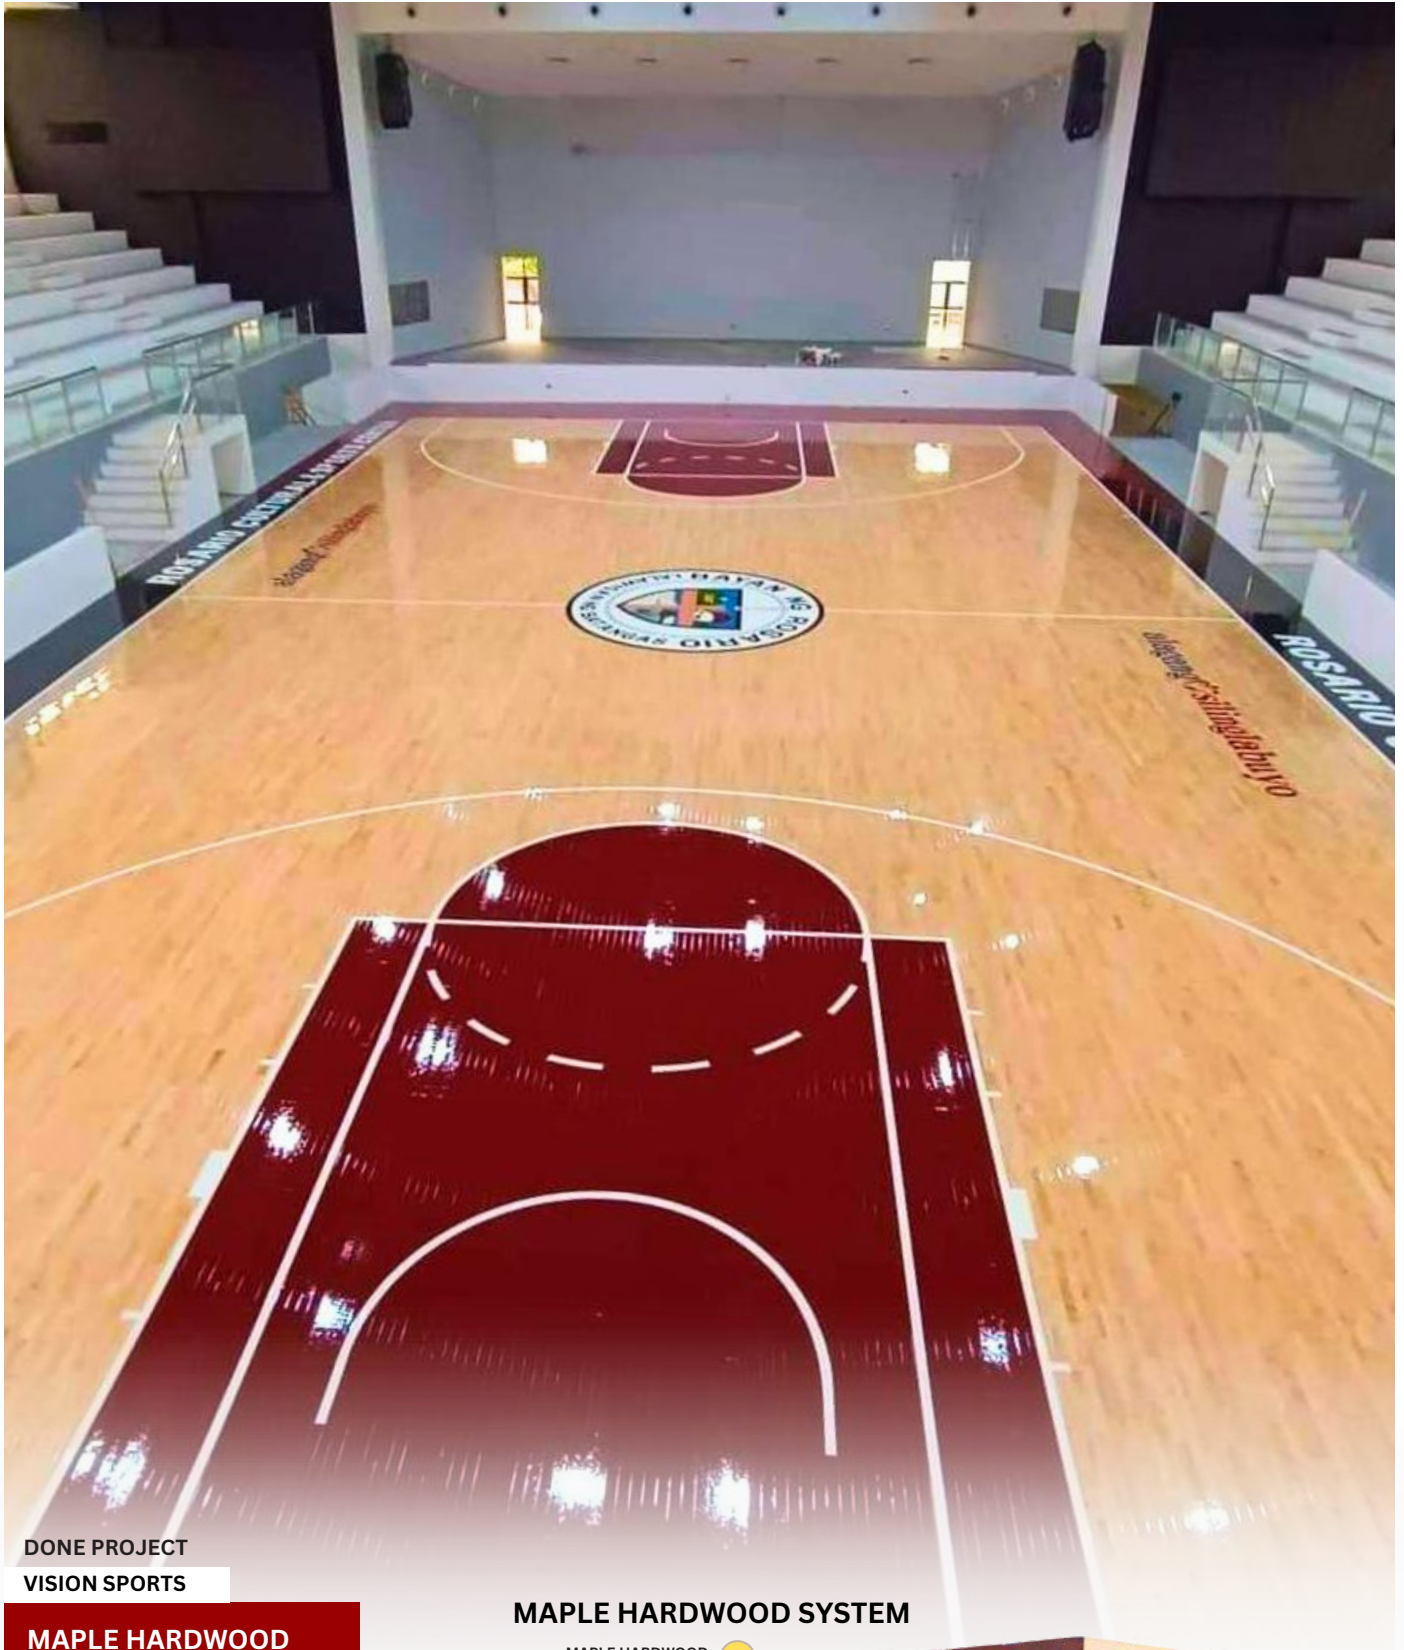

**DONE PROJECT
VISION SPORTS**

MAPLE HARDWOOD
Rosario, Batangas

MAPLE HARDWOOD SYSTEM

- MAPLE HARDWOOD
22 MM THICK
- PLY WOOD
12 MM THICK
- WOOD JOIST
45 MM THICK
- RUBBER PAD
20 MM THICK




TOTAL THICKNESS IS 100 MM





**YOU ENVISION,
WE BUILD.**

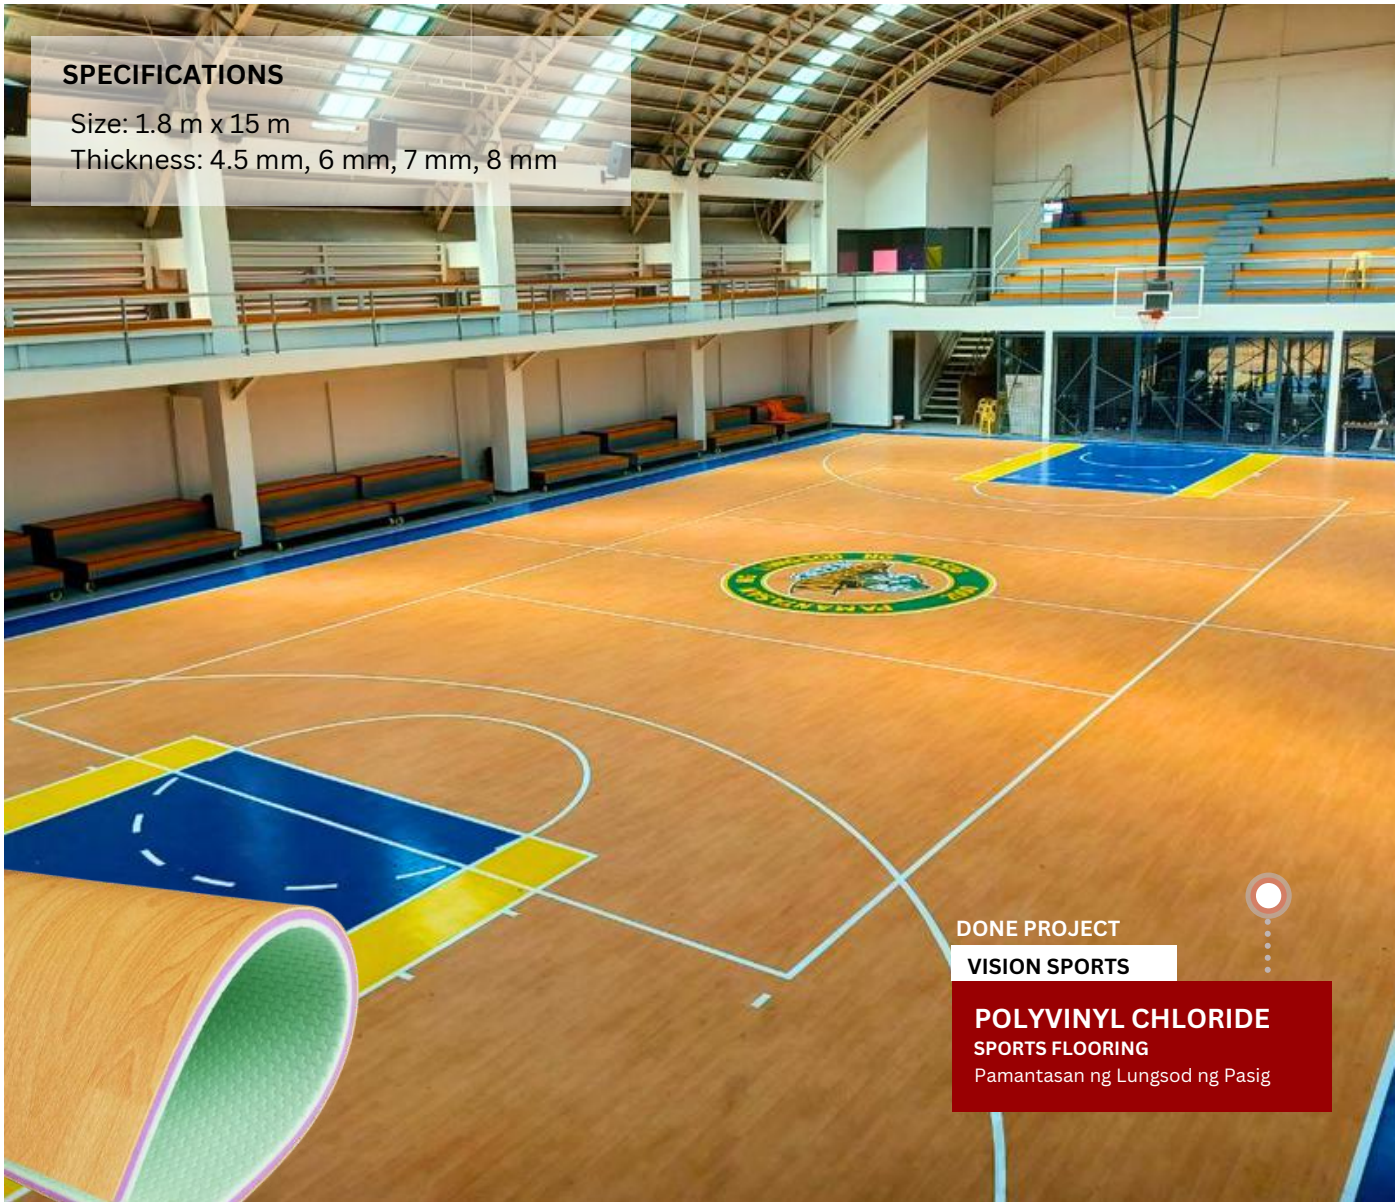

SPECIFICATIONS
 Size: 1.8 m x 15 m
 Thickness: 4.5 mm, 6 mm, 7 mm, 8 mm

**DONE PROJECT
VISION SPORTS**


**POLYVINYL CHLORIDE
SPORTS FLOORING**
 Pamantasan ng Lungsod ng Pasig





**YOU ENVISION,
WE BUILD.**

VISION SPORTS | PVC SPORTS FLOORING

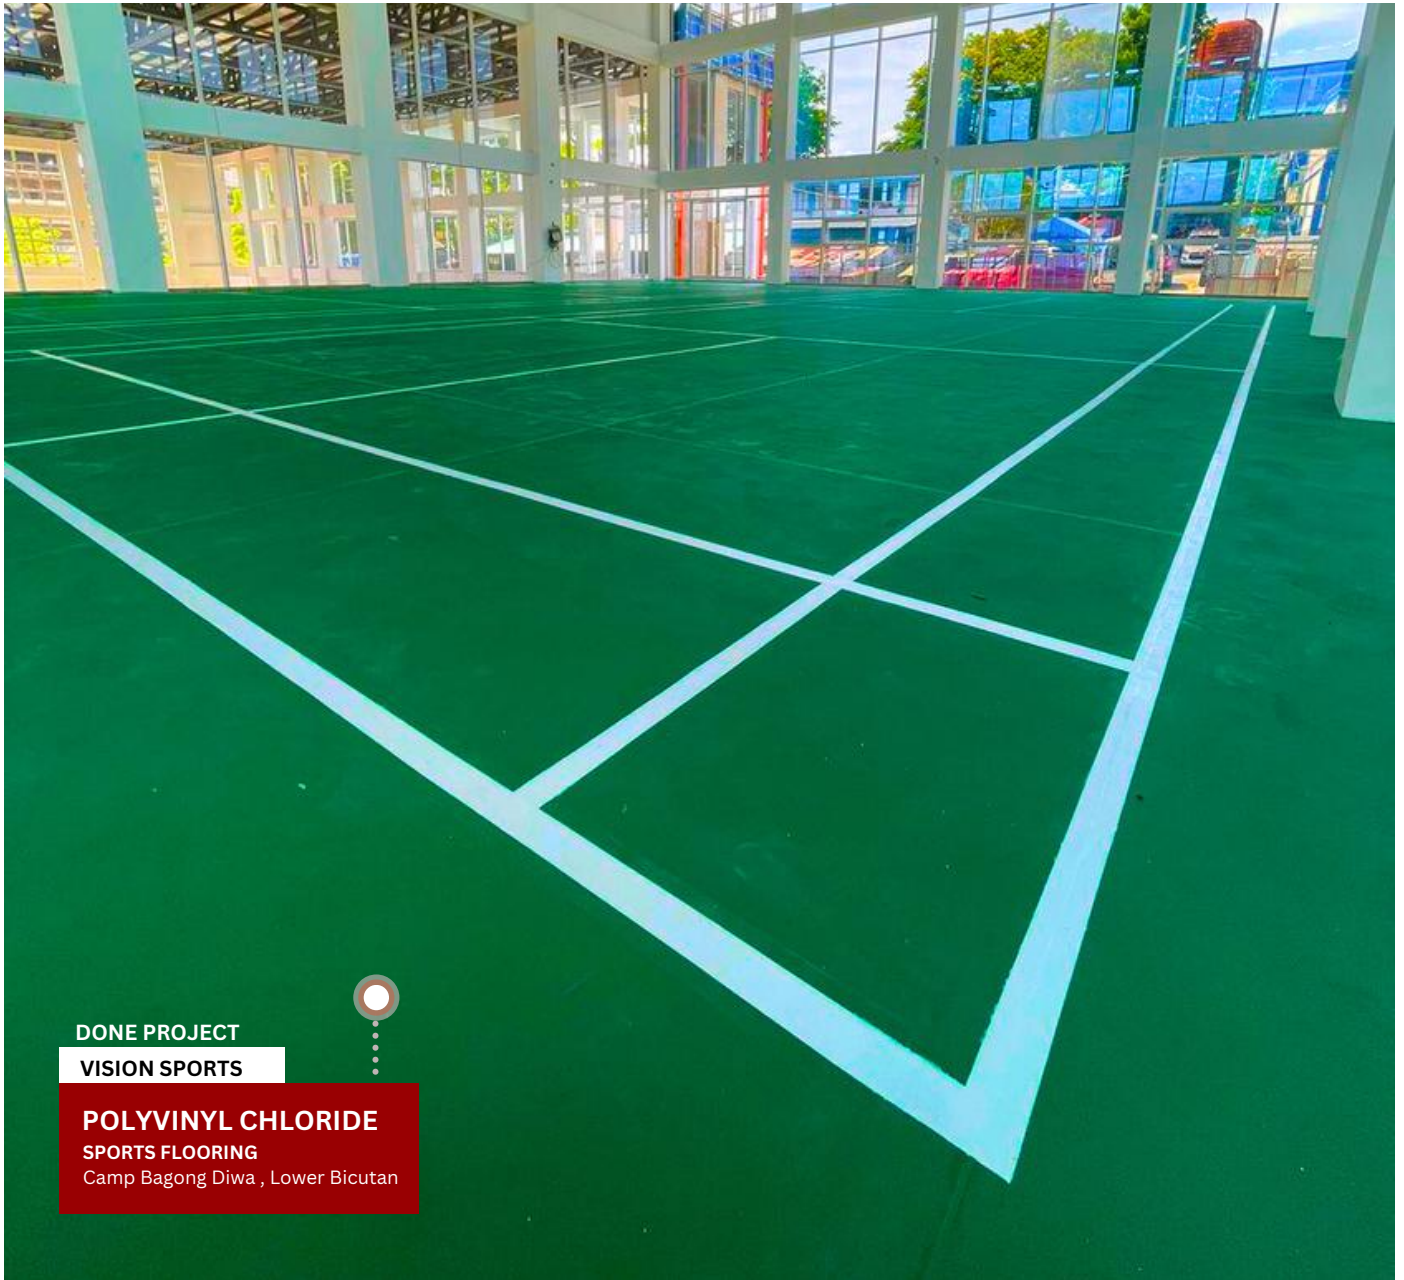

DONE PROJECT

VISION SPORTS


POLYVINYL CHLORIDE

SPORTS FLOORING


Camp Bagong Diwa , Lower Bicutan



Basketball

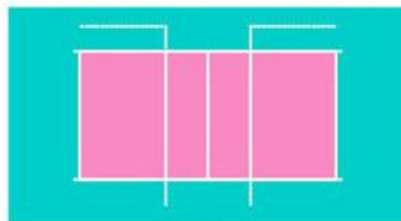

Volleyball

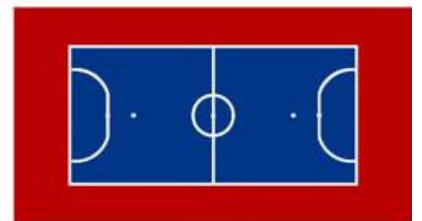

Futsal



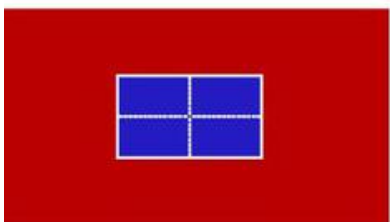




Table Tennis

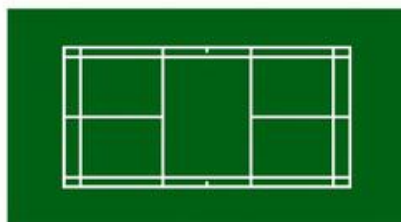

Badminton

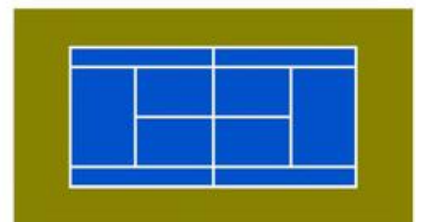

Tennis

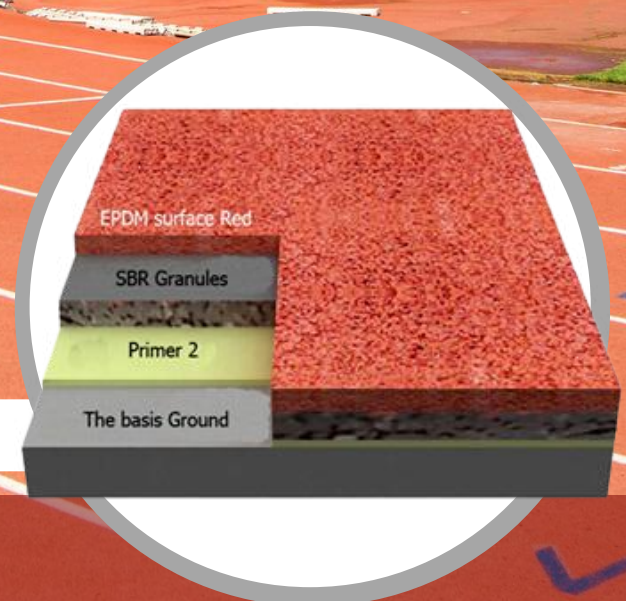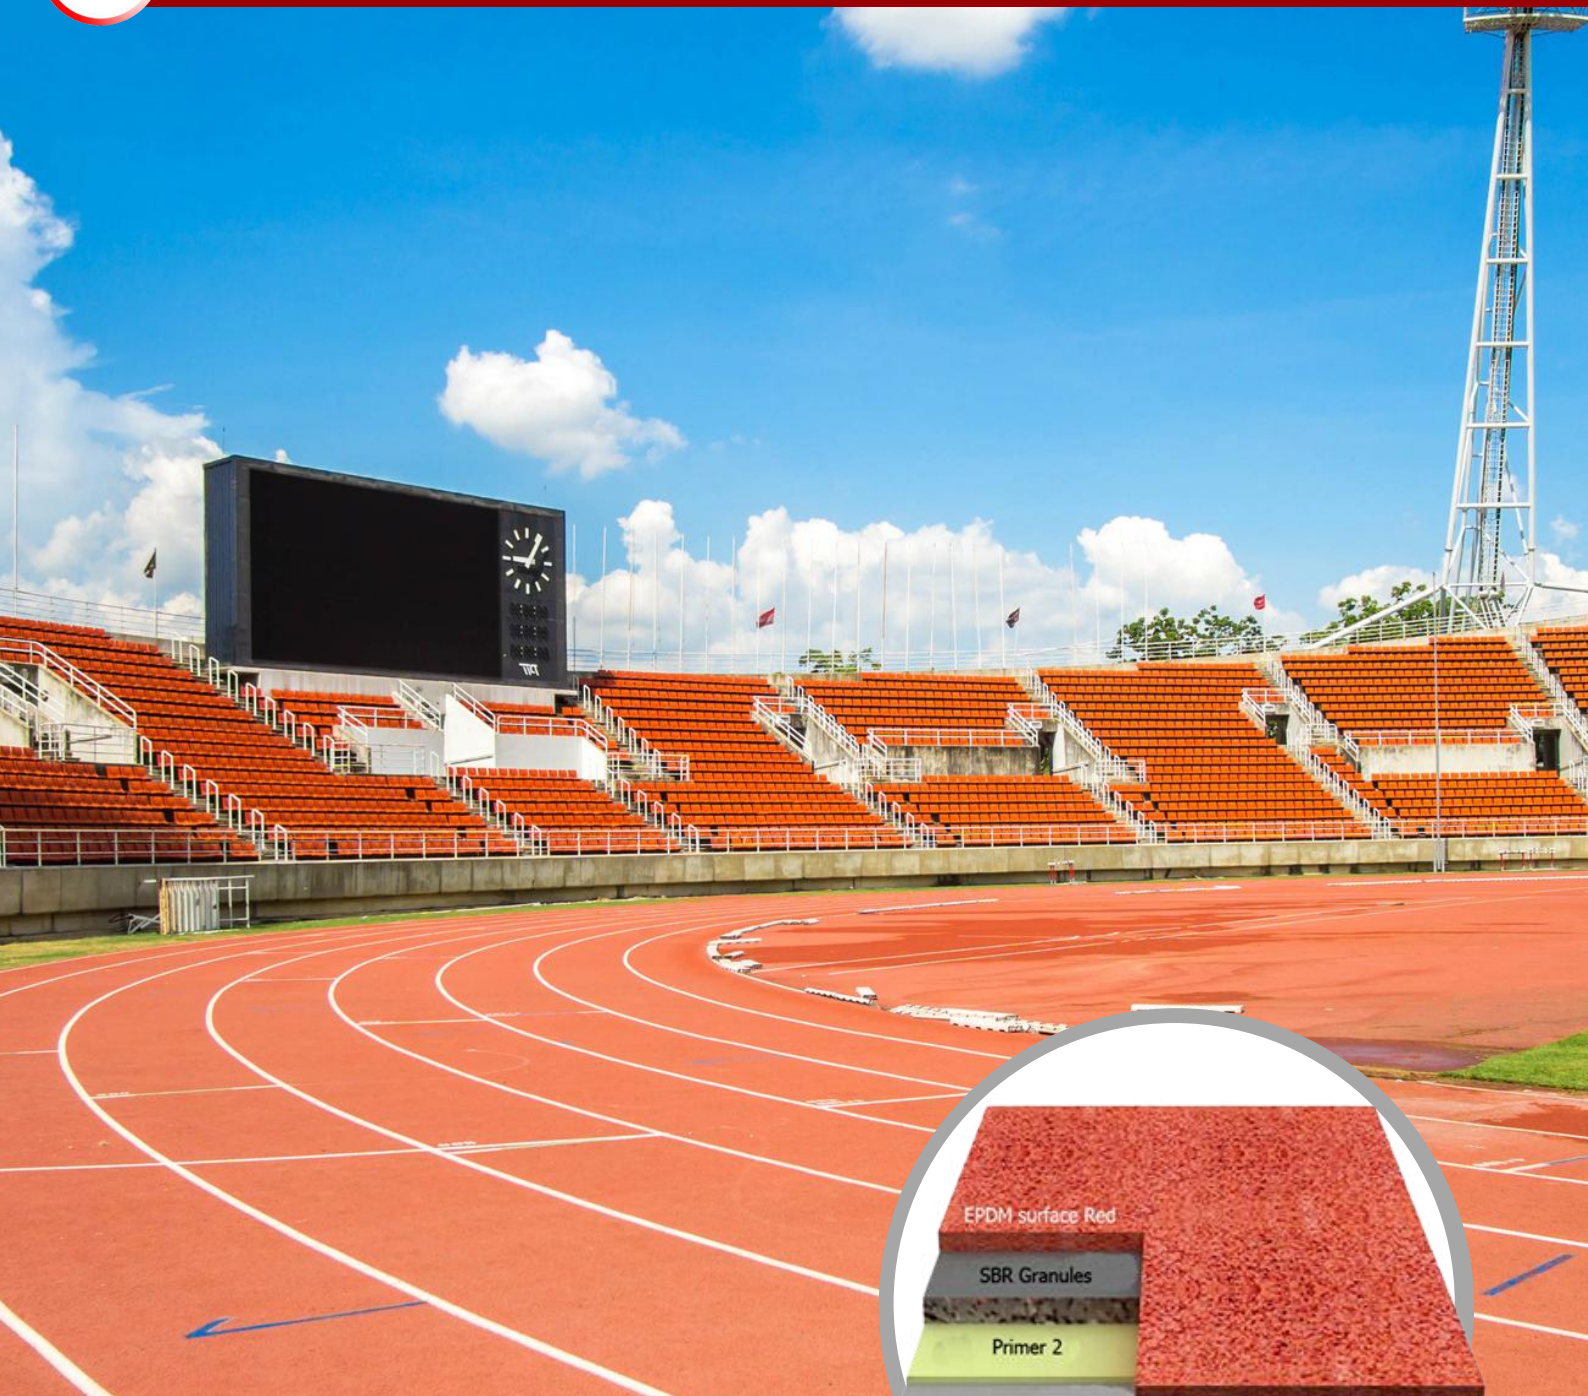

SANDWICH RUNNING TRACK

Vision Sports Sandwich Running Track system that can be used in international or local competitions, resist bad weather, waterproof and provides an elastic surface to maximize athletes' performance.

It is used in sports facilities of municipalities, sports clubs, athletics track of stadium, universities and sports schools. The sandwich system running track with long life, low maintenance costs is a durable system that is accepted worldwide.



ARTIFICIAL GRASS TURF

FEATURES

- Durability
- Natural look and feel
- Excellent Ball Roll and Bounce
- Enhanced Drainage System
- UV Stability
- Low Maintenance
- Safety Features
- Environmentally Friendly



Vision Sports artificial grass turf offers several features that make it suitable for sports applications.



SHOT CLOCK

OVERALL DIMENSIONS

26" h x 26" w x 8" D (each clock)

WEIGHT

Hanging weight: 35 lbs. (each clock)

Shipping weight: 60 lbs. (each clock)

- Easy to install and maintain
- Low-cost yet highly reliable
- Backboard High Impact Tempered Glass
- 1.05m X 1.80m X 12mm (FIBA Standard)
- Unit can be raised and lowered with a hydraulic type.
- Ring snap back loaded heavy duty and padded foam at the bottom.
- Counter-weight, concrete blocks packs and iron sheet, 300 kilos each goal
- Head extensions- 8 ft. Extension provides maximum clearance between the base of the unit and the rim.
- Foam Cushion-3 inch super durable padding and strong under impact resistance.
- The unit is epoxy finished white.
- Base-1.2m X 1.80m (FIBA Standard) fully covered with vinyl padding for player safety.
- Floor anchoring system included.

BASKETBALL BACKSTOP GOAL

Vision Sports Basketball Backstop Goal are a versatile and adjustable basketball system designed for both indoor and outdoor use. They provide a convenient way to play basketball and practice your shooting skills at home, in the backyard, or even in recreational facilities.



Dimensions:

Main Controller: (10" x 8.5" x 4.25")

Digit size:

Time of the game - 6" x 4" / Red

Scores - 6" x 4" / Red

Period and Team Fouls - 6" x 4" / Red

Weight:

Main Controller (13.2 lbs/6 kg)

Input Voltage: 220 VAC for main Controller

ELECTRONIC BASKETBALL SCOREBOARD

FEATURES

- Easy Installation and maintenance
- Low cost and highly reliability
- User-friendly Interface and Program
- Ultra bright seven segment LED
- 4 hours Back-up Battery for the Main Controller
- With provisions for add on Vision Sports products: Shot Clock set, Team fouls, and Period display.










GYM SEATS

Vision Sports Gym Seats offer a combination of comfort, durability, and customization options to enhance the spectator experience in sports stadiums.



From ergonomics to weather resistance, these chairs are designed to provide a premium seating solution for fans to enjoy their favorite sporting events in style and comfort.

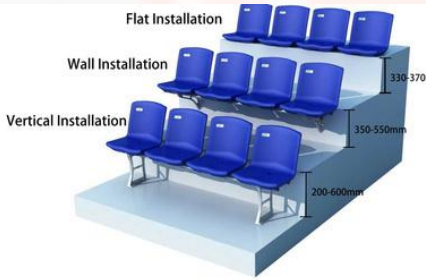



ECO-H
 Size: W430mm * D417mm * H347m
 Material : HDPE
 Production Tech: Blow molding
 Application: Stadium Seating, Meta Structural Bleacher
 Features: Anti-aging, Anti-UV, Fire-proof

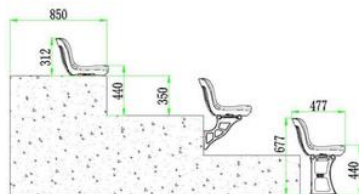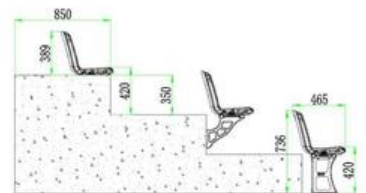

Eco-M
 Size: W417mm * D477mm * H312mm
 Material: HDPE
 Production Tech: Blow molding
 Application: Stadium Seating, Metal Structure Bleacher
 Features: Anti-aging, Anti-UV, Fire-proof

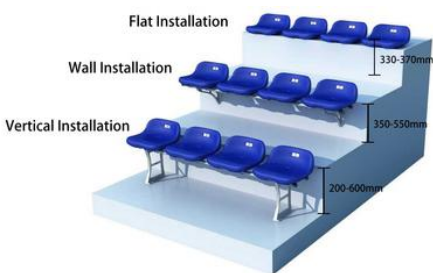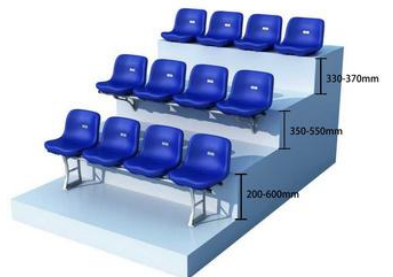

Eco-L
 Size: W415mm * D410mm * H162mm
 Material: HDPE
 Production Tech : Blow molding
 Application: Stadium Seating, Telescopic Bleachers, Metal Structure Bleacher
 Features: Anti-aging, Anti-UV, Fire-proof

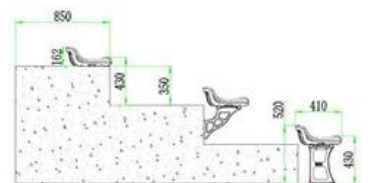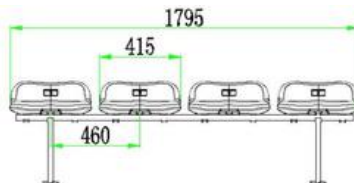



**YOU ENVISION,
WE BUILD.**

VISION WALLS

ALUMINUM COMPOSITE PANEL

Vision Walls Aluminum Composite Panel (ACP) is a light weight durable panel made of laminated aluminum and polyethylene core compound, coated with an advanced fluorocarbon paint Polyvinylidene Flouride (PVDF) to ensure the excellent durability of the surface finish.


It is an excellent material for exterior and interior cladding of new building construction as well as retrofit applications.



SOLID/COLORED



MIRROR ACP

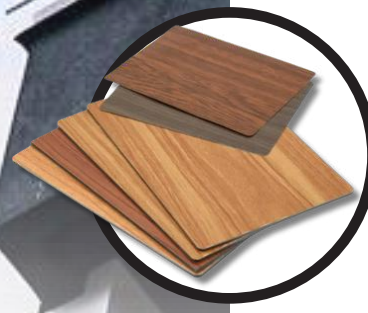

WOOD ACP



METALLIC ACP


SPECIFICATIONS

Thickness :
3 mm, 4 mm, 5 mm

Dimension:
1200 mm x 2400 mm
1200 mm x 3060 mm
1220 mm x 3600 mm

APPLICATIONS:

1. Interior & Exterior material of building
2. Structure of exhibit hall
3. Advertisement boards
4. Factory Buildings
5. Bath, washroom & simple frame wall, etc.
6. Cladding of buildings situated in a highly corrosive environment. (e.g. project near the seashore)

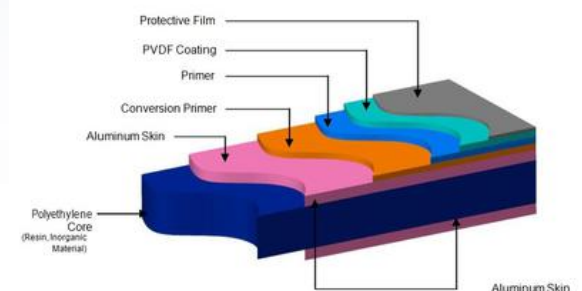



TIMBER TUBE



HOLLOW DECKING



SOLID DECKING

Vision Walls Wood Plastic Composite (WPC) is a unique composition to replicate wood without the maintenance and hazards of traditional timber decking. 45% timber fibres + 55% HDPE and additives.



WALL CLADDING

DIMENSION: 25 mm x 160mm x 2.9 m



**YOU ENVISION,
WE BUILD.**

VISION WALLS | WALL PARTITION



VISION ACCORDION



TOILET PARTITION



WALL PARTITION

STANDARD SPECIFICATIONS:

STC RATING:
28-31 STC

PANEL THICKNESS:
62MM

PANEL WIDTH:
1.2M (MAXIMUM)

PANEL HEIGHT:
4 METERS (MAXIMUM)

PANEL WEIGHT:
10 KGS / SQM

FRAME:
EXTRUDED ALUMINUM JAMB

TRACK:
HEAVY DUTY ALUMINUM

ROLLER:
HEAVY DUTY GLIDER 2 WHEEL ROLLER

SEALS:
TOP AND BOTTOM MANUALLY OPERATED
RETRACTABLE INTERLOCKING SEAL

PANEL FINISH:
FOAM PADDED FABRIC | LAMINATED | MELAMINE |
GRAPHICOTE

SOUND BARRIER:
NONE


PANELS:

MANUALLY OPERATED INDIVIDUAL PANEL
TOP AND BOTTOM SUPPORTED
LEVER CLOSURE PANEL
WALL ATTACHMENT
60 KG PER CUBIC METER HIGH DENSITY ROCKWOOL
INSULATION



**YOU ENVISION,
WE BUILD.**

VISION CEILINGS



PINHOLE



DUNE SAND



FINE FISSURED

DIMENSION:

2 ft x 4 ft

2 ft x 2ft

600 mm x 600 mm

600 mm x 1200 mm

VISION CEILINGS

ACOUSTIC BOARDS

CEILING

DONE PROJECT

Project Name: Dap Ayan 10-Storey Commercial

Location: Ilocos Norte

Requirement: Acoustic Boards and Accessories



**YOU ENVISION,
WE BUILD.**

VISION CEILINGS | GYPSUM BOARDS



VISION CEILINGS

**STANDARD GYPSUM
CEILING**




FIRE RESISTANT



WET RESISTANT



**WET & FIRE
RESISTANT**



STANDARD GYPSUM

Thicknesses: 1/4" (6.4 mm), 3/8" (9.5 mm), 1/2" (12.7 mm)
Widths: 4' (1220 mm) standard; 54" (1370 mm)
Lengths: 8' to 12' (2440 to 3660 mm) standard



**YOU ENVISION,
WE BUILD.**


VISION CEILINGS | PVC LAMINATED GYPSUM

DONE PROJECT

Project Name: Ospital ng Muntinlupa

Location: Muntinlupa City

Requirement: PVC Laminated Gypsum (Lemon Skin)

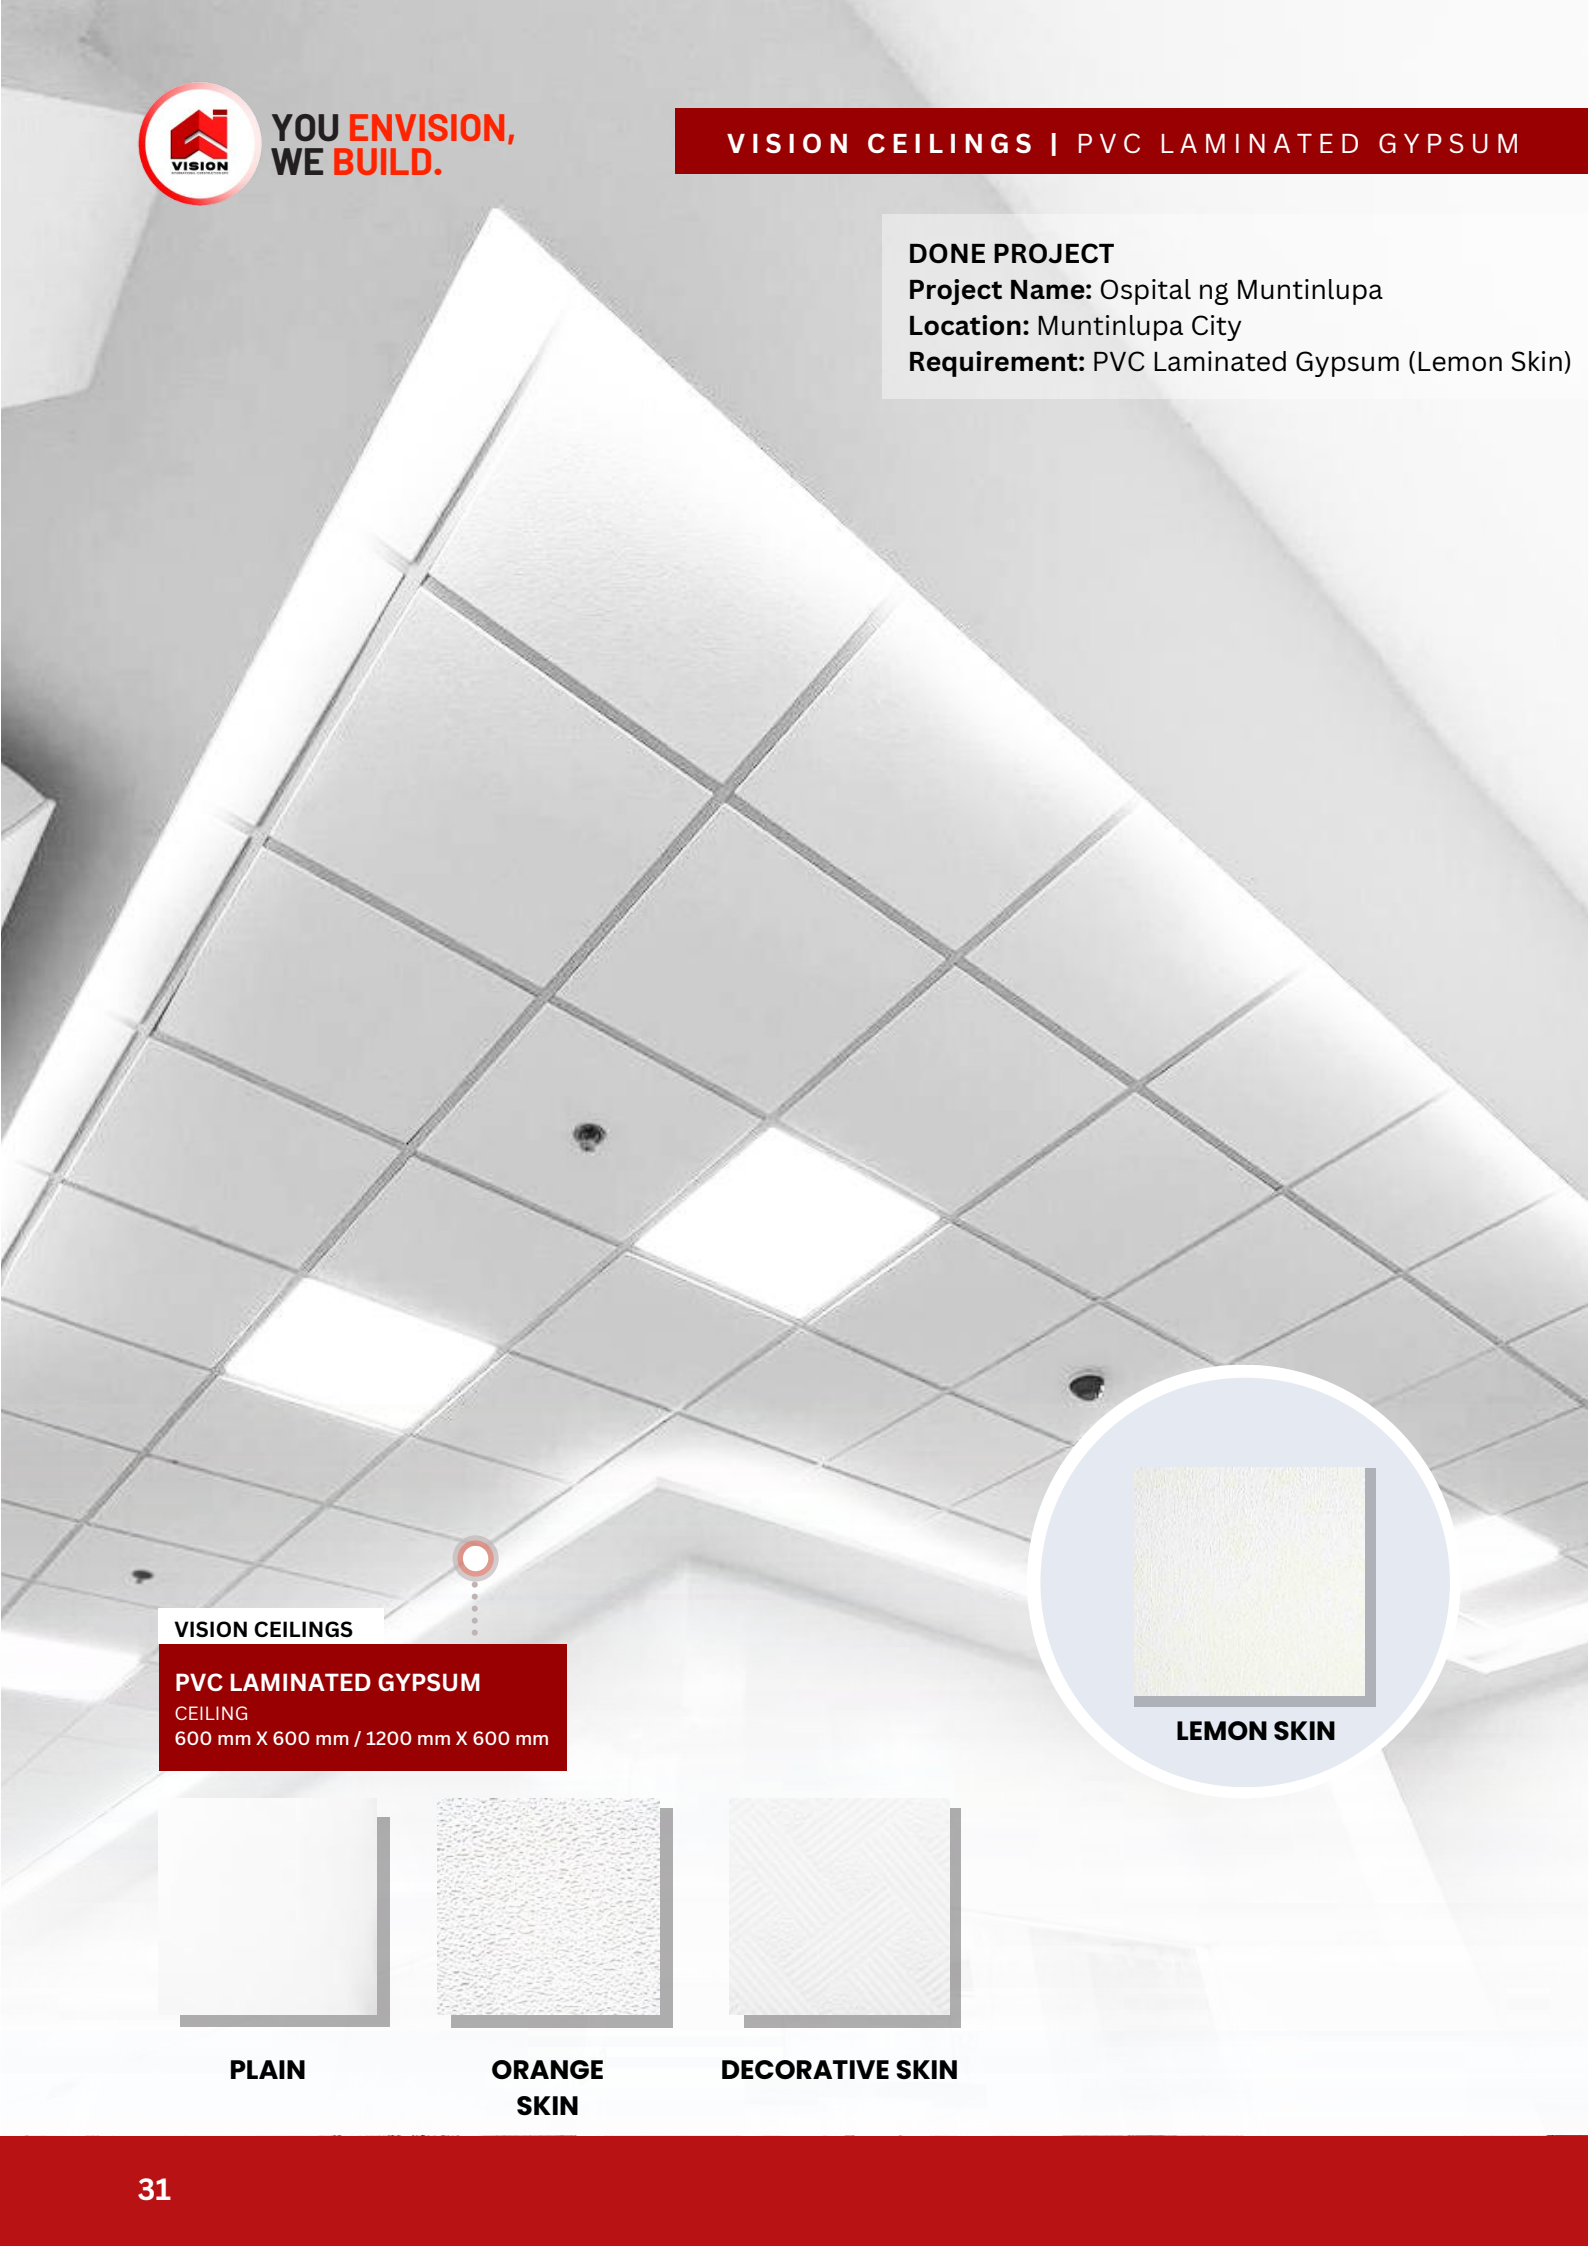

VISION CEILINGS

PVC LAMINATED GYPSUM

CEILING

600 mm X 600 mm / 1200 mm X 600 mm




LEMON SKIN



PLAIN



ORANGE SKIN




DECORATIVE SKIN



**YOU ENVISION,
WE BUILD.**

VISION CEILINGS | ANTIMICROBIAL CEILING

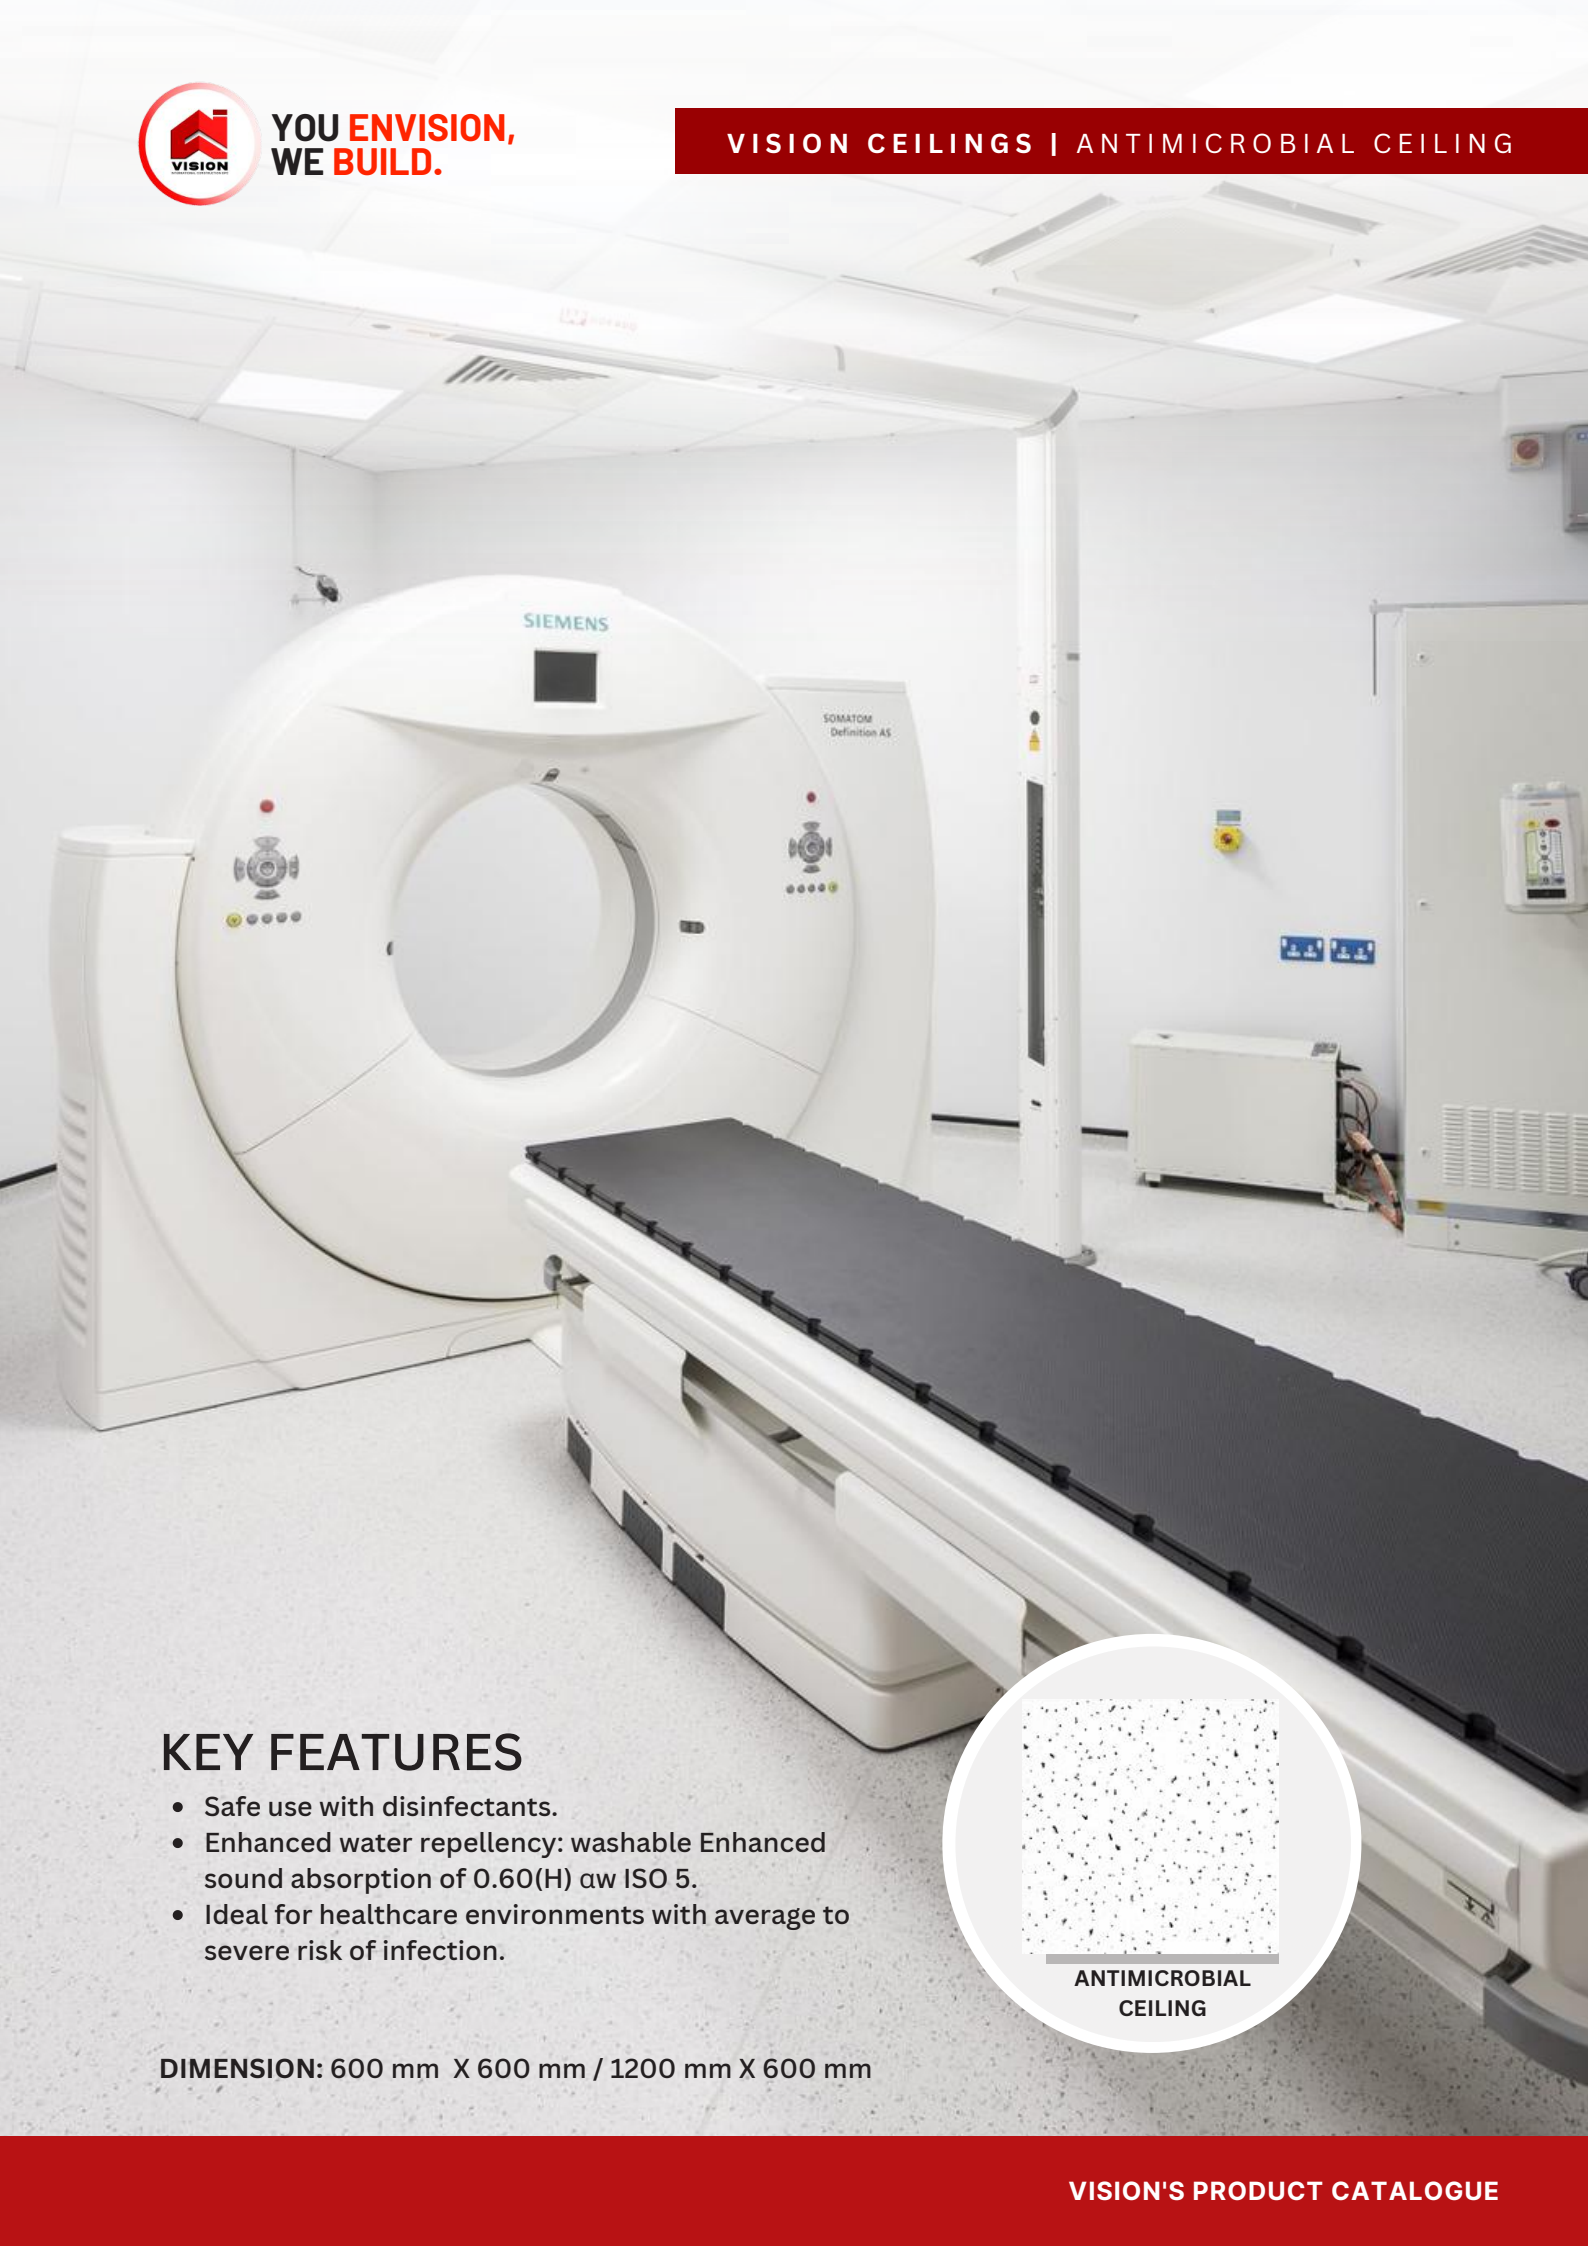

KEY FEATURES

- Safe use with disinfectants.
- Enhanced water repellency: washable Enhanced sound absorption of 0.60(H) α w ISO 5.
- Ideal for healthcare environments with average to severe risk of infection.

DIMENSION: 600 mm X 600 mm / 1200 mm X 600 mm



**ANTIMICROBIAL
CEILING**



VISION CEILINGS

PVC CEILING PANEL
BROWN OAK

Dimension: 12 inches to 12 ft.




BROWN OAK



AFRICAN RED OAK



MANDSHURICA



MATTE WHITE

Vision Baffle Ceilings provide both functional and aesthetic advantages, contributing to improved acoustics, visual appeal, and customized design options for a variety of architectural and interior design projects.

FEATURES

- Acoustic Control
- Visual Interest and Aesthetics
- Flexibility and Customization
- Light Distribution

U-BAFFLE



V-BAFFLE



EXTRUDED BAFFLE



O-BAFFLE






DONE PROJECT

Project Name: St. Matthias Medical Center

Location: Isabela City

Requirement: Perforated Metal Ceiling

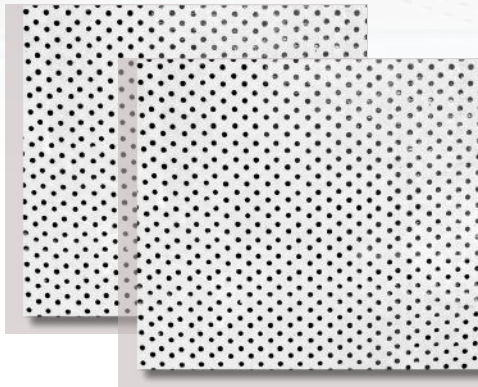

Perforated metal ceilings offer a combination of functionality, aesthetics, and practicality, making them suitable for various commercial, institutional, and residential environments.


FEATURES

- Acoustic Performance
- Ventilation and Airflow
- Aesthetic Appeal
- Lighting Integration
- Security and Safety

STANDARD PERFORATION PATTERN




Hole Size
Dia. 30.0mm
Pitch
47.0mm
Open Area
32.0%




Hole Size
Dia. 3.5mm
Pitch
8.2mm
Open Area
14.0%



Hole Size
Dia. 6.0mm
Pitch
10.63mm
Open Area
25.0%




Hole Size
Dia. 0.8mm
Pitch
5.0mm
Open Area
2.0%




Hole Size
Dia. 0.8mm
Pitch
3.5mm
Open Area
4.0%




Hole Size
Dia. 0.8mm
Pitch
10mm
Open Area
0.5%




Hole Size
Dia. 0.8mm
Pitch
7.0mm
Open Area
1.0%




Hole Size
Dia. 1.5mm
Pitch
4.0mm
Open Area
11.0%




Hole Size
Dia. 1.8mm
Pitch
5.0mm
Open Area
10.0%




Hole Size
Dia. 3.0mm
Pitch
10.0mm
Open Area
7.0%




Hole Size
Dia. 4.0mm
Pitch
8.0mm
Open Area
20.0%




Hole Size
Dia. 5.0mm
Pitch
10.0mm
Open Area
20.0%




Hole Size
Dia. 2.2mm
Pitch
5.0mm
Open Area
15.0%




Hole Size
Dia. 2.5mm
Pitch
5.5mm
Open Area
16.0%




Hole Size
Dia. 3.5mm
Pitch
7.0mm
Open Area
20.0%



Hole Size
Dia. 3.5mm
Pitch
9.0mm
Open Area
12.0%




Hole Size
Dia. 6.0mm
Pitch
12.0mm
Open Area
20.0%



Hole Size
Dia. 19.0mm
Pitch
25.5mm
Open Area
44.0%



Full Threaded Rods



Full threaded rod (1/4" Ø 1.5m)
 It used in high tension due to being relatively long rods and being threaded.
 They are used as a ceiling suspension by being fixed to hard point on one end with appropriate fasteners and ceiling frame on the other.

Expansion Bolt



Expansion bolt (1/4" Ø)
 It provides a secure hold in ceilings. They expand when they're inserted into a hole, providing a very strong grip.

Nuts and Washer



Nuts (1/4" Ø)
 It used in conjunction with ceilings, used to ensure long life of the product that they hold together.
Washer (1/4" Ø)
 It used to help prevent the fastener from loosening once installed.

Twisted Hanger



Twisted Hanger
 It attaches to ceiling grid or drop ceiling style grid by twist on action which locks it tight.

Cross Tee




Cross Tee (2') (4')
 The supports that connect the main tees in a grid pattern to receive the ceiling panels. primary support for the ceiling system.

Wall Angle



Wall angle (1"x1"x3m)
 It used to help support Metal Furrings. Widely used for ceiling framing structure and dry wall partition structure.

Metal Furring






Metal furring (0.5mmX5m)
 It refers to a non-structural metal attachment that is used to hold a finish material.
 In metal-framed construction, the furring pieces are long, light gauge materials of various shapes.

Main Tee



Main Tee (3.4m)
 It runs the length of the room suspended from the joists by wire hangers. Used for exposed ceiling grid and suits acoustic.

FRAMING SYSTEM

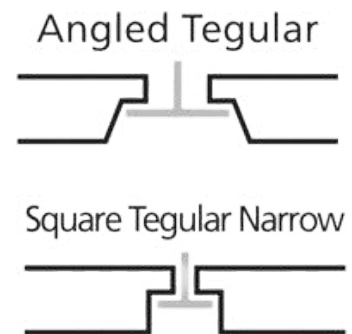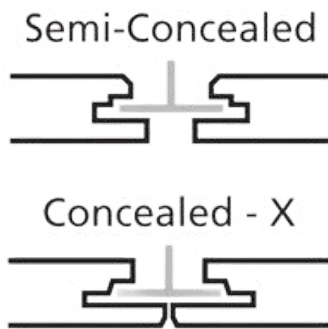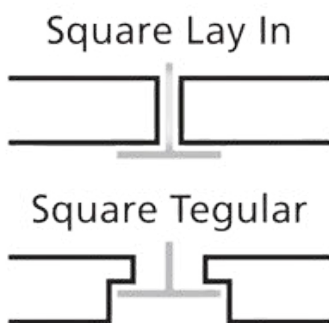



**YOU ENVISION,
WE BUILD.**

VISIONCARE

In a *Vision Care Hospital accessories and equipments* plays a vital role in maintaining a safe and comfortable environment for patients and staff.

They help prevent accidents, protect walls and equipment, and ensure the facility remains functional and aesthetically pleasing.

When choosing these items, it's essential to consider their quality, durability, ease of maintenance, and compliance with safety standards.

FEATURES

- Wall guards protect against damage from collisions and are easy to install and maintain.
- Handrails provide stability for patients with ergonomic design and ADA compliance.
- Corner guards absorb impact, ensuring wall and equipment protection.
- All these accessories contribute to a safe, functional, and aesthetically pleasing environment.



CORNER GUARD



WALL GUARD



HOSPITAL HANDRAILS

VISIONCARE

HANDRAILS

HOSPITAL ACCESSORIES

SPECIFICATIONS

- **Structure**

Vinyl cover + inner aluminum retainer + ABS End-cap + bracket+ black anti-shock

- **Size**

Dia of Vinyl cover: 160mm

Thickness of Vinyl cover: 2.0mm

Thickness of Aluminum support: 1.4/1.5/1.8/2.0 mm

Length: optional from 1 meter to 6 meters

- **Weight**

Panel: 0.4kg/m

Aluminum : 0.8 kg/m

End-cap: 0.03kg/pc



VISIONCARE
INTERNATIONAL MEDICAL SUPPLIES



**YOU ENVISION,
WE BUILD.**

Technical parameters

- Overall size: 2120x970x500 mm

Standard Configuration

- Manual crank spring tensioning system
- Aluminum folding side rails
- 12mm diameter
- Noiseless castors with brake
- Urine hooks, I and V drip

Function

- Back-rest lifting angles is 0 to 80 degrees
- Knee-rest lifting angle is 0 to 40 degrees

Optional Configuration

- Mattress, Mobile food table



SURGICAL BED



HOSPITAL BED

SPECIFICATIONS

- Length/Width - 2000mm/500mm
- Elevation (up/down) - 630mm/930mm
- Tredelenburg less than or equal 25 degrees
- Reverse Tredelenburg less than or equal 25 degrees
- Lateral lift (Left/Right) - 20/20 degrees
- Headrest (up/down) - 45/90 degrees
- Footplate (up,down,horizontal positioning) - 90/90/15 degrees
- Black plate (up/down) - 75/10 degrees
- Kidney Bridge - 120mm
- Sliding - 300mm
- Power - 220v, 50Hz, 1.0kW



SURGICAL LIGHTING

Vision Care International Medical Supplies surgical lighting plays a critical role in the operating room by providing enhanced visibility, reducing shadows and glare, ensuring accurate color rendition, and offering adjustable lighting settings.

It improves surgical precision, enhances patient safety, and contributes to successful surgical outcomes.





CURTAIN DIVIDER



The **Vision Care International Medical Supplies Curtain Divider track system**, which is used in many hospitals across the world, has a variety of benefits beyond simply the sturdy, high-grade aluminum track section and the maintenance-free, wheeled roller hooks.

This **curtain divider track system**, which is intended to provide years of trouble-free operation, uses suspension hangers for a firm connection to the ceiling, barring direct ceiling fixing, and die-cast aluminum wall shoes for a secure location where the tracks contact the wall is standard equipment that includes a curtain removal point.

SPECIFICATIONS:

- Premium quality aluminum with a silver anodized/white powder-coated finish.
- It spans 3.0 meters without support and includes double hangers for full functionality.
- The curtains are flame retardant.

ANAESTHETIC MACHINE



Vision Care Anesthesia Machine with castor wheels (brakes included).

- Gas supply system for O₂, N₂O, and Air with DISSs for safety. Can connect two cylinder yokes (one for O₂), pin-index safety systems.
- Selectable vaporizers for desflurane, halothane, isoflurane, and sevoflurane (maintenance-free option).
- Ventilation modes, adjustable pressure limit (<70 cm H₂O), PEEP (0-20 cm H₂O).
- Ensures proper functioning of pre-use vent and ongoing system.

MULTIPARAMETER PATIENT MONITOR



CEILING SUPPLY UNIT



OUR VALUED BUSINESS PARTNERS





YOU ENVISIO





N, WE BUILD.





FOR MORE INFORMATION, VISIT



YOU ENVISION, WE BUILD.

