


Aries Pro Series
LED Cabinets

HIKVISION®

ARIES PRO SERIES LED CABINETS

Rental


Brighten Every Moment

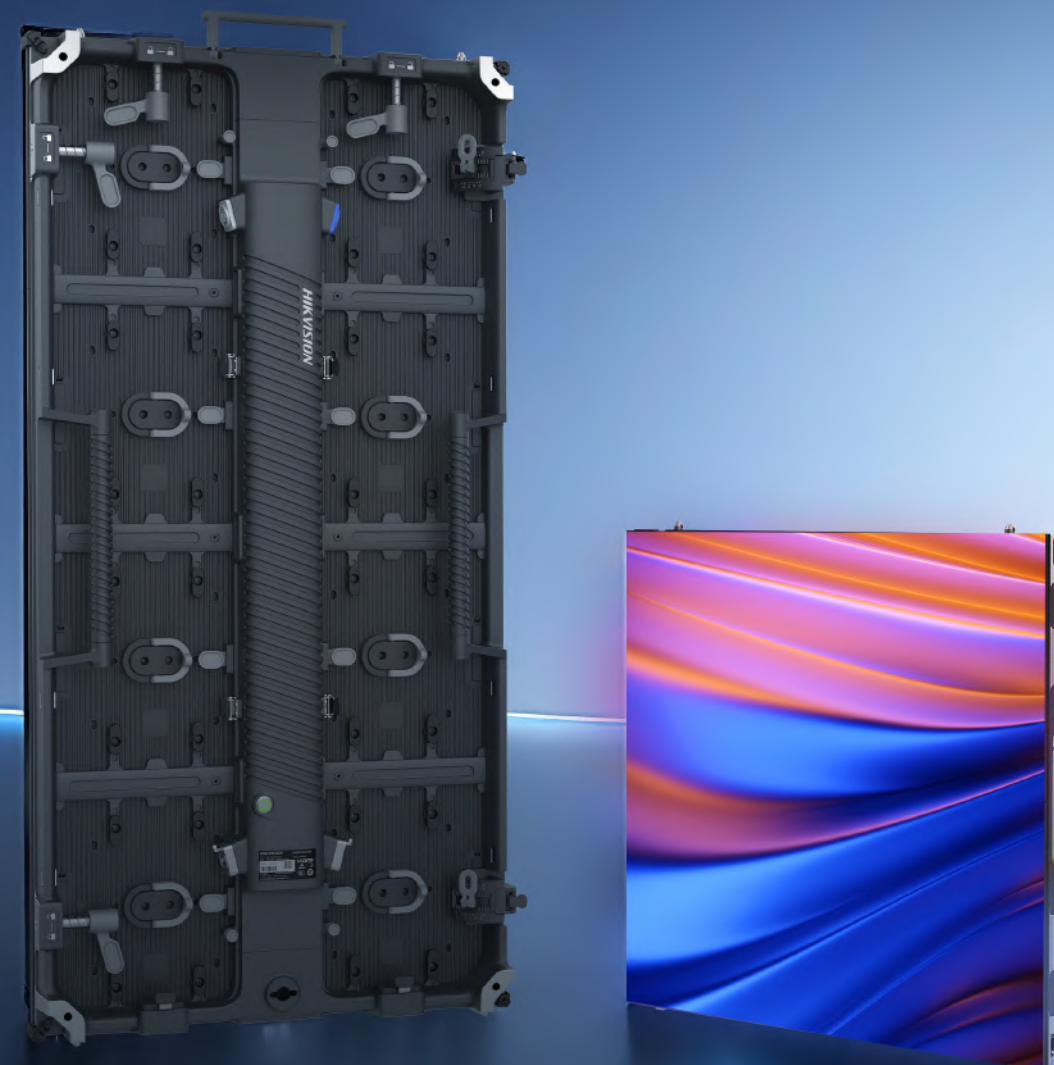


 Hikvision  HikvisionHQ  hikvisionoverseas  HikvisionOverseas
 HikvisionHQ  Hikvision Corporate Channel  Hikvision Commercial Display

HIKVISION®

Two Cabinet Sizes



500x500 mm Cabinet

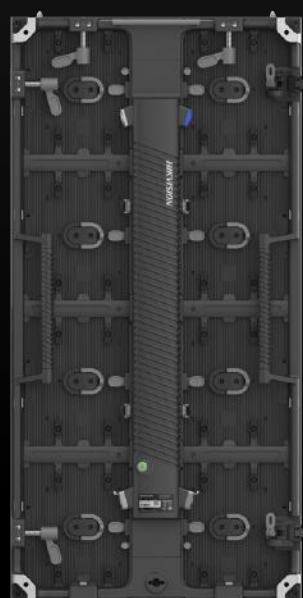

500x1000 mm Cabinet

Ultra-Slim & Lightweight

69mm



69mm




500x1000 mm <12.8-13.6kg

500x500 mm <7-7.6kg

*Incl. LED modules

Unified Platform for Flexibility


Compatible with modules of varying pixel pitches, enabling flexible adjustments and improving cost efficiency

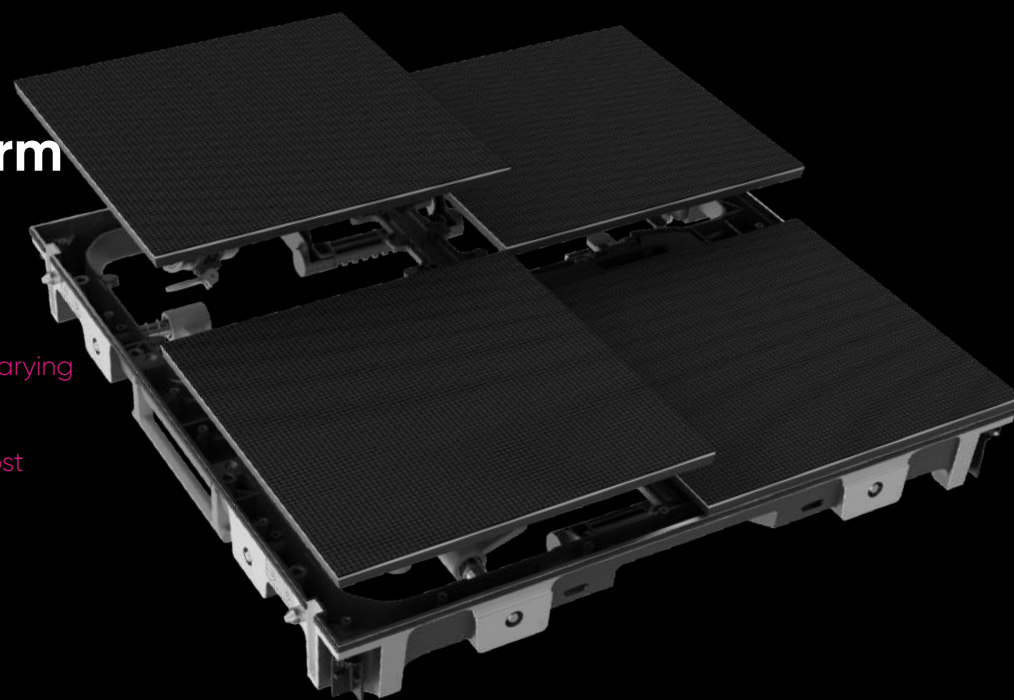

HIKVISION

Easy Installation One Person Enough

Designed for one-person installation, eliminating complex steps and saving up to 1/3 of labor costs



One Push
to lock and reinforce



One Touch
to secure the latch




One Click
to release the center pin






Magnetic top and bottom
edges (optional)
Automatically align, improving
installation efficiency




Quick Fixes Anytime Anywhere

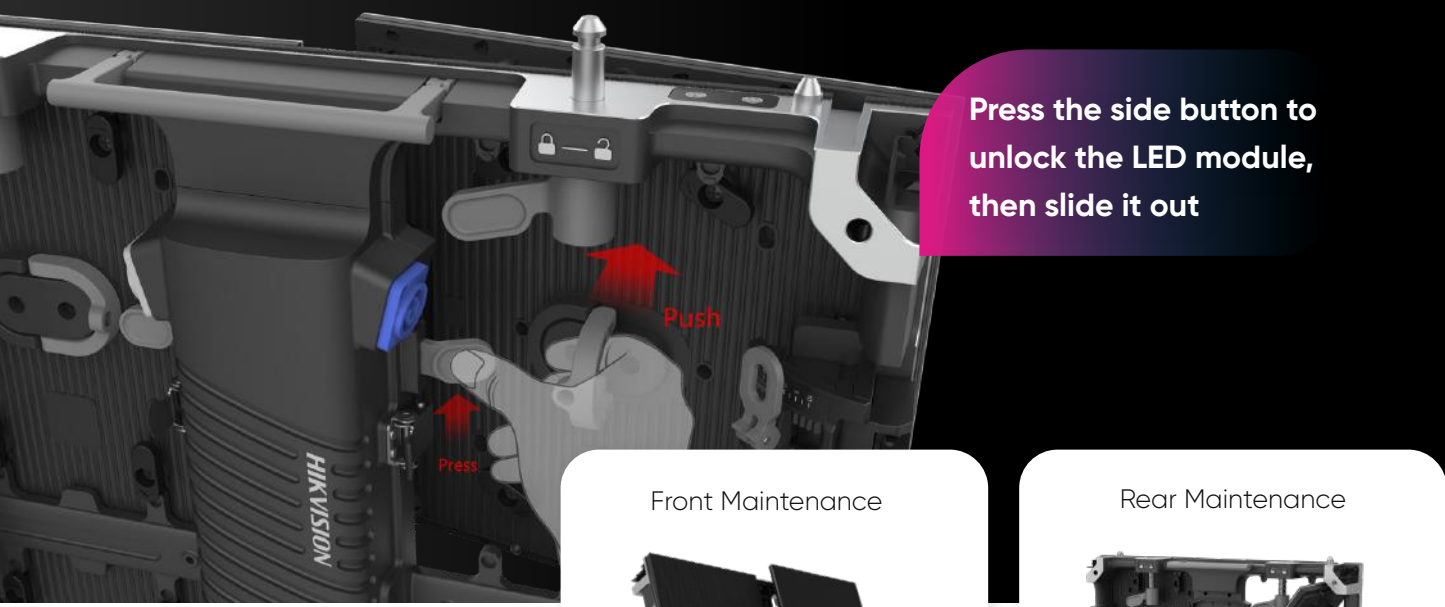


Press the side button to unlock the LED module, then slide it out

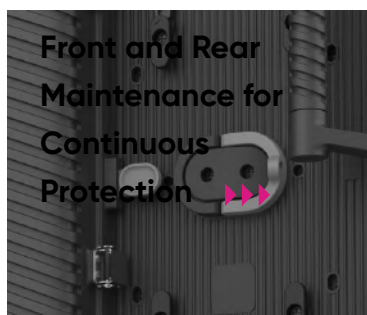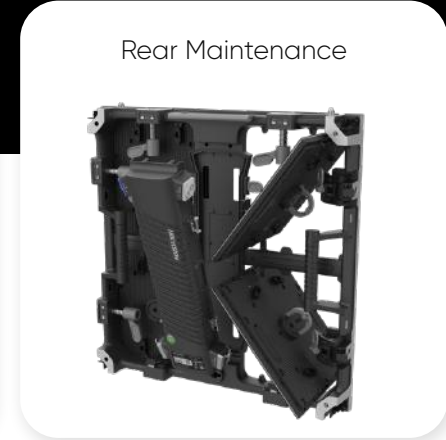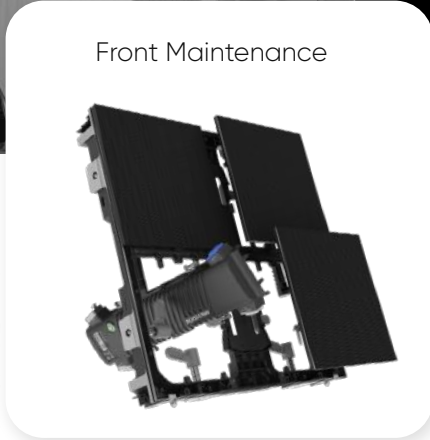

Built to Last Resistant to Wear

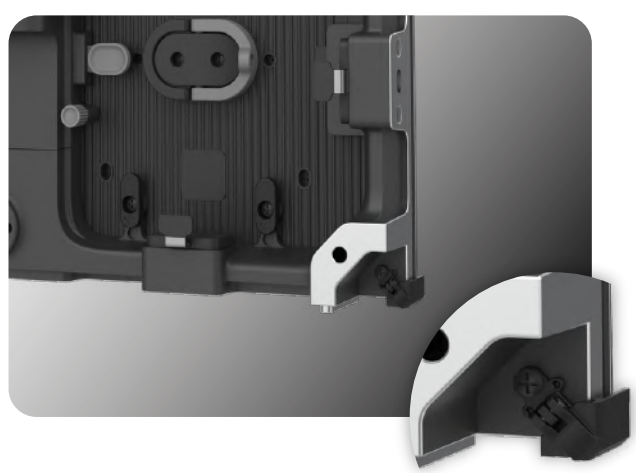


Anti-collision – Flip-over corner guards protect the LED module from impacts during transport

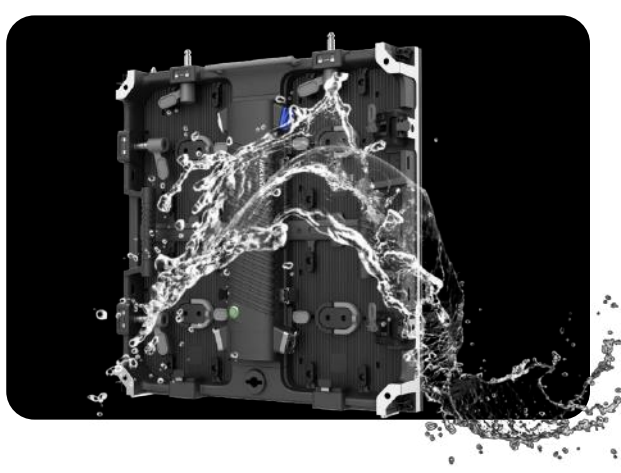

Water-proof – IP40 indoor, IP65 outdoor, perfect for all environmental conditions

Stunning On Screen Flawless On Camera

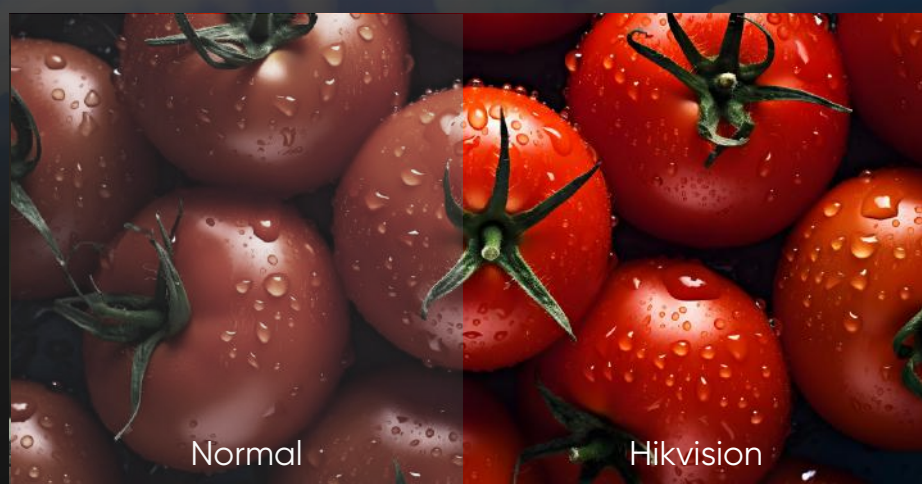

7680 Hz


Experience flawless visual performance with our advanced LED technology, engineered to deliver exceptionally high refresh rates up to 7680 Hz even at ultra-low brightness levels.

1/8 Scan

Advanced dynamic scan technology ensures exceptional image smoothness and stability. With scan ratio of 1:16 (indoor P2.6) and 1:8 (outdoor P3.9), it significantly enhances visual clarity, eliminates scan lines, and delivers a seamless viewing experience for both live audiences and camera capture.



95%



Over 95% of the DCI-P3 Color Gamut, delivering cinema-grade color accuracy and vibrant, lifelike visuals

4500 nits

Indoor brightness of 1000 nits, standard outdoor brightness of 4000 nits, and 4500 nits for black SMD

Product Model	P1.9 IND00R	P2.6 IND00R	P2.9 IND00R	P2.9 IND00R	P2.9 OUTD00R	P2.9 OUTD00R	P3.9 OUTD00R	P3.9 OUTD00R
Application Scenarios	Indoor				Outdoor			
Pixel Pitch (mm)	1.9	2.6	2.9	2.9	2.9	2.9	3.9	3.9
Module Size (mm)	500 × 500 × 69	500 × 500 × 69	500 × 500 × 69	500 × 1,000 × 69	500×500×69	500×1,000×69	500×500×69	500×1,000×69
Module Resolution	264 × 264	192 × 192	168 × 168	168 × 336	168×168	168×336	128 × 128	128 × 256
Weight (kg)	7.0	7.0	7.0	12.8	7.6	13.6	7.6	13.6
IP Rating	IP40				IP65			
Brightness (nits)	1,000				4,000		4,500	
Contrast Ratio	≥ 6,000:1							
Refresh Rate (Hz)	Up to 7,680							
Grey Level (bit)	16							