

CATALOGUE





FALL ARREST



CONFINED SPACE



GAS DETECTION

Confined Space & Working at Height Specialists

Asbestos Decontamination & Removal Equipment















Honeywell



CONTENTS

TS

Safety Store	4
Asbestos Decontamination	5
Atex/Non Atex Lighting	10
Anchorage (Temporary, Overnet)	15
Air Movers	21
Breathing Apparatus	23
Connectors	27
Confined Space Kits	30
Fall Arrest Blocks	35
Gas Monitors	38
Harnesses	43
Lanyards	48
Portable Gantries	53
Rescue Davits	56
Rescue Equipment	71
Respiratory	74
Safety Accessories	80
Skyhook	85
Tripods	87
Winches	90
Servicing	92
Training	94
Consultancy	97



SAFETY STORE



Come visit our safety store located here in Tullamore, Co. Offaly, where there is a wide range of working at heights, confined space and rescue equipment on display. We have recently opened up our new office and warehouse in Belfast. See back of catalogue for location details.

Our servicing team and sales staff will be available to help with any enquiries and show products relevant to your safety needs.



Trade Safety are associated partners with Thermac and suppliers of Decontamination, and Surface Preparation Equipment, providing Equipment, Consumables, RPE, PPE, Equipment Servicing and RPE Face fitting to a wide range of industries and sectors





POLYTHENE BAGS

Polythene Stretch Wrapping (Clear) Orange retardent



ENCAPSULANT

10ltr Grey or White



ASBESTOS BAGS

200 and 300 gauge Clear and Red Various Sizes 900 X 600 , 900 X 1200 Printed and Non Printed available

CODE 4300223 CODE 1051022 CODE 1011003



TEXTURE COATING REMOVER

15ltr



TRIMAX PROTECTION LIQUID

5ltr



PVA SEALER CONTRACT

5ltr

CODE 1051042 CODE 4300553 CODE 1051021









SILICONE SEALANT

INSTANT NAILS GRAB ADHESIVE

TAPES

295ml

295ml

Hazard/Asbestos Warning Tape, Foil Tape PCL Tape etc.

CODE

3200550

CODE

1051479

CODE

1051201







SIGNS

Warning Labels Multi Warning Sings 3 in 1 M SERIES VACUUM BAGS

Vacuum Duo Dust Bags Hepa Flow Vacuum Bags **DUCTING**

Rigid and Flexible Available

CODE

1071000

CODE

1800230

CODE

1041108



Decontamination Units







Unit

Twin Shower Decontamination Unit

Welfare Decontamination Unit

Decontamination is a combination of processes that removes or destroys contamination so that infectious agents or other contaminants cannot reach a susceptible site in sufficient quantities to initiate infection, or other harmful response

Negative Pressure Units





A Negative Pressure Unit (NPU) creates a negative pressure that minimizes the spread of dust from the construction work. In this way, the work environment is improved and the need for final cleaning is reduced.



H Type Vacuums



H Type Vac 17.5l & 35.0l

H Type Wet Vac

Thermac H Type Vacuums are efficient, reliable, fully-compliant solution for use in the asbestos removal and construction sectors.

They remove potentially contaminated water and debris from asbestos enclosures or flooded sites

Blast Units



Blast & Breathe Trailer



Trailer Mounted Blast Unit



Dustless Blasting System

Blasting is generally a dry process. However, depending on the method, it is classified into several types such as sandblasting, blower blasting, and shot blasting. It is also used for various purposes such as rust removal, cleaning, and polishing



Atex Generally refers to the hazard of explosive atmospheres occuring in the workplace due to the presence of flammable gasses or combustible dust mixed in air, which can give risk to the risk of explosion.

Any area that is not classified as zone 0, 1 or 2 is deemed to be non-hazardous, as flammable atmospheres are not expected to be present. Special precautions for the construction and use of electrical apparatus or for the control of non-electrical ignition sources are theyfore not required although such an area may still be part of a greater restricted area.



ATEX RATED





SAFE LED HEAD TORCH

Zone 0 200 Lumens 2.5hr - 4.5hr

CODE

EXHT220



NETWON X HEADLAMP

Zone 0 216 Lumens 10hr-12hr

CODE

HL1010400



SIGMA RECHARGEABLE **SEARCHLIGHT**

Zone 1 890 Lumens 15hr - 20hr

CODE

SA-SIGMA-RSL 100



EXZOOM LED FLASHLIGHT

Zone 0,1,2 160 Lumens 6hr-13hr

CODE **NSEXZOOM**



SAFE LED FLASHLIGHT

Zone 0,1,2 270 Lumens 6.5hr-13hr

EXHT220



RECHARGEABLE LED SEARCHLIGHT

Zone 0 370 Lumens 60hr-80hr

CODE CODE **NSSAFA-SL**







SHINDAIWA M1 SERIES

Zone 1,2 9000 Lumens Run Time - Alwats



SITE BRIGHT ULTRA RECHARGEABLE

Zone 1 3200 Lumens 8hr Stand Available



RECHARGEABLE PORTABLE FLOODLIGHT

Zone 1,2 1400 Lumens 10hr Magnetic or Stand Available

CODE

M1

CODE

ULTRA

CODE

SAFEATEX FLR



2M TRIPOD ULTRA

Accesory



SUBFRAME FOR SITE BRIGHT ULTRA RECHARGEABLE

Accessory



EXPLOSION PROOF TORCH

Zone 1,2 220 Lumens 9Hhr-13hr

CODE

ULTRA

CODE

ULTRA

CODE

EXMP31R







EXPLOSION PROOF RECHARGEABLE HANDLAMP

ZONE 1,2 410 Lumens 14hr-25hr



EXPLOSION PROOF TORCH

Zone 1,2 160 Lumens 12hr-18hr



EXPLOSION PROOF TORCH

Zone 0,1,2 200 Lumens 9hr-14hr

CODE EXHT220 CODE EXMP21R CODE EXMP32N



ATEX RADIO

Intrinsically Safe Land Portables

CODE DT 952



NON-ATEX



RAINBOW1 HEADLAMP

Zone 1 350 Lumens 2hr-8hr

CODE

HL1000100



NEWTON 4 HEADLAMP

Zone 4 600 Lumens 5hr-30hr

CODE

HL 1010300



Zone 2 250 Lumens 3hr-20hr

CODE HL1000200



NEWTON 2 HEADLAMP

Zone 2 400 Lumens 60hr-80hr

CODE HL 1010100



SITE BRIGHT SERIES SPHERE

Non Atex 2600 Lumens Run Time - Always


CODE SITE



TRIPOD STAND GALAXY PRO

Zone 0,1,2 6000 Lumens 2.5hr-13hr

CODE GALAXYPRO

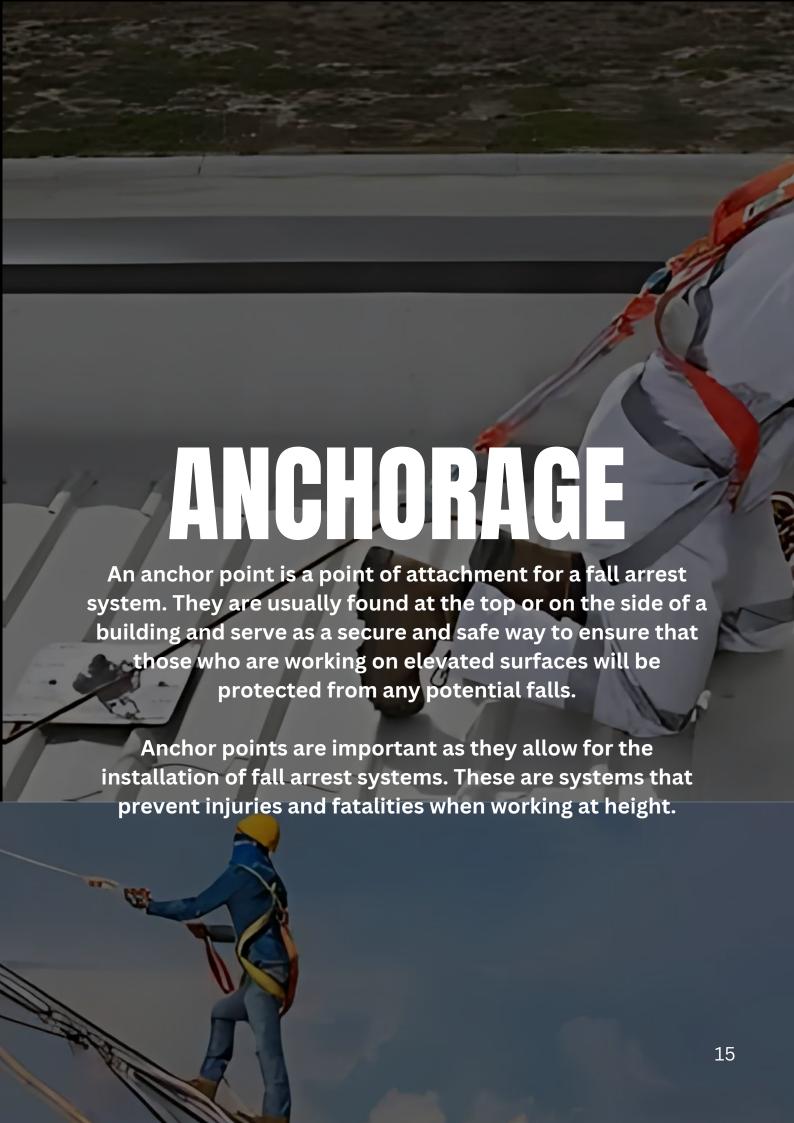





MOBILE ANCHOR

1550mm X 1550mm X 260mm 220Kg 12 Weights



MOBILE ANCHOR

3020mm X 3020mm 374Kg 12 Weights



DEADWEIGHT TROLLEY

1470mm x 610mm x 524mm 208Kg 2 Users

CODE

IM 100

CODE

IM 200

CODE

DW 100



DEADWEIGHT TROLLEY

Galvanized Steel 2420mm x 1766mm x 2486mm 3 Users



CROSSLOOP ANCHOR

Simple, light and easy to install, it is designed to be installed on platforms, bridges, horizontal surfaces made up of pressed steel gratings



HYDRA JAWS

Is for medium duty fixing testers enable engineers to confirm the holding power of anchors in most construction materials

CODE

DW 200

CODE

FA6000400

CODE

HYDRA






WING SINGLE ANCHOR POINT

158mm Thick 1 Person



KITE ANCHOR POINT

140mm Thick 1 Person



GREEN POINT ANCHOR WITH BALLAST

80KG/M2 2 person

CODE

ANCH1

CODE

ANCH2

CODE

ANCH3



GLUE ANCHOR POINT

Equipped with a 360 degree swivel eyelet to facilitate work operations. Designed for installaion on flat roofs.



ANCHOR POINTS FOR SUPPORT

Suitable for installation on concrete and sheet metal structres, also on green roofs and non drillableflat roofs.



BLOCK ANCHOR POINT

Designed for flat roofs with inclines up to 5 degrees with OVC or bituminous final covering.

CODE

ANCH4

CODE

ANCHP

CODE

ANCH5



TEMPORARY ANCHORS





Anchor device AT 250 is a portable anchor point, suitable for use with an I-beam rail. The rail must be fixed to a permanent structure



BEAM ACNHOR TROLLEY

80mm-250mm



VERTIGRAB

Anchor point for vertical & horizontal metal beam

CODE

ST030

CODE

FA600303

CODE

FA6000805



GRAB AND SLIDE ANCHOR

Beam Anchor



CONCRETE ANCHOR

Temporary Concrete Anchor 23kN Breaking Strenght



CONCRETE ANCHOR

Remporary Toggle Anchor 20cm/50cm Available 12kN Breaking Strength

CODE

FA6000800

CODE

FA6001800

CODE

FA6001900





DETACHABLE ANCHOR

Detachable anchorage with chemical fixing



WEBBING SLING

Fall protection equipment Available 0.3M 0.6M, 0.8M, 1.2M, 1.5M & 2M



ANCHORAGE ROUND SLING

Available in 0.8M, 1M, 1.2M & 1.5M

CODE

FA6003800

CODE

AZ910

CODE FA 6000508/10/12/15



WEBBING ANCHORAGE SLING

Available in 0.5M, 1M & 1.5M Heavy duty tubular wear sleeve



ANTI SLIP WEBBING CONNECTOR

Anchor Device with Snaphook. Available in 0.9M, 1.4M, 2M

CODE

IKAB50

CODE

AZ700



net, fastening plates, EPDM gaskets and rivets. Its strength and durability are made excellent by the combination of zinc plating, primer and PVC.







VENT TB 3850

110V Airflow - 3850 m3/h EL EJÓRN (P)

VENT TB 7550

110V 7560 m3/h

AIR MOVER DUCTING

Available in 5m, 7.5m & 10m

CODE TB3850 CODE TB7550 CODE AMD

Atex Air Mover



SA ATEX AIR MOVER

Airflow - 5179 m3/hr



ANTI STATIC DUCTING

Diaeter 10cm, 20cm, 30cm, 40cm Available in 5m & 10m



SA CYCLONE FILTRATION UNIT

Creates clean, breathable air Zone 1&2

CODE SAF35 CODE SAFD1 CODE SAFD2



Breathing apparatus is provided to help you safely evacuate a confined space if the gas monitoring equipment indicates a problem within the atmosphere

It will also help sustain life if you get into difficulties whilst in a confined space, until you can be rescued by the emergency services.





PROPAK SIGMA

The 3M™ Scott™ ProPak Sigma is a Type 2 open-circuit self-contained compressed-air breathing apparatus with an unpadded carrying harness

TYPE2



HOENYWELL AERIS COMFORT TYPE 2 Is a black harness – with Zenith demand valve and Panoramasque. Full-face mask with 5-point head strap without air cylinder



SCOTT VISION 3

Breathing Air Mask

CODE

HONEYWELL ESCAPE SET



ELSA B ESCAPE SET



BREATHING AIR CYLINDERS

Available in 2 litres up to 9 litres with a charging capacity of 300bar

15 Min

CODE

CODE

1815732

CODE

10/15 Min

CODE

ELSA15

1825216

CODE

SCBA

1710650





SCOTT BREATHING AIR TROLLEY

2 Person Load Limit. The Airline trolley used with 2 cylinders and can supply two users at a distance of 50 meters



SCOTT FLITE BANDOLIER

10 or 15-minute compressed air cylinder supply for escape from the most hazardous environments.



BREATHING AIR TROLLEY

12 Hours Breathing Air Time

CODE SCOTTBAT CODE 3M FLITE CODE BATROLLEY









A connector is designed to be weighted along its primary axis, with the ate closed and locked. This is the conectors strongest position. All other positions increase the risk of a break oraccidental opening, and therefore present a danger to the user.

Connectors move around when used, are pulled by the rope, bump up against the rock, and vibrate when you are on the move. Regularly check that the carabiner has not moved into a dangerous position and that the locking system stays closed in spite of vibrations.





AZ011

Detectable Connection 160g 18mm



AZ011T

Twist Lock Karabiner 173g 17mm



AZ014T

Connection with Twist Lock 100g 24mm

CODE

AZ011

CODE

AZ011T

CODE

AZ014T



AZ014DT

Triple Lock Karabiner 105g 24mm



AZ111

Light Twist Lock Karabiner 205g 45mm



AZ022

Scaffold Hook 500g 50mm

CODE

AZ014DT

CODE

AZ111

CODE

AZ022





RGK15

Karabiner with Captive Pin 215g 12mm



RGK2P

Karabiner with Retainer Pin 197g 17mm



FA 50101117T

Screw Locking Karabiner 160g 18mm

CODE RGK15 CODE RGK2P CODE FA50101117T



FA 5030222


Triple Action Locking 80g 21mm



FA 5021460

Rebar Hook with Latch 100g 60mm

CODE FA5030222 CODE FA5021460

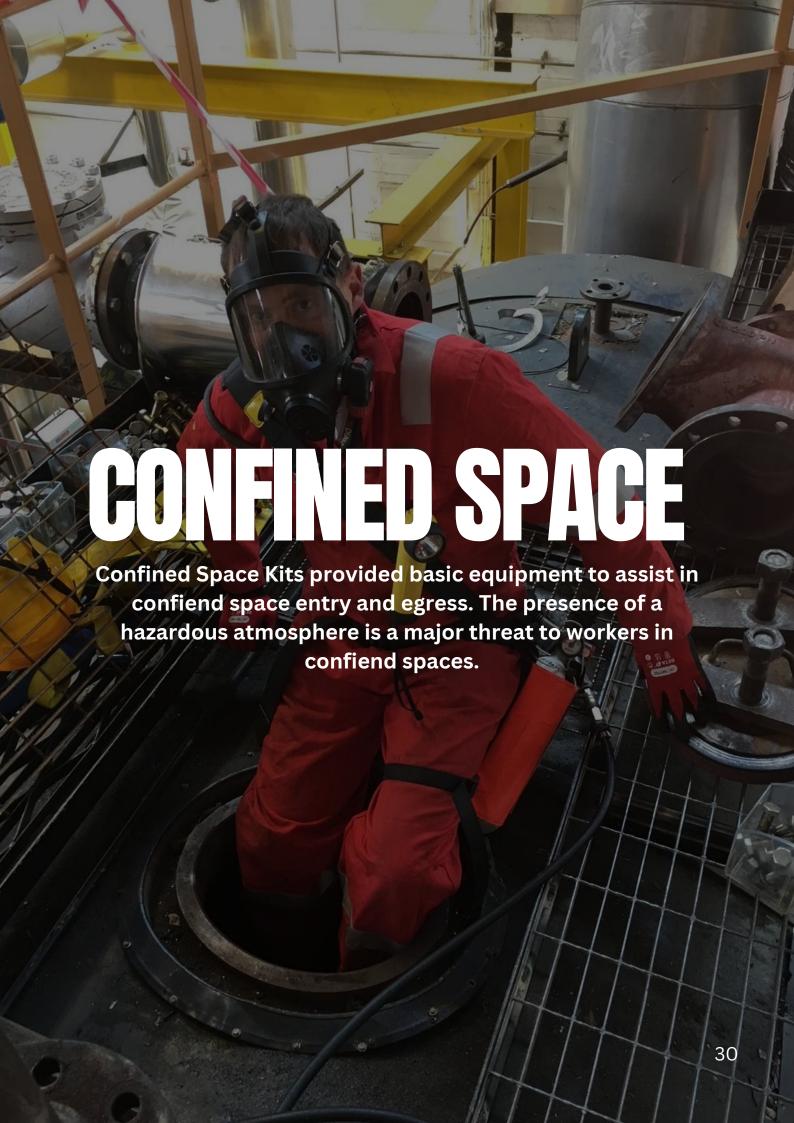



KIT 1



KRATOS TRIPOD

Single Pulley 7ft



KRATOS WINCH

20m Available



P10 R NIZE

Rescue Harness with leg padding

CODE

FA6000100

CODE

FA6000320

CODE

P10RNIZE



BW MICRO CLIP XL

Gas Monitor (H2S,O2,LEL,O2)



HONEYWELL ESCAPE SET

15 Minute

CODE

BWMICRO

CODE

1815732



KIT 2



KRATOS TRIPOD

Double Pulley



KRATOS WINCH

Fall Arrest Block with Integrated Rescue Winch



P10 R NIZE

Rescue Harness with Leg Padding

CODE

FA6000100

CODE

FA2040110

CODE

P10RNIZE



GMI PS200

Gas Monitor (H2S,O2,LEL,O2)



ELSA ESCAPE SET

10/15 Minute

CODE

PS200

CODE

ELSA



KIT 3



GLOBESTOCK TRIPOD

Triple Pulley 9ft



GLOBESTOCK FAB C/W RESCUE

Fall Arrest Block with Integrated Rescue Winch



P10 R NIZE

Rescue Harness with Leg Padding

CODE

GSE230

CODE

GSE414G

CODE

P10RNIZE



WATCHGAS SST4

Gas Monitor (H2S,O2,LEL,O2)



HONEYWELL ESCAPE SET

15 Minute

CODE

SST4

CODE

1815732




CONFINED SPACE UNIT

New Addition to Our Training Fleet!

We are excited to announce the addition of a state-of-the-art vehicle designed specifically for confined space training and working at heights training. This versatile training unit is equipped with the latest technology and safety features, offering a realistic and hands-on experience for participants to enhance their skills and confidence in challenging environments.

Whether you're looking to upskill your team or meet compliance requirements, this new vehicle is the perfect solution to deliver comprehensive, practical training.

Contact us today to book your training session and take advantage of this cutting-edge resource!

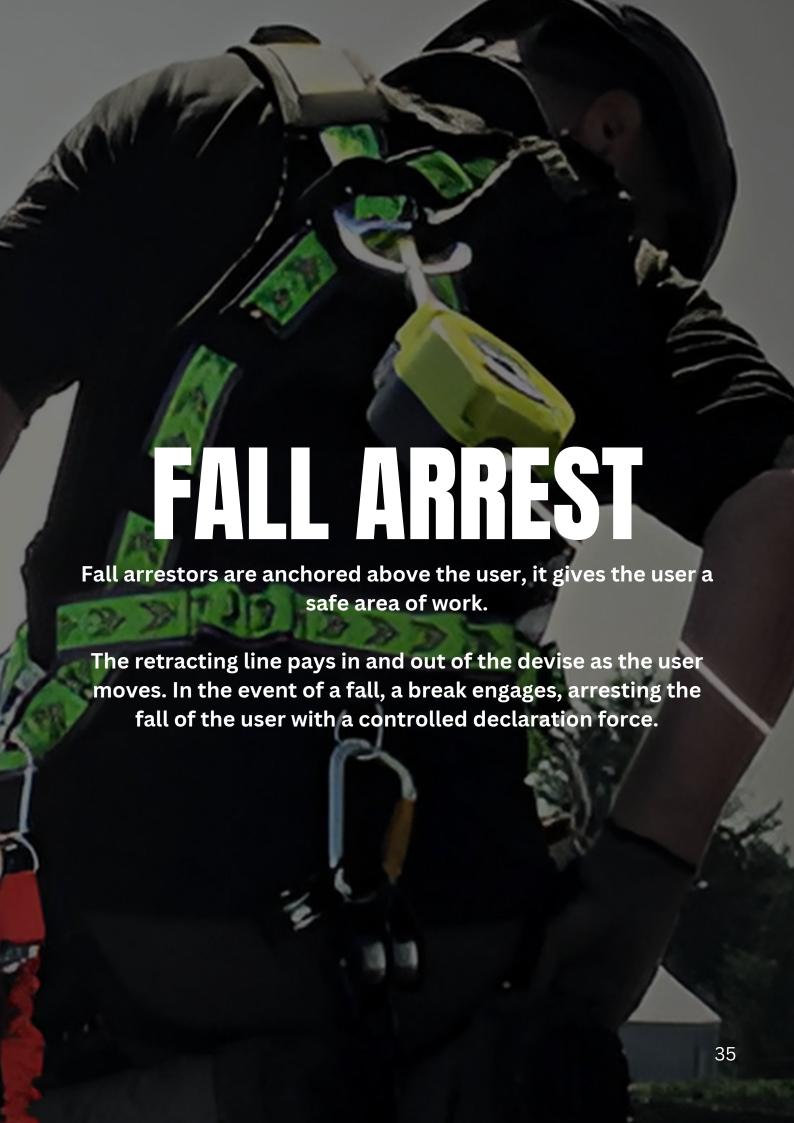









KRATOS TWIN MINI BLOCK

2m

CODE

AR-05HB-2N

2m

CODE

FA2050302

CODE

2m

FA2050002





2m



KRATOS

6m/12m Vertical & Horizontal Use Sharp Edge Protection

KRATOS

10m/15m Vertical Use Sharp Edge Protection

CODE

DWR0402

CODE

FA5020320

CODE

FA5020320

FALL ARRESTER WITH RESCUE



14m & 34m Available Integrated Rescue Winch

CODE

GSE414/34G





KRATOS

10m/20m/30m Integrated Rescue Winch



HONOR DESCENDER

15m/33m Integrated Rescue Winch



Sizes available 9/18/30m Integrated Rescue Winch

CODE

FA 2040110

CODE

FPED15/33

CODE

HAS9/18/30



Confined space gas detectors are designed to ensure occupational health and safety compliance and to protect personnel from exposure to harmful fues, gases, vapours or lack of oxygen.

A personal multi gas monitor can also be used to track the concentration of combustible gases amd alert users if concentrations approach the Lower Explosive Limit (LEL). Therefore, mititgating the risk of potentially fatal ignition





13% bigger screen



5dB louder audible alarm



29 grams lighter



48% longer battery run time





wider sensor ranges




improved robustness



simpler connectivity



faster T90 response time

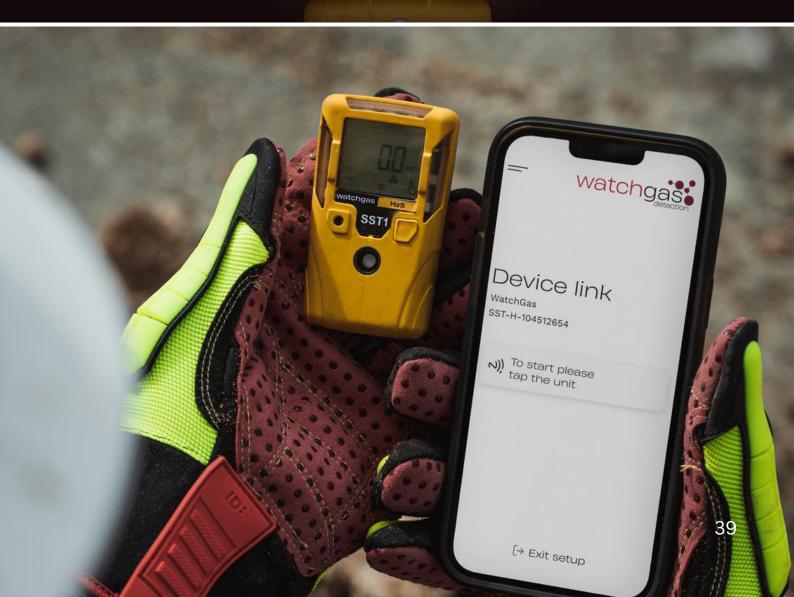



4 GAS MONITOR



WATCHGAS SST4

(LEL, H2S, O2, CO) Pumped Option Available IR Version Available Online Tracking



GMI PS200

(LEL, H2S, O2, CO)



BW MICRO CLIP XL

(LEL, H2S, O2, CO)

CODE SST4 CODE PS200 CODE BWXL



WATCHGAS QGM

(LEL, H2S, O2, CO)



SOFT AND GRAINY SERUM №2

(LEL, H2S, O2, CO)



BW MAXXT

(LEL, H2S, O2, CO)

CODE QGM CODE POLI CODE MAXXT





BW QUATTRO

(LEL, H2S, O2, CO)

CODE

QUATTRO

SINGLE GASES



WATCHGAS SST1

2 Yr Disposable Various Single Gases Available



WATCHGAS PDM

Various Single Gases Available



TOXIRAE PRO PID

VOC Monitor

CODE SST1 CODE PDM CODE RAEPRO







H2S/CO2 Avaialble



WATCHGAS UNI

Various Single Gases Available



WATCHGAS PDM +

Various Single Gases Available

CODE SOLO CODE UNI CODE PDM+



PDM PRO CO2

CO2



GMI PS500

(O2, H2S, LEL, CO, NH3) 5 Gas

CODE PDMPRO CODE PS500



Harnesses are used in almost all types of confined space work because safety teams are required to have a method of removing an injured woker in the event of an accident.

Harnesses can also be utilized as fall protection device.
Wearing the harness, comprised of a system of straps and restraints, the risk of injury caused by potential fall is reduced





PROTEKT SAFETY HARNESS

Manual Buckles 2 Front + Rear



KRATOS FULL BODY HARNESS

Adjustable Shoulder + Thigh Straps 2 Front + Rear



PROTEKT RESCUE HARNESS

Click Buckles 2 Chest + Rear

CODE

P11

CODE

FA1010500

CODE

P10 R NIZE



KRATOS RESCUE HARNESS

Click Buckles 2 W/ Rescue Extension Loop



ARESTA

2pt Harness Standard Buckles



ARESTA

3pt Harness Eeze Klick Buckles

CODE

FA1010600

CODE

AR-01024S

CODE

AR-01025



ARESTA MEWP

AR-01024S+Lanyard



MEWP KIT

FA1010200 Harness 1.5m Lanyard



SCAFFOLD KIT

Body harness FA 1010200 Kernmantle rope lanyard length 1.50 m FA 40 500 15

CODE

AK-MO1B-15A

CODE

FA8000100

CODE

FA8000200



ARESTA

Comfort Plus Harness Eeze Klick Buckles



PROTEKT SAFETY HARNESS

Automatic Buckles 1 Rear



PROEKT WORK POSITIONING HARNESS

Automatic Buckles 3 Front + Rear + Front (Rail)

CODE

AR-01130

CODE

P500

CODE

P600





KRATOS RESCUE HARNESS

Combination Buckles 3 Shoulder + Rear



PROTEKT SUSPENSION + WORK POSITIONING HARNESS

Automatic Buckles 2 Chest + Rear



SKYLOTECION

Click Buckles 2 Front + Rear

CODE

FA1011400A

CODE

P70 MX

CODE

G1130



SKYLOTEC TRION

Click Buckles 4 Allow Individual Adjustments



SKYLOTEC IGNITE

Click Buckles 4 Dorsal + Sternal + Pole + Frontal



HARNESS BACKPACK

2 in 1 harness and backpack

CODE

G1131

CODE

G1161

CODE

FA1030501






KRATOS BACKPACK

Automatic Buckles 2 Chest

CODE

FA 9011500



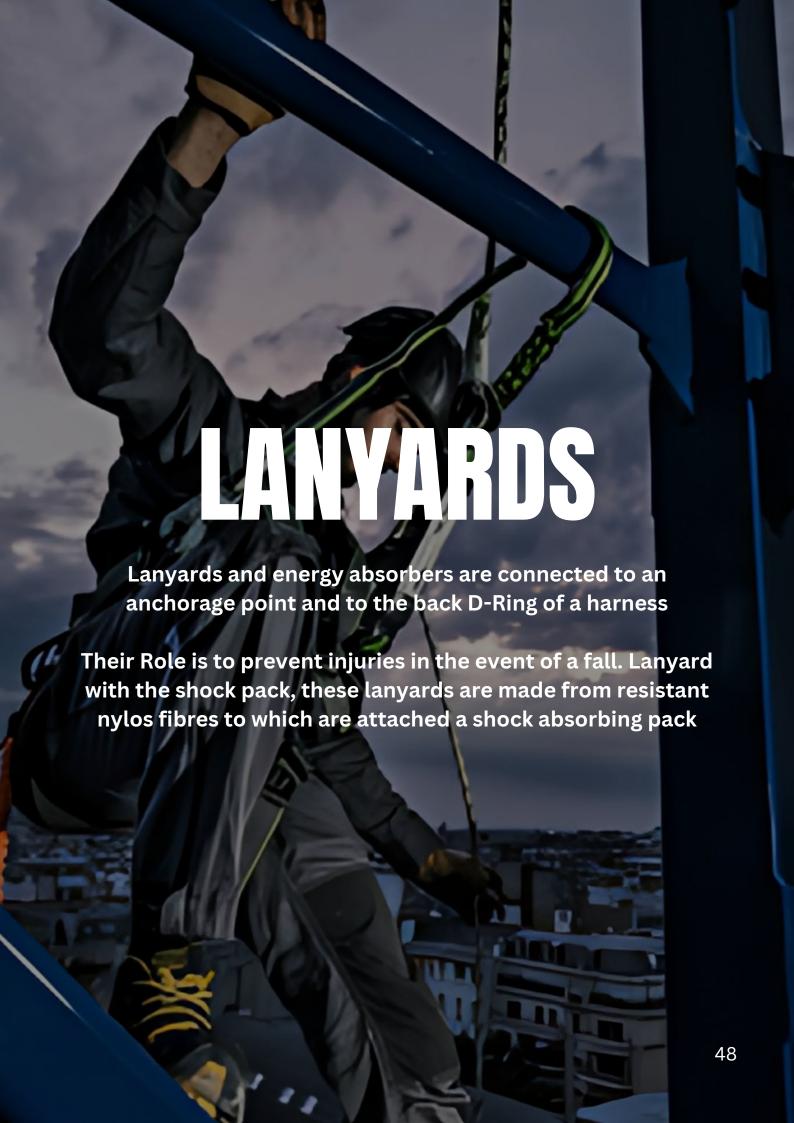



FALL ARREST



KRATOS ENERGY ABSORBING WEBBING LANYARD

Polyester Webbing 1.8-2m 1 x 50mm Scaffhook + 1 18mm Karabiner



KRATOS FIRE RETARDENT

Webbing 2m 1 x 50mm Scaffhook + 1 18mm Karabiner



KRATOS ANTISTATIC ENERGY ABSORBING

Polyester Webbing 2m 1 x 60mm Scaffhook + 1 22mm Karabiner

CODE FA3030418 CODE FA3030520 CODE FA3030620



ARESTA

1.8m Scaffhook Elasticated



SKYLOTEC PRO TIE BACK

Polyester Webbing Rescue Loop 1.8m 1 x 22mm Scaffhook + 1 x 22mm Karabiner



PROTEKT ROPE LANYARD

Kermantle 2m 1 x 50mm Scaffhook + 1 18mm Karabiner

CODE AR-03908/18 CODE L0574 CODE LB101





ARESTA TWIN LANYARD

Elasticated Webbing Lanyard 2 Scaffold Hooks, a Carabiner and Shock Absorber, 1.5m



KRATOS FORKED ENERGY ABSORBING LANYARD

Polyester Webbing 1.8m 2 x 50mm Scaffhook + 1 x 18mm Karabiner



SKYLOTEC TWIN ROPE

Polyamide Rescue Loop 12mm 1 x 60mm Scaffhook + 2 x 29mm Karabiner

CODE AR-03701/15 CODE FA3040018 CODE L013



PROTEKT TWIN ROPE

Kernmantle 2m 2 x 50mm Scaffhook + 1 x 18mm Karabiner

CODE LB102



SKYLOTEC PROFLEX Y TWIN

Polyester/Aluminium Rescue Loop 1.8m 2 x 60mm Scaffhook + 1 22mm Karabiner

CODE L055



WORK POSITION/RESTRAINT



KRATOS LANYARD

Work Positioning Webbing Lanyard & ring adjuster

CODE

FA4090120



ARESTA

1m & 2m Scaffhook Work Position

CODE

AR-02076-10/20



PROTEKT LANYARD

Kernmantle 2m Karabiners?

CODE

AF500



SKYLOTEC ERGO GRIP

Rope Polyamide 2m 1x20mm Karabiner

CODE SK20



SKYLOTEC ERGO GRIP

Rope Polyamide 1.8m 1x50mm Scaffhook

CODE SK18



KRATOS WORK POSITIONING W/ GRIP ADJUSTER

Polyamide Webbing 2m 1 x 22mm Snaphook + 1 x 18mm Karabiner

CODE

FA4090320



LIFELINES

Horizontal



CODE

FA6000700

COULD'S LINE SHOW THE SHOW THE

CODE

FA6003318

Adjustable length from 5m - 20m Secures an operator throughout his travels

Horizontal Lifeline in 30mm polyester webbing

Forked ends in order to:

- Either anchor to a structure without the need to add anchorage sling
- Hand directly on adapted anchorage point

Retractable wire rope horizontal lifeline, max. length 18 m, extremely easy to install, lightweight, ready to use.


- Quick dismantling and re-installation on a new site thanks to the inbuilt winch.
- Durable and high strength polymer casings, with carrying handle having a tension indicator.
- Inbuilt shock absorption mechanism to limit the impact forces during fall arrest.
- The cable has a swivel snap hook in order to avoid the twisting of the rope.
- Can be simultaneously used by 1 or 2 people.





- Length of the rope: 10 metres
- Breaking strength: > 15 kN
- Works on 12 mm Diameter Polyester Kermantle Rope Anchorage Line



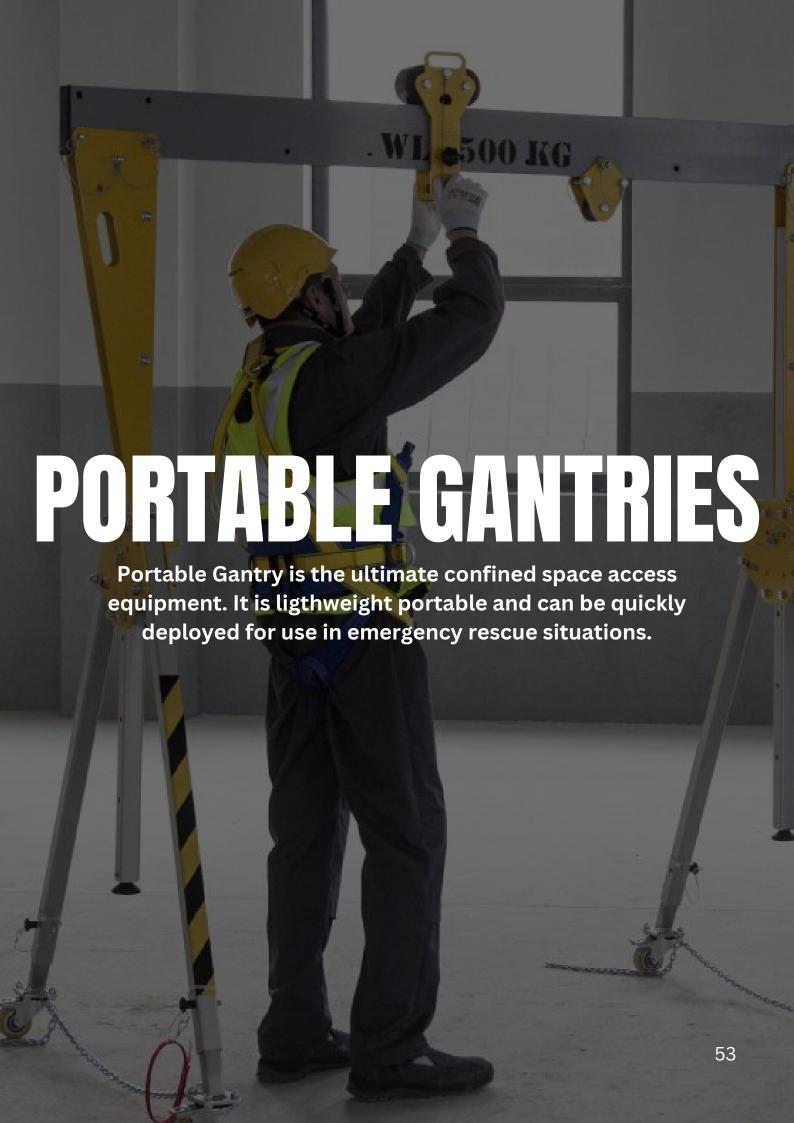



KSB SERIES



Aluminium Gantry Crane "KSB Series" is a complete, lightweight, fully customizable, portable device designed for lifting loads up to the related working load limit (WLL).


These Gantries is ideal for lifting applications such as confined spaces, silos, rooftops, lift-shafts, water treatment works and clean environments

SWL KSB: 500kg

Total weight of Gantry KSB: 58kg

Beam Length: 2m/3m

Trolley Included

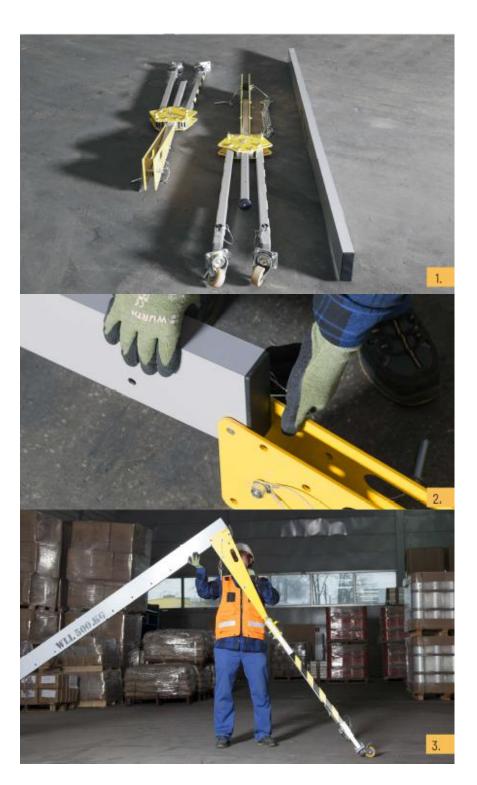

LSB SERIES



Aluminium gantry crane "LSB series" is a complete, lightweight, fully customizable (modular design), portable and flexible device designed to be used in variety of lifting applications such as, drainage wells, reservoirs, wells, silos, rooftop, lift-shaft, waste water and many more.

For faster device installation additional tools are not needed (device installation.

Beam LSB: from 2 to 7 meters.

Trolley Available

LSB Working Load Limit (WLL): from 500kg up to 2000kg (depends on configuration - please see LSB Technical Data Table).



Davit Arm Systems for Confined Space Applications. They are commonly used to raise, lower, and suspend personnel performing routine work duties or to facilitate rescues in vertical confined space applications such as vaults, manholes and pump stations.

A manual or mechanical winch to the davit arm system, personnel can be lowered into the confined space or extracted with relative ease.



COUNTERWEIGHT SYSTEM



A counterweight system is built for when you need to move and access various confined space entry points in the same area.



1200mm

Consisting of a central base unit with a number of options for anchoring, positioning, leg adjustment and extension, this is a system designed for versatility.

We also have the static counterweight trolley available.



H BASE DAVIT SYTEM



A free-standing system is perfect when you need to moe the davit and access different confiend space entry points in the same area.

The portable wheeled lower base allows for adjustment to accommodate the width and lenghts of most standard confined spaces, offering a versatile confined space access solution.

The extendable legs allow for access to wider entries and increase stability.





POLE HOIST SYSTEM



Pole Hoist System is a vertical confined space entry and retrival fall arrest system. A versatile pole hoist for confined space access





HITCH MOUNT SYSTEM



Hitch Mount System

Hitch mount davit system provides a portable confined space access system with a hitch mount attachment for vehicles, plus other anchor points.

Ideal for use in a sandwich plate anchor and using a "C" clamp for concrete of steel mezzanine floor anchors.




Hitch Mount C Clamp 610mm



Hitch mount "J" is a system commonly used for rescue in confined spaces

Hitch Mount J Clamp 610mm

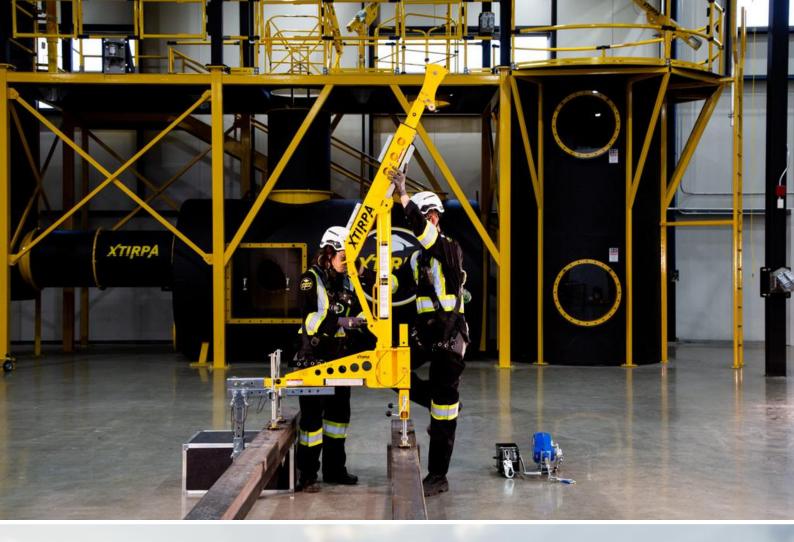





GUARD RAIL




Guard rail systems are used when an exposed entry point needs to be guarded

This portable system has an integrated mast which is used in conjunction with a davit arm to provide fall protection, entry and retrieval capabilities.

The manhole guard system facilitates access to underground chambers or any other type of confined space where an entry point should be protected

Davit arm is equipped with (2268 kg) anchor point

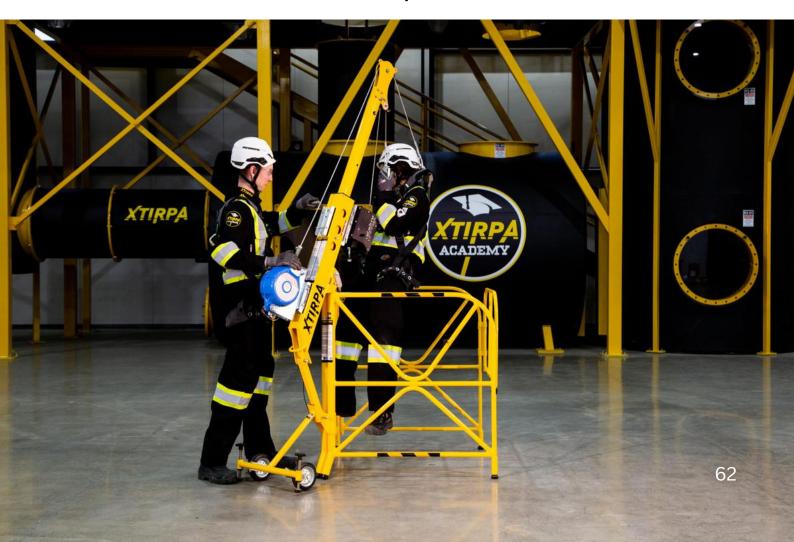



MANHOLE COLLAR SYSTEM





This system also offers a good solution in situations where there is little space around the manhole. Since the system is mounted on the manhole, very little space is required around the manhole.

In addition to the standard system, a Davit arm with a limited height is also available for situations with limited space above the manhole



DAVIT ARMS



The Xtirpa 610mm fixed Davit system is used in conjunction with mast IN-2003 and appropriate socket base or manhole guard. Quick and easy 3 pin assembly.

Davit Arm 1200mm is ideal for work areas that require regular set-up and tear-down and where a base can be permanently affixed to an existing structure





Davit Arm 2400mm is ensuring easy and safe access into a wide variety of confined spaces. This davits versatility offers a solution where other conventional systems are impractical.




DAVIT BASES



IN 2105 76mm Centre Floor Base



IN 2005 76mm Floor Base



IN 2137 76mm Centre Floor Base



IN 2129 76mm Wall Base



IN 2315 51-127mm Barrel Base (Zinc Plated)



IN 2021 51-127mm Barrel Base (304 SS)



IN 2482 51-267mm Shoring Box



IN 2008/2168/2075/2125 Adjustable Wall Bases 105-1143mm



GENESI



device consisting of an extendable arm with a reach of about 600 mm and SC6-PNW support mast, the system is designed to ensure safe vertical access in confined spaces and with limited access and exit

Genesi SC6NW is a mobile anchor

Genesi SC6NW

 Genesi SC12NW is a mobile anchor device consisting of an extendable arm with a reach of over 1200 mm and SC12-PNW support pole, the system is designed to make vertical access safe in confined spaces and with limited access and exit



Genesi SC12NW



 Genesi SC6F is a mobile anchor device consisting of a fixed arm with a reach of over 600 mm and an integrated pole



 Genesi SC3 is a compact mobile anchor device, consisting of a fixed arm with a reach of about 300 mm and an integrated mast, particularly suitable for making safe vertical access in confined spaces that have limited space outside



Genesi SC3




 The system has been designed for great flexibility and, depending on the geometry of the access, can be configured or installed to allow for optimum stability to ensure safe access within the confined space or environment with restricted access.
 The Genesi SCTY system can be set in three different configurations without the need to use specific tools

 BUMP73 is the patented solution that can be used for both wall and floor installation, is made from a single aluminum body to ensure exceptional mechanical and chemical resistance. This base is ideal for all Genesi SC systems. Its light weight and robustness facilitate installation in any context while ensuring a high level of safety and durability.



BUMP



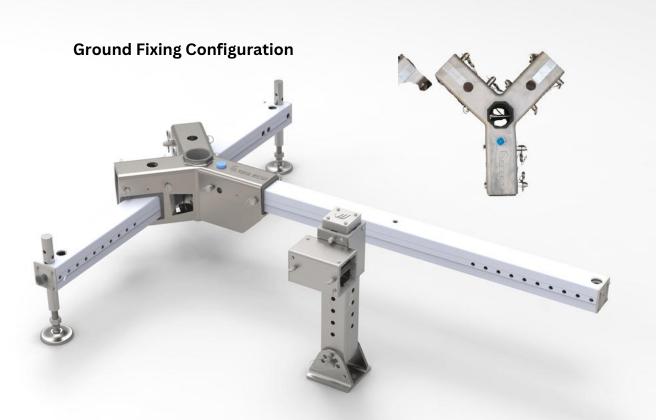





Self-Supporting Configuration

Mounting the elements in a self-supporting configuration allows you to obtain a stable and safe support for installing one of the mobile devices provided and fixing the elements with security PINs



Ground Fixing Configuration

The assembly of the elements in a T configuration with fixing to the ground allows, using the GNSSC-FIXM16 accessory, to fasten the system to the ground via an M16 fixing, the rear extension fixed to the structure by means of an M16 fixing. To mount in this configuration you need an adjustable ground fixing GNSSC-FIXM16



Configuration with Tow Hook Fixing

Mounting the elements in a T configuration with tow hook fixing allows, using the GNSSC-FIXVAN accessory, to attach the system to the tow hook of a suitable vehicle



FREE FALCON





State-of-the-art overhead anchorage system, designed to provide optimum protection and maximum mobility for workers at a height.

Overhead anchorage and ballbearing systems allows for 360° movement for efficient working.

The FreeFalcon V21-1 is easily movable allowing for seamless transitions between work spaces and maximum productivity.




Weight: 450.00 kg

Anchor point height in the default state:
235.00 cm

Anchor point height in safety position: 115.00 cm

Lowest base diameter: 208.00 cm

Largest base diameter: 225.00 cm

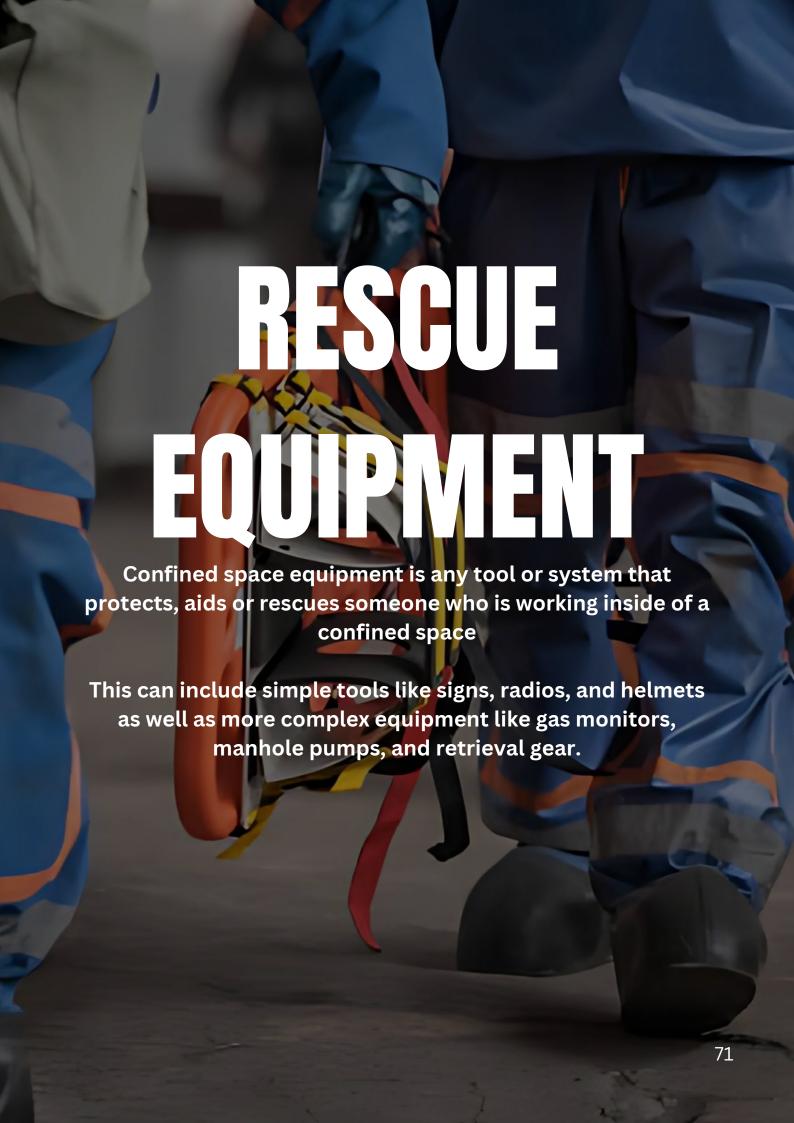







20m-40m



SKYLOTEC MILANO

2 Persons 280 Kg Max Working Load



ABS PLASTIC STRECTHER

2 Slings 2 Piece

CODE

FA 7020120

CODE

A-029

CODE

SKUFA24754



FLEXIBLE SKED RESCUE STRECTHER

2435mm x 920mm



BASKET STRETCHER 2.1M ALLOY

2125mm x 585mm Slings on request



FOLDING RESCUE STRECTHER

1925mm x 393mm

CODE

DX020


CODE

DX030

CODE

DX040



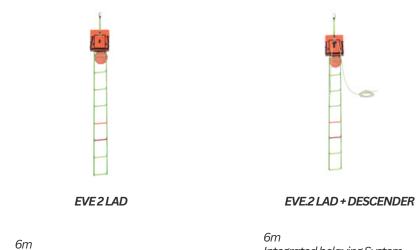

Integrated belaying System

CODE FA7002906 CODE FA7002906R





Hazardous conditions can include oxygen deficiency and atmospheric concentrations which make a confined space and immediately dangerous to life and health. This makes proper respiratory protection critical to helping keep workers protected in these environments



HALF / FULL / DISPOSABLE FACE MASKS







3M FULL FACE MASK



DISPOSABLE MASK

CODE 3MHALF

CODE

3MFULL

CODE

FFP2



DISPOSBALE MASK

CODE

FFP3





HALF / FULL / DISPOSABLE FACE MASKS



SUNDSTROM HALF FACE MASK



SUNDSTROM FULL FACE MASK



SUNDSTROM FACE SHEILD

SR580

CODE

CODE SR100 CODE SR200

BREATHING AIR MASK



SCOTT PHANTOM



SCOTT PROFLOW



SUNDSTROM POWER UNIT

CODE PHANTOM CODE RFF400 CODE SR500



FILTERS







GAS AND VAPOUR COMBINATION FILTERS

PARTICULATE FILTER

PARTICUALTE FILTER

CODE ABEK1 CODE P1/2/3 CODE P2/3R







SUNDSTROM ABEK1 FILTER

SUNDSTROM P3 FILTER

SUNDSTROM PRE FILTERS

CODE 1022421 CODE 4300228 CODE 1021504

S WISS AIR



Safety never felt so comfortable









Ventilated half mask made of flameretardant material covers mouth and nose area completely. Positive pressure supports breathing and avoids fatigue.

Infinitely adjustable headband for all sizes from XS to XL.

Y-hose with adjustable neck strap and flexible hose elements guides the air directly into the half mask.

Shoulder harness for ergonomically perfect weight distribution of the super-light filter system (only 550 g).

Powerful TH3 filter unit with innovative, ultra-flat design. Lightweight and comfortable to carry, highly efficient in use.

Blower unit with automatic air flow calibration and Power battery for an uninterrupted working day.



Face Fit Testing



Face Fit testing is a method of ensuring that a facepiece or mask is tight-fitting and seals adequately to the wearer's face. The performance of tight-fitting facepieces depends on achieving continuous contact between the wearer's skin and the seal of the mask

Before The Face Fit Testing Commences


- 1. Are clean-Shaven for the Face Fit test this includes any hair growth between the skin and the mask seal
- 2. Don't smoke or vape, eat, chew gum or drink anything (other than water) for the 30 minutes prior to the test
 - 3. Bring the facepiece, including any filters if used.

 Trade Safety can supply a mask if not

The Face Fit Test

The test will consist of 7 different exercises, that are simple but will test the mask to make sure there are no leaks present. The test will take 20 minutes in total



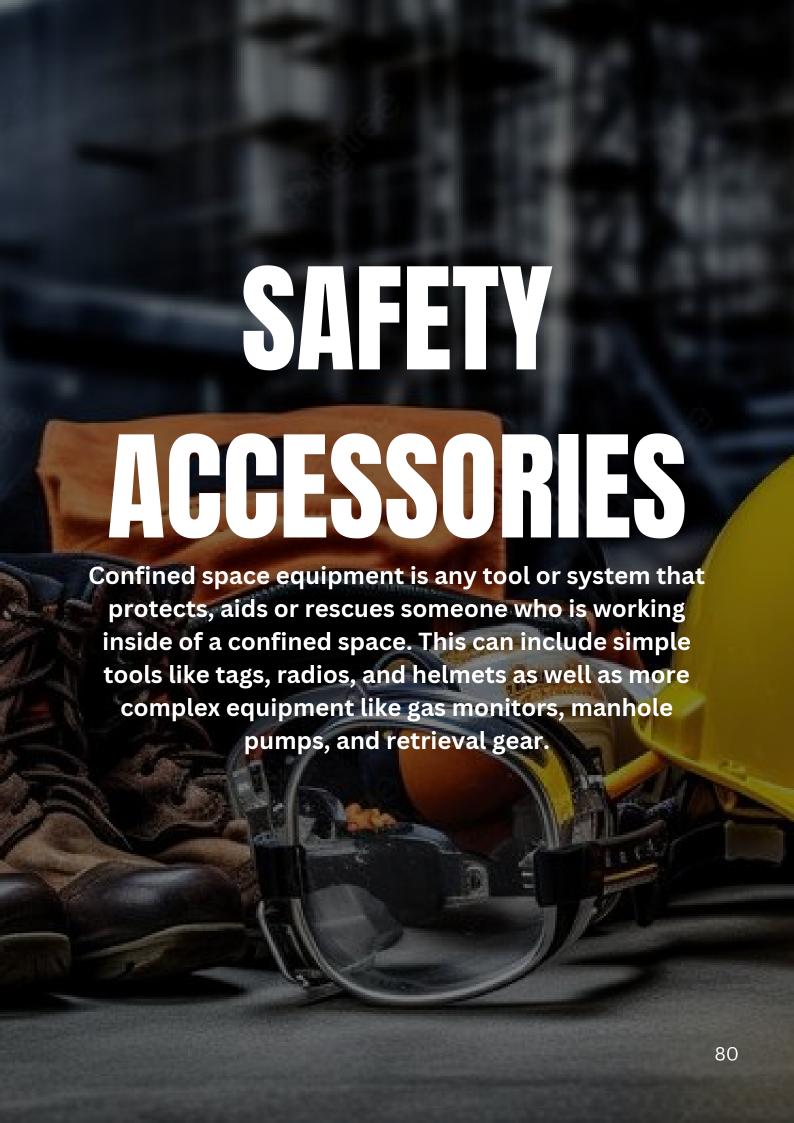









PROTEKT HELMET

FOX SAFETY HELMET

ROTHOBLAAS PROTECTOR HELMET

CODE ATRA40V CODE HP1020000 CODE PRO







BARRIER

LIFEJACKETS

EXTENDABLE BARRIERS

Available in Red

CODE 150/165N CODE BAR1 CODE BAR2





FIRE EXTINGUISHERS



TAG KIT

20 Holders 20 Inserts 40 Cable Ties 2 Mark Pen



TAG

Different Colours Available Option for Logo Design

CODE

FIREEXT

CODE

TAGKIT1

CODE

TAG1





TAG

Different Colours Available Option for Logo Design





TAG

Different Colours Available Option for Logo Design



RETRACTABLE TOOL LANYARD

120mm

CODE

TAG2

CODE

TAG3

CODE

TS9000108









STRETCH LANYARD

WRISTBAND LANYARD

CODE

TS9000106

CODE

TS9000103

CODE

TS9000114





EYE PROTECTION

MANHOLE GUARDIAN

CODE


EYE1

CODE

GUARDIAN

MANHOLE GUARDIAN

Protects open manholes, whilst still allowing full access for the workforce Designed & Manufactured in the UK




Protects, whilst allowing access to the manhole



Compact & light weight for easy transportation

Adjustable positioning posts to secure Manhole GuardianTM into place



Suitable for Square, Rectangle & Round manholes



"QUICK & EASY TO INSTALL & **REMOVE**

FITS SQUARE, RECTANGULAR & **CIRCULAR MANHOLES TESTED & APROVED BY CERTEX**

"UK LTD TO 440kg (PC99) **CLOSES FOR EASY TRANSPORT**


COST EFFECTIVE PROTECTION FOR OPEN MANHOLES

MANUFACTURED FROM **GALVANISED & POWDER COATED**

STEEL FOR FULL WEATHER **PROTECTION FULLY ADJUSTABLE, FITS** MANHOLES FROM

370 TO 900 mm

PROTECTS THE PUBLIC & YOUR WORKFORCE





84

Tested and certified to 440kg



The Skyhook is a mobile fall arrest system that provides overhead anchor points anwhere, any time


The Skyhook offers three overhead anchor points and adding an extendable mast that provides one worker overhead tieoff up to 10.4m in height. Both support a maximum anchor capacity of 140kg






X1000

Max. Working Height	6.7m
Min. Working Height	5.2m
Max. Folded Height	2.4m
Frame Width	1.8m
Overall Length	2.9m
Total Weight	998kg
Max. Anchor Point	141kg
Max. Allowable Users	2

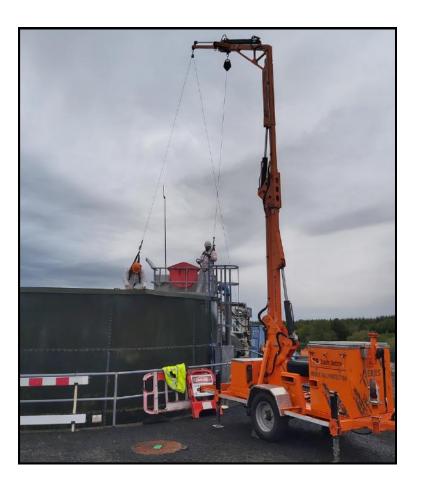

X1250

Max. Working Height	10m
Min. Working Height	0.6m
Max. Folded Height	2.6m
Frame Width	1.7m
Overall Length	4.7m
Total Weight	2676kg
Max. Anchor Point	141kg
Max. Allowable Users	3

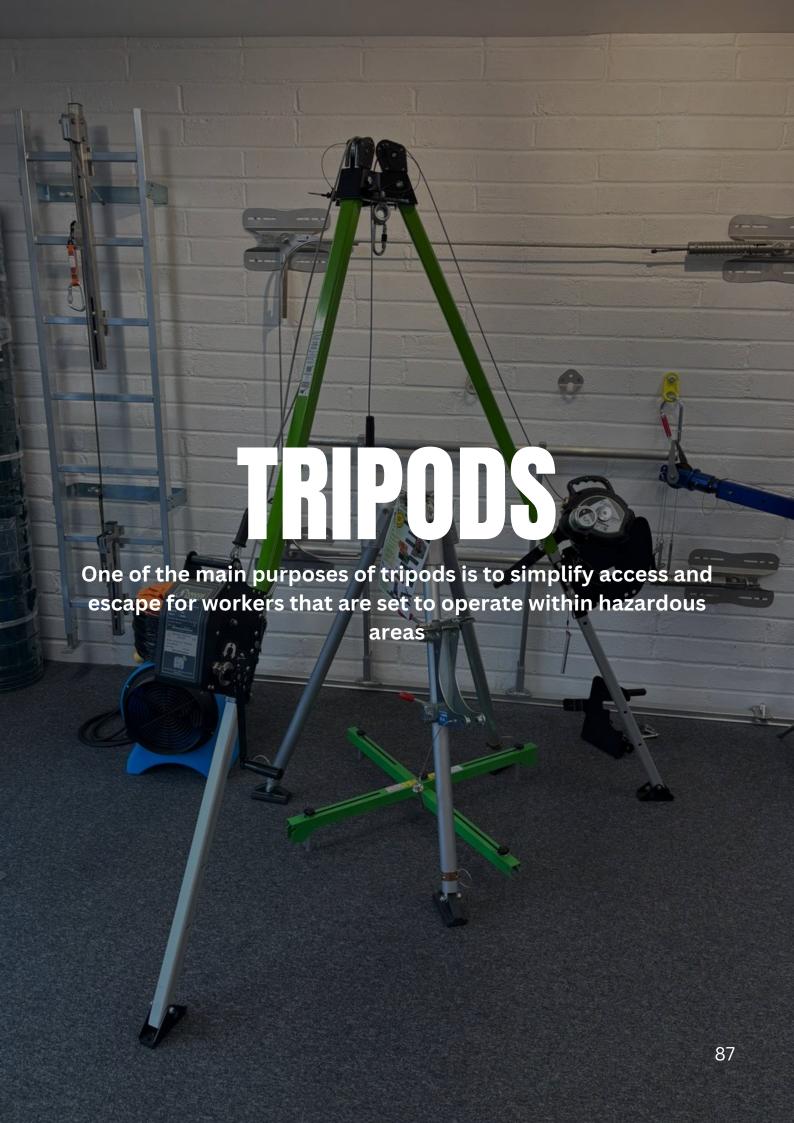





GLOBESTOCK TRIPOD

3 Pulleys Compact unit also available 136Kg Max Working Load



KRATOS TRIPOD

Single Pulley and Double Pulley available. 7ft,



HONOR TRIPOD

1700cm - 2800cm 2 Person

CODE

GSE230S+C

CODE

FA6000100

CODE

HONORT



IKAR ALUMINIUM TRIPOD

144cm - 242cm 2 Person



TM15 TRIPOD

313cm 3 Person



PROTEKT LIFTING GOOD TRIPOD

147cm - 229cm 1000kg MWL

CODE

DBA2

CODE

TM15

CODE

TM7-T





PROTEKT SPIDER TRIPOD

189cm - 221cm 2 Person



PROTEKT HEXAPOD

139cm - 221cm 2 Person



G TRIPOD BAG

CODE

TM12

CODE

TM12-2

CODE

GSETB230



TRIPOD BAG



HOLD ALL BAG

CODE

BAG1

CODE

BAG2



Winches all for safe, easy entry and escape, and they can be used to prevent falling from height. Winches are manually operated and come in various lenghts





GLOBESTOCK G WINCH

Available in 20m/40m Galvanized and Stainless Steel.



KRATOS RESCUE WINCH

Safe Working Load - 135kg 20m Available



KRATOS PERSONEL WINCH

Personel Lifting Winch 20m Available

CODE GWINCH CODE FA6000320 CODE FA6002320



HONOR PERSONNEL WINCH


15m Available




SALA WINCH

18m/26 Available

CODE MRW CODE 8518560

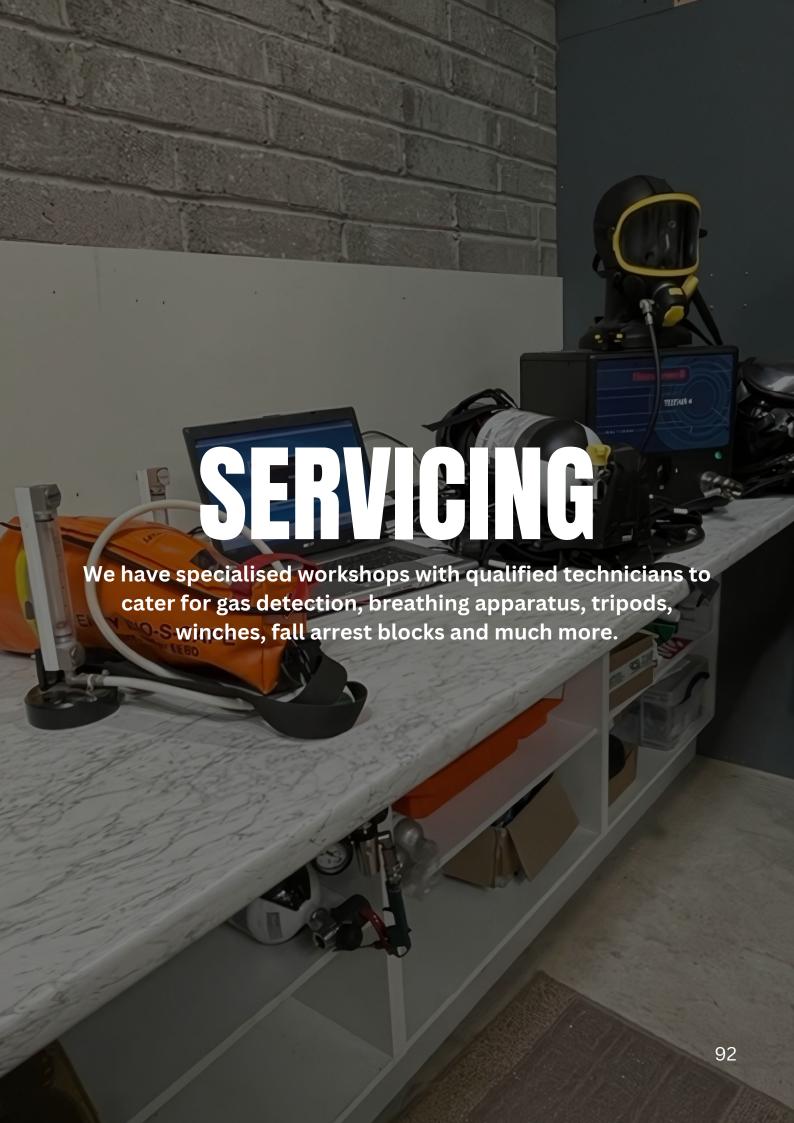



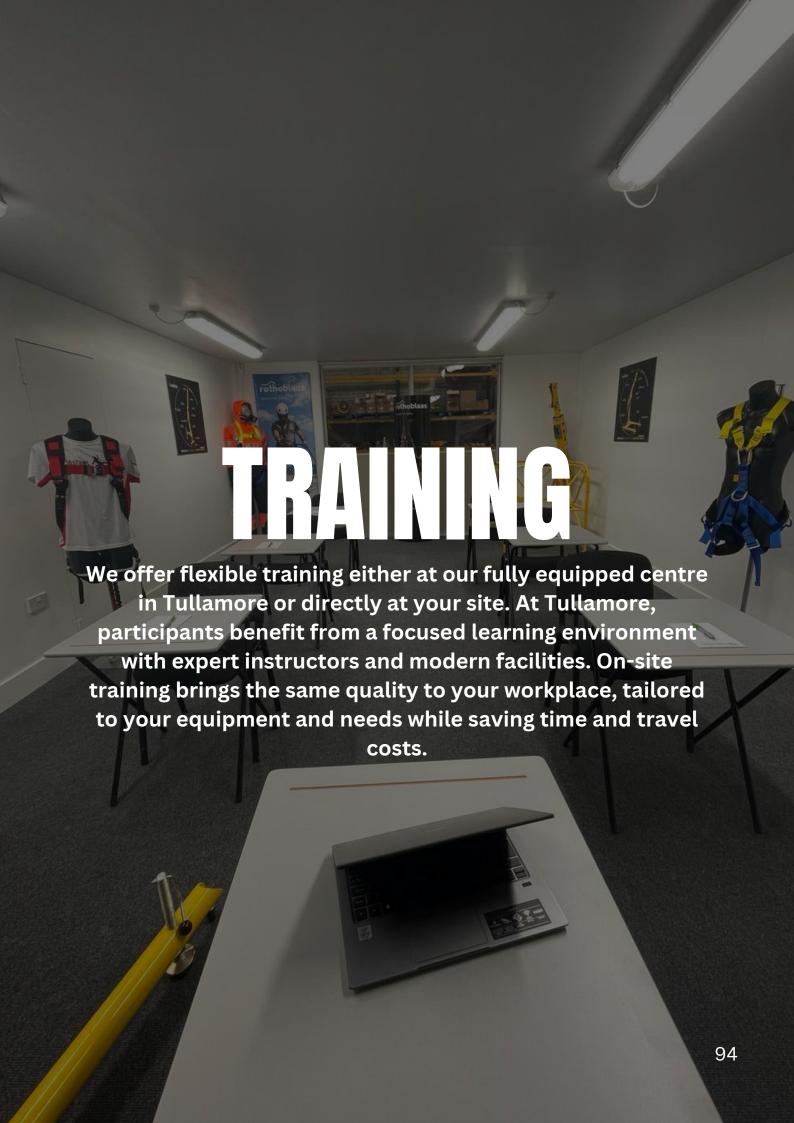





CONFINED SPACE MEDIUM & HIGHT RISK



MANUAL HANDLING



FIRST AID



ABRASIVE WHEELS



WORKING AT HEIGHTS



MEWP



FIRE WARDEN



FIRE EXTINGUISHER




FORKLIFT



EHS



ASBESTOS AWARENESS

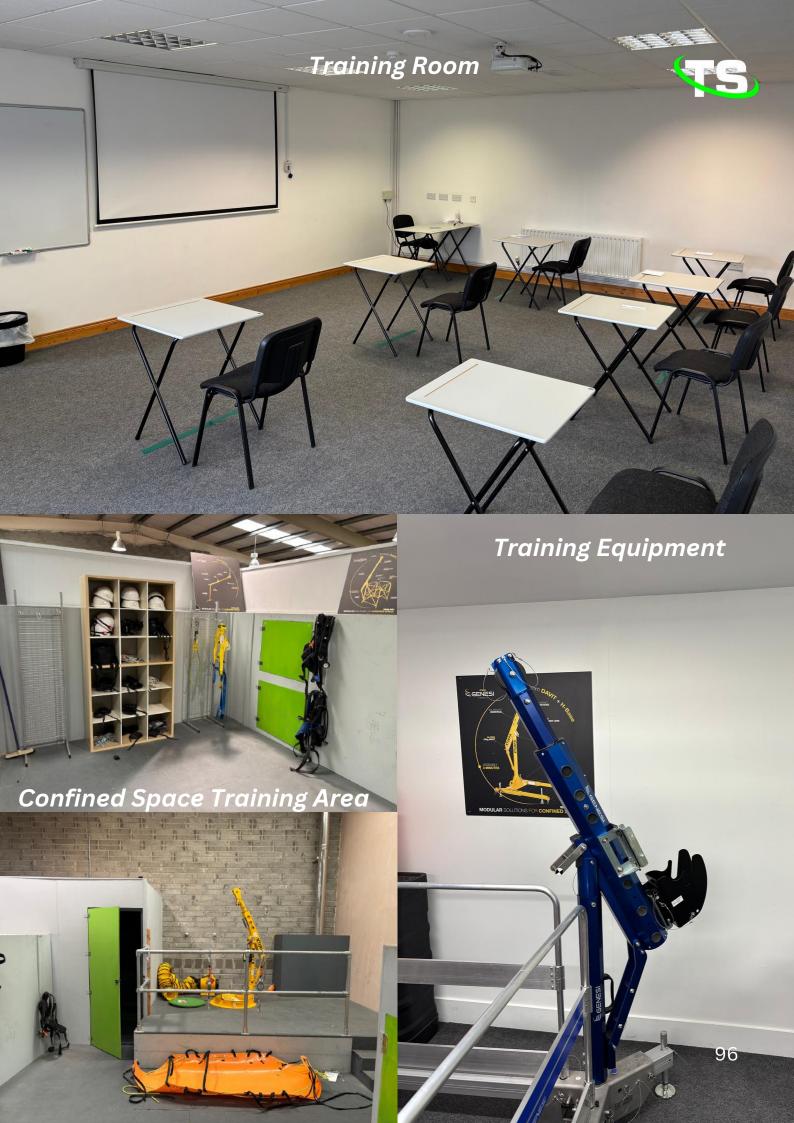

CONSULTANCY

Acting as Health and Safety Coordinater Design &
Construction
Safety Statements
Method Statement
Preliminary Health & Safety Plan
Health & Safety Plan for Construction Stage
Development of a Safety Management Systems
Provision of Site Safety Officers
Provision of Confined Space Rescue Team
Carry out Noise Assessments, Risk Assessments & Safety
Audits
Carry out Ergonomics, VDU & DSE Assessments

For further information, please contact info@tradesafety.ie

Carry out Noise & Dust Monitoring



Unit 4, Sragh Business Park, Sragh Avenue, Tullamore, Co. Offaly R35 X2N5 www.tradesafety.ie +353 57 933 0782 Unit 9, The Foundry, Sanda Road, Belfast, BT37 9UB, www.tradesafetyni.com +44 289 5757 981