

Erosion-Corrosion Resistant Coating for Efficiency Enhancement



Belzona 1341 (Supermetalglide) is a two-component coating system designed to improve the efficiency of fluid handling equipment and to protect metals from the effects of erosion-corrosion.

This high performance coating is proven to reduce energy consumption, provide excellent chemical resistance and lower maintenance costs. Through its hydrophobic properties, Belzona 1341 can provide efficiency increases on new and refurbished equipment.



TECHNICAL DATA	Mixing ratio (base:solidifier)	1 : 1 by volume	10 : 7 by weight
	Working life	40 minutes at 25°C (77°F)	
	Shelf life	5 years	
	Dry heat resistance	130°C (266°F)	
	Adhesion (tensile shear)	Mild steel: 26.2 MPa (3,800 psi)	
	Compressive strength	57.2 MPa (8,300 psi) at 20°C (68°F) cure	
	Coverage rate	1.76 m² (18.9 ft²) / 1 kg at 400 microns (16 mils)	
	Volume capacity	0.71 L (43 in³) / 1 kg	3.52 L (215 in³) / 5 kg
	Heat distortion temperature	43°C (109°F) at 20°C (68°F) cure	83°C (181°F) at 60°C (140°F) cure
	Abrasion resistance	H10 - 76 mm³ wet	

CURE TIMES	Temperature	10°C (50°F)	15°C (59°F)	20°C (68°F)	25°C (77°F)
	No loading or immersion	24 hours	12 hours	8 hours	7 hours
	Machining and/or light loading	48 hours	24 hours	16 hours	14 hours
	Full mechanical or thermal loading	14 days	7 days	3 days	2½ days
	Immersion in chemicals	21 days	10 days	7 days	6 days

*Please visit the [product page](#) and consult the Product Specification Sheet (PSS) and Instructions for Use (IFU) for the latest technical data.



ERROSION/CORROSION
RESISTANT



CHEMICAL
RESISTANT



EFFICIENCY
ENHANCING



SOLVENT FREE

Key Benefits:

- **Erosion-corrosion resistance**

This coating offers outstanding erosion and corrosion resistance for long-term protection of equipment.

- **Hydrophobic properties**


Belzona 1341 uses hydrophobic technology to reduce turbulent flow and improve fluid efficiency.

- **Chemical resistance**

Belzona 1341 is resistant to a variety of chemicals, including hydrocarbons and process chemicals.

- **Solvent free**

This solvent-free solution does not shrink when curing and improves application health and safety in confined spaces.

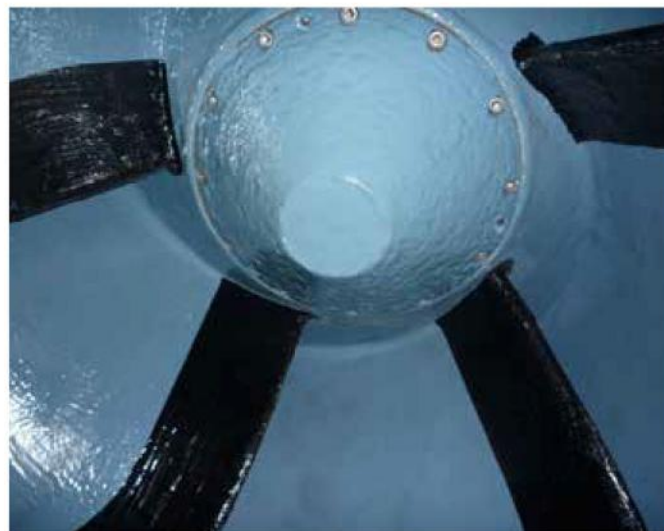

Application Areas:

- **Enhancing pump efficiency**

This coating is designed to enhance the efficiency and performance of pump components.

- **Equipment under immersion**

Belzona 1341 can be used to protect equipment operating under immersion, including pipelines and turbine systems.

- **Leading edge protection**

Belzona 1341 has been proven successful as a coating for leading edge protection of blades in power generation and HVAC.

- **Contact with potable water**

This system is an approved coating which can be applied onto equipment in contact with potable water.

For more information, please contact your local Belzona representative:



Q1 Providence | East Bank Demerara | Tel: +592-265-7445

45 Urquhart Street | Georgetown | Tel: +592-226-8130

Email: info@fmlgy.com

Visit us at WWW.FMLGY.COM

QUALITY PRODUCTS - TECHNICAL SUPPORT

Belzona products are manufactured under an ISO 9001 Registered Quality Management System.

Belzona has a global distribution network of over 140 Distributors operating in 120 countries. Local support is provided by a trained Technical Consultant who will diagnose the problem, recommend the solution and provide 24-hour, on-site application supervision and advice.