

HIGH

Track lighting 2024 EN

MULTITRACK
MULTITRACK

AQFORM
LIGHTING SOLUTIONS




MICROTRACK
FLAT TRACK

TRACK LIGHTING

Contents

Multitrack & High multitrack	p. 16
Flattrack	p. 50
Microtrack	p. 58
3F Track	p. 68
Luminaires	p. 92





PET midtl LED track

Hotel-T, Wærgem

Photo: Jan Liz

Tracks

– a way to achieve well-adapted lighting

Lighting tracks are very flexible solutions. Their main advantages are powering many luminaires from one point and the ability to easily change the arrangement and number of luminaires. They are perfect for shops, galleries and restaurants, but also for residential interiors.

MULTITRACK models are distinguished by their simple form and safe voltage of 48V inside the track. They can be mounted not only on the ceiling, but also on the wall, within easy reach.

With new multitrack suspended up&down, installation luminaires also in upper part of the track is possible.


MULTITRACK offers a surface-mounted version with a lower track height. It can be suspended. There is also a recessed variant. In both cases, the frame adapters are flush with the edge of the track. Higher versions: surface and trim or trimless recessed are solutions in which the linear fixtures are completely hidden within the track.

3F tracks are very popular and universal systems. They are available in a surface-mounted version (including accessories for suspension), as well as a recessed. 3F tracks are also available in DALI version.

DOBRY
ZAPROJEKT





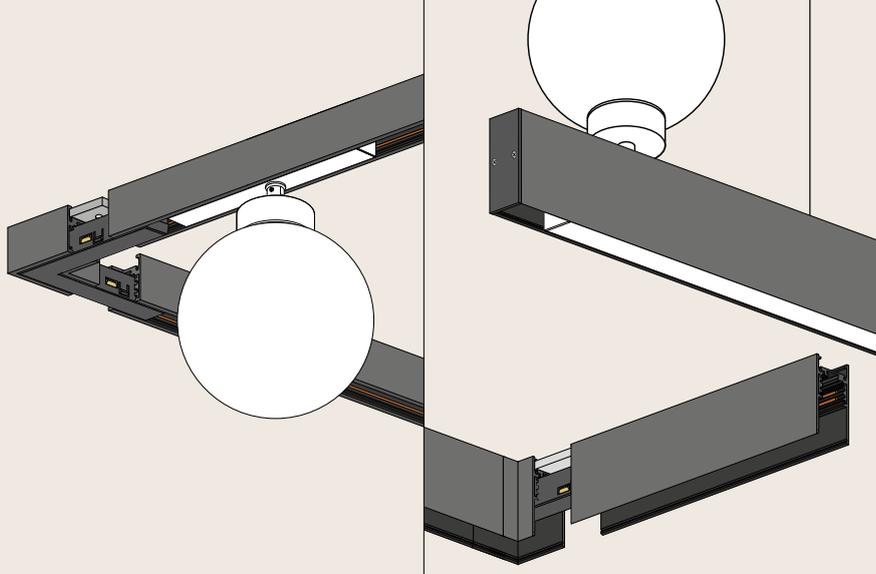

MULTITRACK

surface | suspended | recessed

48V | max 2 metres in one piece | ON-OFF (one or two circuits) | DALI | can be safely installed on walls | requires 48V power supply

System based on small-sized lighting tracks with a very simple form. Available accessories and connectors allow for creating elaborate configurations, including transitions from the ceiling to the wall.

Inside the track rail, a safe 48V voltage is used, making the MULTITRACK system suitable for locations within arm's reach. It requires a separate power supply. The system offers various control options, including two independent circuits using two power supplies and Casambi or DALI control.

HIGH MULTITRACK

**surface | suspended
up&down suspended**

48V | max 3 metres in one piece | ON-OFF (one or two circuits) | DALI | can be safely installed on walls | requires 48V power supply

High, surface-mounted versions allow for elegant flush mounting of luminaires within the track and almost perfect concealment of connectors and spotlight adapters. With the new high multitrack up&down, it is also possible to achieve upward lighting, both for illuminating a specific object and for creating general lighting with an upright. Especially recommended for very tall rooms with beautiful ceilings.



HIGH MULTITRACK

recessed | trim recessed


48V | max 3 metres in one piece | ON-OFF (one or two circuits) | DALI | can be safely installed on walls | requires 48V power supply

A higher version of the MULTITRACK system, retaining all its advantages. It utilizes the same electrical accessories and allows for transitions from the ceiling to the wall. Due to its increased depth, linear luminaires fit seamlessly within the track. The adapters and electrical connectors become nearly invisible. This creates an elegant, uniform line.

Like any low-voltage system, HIGH MULTITRACK requires an appropriate power supply and electrical connection.

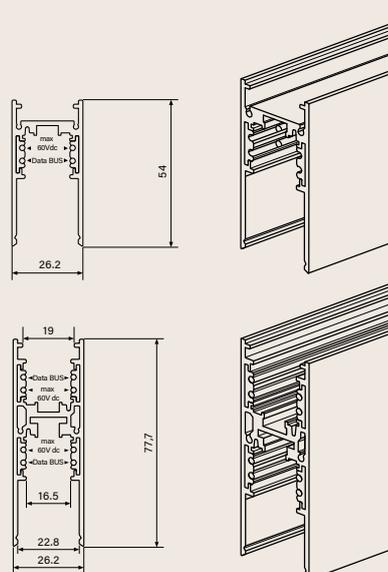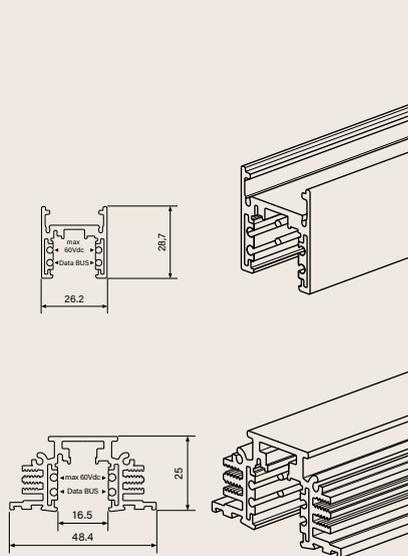

new

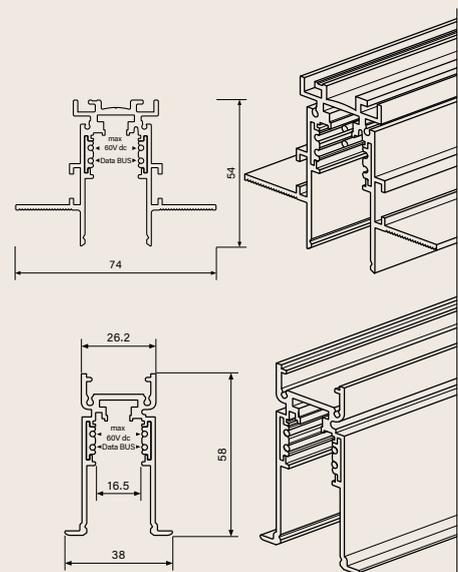

new



FLATTRACK surface

48V | max 3 metres in one piece | ON-OFF
Extremely thin | can be safely installed on walls
Requires 48V power supply

FLATTRACK is the flattest of all AQForm lighting track systems. The copper wires are coated with graphite, giving them a colour similar to the black of the track itself. By running them along the sides of the track, the most visible surface remains flat and elegant. A wide selection of connectors allows for creating elaborate track configurations.

FLATTRACK is a low-voltage track system (48V). It can be used on walls, within arm's reach. It requires a power supply.




MICROTRACK surface | recessed

48V | max 2 metres in one piece | ON-OFF | DALI
Extremely thin | can be safely installed on walls
Requires 48V power supply

A delicately designed track system with compact dimensions. The recessed version creates a narrow slit in the finished suspended ceiling, measuring just 11mm in width.

The surface-mounted model is only about 2 centimeters wide and 1cm high. It allows for transitions from the wall to the ceiling.

This is a low-voltage system operating at 48V, which requires the use of a power supply.














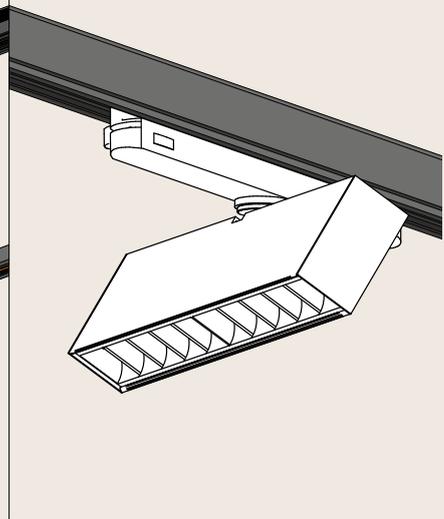



3F and 3F DALI surface | recessed

230V | max 3 metres in one piece | ON-OFF (three circuits) | DALI

The most popular system powered by 230V. To connect it, a standard cable on the ceiling and a power end cap or one of the connectors with the possibility of power connection (straight connector, "L", "T" or "X") are sufficient. 3F tracks allow the luminaires to be divided into three circuits, so that they work independently. This requires running a 5-wire cable between the switches on the wall and connecting the track.


There is also a DALI 3F version available for indoor use with a wired digital control system based on the DALI protocol.

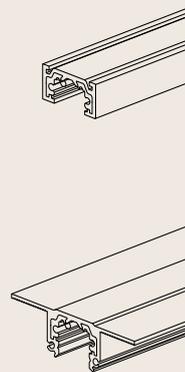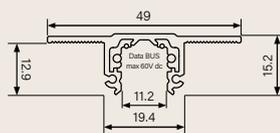

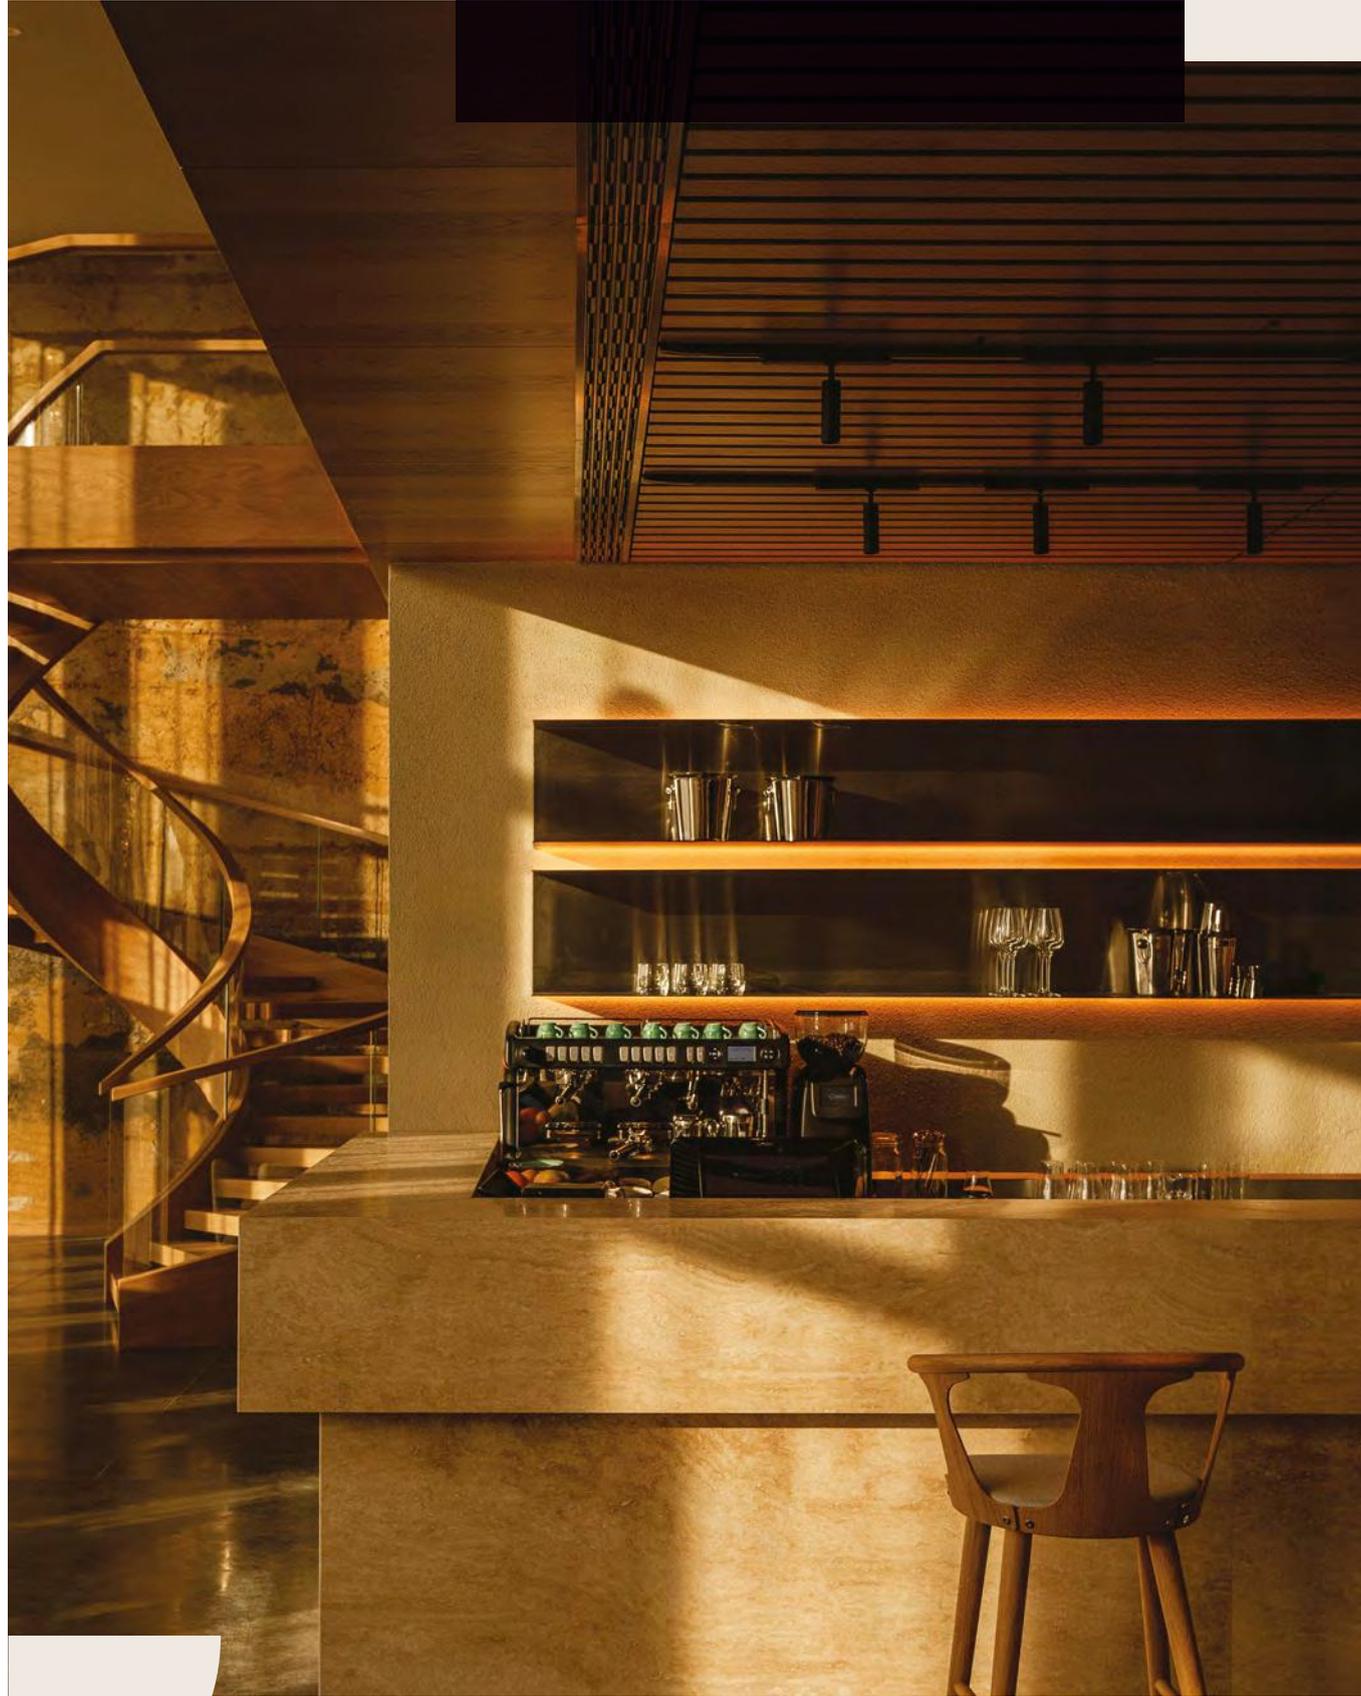



up: RAFTER mini move 20 LED high multitrack
down: PET midi LED high multitrack | RAFTER mini points LED multitrack

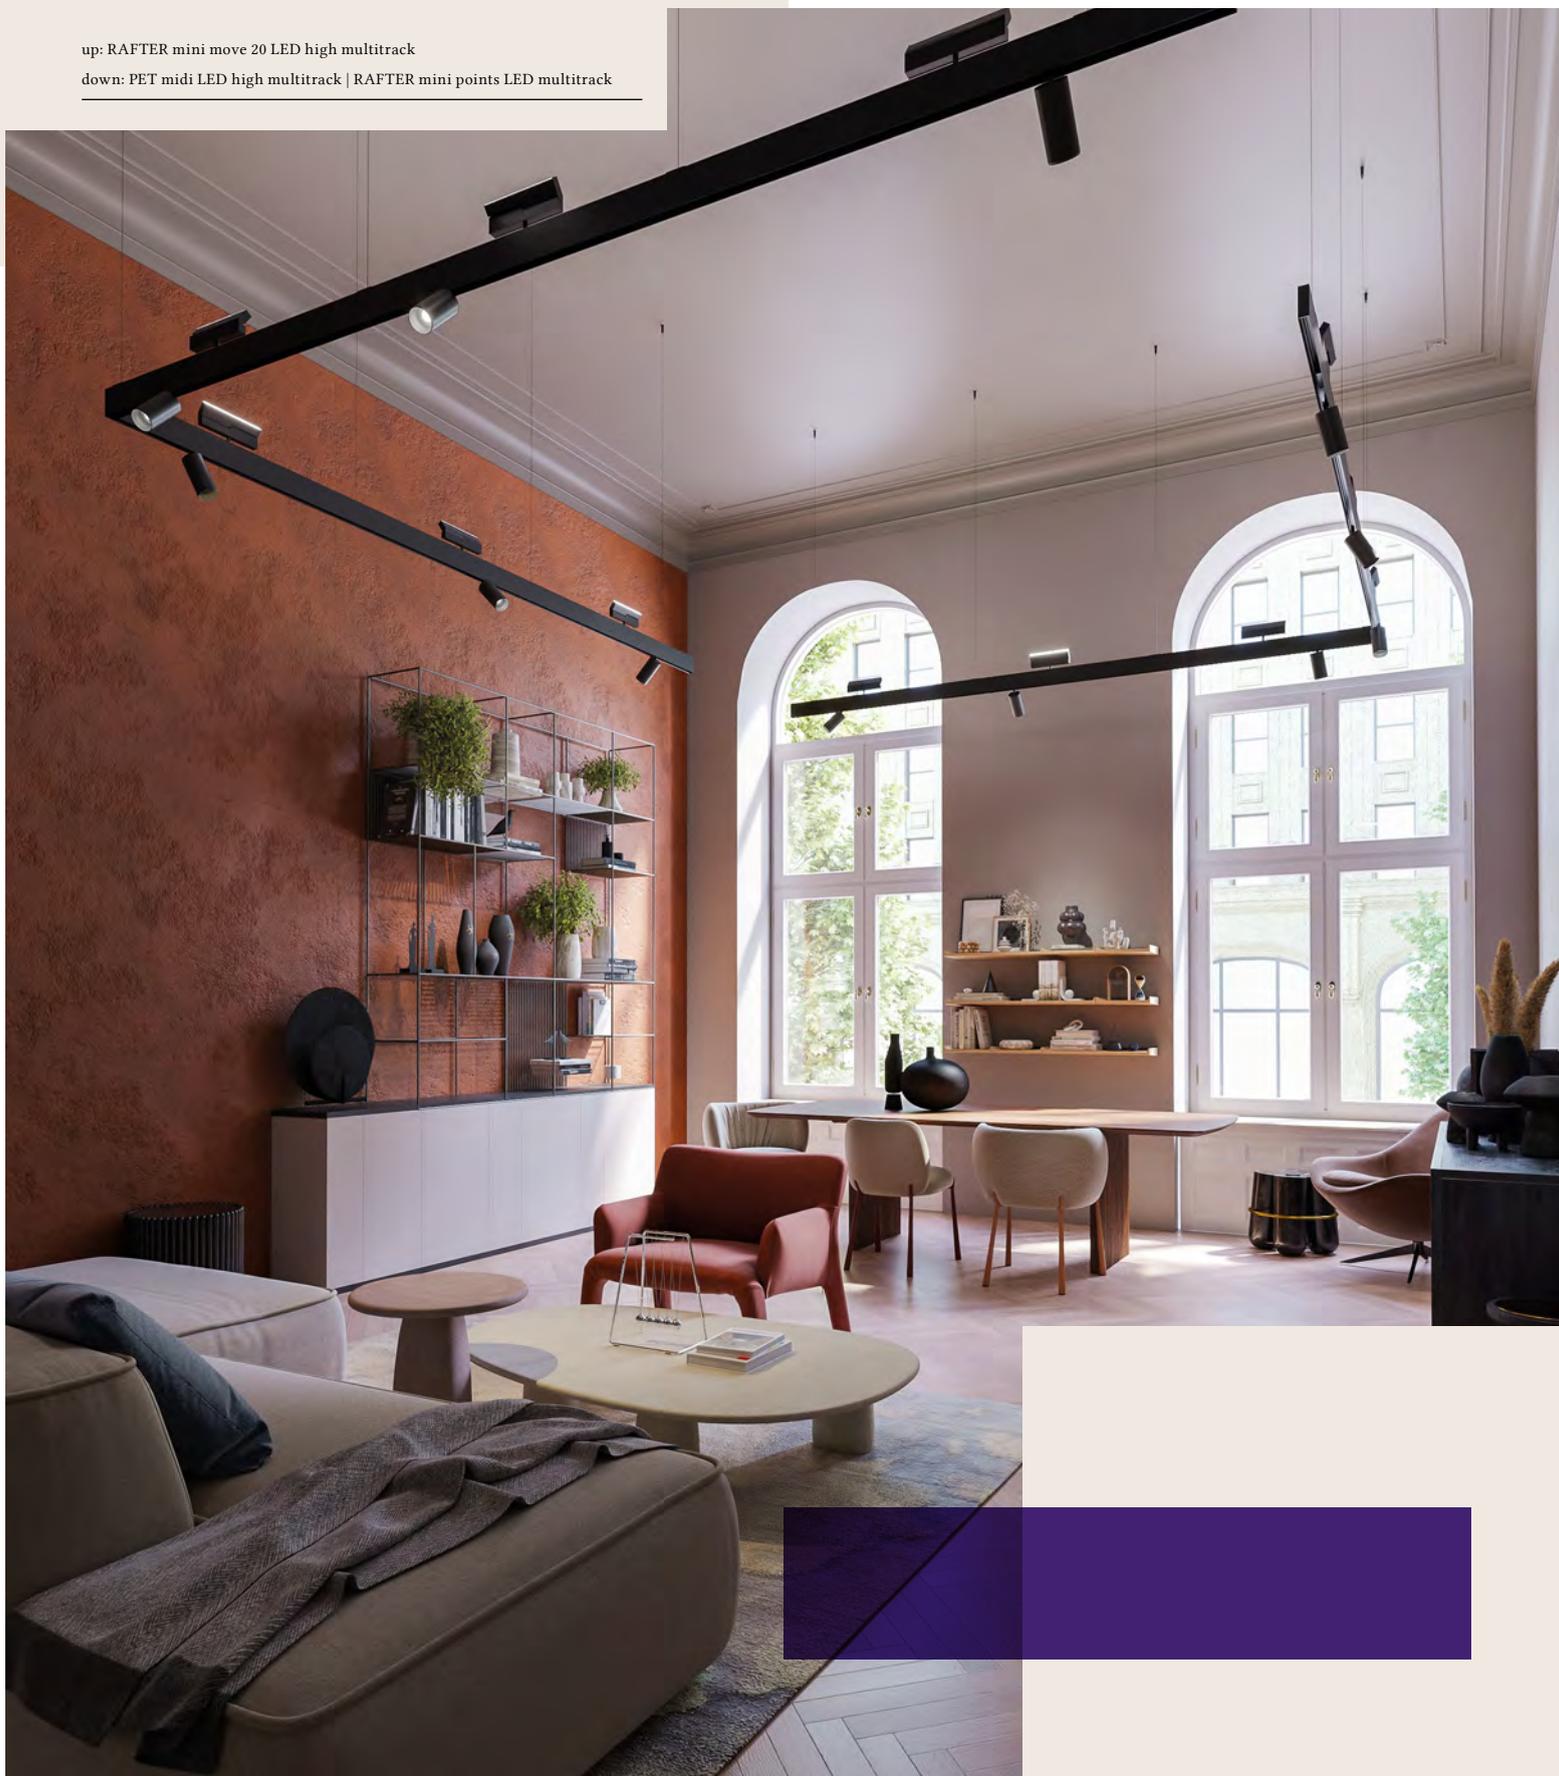





up: RAFTER mini move 20 LED high multitrack

down: PET midi LED high multitrack | RAFTER mini points LED multitrack





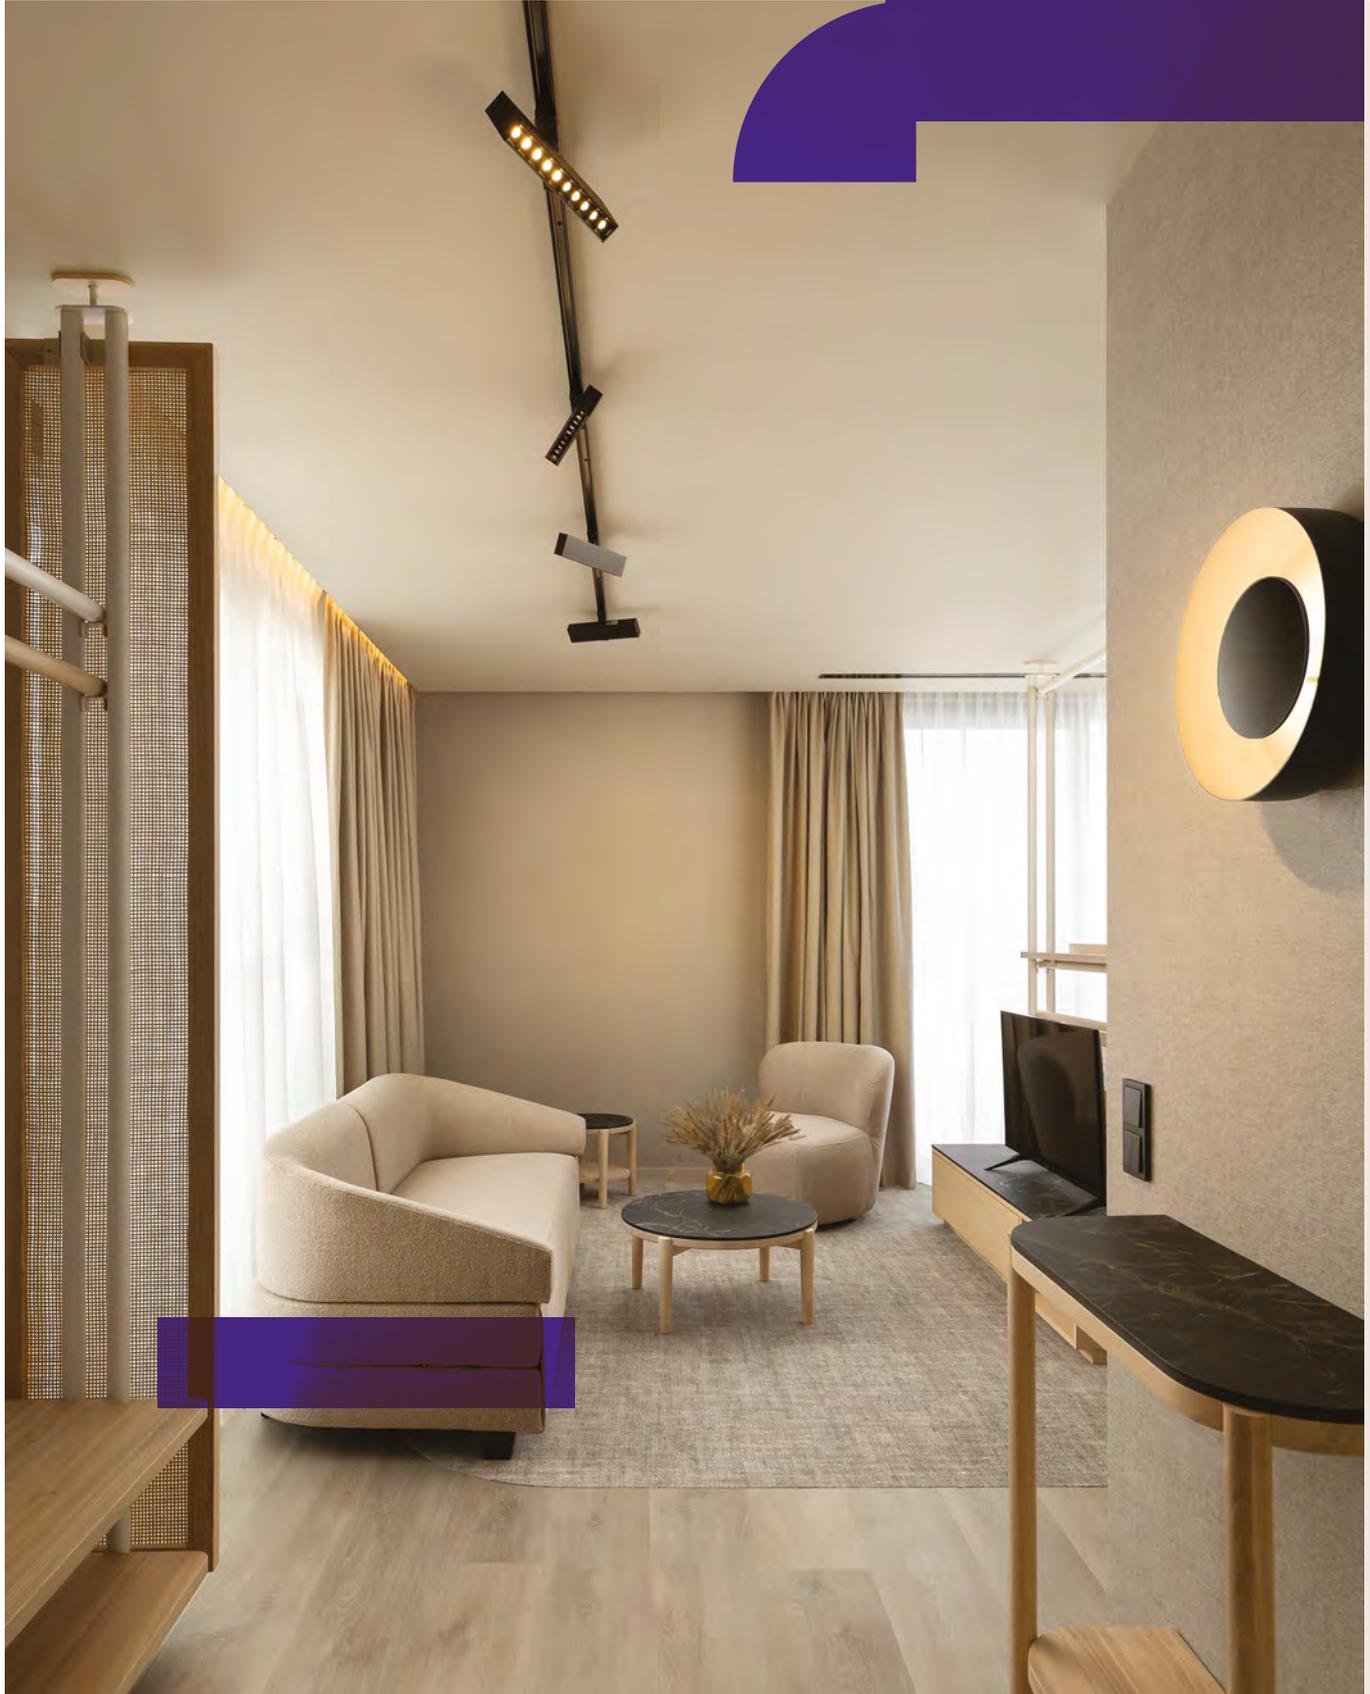

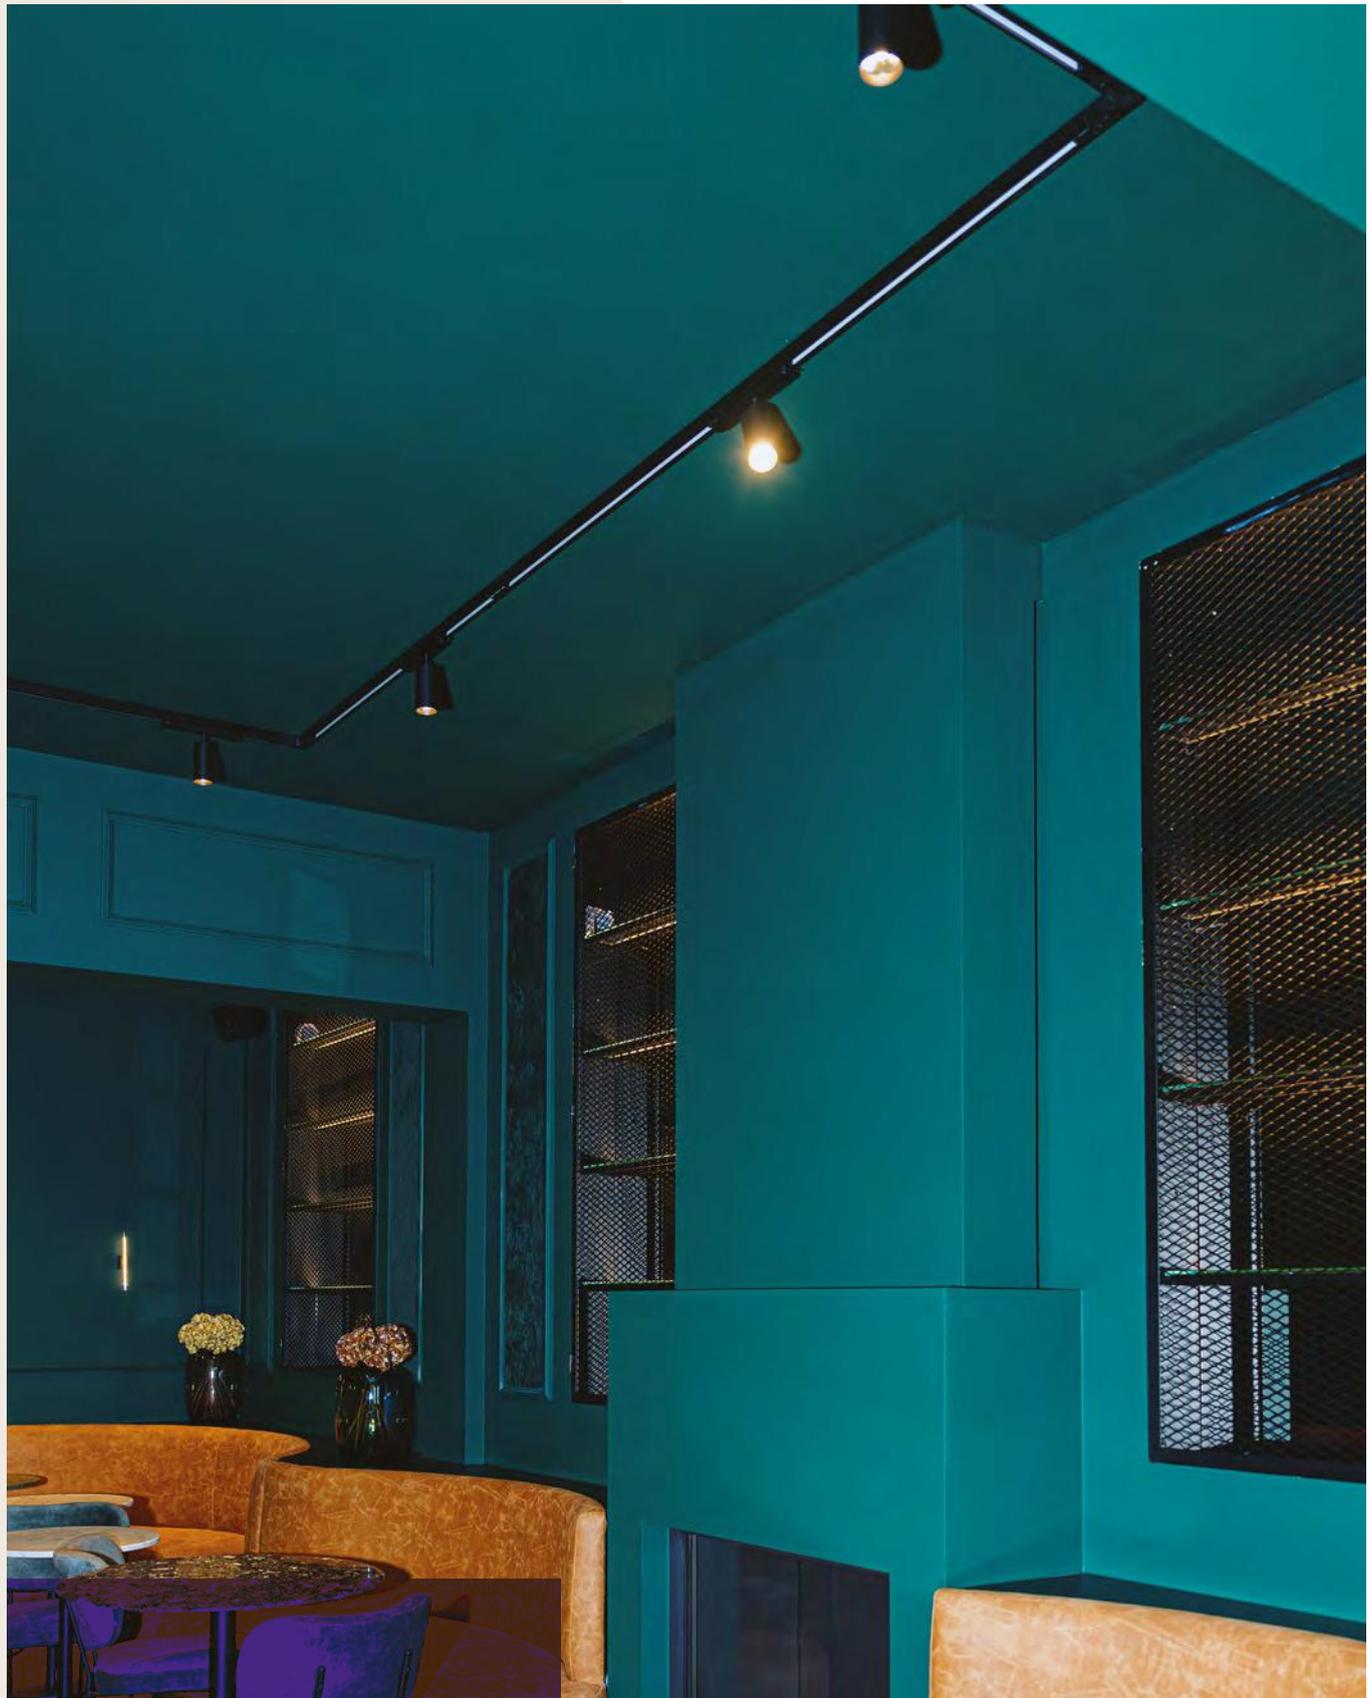

Multitrack & High ■ Multitrack

Flexibility in a simple form

The MULTITRACK system is available in surface-mounted, suspended and recessed versions, as well as in two depths.

With new multitrack suspended up&down, installation luminaires also in upper part of the track is possible.


Available accessories and connectors allow you to create complex systems, even with a direct transition from the ceiling to the wall.

There is a safe voltage of 48V inside the track, so the MULTITRACK system can also be used in places within arm's reach.


The MULTITRACK system requires a separate power supply. It can be installed in a suspended ceiling or built-in the furniture. Another solution is to use the power supply in a surface-mounted box mounted on the ceiling and constituting an extension of the track. There is also a power supply plugged directly into the track (exactly the same as the luminaires), as well as a power supply mounted on a DIN rail in the distribution box. There are plenty of possibilities. Each of them requires slightly different electrical installation.




HIGH MULTITRACK
recessed

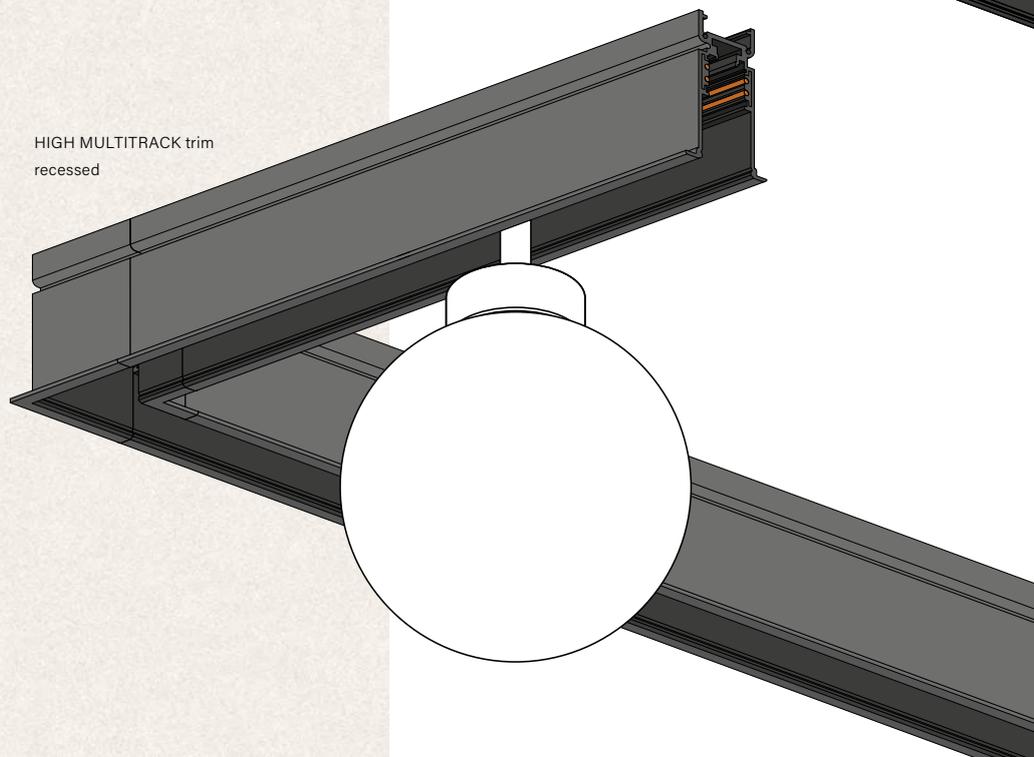


HIGH MULTITRACK trim
recessed

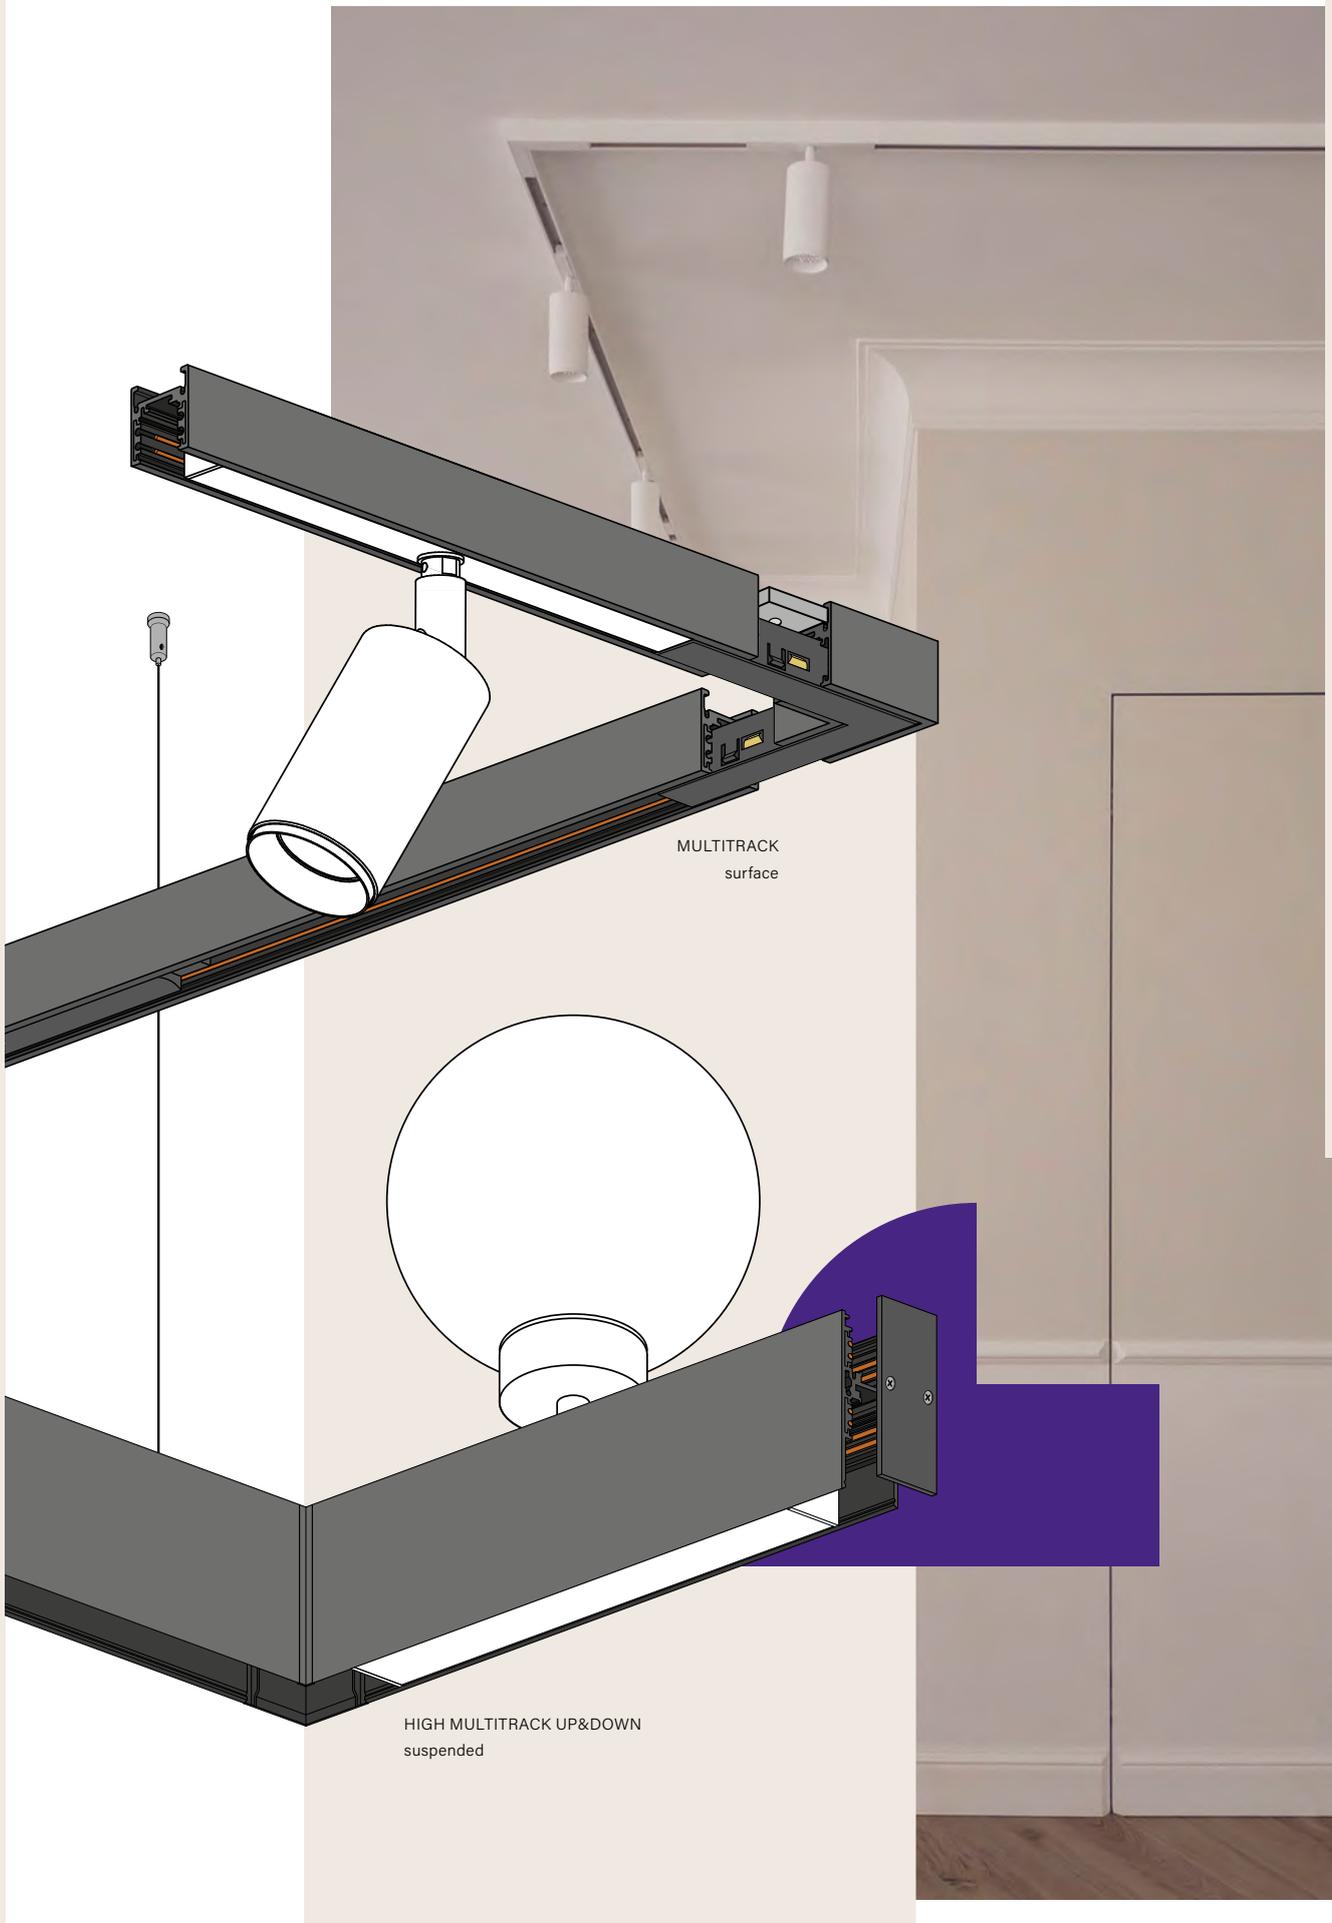


up: RAFTER mini move 20 LED high multitrack
down: PET midi LED high multitrack | RAFTER mini points LED multitrack

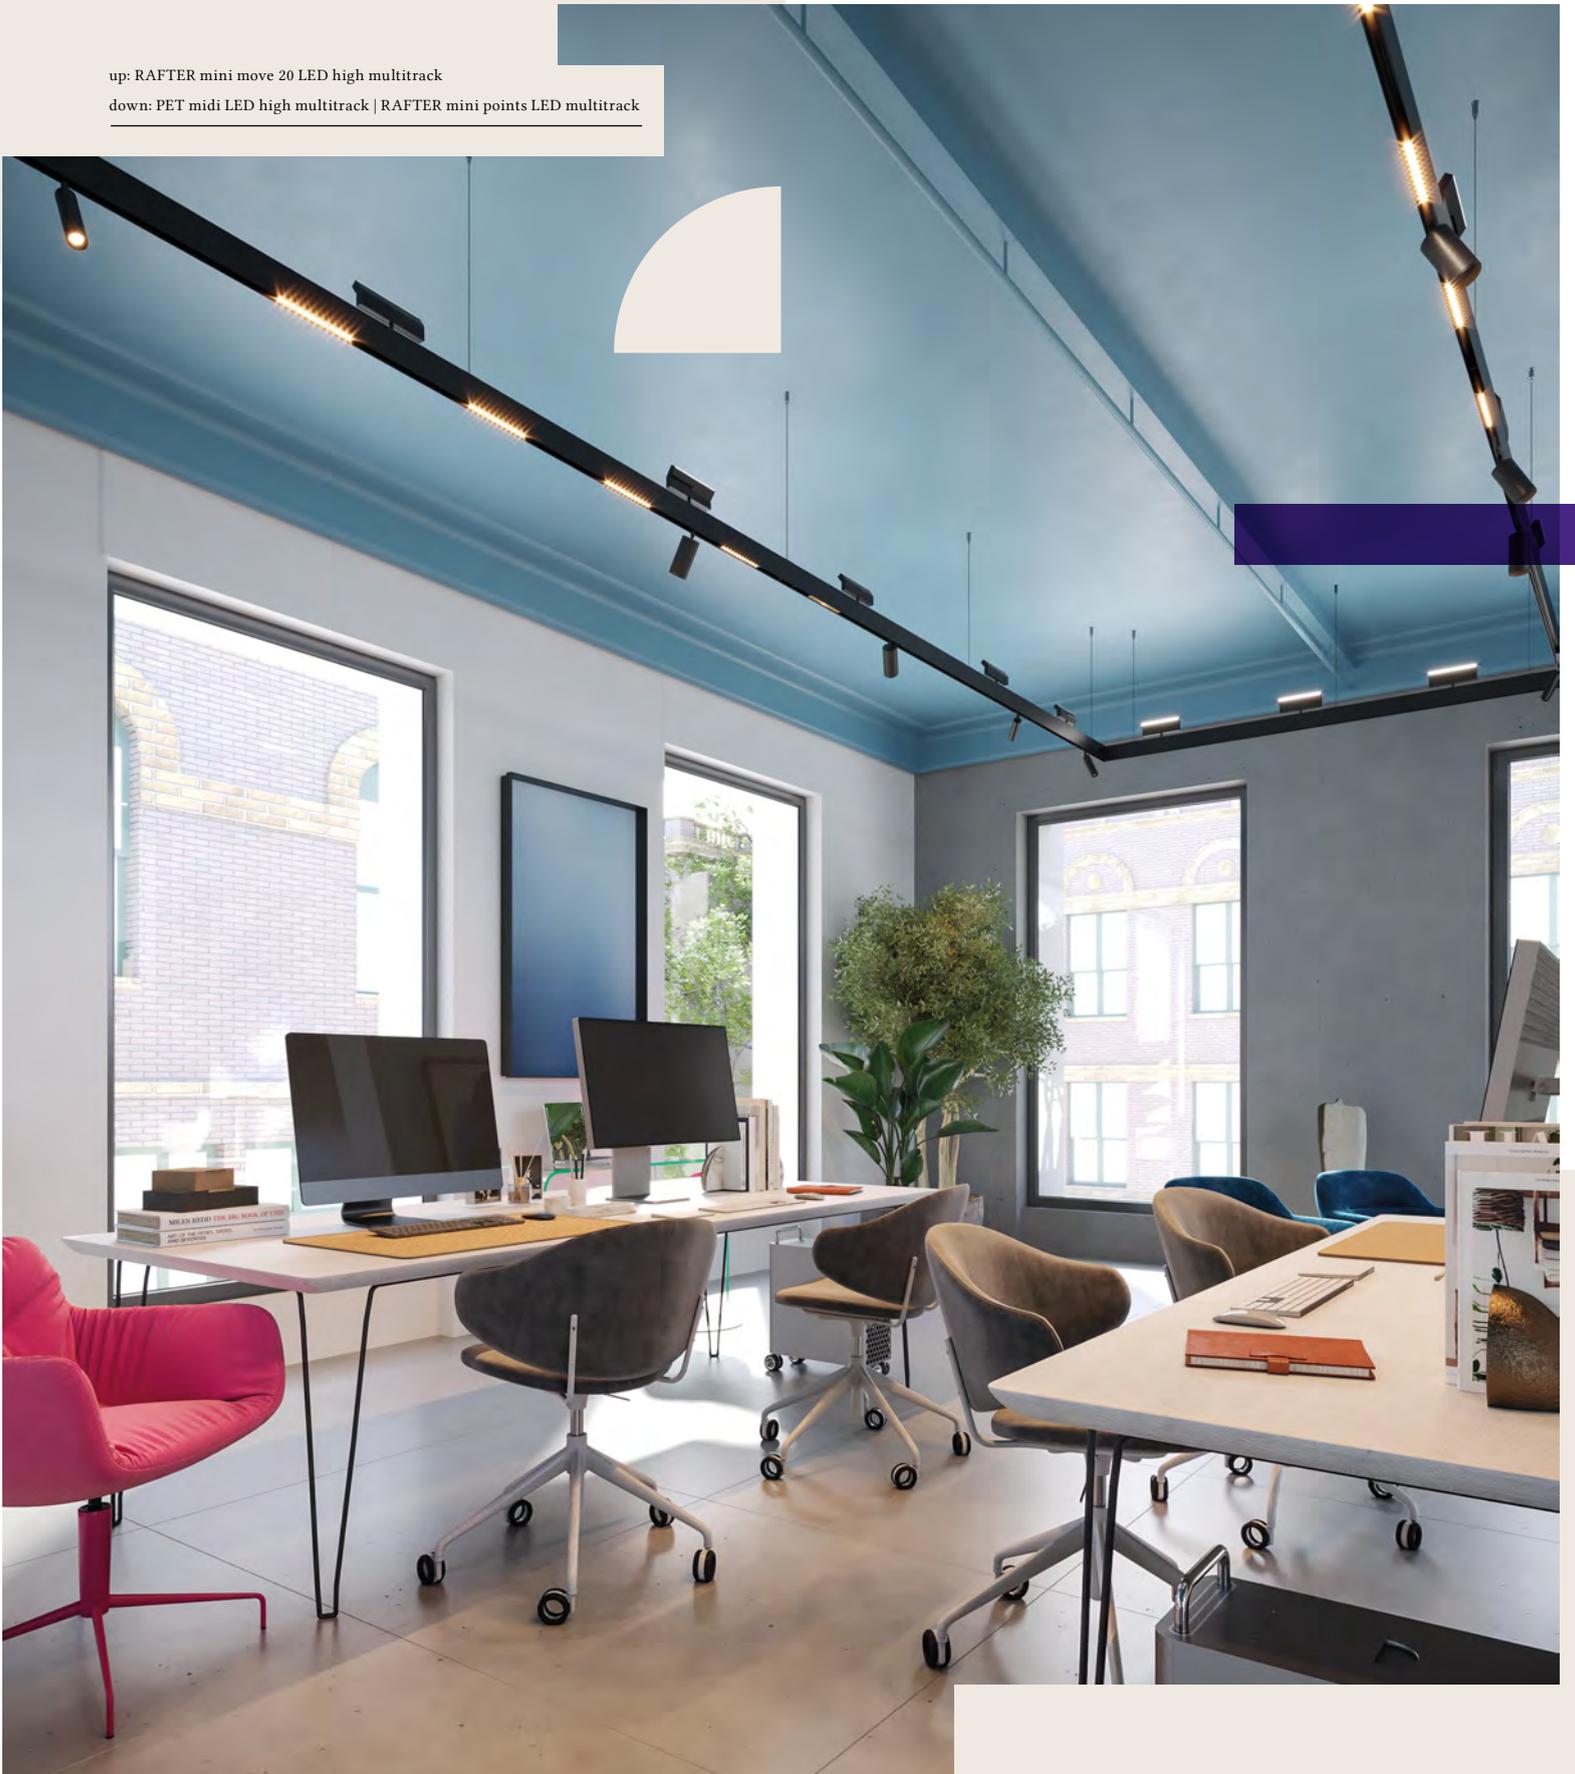

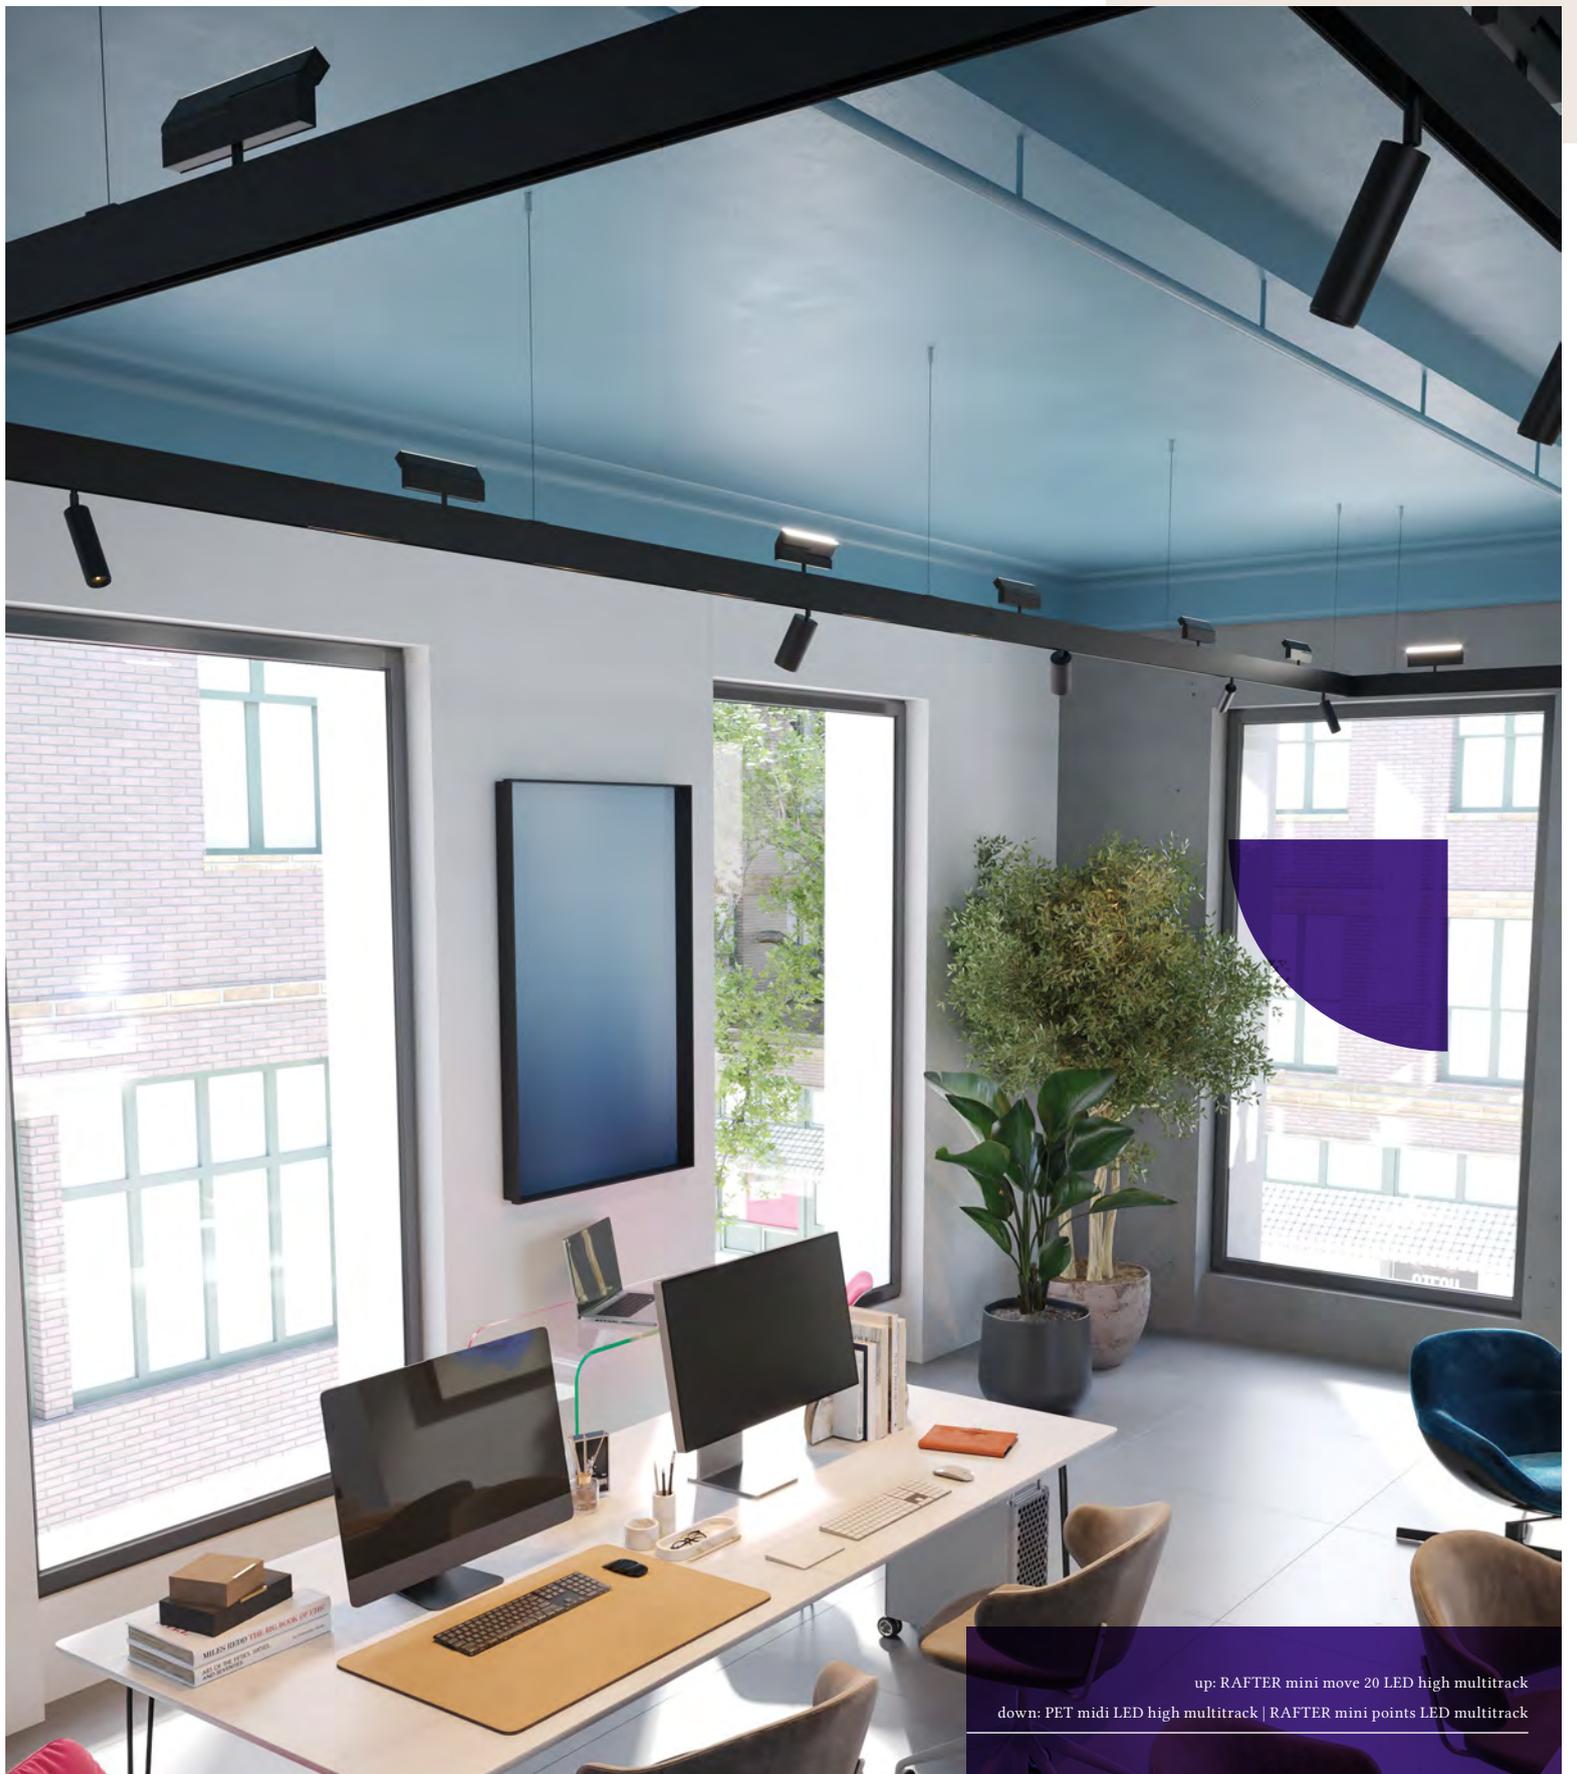

up: RAFTER mini move 20 LED high multitrack
down: PET midi LED high multitrack | RAFTER mini points LED multitrack

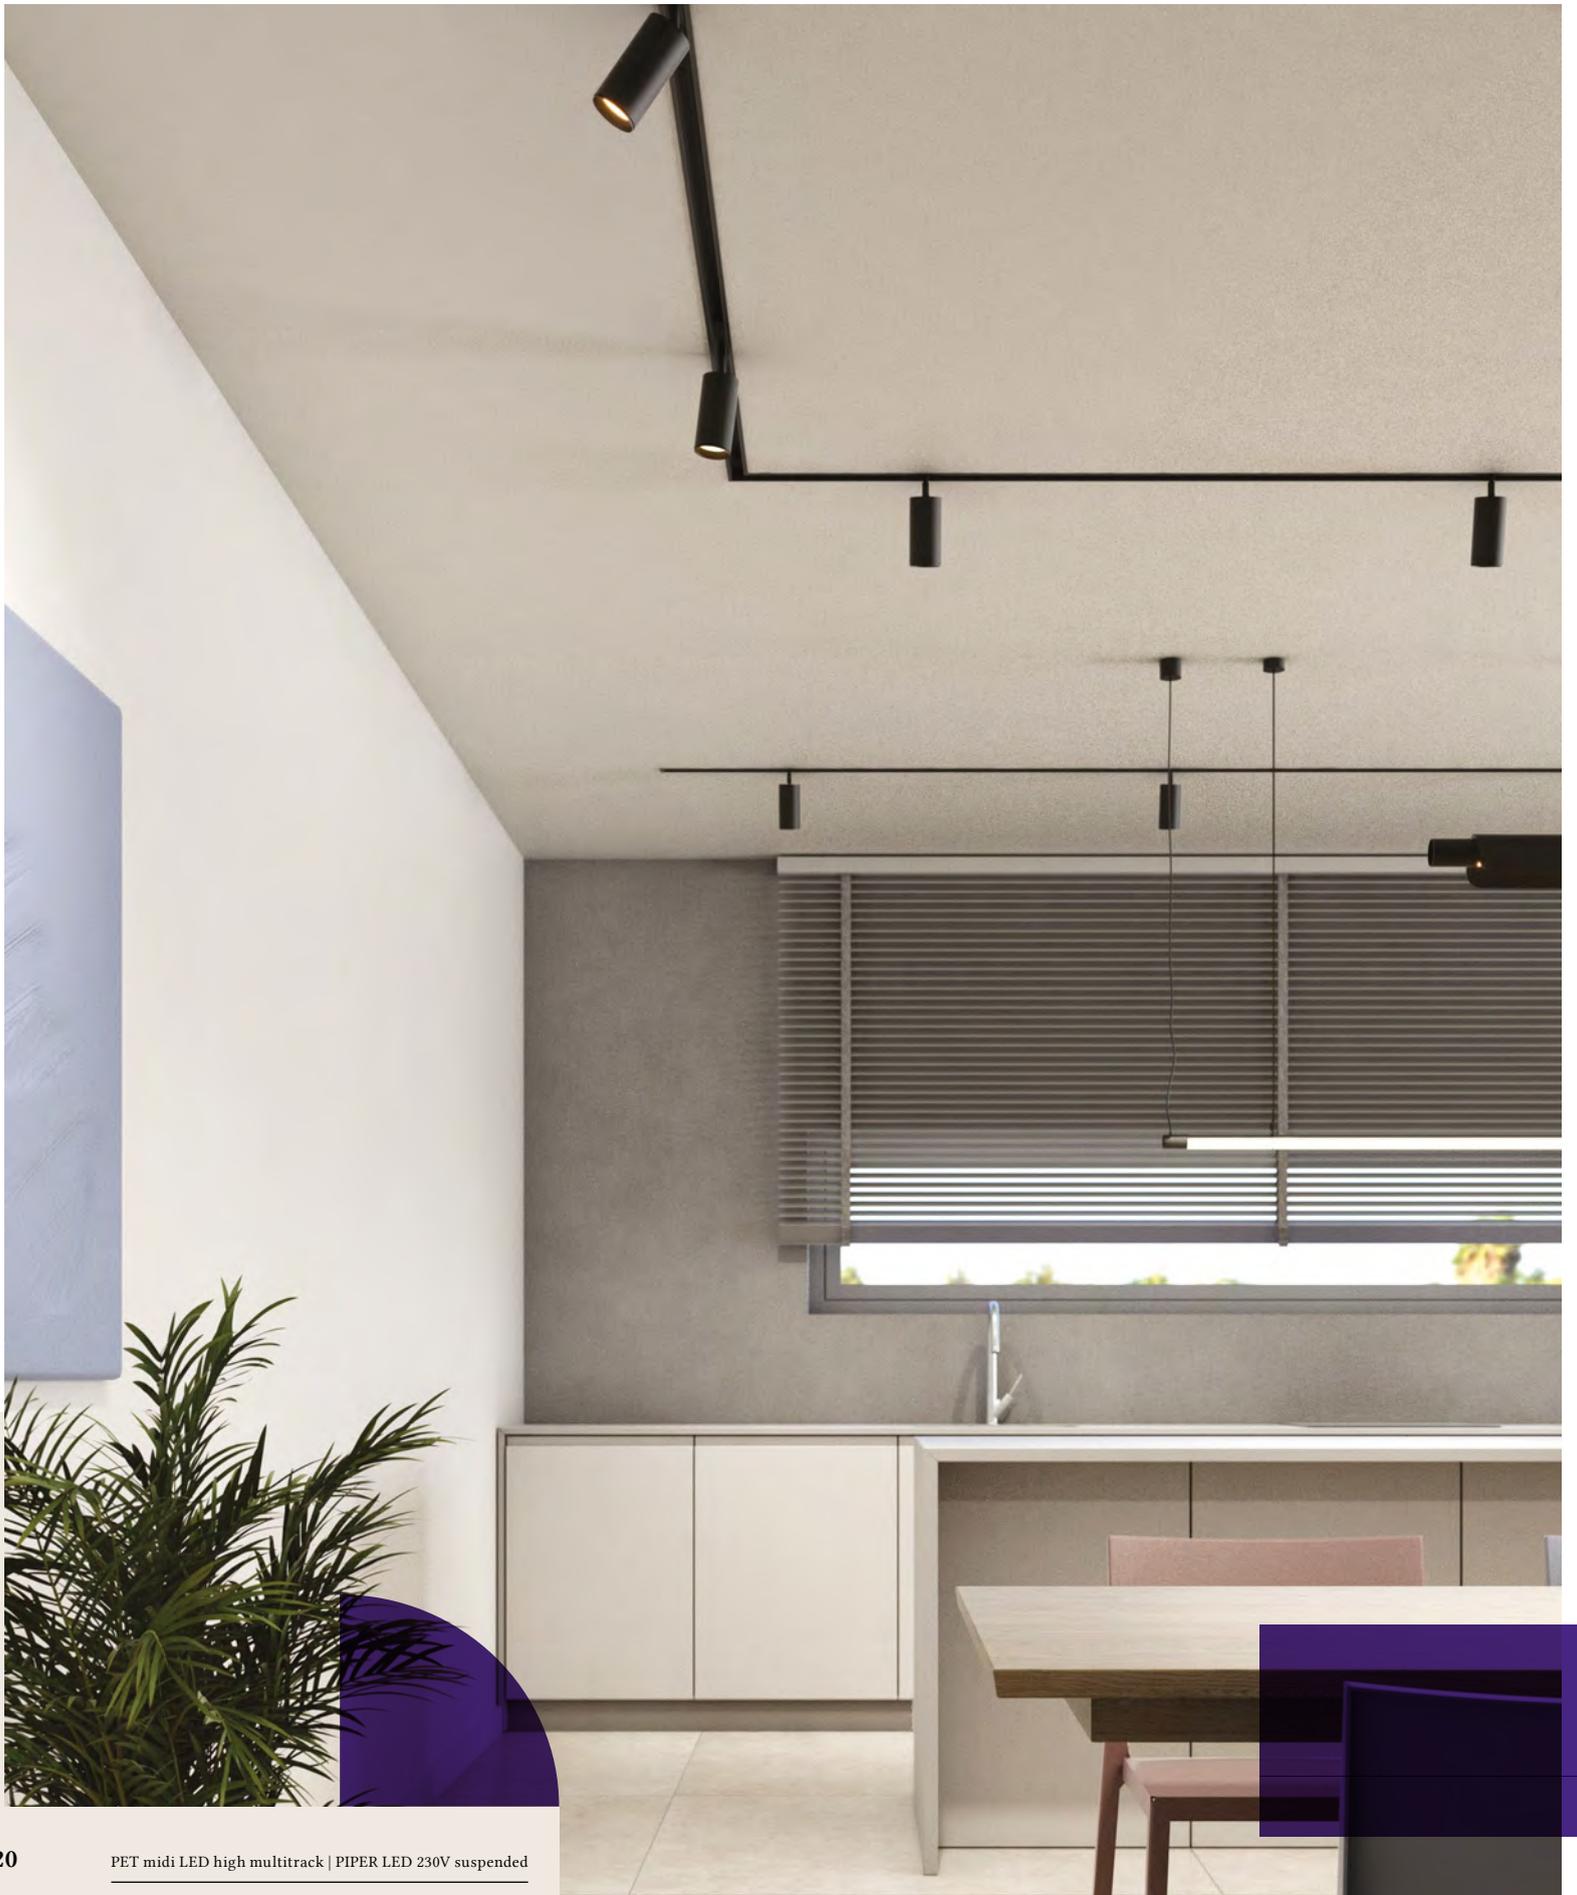




MULTITRACK

recessed



In MULTITRACK system the adapter flush with the track edges. Recessed version do not require any special construction of the ceiling and can be installed in already existing but not yet finished soffit.

MULTITRACK surface and MULTITRACK recessed are available in QS range.

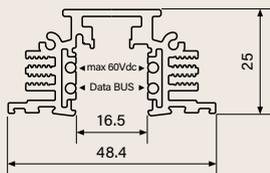


HIGH MULTITRACK

recessed



In HIGH MULTITRACK system the adapter recess completely inside the track. Thus tiltable parts of the luminaires need a longer joint: thanks to longer elements they can still be easily adjusted. For proper installation of this system it is required to prepare construction of the suspended ceiling before installation of the track.


HIGH MULTITRACK recessed system is available in the QS range.

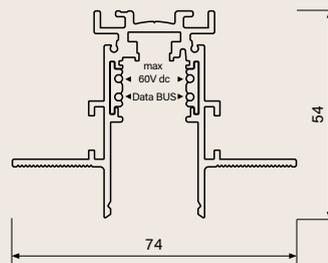

HIGH MULTITRACK trim
recessed



A great solution wherever the delicacy of MULTITRACK and maximally practical installation are needed. The narrow frame reduces the effort required to finish the ceiling while maintaining the minimalist and cohesive effect characteristic of this product family.

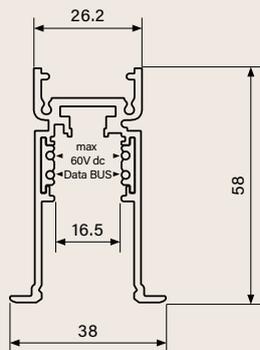

MULTITRACK
recessed



HIGH MULTITRACK
recessed




HIGH MULTITRACK trim
recessed

Each recessed track must avoid the structure of the suspended ceiling.

HIGH MULTITRACK UP&DOWN suspended



A boutique in a tenement house with beautiful stucco, a two-story living room, or even an office or study - in each of these interiors, for various reasons, it is worth illuminating the ceiling. The multitrack up&down allows for the installation of lighting fixtures both in the lower, higher section and in the upper, lower part.

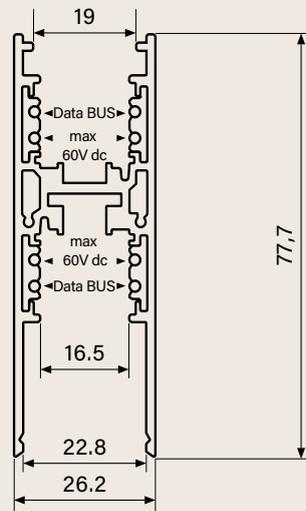



up: MODERN BALL simple midi multitrack









down: MODERN BALL simple midi high multitrack | SET TRU mini multitrack



Luminaires compatible with the system UP&DOWN

	QRLED next suspended	not recommended	MULTITRACK version
	QRLED next	HIGH MULTITRACK version	HIGH MULTITRACK version
	PET mini suspended	not recommended	MULTITRACK version
	PET mini / PET midi	HIGH MULTITRACK version	HIGH MULTITRACK version
	MODERN BALL simple suspended	not recommended	MULTITRACK version
	MODERN BALL simple	MULTITRACK version	HIGH MULTITRACK version
	HYPER	HIGH MULTITRACK version	HIGH MULTITRACK version

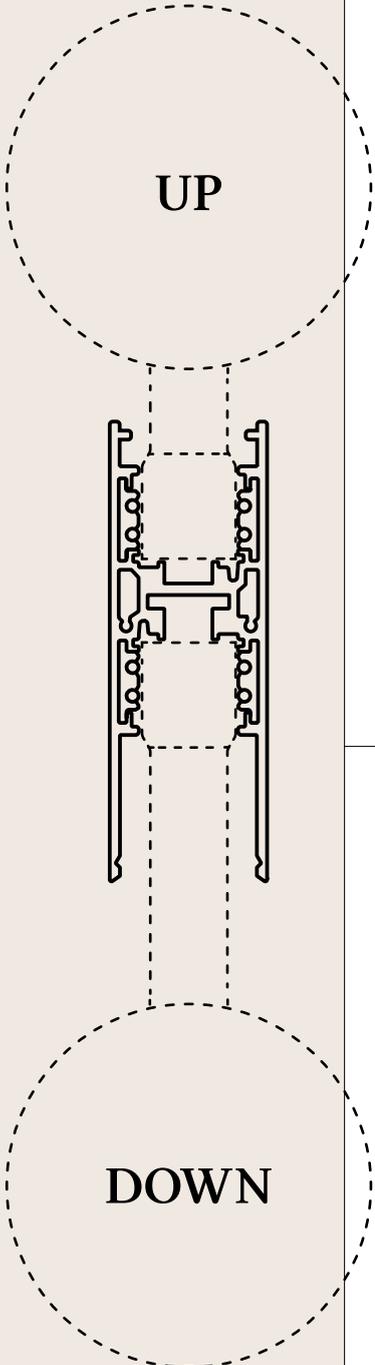


 <p>TUBE flex</p>	<p>not recommended</p> <p>HIGH MULTITRACK version</p>
 <p>TUBE stiff</p>	<p>MULTITRACK version</p> <p>incompatible</p>
 <p>TRU mini</p>	<p>incompatible</p> <p>MULTITRACK version</p>
 <p>TRIBA mini suspended</p>	<p>not recommended</p> <p>MULTITRACK version</p>
 <p>TRIBA mini</p>	<p>HIGH MULTITRACK version</p> <p>HIGH MULTITRACK version</p>
 <p>RAFTER mini move RAFTER mini move points</p>	<p>HIGH MULTITRACK version</p> <p>HIGH MULTITRACK version</p>
 <p>RAFTER mini RAFTER mini points</p>	<p>incompatible</p> <p>MULTITRACK version</p>
 <p>RAFTER points</p>	<p>HIGH MULTITRACK version</p> <p>HIGH MULTITRACK version</p>
 <p>RAFTER</p>	<p>HIGH MULTITRACK version</p> <p>HIGH MULTITRACK version</p>









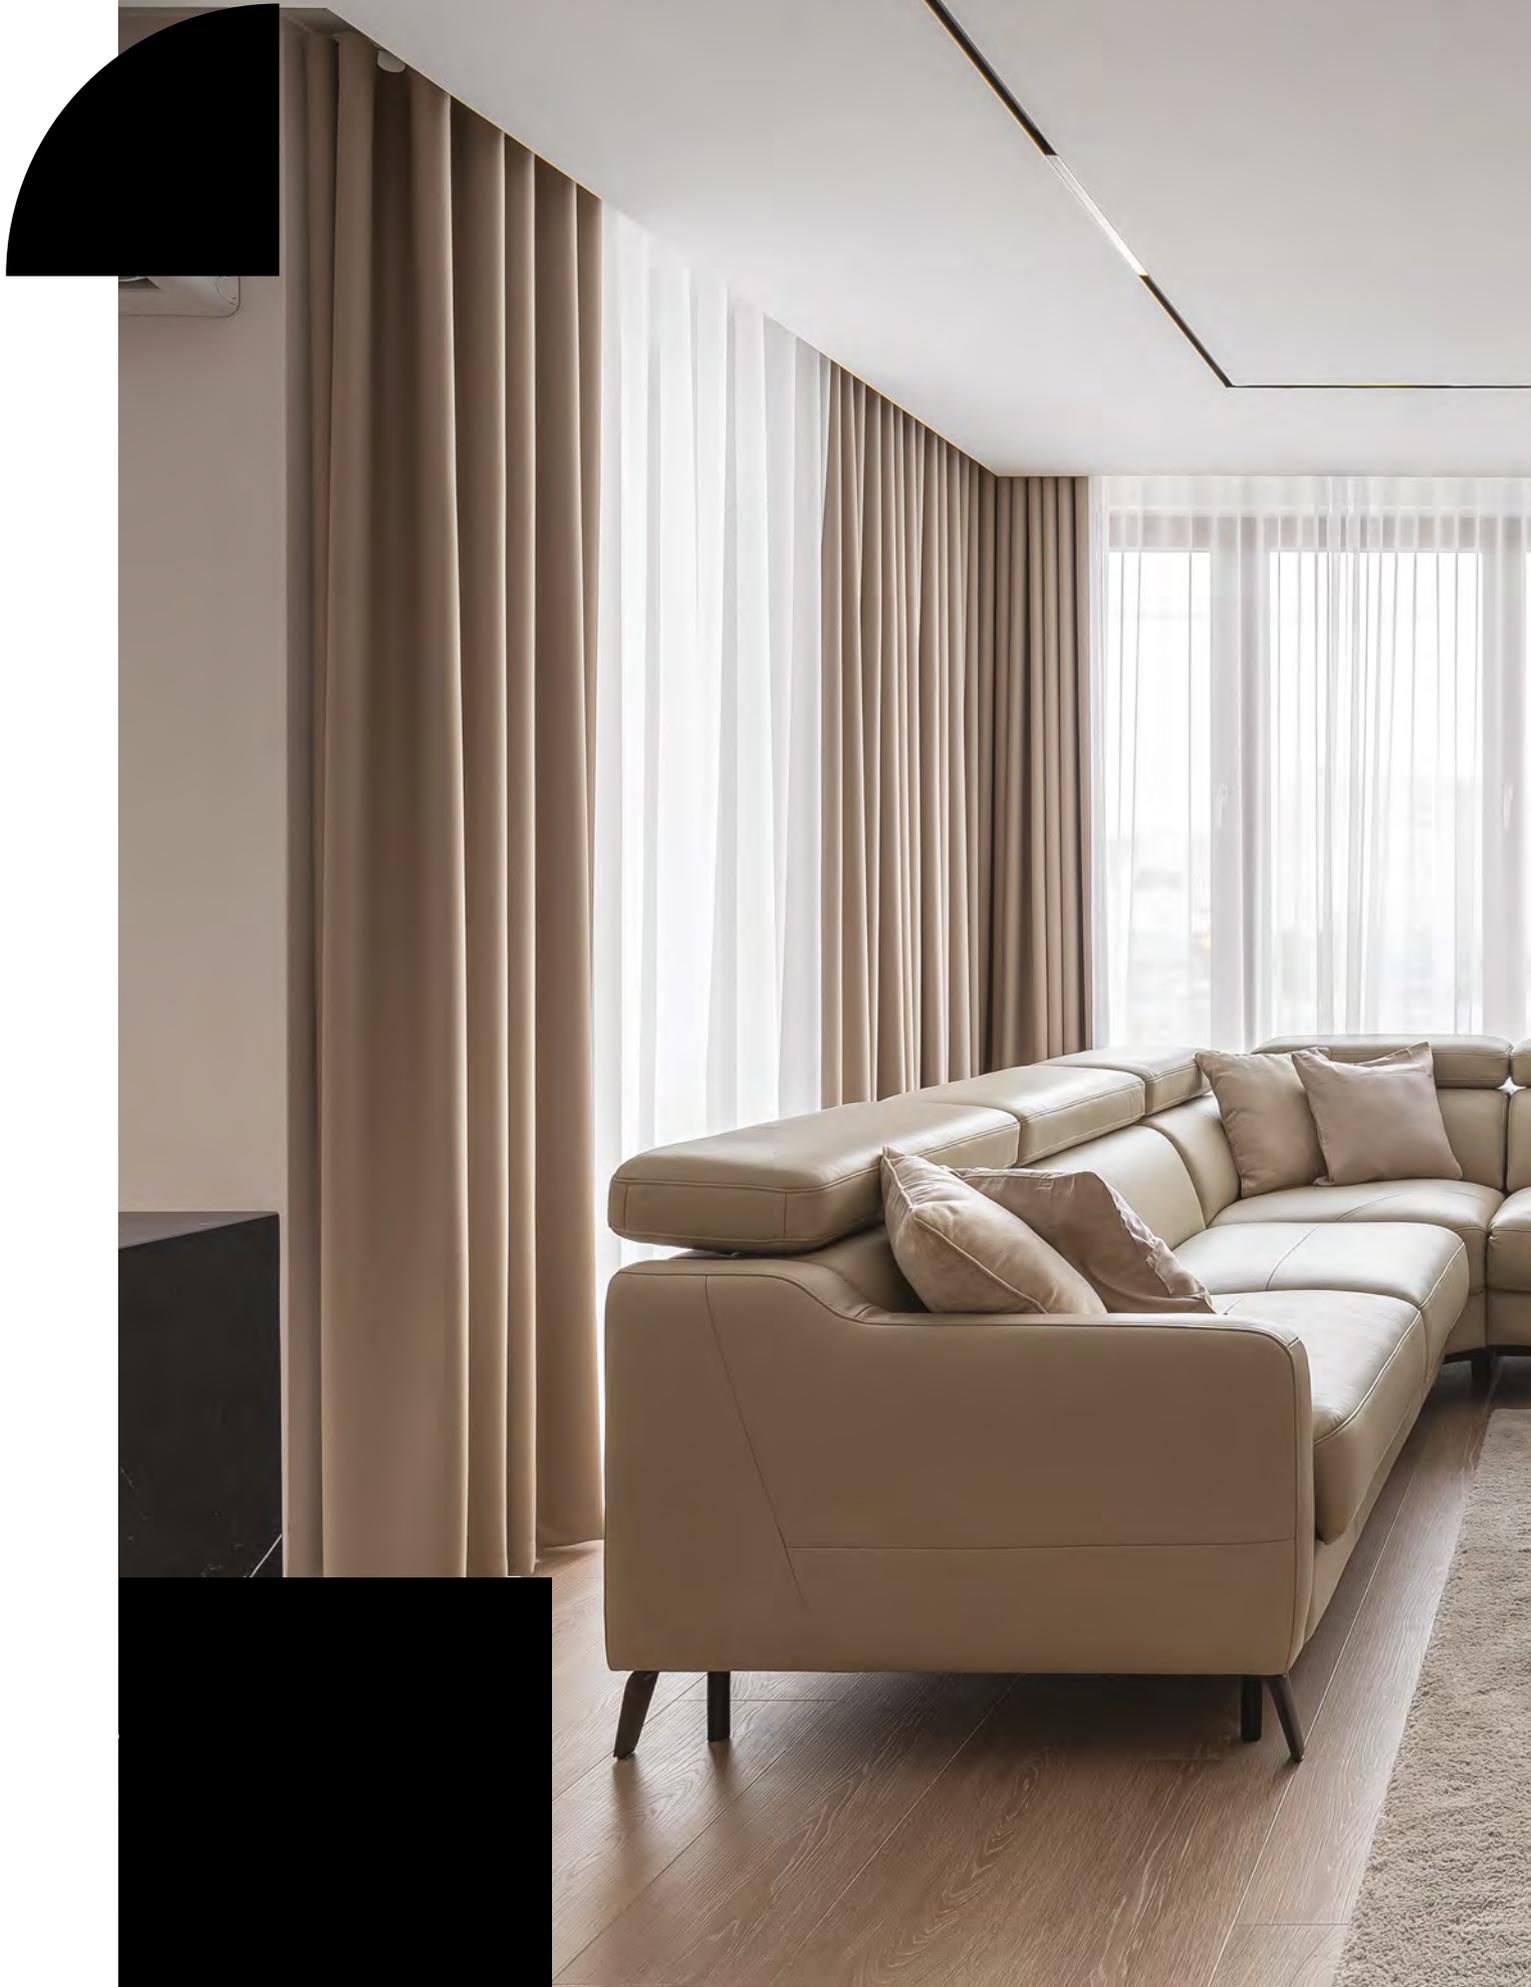







MULTITRACK

Safe voltage 48V & wall-ceiling arrangements

The safe voltage inside the MULTITRACK and variety of mechanical and electrical connectors allow to use the system within arm's reach and wall-ceiling transitions.

The simple and refined form remains elegant even at very close proximity.

48V | max 3 metres in one piece | ON-OFF (one or two circuits) | DALI
Can be safely installed on walls | requires 48V power supply

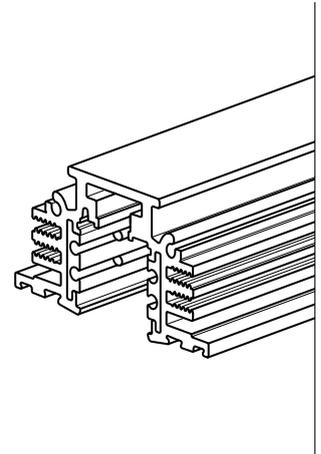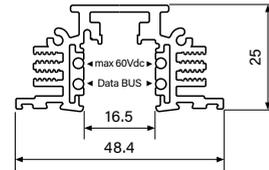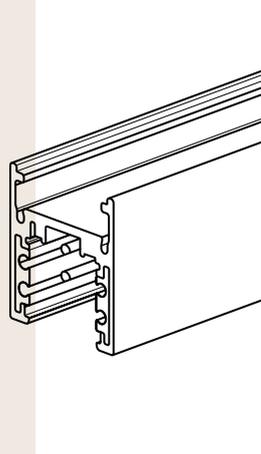

System flexibility + controls and light scenes



The possibility of supplying many luminaires from one electrical point and the ease of changing the arrangement of lamps within the track are an advantage both at the design stage and in later use.

The track itself allows for division into two circuits and connection of DALI control. MULTITRACK luminaires are available in: ON/OFF and DALI versions, which is compatible with the wireless AQsmart.


tracks	colour	cat. no
surface 1000mm	black	SMCM1DAB
	white	SMCM1DAW
surface 2000mm	black	SMCM2DAB
	white	SMCM2DAW
suspended 1000mm	black	SMSM1DAB
	white	SMSM1DAW
suspended 2000mm	black	SMSM2DAB
	white	SMSM2DAW

tracks	colour	cat. no
recessed 1000mm	black	SMRM1DAB
	white	SMRM1DAW
recessed 2000mm	black	SMRM2DAB
	white	SMRM2DAW

Maximum load

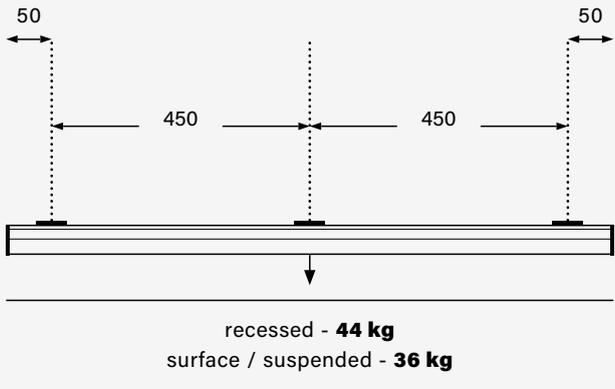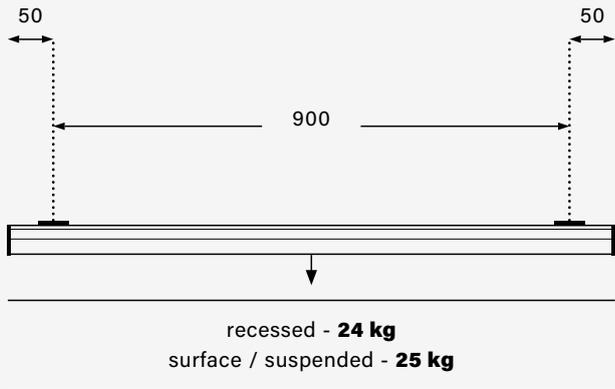

Scheme of the MULTITRACK surface/suspended system

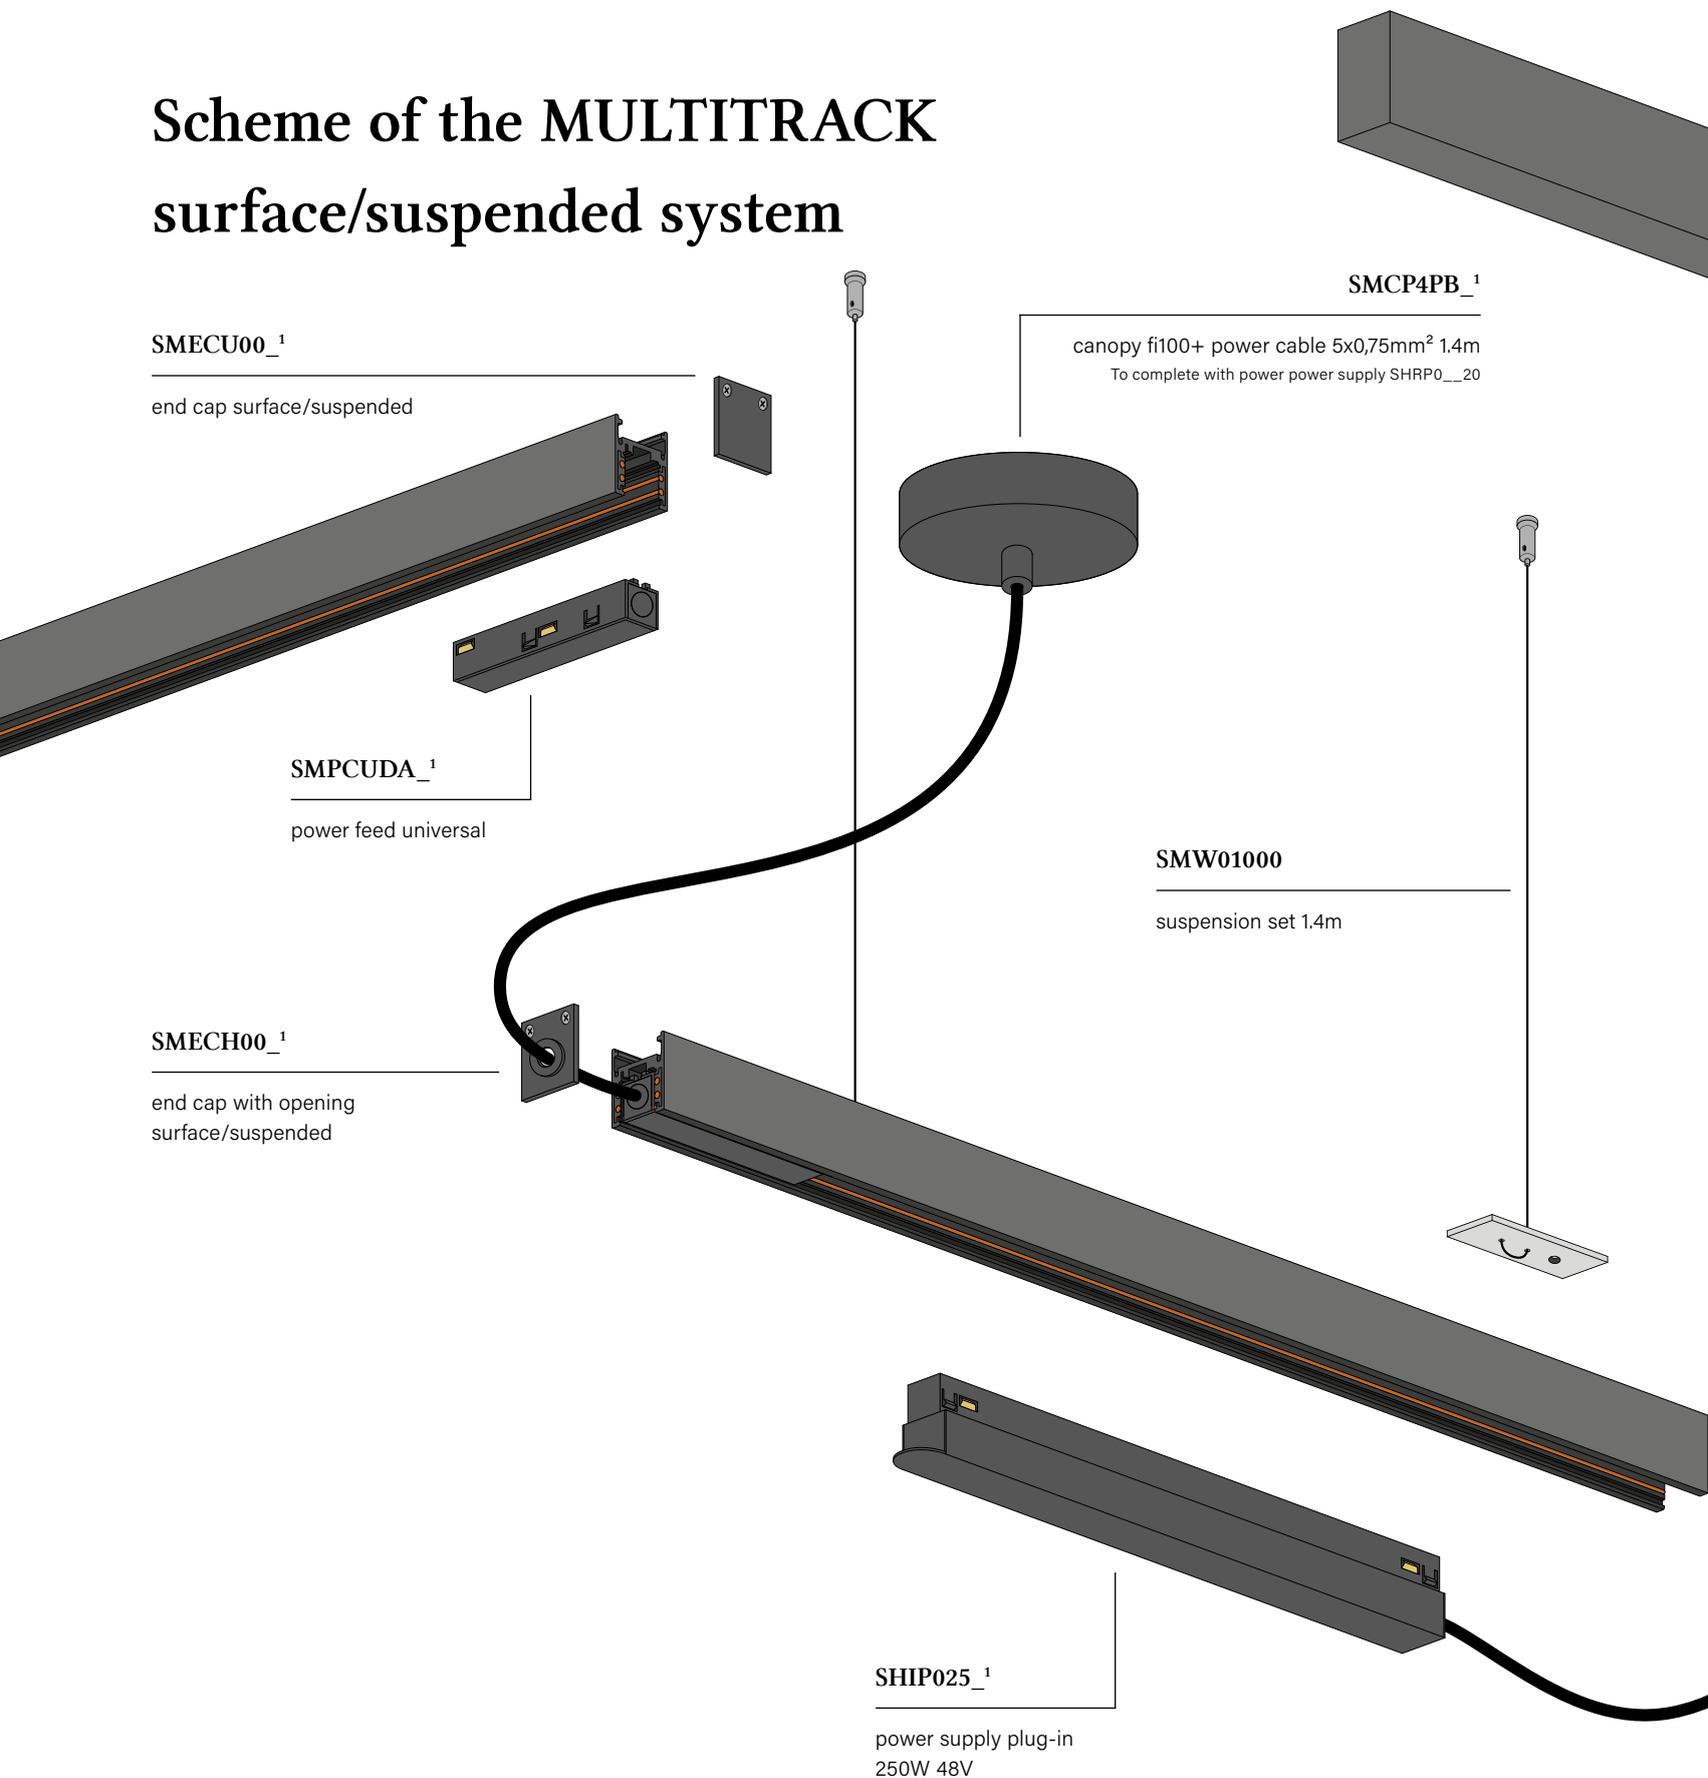

SMECU00_1

end cap surface/suspended

SMPCUDA_1

power feed universal

SMECH00_1

end cap with opening
surface/suspended

SMCP4PB_1

canopy fi100+ power cable 5x0,75mm² 1.4m
To complete with power power supply SHRP0_20

SMW01000

suspension set 1.4m

SHIP025_1

power supply plug-in
250W 48V

SMCMMPB_1

canopy with power supply EM 100W 48V surface

SMPLUDA_1

electrical connector „L”
universal

SMCSU000

straight connector

SHIP010_1

power supply plug-in
100W 48V

SMASUDA_1

electrical straight connector
universal

SMCLU00_1


mechanical connector „L”
surface/suspended

SMCB200_1

canopy surface

SMPFUDA_1

electrical flexible
connector

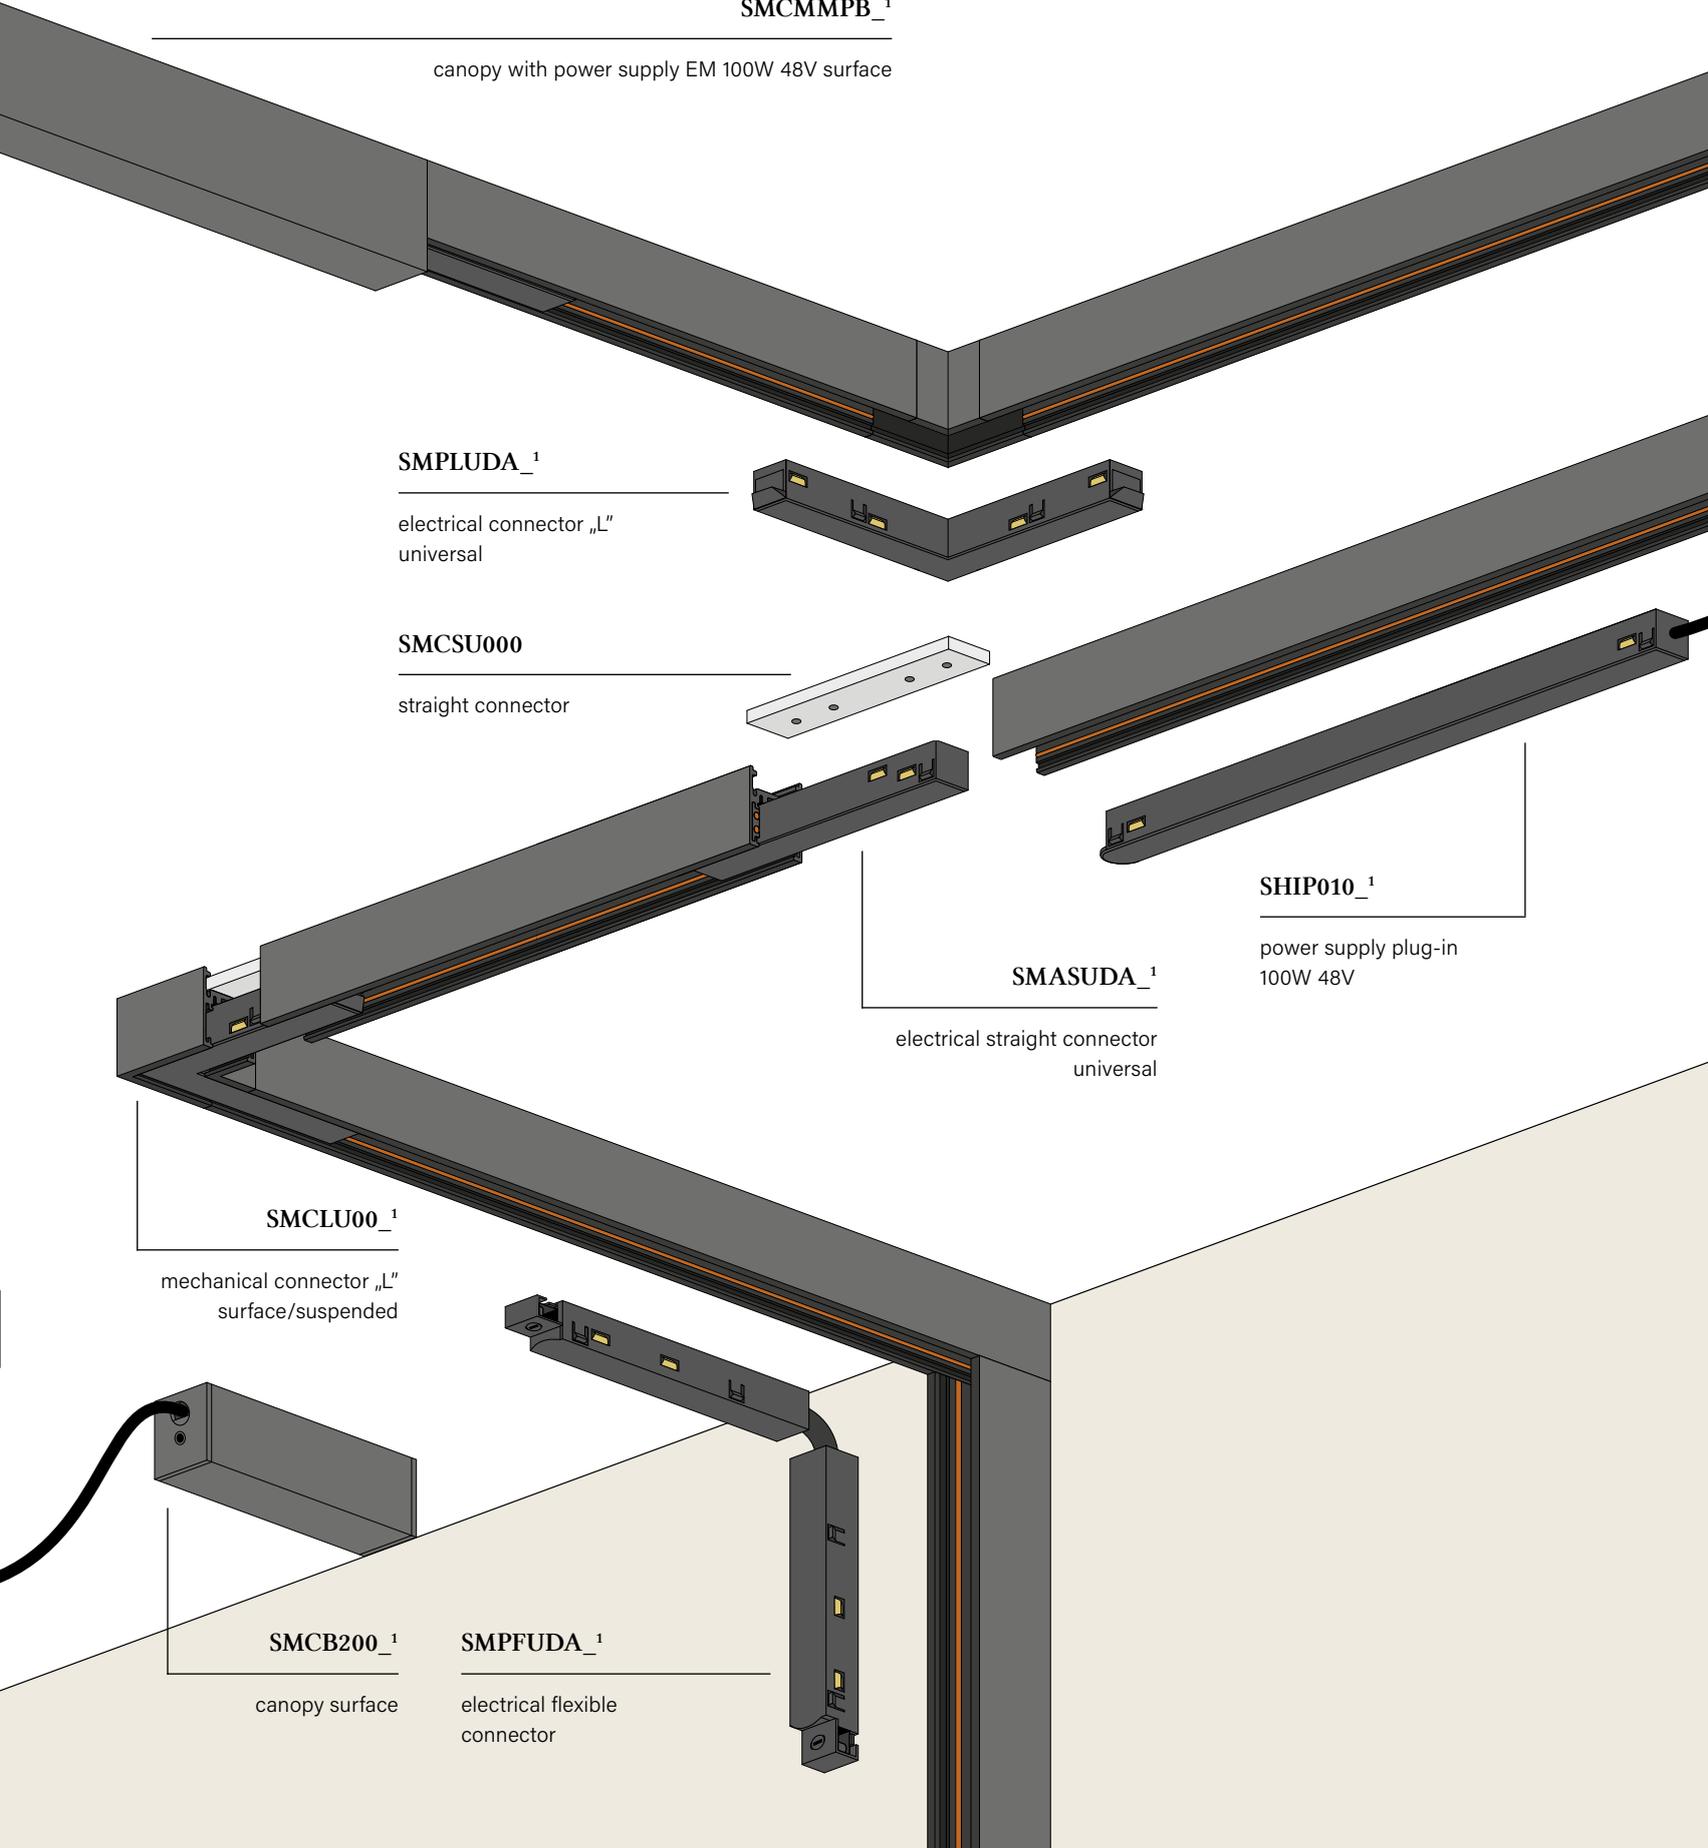

SMECF00_1

end cap recessed

SMPCUDA_1

power feed universal

To route the cable from the power feed to the power supply during installation, a hole must be drilled in the track

SMRFU00U

mounting brackets set (2 pcs.)
for recessed track

SHRP0__20

power supply


SHIP010_1

power supply plug-in
100W 48V

SMPFUDA_1

electrical flexible
connector

Scheme of the MULTITRACK recessed system

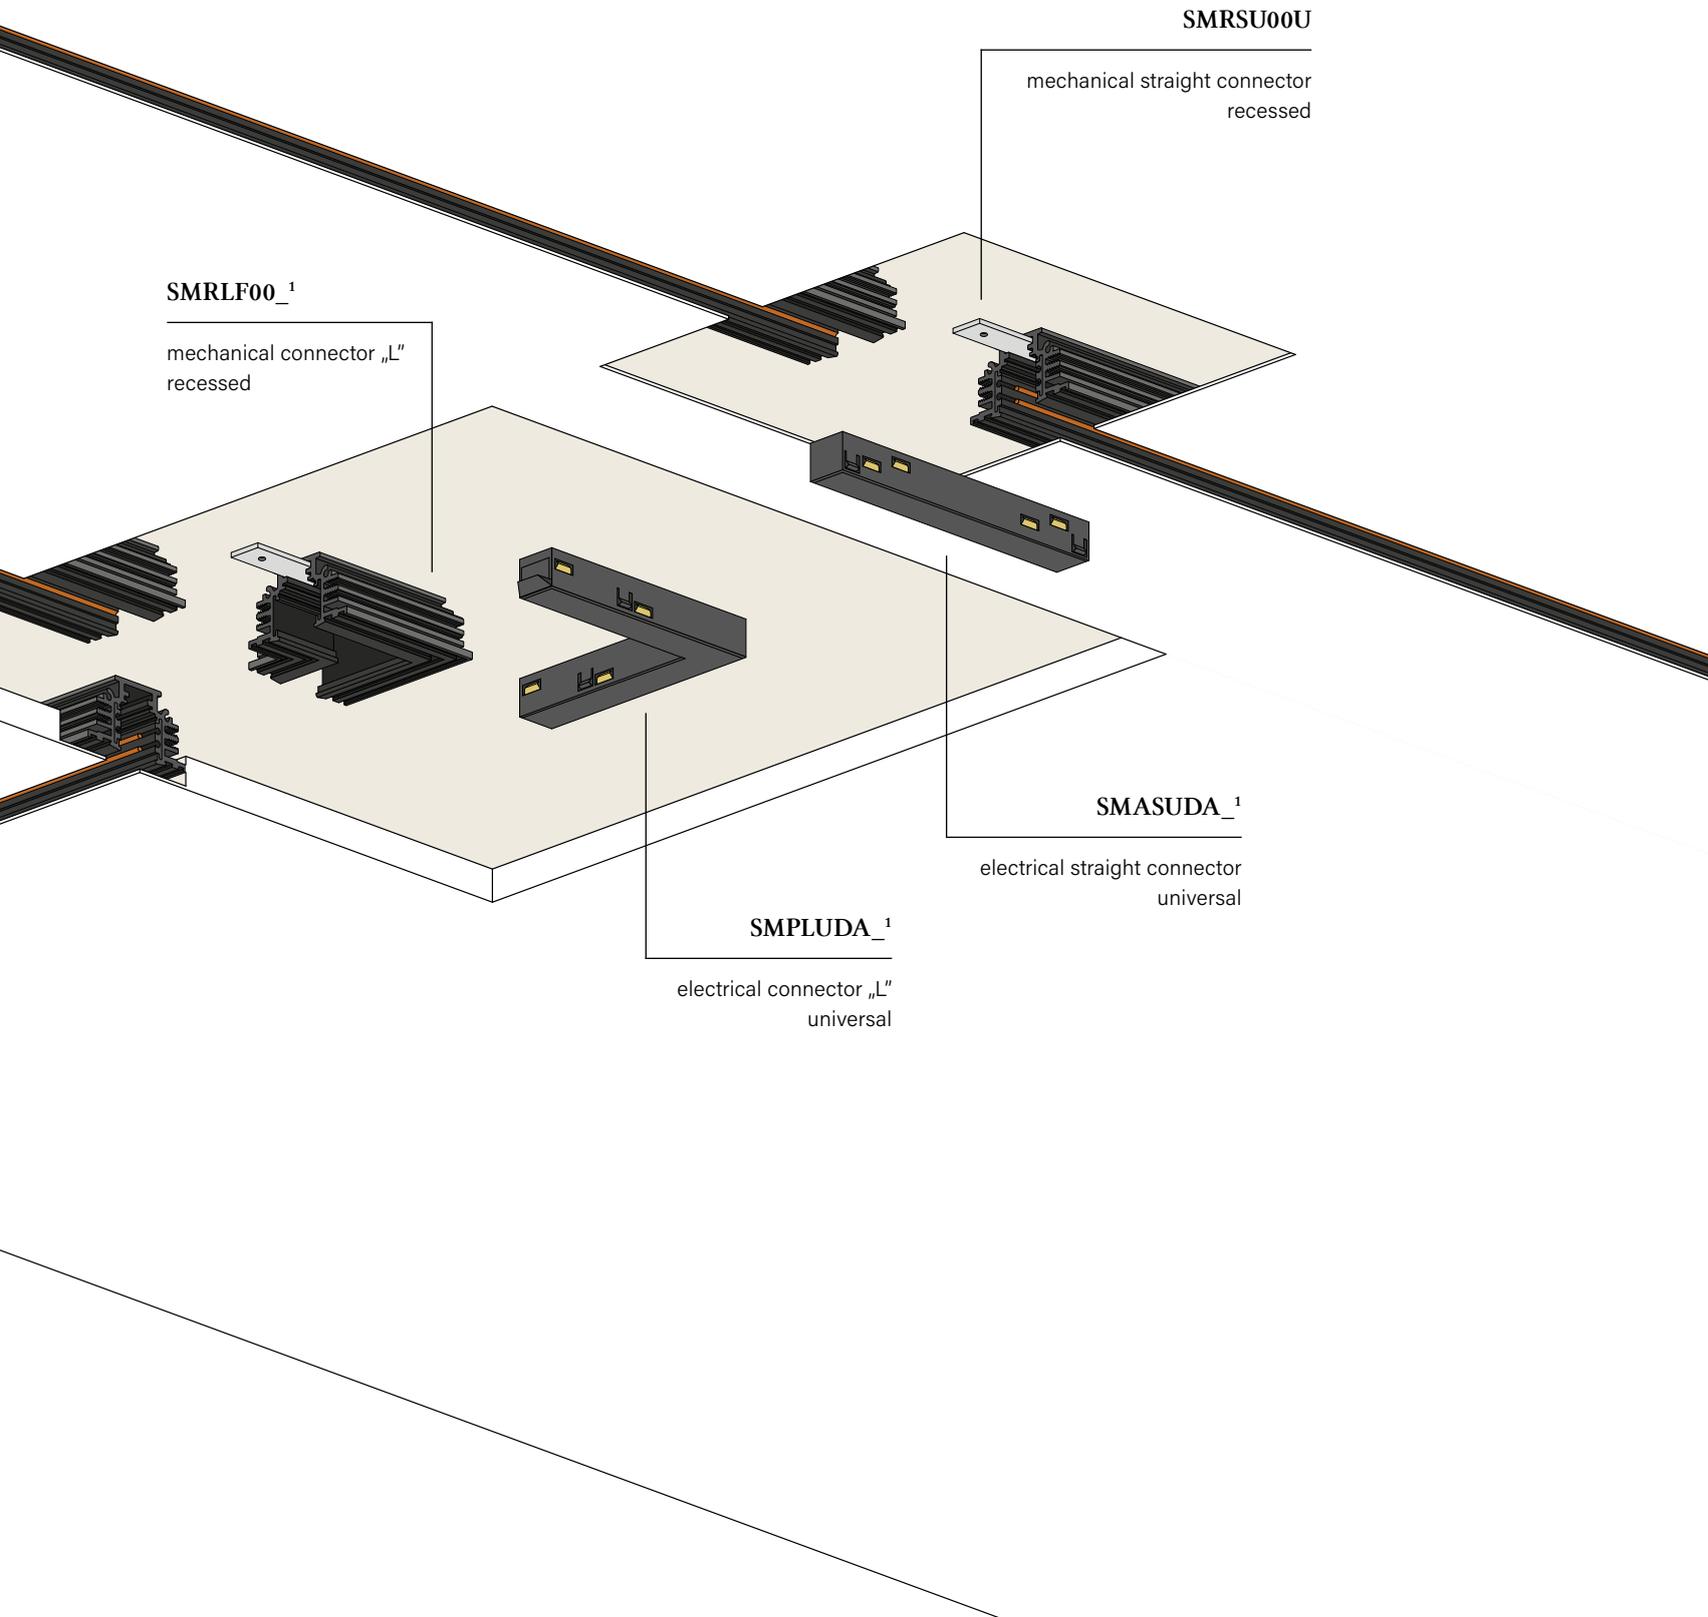


HIGH MULTITRACK

MULTITRACK features + more space

The HIGH MULTITRACK system was designed for super-discreet in plasterboard ceilings and walls. But while the final effect is wonderfully light, and the fixtures are sometimes almost unnoticeable to the user, in some projects the ease of installation also matters greatly. HIGH MULTITRACK recessed trim provides a reasonable compromise.


48V | max 3 metres in one piece | ON-OFF (one or two circuits) | DALI
Can be safely installed on walls | requires 48V power supply

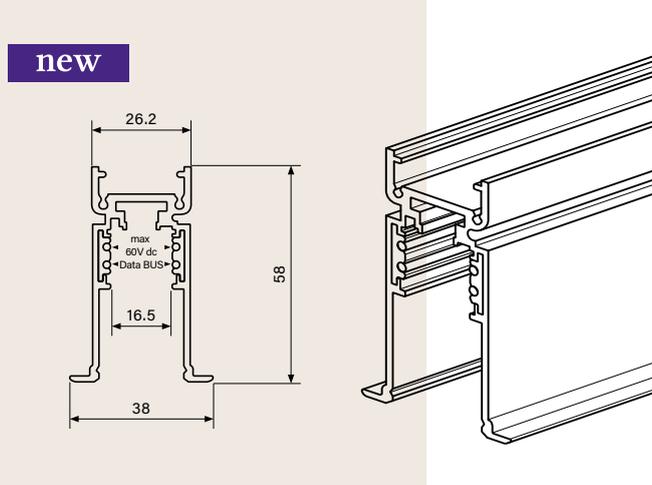

tracks	colour	cat. no
recessed trim 1000mm	black	SCRM1DAB
	white	SCRM1DAW
recessed trim 2000mm	black	SCRM2DAB
	white	SCRM2DAW
recessed trim 3000mm	black	SCRM3DAB
	white	SCRM3DAW






Two in one = lighting in any direction

Does a 48V system come with certain limitations? Well... no. With this update it is possible to combine museum spotlights and some uplights and a decorative suspension. And quite possibly there would be still some soon left for new ideas to emerge in the future.

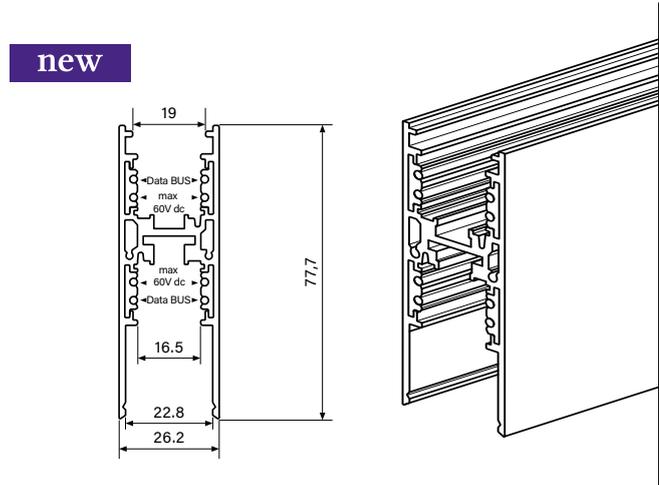

tracks	colour	cat. no
suspended up&down 1000mm	black	SUSM1DAB
suspended up&down 2000mm	black	SUSM2DAB
suspended up&down 3000mm	black	SUSM3DAB

Maximum load

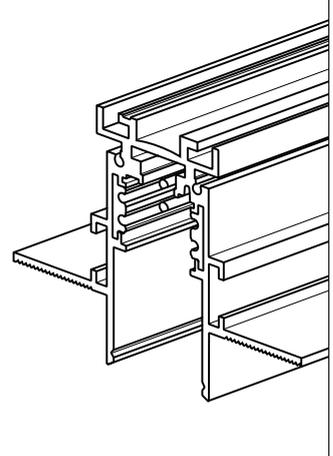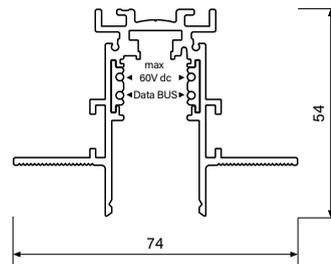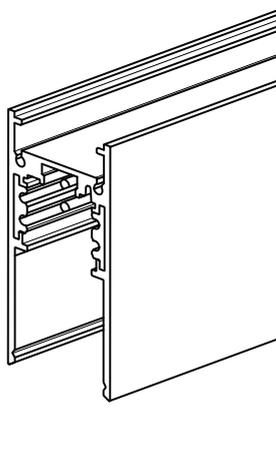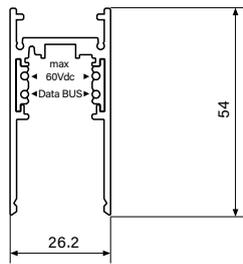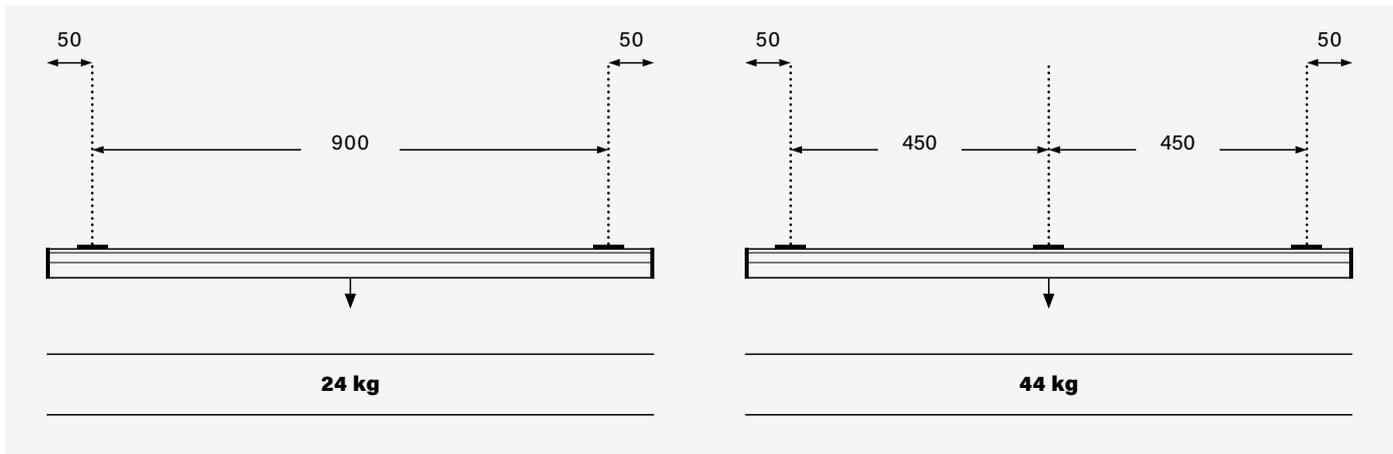

tracks	colour	cat. no
surface 1000mm	black	SHCM1DAB
	white	SHCM1DAW
surface 2000mm	black	SHCM2DAB
	white	SHCM2DAW
surface 3000mm	black	SHCM3DAB
	white	SHCM3DAW
suspended 1000mm	black	SHSM1DAB
	white	SHSM1DAW
suspended 2000mm	black	SHSM2DAB
	white	SHSM2DAW
suspended 3000mm	black	SHSM3DAB
	white	SHSM3DAW

tracks	colour	cat. no
recessed 1000mm	black	SHRM1DAB
	white	SHRM1DAW
recessed 2000mm	black	SHRM2DAB
	white	SHRM2DAW
recessed 3000mm	black	SHRM3DAB
	white	SHRM3DAW

NEW PRODUCT

SUECU00_1 **new**

end cap suspended

SUSLU00_1 **new**

mechanical connector „L”
suspended

SMPLUDA_1

electrical connector „L”
universal

SMW01000

suspension set 1.4m

SMCSU000

straight connector


SHECU00_1

end cap

SMASUDA_1

electrical straight connector
universal

Scheme of the HIGH MULTITRACK surface/suspended system

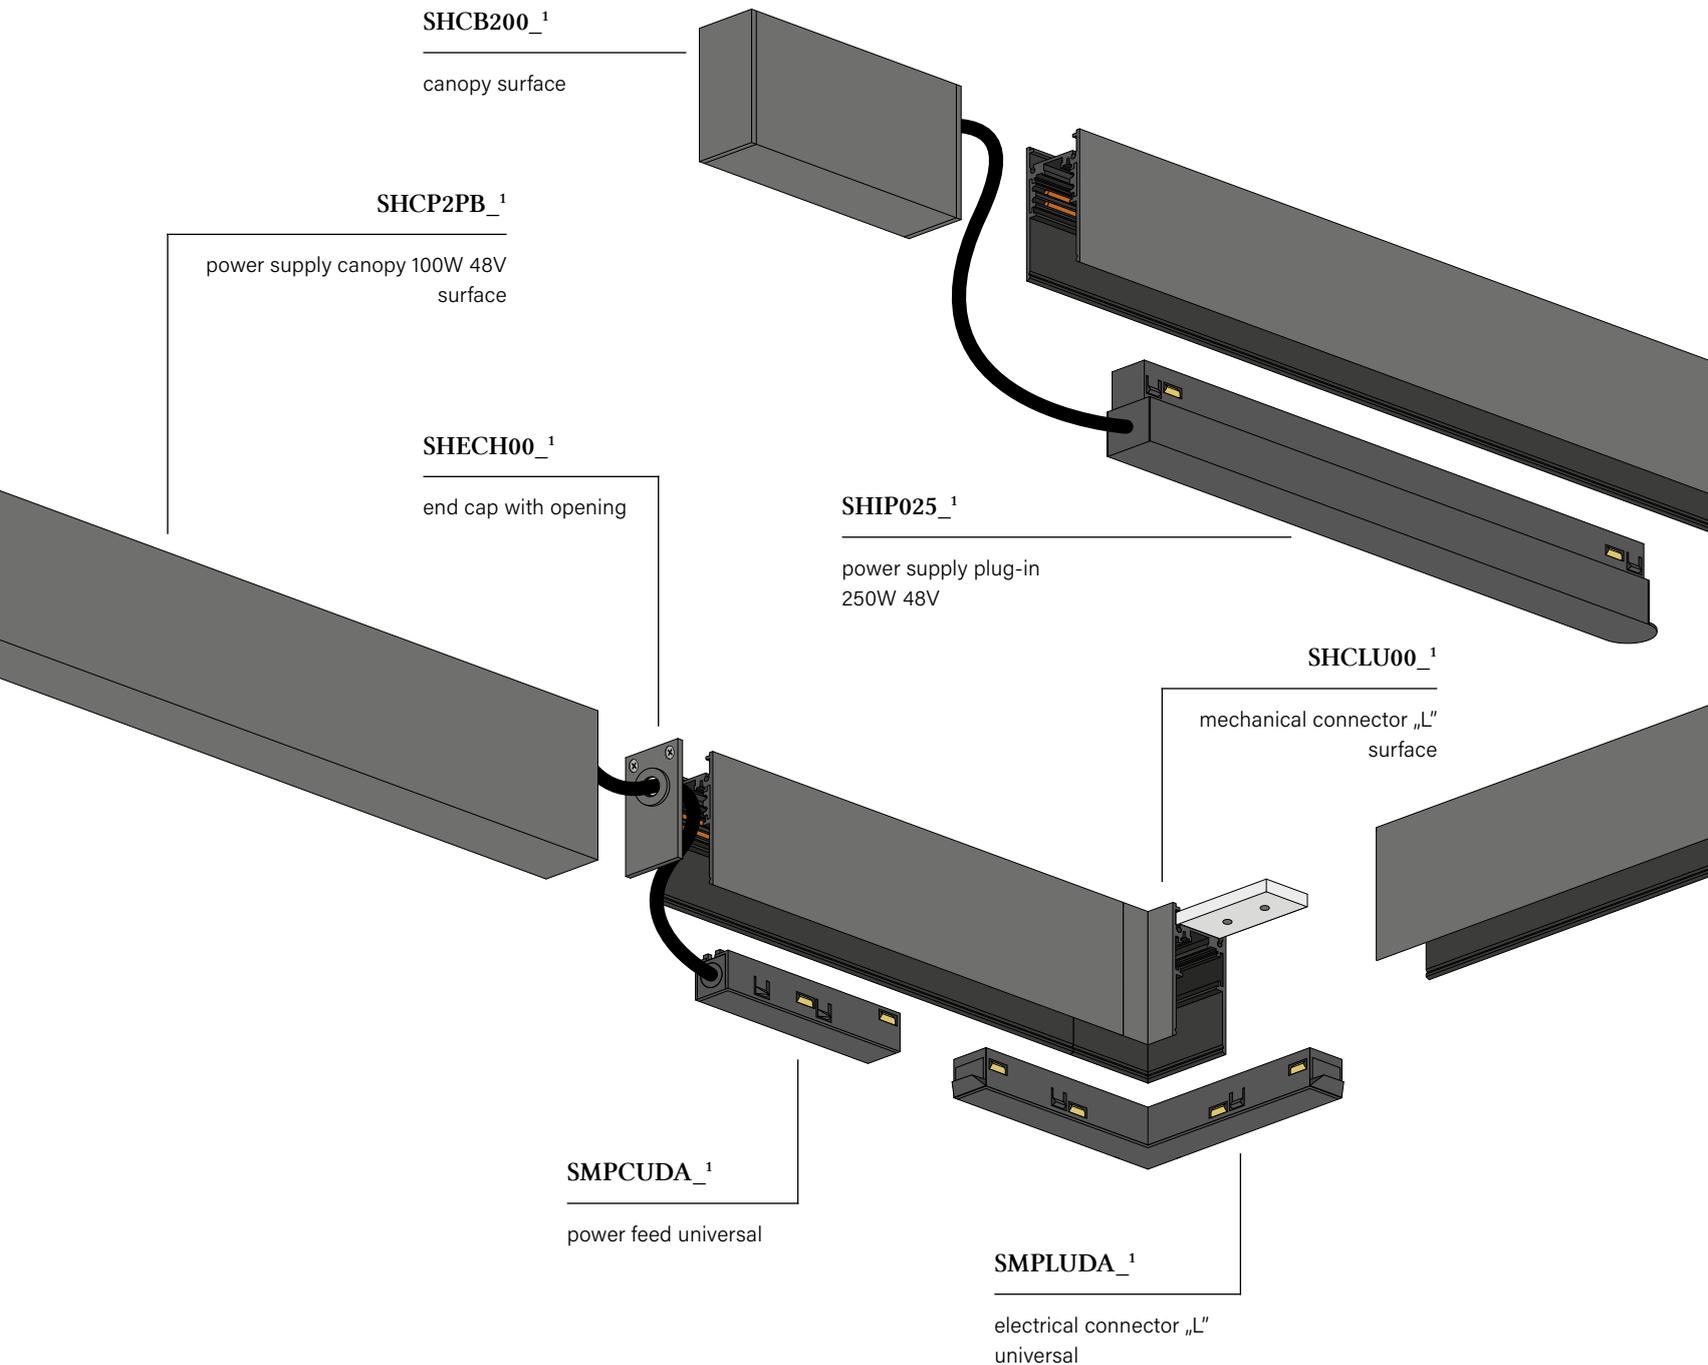

SMRSU00U

mechanical straight connector
recessed

SMASUDA_1

electrical straight connector
universal

SHECH00_1

end cap with opening

SHRP0__20

power supply

SMPCUDA_1

power feed universal

SHRMFM00U

installation template

SHRFU00_1

mechanical connector
wall-ceiling recessed

SMPFUDA_1

electrical flexible
connector

SCRLF00_1 **new**

mechanical connector „L”
recessed trim

SCRFU00U **new**

mounting bracket for
recessed trim

new SCECU00_1

end cap recessed trim

NEW PRODUCT

SHRLF00_1

mechanical connector „L”
recessed

new SCECH00_1

end cap with opening recessed trim

SHECU00_1

end cap

SMPLUDA_1

electrical connector „L”
universal

SHRMFF00_1

installation cover 2m

Scheme of the HIGH MULTITRACK recessed system

Example of connecting tracks

Tracks are not only characterized by their distinctive design of strong lines but also serve as a universal lighting solution. Powering multiple fixtures from a single electrical point and the ease of changing their arrangement within the track provide great flexibility. Does your project require creating a wall-ceiling system? With the MULTITRACK and HIGH MULTITRACK systems, this is not a problem. We offer solutions that will work in any store, gallery, or private interior project.

Design: KaCeDe-Pracownia Projektowa


Hotel Antares, Gdynia

RAFTER mini points LED multitrack




Example of connecting tracks

SMRM_4 DA_1 recessed track

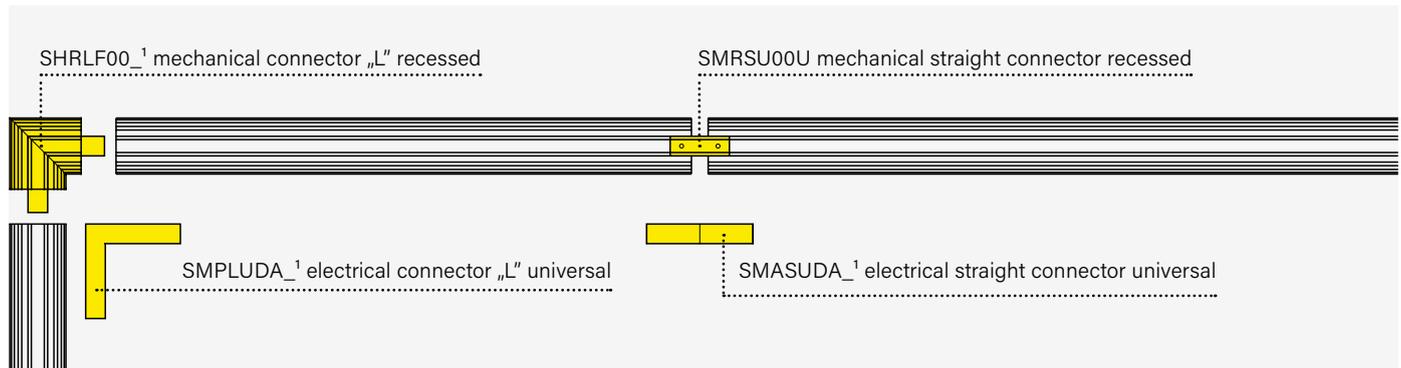


SMCM_4 DA_1 surface track | SMSM_4 DA_1 suspended track

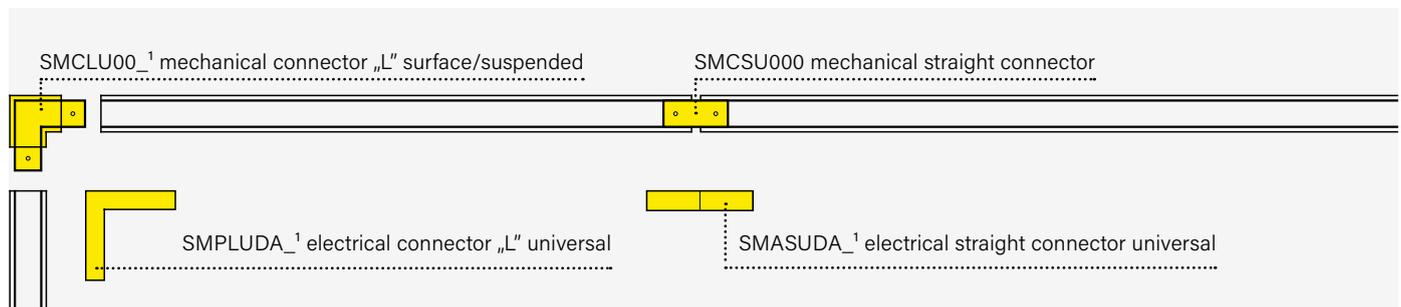


Examples of connecting ceiling-wall transitions


multitrack surface wall
multitrack surface ceiling

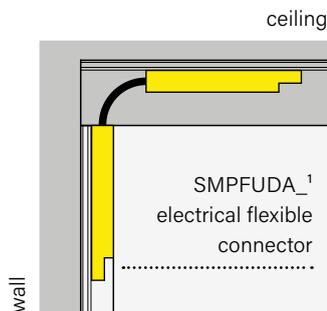






high multitrack recessed wall
high multitrack recessed ceiling

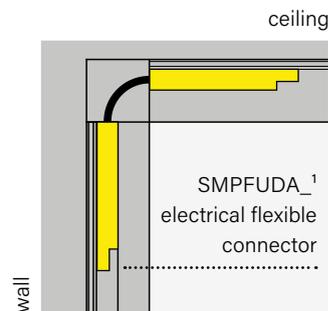

high multitrack recessed wall
multitrack surface ceiling

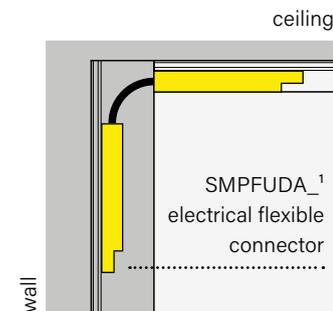


multitrack surface wall
high multitrack recessed ceiling

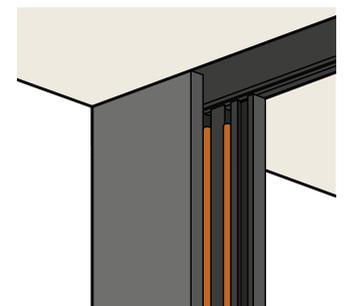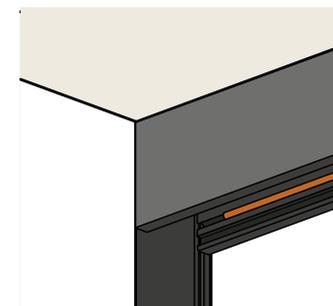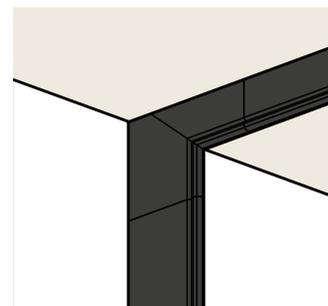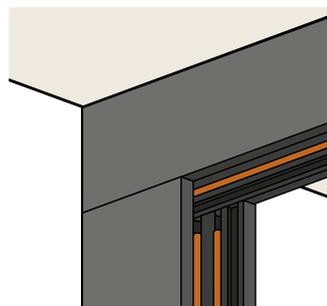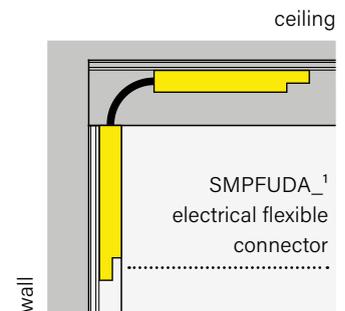


¹ finish: black (B) / white (W) | ⁴ length: 1m (1) / 2m (2)

Possibilities of connecting profiles with different types of power supplies


recessed high multitrack track + recessed power supply

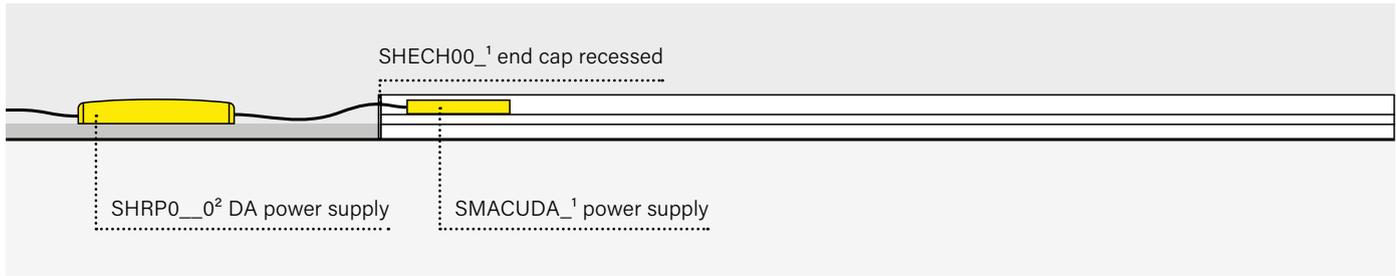


surface multitrack + surface power supply

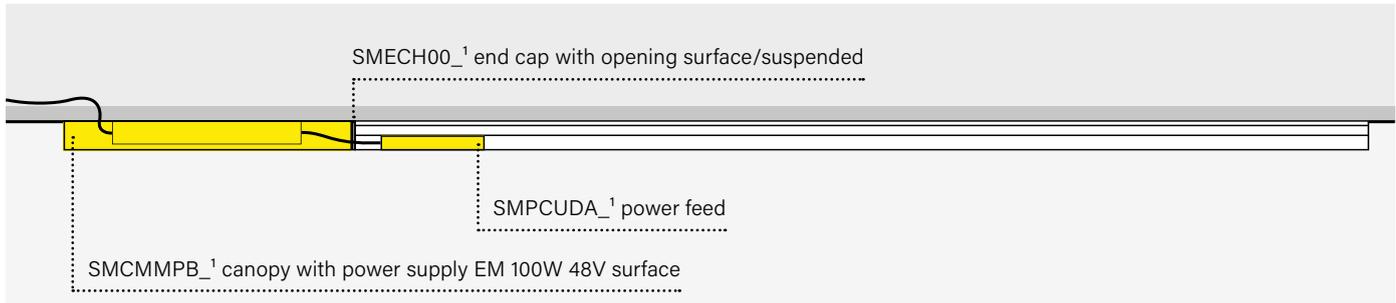


surface multitrack + recessed power supply

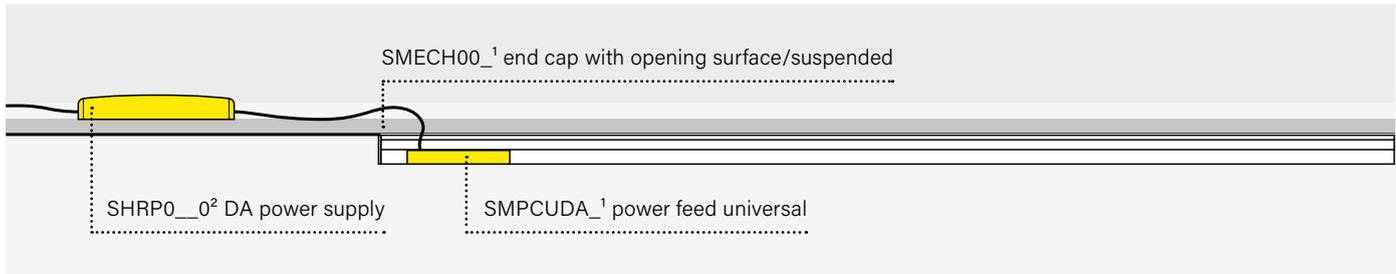

suspended multitrack + recessed power supply

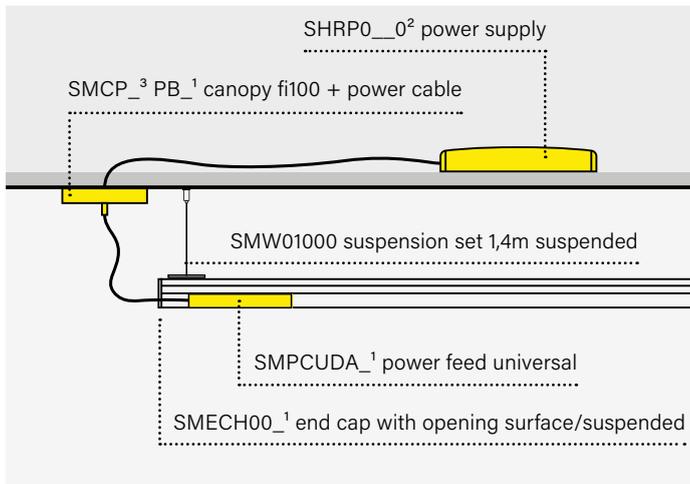


suspended multitrack + surface power supply

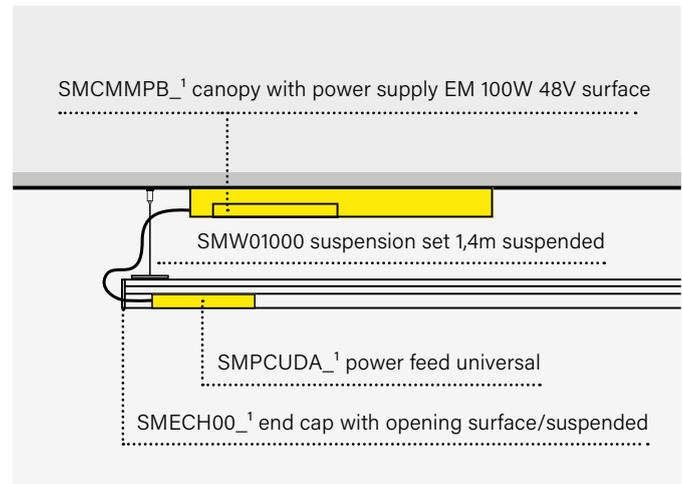


Possibilities of connecting profiles with different types of power supplies


suspended high multitrack up&down + single circuit
+ surface power supply

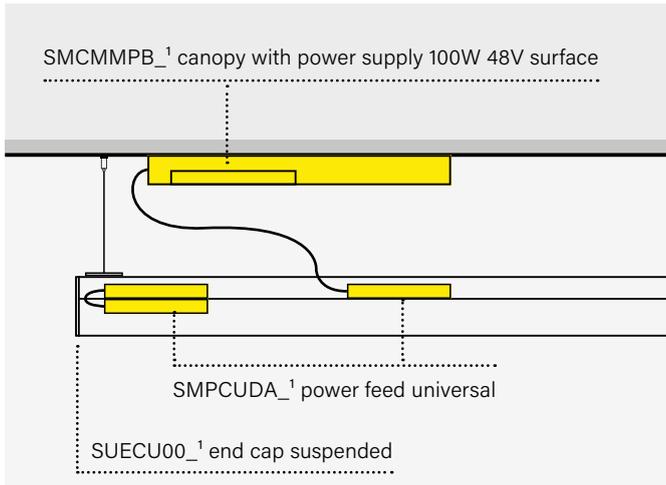



suspended high multitrack up&down + single circuit
+ recessed power supply

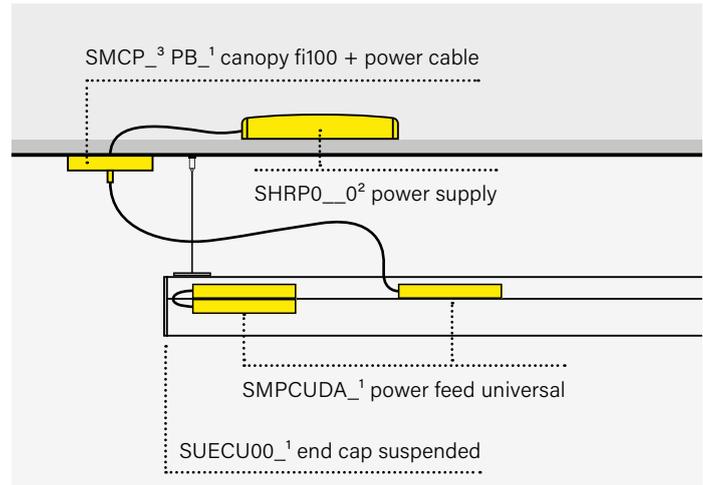

suspended high multitrack up&down + two circuits
+ surface power supply

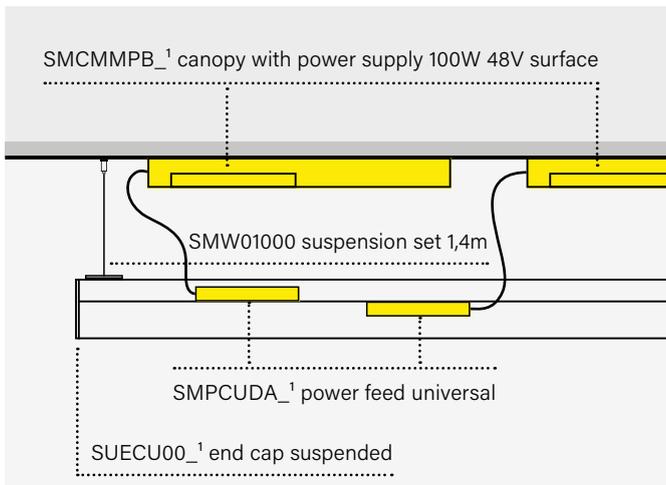

suspended high multitrack up&down + two circuits
+ recessed power supply

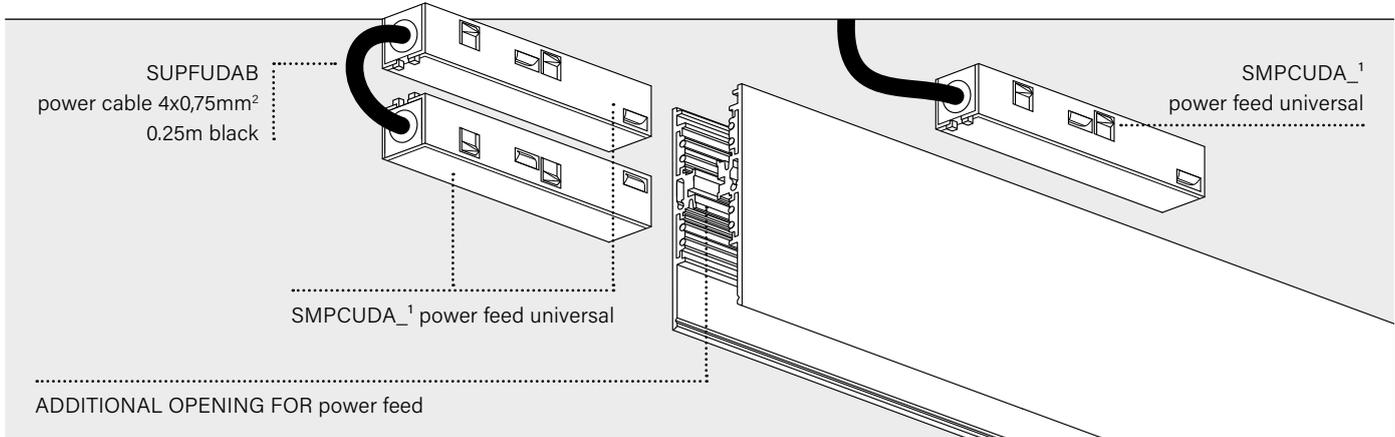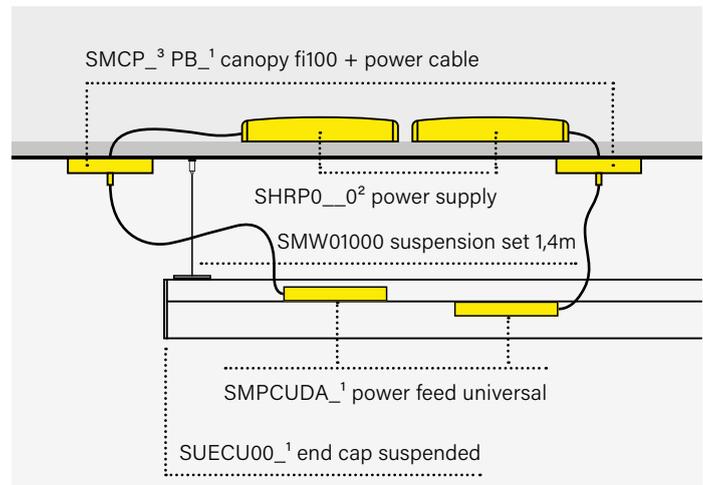

¹ finish: black (B) / white (W) | ² available power: 60W (60) / 100W (10) / 200W (20) / 250W (25) / 120 DIN (12) | ³ power cable: 2x0.75mm² (2) / 4x0.75mm² (4)

NEW PRODUCT

Flattrack



The most subtle track system on the market

Due to its extremely small dimensions, measuring only 6.7mm in height and 18mm in width, the FLATTRACK system is available exclusively in surface-mounted versions. With a safe 48V voltage, it can be confidently installed on walls.

With lengths of tracks reaching up to 3m, a set of accessories and a wide selection of lighting fixtures for the FLATTRACK system, there is flexibility to create diverse arrangements within interiors.


Copper wires run along the sides of the tracks, graphite-coated, making this system not only exceptionally discreet but also aesthetically pleasing.


PET mini LED flattrack | TUBE stiff LED flattrack | RAFTER points LED flattrack






PET mini 20 LED suspended flatrack | RAFTER mini points move 23 LED flatrack

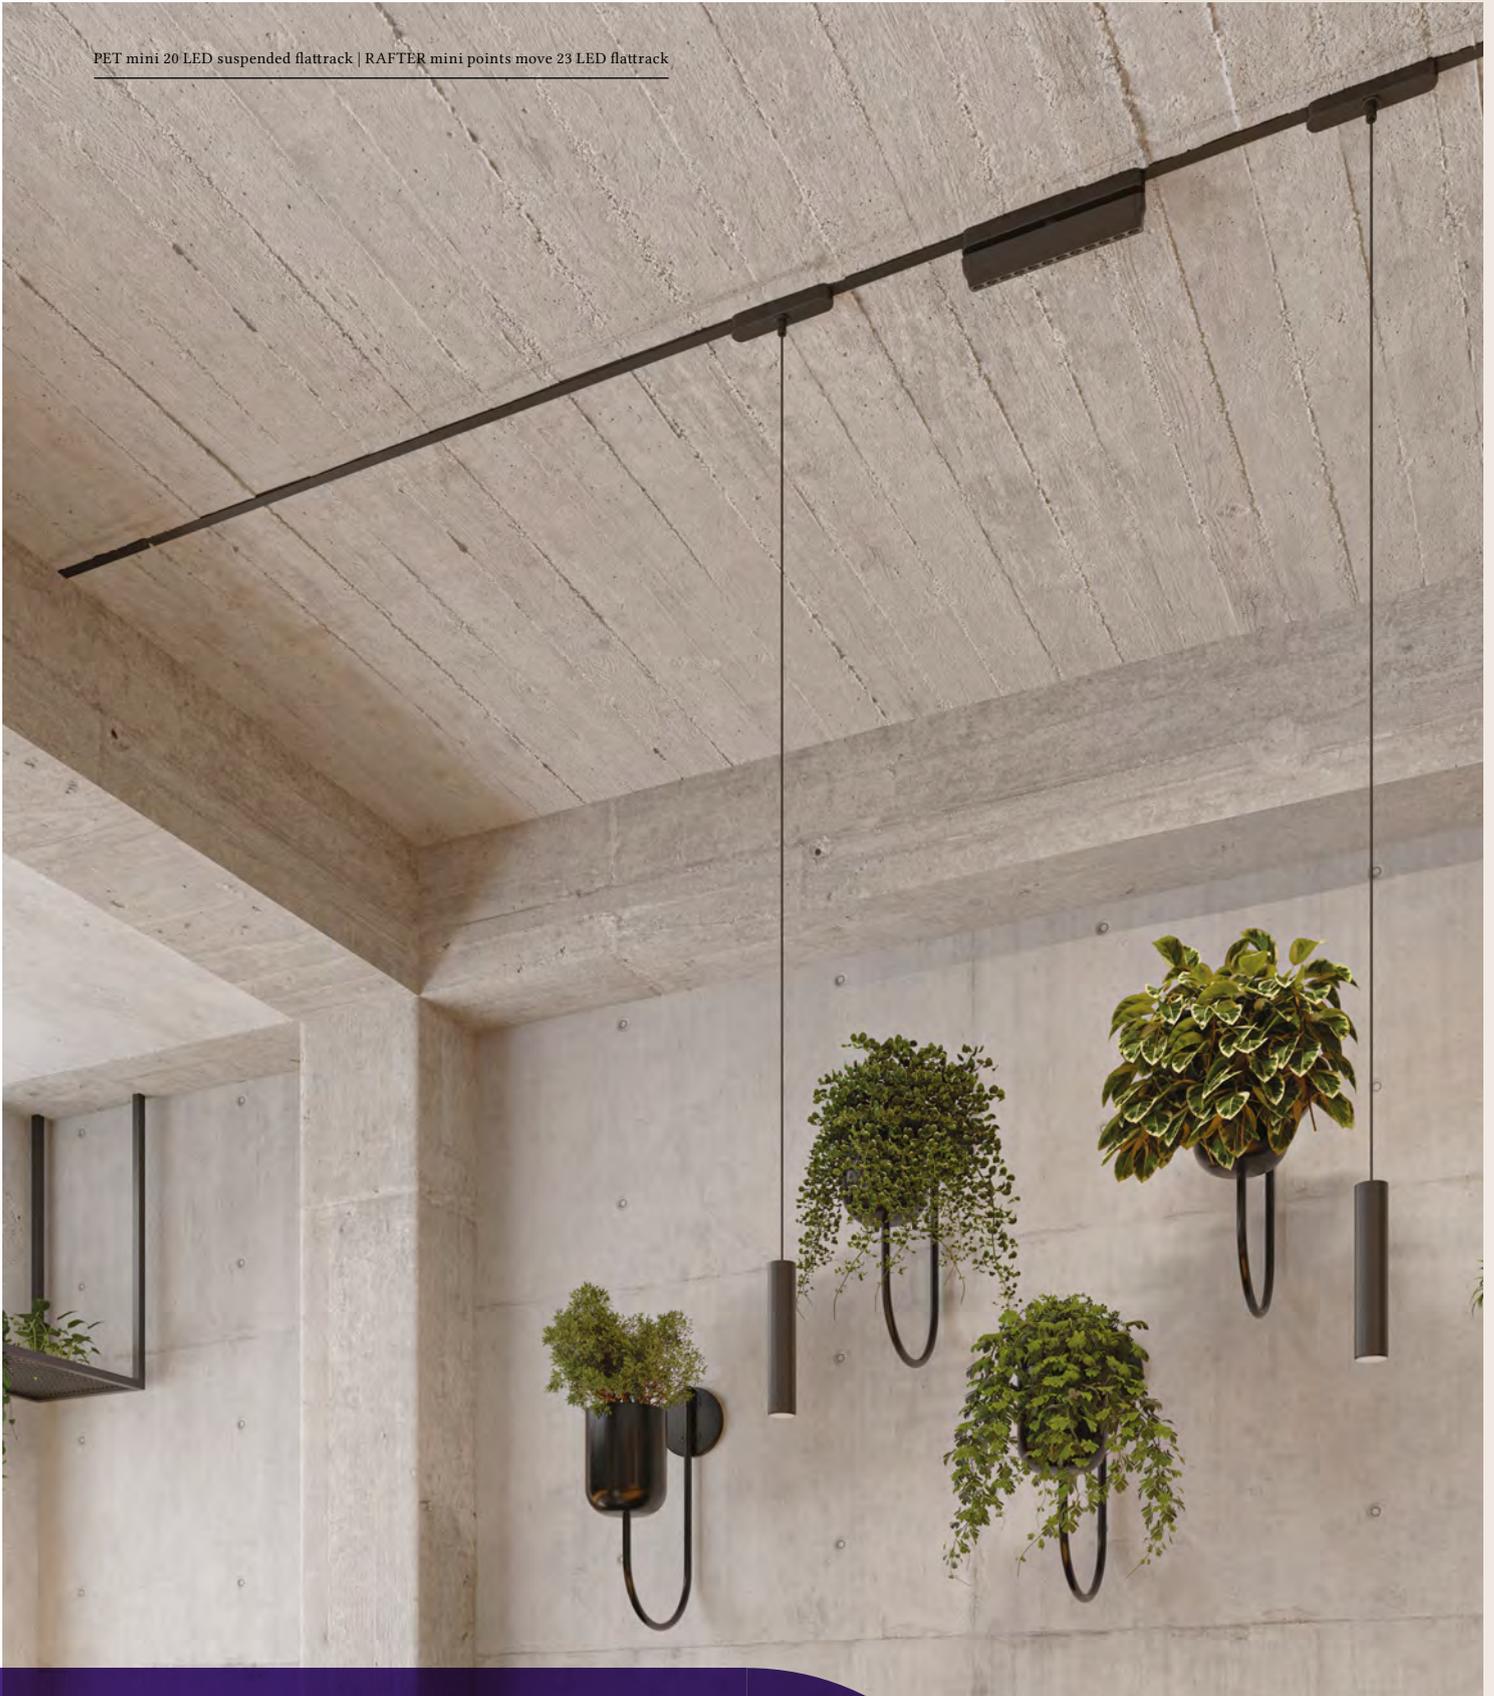

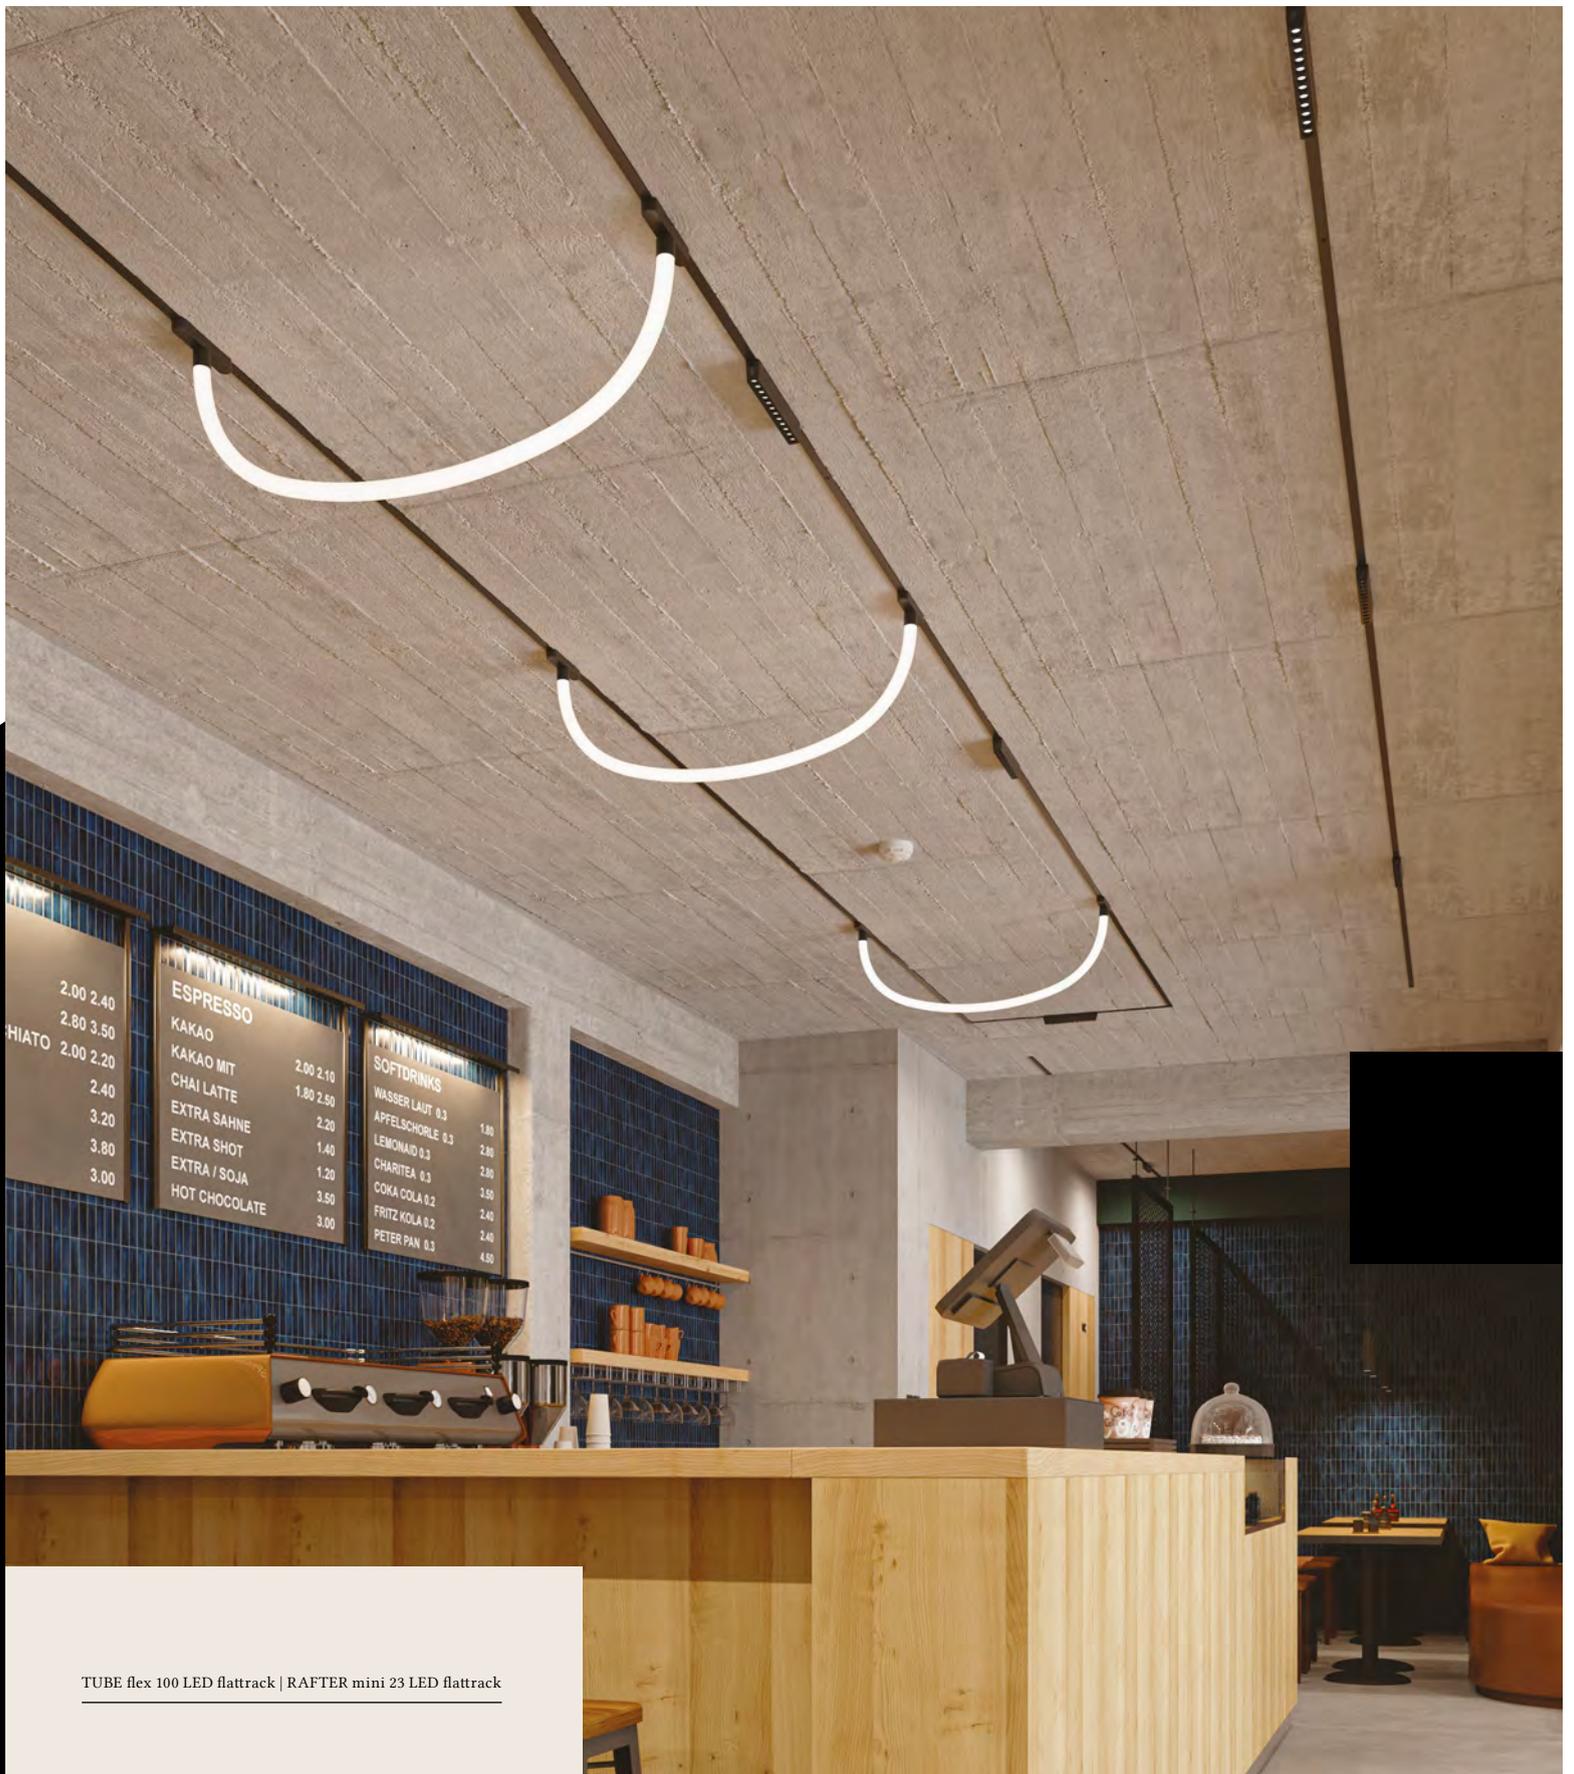

TUBE flex 100 LED flattrack | RAFTER mini 23 LED flattrack

QRLED next suspended flatrack | HYPER zoom LED flatrack | MODERN BALL LED table

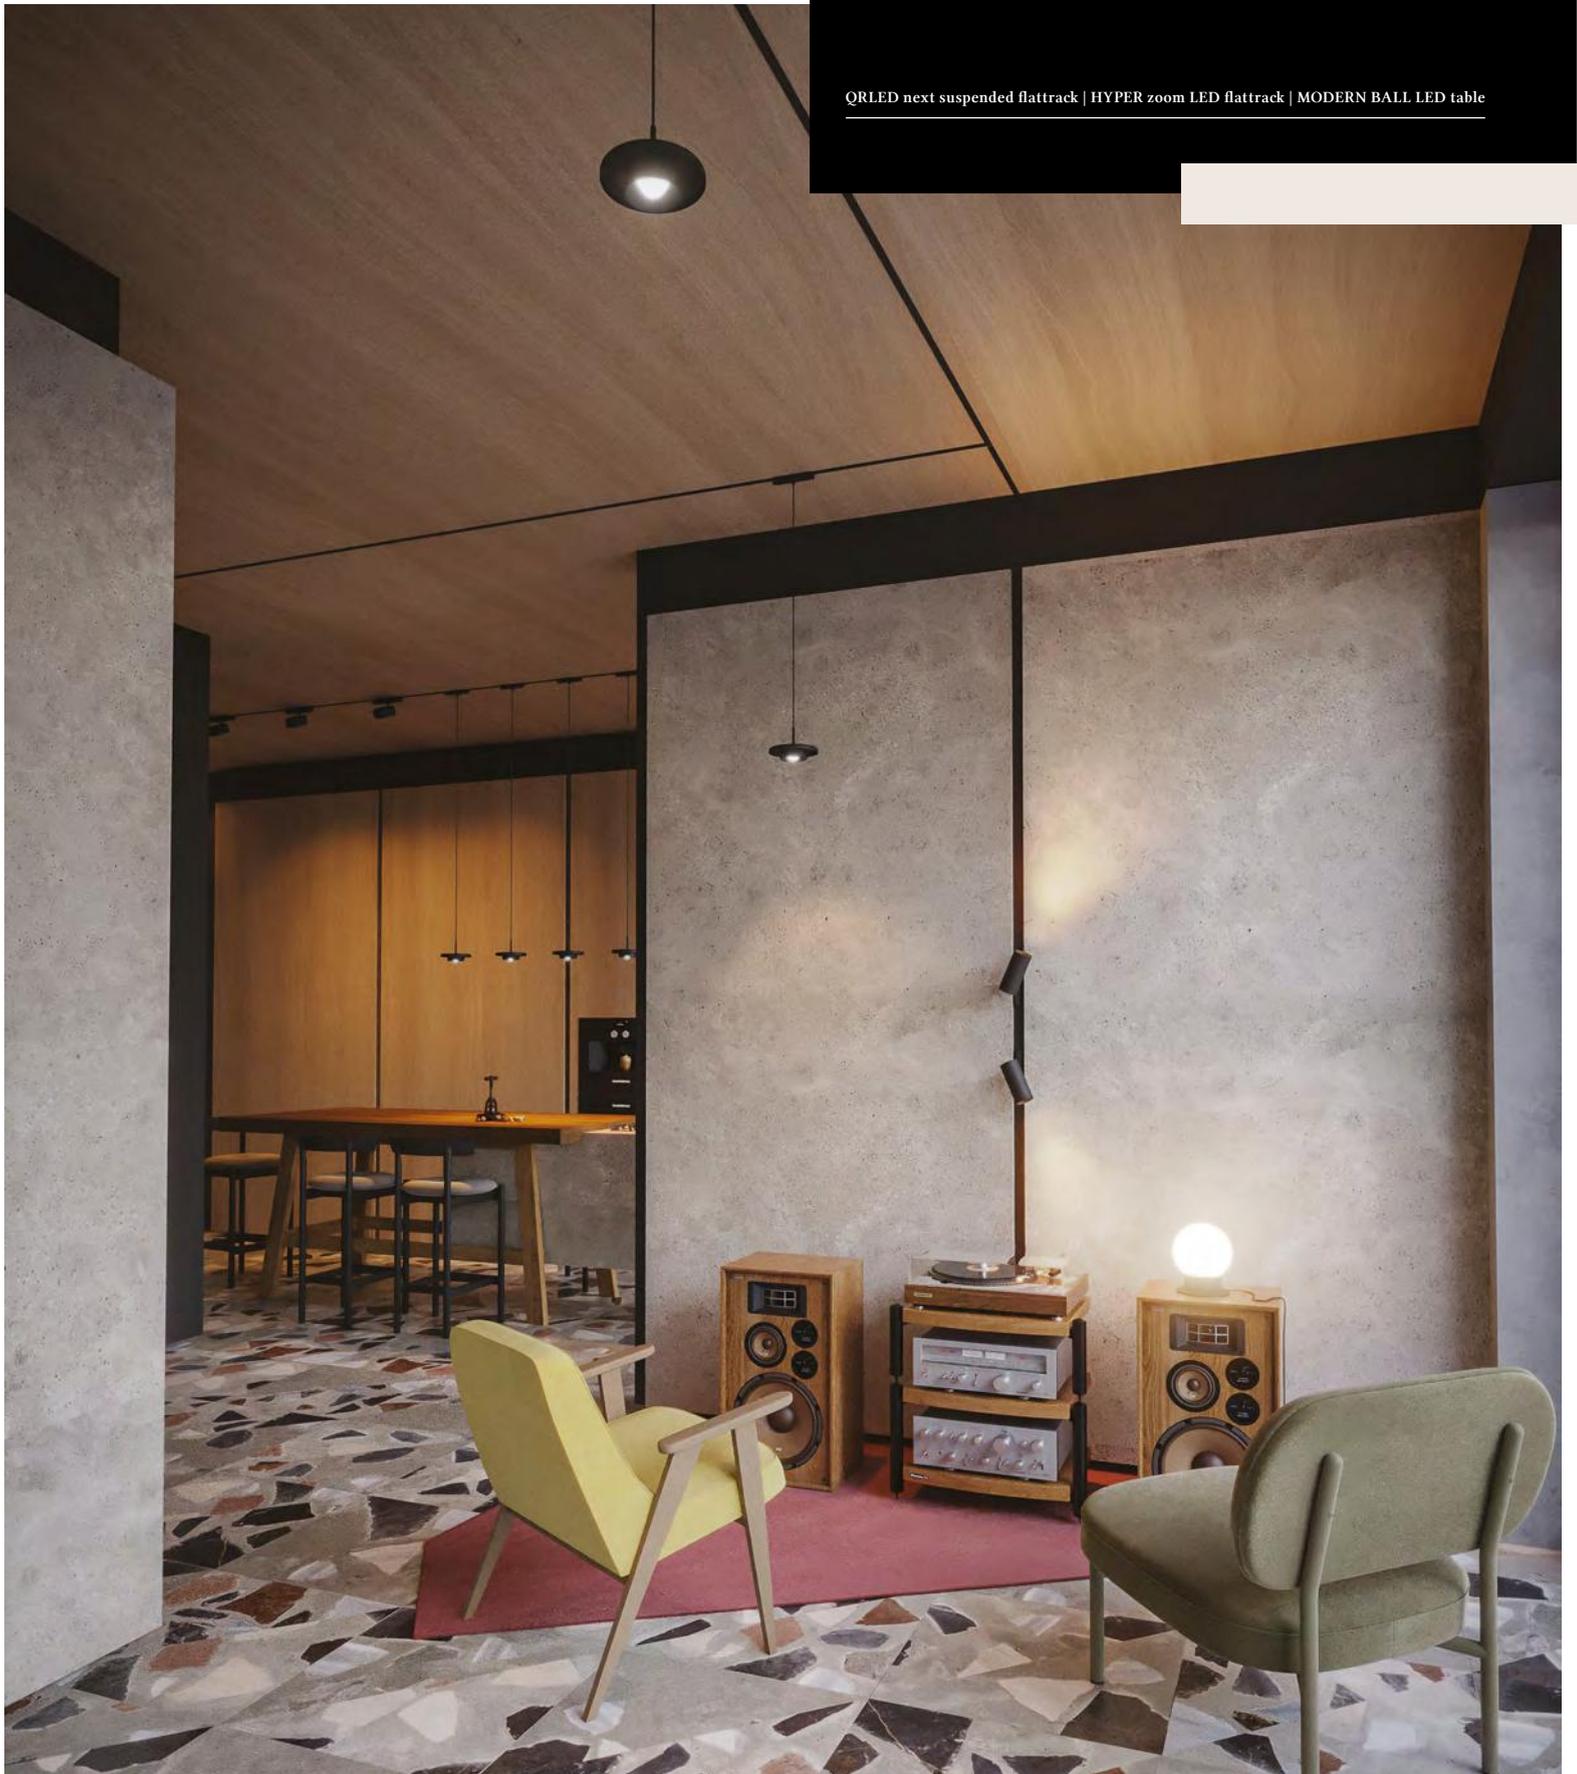


Scheme of the FLATTRACK surface system

Flattrack is our lowest 48V track system. The low voltage allows for great flexibility of application - even within arm's reach. At the same time, the compact dimensions of the flattrack are the solution where we don't want a protruding cable track system, but it cannot be recessed into the ceiling. The entire system is easy to install and, most importantly, ready to be equipped with a wide range of dedicated lighting fixtures.

48V | max 3 metres in one piece | ON-OFF
 Extremely thin | can be safely installed on walls
 Requires 48V power supply | DALI version coming soon


Best for homes, restaurants, small exhibitions

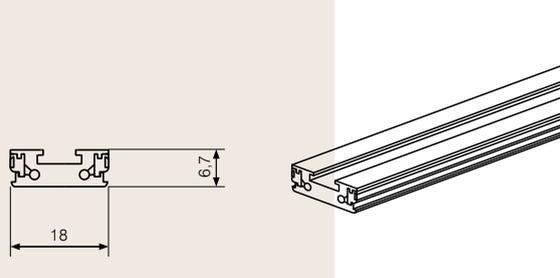

tracks	colour	cat. no
surface 1000mm	black	SFCM100B
	white	SFCM100W
surface 2000mm	black	SFCM200B
	white	SFCM200W
surface 3000mm	black	SFCM300B
	white	SFCM300W

SFPLU00B

electrical connector „L“ black

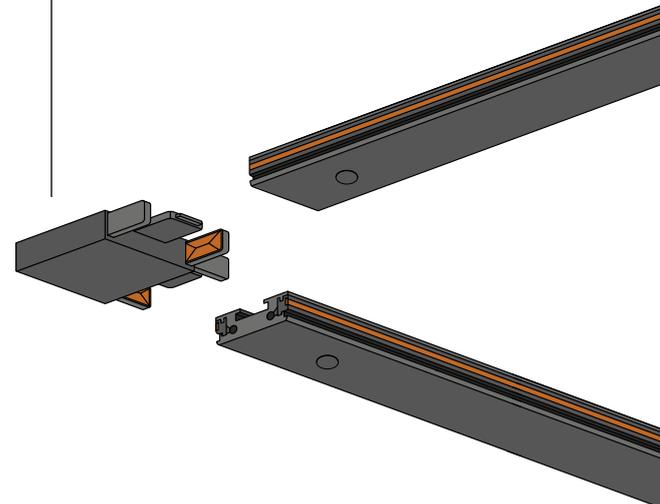


SFECU00B

end cap black

SFPCU00B

power end universal black

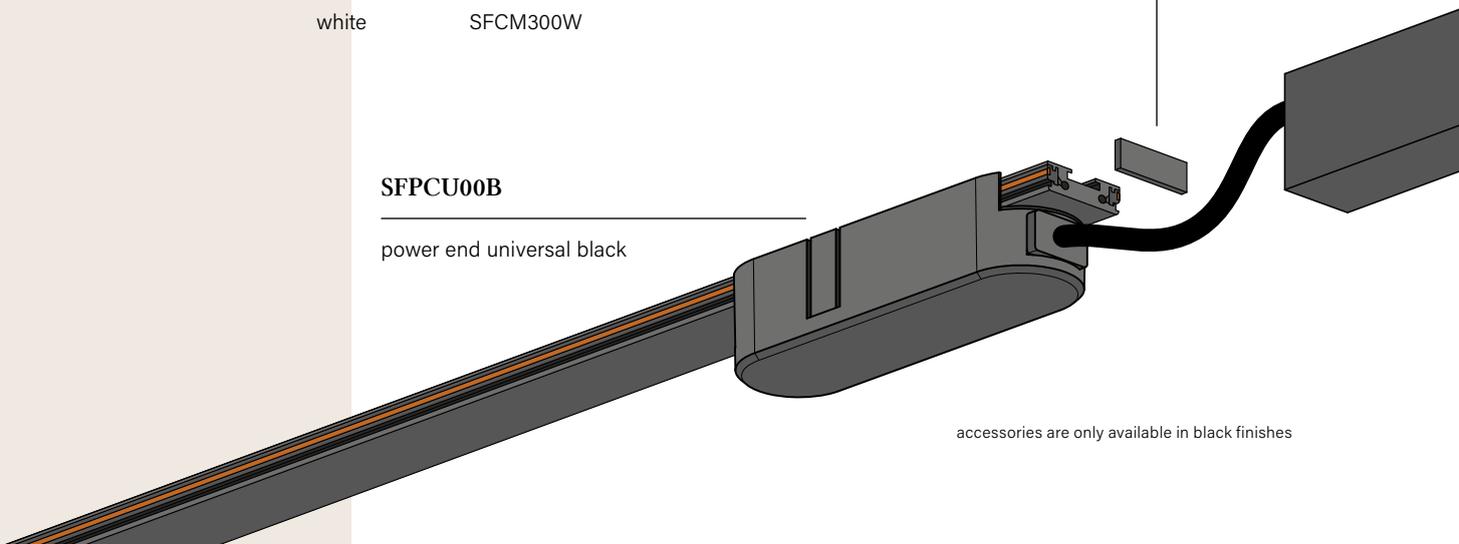

accessories are only available in black finishes

SFPMU12B

power adaptor 120W black

SFASU00B

electrical straight connector
universal black

SFATU00B

electrical corner connector „T“ black

SFRWU00B

electrical wall-ceiling connector black

SMCMMPB_1

canopy with power supply EM 100W 48V surface

Microtrack

NEW
PRODUCT



Exceptionally discreet form with numerous possibilities

The track systems of the MICROTRACK are available in both recessed and surface-mounted versions. Their compact dimensions allow for the creation of exceptionally subtle compositions on the walls and ceilings.

Lighting fixture adapters are inserted into the middle of the track, seamlessly integrating with the discreet line of the tracks themselves. A complete set of accessories and a wide selection of fixtures provide ample creative freedom, now including bent 'corners'!


Safe 48V voltage allows for convenient installation within reach. It requires the use of a separate power supply, available in various versions - with a surface-mounted box for installation in a suspended ceiling, as well as for installation in a distribution box.



PET mini LED microtrack



All the tracks in this interior have been supplied with 48V power. If there is a 230V power supply in the interior, it is necessary to add power box with opening for cable 100W 48V surface black (SOCP2PBB)

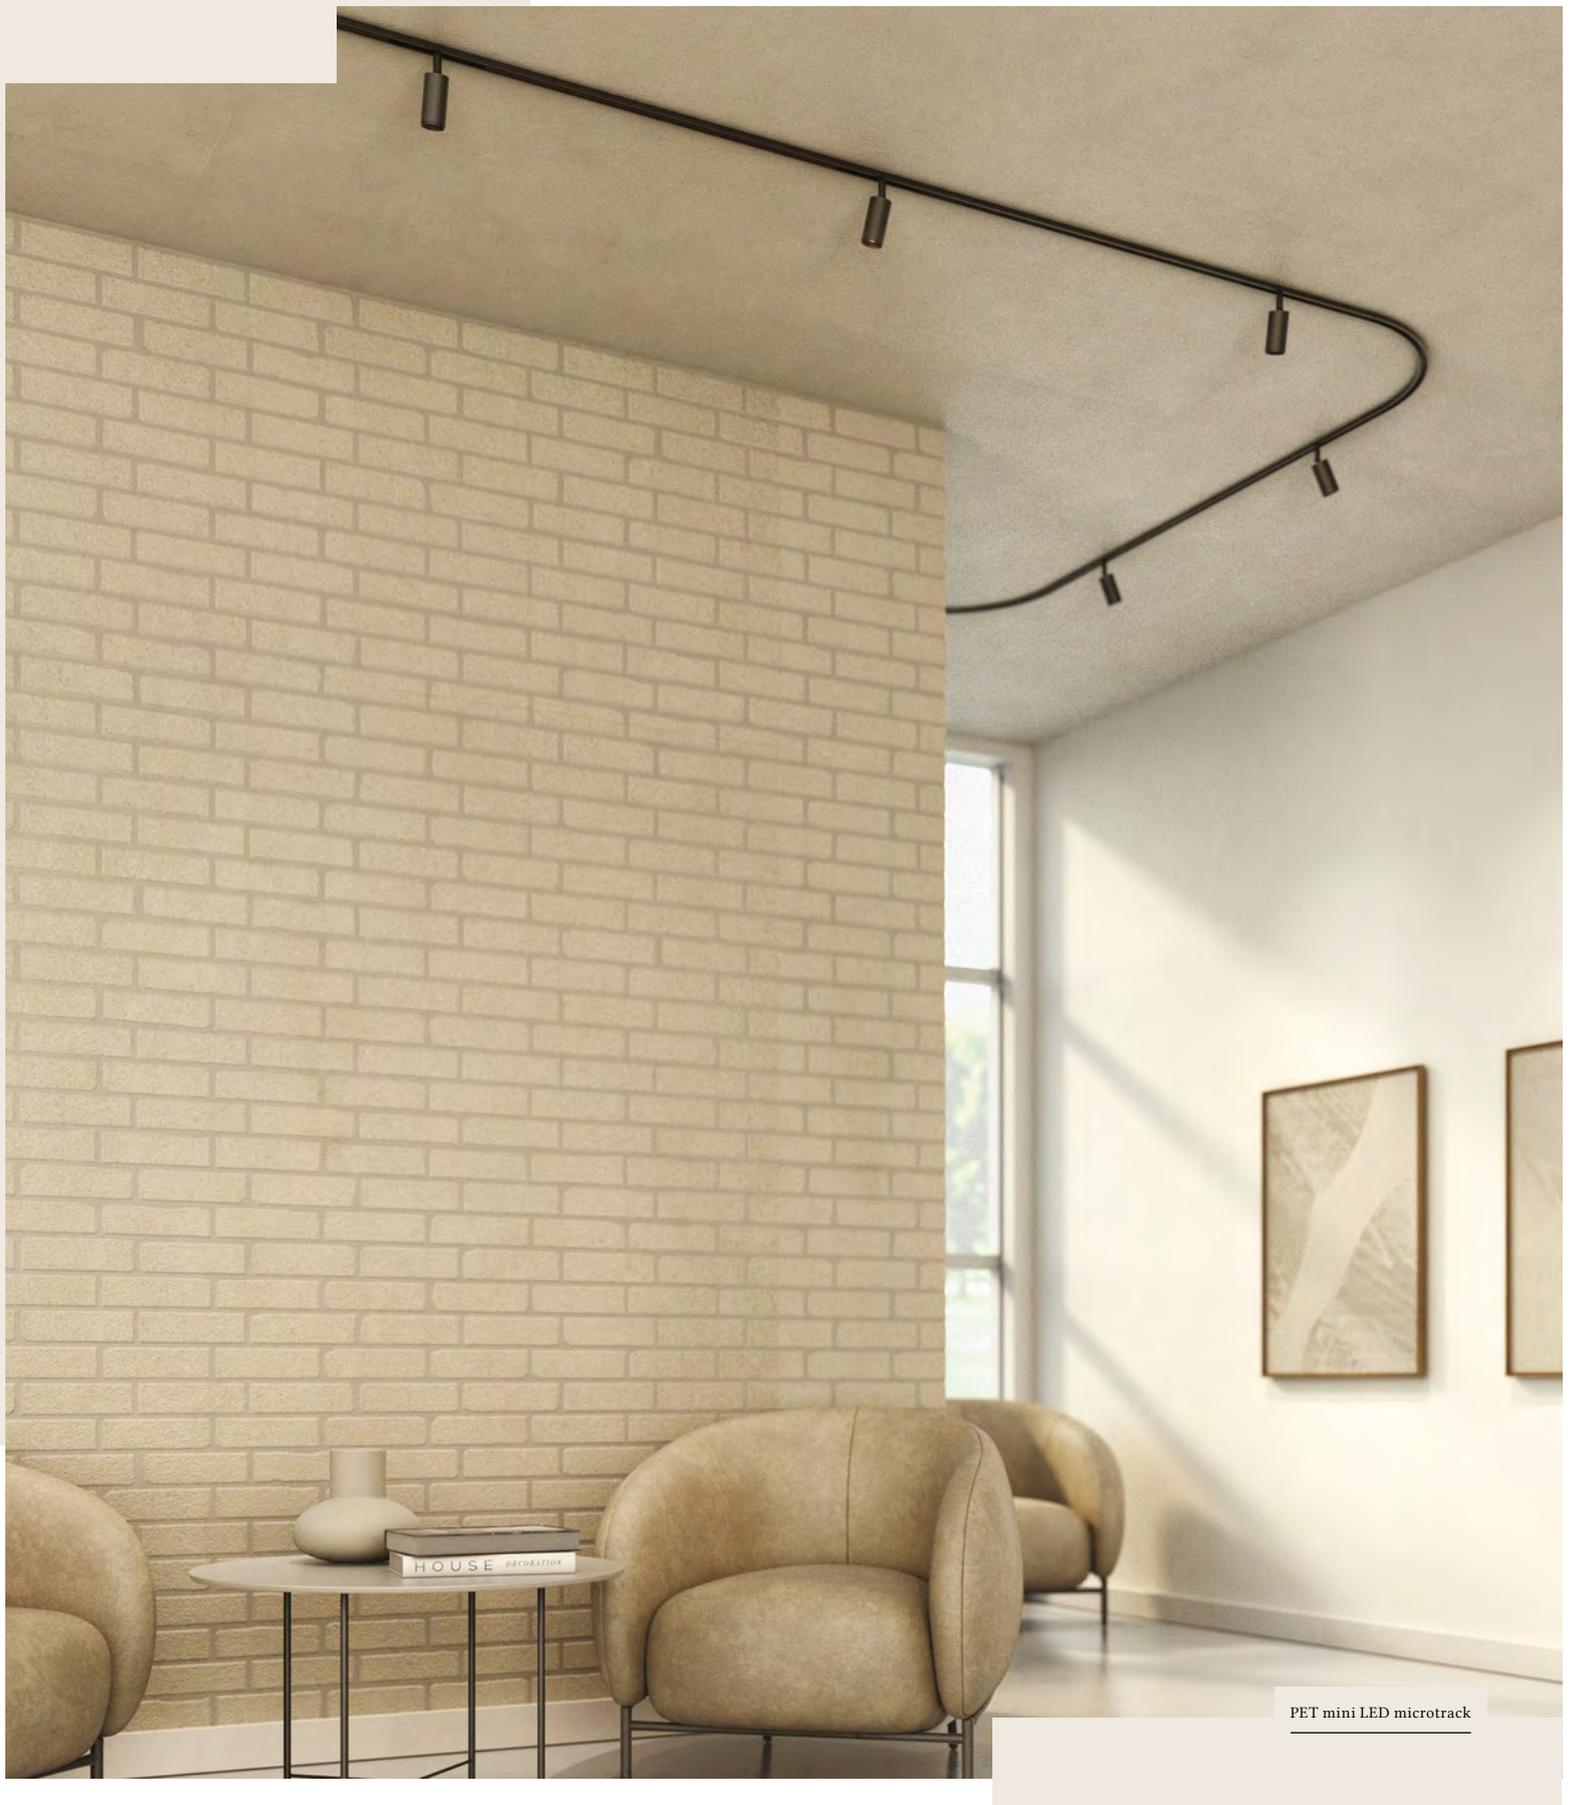

PET mini LED microtrack

All the tracks in this interior have been supplied with 48V power. If there is a 230V power supply in the interior, it is necessary to add power box with opening for cable 100W 48V surface black (SOCP2PBB)

PET mini LED microtrack



All the tracks in this interior have been supplied with 48V power. If there is a 230V power supply in the interior, it is necessary to add power box with opening for cable 100W 48V surface black (SOCP2PBB)



PET mini LED microtrack | MODERN BALL simple mini LED microtrack

All the tracks in this interior have been supplied with 48V power. If there is a 230V power supply in the interior, it is necessary to add power box with opening for cable 100W 48V surface black (SOCP2PBB)

PET mini LED microtrack | MODERN BALL simple mini LED microtrack



All the tracks in this interior have been supplied with 48V power. If there is a 230V power supply in the interior, it is necessary to add power box with opening for cable 100W 48V surface black (SOCP2PBB)

MICROTRACK

The minimalist track with low voltage





MICROTRACK inner width is less than 12mm, it uses a safe voltage of 48V and offers many accessories to choose from.

In the case of MICROTRACK, the same system components are compatible for both ON/OFF and DALI installations.

48V | max 2 metres in one piece | ON-OFF | DALI
Extremely thin | can be safely installed on walls
Requires 48V power supply

With new, curved elements minimalism and the softness of forms do not have to be mutually exclusive. On the contrary, curved tracks allow for the creation of minimalist yet harmonious arrangements.


The curved section of the MICROTRACK does not allow for the installation of fixtures.

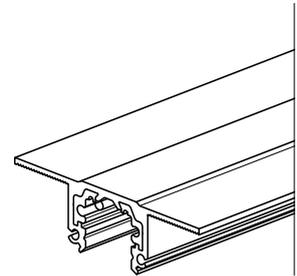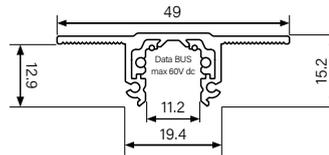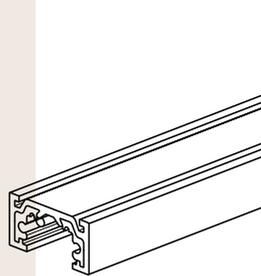

tracks	colour	cat. no
surface 1000mm	black	SOCM1DAB
surface 2000mm	black	SOCM2DAB



tracks	colour	cat. no
recessed 1000mm	black	SORM1DAB
recessed 2000mm	black	SORM2DAB

new




tracks	colour	cat. no
surface R30	black	SOCR3DAB
surface R50	black	SOCR5DAB

Maximum load

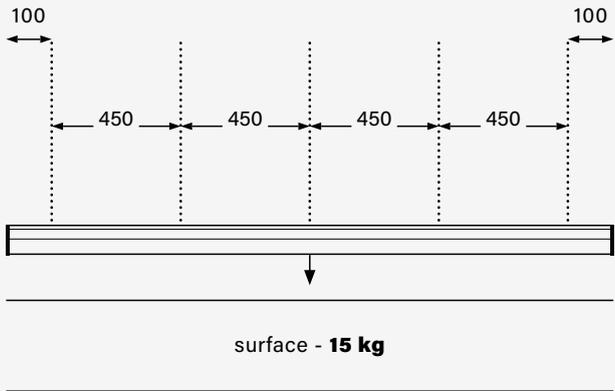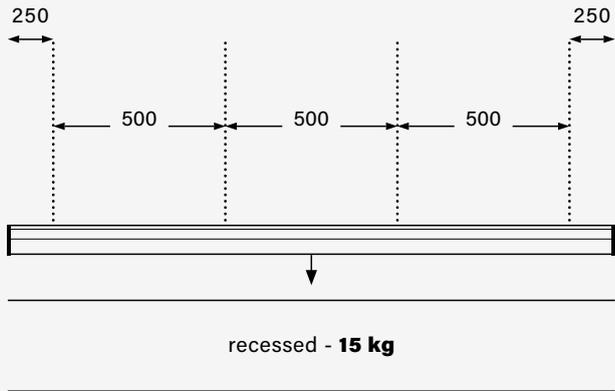


SORCU00B

end cap recessed black




SHRP0__20

power supply

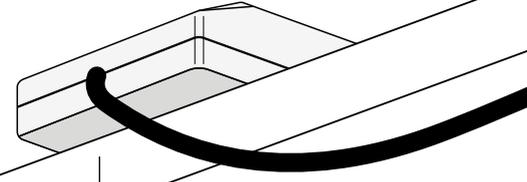


SOCP2PBB

power box with opening for cable 100W 48V surface black

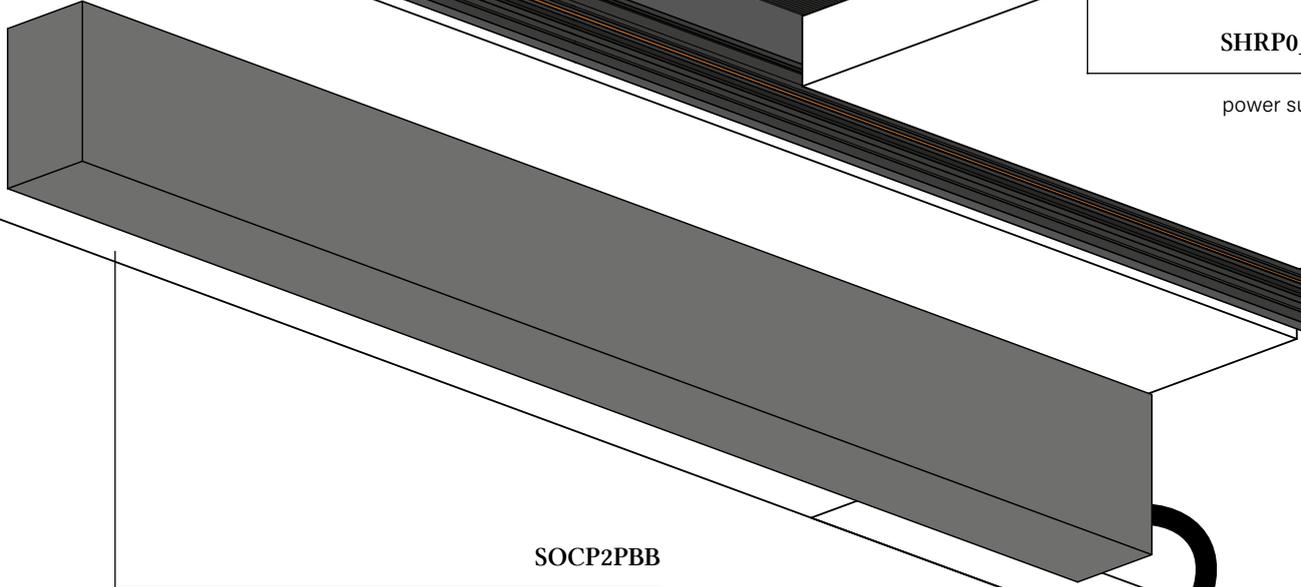


SORLU00B

ceiling-wall connector black

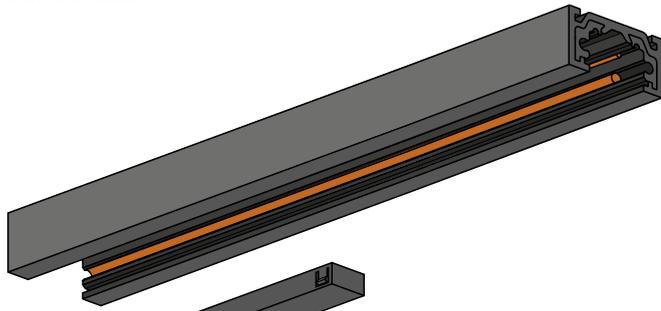


SOSCU00B

end cap surface black




SOPCU00B


power end cap with cable 2,5m black



SOPWUDAB


electrical ceiling-wall connector black

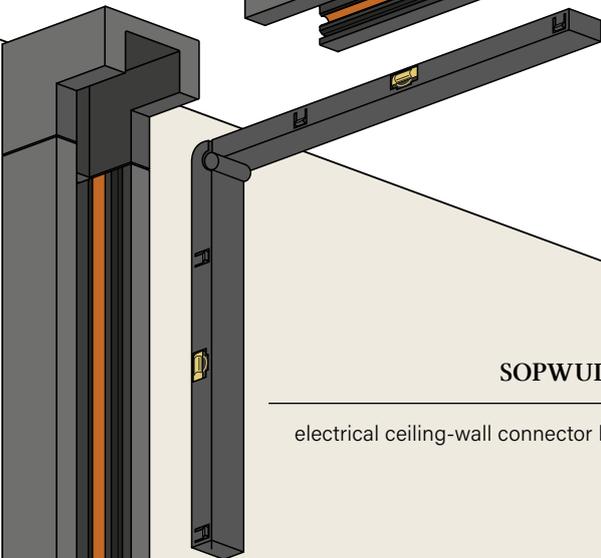

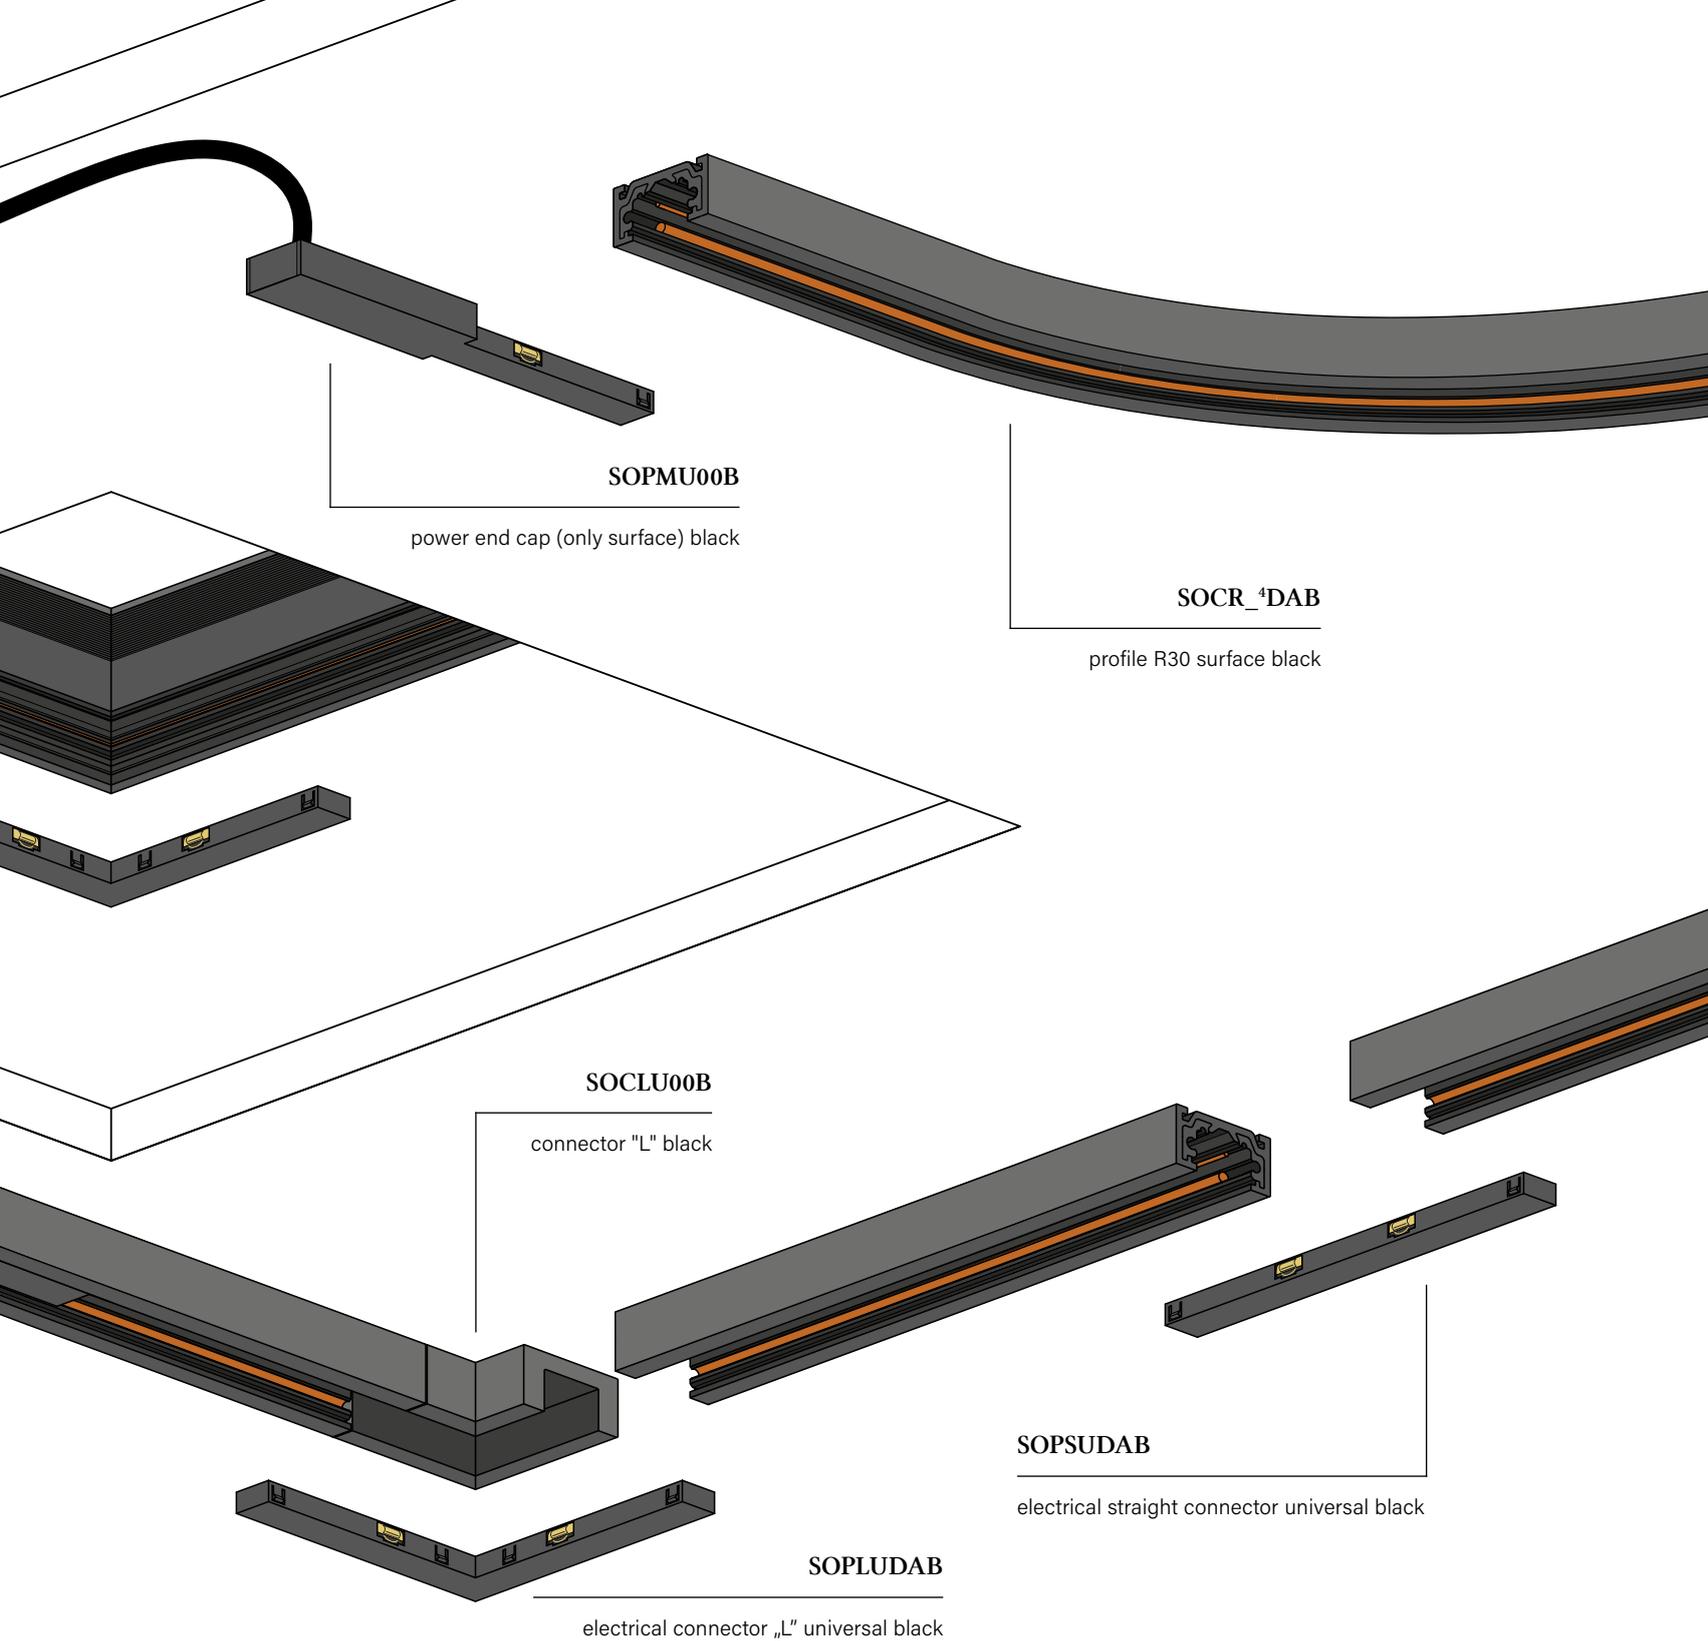

Scheme of the MICROTRACK recessed/surface system

Track 3F & Dali

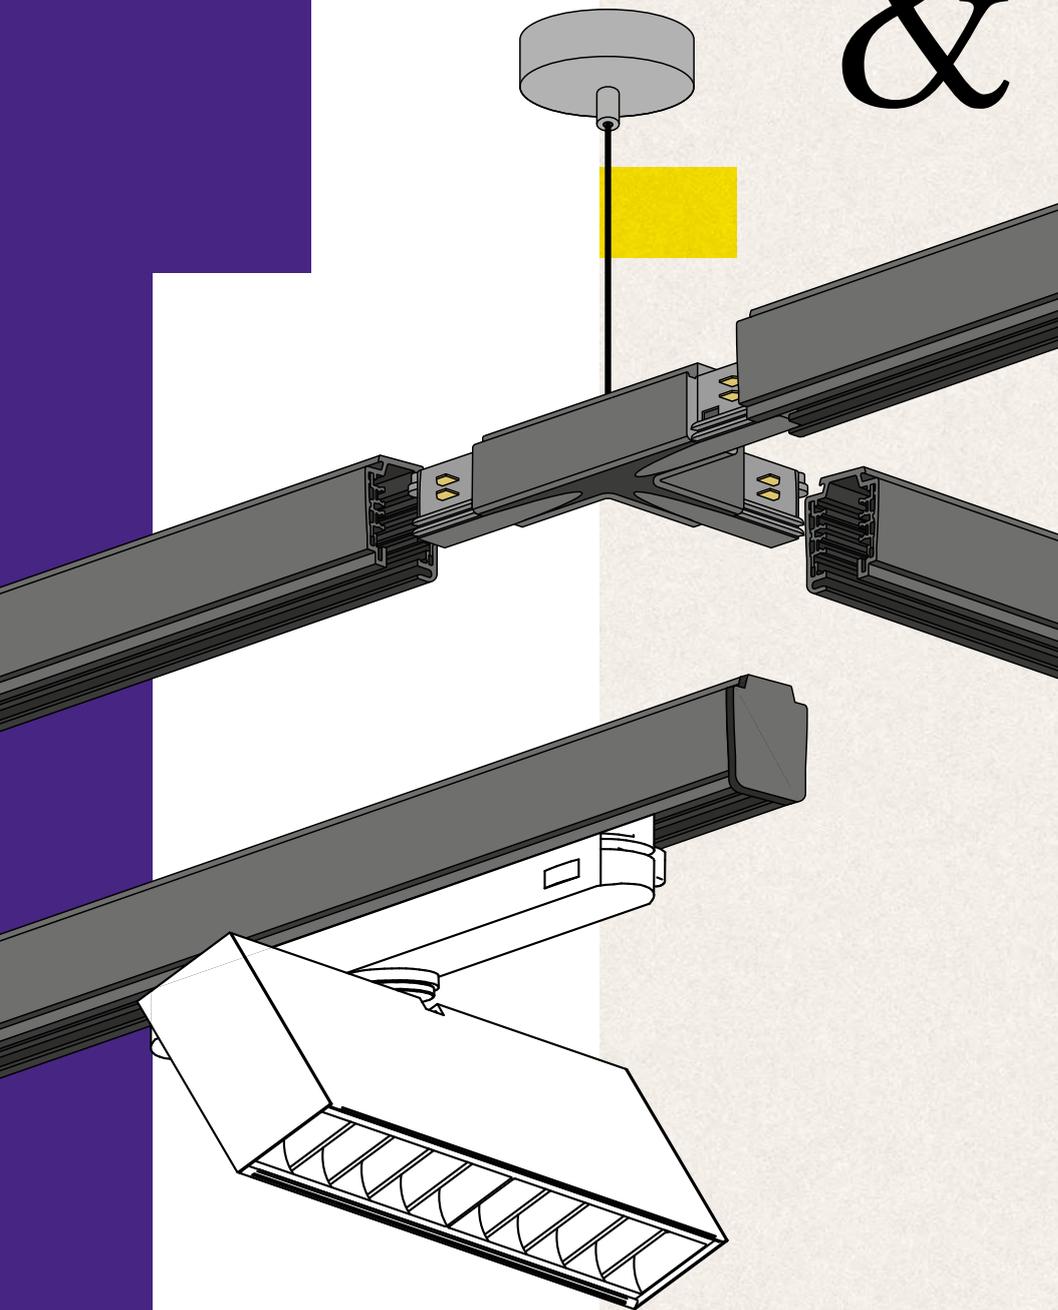

3F tracks combine flexibility, robustness and affordable price

They are powered by 230V, so to connect them, all you need is a standard cable on the ceiling and a power endcap or one of the connectors with the possibility of connecting the power supply (straight connector, "L", "T" or "X").

They make it possible to divide lighting fixtures into up to three circuits so that they work independently. This requires a 5-wire cable between the wall switches and the track connection.

They are made of aluminum profile painted black (RAL 9005) or white (RAL 9003).

Standard tracks for demanding interiors

The DALI version of the 3F tracks is intended for interiors where a wired digital control system based on the DALI protocol is used. This solution allows for independent addressing of the luminaires. In other words, it is possible to program light scenes, dim luminaires and combine them into groups.

The 3F DALI tracks requires the use of fixtures in the DALI control version, as well as appropriate installation and the use of properly selected automation.





ARANZAC




JE NA MIARE





Salon Mercedes-Benz Mojsiuk, Koszalin



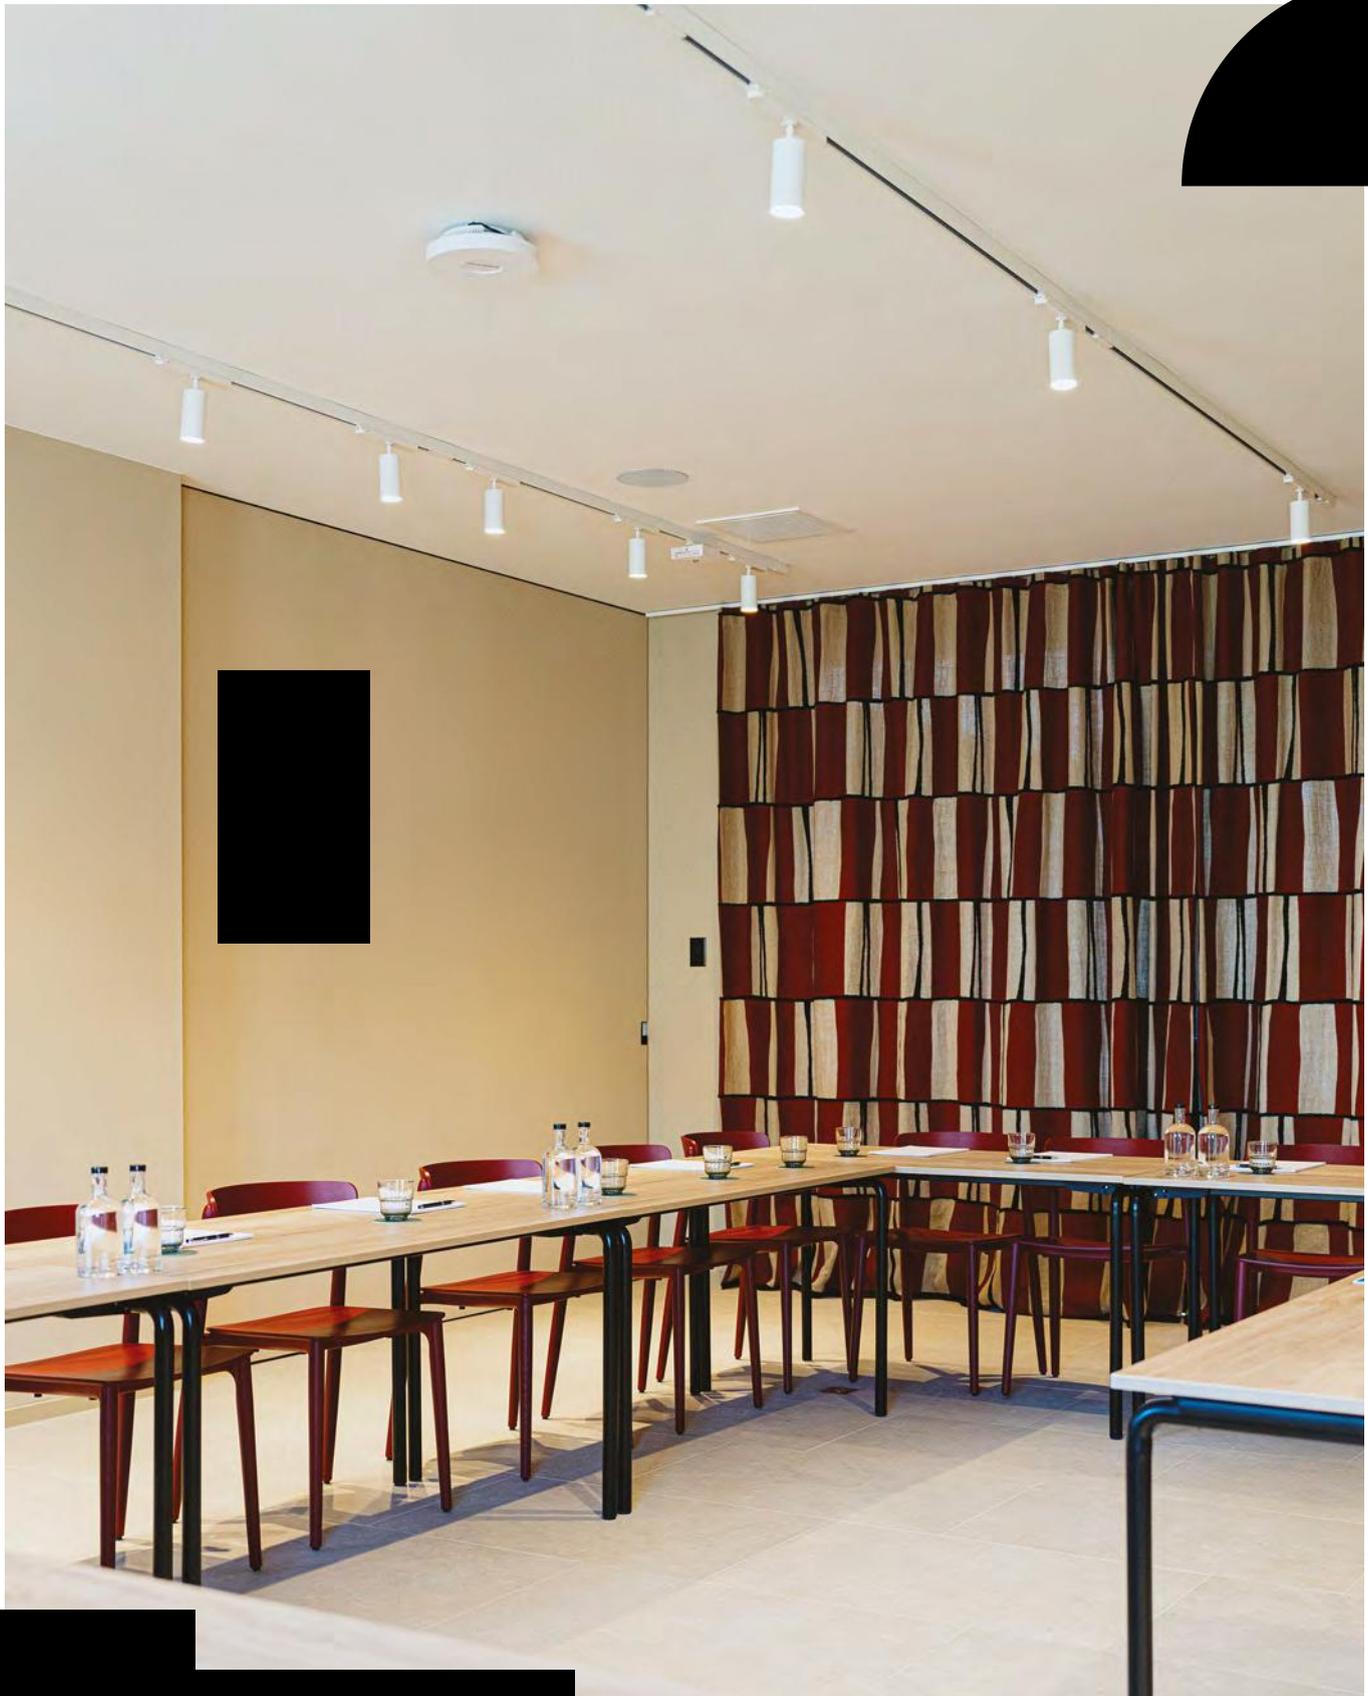

PET midli LED track

Hotel-T, Wargem


Photo: Jan Liz






3F TRACK

With the use of track systems, one can easily change the number, location and even the type of luminaires installed indoors. It is possible to adjust the interior lighting without making additional changes to the ceiling structure or electrical installation. Track systems are made of aluminum profiles varnished in selected colours. The inside copper wires are placed in a guideway made of self-extinguishing polycarbonate, which also insulates the wires from the aluminium body. Fire resistance class – V0.

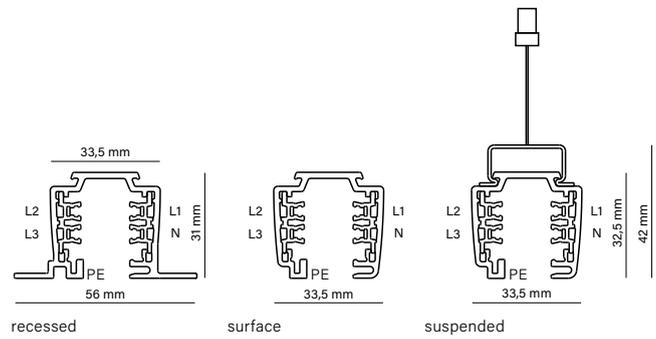

The track can be cut to given dimensions at the installation site. The cut surface or copper line of standard 3F tracks does not require bending or any other special treatment after the cut. Copper lines of the 3F DALI track need to be trimmed after the cut.

230V | max 3 metres in one piece | ON-OFF (three circuits) | DALI

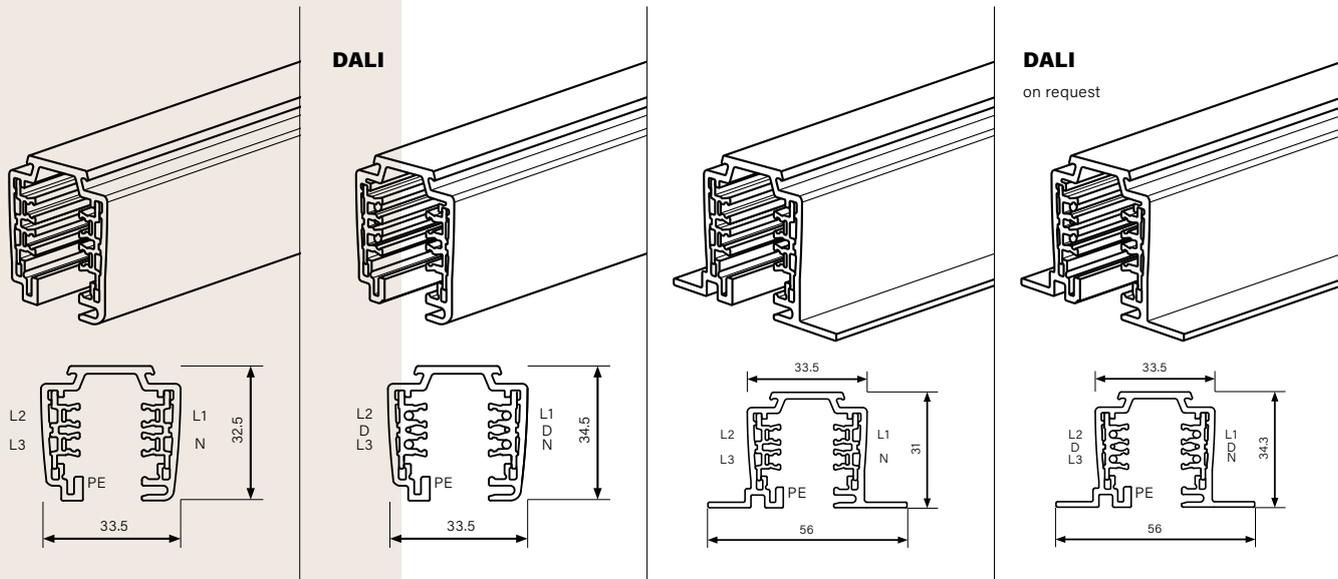

tracks	colour	cat. no	tracks	colour	cat. no
surface/suspended 1000mm	black	STCH1PHB	recessed 1000mm	black	STRH1PHB
	white	STCH1PHW		white	STRH1PHW
surface/suspended 2000mm	black	STCH2PHB	recessed 2000mm	black	STRH2PHB
	white	STCH2PHW		white	STRH2PHW
surface/suspended 3000mm	black	STCH3PHB	recessed 3000mm	black	STRH3PHB
	white	STCH3PHW		white	STRH3PHW
DALI surface/suspended 2000mm	black	STCH2DAB	DALI recessed 2000mm	black	STRH2DAB
	white	STCH2DAW		on request	white
DALI surface/suspended 3000mm	black	STCH3DAB	DALI recessed 3000mm	black	STRH3DAB
	white	STCH3DAW		on request	white




STAT_*_3_1

STECU_3_1

LU TRACK end cap

power supply possibility
placement of grounding elements

LU TRACK connector „T”

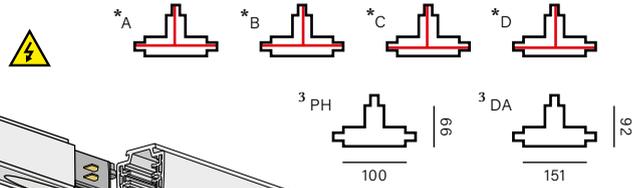


STAIU_3U

LU TRACK universal internal jointing unit

STALU_3_1

LU TRACK connector „L”

power supply possibility
it is possible to adjust the ground by the fitter




STAFUPH_1

LU TRACK adjustable connector

STASU_3_1


LU TRACK straight connector


power supply possibility

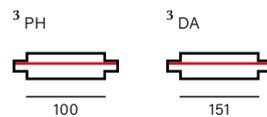

STAPU_3_1

LU TRACK power adapter









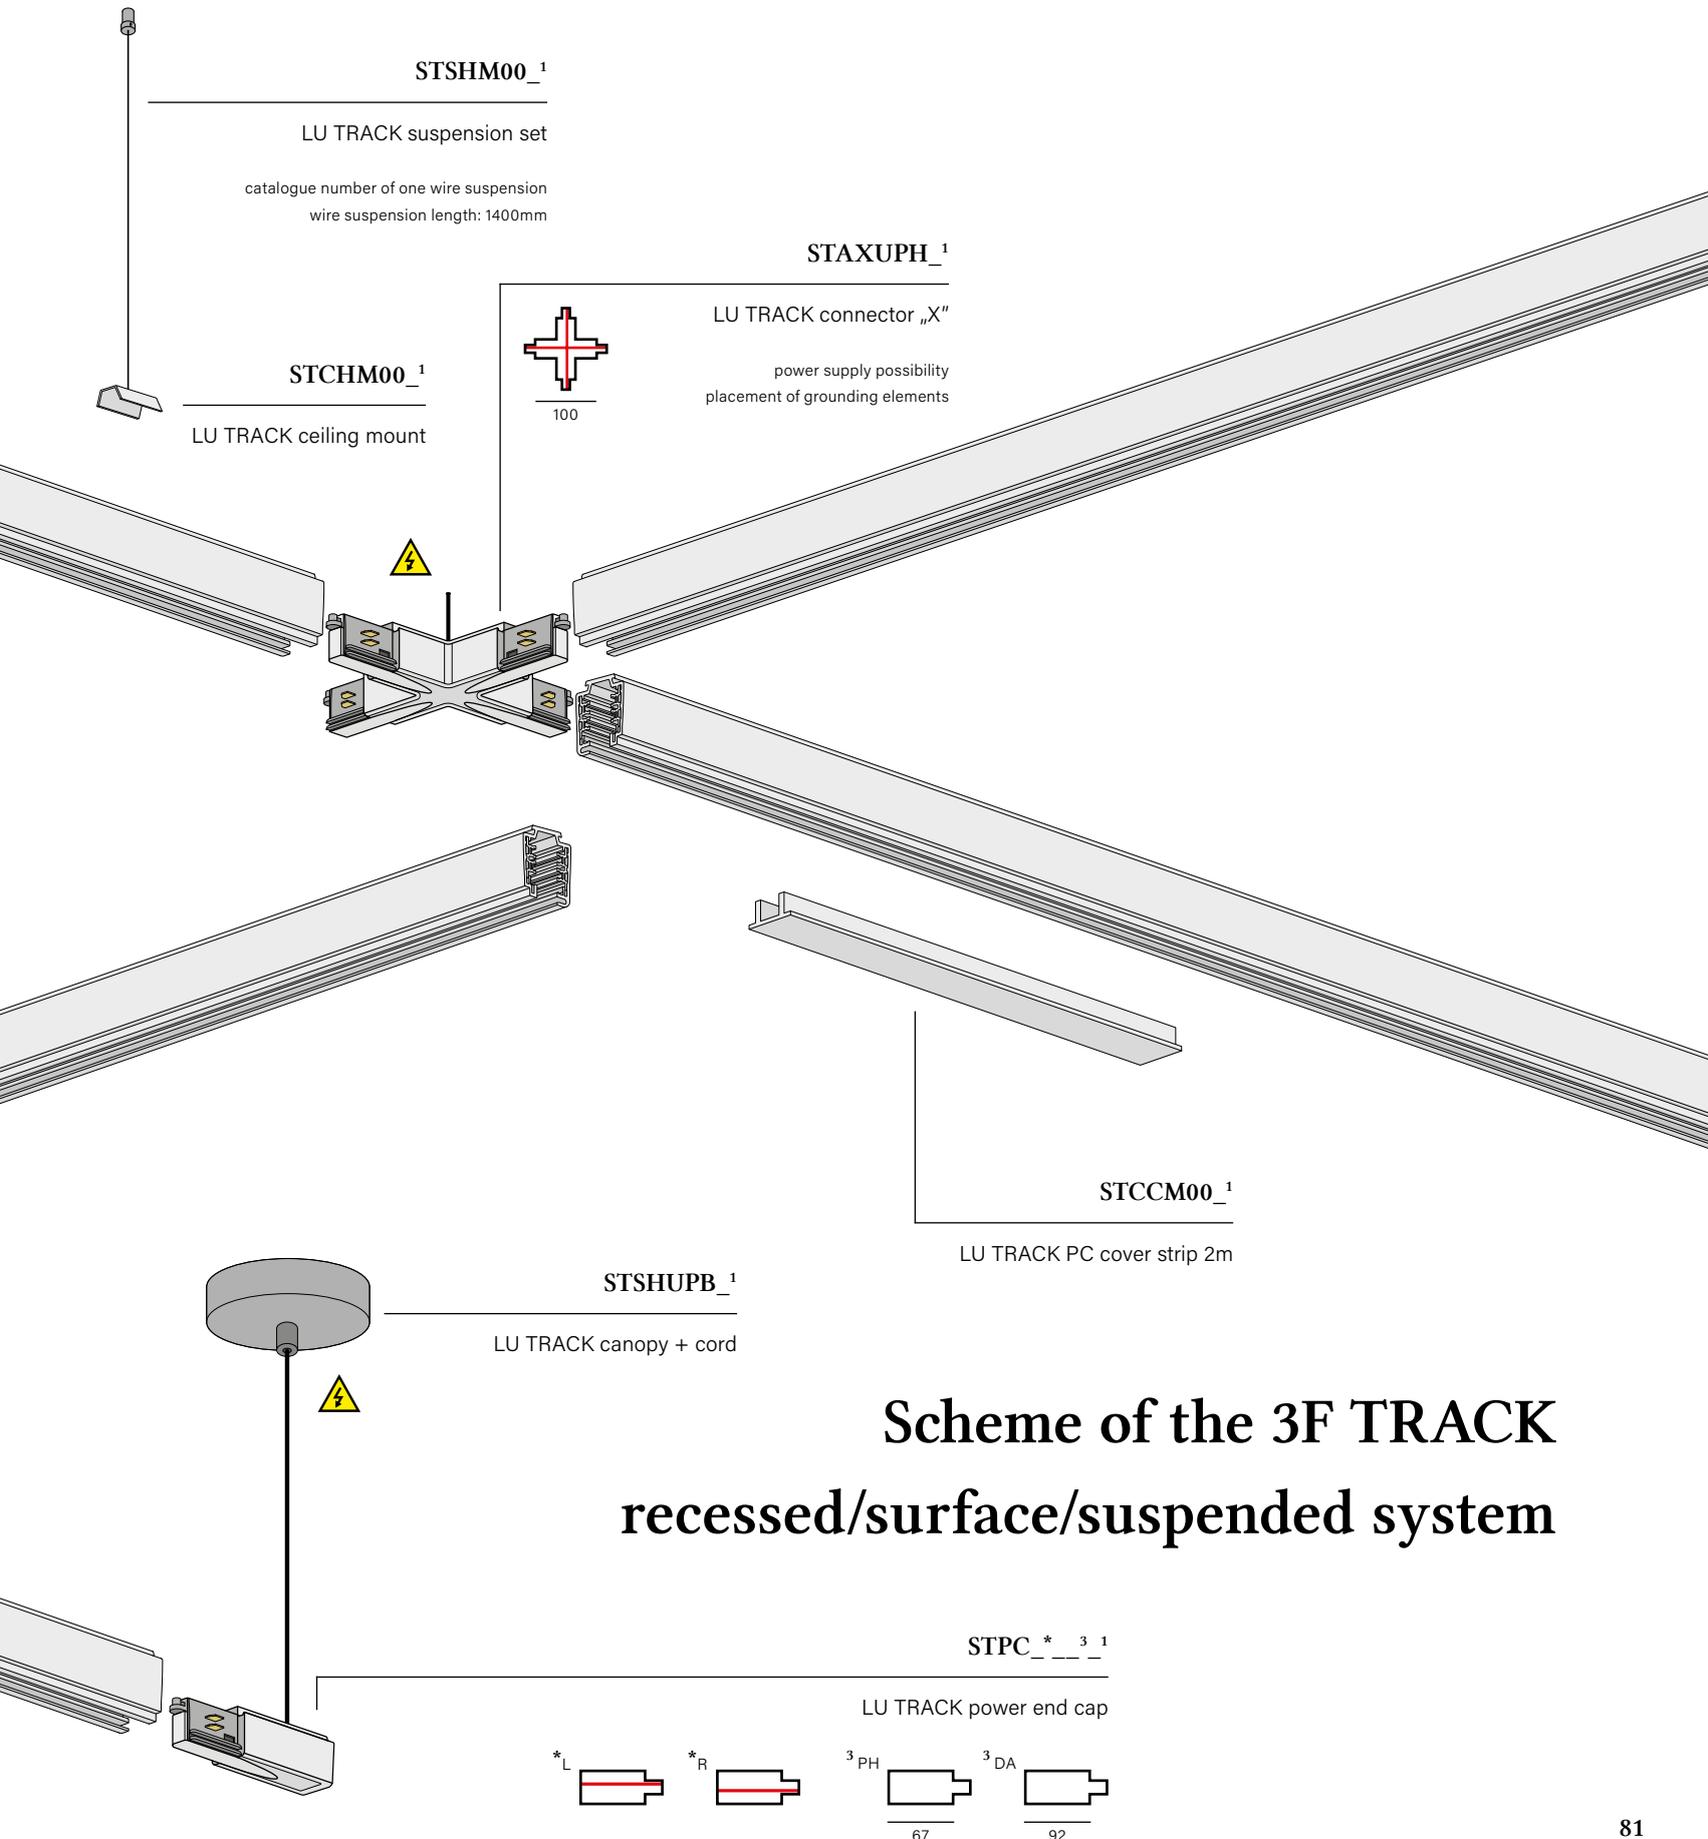









Scheme of the 3F TRACK recessed/surface/suspended system

List of all COMPONENTS




3F TRACK





	TRACK 3F 230V	STRH1PHW	LU TRACK 3F profile 1m recessed white	
	TRACK 3F 230V	STRH1PHB	LU TRACK 3F profile 1m recessed black	
	TRACK 3F 230V	STRH2PHW	LU TRACK 3F profile 2m recessed white	
	TRACK 3F 230V	STRH2PHB	LU TRACK 3F profile 2m recessed black	
	TRACK 3F 230V	STRH3PHW	LU TRACK 3F profile 3m recessed white	
	TRACK 3F 230V	STRH3PHB	LU TRACK 3F profile 3m recessed black	
	TRACK DALI 230V	STRH2DAW	LU TRACK DALI profile 2m recessed white	
	TRACK DALI 230V	STRH2DAB	LU TRACK DALI profile 2m recessed black	
	TRACK DALI 230V	STRH3DAW	LU TRACK DALI profile 3m recessed white	
	TRACK DALI 230V	STRH3DAB	LU TRACK DALI profile 3m recessed black	
	TRACK 3F 230V	STCH1PHW	LU TRACK 3F profile 1m surface/suspended white	QS
	TRACK 3F 230V	STCH1PHB	LU TRACK 3F profile 1m surface/suspended black	QS
	TRACK 3F 230V	STCH2PHW	LU TRACK 3F profile 2m surface/suspended white	QS
	TRACK 3F 230V	STCH2PHB	LU TRACK 3F profile 2m surface/suspended black	QS
	TRACK 3F 230V	STCH3PHW	LU TRACK 3F profile 3m surface/suspended white	QS
	TRACK 3F 230V	STCH3PHB	LU TRACK 3F profile 3m surface/suspended black	QS
	TRACK DALI 230V	STCH2DAW	LU TRACK DALI profile 2m surface/suspended white	
	TRACK DALI 230V	STCH2DAB	LU TRACK DALI profile 2m surface/suspended black	
	TRACK DALI 230V	STCH3DAW	LU TRACK DALI profile 3m surface/suspended white	
	TRACK DALI 230V	STCH3DAB	LU TRACK DALI profile 3m surface/suspended black	
	TRACK 3F 230V	STAHUPHW	LU TRACK 3F adapter white	QS
	TRACK 3F 230V	STAHUPHB	LU TRACK 3F adapter black	QS









	TRACK DALI 230V	STAHUAW	LU TRACK DALI adapter white	
	TRACK DALI 230V	STAHUDAB	LU TRACK DALI adapter black	
	TRACK 3F 230V	STAPUPHW	LU TRACK 3F power outlet adapter white	
	TRACK 3F 230V	STAPUPHB	LU TRACK 3F power outlet adapter black	
	TRACK 3F 230V	STECUPHW	LU TRACK 3F end cap white	QS
	TRACK 3F 230V	STECUPHB	LU TRACK 3F end cap black	QS
	TRACK DALI 230V	STECUAW	LU TRACK DALI end cap white	
	TRACK DALI 230V	STECUDAB	LU TRACK DALI end cap black	
	TRACK 3F 230V	STPCLPHW	LU TRACK 3F power feed (A) white	QS
	TRACK 3F 230V	STPCLPHB	LU TRACK 3F power feed (A) black	QS
	TRACK 3F 230V	STPCRPHW	LU TRACK 3F power feed (B) white	QS
	TRACK 3F 230V	STPCRPHB	LU TRACK 3F power feed (B) black	QS
	TRACK DALI 230V	STPCLDAW	LU TRACK DALI power feed (A) white	
	TRACK DALI 230V	STPCLDAB	LU TRACK DALI power feed (A) black	
	TRACK DALI 230V	STPCRDAW	LU TRACK DALI power feed (B) white	
	TRACK DALI 230V	STPCRDAW	LU TRACK DALI power feed (B) black	
	TRACK 3F 230V	STALUPHW	LU TRACK 3F connector „L” universal white	QS
	TRACK 3F 230V	STALUPHB	LU TRACK 3F connector „L” universal black	QS
	TRACK DALI 230V	STALUAW	LU TRACK DALI connector „L” universal white	QS
	TRACK DALI 230V	STALUDAB	LU TRACK DALI connector „L” universal black	QS
	TRACK 3F 230V	STATAPHW	LU TRACK 3F connector „T” (A) white	QS
	TRACK 3F 230V	STATAPHB	LU TRACK 3F connector „T” (A) black	QS
	TRACK 3F 230V	STATBPHW	LU TRACK 3F connector „T” (B) white	QS
	TRACK 3F 230V	STATBPHB	LU TRACK 3F connector „T” (B) black	QS
	TRACK 3F 230V	STATCPHW	LU TRACK 3F connector „T” (C) white	





	TRACK 3F 230V	STATCPHB	LU TRACK 3F connector „T“ (C) black	
	TRACK 3F 230V	STATDPHW	LU TRACK 3F connector „T“ (D) white	
	TRACK 3F 230V	STATDPHB	LU TRACK 3F connector „T“ (D) black	
	TRACK DALI 230V	STATADAW	LU TRACK DALI connector „T“ (A) white	
	TRACK DALI 230V	STATADAB	LU TRACK DALI connector „T“ (A) black	
	TRACK 3F 230V	STAXUPHW	LU TRACK 3F connector „X“ white	
	TRACK 3F 230V	STAXUPHB	LU TRACK 3F connector „X“ black	
	TRACK 3F 230V	STAFUPHW	LU TRACK 3F adjustable connector white	
	TRACK 3F 230V	STAFUPHB	LU TRACK 3F adjustable connector black	
	TRACK 3F 230V	STASUPHW	LU TRACK 3F straight connector white	QS
	TRACK 3F 230V	STASUPHB	LU TRACK 3F straight connector black	QS
	TRACK DALI 230V	STASUDAW	LU TRACK DALI straight connector white	
	TRACK DALI 230V	STASUDAB	LU TRACK DALI straight connector black	
	TRACK 3F 230V	STAIUPHU	LU TRACK 3F universal internal jointing unit	QS
	TRACK DALI 230V	STAIUDAU	LU TRACK DALI universal internal jointing unit	
	TRACK 3F 230V	STCHM00W	LU TRACK ceiling bracket white	QS
	TRACK 3F 230V	STCHM00B	LU TRACK ceiling bracket black	QS
	TRACK 3F 230V	STW0U00W	LU TRACK suspension bracket white	
	TRACK 3F 230V	STW0U00B	LU TRACK suspension bracket black	
	TRACK 3F 230V	STCCM00W	LU TRACK PC cover strip 2m white	
	TRACK 3F 230V	STCCM00B	LU TRACK PC cover strip 2m black	
	TRACK 3F 230V	STSHM00W	TRACK suspension (single set) white	QS
	TRACK 3F 230V	STSHM00B	TRACK suspension (single set) black	QS
	TRACK 3F 230V	STSHUPBB	TRACK canopy + cord black	QS
	TRACK 3F 230V	STSHUPBW	TRACK canopy + cord white	QS

MULTITRACK

	MULTITRACK	SMCM1DAB	M MULTITRACK profile 1m surface black	QS
	MULTITRACK	SMCM2DAB	M MULTITRACK profile 2m surface black	QS
	MULTITRACK	SMCM1DAW	M MULTITRACK profile 1m surface white	QS
	MULTITRACK	SMCM2DAW	M MULTITRACK profile 2m surface white	QS
	MULTITRACK	SMSM1DAB	M MULTITRACK profile 1m suspended black	QS
	MULTITRACK	SMSM2DAB	M MULTITRACK profile 2m suspended black	QS
	MULTITRACK	SMSM1DAW	M MULTITRACK profile 1m suspended white	QS
	MULTITRACK	SMSM2DAW	M MULTITRACK profile 2m suspended white	QS
	MULTITRACK	SMRM1DAB	M MULTITRACK profile 1m recessed black	QS
	MULTITRACK	SMRM2DAB	M MULTITRACK profile 2m recessed black	QS
	MULTITRACK	SMRM1DAW	M MULTITRACK profile 1m recessed white	QS
	MULTITRACK	SMRM2DAW	M MULTITRACK profile 2m recessed white	QS
	MULTITRACK	SHCM1DAB	M HIGH MULTITRACK profile 1m surface black	QS
	MULTITRACK	SHCM2DAB	M HIGH MULTITRACK profile 2m surface black	QS
	MULTITRACK	SHCM3DAB	M HIGH MULTITRACK profile 3m surface black	
	MULTITRACK	SHCM1DAW	M HIGH MULTITRACK profile 1m surface white	QS
	MULTITRACK	SHCM2DAW	M HIGH MULTITRACK profile 2m surface white	QS
	MULTITRACK	SHCM3DAW	M HIGH MULTITRACK profile 3m surface white	
	MULTITRACK	SHSM1DAB	M HIGH MULTITRACK profile 1m suspended black	QS
	MULTITRACK	SHSM2DAB	M HIGH MULTITRACK profile 2m suspended black	QS
	MULTITRACK	SHSM3DAB	M HIGH MULTITRACK profile 3m suspended black	
	MULTITRACK	SHSM1DAW	ST HIGH MULTITRACK profile 1m suspended white	QS
	MULTITRACK	SHSM2DAW	ST HIGH MULTITRACK profile 2m suspended white	QS
	MULTITRACK	SHSM3DAW	ST HIGH MULTITRACK profile 3m suspended white	



	MULTITRACK	SHRM1DAB	M HIGH MULTITRACK profile 1m recessed black	QS
	MULTITRACK	SHRM2DAB	M HIGH MULTITRACK profile 2m recessed black	QS
	MULTITRACK	SHRM3DAB	M HIGH MULTITRACK profile 3m recessed black	
	MULTITRACK	SHRM1DAW	M HIGH MULTITRACK profile 1m recessed white	QS
	MULTITRACK	SHRM2DAW	M HIGH MULTITRACK profile 2m recessed white	QS
	MULTITRACK	SHRM3DAW	M HIGH MULTITRACK profile 3m recessed white	
	MULTITRACK	SCRM1DAB	M HIGH MULTITRACK profile 1m recessed trim black	
	MULTITRACK	SCRM2DAB	M HIGH MULTITRACK profile 2m recessed trim black	
	MULTITRACK	SCRM3DAB	M HIGH MULTITRACK profile 3m recessed trim black	
	MULTITRACK	SCRM1DAW	M HIGH MULTITRACK profile 1m recessed trim white	
	MULTITRACK	SCRM2DAW	M HIGH MULTITRACK profile 2m recessed trim white	
	MULTITRACK	SCRM3DAW	M HIGH MULTITRACK profile 3m recessed trim white	
	MULTITRACK	SUSM1DAB	M MULTITRACK HIGH UP&DOWN profile 1m suspended black	
	MULTITRACK	SUSM2DAB	M MULTITRACK HIGH UP&DOWN profile 2m suspended black	
	MULTITRACK	SUSM3DAB	M MULTITRACK HIGH UP&DOWN profile 3m suspended black	
	MULTITRACK	SMECU00B	M MULTITRACK end cap surface/suspended black	QS
	MULTITRACK	SMECU00W	M MULTITRACK end cap surface/suspended white	QS
	MULTITRACK	SMECH00B	M MULTITRACK end cap with opening surface/suspended black	QS
	MULTITRACK	SMECH00W	M MULTITRACK end cap with opening surface/suspended white	QS
	MULTITRACK	SMECF00B	M MULTITRACK end cap recessed black	QS
	MULTITRACK	SMECF00W	M MULTITRACK end cap recessed white	QS
	MULTITRACK	SMPUDAB	M MULTITRACK power feed universal black	QS
	MULTITRACK	SMPUDAW	M MULTITRACK power feed universal white	QS
	MULTITRACK	SMPLUDAB	M MULTITRACK connector „L” electrical universal black	QS
	MULTITRACK	SMPLUDAW	M MULTITRACK connector „L” electrical universal white	QS

	MULTITRACK	SMASUDAB	M MULTITRACK electrical straight connector universal black	QS
	MULTITRACK	SMASUDAW	M MULTITRACK electrical straight connector universal white	QS
	MULTITRACK	SMPFUDAB	M MULTITRACK electrical flexible connector universal black	
	MULTITRACK	SMPFUDAW	M MULTITRACK electrical flexible connector universal white	
	MULTITRACK	SMRLF00B	M MULTITRACK mechanical connector „L” recessed black	QS
	MULTITRACK	SMRLF00W	M MULTITRACK mechanical connector „L” recessed white	QS
	MULTITRACK	SMCLU00B	M MULTITRACK mechanical connector „L” surface/suspended black	QS
	MULTITRACK	SMCLU00W	M MULTITRACK mechanical connector „L” surface/suspended white	QS
	MULTITRACK	SMCSU000	M MULTITRACK straight connector	QS
	MULTITRACK	SMRFU00U	M MULTITRACK mounting brackets set (2 pcs.) for recessed track	QS
	MULTITRACK	SMRSU00U	M MULTITRACK mechanical straight connector recessed	QS
	MULTITRACK	SMW01000	M MULTITRACK suspension set 1,4m suspended	QS
	MULTITRACK	SMCMMPBB	M MULTITRACK canopy with power supply EM 100W 48V surface black	QS
	MULTITRACK	SMCMMPBW	M MULTITRACK canopy with power supply EM 100W 48V surface white	QS
	MULTITRACK	SMCB200B	M MULTITRACK canopy surface black	
	MULTITRACK	SMCB200W	M MULTITRACK canopy surface white	
	MULTITRACK	SHCB200B	M HIGH MULTITRACK canopy surface black	
	MULTITRACK	SHCB200W	M HIGH MULTITRACK canopy surface white	
	MULTITRACK	SHIP010W	M MULTITRACK power supply plug-in 100W 48V white	QS
	MULTITRACK	SHIP010B	M MULTITRACK power supply plug-in 100W 48V black	QS
	MULTITRACK	SHIP025B	M MULTITRACK power supply plug-in 250W 48V black	QS
	MULTITRACK	SHIP025W	M MULTITRACK power supply plug-in 250W 48V white	QS
	MULTITRACK	SMAMUDBB	M MULTITRACK AQsmart interface adapter black	
	MULTITRACK	SMAMUDBW	M MULTITRACK AQsmart interface adapter white	
	MULTITRACK	SM0AU000	M MULTITRACK tool for cutting conductors	



	MULTITRACK	810320	ADDITIONAL OPENING FOR power feed	
	MULTITRACK	SHECU00B	M HIGH MULTITRACK end cap black	QS
	MULTITRACK	SHECU00W	M HIGH MULTITRACK end cap white	QS
	MULTITRACK	SCECU00B	M HIGH MULTITRACK end cap recessed trim black	
	MULTITRACK	SCECU00W	M HIGH MULTITRACK end cap recessed trim white	
	MULTITRACK	SHECH00B	M HIGH MULTITRACK end cap with opening black	QS
	MULTITRACK	SHECH00W	M HIGH MULTITRACK end cap with opening white	QS
	MULTITRACK	SHRLF00B	M HIGH MULTITRACK mechanical connector „L” recessed black	QS
	MULTITRACK	SHRLF00W	M HIGH MULTITRACK mechanical connector „L” recessed white	QS
	MULTITRACK	SHCLU00B	M HIGH MULTITRACK mechanical connector „L” surface black	QS
	MULTITRACK	SHCLU00W	M HIGH MULTITRACK mechanical connector „L” surface white	QS
	MULTITRACK	SCRLF00B	M HIGH MULTITRACK mechanical connector „L” recessed trim black	
	MULTITRACK	SCRLF00W	M HIGH MULTITRACK mechanical connector „L” recessed trim white	
	MULTITRACK	SHRFU00B	M HIGH MULTITRACK mechanical connector wall-ceiling recessed black	QS
	MULTITRACK	SHRFU00W	M HIGH MULTITRACK mechanical connector wall-ceiling recessed white	QS
	MULTITRACK	SHCP2PBB	M HIGH MULTITRACK power supply canopy 100W 48V surface black	QS
	MULTITRACK	SHCP2PBW	M HIGH MULTITRACK power supply canopy 100W 48V surface white	QS
	MULTITRACK	SHRMFF00B	M HIGH MULTITRACK installation cover 2m black	QS
	MULTITRACK	SHRMFM00U	M HIGH MULTITRACK installation template	QS
	MULTITRACK	SCRFU00U	M HIGH MULTITRACK mounting bracket for recessed trim	
	MULTITRACK	SCECH00B	M HIGH MULTITRACK end cap with opening recessed trim black	
	MULTITRACK	SCECH00W	M HIGH MULTITRACK end cap with opening recessed trim white	
	MULTITRACK	SUECU00B	M MULTITRACK HIGH UP&DOWN end cap suspended black	
	MULTITRACK	SUSLU00B	M MULTITRACK HIGH UP&DOWN mechanical connector „L” suspended black	


	MULTITRACK	SUPFUDAB	M MULTITRACK power cable 4x0,75mm ² 0.25m black
--	------------	----------	--

FLATTRACK

	FLATTRACK	SFCM100B	F FLATTRACK profile 1m black
	FLATTRACK	SFCM200B	F FLATTRACK profile 2m black
	FLATTRACK	SFCM300B	F FLATTRACK profile 3m black
	FLATTRACK	SFCM100W	F FLATTRACK profile 1m white
	FLATTRACK	SFCM200W	F FLATTRACK profile 2m white
	FLATTRACK	SFCM300W	F FLATTRACK profile 3m white
	FLATTRACK	SFPCU00B	F FLATTRACK power end cap black
	FLATTRACK	SFASU00B	F FLATTRACK electric straight connector black
	FLATTRACK	SFECU00B	FLATTRACK endcap black
	FLATTRACK	SFRWU00B	F FLATTRACK electric wall-ceiling connector, black
	FLATTRACK	SFPLU00B	FLATTRACK JOINT „L“ electric black
	FLATTRACK	SFATU00B	F FLATTRACK JOINT „T“ electric black
	FLATTRACK	SFPMU12B	POWER adapter 120W black


MICROTRACK

	MICROTRACK	SOCM1DAB	O MICROTRACK profile 1m surface black	QS
	MICROTRACK	SOCM2DAB	O MICROTRACK profile 2m surface black	QS
	MICROTRACK	SORM1DAB	O MICROTRACK profile 1m recessed black	QS
	MICROTRACK	SORM2DAB	O MICROTRACK profile 2m recessed black	QS
	MICROTRACK	SOPCU00B	O MICROTRACK power end cap with cable 2,5m black	QS
	MICROTRACK	SOPMU00B	O MICROTRACK power end cap (only surface) black	QS
	MICROTRACK	SOPSUDAB	O MICROTRACK electrical straight connector universal black	QS
	MICROTRACK	SOSCU00B	O MICROTRACK end cap surface black	QS

	MICROTRACK	SORCU00B	O MICROTRACK end cap (screws) recessed black	QS
	MICROTRACK	SOCLU00B	O MICROTRACK connector "L" black	QS
	MICROTRACK	SORLU00B	O MICROTRACK ceiling-wall connector black	
	MICROTRACK	SOPLUDAB	O MICROTRACK electrical connector „L” universal black	QS
	MICROTRACK	SOPWUDAB	O MICROTRACK electrical ceiling-wall connector black	
	MICROTRACK	SOPFUDAB	O MICROTRACK electrical flexible connector universal black	QS
	MICROTRACK	SOCP2PBB	O MICROTRACK power box with opening for cable 100W 48V surface black	QS
	MICROTRACK	SOCP3DAB	O MICROTRACK profile R30 surface black	
	MICROTRACK	SOCP5DAB	O MICROTRACK profile R50 surface black	

power supply

	power supply 48V	SHRP0600	power supply 60W 48V	QS
	power supply 48V	SHRP0100	power supply 100W 48V	QS
	power supply 48V	SHRP0200	power supply 200W 48V	QS
	power supply 48V	SHRP0120	power supply DIN rail 120W 48V	QS
	power supply 48V	SMCP4PBB	canopy fi100 + power cable 5x0,75mm ² 1,4m black	QS
	power supply 48V	SMCP4PBW	canopy fi100 + power cable 5x0,75mm ² 1,4m white	QS
	power supply 48V	SHCP2PBB	M HIGH MULTITRACK power supply canopy 100W 48V surface black	QS
	power supply 48V	SHCP2PBW	M HIGH MULTITRACK power supply canopy 100W 48V surface white	QS
	power supply 48V	SOCP2PBB	O MICROTRACK power box with opening for cable 100W 48V surface black	QS
	power supply 48V	SHIP010W	M MULTITRACK power supply plug-in 100W 48V white	QS
	power supply 48V	SHIP010B	M MULTITRACK power supply plug-in 100W 48V black	QS
	power supply 48V	SHIP025B	M MULTITRACK power supply plug-in 250W 48V black	QS
	power supply 48V	SHIP025W	M MULTITRACK power supply plug-in 250W 48V white	QS

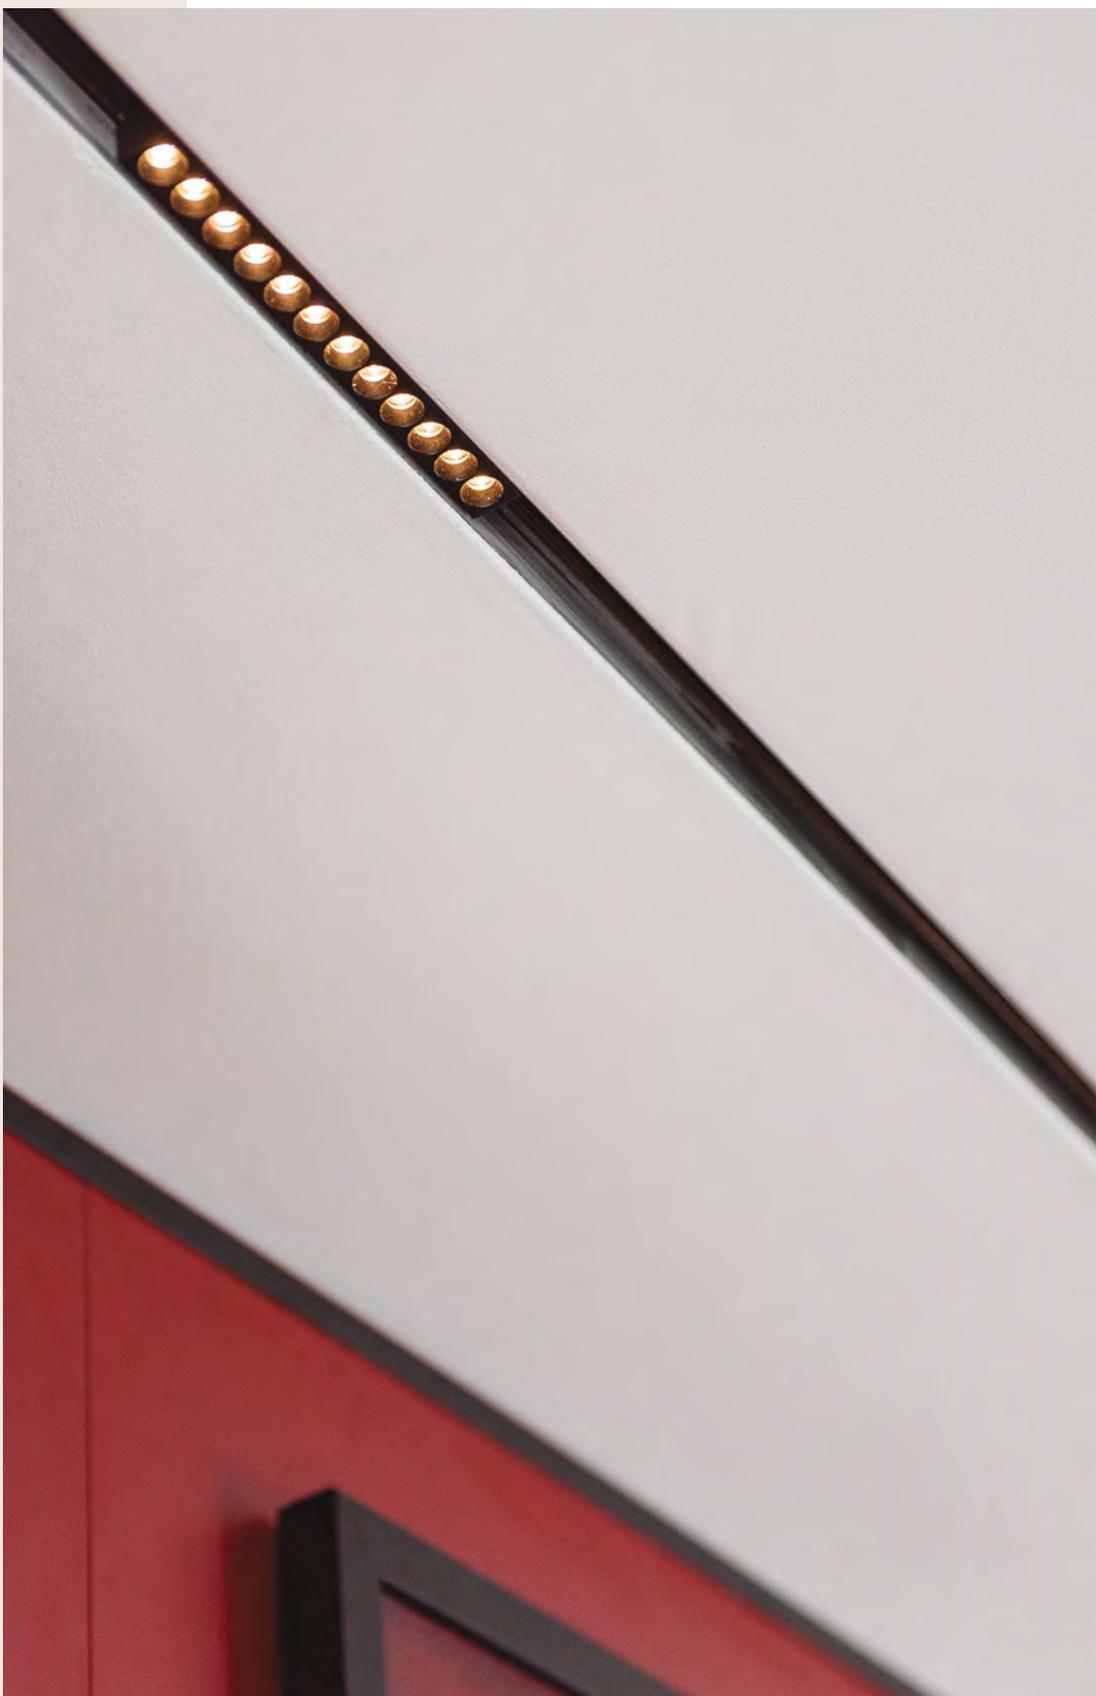




Lighting fixtures



DRAWN

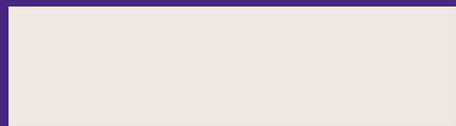

MULTITRACK


HYPHER



MODERN BALL simple




PET



QRLED next




RAFTER




new

HIGH MULTITRACK


HYPHER




MODERN BALL simple




PET midi



PET mini



QRLED next



new

FLATTRACK

HYPHER



new

MODERN BALL simple



new

PET mini




new

QRLED next



new

RAFTER




new

MICROTRACK

MODERN BALL simple



PET mini



RAFTER mini points



RAFTER points



TRACK

BLOS round



HYPHER



MODERN BALL simple



PET mini



PET midi



SET TRU mini



SET TRU mini points



TRIBA mini



new

TUBE flex




new

TUBE stiff




new


RAFTER




RAFTER mini

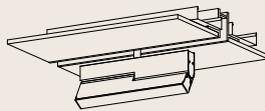

RAFTER points




TRIBA mini



new

TUBE flex



new

RAFTER mini



new

TUBE flex



new

TUBE stiff



new

PET maxi




QRLED next



new

RAFTER



SET TRU



TRIBA midi



new

NEW PRODUCT

Qrled next


Next is a new version
of the popular family
of luminaires

Small size, high light parameters and high light efficiency make QRLED an extremely aesthetic and effective way to provide a well-lit interior.



QRLED next


flattrack | suspended flattrack | suspended multitrack

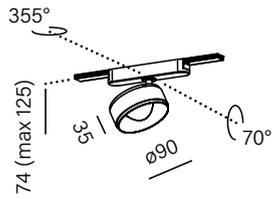

new

CAT. N°


16496-M930-W3-00-12

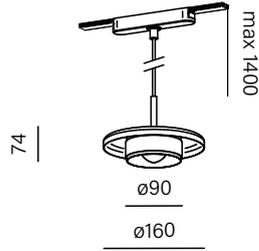

new

CAT. N°

16497-M930-W3-00-12

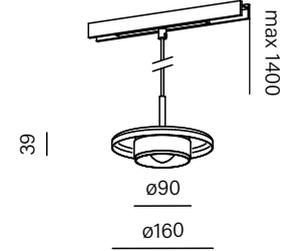

new


CAT. N°

16485-M930-W3-00-12

POWER:	6W (L) 9W (M)
FLUX:	830lm-1130lm
OPTICS:	52° (W_)
CCT:	2700K (27) 3000K (30) 4000K (40)
CONTROL:	ON/OFF (00) DALI (DA)

QRLED next


track | high multitrack | multitrack

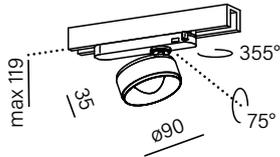

new

CAT. N°


16486-M930-W3-00-12

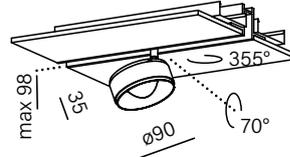

new

CAT. N°

16483-M930-W3-00-12

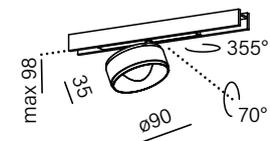

new

CAT. N°

16484-M930-W3-00-12

POWER:	6W (L) 9W (M)
FLUX:	830lm - 1130lm
OPTICS:	52° (W_)
CCT:	2700K (27) 3000K (30) 4000K (40)
CONTROL:	ON/OFF (00) DALI (DA) ON/OFF second circuit (01)



LUMINAIRE FINISHES

- WHITE -13 ○
- GREY -84 ●
- TAUPE -82 ●
- BLACK -12 ●
- TERRACOTTA -83 ●
- GOLD -19 ●
- MIX -06 ●

R



Decorative form and precise light

TRIBA is precise optics and high quality of light enclosed in a decorative, three dimensional form.

Two diameters, beam angles from 18 to 50°, luminous flux from 510lm to approx. 1000lm allow you to easily select the appropriate luminaire model.

High light parameters, including CRI>90 (or even CRI>95 on request) and uniform light colour (SDCM3) will ensure the highest quality lighting. And the expressive shape will add character to the interior. TRIBA attracts attention and shines well.




reddot winner 2024

NEW PRODUCT

Triba


TRIBA mini LED multitrack | high multitrack

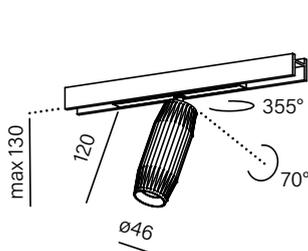

new

CAT. N°

16474-M930-FB-00-12

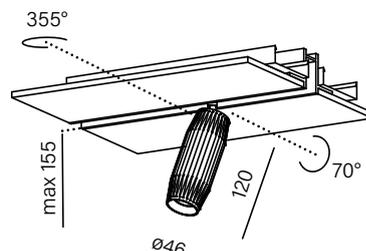


new

CAT. N°

16475-M930-FB-00-12

TRIBA midi LED track

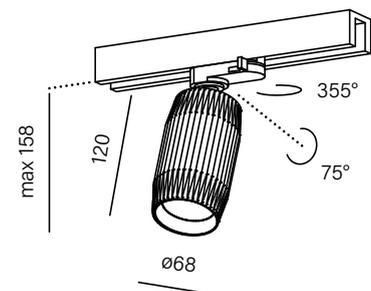

new

CAT. N°

16479-M930-FB-00-12

POWER:	4.5W (M)	8.5W (M)
FLUX:	540lm	1140lm
CCT:	20° (F_) 41° (W_)	18° (S_) 35° (F_) 50° (W_)
OPTICS:	2700K (27) 3000K (30) 4000K (40)	
CONTROL:	ON/OFF (00) ON/OFF second circuit (01) DALI (DA)	ON/OFF (00) Phase-Control (PH) DALI (DA) AQsmart (DB)

ACCESSORY

honeycomb



RING FINISHES

- WHITE -_W- ○
- BLACK -_B- ●
- GREY -_A- ●
- TERRACOTTA -_R- ●
- TAUPE -_T- ●
- GOLD -_G- ●

LUMINAIRE FINISHES

- WHITE -13 ○
- BLACK -12 ●
- GREY -84 ●
- TERRACOTTA -83 ●
- TAUPE -82 ●
- GOLD -19 ●





A functional way to break the monotony

If you value a touch of individualism and general lighting – this fixture is for you. The luminous flexible tube not only catches the eye but gently illuminates the entire room. The option to connect it to one or two track systems invites you to play with its inherently variable form. Create luminous compositions during design or even during installation that will add dynamism to the space.

NEW PRODUCT

Tube

TUBE flattrack flex | stiff

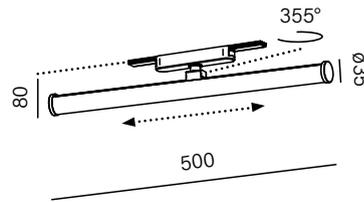
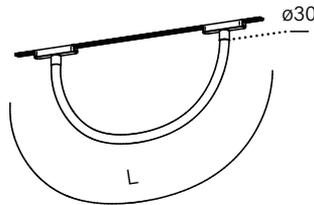


new

new

LENGTH	CAT. N°	LENGTH	CAT. N°
1000mm	16506-M930-D9-00-12	500mm	16505-M930-D9-00-12
2000mm	16507-M930-D9-00-12		
POWER:	9W - 18W (M)		8.5W (M)
FLUX:	1280lm - 2560lm		1070lm
CCT:	2700K (27) 3000K (30)		
CONTROL:	ON/OFF (00)		

TUBE multitrack flex | stiff

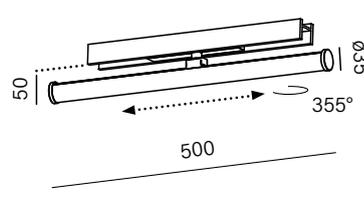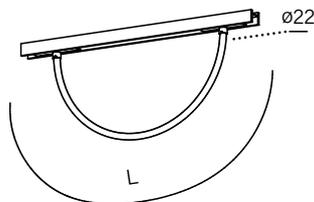


new

new

LENGTH	CAT. N°	LENGTH	CAT. N°	LENGTH	CAT. N°
1000mm	16510-M930-D9-00-12	500mm	16514-M930-D9-00-12	1000mm	16512-M930-D9-00-12
2000mm	16511-M930-D9-00-12			2000mm	16513-M930-D9-00-12
POWER:	9W - 18W (M)		10W (M)		10W - 20W (M)
FLUX:	1280lm - 2560lm		1290lm		1210lm - 2430lm
CCT:	2700K (27) 3000K (30)				
CONTROL:	ON/OFF (00)				

TUBE high multitrack flex

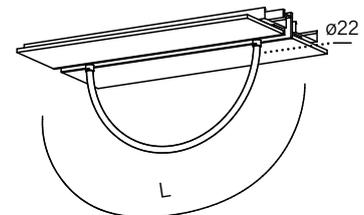

new



LUMINAIRE FINISHES

- WHITE -13 ○
- BLACK -12 ●



KO

ŚWIECENIA

Pet

COMFORT

Delicate form and good light


The PET mini delivers a bright, focused light that highlights the interior's key features. Carefully designed optics of PET luminaires as well as appropriately selected light parameters allow for low glare in the interior and high visual comfort.

Thanks to high levels of luminous flux and various beam angles, PET luminaires are perfect for many applications: in homes, shops and public spaces. They can be equipped with optional accessory – a honeycomb. PET luminaires are available in many colour versions, including mixed versions in which the decorative ring is a different colour than the body. For supporters of more classical solutions, we have a version with a traditional light source with an equally minimalistic design.



PET mini


microtrack | suspended microtrack | flattrack | suspended flattrack

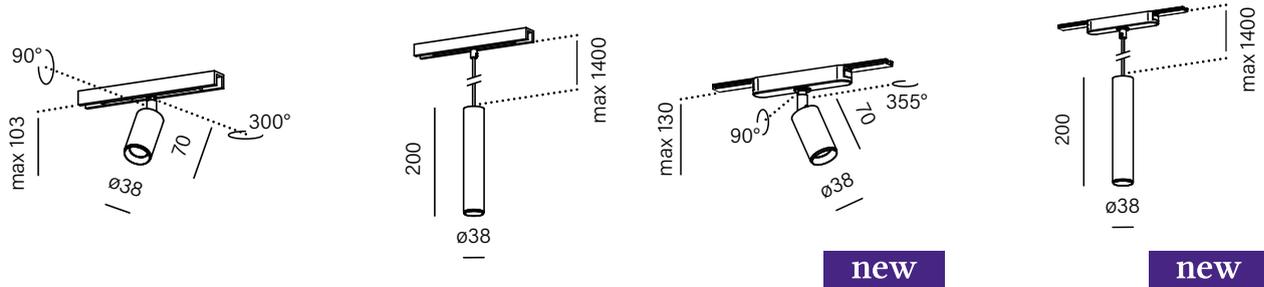

CAT. N°	CAT. N°	CAT. N°	CAT. N°
16436-M930-FB-00-12	16434-M930-FB-00-12	16495-M930-FB-00-12	16494-M930-FB-00-12
POWER: 4.5W (M)			
FLUX: 540lm			
OPTICS: 20° (F_) 41° (W_)			
CCT: 2700K (27) 3000K (30) 4000K (40)			
CONTROL: ON/OFF (00) DALI (DA)		ON/OFF (00)	

PET mini

track | high multitrack | multitrack | suspended multitrack



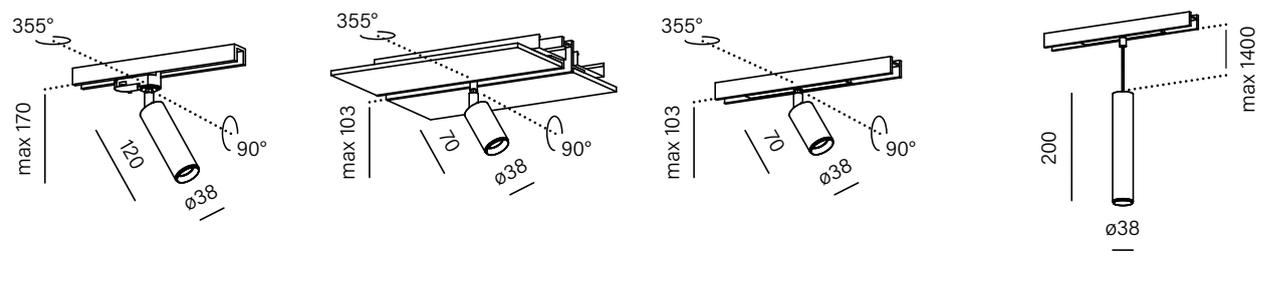


CAT. N°	CAT. N°	CAT. N°	CAT. N°
16358-M930-FB-00-12	16435-M930-FB-00-12	16367-M930-FB-00-12	16369-M930-FB-00-12
POWER: 4.5W (M)			
FLUX: 540lm			
OPTICS: 20° (F_) 41° (W_)			
CCT: 2700K (27) 3000K (30) 4000K (40)			
CONTROL: ON/OFF (00)		ON/OFF (00) ON/OFF second circuit (01) DALI (DA)	



Pet

PET track maxi | midi | GU10

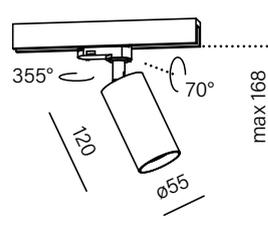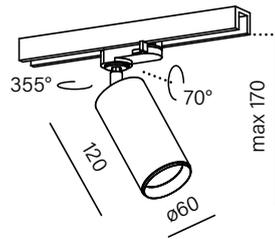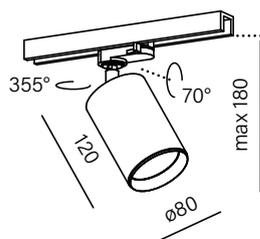

CAT. N°	CAT. N°
16370-M930-FB-00-12	16362-M930-FB-00-12
POWER: 11.5W (L) 17W (M) 20.5W (H)	
FLUX: 1610lm - 2670lm	
OPTICS: 19° (S_) 32° (F_) 53° (W_) 18° (S_) 35° (F_) 50° (W_)	
CCT: 2700K (27) 3000K (30) 4000K (40)	
CONTROL: ON/OFF (00) Phase-Control (PH) DALI (DA) Aqsmart (DB)	




CAT. N°
12548-0000-U8-PH-12
POWER: max: 50W
CONTROL: Phase-Control (PH)



light source not included



PET midi flatrack | multitrack | high multitrack

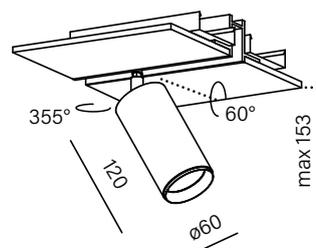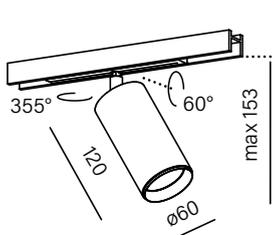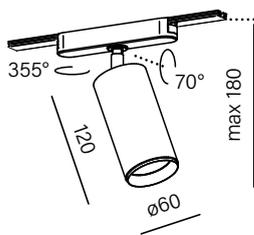

new

CAT. N°	CAT. N°	CAT. N°
16493-M930-FB-00-12	16366-M930-FB-00-12	16433-M930-FB-00-12
POWER: 8.5W (M)		
FLUX: 1140lm		
OPTICS: 18° (S_) 35° (F_) 50° (W_)		
CCT: 2700K (27) 3000K (30) 4000K (40)		
CONTROL: ON/OFF (00)		ON/OFF (00) ON/OFF second circuit (01) DALI (DA)



ACCESSORY

honeycomb



RING FINISHES

not applicable PET GU10

- WHITE -_W- ○
- BLACK -_B- ●
- GREY -_A- ●
- TERRACOTTA -_R- ●
- TAUPE -_T- ●
- GOLD -_G- ●

LUMINAIRE FINISHES

- WHITE -13 ○
- BLACK -12 ●
- GREY -84 ●
- TERRACOTTA -83 ●
- TAUPE -82 ●
- GOLD -19 ●





Flexibility at its best

HYPER zoom allows you to change the beam angle using a rotating ring. The 20-45° range makes it possible to highlight various surfaces and objects located in different places in the room.

Hyper zoom in the track version is an extremely flexible solution for a variety of applications, both in private and commercial interiors.




Hyper

HYPER zoom maxi track | track

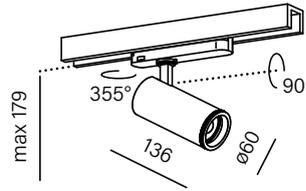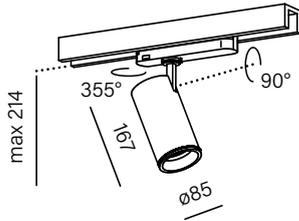

	CAT. N°	CAT. N°
	16445-M930-Z3-00-12	16446-M930-Z3-00-12
POWER:	17W (L) 24W (M)	9W (M)
FLUX:	2260lm - 3080lm	1020lm
OPTICS:	20° - 45° (Z3)	
CCT:	3000K (30) 4000K (40)	2700K (27) 3000K (30) 4000K (40)
CONTROL:	ON/OFF (00) DALI (DA) Aqsmart (DB)	

HYPER zoom multitrack | high multitrack | flattrack

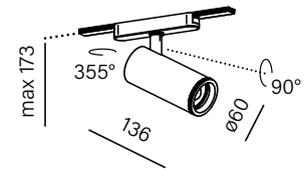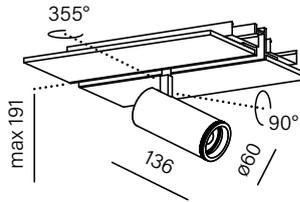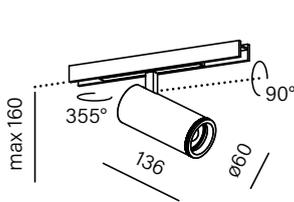

new

	CAT. N°	CAT. N°	CAT. N°
	16450-M930-Z3-00-12	16449-M930-Z3-00-12	16488-M930-Z3-00-12
POWER:		9W (M)	
FLUX:		1020lm	
OPTICS:	20° - 45° (Z3)		
CCT:	2700K (27) 3000K (30) 4000K (40)		
CONTROL:	ON/OFF (00) ON/OFF second circuit (01) DALI (DA)		ON/OFF (00)



LUMINAIRE FINISHES

- WHITE -13 ○
- BLACK -12 ●

WIELOZADANIOWY



DWY

Rafter

**Lots of possibilities
in a small form**


RAFTER series are versatile fixtures that, despite their small size, can do a lot. The move versions guarantee almost unlimited freedom to direct the luminaire to any place in the interior. Fixtures with a reflector provide precise accent lighting, and models with an opal cover offer diffused light in a larger space. All this, in a minimalist form, which is an interesting addition to modern interiors.

The RAFTER model with an opal cover is a great way to provide even general lighting in the interior or to accentuate a larger space with light.

RAFTER points offer high visual comfort for interior users and precise lighting of selected places in the room. Thanks to the deeply embedded diodes, it provides a high shielding angle and allows for low glare in the interior. It is perfect both as a layer of task and accent lighting, for instance pictures, bookcases or countertops.

RAFTER mini points

move multitrack | move high multitrack | multitrack

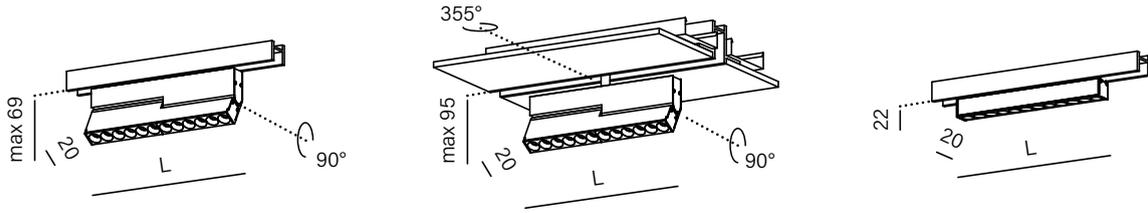


LENGTH	CAT. N°	CAT. N°	CAT. N°
100mm	16455-M930-FB-00-12	16452-M930-FB-00-12	16457-M930-FB-00-12
195mm	16456-M930-FB-00-12	16453-M930-FB-00-12	16458-M930-FB-00-12
POWER:	4.5W - 9W (M)		
FLUX:	580lm - 1140lm		
OPTICS:	24° (F_) 45° (W_)		
CCT:	2700K (27) 3000K (30)		
CONTROL:	ON/OFF (00) ON/OFF second circuit (01) DALI (DA)		



RAFTER mini

move multitrack | move high multitrack | multitrack

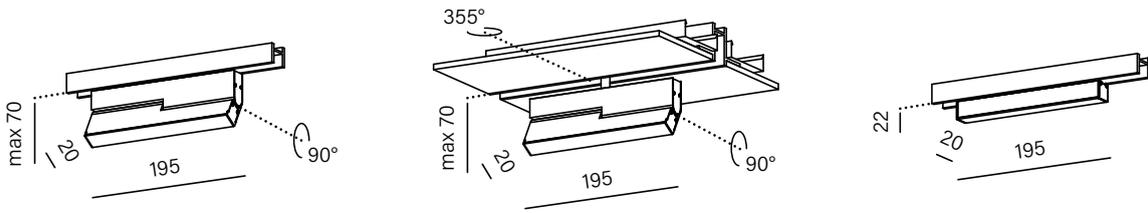

CAT. N°	CAT. N°	CAT. N°
16466-M930-D9-00-12	16463-M930-D9-00-12	16461-M930-D9-00-12
POWER:	12.5W (M)	
FLUX:	1670lm	
CCT:	2700K (27) 3000K (30)	
CONTROL:	ON/OFF (00) ON/OFF second circuit (01) DALI (DA)	



RAFTER mini points
microtrack | move microtrack


Rafter mini



CAT. N°	CAT. N°
16451-M930-FB-00-12	16454-M930-FB-00-12
POWER:	4.5W (M)
FLUX:	580lm
OPTICS:	24° (F_) 45° (W_)
CCT:	2700K (27) 3000K (30)
CONTROL:	ON/OFF (00) DALI (DA)

RAFTER mini
flattrack

RAFTER mini points
flattrack | move flattrack

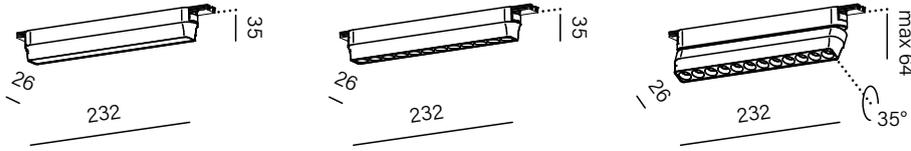

new

new

new

CAT. N°	CAT. N°	CAT. N°
16503-M930-D9-00-12	16504-M930-FB-00-12	16502-M930-FB-00-12
POWER:	8.5W (M)	11W (M)
FLUX:	1050lm	1180lm
OPTICS:	opal (D9)	32° (F_)
CCT:	2700K (27) 3000K (30)	
CONTROL:	ON/OFF (00)	

OPTICS FINISHES
only for points




WHITE -_W- ○
BLACK -_B- ●

LUMINAIRE FINISHES

WHITE -13 ○
BLACK -12 ●




RAFTER

track | multitrack | high multitrack

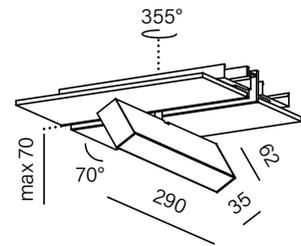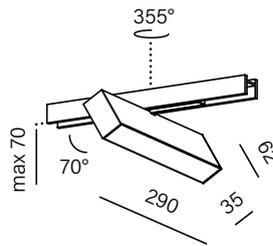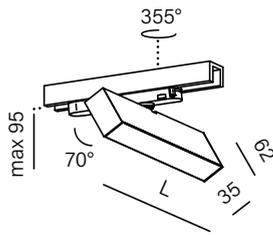

LENGTH	CAT. N°	CAT. N°	CAT. N°
290mm	16335-M930-D9-00-12	16342-M930-D9-00-12	16441-M930-D9-00-12
430mm	16336-M930-D9-00-12		
POWER:	12.5W - 18.5W (M)		12.5W (M)
FLUX:	1550lm - 2320lm		1550lm
OPTICS:	opal (D9)		
CCT:	2700K (27) 3000K (30) 4000K (40)		
CONTROL:	ON/OFF (00) DALI (DA) Aqsmart (DB)		ON/OFF (00) ON/OFF second circuit (01) DALI (DA)

RAFTER points track | flatrack

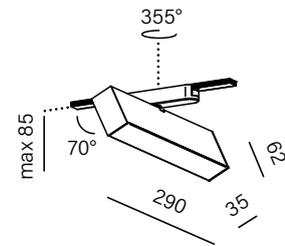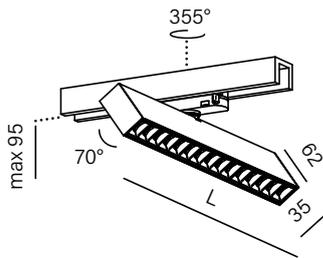

new

new




LENGTH	CAT. N°	CAT. N°	CAT. N°
270mm	16323-M930-FB-00-12	16499-M930-FB-00-12	16498-M930-D9-00-12
400mm	16326-M930-FB-00-12		
POWER:	10W - 15W (L) 20.5W - 31W (M)		18.5W (M)
FLUX:	1200lm - 3020lm		2320lm
OPTICS:	37° (F_) 50° (W_)		opal (D9)
CCT:	2700K (27) 3000K (30) 4000K (40)		
CONTROL:	ON/OFF (00) DALI (DA) Aqsmart (DB)		ON/OFF (00)



Rafter

RAFTER points

multitrack | high multitrack | microtrack

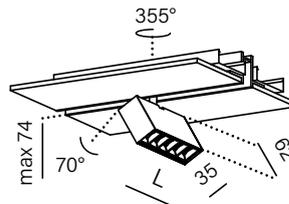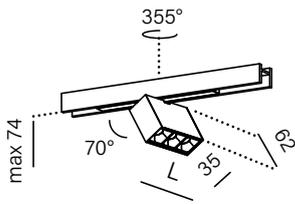

LENGTH	CAT. N°	CAT. N°	CAT. N°
90mm	16419-M930-FB-00-12	16421-M930-FB-00-12	16422-M930-FB-00-12
140mm	16341-M930-FB-00-12	16442-M930-FB-00-12	
POWER:	3W - 5W (M)		3W (M)
FLUX:	360lm - 600lm		360lm
OPTICS:	37° (F_) 50° (W_)		
CCT:	2700K (27) 3000K (30) 4000K (40)		
CONTROL:	ON/OFF (00) ON/OFF second circuit (01) DALI (DA)		ON/OFF (00) DALI (DA)



OPTICS FINISHES

only for points

WHITE -_W- ○

BLACK -_B- ●

LUMINAIRE FINISHES

WHITE -13 ○

BLACK -12 ●

Tru




Simple form and unique functionality



SET TRU mini are linear fixtures with a slim form, designed for MULTITRACK. They are available in two lengths and optics variants. The first one is a milky opal cover providing diffused light, ideal as general lighting. The second one is the points variant, providing directional light that precisely illuminates the work surface or the floor directly under the fixture.

The SET TRU family of luminaires for track 3F introduces many new possibilities in the lighting of private and commercial interiors.

SET TRU track

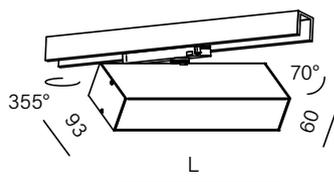

SET TRU mini multitrack | points multitrack

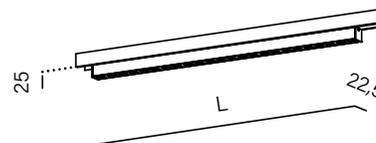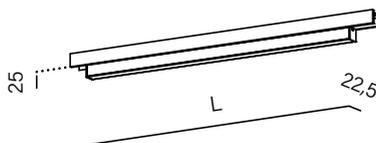

LENGTH	CAT. N°	LENGTH	CAT. N°	LENGTH	CAT. N°
290mm	16392-M930-D9-00-12	570mm	16374-M930-D9-00-12	285mm	16379-M930-WB-00-12
430mm	16393-M930-D9-00-12	1140mm	16375-M930-D9-00-12	565mm	16380-M930-WB-00-12
				845mm	16381-M930-WB-00-12
POWER:	12,5W - 18,5W (M)		8W - 16W (M)		5W - 13W (M)
FLUX:	1550lm - 2320lm		1070lm - 2140lm		710lm - 2080lm
OPTICS:	opal (D9)			59° (W_)	
CCT:	2700K (27) 3000K (30) 4000K (40)	3000K (30) 4000K (40)		2700K (27) 3000K (30) 4000K (40)	
CONTROL:	ON/OFF (00) DALI (DA) Aqsmart (DB)			ON/OFF (00) ON/OFF second circuit (01) DALI (DA)	



OPTICS FINISHES
only for points

LUMINAIRE FINISHES

new WHITE -_W- ○
BLACK -_B- ●



WHITE -13 ○
BLACK -12 ●

Blos round

A simple way of light in the interior

The BLOS family luminaires, thanks to their evenly illuminated, milky cover and very high luminous flux, are perfect for efficient, comfortable general lighting in the interior. The 3F track version is a very efficient and flexible way to ensure a well-lit interior.

BLOS round suspended track | track

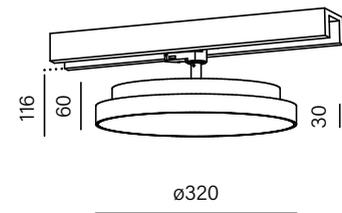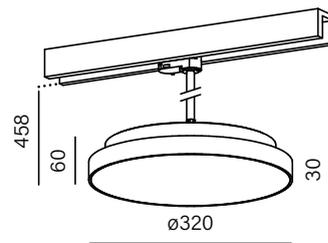

CAT. N°

16424-M930-D9-00-12

CAT. N°

16423-M930-D9-00-12

POWER:	11.5W (L) 23W (M)
FLUX:	1720lm - 3260lm
CCT:	2700K (27) 3000K (30) 4000K (40)
CONTROL:	ON/OFF (00) DALI (DA) Aqsmart (DB)




LUMINAIRE FINISHES

- WHITE -13 ○
- BLACK -12 ●
- GREY -84 ●
- TERRACOTTA -83 ●
- TAUPE -82 ●
- GOLD -19 ●



MODERN BALL simple mini
flattrack | suspended flattrack


MODERN BALL simple mini
microtrack | suspended microtrack

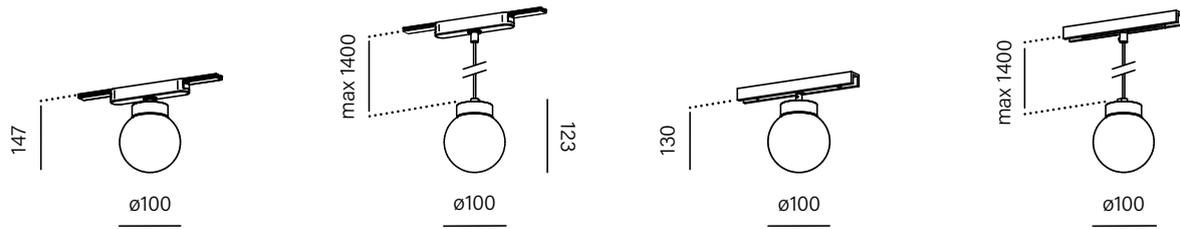

new **new**

CAT. N°	CAT. N°	CAT. N°	CAT. N°
16491-M930-D0-00-12	16492-M930-D0-00-12	16430-M930-D0-00-12	16431-M930-D0-00-12
POWER: 4W (L) 6W (M)			
FLUX: 580lm - 790lm			
CCT: 2700K (27) 3000K (30) 4000K (40)			
CONTROL: ON/OFF (00)		ON/OFF (00) DALI (DA)	

MODERN BALL simple midi
track | suspended track | multitrack | suspended multitrack

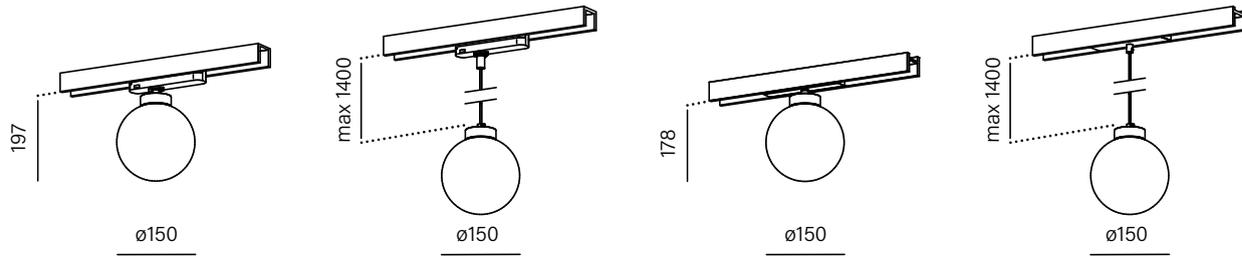

CAT. N° **CAT. N°** **CAT. N°** **CAT. N°**

CAT. N°	CAT. N°	CAT. N°	CAT. N°
16386-M930-D0-00-12	16387-M930-D0-00-12	16388-M930-D0-00-12	16389-M930-D0-00-12
POWER: 6W (L) 9W (M)			
FLUX: 830lm - 1130lm			
CCT: 2700K (27) 3000K (30) 4000K (40)			
CONTROL: ON/OFF (00) DALI (DA)		ON/OFF (00) ON/OFF second circuit (01) DALI (DA)	



Modern Ball simple


Quality, simplicity and style

MODERN BALL simple is a combination of classic form and modern LED technology. The evenly illuminated lampshade emits a lot of light in all directions without dazzling. This provides exceptionally comfortable light throughout the space. It even illuminates the ceiling, resulting in soft light reflected from its surface.

MODERN BALL simple arranged on tracks add character to both modern and more classic interior arrangements.

MODERN BALL simple midi


high multitrack | flatrack | suspended flatrack

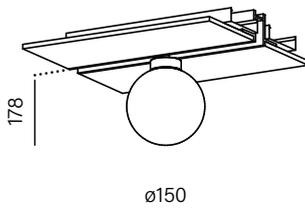

ø150

CAT. N°

16429-M930-D0-00-12




ø150

new

CAT. N°

16489-M930-D0-00-12

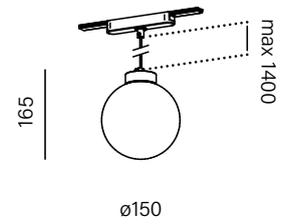

ø150

new

CAT. N°

16490-M930-D0-00-12


POWER:	6W (L) 9W (M)
FLUX:	830lm - 1130lm
CCT:	2700K (27) 3000K (30) 4000K (40)
CONTROL:	ON/OFF (00) ON/OFF second circuit (01) DALI (DA)
	ON/OFF (00)

LUMINAIRE FINISHES

- WHITE -13 ○
- BLACK -12 ●

Example of track sets

3F track suspended

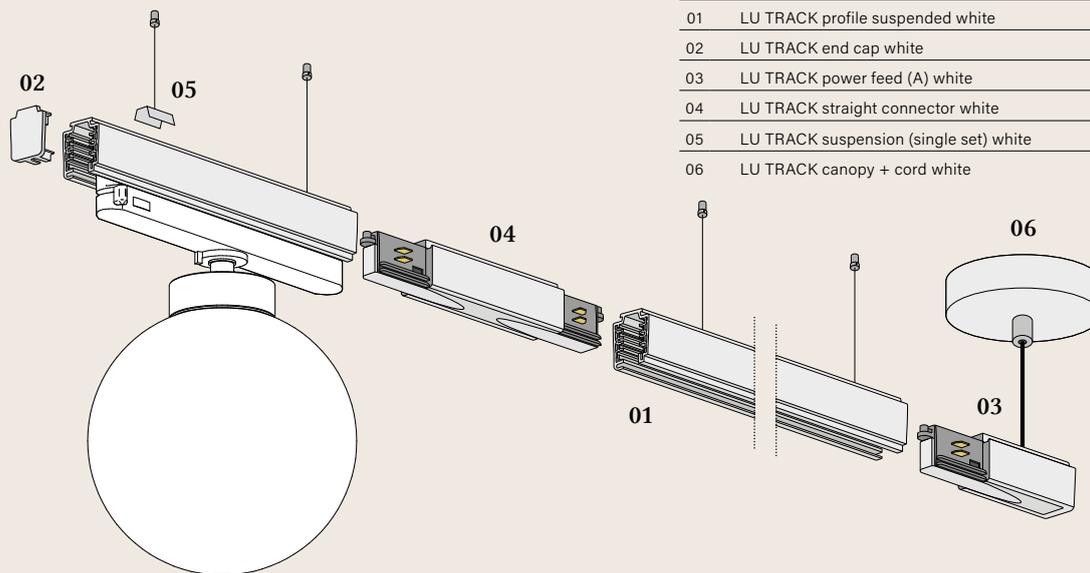


PRODUCT	CAT. N°
01 LU TRACK profile suspended white	STCH_PHW
02 LU TRACK end cap white	STECAPHW
03 LU TRACK power feed (A) white	STPCLPHW
04 LU TRACK straight connector white	STASUPHW
05 LU TRACK suspension (single set) white	STSHM00W
06 LU TRACK canopy + cord white	STSHUPBW

TIP: within a 3F track you can use 3 separate lighting circuits.

In simple words - you can create 3 separate lighting scenes easily

Multitrack surface


PRODUCT	CAT. N°
01 M MULTITRACK profile surface black	SMCM_DAB
02 M MULTITRACK end cap with opening surface/suspended black	SMECH00B
03 M MULTITRACK electrical straight connector universal black	SMASUDAB
04 M MULTITRACK electrical flexible connector universal black	SMPFUDAB
05 M MULTITRACK power feed universal black	SMPCUDAB
06 M MULTITRACK straight connector	SMCSU000
07 M MULTITRACK canopy with power supply EM 100W 48V surface black	SMCMMPBB

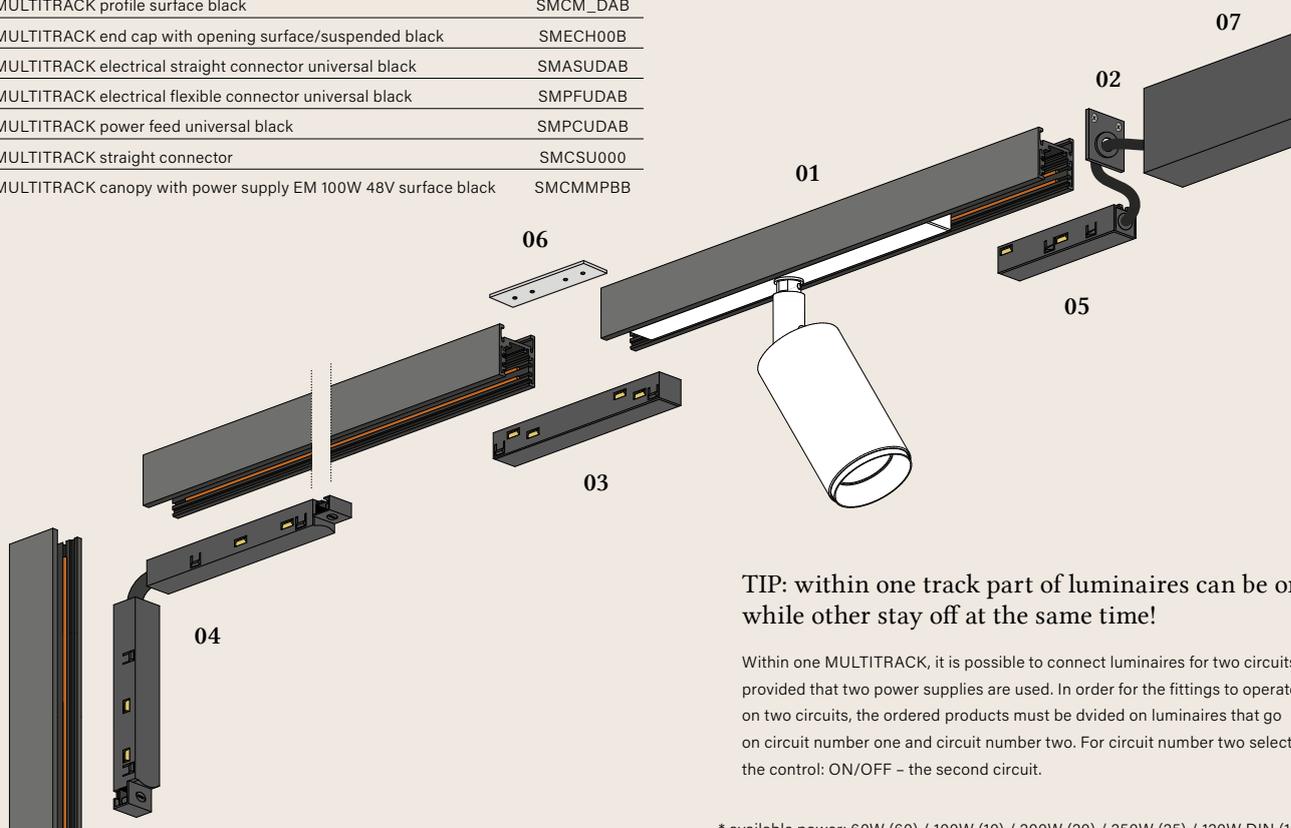

TIP: within one track part of luminaires can be on while other stay off at the same time!


Within one MULTITRACK, it is possible to connect luminaires for two circuits, provided that two power supplies are used. In order for the fittings to operate on two circuits, the ordered products must be divided on luminaires that go on circuit number one and circuit number two. For circuit number two select the control: ON/OFF - the second circuit.

3F track DALI surface

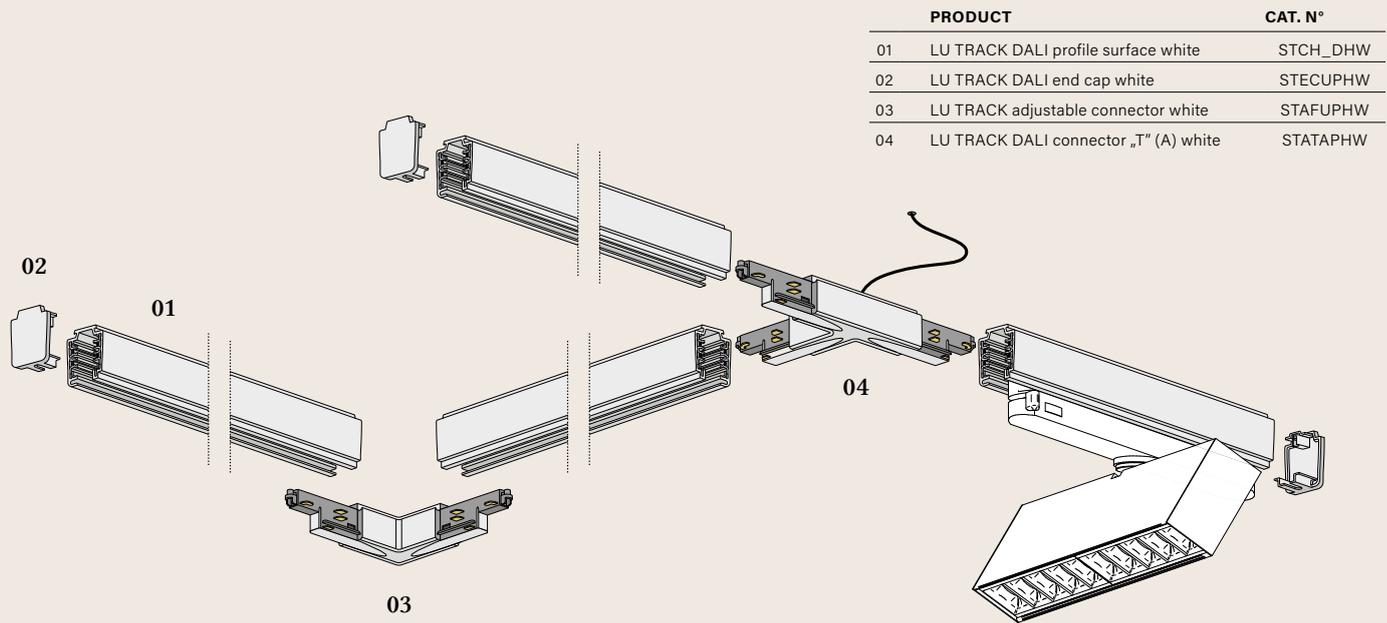

	PRODUCT	CAT. N°
01	LU TRACK DALI profile surface white	STCH_DHW
02	LU TRACK DALI end cap white	STECUPHW
03	LU TRACK adjustable connector white	STAFUPHW
04	LU TRACK DALI connector „T“ (A) white	STATAPHW

Multitrack suspended

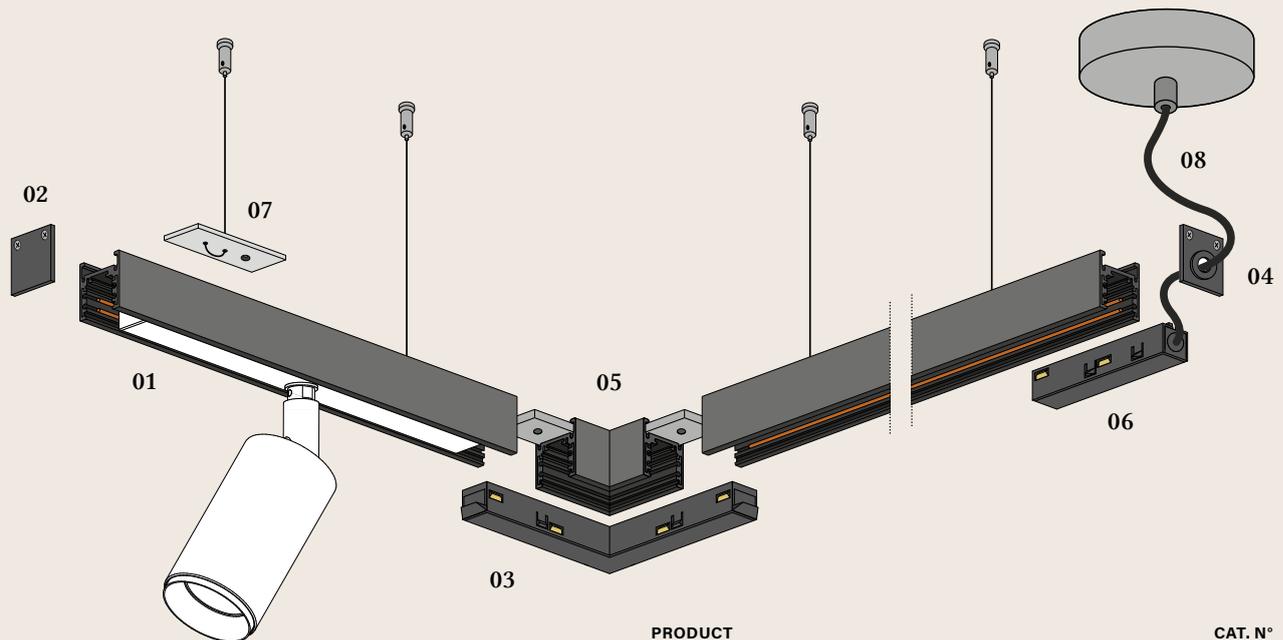


	PRODUCT	CAT. N°
01	M MULTITRACK profile suspended black	SMSM_DAB
02	M MULTITRACK end cap surface/suspended black	SMECU00B
03	M MULTITRACK connector „L“ electrical universal black	SMPLUDAB
04	M MULTITRACK end cap with opening surface/suspended black	SMECH00B
05	M MULTITRACK mechanical corner connector „L“ surface/suspended	SMCLU00B
06	M MULTITRACK power feed universal black	SMPCUDAB
07	M MULTITRACK suspension set 1,4m suspended	SMW01000
08	Canopy fi100 + power cable 5x0,75mm2 1,4m black	SMCP4PBB

* available power: 60W (60) / 100W (10) / 200W (20) / 250W (25) / 120W DIN (12)


Example of track sets

High Multitrack recessed trim

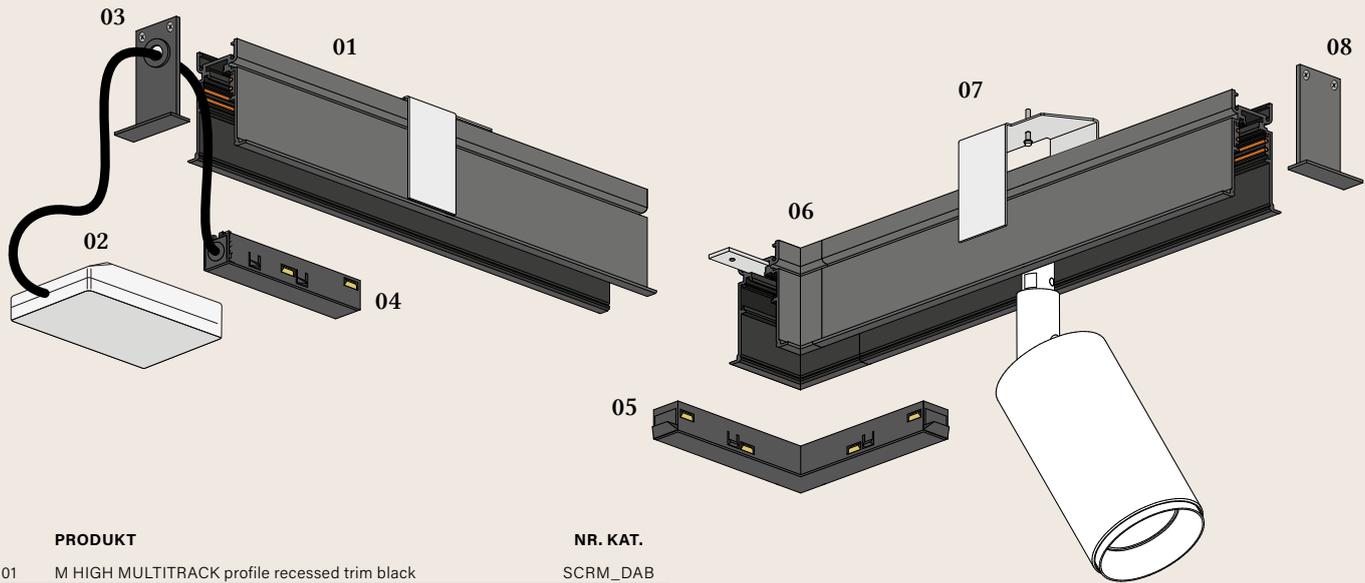

PRODUKT	NR. KAT.
01 M HIGH MULTITRACK profile recessed trim black	SCRM_DAB
02 power supply 48V	SHRP0__0
03 M HIGH MULTITRACK end cap with opening recessed trim black	SCECH00B
04 M MULTITRACK power feed universal black	SMPCUDAB
05 M MULTITRACK connector „L” electrical universal black	SMLUDAB
06 M HIGH MULTITRACK mechanical connector „L” recessed trim black	SCRLF00B
07 M HIGH MULTITRACK mounting bracket for recessed trim	SCRFU00U
08 M HIGH MULTITRACK end cap recessed trim black	SCECU00B


High Multitrack suspended up&down

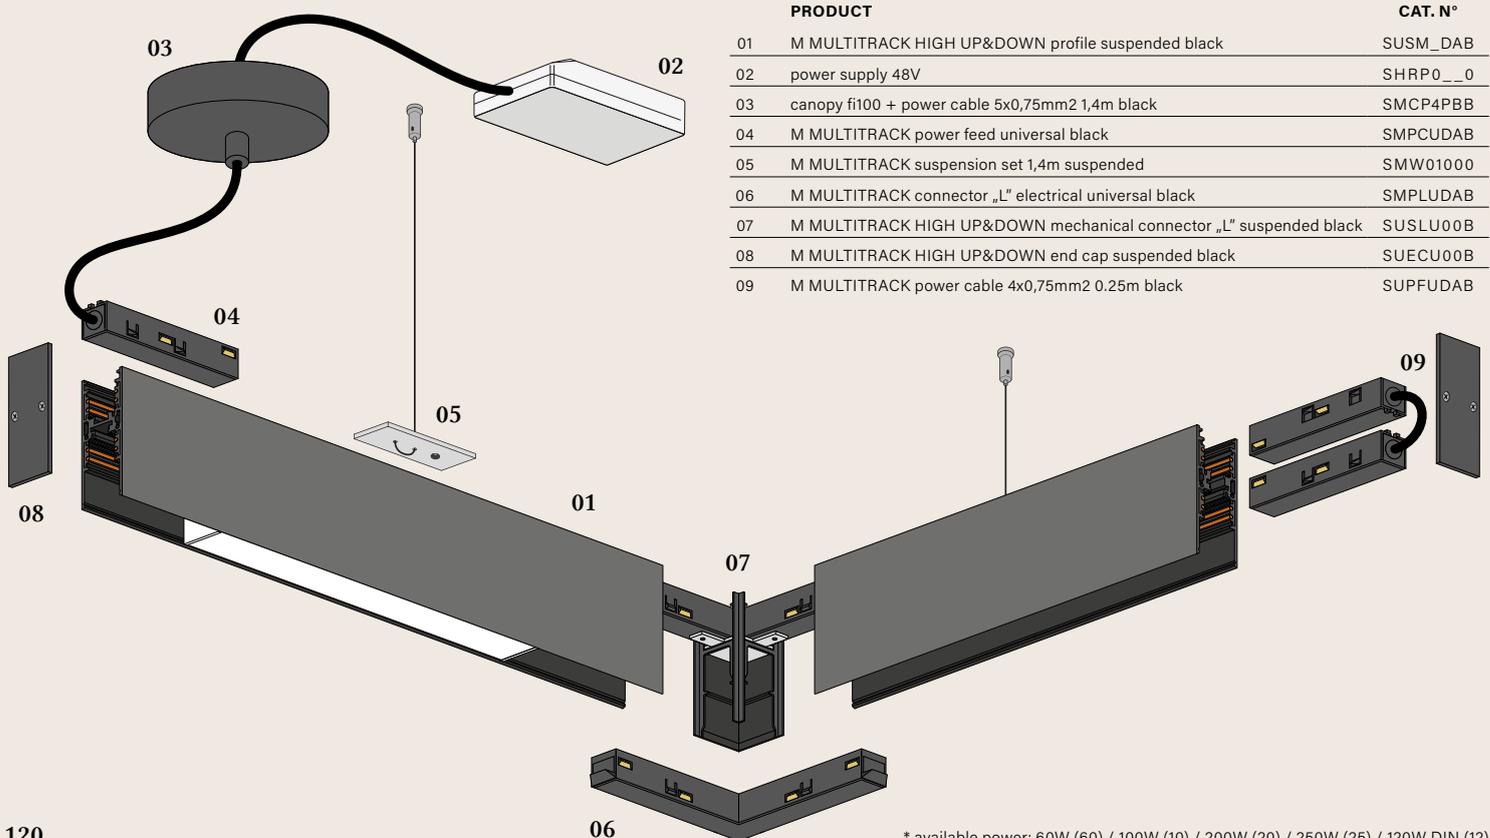

PRODUCT	CAT. N°
01 M MULTITRACK HIGH UP&DOWN profile suspended black	SUSM_DAB
02 power supply 48V	SHRP0__0
03 canopy fi100 + power cable 5x0,75mm ² 1,4m black	SMCP4PBB
04 M MULTITRACK power feed universal black	SMPCUDAB
05 M MULTITRACK suspension set 1,4m suspended	SMW01000
06 M MULTITRACK connector „L” electrical universal black	SMLUDAB
07 M MULTITRACK HIGH UP&DOWN mechanical connector „L” suspended black	SUSLU00B
08 M MULTITRACK HIGH UP&DOWN end cap suspended black	SUECU00B
09 M MULTITRACK power cable 4x0,75mm ² 0.25m black	SUPFUDAB


Flattrack surface

PRODUCT	CAT. N°
01 F FLATTRACK profile black	SFCM___B
02 POWER adapter 120W black	SFPMU12B
03 FLATTRACK JOINT „L” electric black	SFPLU00B
04 F FLATTRACK power end cap black	SFPCU00B
05 F FLATTRACK power end cap black	SFECU00B
06 M MULTITRACK canopy with power supply EM 100W 48V surface black	SMCMMPB

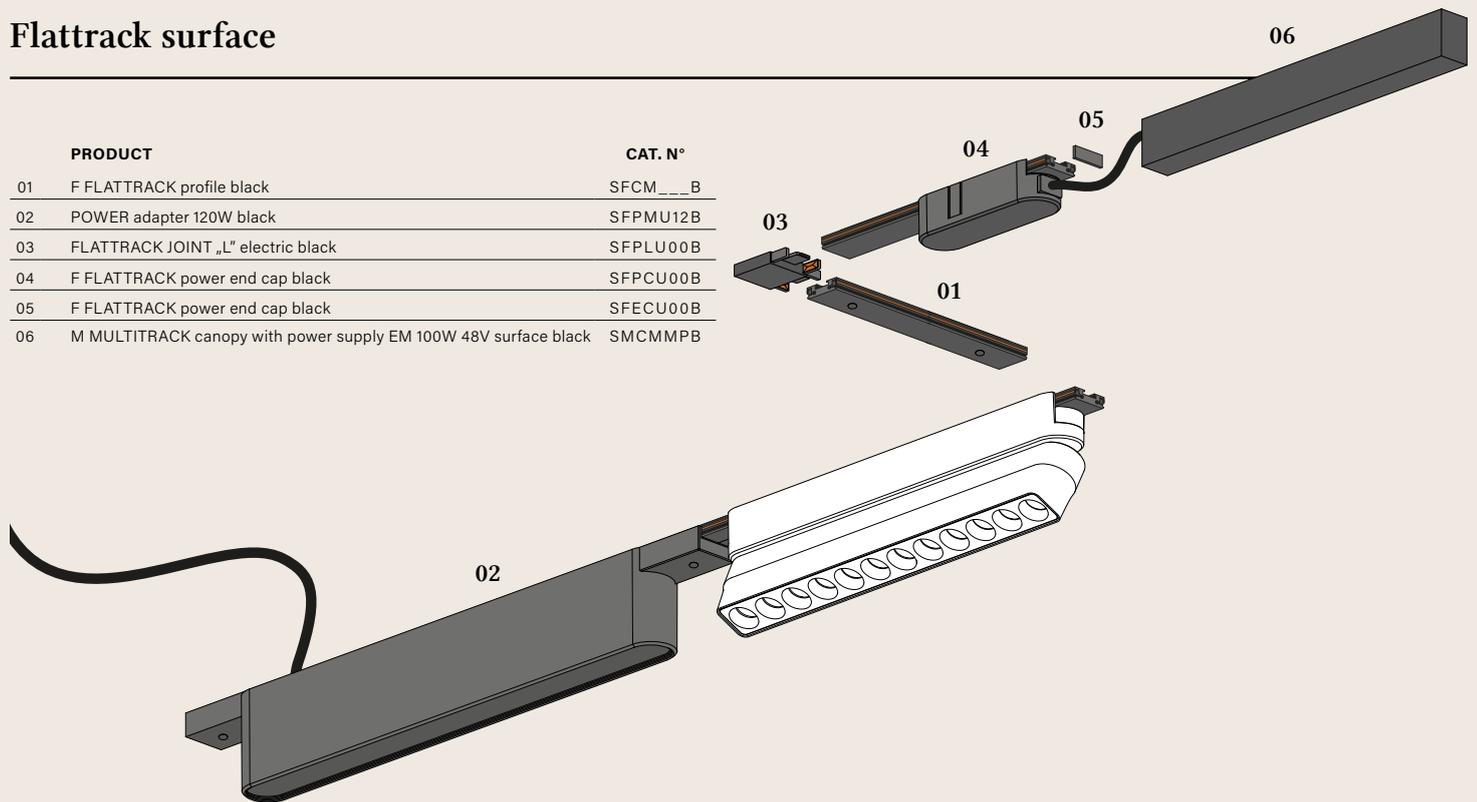

Microtrack surface

PRODUCT	CAT. N°
01 O MICROTRACK profile surface black	SOCM_DAB
02 O MICROTRACK power box with opening for cable 100W 48V surface black	SOCP2PBB
03 O MICROTRACK power end cap with cable 2,5m black	SOPCU00B
04 O MICROTRACK electrical connector „L” universal black	SOPLUDAB
05 O MICROTRACK connector "L" black	SOCLU00B
06 O MICROTRACK end cap surface black	SOSCU00B

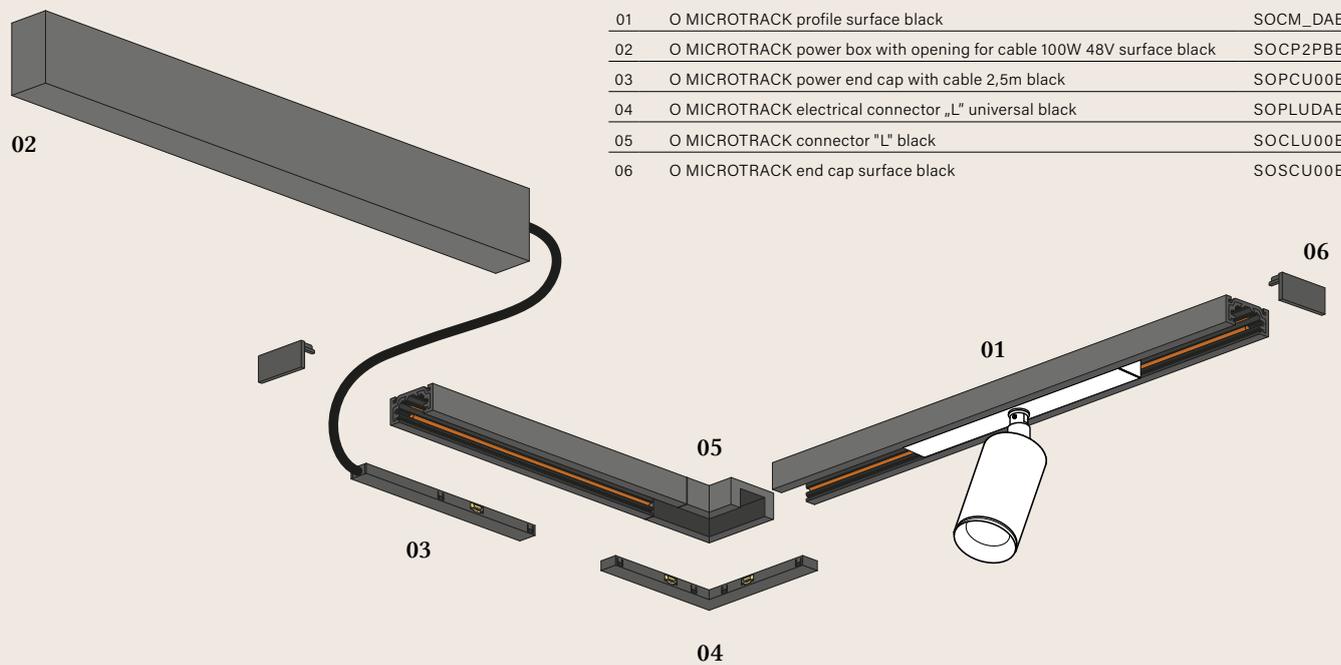



All dimensions and technical data in catalogues are provided for a guidance purposes only. Actual data may differ slightly due to the production process. Technical information contained within Aquaform's website, data sheets or mounting instructions shall prevail over the information contained in catalogues. Aquaform Inc. reserves the right to change the presented materials and product specifications without prior notice.

Aquaform Inc. takes no responsibility for any possible misprints. All photos, icons and images are copyright protected. Images are illustrative presentations of products and colours. Due to the production process RAL colour of white track and adapter differs a few tones from a standard white finish of AQForm luminaires.

Information contained in the catalogue shall not constitute an offer, also within the meaning of art. 66 § 1 of Polish Civil Code.

© 2024 AQUAFORM Inc. sp. z o.o.
All rights reserved.

Podane w katalogach wymiary oraz informacje techniczne mają jedynie charakter informacyjny. Rzeczywiste dane mogą się nieznacznie różnić ze względu na proces produkcyjny. Informacje techniczne zawarte na stronie www, w kartach katalogowych oraz w instrukcjach montażu mają pierwszeństwo przed informacjami z katalogów. Aquaform Inc. zastrzega sobie prawo do zmiany przedstawianych materiałów i parametrów technicznych produktów bez wcześniejszego powiadomienia.

Aquaform Inc. nie ponosi odpowiedzialności za możliwe błędy w druku. Zdjęcia są chronione prawnie. Na zdjęciach pokazane jest poglądowe przedstawienie produktów oraz kolorów. Ze względu na proces produkcyjny kolor RAL białych szynoprzewodów oraz adapterów różni się o kilka tonów od standardowego białego wykończenia opraw AQForm.

Informacje zawarte w katalogu nie stanowią oferty handlowej, w tym w rozumieniu art. 66 §1 Kodeksu Cywilnego.

© 2024 AQUAFORM Inc. sp. z o.o.
Wszelkie prawa zastrzeżone.



PART OF
DELTALIGHT
Group

$$\frac{24}{25}$$

MULTITRAC