


Turbo HD 3K Products Family

3K UHD Imaging

As Simple as That

Ultimate Visual Experience without Distortion

- Apply to standard widescreen monitors with a 16:9 aspect ratio
- No distortion during the video preview or playback

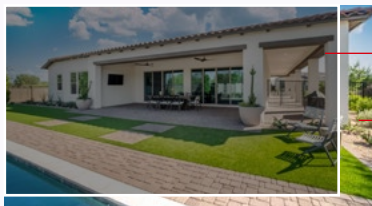

Other 5 MP (16 : 9) camera
2880 × 1620

Hikvision 3K camera with
ColorVu
2960 × 1665

More Visual Information with High Resolution

- More detailed information can be found in a high-quality, crisp image

Ultra Clear Imaging Even in Darkness

- Ensure clear, colorful imaging in low-light environments



Image taken by DF3T cameras 2 MP



Image taken by KF3T cameras 3K



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com



3K Products Showcase



Smart Dual-Light

KOT-LS

DS-2CE16KOT-LFS
DS-2CE16KOT-LPFS
DS-2CE17KOT-LFS
DS-2CE76KOT-LMFS
DS-2CE76KOT-LPFS
DS-2CE78KOT-LFS

- Smart supplemental lighting
- **0.01 lux**
- Warm light, 20/40m
- IR light, 20/25/30/40m
- Built-in mic, AoC



KFOT-S

DS-2CE10KFOT-FS
DS-2CE10KFOT-PFS
DS-2CE12KFOT-FS
DS-2CE70KFOT-MFS
DS-2CE70KFOT-PFS
DS-2CE72KFOT-FS

- **24/7 color imaging with F1.0 aperture**
- **0.001 lux**
- Warm light, WL 20/40 m
- Built-in mic, AoC



KF3T(-E)

DS-2CE10KF3T(-E)
DS-2CE12KF3T(-E)
DS-2CE72KF3T(-E)

- **24/7 color imaging with F1.0 aperture**
- **0.0003 lux**
- Warm light, WL 20/40m
- **130 dB WDR, 3D DNR**
- PoC (-E)



Live Guard

KF3T-PIRXO

DS-2CE12KF3T-PIRXO
DS-2CE72KF3T-PIRXO

- **24/7 color imaging with F1.0 aperture**
- **0.0003 lux**
- **Live guard**
- **Audio customization**
- **PIR detection**
- 130 dB WDR, 3D DNR

Recommended DVRs DVRs with AcuSense

AcuSense
Technology



3K @ 12 fps

iDS-7204HUHI-M1(2)/S (C) iDS-7204HUHI-M1/P (C)
iDS-7208HUHI-M1(2)/S (C) iDS-7208HUHI-M2/P (C)
iDS-7216HUHI-M2/S (E) iDS-7216HUHI-M2/P (C)

iDS-7204HUHI-M1(2)/FA (C)
iDS-7208HUHI-M1(2)/FA

3K @ 20 fps

iDS-7204HTHI-M1(2)/S (C)
iDS-7208HTHI-M2/S



Deep-learning based motion detection on all channels
Up to 4-ch deep-learning based perimeter protection



Audio over Coax



Wi-Fi Dongle Connection



Facial Recognition (1-ch) * /FA models

- Face matched / mismatched
- 500 face images at most stored in the chip with high stability
- Up to 16 face picture libraries



PoC * /P models



Connected with Hik-Connect

- Receive human/vehicle alarms on your mobile phone
- Arm and disarm easily via Hik-Connect app