

3M™ Safety-Walk™ Coarse Tapes and Treads 710

Extra-large mineral particles and more durable construction provide additional slip resistance in the most extreme conditions

- Extra-large abrasive particles provide additional slip and fall protection, even on wet or oily floors
- The tough polymer construction, incorporating a more durable mineral, is designed to stand up longer under heavy traffic
- An open abrasive pattern resists clogging and reduces clean up time

The ultimate in slip-resistant surfacing earned its stripes in the military

After much success within several branches of the military, this new slip-resistant surface is now helping to make the workplace safer. 3M™ Safety-Walk™ Coarse Tapes and Treads 710 provide positive, long-lasting traction helping to reduce slip and fall hazards.

A larger mineral bonded to a rugged polymer backing provide an additional measure of safety to even wet or oily floors. And the pressure-sensitive adhesive backing makes pieces easy to install.

Safety-Walk Coarse Tapes and Treads 710 are ideal for:


- Loading docks, catwalks and fire escapes
- Farm and construction equipment, trucks and forklifts
- Tops and steps of trucks, railroad cars and recreational vehicles
- Garage or machine shop floors
- Airplane ramps and ship decks

Safety-Walk products come in a variety of pre-cut shapes and sizes. Custom die cutting and slitting are also available from authorized converters.




3M™ Safety-Walk™ Coarse Tapes and Treads 710

A more durable slip-resistant surface than General Purpose 610

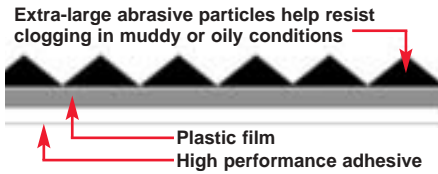

3M™ Safety-Walk™ Coarse Tapes and Treads 710

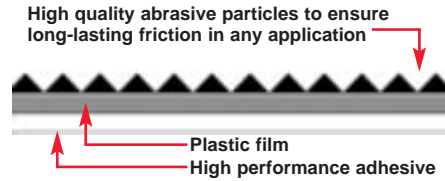

3M™ Safety-Walk™ General Purpose Tapes and Treads 610

Applications: Decks, bus steps, railroad car tops, farm or construction equipment, fire escapes, loading docks, garage floors and airplane ramps
Material: Coarse mineral-coated polymer surface backed by a high performance pressure-sensitive adhesive
Colors: Black #710
Sizes: Please refer to price pages for individual part numbers

| Typical Properties | Average Measured Values: |
|---------------------------------|--|
| Applied Thickness | .048 in. (1.22 mm) |
| Applied Weight | 5.51 oz./ft ² (1,720 mg/cm ²) |
| Minimum Application Temperature | 40°F (4°C) |
| Maximum Service Temperature | 175°F (79°C) |

Typical Properties **Average Measured Values:**

| | |
|--------------------------------|------------------------|
| Fire Retardancy, Smoke | |
| Density & Toxicity | |
| IMO A653 (16) & MSC 61-(67) | Passes |
| NF F 16101 (trains) | M2 F1 |
| DIN 5510 (trains) | SF3 |
| BS 476 Part 6 (UK) | Class 0 |
| BS 476 Part 7 (UK) | Class 1 |
| Coefficient of Friction | |
| MIL-D-17951-E | Exceeds specifications |
| DIN 51130 (ZH1/571) | R13 |
| Chemical Resistance | Resists most chemicals |

3M™ Safety-Walk™ Coarse Slip-Resistant Tapes and Treads: Conformance to military specification MIL-D-17951(E) SHIPS is only available via military orders or special product request (SPR).

Easy to maintain

Inspect the application periodically to maintain product effectiveness and ensure serviceability. Regularly scrub the treads with a stiff bristle brush to ensure they're kept free from dirt and other residue that might impair functionality. Wash with soap and water to keep material and surrounding surfaces dirt- and grease-free.



3M offers a complete line of slip-resistant products designed for the safety and comfort of people in the workplace.

3M™ Safety-Walk™ Traction Systems



How to reach us

For more information or to place an order, call your local 3M distributor. Or, for the name of the 3M distributor nearest you, call: **1-800-852-9722**

For custom sizes and shapes, call 3M Converter Markets at: **1-800-328-1681**

To get technical data, application guidelines, maintenance, service life and warranty information about 3M traction products faxed directly to you, call Fax-On-Demand (3M™ Safety-Walk™ Slip-Resistant Tapes and Treads is document #8001; Custom Pressure-Sensitive Adhesives PC-1 and PC-2 for powder coatings is document #8002): **1-800-978-9654**

To speak to a technical support person, call: **1-800-626-8578**

For general assistance, call: **1-800-3M-HELPS**

Limited Warranty: Except where prohibited by law, the following is made in lieu of all express or implied rights, warranties and conditions, statutory or otherwise. 3M warrants that its 3M™ Safety-Walk™ Slip-Resistant Tapes and Treads will be free from defects in material and manufacture at time of purchase. There are many factors that can affect the use and performance of this product; i.e., the type and preparation of the surface, the conditions of use or exposure, etc. Due to the variety of factors that can affect the use and performance of this product, most of which are uniquely within the user's knowledge and control, it is essential that the user (a) determines whether or not this product is fit for the desired purpose, (b) suitable for user's method of application, (c) adequately maintained and (d) is replaced at end of useful life.

Limitation of Remedies and Liability: 3M's only obligation shall be to repair or replace, at 3M's option, such quantity of the material proved to be defective. 3M shall not be liable for any injury, loss or damage, direct, indirect, incidental, special or consequential arising out of the use of this product.



Commercial Care Division

3M Center
St. Paul, MN 55144-1000
www.3M.com/commcare



Minimum 10% Post-Consumer Fiber

3M and Safety-Walk are trademarks of 3M.

Printed in U.S.A.

© 3M 2002

70-0710-3884-1