03 STOREFRONT & ENTRANCES HARDWARE

ASSA ABLOY Certified Distributor

Opening Solutions

Panic Device 164 Security Latch Adapter 166 Floating Header 168



Assa Abloy - Panic Devices (PDU8000)



Finishes



























Panic Devices - PDU8000 Series

Combining safety and style, the PDU8000 features an engraved push area with boundary grooves for clear visibility. Available with keyed or non-keyed options, six exterior pulls, and multiple finishes — offering both function and design flexibility.

Specifications

Glass Thickness

Applications Types

3/8" to 13/16"

• Grip diameter: 11/4"

• Projection: 3"

Materials

Dimensions

Stainless steel · Glass mounted

Rail mounted

Handing

- Right-hand reverse (swing 3)
 - Left-hand reverse (swing 4)
 - Right hand (swing 5)
 - Left hand (swing 6)

Options

Custom engraving options available

including push area with boundary grooves.





PDU8000

Standard ROCKWOOD Panic Device 1-3/4" x 4"



PDU8000-1

Panic Device with Full Height L-Shaped Mating Pull



PDU8000-2

Panic Device Half Height L-Shaped Mating Pull



PDU8000-3

Panic Device with Full Height Straight Mating Pull



PDU8000-4

Panic Device with Half Height Straight Mating Pull



PDU8000-5

Panic Device with Short Centered Straight Pull



PDU8000-6

Panic Device with Horizontal Straight Pull

Assa Abloy - Electric & Manual Strike

P223 Door Rails & Architectural Hardware

P163 Storefront & Entrance System



Finishes

























Folger Adam Electric Strikes

The Folger Adam 310-1 (3/4) is an industrial grade electric strike designed specifically for use in glass door applications with addition of a strike plate. The stainless steel construction makes it ideal for strength and corrosion resistance.

Product Features

- Tamper-resistant, heavy duty stainless steel construction
- Fail Safe/Fail Secure

- 3/4" keeper depth
- · Plug-in connector
- Non-handed
- Five-year limited warranty



MSK-SGL Manual Strike - Single Door



MSK-DBL Manual Strike - Double Door



ESK-SGL Electric Strike - Single Door



ESK-DBL Electric Strike - Manual Door

HES 1600 Heavy-Duty Optional Electric Strike

HES Strikes are the most advanced electric strikes available on the market for latchbolt locks. These series set a new standard in the industry by offering dynamic integrated adjustability and field configurable options.

Product Features

- Tamper resistant
- · Stainless steel construction
- ESK-9200 and ESK-1600 models are non-handed, ESK-9100 handing required
- · Field selectable fail safe/fail secure
- ESK-9100 and ESK-9200 are surface mounted

Static Strength: • 1,500 lbs Electrical: ESK-1600

Dynamic Strength: • 70 ft-lbs

Endurance Rating: • 1,000,000 cycles

- Dual voltage 12/24 VDC/VAC; 240 mA at 12 VDC/120 mA at 24 VDC ESK-9100
- Adaptable voltage sensing 12/24 VDC/VAC; 240 mA at 12 VDC, 120 mA at 24 VDC ESK-9200
- Adaptable voltage sensing 12/24 VDC/VAC; 240 mA at 12 VDC, 120 mA at 24 VDC

LM for door monitoring (ESK-1600 models only) Options:



ESK-1600-SGL Electric Strike - Single Door



ESK-1600-DBL Electric Strike - Double Door



ESK-9100 Electric Strike - Single Door



ESK-9200 Electric Strike - Double Door

· Strike, Adapter Plate, and Cover included

Assa Abloy - Security Latch Adapter (SL100) & Codes



Rockwood Security Latch Adapter (SL100)

- Converts roller latch on CRL (Blumcraft) PA100 devices to ASSA ABLOY's flat security latch
- Provides additional engagement with strike, increasing security
- Adjustable stops on strike include set screws, minimizing unintended movement
- UL 305 listed
- Manual strike included

Finishes

US32

Code	Products	Code	Products
Code 01	Mortise Cylinder	Code 06	Non-Keyed Function (blank escutcheon plate provided)
Code 02	7-pin SFIC Housing w/Construction Core	Code 07	Keyed Construction Core for 7-pin SFIC Cylinder
Code 03	Special Order (keyed alike)	Code 08	Customer Swapping Cylinder in the Field
Code 04	Customer Supplied Cylinder		
Code 05	Dummy Cylinder Housing		

Strike Kits



SL100 Rockwood Security Latch Adapter



Assa Abloy - Dummy Devices (DDU8000)

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware



Finishes































Dummy Panic Devices - DDU8000 Series

The DDU8000 Dummy Panic Device suites with the PDU8000 panic device and Rockwood LP3301 locking door pull and maintains design consistency in a space.

Specifications

Glass Thickness

Dimensions

3/8" to 13/16"

Handing

Right-hand reverse (swing 3)

• Grip diameter: 11/4"

• Left-hand reverse (swing 4) Right hand (swing 5)

• Projection: 3"

Left hand (swing 6)

Materials

Stainless steel

Applications Types • Glass mounted

Rail mounted

Options

Custom engraving options available including

push area with boundary grooves.





DDU8000

Standard ROCKWOOD Dummy Panic Device 1-3/4" x 4"



DDU8000-1

Dummy Panic Device with Full Height L-Shaped Mating Pull



DDU8000-2

Dummy Panic Device Half Height L-Shaped Mating Pull



DDU8000-3

Dummy Panic Device with Full Height Straight Mating Pull



DDU8000-4

Dummy Panic Device with Half Height Straight Mating Pull



DDU8000-5

Dummy Panic Device with Short Centered Straight Pull



DDU8000-6

Dummy Panic Device with Horizontal Straight Pull

Floating Headers

P163 Storefront & Entrance System


P223 Door Rails & Architectural Hardware



Overview

When opening heights exceed door height recommendations and glass transoms are necessary, floating headers are the perfect solution. They allow for top locking mechanisms, as well as overhead closers, when floor closers are undesirable.

Finishes

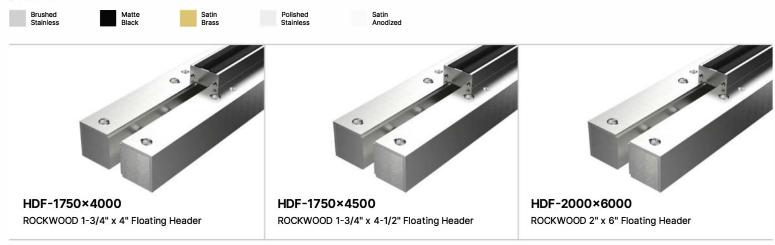

Assa Abloy





DLUX4HDC90NHOEXTHD

ROCKWOOD 304 Heavy-Duty Overhead Concealed Door Closer



- Heavy-Duty Performance: Supports up to 300 lbs. for interior doors and 250 lbs. for exterior doors.
- Concealed Installation: Ensures a sleek, unobtrusive appearance.
- Durable Cast Iron Body: Built for long-lasting strength and reliability.
- Versatile Compatibility: Suitable for doors up to 48" wide (interior) and 42" wide (exterior).



DLUXPIVHD

DLUX End Load Bottom Pivot - Heavy-Duty (300 lb.)

Key Features

- **Heavy-Duty Capacity:** Supports doors up to 300 lbs. for high-traffic applications.
- Precise Clearance Adjustments: Includes shims for bottom clearances ranging from 5/16" to 3/4".
- Center-Hung Design: Ensures balanced and smooth door operation.
- Durable Construction: Made from high-quality aluminum and stainless steel for long-lasting performance.
- Easy Installation: Simple end-load installation into the door rail for convenience.

Rockwood Handles



Finishes



P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware



Product Features

- Heavy-duty straight bar design for commercial and architectural doors
- Compatible with wood, metal, and glass doors
- · Constructed from high-quality aluminum, brass, bronze, or stainless steel
- · Available in a range of sizes, lengths, and bar diameters
- Offered in multiple mounting styles including back-to-back and single side
- Optional "PUSH" or "PULL" engraving for clear user direction
- · Wide selection of architectural finishes to suit any design
- ANSI 156.6 compliant for durability and performance

11147

The 11147 Series with Straight 47 Single Bar Set

Product Features

- Sleek offset handle design for a modern and ergonomic look
- Engineered for use on glass, wood, or metal doors
- Built with durable materials: aluminum, brass, bronze, or stainless steel
- Available in various projections, sizes, and bar thicknesses
- Multiple mounting options including concealed and exposed fasteners
- Customizable with "PUSH" or "PULL" engraving for clear function labeling
- · Offered in a range of premium finishes for design flexibility
- Meets ANSI 156.6 standards for reliable commercial-grade use

111470S


The 11147 Series with Offset 47 Single Bar Set

Floating Headers


P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware



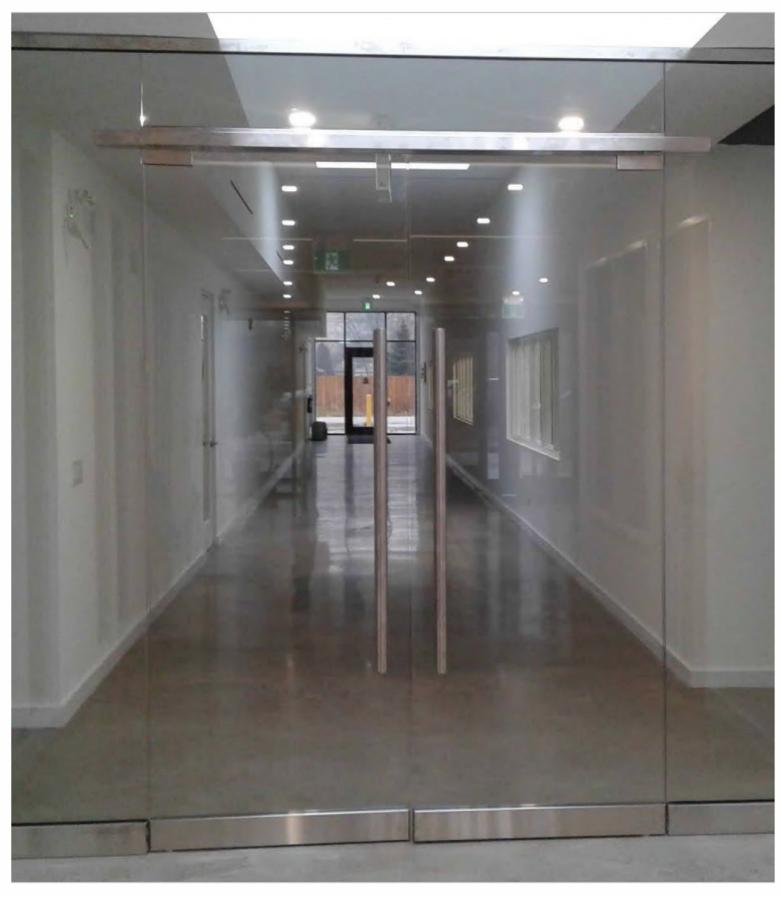

Solidity Hydraulic Bottom Patch

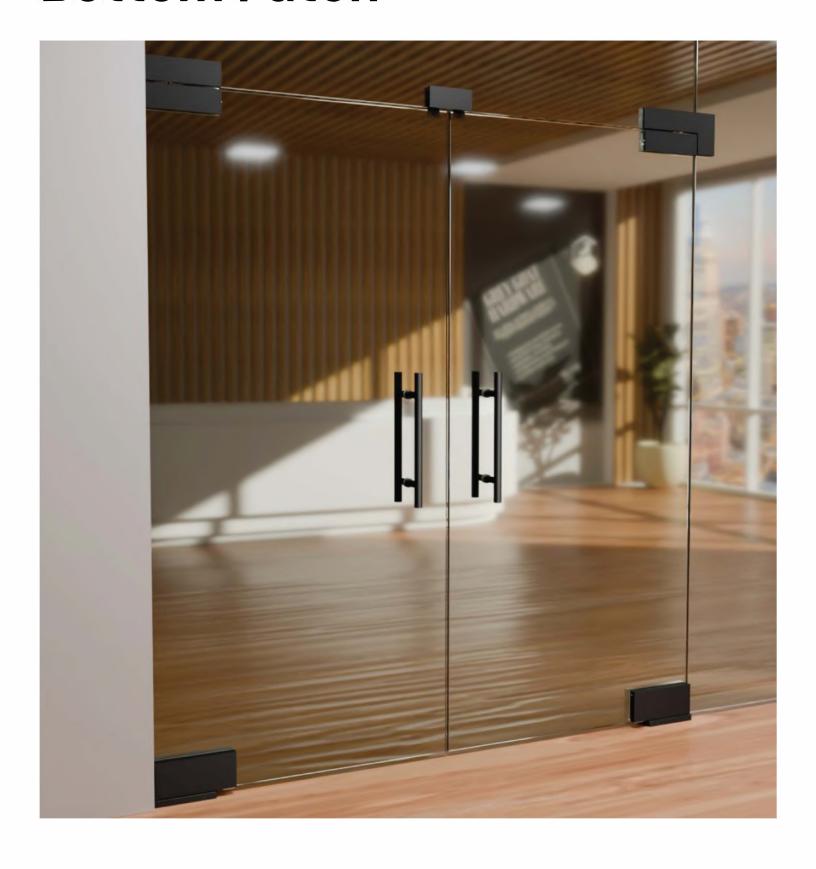

Solidity Hydraulic Bottom Patch







• Maximum Weight: 100KG (220.46LBS) • Maximum Door Width: 39" (1000mm)

- Two Adjustable Speed Settings
- Hold Open at 90°
- Cycle Tested for 500,000 Operations

- Maximum Weight: 150 Kg (330.70 lb)
- Maximum Door Width: 48" (1220mm)
- Two Adjustable Speed Settings
- Hold Open at 90°
- Cycle Tested for 500,000 Operations



	Hold Type	Maximum Door Weight	SKU	
Hold Open		100kg	SOL100HO	
	Hold Open	150kg	SOL150HO	
	Non-Hold Open	100kg	SOL100NHO	
	Non-Hold Open	150kg	SOL150NHO	
	Hold Type	Maximum Door Weight	SKU	
	Hold Open	100kg	SOL100HONCP	
	Hold Open	150kg	SOL150HONCP	
	Non-Hold Open	100kg	SOL100NHONCP	



Hold Open	150kg
Non-Hold Open	100kg
Non-Hold Open	150kg

Cover Plates Only



SOLCP Solidity Series Cover Plates

Bottom Base Only



SOLBP Solidity Series Bottom Base



SOL150NHONCP

03 STOREFRONT & ENTRANCES HARDWARE

Patch Fittings & Transom

Patch Fittings Configurations 174
Patch Fittings & Transom 176



Patch Fittings Configurations

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware



For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.



Patch Fittings Configurations

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware



For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Configuration - 1 PFIT2OA Patch Fitting (PFIT Series) - Top Patch with Pivot Insert PFIT10 2A Patch Fitting (PFIT Series) - Bottom Patch with Pivot Insert 2B SOL100HO Solidity Series Hydraulic Bottom Patch - 100kg Hold Open 2C SOL150HO Solidity Series Hydraulic Bottom Patch - 150kg Hold Open Configuration - 2 PFIT2OA Patch Fitting (PFIT Series) - Top Patch with Pivot Insert PFIT10 Patch Fitting (PFIT Series) - Bottom Patch with Pivot Insert 2A 2B SOL100HO Solidity Series Hydraulic Bottom Patch - 100kg Hold Open 2C SOL150HO Solidity Series Hydraulic Bottom Patch - 150kg Hold Open Patch Fitting (PFIT Series) - Transom - Wall Mount PFIT34 3 Configuration - 3 1 PFIT2OA Patch Fitting (PFIT Series) - Top Patch with Pivot Insert PFIT10 Patch Fitting (PFIT Series) - Bottom Patch with Pivot Insert 2A 2B SOL100HO Solidity Series Hydraulic Bottom Patch - 100kg Hold Open SOL150HO 2C Solidity Series Hydraulic Bottom Patch - 150kg Hold Open 3 PFIT34 Patch Fitting (PFIT Series) - Transom - Wall Mount PFIT61 Patch Fitting (PFIT Series) - L-Shape Connector - No Door Stop 44 **4B** PFIT60 Patch Fitting (PFIT Series) - Panel Glass to Glass - L-Shape Connector With Door Stopper PFIT60HD Patch Fitting (PFIT Series) - L-Shape Connector - with Heavy Duty Door Stop 4C Configuration - 4 PFIT2OA Patch Fitting (PFIT Series) - Top Patch with Pivot Insert PFIT10 Patch Fitting (PFIT Series) - Bottom Patch with Pivot Insert 2A SOL100HO Solidity Series Hydraulic Bottom Patch - 100kg Hold Open 2B 2C SOL150HO Solidity Series Hydraulic Bottom Patch - 150kg Hold Open 3 PFIT34 Patch Fitting (PFIT Series) - Transom - Wall Mount PFIT40 Patch Fitting (PFIT Series) - Transom - Glass Mount Configuration - 5 1 PFIT20A Patch Fitting (PFIT Series) - Top Patch with Pivot Insert PFIT10 Patch Fitting (PFIT Series) - Bottom Patch with Pivot Insert 2A 2B SOL100HO Solidity Series Hydraulic Bottom Patch - 100kg Hold Open SOL 150HO 20 Solidity Series Hydraulic Bottom Patch - 150kg Hold Open PFIT61 Patch Fitting (PFIT Series) - L-Shape Connector - No Door Stop 44 PFIT60 Patch Fitting (PFIT Series) - Panel Glass to Glass - L-Shape Connector With Door Stopper

4R

4C

5

PFIT60HD

PFIT40

Patch Fitting (PFIT Series) - Transom - Glass Mount

Patch Fitting (PFIT Series) - L-Shape Connector - with Heavy Duty Door Stop

Patch Fittings & Transom





Brushed Stainless



Sa Bi Polished Stainless Satin Anodized



PFIT20A

Top Patch with Pivot Insert



PFIT10

Bottom Patch with Pivot Insert



PFIT70

Panel Glass to Glass



PFIT34

Transom - Wall Mount



PPIV401-2H

Top Free Swing Pivot 2 Holes



PFIT20ADJ

Top Patch with Adjustable Closer Insert



PFIT40

Transom - Glass Mount





PFIT41L

Transom With Left Fin Support Glass Mount



PFIT41R

Transom With Right Fin Support Glass Mount

Patch Fittings & Transom





Brushed Stainless







Polished Stainless

Satin Anodized



PPIV401 Top Free Swing Pivot

3 Holes



PFIT20C Top Patch With Closer Insert



PFIT60HD L-Shape Connector With HD Door Stop



PFIT80 Panel Glass to Glass 4-Way Connector



PFIT94 Ceiling Mounted Support Fin Connector



PFIT81 4-Way With Fin Connector



PPIV402 **Bottom Free** Swinging Pivot for Floor Mount



PFIT61 L-Shape Connector - No Door Stop



PFIT60 L-Shape Connector With Door Stopper



Patch Fittings & Transom











Polished Stainless

Satin Anodized

P261 Stock Glass Doors

P271 Glazing Supplies



PPIV403 **Bottom Door Free Swinging Pivot**



PFITGASKET Gaskets For Wall Mount Top & Bottom Patch



PFINTOP Top Hole For Patch Pivots




PFINDC Top Hole For Commercial Door Closers



PFINBOT Bottom Hole for Patch Pivots



PFINDS Top Door Stops

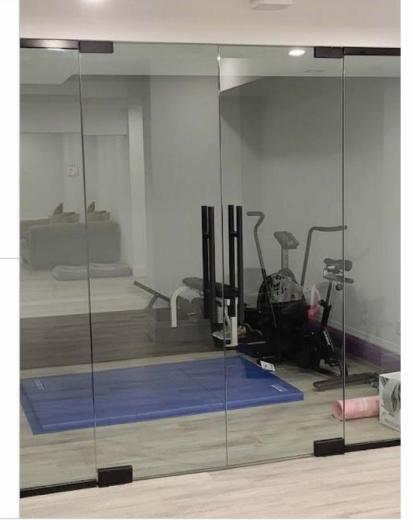



PFINTOPPIV Top Patch Pivots

Electromagnetic Entry Door Lock

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware



Finishes









Product Overview

NE-600S Single Door Magnetic Lock with LED indicator and door status signal output. Compatible with glass, wood, metal, and fire doors. Hoisting design allows quick, easy installation. Includes accessories for inward, frameless, and narrow doors. Anti-residual magnetism ensures safer, more reliable access control.



ML600SGL

Single Door Magnetic Lock - 600Kg



ML600DBLSA

Double Door Magnetic Lock - 600Kg



MLSGLZLBRKT


Single Door Magnetic Lock Strike Brackets



MLDBLZLBRKT

Double Door Magnetic Lock Strike Brackets



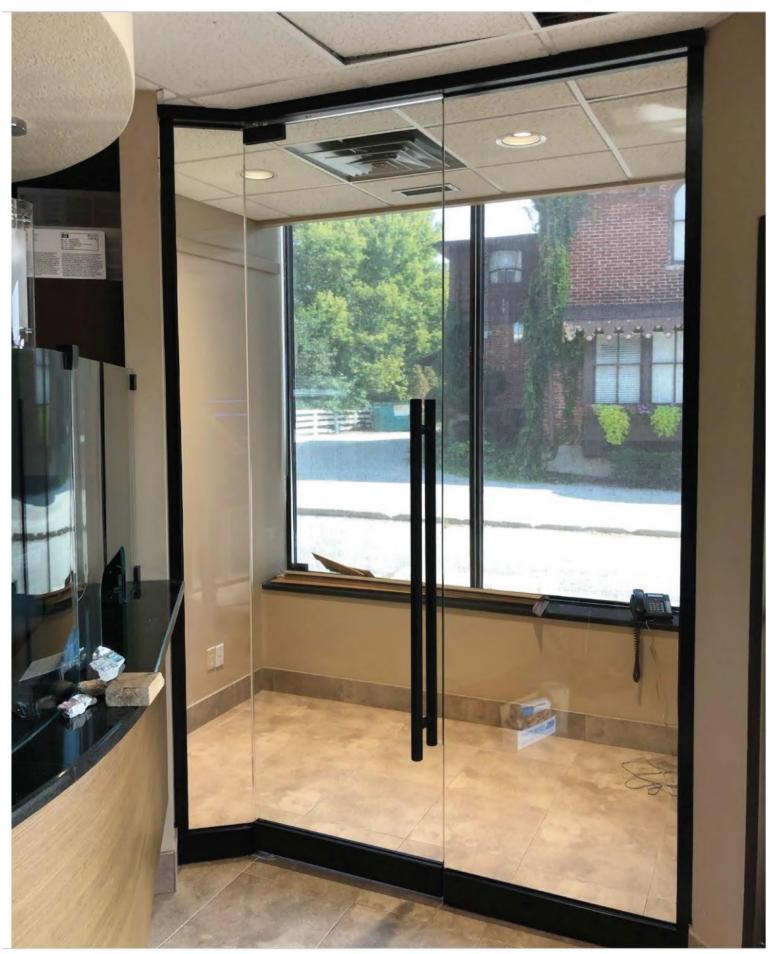

Commercial U-Channels

Commercial U-Channel & End Cap 182
Vinyl Roller Tool & Mall Clamps 183



Commercial U-Channels

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.



Finishes









Specification

- Versatile Applications: Ideal for glass partitions, wine rooms, architectural installations, retail store fronts, conference rooms, and glass balustrades.
- Low-Profile Design: Shallow 1", 1.5" & 2" height options for a minimalistic look while ensuring
- Glass Compatibility: Suitable for glass thicknesses of 10mm (3/8") and 12mm (1/2").

SKU

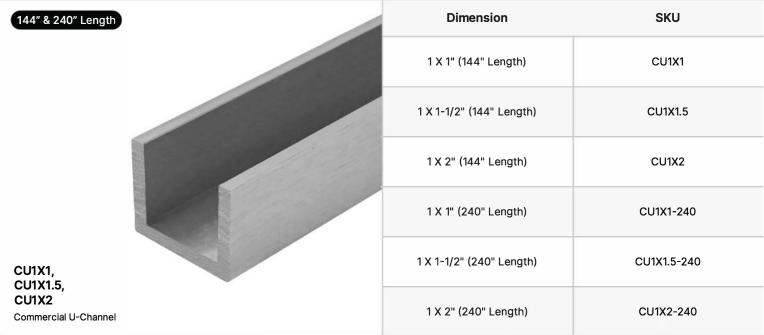

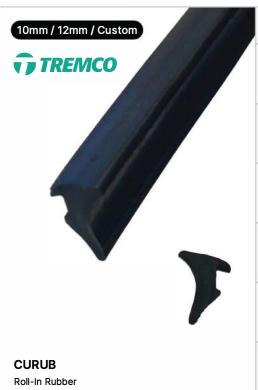

12mm	CURUB12
12mm 500' Length Roll	CURUB10-500
10mm	CURUB10
10mm 500' Length Roll	CURUB10-500
0.200" 1' Length	CURUBCUSTOM
0.200" 500' Length Roll	CURUBCUSTOM500

Dimension



^{*} For the most up-to-date product availability, visit our website.

Mall Clamps



Finishes

- Brushed




Specification

• Versatile Glass Compatibility: Works with 3/8" to 3/4" (10 to 19 mm) thick monolithic tempered glass; special-order studs available for thicker applications.

P261 Stock Glass Doors


P271 Glazing Supplies

- Secure and Stable Joint: Connects vertical glass panels to reduce movement and improve structural integrity.
- Durable Build: Constructed from Grade 304 Stainless Steel for lasting strength, offered in brushed or polished finishes.
- Simple Installation: Comes with flat head Phillips screws (included), making for a quick and secure setup.
- Safety Gap Recommendation: A minimum gap of 7/32" (5.6 mm) between panels is suggested for optimal stability.

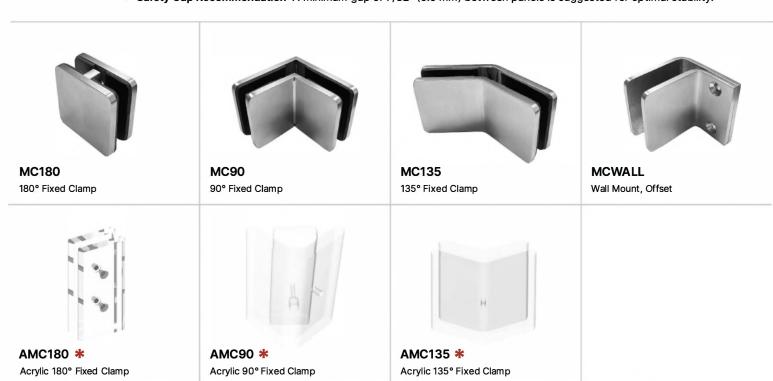



Hulk Series

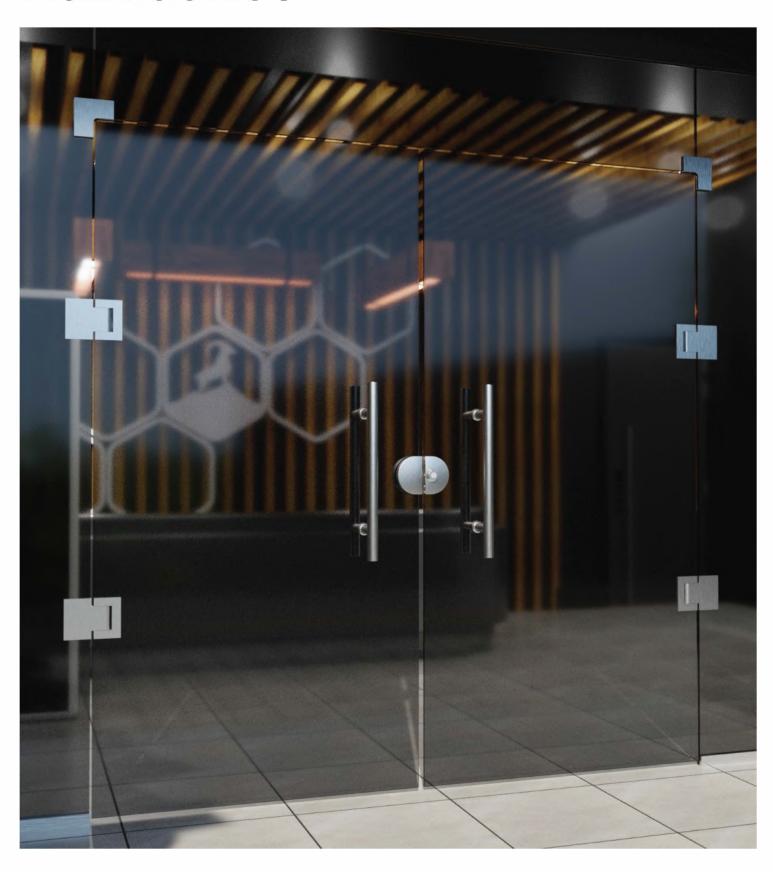

Hydraulic Hinges - Hulk Series

Hulk Series

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware



Finishes



More Finishes Online

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.





Hold Type	Material	SKU
Non Holds Open	SS304	HULK90NHO
Holds Open	SS304	HULK90HO
Non Holds Open	SS316	HULK90NHO
Holds Open	SS316	HULK90HO
Hold Type	Material	SKU




Holds Open	SS316	HULK90HO
Hold Type	Material	SKU
Non Holds Open	SS304	HULK180NHO
Holds Open	SS304	HULK180HO
Non Holds Open	SS316	HULK180NHO
Holds Open	SS316	HULK180HO





^{*} For the most up-to-date product availability, visit our website.

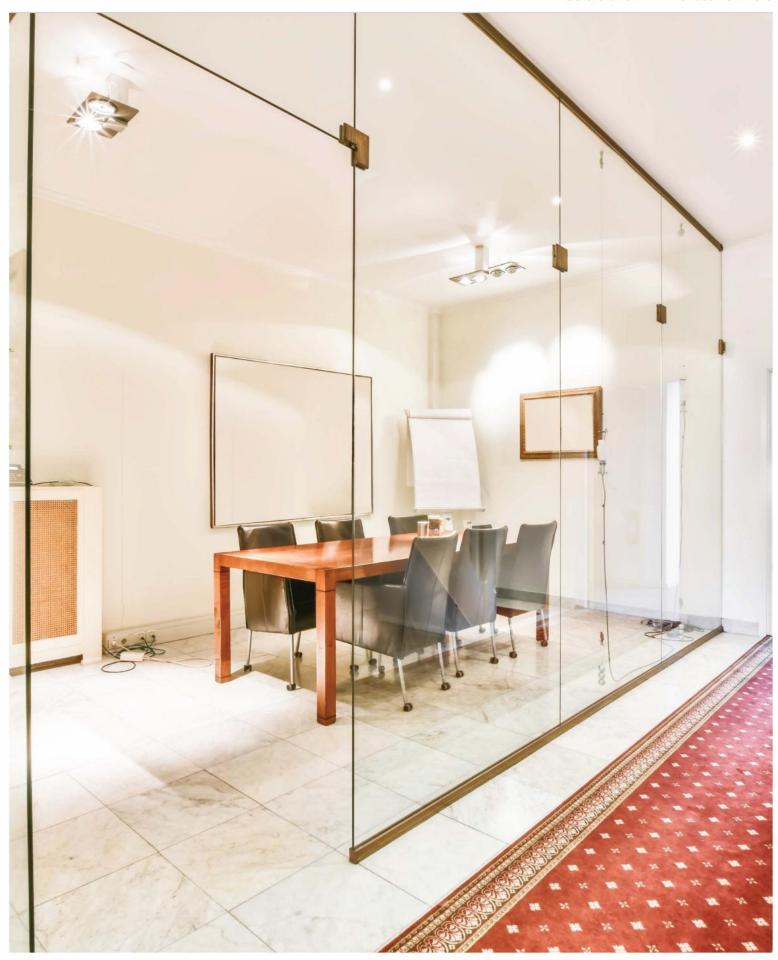

03 STOREFRONT & ENTRANCES HARDWARE

Glass Door Locks

Glass Door Locks 188
Glass Display Hardware 190



r 65 Kalling Hardward

Glass Door Locks





Brushed Stainless

Matte Black

Satin Brass

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware

Polished Stainless Satin Anodized More Finishes Onli For glass fabrication details, CAD files, and the latest product information, please visit our website.

Stock and finish availability may vary by product.



GDL311GM Glass Mount Mounted Latch



GDL311WM Wall Mount Mounted Latch



DGDLDigital Glass Door Lock
Glass & Wall Mount



GDLUSSET

American Style Cylinder

Patch Lock & Keeper Set



GDLUSK
Patch Lock Keeper
For American Style Cylinder



GDLUS
Patch Lock
With American Style Cylinder





GDLEU
Patch Lock With
European Style Design



GDLEUK
Patch Lock Keeper For
European Style Lock



GDLEUSET
European Style Patch
Lock & Keeper Set

Glass Door Locks





Brushed Stainless

Polishe Stainle

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware

Satin Anodized

ed More Finishes Or

For glass fabrication details, CAD files, and the latest product information, please visit our website.

Stock and finish availability may vary by product.



GDLRD90D Glass to Wall - Double Sided - Round



GDLRD180D Glass to Glass - Double Sided - Round



GDLRD90S
Glass to Wall - Single Sided - Round



GDLRD180S Glass to Glass - Single Sided - Round



GDLTT Thumbturn Lock



GDLTTK
Thumbturn Keeper




GDLTTSET
Thumbturn Lock & Keeper Set



GTDLGM

Privacy Glass Door Lock for Washroom - Thumbturn





Glass Display Hardware

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware





Brushed Stainless











For glass fabrication details, CAD files, and the latest product information, please visit our website.

Stock and finish availability may vary by product.



GDLMINI239

Showcase Glass Door Lock Single Door



GDLMINI258

Showcase Glass Door Lock Double Door





DSO1144Glass Display Standoffs

JEN037JR Square Full Plate Wall to Glass



CARA01

Square Pivot Floor / Ceiling to Glass





DK100

100 Style Back to Back Knob





DK106

106 Style Back to Back Knob





DK140

140 Style Back to Back Knob



DKSQ

SQ Style Back to Back Knob

Commercial Center Lock

Storeroom Center Lock 192 Affordable Center Lock 194

Classroom Center Lock 193



P261 Stock Glass Doors P271 Glazing Supplies

Storeroom Center Lock

Commercial Center Lock with Electric Strike





Finishes

Brushed Stainless

Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

LH-Storeroom



GDLCSINL Inswing, Left Hand - LH

LHR-Storeroom



GDLCSOUTL Outswing, Left Hand - LHR

RH-Storeroom



HESS

GDLCSINR Inswing, Right Hand - RH

RHR-Storeroom



GDLCSOUTR Outswing, Right Hand - RHR

Manual Strike Box



GDLCSTK Manual Strike Box

All In One Strike



12V / 24V / Fail Safe / Fail Secure



HES5200C HES5200C Electric Strike Complete Pack

Electric Strike Box



GDLCELECSTKL Electric Strike Box - Left Handed







GDLCELECSTKR Electric Strike Box - Right Handed

Cover Only



GDLCELECSTKR Electric Strike Box - Right Handed



Classroom Center Lock

Commercial Center Lock with Electric Strike







Brushed Stainless Ma An

Polished Stainless Custom Finishes For glass fabrication details, CAD files, and the latest product information, please visit our website.

Stock and finish availability may vary by product.

LH-Classroom



GDLCCINL Inswing, Left Hand - LH

LHR-Classroom



GDLCCOUTL
Outswing, Left Hand - LHR

RH-Classroom



GDLCCINR Inswing, Right Hand - RH

RHR-Classroom



GDLCCOUTR Outswing, Right Hand - RHR

Manual Strike Box



GDLCSTK Manual Strike Box

All In One Strike



12V / 24V / Fail Safe / Fail Secure



HES5200C HES5200C Electric Strike Complete Pack

Electric Strike Box





GDLCELECSTKL Electric Strike Box - Left Handed







GDLCELECSTKR Electric Strike Box - Right Handed

Cover Only



GDLCELECSTKR Electric Strike Box - Right Handed



Striker Center Lock Series

Commercial Center Lock with Electric Strike





Finishes

Brushed Stainless

d ss Matte Black Anodized Aluminum Polished Stainless Custom Finishes For glass fabrication details, CAD files, and the latest product information, please visit our website.

Stock and finish availability may vary by product.

Passage



LH5X45PAS *

Lever & Latch Lock - Without Keyed Lock

Manual Strike



LHKPR *
Manual Strike Box

Electric Strike



LHESAFE, LHESECURE *

Electric Strike Box



Storeroom





LH5X45ENT, LH5X45STRM & LH5X45CLRM *

Lever & Latch Lock - With Keyed Lock



Note: Visit ggshardware.com For Glass Fabrication & Product Information.





03 STOREFRONT & ENTRANCES HARDWARE

Commercial Ladder Pulls

Ladder Pulls - Back To Back

196 Ladder Pulls - Square - SQS Series

200 Ladder Pulls - Offset & Curved

204

Ladder Pulls - Offset Back to Back

197 Ladder Pulls - Square - SQR Series

201

Ladder Pulls - ADA Locking

198 Ladder Pulls - Tubular

202

Ladder Pulls - Single-Sided 199 Sauna Handle 203



Ladder Pulls-Back To Back

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware

Commercial Ladder Pulls



Finishes







For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Polished Stainless Steel

Specification

- Suitable for Glass Thickness: 3/8" to 3/4" (10mm 19mm)
- Suitable for Wood/Aluminum Door Thickness: 1-3/4" (44mm)
- Available in Sizes: 12", 24", 30", 36", 48", 60", 72", 84" and custom 96" length
- · Constructed from durable 304 Grade Stainless Steel, check ggshardware.com for 316 Stainless Steel
- Prepped for back-to-back mounting, includes two mid-posts and fasteners for simple installation



Overall	стс	SKU
12"	6"	LP12
24"	12"	LP24
30"	18"	LP30
36"	24"	LP36
48"	36"	LP48
60"	48"	LP60
72"	60"	LP72
84"	72"	LP84
96"	84"	LP96

LP36 36" (24" CTC) Back To Back






SCREW-LADDERBOLT M8 × 3-in Phillips Flat Head Screws for Aluminum Doors



CW14 Finishing Cap Washer - Single



Available In Custom Lengths (X) and Diameters (Y) To Match Your Design Specifications.

Choose from premium finish options, leather wraps, and powdercoated colors for a tailored architectural look.

Ladder Pulls - Offset Back to Back

Commercial Ladder Pulls

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware



Finishes


Brushed Stainless Steel


Polished Stainless Steel

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Specification

- Suitable for Glass Thickness: 3/8" to 3/4" (10mm 19mm)
- Suitable for Wood/Aluminum Door Thickness: 1-3/4" (44mm)
- Material: Durable 304 Grade Stainless Steel
- Offset Design: Offers a distinctive, modern aesthetic
- · Prepped for back-to-back mounting, includes two mid-posts and fasteners for simple setup





Ш	

OSLP36
36" (24" CTC)
Offset Back to Back

Overall	стс	SKU
24"	12"	OSLP24
36"	24"	OSLP36
48"	36"	OSLP48
60"	48"	OSLP60
72"	60"	OSLP72






SCREW-LADDERBOLT

M8 × 3-in Phillips Flat Head Screws for Aluminum Doors



CW14

Finishing Cap Washer - Single



Available In Custom Lengths (X) and Diameters (Y) To Match Your **Design Specifications.**

Choose from premium finish options, leather wraps, and powder-coated colors for a tailored architectural look.



P85 Railing Hardware

Ladder Pulls - ADA Locking

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware

Commercial Ladder Pulls



Finishes









For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Specification

- Suitable for Glass Thickness: 1/2" (12mm) to 3/4" (19mm) tempered glass
- Fully Concealed Deadbolt Locking System: Includes top-mounted keyed thumb turn and bottom locking mechanism
- Material: 304 Grade Stainless Steel for superior durability and corrosion resistance
- ADA Compatible: Ensures accessibility compliance for various environments

48" Overall	
(36" CTC)	ı
	- 4
	- 1
	- 1
	- 1
	- 1
	- 1
	- 1
	- 1

1		ì		
	H			

Overall	СТС	SKU
48"	36"	LOCKLP48
60"	48"	LOCKLP60
72"	60"	LOCKLP72

LOCKLP48

48" ADA Locking Ladder Pull - Back to Back

72" ADA Locking Ladder Pull - Back to Back





ICCOREBS IC Core Lock Cylinder - 7 Pin SFIC





Ladder Pulls - Single-Sided

Commercial Ladder Pulls



Finishes







For glass fabrication details, CAD files, and the latest product information, please visit our website.

Stock and finish availability may vary by product.

Specification

- Suitable for Glass Thickness: 3/8" to 3/4" (10mm 19mm)
- Available Sizes: 8", 16", 24", 36", 48", 60", and 72" overall lengths
- Material: Durable 304 Grade Stainless Steel
- Simple Installation: Prepped for back-to-back mounting with two mid-posts and fasteners included
- Custom lengths and finishes available (email: products@ggshardware.com)



Overall	стс	SKU
16"	12"	SSLP16
24"	12"	SSLP24
36"	24"	SSLP36
48"	36"	SSLP48
60"	48"	SSLP60
72"	60"	SSLP72

SSLP36

36" (24" CTC) - Single Sided






SSLPRDCAP *
SSLPSQCAP *

Single Sided Ladder Pull Cap - Round/Square Option



CW14
Finishing Cap Washer - Single

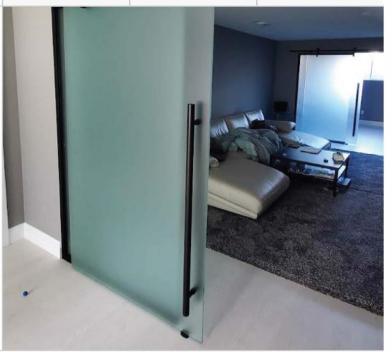

Ladder Pulls - Square - SQS Series

P163 Storefront & Entrance System

Commercial Ladder Pulls



Finishes







Back to Back




For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Specification

- Suitable for Glass Thickness: 3/8" to 3/4" (10mm 19mm)
- Suitable for Wood/Aluminum Door Thickness: 1-3/4" (44mm)
- Available Sizes: 24", 36", 48", and 72" overall lengths
- Material: High-quality 304 Grade Stainless Steel
- Simple Installation: Ready for back-to-back mounting with mid-posts and fasteners included.



Overall	стс	SKU
24"	12"	SQSLP24
36"	24"	SQSLP36
48"	36"	SQSLP48
60"	48"	SQSLP60
72"	60"	SQSLP72







CW14

Finishing Cap Washer - Single



Ladder Pulls - Square To Round - SQR Series

Commercial Ladder Pulls



Finishes









For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Specification

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware

- Suitable for Glass Thickness: 3/8" to 3/4" (10mm 19mm)
- Suitable for Wood/Aluminum Door Thickness: 1-3/4" (44mm)
- Material: High-quality 304 Grade Stainless Steel
- · Simple Installation: Prepped for back-to-back mounting with two round mid-posts and fasteners included



Overall	стс	SKU
24"	12"	SQRLP24
36"	24"	SQRLP36
48"	36"	SQRLP48
60"	48"	SQRLP60
72"	60"	SQRLP72

SQRLP48


48" (36" CTC) Back to Back



SSLPRDCAP Single Sided Ladder Pull Cap - Round



CW14 Finishing Cap Washer - Single

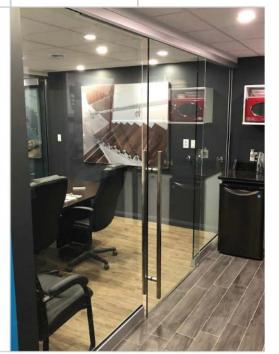

Ladder Pulls - Tubular

Commercial Ladder Pulls



Finishes





Custom

Specification

- Material: High-grade SS304 stainless steel for enhanced durability
- Tubular Diameter: 1.25" (32mm) for a sleek, modern look
- Suitable for Various Applications: Ideal for wine cellars, gyms, and commercial business spaces

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.






RCM12X12 12" Tubular Commercial Pull - 12" CTC

18" Overall

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware



RCM18X18

18" Tubular Commercial Pull - 18" CTC

24" Overall

24" CTC

RCM24×24

24" Tubular Commercial Pull - 24" CTC

Single Side Handle Option



LPHS

Cap For Single Sided Handles







Sauna Handle

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.







SAUN19LP12

Sauna Handle 12" Ladder Pull Handle

Specification

- Heat and Moisture Resistant: Constructed from materials designed to thrive in sauna conditions.
- Ergonomic Grip: Provides a secure and comfortable feel during use.
- Sleek Design: Perfectly suited for modern and traditional sauna aesthetics.
- Hustle Free Installation: Includes all necessary mounting hardware for easy installation.

Finishes



Satin Wood



Don't Burn Your Hand! **Use Grey Goat Sauna Handles.**





SAUN25LP12

Sauna Handle 12" Tubular Ladder Pull Handle



SAUN33R17

Sauna Handle 17" Tubular Ladder Pull Handle



SAUN30S19

Sauna Handle 19" Square Handle



SAUN19LP24

Sauna Handle 24" Square Ladder Pull Handle



SAUN25LP24

Sauna Handle 24" Tubular Ladder Pull Handle



SAUN38S31

Sauna Handle 31" Square Handle



SAUN39R31

Sauna Handle 31" Tubular Ladder Pull Handle



SAUN39R47

Sauna Handle 47" Tubular Ladder Pull Handle

Ladder Pulls-Offset & Curved Ladder Pull Handle



Commercial Ladder Pulls

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.





P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware

OSTUB12

12" Offset Tubular Commercial Pull

Specification

- Material: Premium SS304 stainless steel for superior durability
- Tubular Diameter: 1" (25.4mm) for a modern and comfortable grip
- Suitable for Glass Thickness: 3/8" 3/4" (10mm 19mm) tempered glass
- Suitable for Wood/Aluminum Door Thickness: Up to 1-3/4" (44mm)
- Offset: 3" (76 mm) Center-to-Center
- Simple Installation: Prepped for back-to-back mounting with included fasteners

Finishes









20" Overall



CURLP20

Curved Ladder Pull Handle 20" (11" CTC)

Specification

- Contemporary Design: Enhances the look of any door with its smooth, curved aesthetic.
- Durable Construction: Made from premium materials for reliable performance and longevity.
- Comfortable Grip: Designed for a secure and ergonomic hold.
- Versatile Applications: Ideal for a wide range of door styles and settings.
- Easy Installation: Includes M6 thread for hassle-free mounting.

Finishes







CW14


Finishing Cap Washer - Single



03 STOREFRONT & ENTRANCES HARDWARE

Mechanical U-Channels

Economy Series 206
Comfort Series 207
Additional Components 208

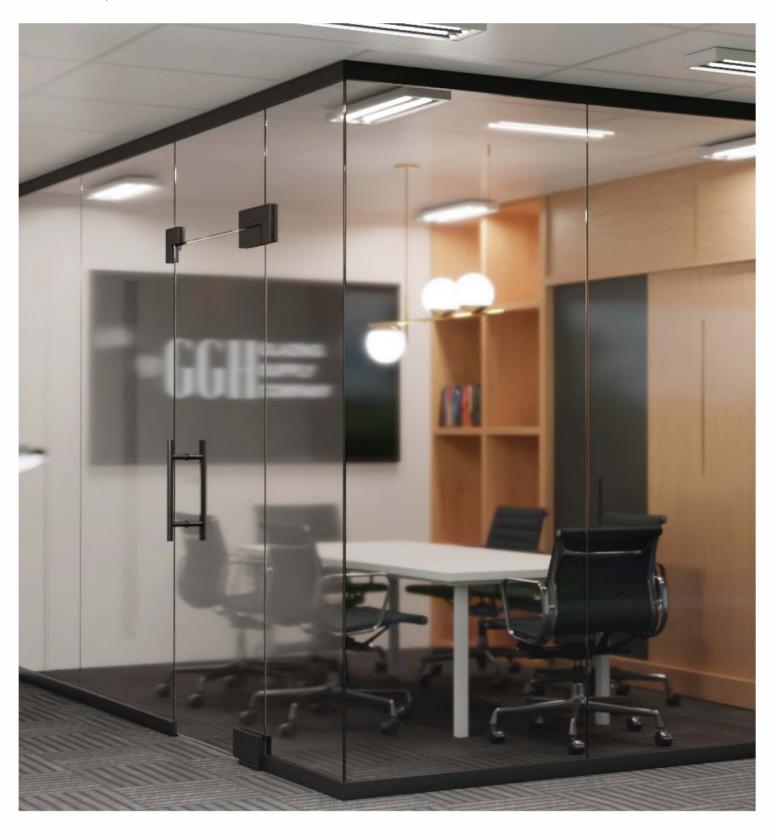

Economy Series - Fixed

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware

Mechanical U-Channels



Finishes

Brushed Stainless

Matte Black

> Satin Anodized

Custom Finishes

Specification

- Overall Cross Section Size: 1-9/16" x 1-7/16" with Short Cladding.
- Overall Cross Section Size: 4-1/2" x 1-7/16" with Tall Cladding.
- Glass Compatibility: Suitable for 3/8" to 1/2" (10 to 12 mm) monolithic tempered glass
- No Glass Drilling Required: Eliminates the need for holes in the glass, streamlining installation
- Available Length: 10FT (120") header length for versatile application




MECU10

Mechanical U-Channel 1-9/16" Cladding - 120" Length




MECU12

Mechanical U-Channel 1-9/16" Cladding - 120" Length



MECU10LRG

Mechanical U-Channel 4-1/4" Cladding - 120" Length



MECU12LRG

Mechanical U-Channel 4-1/4" Cladding - 120" Length



Comfort Series - Adjustable

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware

Mechanical U-Channels



Finishes

Brushed Stainless


Matte Black

> Satin Anodized

Custom


Specification

- Overall Cross Section Size: 1-9/16" x 1-7/16" with Short Cladding.
- Overall Cross Section Size: 4-1/2" x 1-7/16" with Tall Cladding.
- Glass Compatibility: Suitable for 3/8" to 1/2" (10 to 12 mm) monolithic tempered glass
- No Glass Drilling Required: Eliminates the need for holes in the glass, streamlining installation
- Available Length: 10FT (120") header length for versatile application




MECUADJ10

Mechanical U-Channel - Adjustable 1-9/16" Cladding - 120" Length




MECUADJ12

Mechanical U-Channel - Adjustable 1-9/16" Cladding - 120" Length



MECUADJ10LRG

Mechanical U-Channel - Adjustable 4-1/4" Cladding - 120" Length



MECUADJ12LRG

Mechanical U-Channel 4-1/4" Cladding - 120" Length



Additional Components

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware

Mechanical U-Channels










MECUCLD Additional Set of Cladding - 1-9/16" Height



MECUCLDLRG Additional set of Cladding - 4-1/8" Height



MECUSB Additional Blocks for Mechanical U-Channel



MECUEND Additional Endcaps for 1-9/16" Height



MECUENDLRG Additional Large Endcaps for 4-1/4" Height



MECUBR Additional Brackets 1/2" or 3/8"



MECU Additional Extrusion Body





03 STOREFRONT & ENTRANCES HARDWARE

Sliding Door Kits - LAG Series

LAG Series - Glass Mount 210
LAG Series - Wall Mount 211
LAG Series - Double Door Wall Mount 212



P261 Stock Glass Doors P271 Glazing Supplies

LAG Series - Glass Mount

Sliding Door Kits - LAG Series

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.





Kit Includes

- 6 x Glass Mount Brackets
- 1 x Sliding Tube
- 1 x Left Door Stop
- 1 x Right Door Stop
- 2 x Door Rollers
- 1 x Thru-Glass Pull
- 1 x Floor Guide

Key Features

- High-Quality Materials: Crafted from Grade 316 Stainless Steel for exceptional corrosion resistance and longevity.
- Hustle Free Installation: The kit contains all essential hardware required for a seamless installation of 3/8" or 1/2" (10 or 12 mm) tempered glass panels.
- Versatile Applications: Suitable for both interior and exterior installations.

Specification

SKU NO.	Stainless Steel Rod	Weight Capacity	Maximum Door Height
LAGGM108	108" length, 3/32" thickness	Supports doors up to 220 lbs (100 kg)	98-7/16" (2.5 m)
Finishes			
Brushed Stainless	Matte Black		ttin Custom Finishes





LAGGM

Glass Mount Bracket



LAGH108

LAG Series - Header Bar - 108" Length





LAGDSL

Left Door Stop

(Included in Kit)



LAGDSR

Right Door Stop

(Included in Kit)



LAGRO

LAG Series - Door Roller

(Included in Kit)



GLASSPULL

Thru-Glass Pulls

(Included in Kit)



LAGFG

Floor Guide


(Included in Kit)



LAGHEC *

End Cap












P261 Stock Glass Doors
P271 Glazing Supplies

LAG Series - Wall Mount

Sliding Door Kits - LAG Series

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.



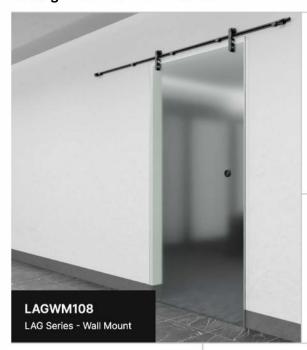

Kit Includes

- 5 x Wall Mount Brackets
- 1 x Sliding Tube
- 1 x Left Door Stop
- 1 x Right Door Stop
- 2 x Door Rollers
- 1 x Thru-Glass Pull
- 1 x Floor Guide
- 2 x End Cap
- 1 x Tube Support

Key Features

- **High-Quality Materials:** Crafted from Grade 316 Stainless Steel for exceptional corrosion resistance and longevity.
- Hustle Free Installation: The kit contains all essential hardware required for a seamless installation of 3/8" or 1/2" (10 or 12 mm) tempered glass panels.
- Smooth Sliding Mechanism: Designed and made for seamless and quiet movement.

Specification

SKU NO.	Stainless Steel Rod	Weight Capacity	Maximum Door Height
LAGWM108	108" length, 3/32" thickness	Supports doors up to 220 lbs (100 kg)	98-7/16" (2.5 m)
Finishes			
Brushed Stainless	Matte Black	Polished Satin Stainless Brass	Custom Finishes





Well Mount Procket

Wall Mount Bracket



LAGH108

LAG Series - Header Bar - 108" Length





LAGDSL

Left Door Stop

(Included in Kit)



LAGDSR

Right Door Stop

(Included in Kit)



LAGRO

LAG Series - Door Roller

(Included in Kit)



GLASSPULL

Thru-Glass Pulls

(Included in Kit)



LAGFG

Floor Guide

(Included in Kit)



LAGHEC *

End Cap

(Included in Kit)



LAGWM

Tube Support



LAG Series - Double Door Wall Mount

Sliding Door Kits - LAG Series





Kit Includes

- 5 x Wall Mount Brackets
- 1 x Sliding Tube
- 1 x Left Door Stop
- 1 x Right Door Stop
- 4 x Door Rollers
- 1 x Thru-Glass Pull
- 1 x Floor Guide
- 2 x End Cap
- 1 x Tube Support

Key Features

- High-Quality Materials: Crafted from Grade 316 Stainless Steel for exceptional corrosion resistance and longevity.
- Hustle Free Installation: The kit contains all essential hardware required for a seamless installation of 3/8" or 1/2" (10 or 12 mm) tempered glass panels.
- Smooth Sliding Mechanism: Designed and made for seamless and quiet movement.

Specification

SKU NO.	Stainless Steel Rod	Weight Capacity	Maximum Door Height
LAGDDWM216	216" length, 3/32" thickness	Supports doors up to 220 lbs (100 kg)	98-7/16" (2.5 m)
Finishes			
Brushed Stainless	Matte Black	Polished Satin Stainless Brass	Custom Finishes

For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.





Well Mount Brooket

Wall Mount Bracket



LAGH216

LAG Series - Header Bar - 216" Length





LAGDSL

Left Door Stop

(Included in Kit)



LAGDSR

Right Door Stop

(Included in Kit)



LAGRO

LAG Series - Door Roller

(Included in Kit)



GLASSPULL

Thru-Glass Pulls

(Included in Kit)



LAGFG

Floor Guide

(Included in Kit)



LAGHEC

End Cap

(Included in Kit)



LAGWM

Tube Support



Soft-Closing Sliding Door System



Soft-Closing Sliding Door System



Finishes










For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary

Key Features:

- Soft-Closing Mechanism: Included in Kit, the Hydraulic Damper ensures gentle and noiseless door movement.
- High Load Capacity: Supports glass panels up to 264.5 lb (120 kg).
- Universal Compatibility: Suitable for tempered glass with a thickness of 3/8" to 1/2" (10 to 12 mm).
- Track Length: 3 meters for flexible installation options.
- Durable Construction: Made from premium aluminum for long-lasting performance.

P261 Stock Glass Doors

P271 Glazing Supplies

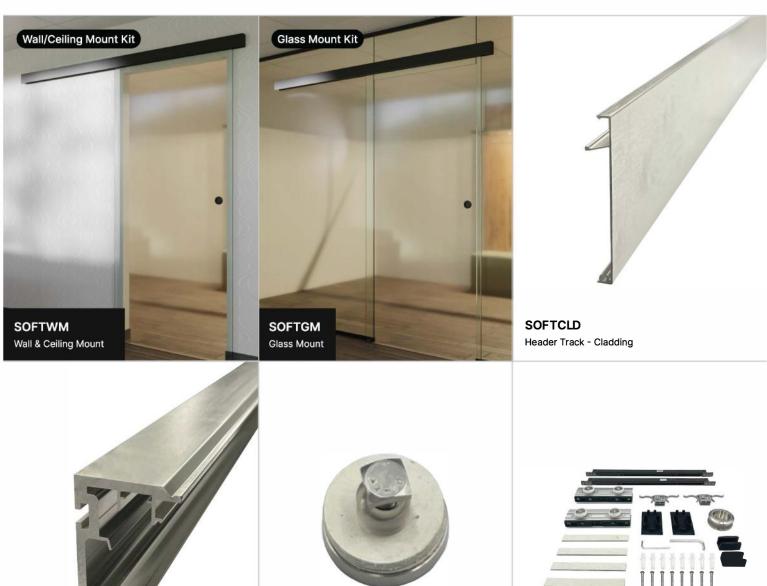

SOFTH

Header Track - Base



Effortless Series - Glass Mount



SOFTKIT - Header Not Included

Effortless Series - Wall Mount Kit

EZY Sliding Door Kits



EZY1 Sliding Door Kits - Facia Mount

P163 Storefront & Entrance System

P223 Door Rails & Architectural Hardware





Finishes







Specification

- Regular & Heavy Duty Rating: Supports up to 80 kg & 120 kg of weight for reliable performance.
- Glass Compatibility: Suitable for 3/8" to 1/2" (10 mm to 12 mm) monolithic tempered glass.
- Header Track Length: 118"



EZY1SDSingle Sliding Door Kit



EZY1HDSD (Heavy Duty)
Single Sliding Door Kit



EZY1HSDSingle Sliding Door Track (118" Length)



EZY1HSDP
Single Door + Panel Track (118" Length)



EZY1DDDouble Sliding Door Kit




EZY1HDDD (Heavy Duty)
Double Sliding Door Kit




EZY1HDDDouble Sliding Door Track (118" Length)



EZY1ENDEndcap for EZY1 Series Sliding Door Kit



EZY1SDPSingle Door + Fixed Panel Kit



EZY1HDSDP (Heavy Duty)
Single Door + Fixed Panel Kit



Sliding Door Kit - Regular Duty



EZY1HDKIT (Heavy Duty)
Sliding Door Kit - Heavy Duty



EZY1WMWall Mount Bracket





P261 Stock Glass Doors P271 Glazing Supplies

EZY2 Sliding Door Kits - Ceiling Mount



Cladding Option Available











Specification

- Regular & Heavy Duty Rating: Supports up to 80 kg & 120 kg of weight for reliable performance.
- Glass Compatibility: Suitable for 3/8" to 1/2" (10 mm to 12 mm) monolithic tempered glass.
- Header Track Length: 118"



EZY2SD Single Sliding Kit



EZY2HDSD (Heavy Duty) Single Sliding Kit





EZY2SDP Single Sliding + Fixed Panel Kit



EZY2HDSDP (Heavy Duty) Single Sliding + Panel Track (118") / HD



EZY2CLDSD Single Sliding Kit with cladding



EZY2HDCLDSD (Heavy Duty) Single Sliding Kit with Cladding




EZY2CLDSDP Single Sliding + Fixed Panel Kit with Cladding




EZY2HDCLDSDP (Heavy Duty) Single Sliding + Panel Kit with Cladding



EZY2HSD Single Sliding Track (118" Length)



EZY2HSDP Fixed Panel Track (118" Length)



EZY2CLD Extra Cladding (118" Length)



EZY2END2 Endcap for EZY2 Series Sliding Door Kit




EZY2RDKIT Sliding Door Kit - Regular Duty



EZY2HDKIT Sliding Door Kit - Heavy Duty



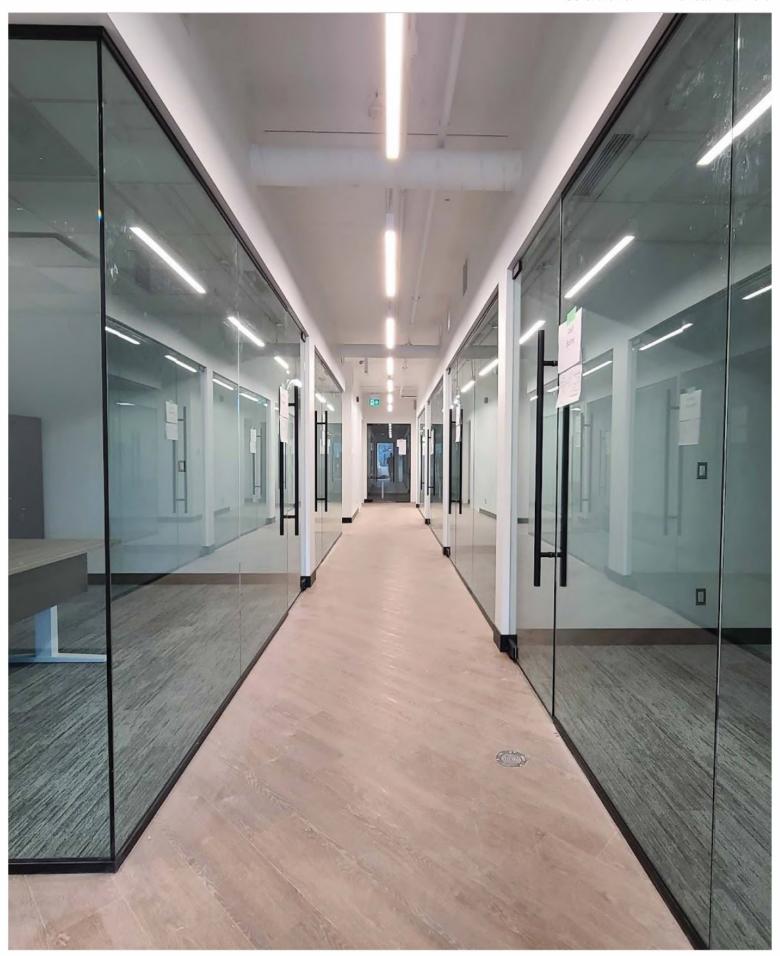

Continuous Gear Hinge



Continuous Gear Hinge





Finishes





Custom Finishes



For glass fabrication details, CAD files, and the latest product information, please visit our website. Stock and finish availability may vary by product.

Specification

- Durable Construction: Supports doors up to 200 lbs for long-lasting strength and performance.
- Full-Length Hinge Design: Applied along the entire door length to balance and distribute weight evenly.
- Seamless Aesthetic: The hinge is mounted to the frame rabbet and door edge, concealing both leaves.
- Installation-Ready: Includes all necessary fasteners for quick and straightforward installation.
- Maximum allowed swing: 80°

83" / 96" / 120" Long

GH1083

Continuous Gear Hinge - 10 Series



GH2083

Continuous Gear Hinge - 20 Series



GH3083

Continuous Gear Hinge - 30 Series



GH4083

Continuous Gear Hinge - 40 Series



Grey Goat - Samples



Grey Goat - Samples

P163 Storefront & Entrance System



Finishes





Polished Stainless







TRANQ78PS-SAMPLE

Tranquility Kit Sample



GGHCOLORSAMPLE

GGH Color Sample Kit



GGHARCSAMPLE

GGH Arc Series Standoff Sample