

Brighten Every Moment

# Solid Series

Indoor



Excellent Air Tightness



Cold Screen

## Superior Cabinet

- **Super Slim – 29.5mm**

Combining elegance and robustness

- **Ultra Light – 17.3 kg/m<sup>2</sup>**

Facilitating effortless installation

- **Exceptionally Robust**

Tensile strength of up to 2,000N  
Splicing of 50 rows / 17 m, no deformation



## Convenient Splicing & Installation

- **Big Board – 600\*337.5 mm, 16:9**

More accurate and easier splicing, compatible with diverse resolutions


- **Flexible Wiring**

Cascading both horizontally and vertically, saving wiring costs

- **Removable Back Frame Plate**

With cables passing through, preventing tangled cords at the screen bottom

## Unique Advantages

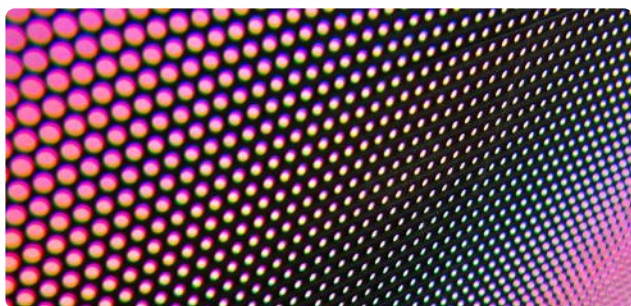

### Top Brand LED Lamp

- Higher luminous efficiency boosts maximum brightness
- Reliable airtightness reduces oxidation, minimizing open circuits and dead pixels



### Flip-Chip Cold Screen \*

- Energy use reduced by over 55%
- Surface temperature drops by 30%
- Nearby air temperature drops by 20°C

## Application Scenarios



Command Center



Meeting Room



Studio



Auditorium & Lecture Hall

## Key Spec

	DS-D4012NW-2F	DS-D4015NW-2F	DS-D4012CW-2F	DS-D4015CW-2F	DS-D4018CW-2F
<b>Pixel Structure</b>	SMD Triad LED with Top level lamp		SMD triad LED		
<b>Pixel Pitch (mm)</b>	1.25	1.56	1.25	1.56	1.8
<b>Cabinet Dimension (W × H × D, mm)</b>	600 × 337.5 × 29.5 (23.622" × 13.287" × 1.161")				
<b>Cabinet Resolution (W × H)</b>	480 × 270	384 × 216	480 × 270	384 × 216	240 × 136
<b>Cabinet Weight</b>	3.4 Kg(7.496 lb)				
<b>Cabinet Material</b>	Aluminium die casting				
<b>Protection Level</b>	IP60 (Front)				
<b>Brightness (nits)</b>	800		600		
<b>Viewing Angle</b>	160°(H)/160°(V)				
<b>Contrast Ratio</b>	3000:1				
<b>Peak Consumption (W/m<sup>2</sup>)</b>	≤ 460	≤ 390	≤ 460	≤ 390	≤ 400
<b>Refresh Rate (Hz)</b>	3840				
<b>Grey Level (bit)</b>	16				

\* Customized



Hikvision

HikvisionHQ

HikvisionHQ

Hikvision Corporate Channel

hikvisionoverseas

Hikvision Commercial Display

HikvisionOverseas

**HIKVISION**