

WE ARE AEG

We lead by challenging convention and creating innovations that go beyond what you expect from appliances in your home.

We create innovations that stand out today and help build a better tomorrow.

With our constant drive to aim higher, our uncompromising approach to innovation and relentless responsibility, we challenge the expected and create responsible innovations that redefine how you use your appliances.

Since our start in Berlin in 1887, we have never settled for good enough. And we don't think you should have to either.



INTRODUCTION

Why buy from an AEG Premier Partner?

Your Warranty

Find your nearest AEG Premier Partner

Our Technology

Matt Black Collection

REFRIGERATION

Integrated Fridge Freezers

Integrated Fridges and Freezers

Freestanding Fridge Freezers

Wine Cooling

OVENS

Connected Cooking

Single Ovens

Built-In Double Oven

Built Under Double Ovens

Compacts

Microwave Ovens

Blackline Range

HOBS

Induction Hobs

Ceramic Hob

Gas Hobs

Mixed Fuel Hob

Modular Hob

Extractor Hobs

HOODS

Island Hoods

Ceiling Hoods

Chimney Hoods

Integrated Hoods

DISHWASHERS

Fully Integrated Dishwashers

Slimline Fully Integrated Dishwasher

LAUNDRY

Built-In Washing Machine

Built-in Washer Dryer

Freestanding Washing Machines

Freestanding Tumble Dryers

Freestanding Washer Dryers

SMALL APPLIANCES

& ACCESSORIES

INSTALLATION DIAGRAMS

ENERGY INFORMATION

PREMIER.

A MINIMUM STANDARD FOR OUR PARTNERS

When you step into a kitchen studio with approved AEG Premier Partner status, you know you're going to get the exceptional level of performance and service that you come to expect from AEG.



TAKE ADVANTAGE OF THESE BENEFITS WHEN YOU VISIT ONE OF OUR PARTNER KITCHEN STUDIOS.

5-year warranty cover on all appliances in this brochure

Access to exclusive models and ranges

Exclusive brand promotions and rewards

Exceptional service combined with kitchen design expertise



PEACE OF MIND, BUILT IN

All our appliances featured within this brochure are available through our AEG Premier Partner retailers and are covered by our extended five year parts and labour warranty. Your Premier Partner will register them on your behalf so you don't have to worry about a thing. During your warranty period you are protected against the cost of parts, call-out and labour charges.


All work is carried out by our national network of approved AEG engineers.



To find out more visit aeg.co.uk or call **0800 479 0775**

YOUR JOURNEY STARTS HERE

Finding your nearest AEG Premier Partner couldn't be easier. Simply enter your postcode and you'll see

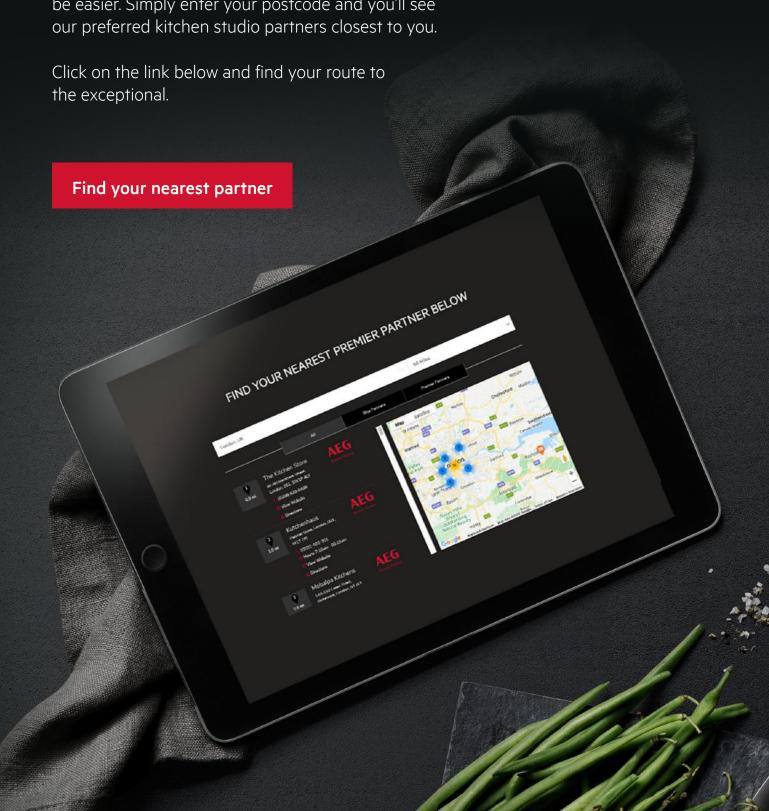

INNOVATIONS THAT PUSH THE BOUNDRIES IN YOUR KITCHEN

We know you already master your skills. We are here to help you take them even higher. With innovations that push the boundaries of what is achievable. And smart solutions engineered to learn and predict your needs and adapt to how you live.

We are relentless in developing better sustainable solutions, so you can raise your expectations. Because when we create responsible, built-to-last solutions, we also allow everyone who chooses AEG to make smarter choices for the environment. We always match sustainability with beauty and unparalleled performance, so you don't have to compromise.

It's time to forget outdated rules and trust your appliances.





SLEEK. SEEMLESS. SUPERIOR

The Matt Black Collection from AEG brings together years of material engineering for an exclusive and premium execution. The quality of the materials are brought to life with architectural edges and tactile surfaces, with polished displays and interaction areas bringing new aesthetics and improved functionality to an increasingly sophisticated kitchen space.

INSPIRATION BEHIND THE DESIGN

"The matt glass fascia is created by an etching process, a technology from the architectural world. The matt texture has natural anti-fingerprint properties, which is tested to be much more resistant to stains and easier to clean, bringing an advanced level of performance."

Terence Tan, Senior Master Designer

exence Tom



MATT BLACK COLLECTION















Connected Matt Black SteamPro Oven with Command Wheel

BSK993330T

KEY FEATURES



Connected





Command Wheel





BPK948330T **KEY FEATURES**



Connected



Connected Matt Black Multifunction Oven





Dough Proving

🔊 Au Gratin

Bread Baking

(PYRO-LYSIS) Pyrolysis

Wheel



SenseCook SurroundCook®

OVEN FUNCTIONS

SousVide Cooking

Full Steam

Humidity High

Humidity Medium

Humidity Low

True Fan Cooking

Conventional Cooking

(デ) Turbo Grilling

(Grilling

Model Features

Steam cleaning

Enamel liners

TFT display

Fast heat up

Surround cook

Bottom Heat

Pizza Setting

(2) Moist Fan Baking

(I°c) Slow Cooking

> Defrost

(GRATIN) Au Gratin

Bread Baking

Dough Proving

Quadruple door glazing

Telescopic runners

XXL baking tray

Humidity sensor

30°C - 230°C

Steam set

Steam Regeneration

OVEN FUNCTIONS

Pyrolytic

True Fan Cooking

Conventional Cooking

(🖁) Turbo Grilling

("") Grilling

Bottom Heat

(G) Pizza Setting

Moist Fan Baking

(Defrost

(Ic) Slow Cooking

Fully programmable timer

TFT display

71 Itr oven capacity

Double halogen lighting Telescopic runners

XXL baking tray XXL meat/grill pan 30°C - 300°C

Quadruple door glazing

Energy Rating: A++

Appliance/Built-in Dimensions (HxWxD) in mm: 594 x 595 x 567 / 590 x 560 x 550

Model Features

Fast heat up

Energy Rating: A++

70 ltr oven capacity

Fully programmable timer

Appliance/Built-in Dimensions (HxWxD) in mm:

594 x 595 x 567 / 590 x 560 x 550









Connected Matt Black Oven with Command Wheel Control

KMK968000T

KEY FEATURES











Connected Multifunction

Command SurroundCook® Wheel

OVEN FUNCTIONS

True Fan Cooking





















Microwave & Oven

Defrost

Fast Grilling

Microwave function

Model Features

Fully programmable timer

30°C - 230°C 1000W microwave

White LED display 43 ltr oven capacity

Glass microwave base plate

Single halogen lighting

Triple door glazing

XXL baking tray XXL meat/grill pan

Appliance Dimensions (HxWxD) in mm:

Built-in Dimensions (HxWxD) in mm: 450 x 560 x 550

455 x 595 x 567

MATT BLACK COLLECTION















Matt Black Coffee Machine with Command Wheel Control

KKK994500T

FEATURES







Authentic Italian Coffee



Fully Automatic



Uses Fresh Coffee Beans

14cm Matt Black Warming Drawer

KDK911424T

KEY FEATURES







Settings

30-80°C Temp range

OVEN FUNCTIONS

Espresso

Tea Water

Cappuccino

Latte Macchiato

Cappuccino Plus

Long Coffee

Caffè Latte

Warm Milk

Caffè Macchiato

Ristretto

Espresso Lungo

Steamer

Espresso Macchiato

Jug Function

Flat White

Two Cups

Model Features

Coffee jug

Water softener Thermal milk container 2.4 ltr water tank

Descaler Cleaning brush Coffee powder spoon

Telescopic runners + soft closing

Appliance Dimensions (HxWxD) in mm: 455 x 595 x 361

Built-in Dimensions (HxWxD) in mm: 450 x 560 x 550

400 gr grinder capacity Quadruple LED lighting

FUNCTIONS

Cups and Glass Warming (40°C)

Dough Proving (30°C)

Plate Warming (60°C)

Keep Warm (70°C)

Food Reheating (60°C - 80°C Max) Defrosting (30°C Max)

Model Features

Variable temperature control On/off LED

Anti-slip mat

Rotary control knob Heating element Fan air circulation

Appliance Dimensions (HxWxD) in mm:

140 x 595 x 535

Built-in Dimensions (HxWxD) in mm: 141 x 560 x 550







14cm Matt Black Vacuum Sealer

KDK911423T

KEY FEATURES











Touch Controls

White LEDs

3 Vacuum Settings

FUNCTIONS

Marinating/Infusion

Min. Vacuum setting

Max. Vacuum setting

Sealing time displayed

Med. Vacuum setting

Appliance Dimensions

(HxWxD) in mm: 131 x 595 x 510

Built-in Dimensions (HxWxD) in mm:

139 x 560 x 550

MATT BLACK COLLECTION



90cm Screen Wall Mounted Chimney Hood with Dimmable LED Lighting and Touch Controls DVK6981HR

KEY FEATURES





Hob2Hood



Touch on Glass Controls

Dimmable LED Strip Lighting

FUNCTIONS

(Y) 5 Fan speeds



included

Matt black chimney section

(14) Breeze Function

Additional Features

Charcoal filter included Motor speed: 750 m³/h

Noise: 43dB - 54dB

Energy Rating: A+

Dimensions (HxWxD) in mm: (1260-915) 380 x 896 x 456









Matt Black 60/40 Freestanding Fridge Freezer with TwinTech® NoFrost and Touch Control

RCB732E4MG

KEY FEATURES













NoFrost

FRIDGE FEATURES

Touch Control Soft Close Doors

LED Lighting

Coolmatic

Auto defrost 1 full width salad drawer

2 full width shelves Egg tray: 2 for 8 eggs

FREEZER FEATURES

Auto defrost 2 full width and 1 half depth drawers

DOOR FEATURES

331 ltr

Door open alarm Reversible doors (right as default)

Capacity **Additional Information**

Fridge: Annual energy consumption: 250kWh 230 ltr Noise Rating: D Noise Level: 42dB Freezer: Power cut safe rising time: 18h 101 ltr Holiday mode: No Combined:

> Colour Black

Energy Rating: E **Appliance Dimensions** (HxWxD) in mm: 1860 x 595 x 662









18 Bottle Matt Black Compact Wine Cooler

KWK884520T

KEY FEATURES









Wine

/ine Temp

LED Lighting

FRIDGE FEATURES

2 full width shelves

DOOR FEATURES

Drop down opening

Capacity

Additional Information

18 bottles

Annual energy consumption: 100kWh Noise Rating: C

Noise Level: 39dB Electronic control

Minimum ambient temperature: 16° Door fixing: BI Drop down

Energy Rating: F

Appliance Dimensions (HxWxD) in mm: Unit: 455 x 595 x 566 Built-in: 450 x 560 x 550

We design solutions to protect food quality so that people can enjoy a healthy diet and a sustainable life. We help consumers avoid food waste by protecting food quality. We work with circular, recyclable and conscious solutions and materials and reduce environmental footprint.

Flavour is all about freshness and storing ingredients – the right humidity and temperature is vital. But how do you want your fridge arranged?

Our solution lets you decide. Everything and anything fits in perfectly for long-lasting flavour, while maintaining energy efficiency, protecting your environment and your budget.

Our Zero Degree compartments make it possible to create different chilling conditions in each part of your refrigerator. Adjust each drawer's temperature at a touch.



COLDSENSE



TWINTECH® NOFROST



GREENZONE

IN THIS SECTION

Integrated Fridge Freezers
Integrated Fridges and Freezers
Freestanding Fridge Freezers
Wine Cooling



COOL ON EVERY LEVEL




TwinTech® NoFrost

Unlike conventional fridge freezers that use cold, ultradry air from the freezer and recirculate it to cool the fridge, TwinTech® NoFrost units have two separate cooling systems. This provides the ideal humidity in each compartment, preventing food from drying out in the fridge and delivering frost-free storage in the freezer.





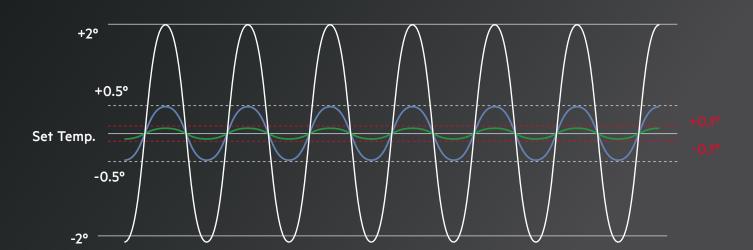





DynamicAir

DynamicAir technology maintains the airflow inside the fridge, ensuring a consistent temperature at every shelf so that your ingredients stay fresh.





NoFrost

Never defrost your freezer again. NoFrost freezers offer efficient and effective freezing with quicker, more even freezing for better food preservation.





LongFresh

The LongFresh feature is a Zero Degree compartment with adjustable temperature settings and separate humidity. The two Zero Degree compartments in the AEG refrigerator allow you to choose and adjust the humidity and temperature settings in each drawer.

ADAPTABLE FOR EVERY <u>TASTE</u>



CustomFlex®

Create your own perfectly organised fridge with the CustomFlex® storage system. This unique and practical inner door system allows you to arrange shelves, clips and compartments in all shapes and sizes in hundreds of different layouts, so there's always one that works best for you at any time.









LED Touch Display

Touch controls with new white LED digital display.





High Efficiency LED Lighting

LED lighting ensures a good spread of light shines downwards in the fridge. An intelligent fan function prevents warm areas in the upper part of the fridge and creates an even temperature in all fridge levels. even freezing for better food preservation.





Self-Closing Door

An elegant solution, with no risk of slamming. Automatically closes from an opening angle of 25–30 degrees.

REFRIGERATION ICONS

KEY FEATURES GUIDE



TwinTech® NoFrost

Pioneering TwinTech® NoFrost technology for exceptional freshness. One cooling system chills the freezer, keeping it NoFrost. The other cools the fridge, ensuring that the fridge temperature is cold, stable and with the correct level of humidity, so as not to dry out your fruit and vegetables.



Frostmatic

Ideal for freezing fresh food quickly, preserving the flavour, colour, texture and nutritional value.



Multi Air Flow

The Multi Air Flow technology provides the precise temperature and humidity your ingredients need to stay fresh in your fridge, nutritious and full of flavour for even longer.



CustomFlex®

Keeping all your fresh ingredients to hand is key to creating fresh, delicious dishes. Now the CustomFlex® refrigerator from AEG lets you organise your fridge storage just the way you want.



LCD Touch Display

Sleek touch controls that are intuitive and ready to use.



Ice & Water

Dispenser through the door for water and ice cubes.



High Temperature Alarm

Highlights an increase in the temperature in the freezer compartment.



NoFrost

Never defrost your freezer again. NoFrost freezers offer efficient and effective freezing with quicker, more even freezing for better food preservation.



LowFrost

Faster, more efficient defrosting. Time is of the essence when defrosting your freezer. This fridge freezer comes with efficient LowFrost technology, which makes the defrosting faster and less frequent than ever before.



LongFresh

The LongFresh feature is a Zero Degree compartment with adjustable temperature settings and separate humidity. The two Zero Degree compartments in the AEG refrigerator allow you to choose and adjust the humidity and temperature settings in each drawer.



Touch Control

Intuitive touch controls provide instant feedback, are easy to use and look sleek in the kitchen.



Soft Close Doors

Soft Close door hinges that automatically close from an angle of 23–30 degrees – providing an elegant solution to slamming doors.



LED Lighting

Premium and modern lighting system in the fridge thanks to the bright LED light with rise-on effect.



GreenZone

Dedicated drawer which allows you to precisely control the humidity, so you can preserve the flavours and nutrients of your fresh fruits and vegetables.



Coolmatic

Ideal for chilling fresh food quickly and regaining a stable temperature within the fridge once the door has been opened, maintaining food freshness.



DynamicAir

DynamicAir technology maintains the airflow inside the fridge, ensuring a consistent temperature at every shelf so that your ingredients stay fresh.



UltraFresh+

Automatic humidity control and antioxident release filter inside the fridge compartment, keeping fruit and vegetables market fresh.



MultiSpace

No compromise between kitchen dimensions and your storage requirements. More storage capacity than a standard built-in model for improved organization and flexibility.



SpinView

The revolutionary solution for easy access to those hard to reach items. SpinView rotates with one touch in both directions, allowing full accessibility to the back of the shelf with minimum effort.



MultiSwitch

Fully convertible middle drawer ranging from -18 to +7 degrees. Provides optimal environment for any type of food.



Simple Touch Controls

Our simple to use electronic controls, with Frostmatic function, ensure that you can set the fridge freezer to your desired temperature.

INTEGRATED FRIDGE FREEZERS







70/30 with TwinTech® NoFrost and CustomFlex® SCE818C5TC

KEY FEATURES









Soft Close Doors



DynamicAir



Touch Control







70/30 with TwinTech® NoFrost and CustomFlex® SCE818E5TC

KEY FEATURES











TwinTech®



CustomFlex®







LED Lighting









Coolmatic





High Temperature

FRIDGE FEATURES

Auto defrost

3 full width + flexi shelf

2 half width salad drawers

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 2 for 6 eggs

FREEZER FEATURES

Auto defrost

3 full width drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

FRIDGE FEATURES

Auto defrost

3 full width + flexi shelf

2 half width salad drawers

Dairy compartment with lid

Egg tray: 2 for 6 eggs

FREEZER FEATURES

Auto defrost

3 full width drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

Capacity

Fridge: 184 ltr

Freezer: 61 Itr

Combined: 245 ltr

Additional Information

Annual energy consumption: 137kWh Noise Rating: B Noise Level: 35dB Power cut safe rising time: 23h

Holiday mode: Yes Door fixing: BI DoD

Colour

White

Energy Rating: C **Appliance Dimensions** (HxWxD) in mm:

Combined: 1769 x 556 x 549 Built-in: 1780 x 560 x 550

Capacity

Fridge: 184 ltr Freezer: 61 Itr

Combined: 245 ltr

Additional Information

Annual energy consumption: 214kWh Noise Rating: C Noise Level: 37dB

Power cut safe rising time: 23h Holiday mode: Yes

Door fixing: BI DoD

Colour White

Energy Rating: E

Appliance Dimensions (HxWxD) in mm:

Combined: 1769 x 556 x 549 Built-in: 1780 x 560 x 550

INTEGRATED SUPER TALL FRIDGE FREEZERS







70/30 with TwinTech® NoFrost and CustomFlex® SCE819E5TS

KEY FEATURES



TwinTech® NoFrost



CustomFlex®



DynamicAir



Simple Touch



LED Lighting









70/30 with CustomFlex® and SpinView SCE819E7TS

KEY FEATURES













SpinView



MultiSpace



TwinTech®



LCD Touch Display







High Temperature







LED Lighting

FRIDGE FEATURES

Auto defrost

3 full width + flexi shelf

Fresh box

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 2 for 6 eggs

FREEZER FEATURES

Auto defrost

3 full width drawers

DOOR FEATURES

Reversible doors (right as default)

FRIDGE FEATURES

Auto defrost

3 full width + flexi shelf

Fresh box

Dairy compartment with lid

Egg tray: 1 for 10 eggs

FREEZER FEATURES

Auto defrost

3 full width drawers

DOOR FEATURES

Reversible doors (right as default)

Capacity

Fridge: 208 ltr Freezer:

61 Itr Combined: 269 ltr

Additional Information

Door fixing: BI slide door

Annual energy consumption: 214kWh Noise Rating: C Noise Level: 36dB Power cut safe rising time: 21h Holiday mode: Yes

Colour White

Appliance Dimensions Energy Rating: C (HxWxD) in mm:

Combined: 1884 x 540 x 549 Built-in: 1898 x 556 x 549

Capacity

Fridge: 208 ltr Freezer: 61 Itr

Combined: 269 ltr

Additional Information

Annual energy consumption: 214kWh Noise Rating: C Noise Level: 36dB Power cut safe rising time: 21h Holiday mode: Yes Door fixing: BI slide door

Colour

White

Energy Rating: E


Appliance Dimensions (HxWxD) in mm:

Combined: $1884 \times 540 \times 549$ Built-in: 1898 x 556 x 549









KEY FEATURES







Touch Control



DvnamicA



LED Lighting



Coolmatic







70/30 with TwinTech® NoFrost and Soft Close Doors SCE818E6TC

KEY FEATURES







Soft Close Doors



Touch Control



Coolma



Frostmatic



High Temperatu



GreenZon



Frostmatic



High Temperature

FRIDGE FEATURES

Auto defrost

3 full width + flexi shelf

1 full width salad drawer

Dairy compartment with lid

Egg tray: 2 for 6 eggs

FREEZER FEATURES

Auto defrost

3 full width drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

FRIDGE FEATURES

Auto defrost

3 full width + flexi shelf

2 half width salad drawers

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 2 for 6 eggs

FREEZER FEATURES

Auto defrost

3 full width drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

Capacity

Fridge: 193 ltr

Freezer: 61 ltr

254 ltr

c ...

Combined:

Additional Information

Annual energy consumption: 214kWh Noise Rating: B Noise Level: 35dB

Holiday mode: Yes Door fixing: BI Slide Door

Power cut safe rising time: 21h

Colour White

Energy Rating: E

Appliance Dimensions (HxWxD) in mm:

Combined: 1772 x 540 x 549 Built-in: 1780 x 560 x 550

Capacity

Fridge: 187 ltr

Freezer: 61 ltr

Combined: 248 ltr

Additional Information

Annual energy consumption: 214kWh

Noise Rating: C Noise Level: 37dB

Power cut safe rising time: 23h

Holiday mode: Yes Door fixing: BI DoD

Colour

White

Energy Rating: E Appliance Dimensions (HxWxD) in mm:

Combined: 1769 x 556 x 549 Built-in: 1780 x 560 x 550

INTEGRATED FRIDGE FREEZERS







50/50 with TwinTech® NoFrost and Touch Control SCE818E6NS

KEY FEATURES







Touch Control



DynamicAir



LED Lighting



Coolmatic









50/50 with TwinTech® NoFrost and Touch Control SCE818F6NS

KEY FEATURES



TwinTech® NoFrost



Touch Control



LED Lighting



Frostmatic





High Temperature



High Temperature

FRIDGE FEATURES

Auto defrost

2 full width + flexi shelf

2 half width salad drawers

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 2 for 6 eggs

FREEZER FEATURES

Auto defrost

4 full width drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

FRIDGE FEATURES

Auto defrost

2 full width + flexi shelf

2 half width salad drawers

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 2 for 6 eggs

FREEZER FEATURES

Auto defrost

4 full width drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

Capacity

Fridge: 153 ltr

Freezer:

87 Itr

Combined:

240 ltr

Additional Information

Annual energy consumption: 235kWh

Noise Rating: C

Noise Level: 36dB

Power cut safe rising time: 25h

Holiday mode: Yes

Door fixing: BI slide door

Colour

White

Appliance Dimensions Energy Rating: E (HxWxD) in mm:

Combined: 1772 x 540 x 549 Built-in: 1780 x 560 x 550

Capacity

Fridge:

153 ltr

Freezer: 87 Itr

Combined:

240 ltr

Additional Information

Annual energy consumption: 293kWh

Noise Rating: C

Noise Level: 36dB

Power cut safe rising time: 24h

Holiday mode: Yes

Door fixing: BI slide door

Colour

White

Energy Rating: F

Appliance Dimensions (HxWxD) in mm:

Combined: 1772 x 540 x 549 Built-in: 1780 x 560 x 550







70/30 with TwinTech® NoFrost and Touch Control SCE818F6TS

KEY FEATURES











DynamicAir



LED Lighting



Coolmatic







High Temperature

FRIDGE FEATURES

Auto defrost

3 full width + flexi shelf

2 half width salad drawers

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 2 for 6 eggs

FREEZER FEATURES

Auto defrost

3 full width drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

Capacity

61 Itr

254 ltr

Combined:

Additional Information

Fridge: Annual energy consumption: 268kWh

193 ltr Noise Rating: C Noise Level: 38dB Freezer:

Power cut safe rising time: 21h

Holiday mode: Yes Door fixing: BI Slide Door

Colour

White

Energy Rating: F

Appliance Dimensions (HxWxD) in mm:

Combined: 1772 x 540 x 549 Built-in: 1780 x 560 x 550

INTEGRATED FRIDGE FREEZERS







70/30 LowFrost with Simple Touch Controls SCB618F3LS

KEY FEATURES







Simple Touch Control



LED Lighting



Frostmatic









50/50 LowFrost with Simple Touch Controls SCB718F3LS

KEY FEATURES



LowFrost

Sim



Simple Touch LED Lighting



Frostmatic

FRIDGE FEATURES

Auto defrost

4 full width + flexi shelf

2 half width salad drawers

Dairy compartment with lid

Egg tray: 2 for 6 eggs

FREEZER FEATURES

Manual defrost

3 full width drawers

DOOR FEATURES

Reversible doors (right as default)

FRIDGE FEATURES

Auto defrost

3 full width + flexi shelf

2 half width salad drawers

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 2 for 6 eggs

FREEZER FEATURES

Manual defrost

4 full width drawers

DOOR FEATURES

Reversible doors (right as default)

Capacity

Fridge: 196 ltr

Freezer:

72 Itr

Combined:

268 ltr

Additional Information

Annual energy consumption: 272kWh

Noise Rating: B

Noise Level: 35dB

Power cut safe rising time: 22h

Holiday mode: Yes

Door fixing: BI slide door

Colour

White

Energy Rating: F Appliance Dimensions (HxWxD) in mm:

Combined: 1772 x 540 x 549 Built-in: 1780 x 560 x 550

Capacity

Fridge:

161 ltr

Freezer: 106 ltr

Combined:

267 ltr

Additional Information

Annual energy consumption: 289kWh

Noise Rating: C

Noise Level: 36dB

Power cut safe rising time: 22h Door fixing: BI slide door

Colour

White

Energy Rating: F

Appliance Dimensions (HxWxD) in mm:

Combined: 1772 x 540 x 549 Built-in: 1780 x 560 x 550







70/30 Mini 1446mm LowFrost with LED Lighting SCB614F1LS

KEY FEATURES





LowFrost

LED Lighting

FRIDGE FEATURES

FREEZER FEATURES

Auto defrost

3 full width + flexi shelf

2 half width salad drawers

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 2 for 6 eggs

Manual defrost

2 full width drawers

DOOR FEATURES

Reversible doors (right as default)

Capacity

Additional Information Fridge:

160 ltr

Freezer:

57 Itr

Combined:

217 Itr

Annual energy consumption: 253kW Noise Rating: B

Noise Level: 35dB

Power cut safe rising time: 20h Door fixing: BI Slide Door Simple electronic control

Colour

White

Energy Rating: F

Appliance Dimensions (HxWxD) in mm:

Combined: 1441 x 540 x 549 Built-in: 1446 x 560 x 540

INTEGRATED UNDER COUNTER FREEZERS







NoFrost Freezer with Simple Touch Controls ABE682F1NF

KEY FEATURES



NoFrost









Frostmatic High Temperature







Freezer with Simple Touch Controls ABB682F1AF

KEY FEATURES







Simple Touch

Frostmatic

High Temperature

FREEZER FEATURES

Auto defrost

3 full width drawers

Telescopic freezer drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

FREEZER FEATURES

Manual defrost

3 full width drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

Capacit	y
---------	---

Freezer:

85 Itr

Additional Information

Annual energy consumption: 237kWh Noise Rating: D

Noise Level: 43dB

Power cut safe rising time: 13h Door fixing: BI UC DoD

Colour

White

Energy Rating: F

Appliance Dimensions (HxWxD) in mm: Unit: 815 x 596 x 550 Built-in: 820 x 600 x 550

Capacity

Freezer: 95 ltr

Additional Information

Annual energy consumption: 220kWh

Noise Rating: C Noise Level: 39dB

Power cut safe rising time: 21h Door fixing: BI UC DoD

Colour

White

Energy Rating: F

Appliance Dimensions (HxWxD) in mm: Unit: 815 x 596 x 550 Built-in: 820 x 600 x 550













Fridge with Freezer Compartment and LED Lighting SFB682F1AF

KEY FEATURES



LED Lighting

Fridge with LED Lighting SKB582F1AF **KEY FEATURES**



LED Lighting

FRIDGE FEATURES	DOOR FEATURES	FRIDGE FEATURES	DOOR FEATURES
Auto defrost	Reversible doors (right as default)	Auto defrost	Reversible doors (right as default)
2 full width glass shelves		3 full width glass shelves	
1 full width salad drawer		1 full width salad drawer	
Dairy compartment with lid		Dairy compartment with lid	
1 half width sliding door shelf		1 half width sliding door shelf	
Egg tray: 1 for 6 eggs		Egg tray: 1 for 6 eggs	
Capacity	Additional Information	Capacity	Additional Information
Fridge:	Annual energy consumption: 185kWh	Fridge:	Annual energy consumption: 116kWh
94 ltr	Noise Rating: C	134 ltr	Noise Rating: C
Ice box:	Noise Level: 38dB		Noise Level: 37dB
16 ltr	Power cut safe rising time: 11h		Door fixing: BI UC DoD
	Door fixing: BI UC DoD Mechanical control		Mechanical control
	Colour		Colour
	White		White
Energy Rating: F	Appliance Dimensions (HxWxD) in mm: Unit: 815 x 596 x 550 Built-in: 820 x 600 x 550	Energy Rating: F	Appliance Dimensions (HxWxD) in mm: Unit: 815 x 596 x 550 Built-in: 820 x 600 x 550

INTEGRATED FREEZERS







1780mm NoFrost with Touch Controls and Soft Close Doors ABK818E6NC

KEY FEATURES





Auto defrost



Touch Control



Soft Close Doors





High Temperature







1225mm NoFrost with Touch Controls and Soft Close Doors ABB812E6NC

KEY FEATURES













FREEZER FEATURES

5 full width drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

FREEZER FEATURES

Auto defrost

4 full width drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

Capacity

Freezer:

204 ltr

Additional Information

Annual energy consumption: 233kWh Noise Rating: C Noise Level: 39dB

Power cut safe rising time: 24h

Door fixing: BI DoD

Capacity

Freezer:

122 ltr

Additional Information

Annual energy consumption: 203kWh Noise Rating: C Noise Level: 40dB

Power cut safe rising time: 22h

Door fixing: BI DoD

Colour

White

Energy Rating: □

Colour White

Energy Rating: E Appliance Dimensions

> (HxWxD) in mm: Unit: 1769 x 556 x 549 Built-in: 1780 x 560 x 550

Appliance Dimensions (HxWxD) in mm:

Unit: 1224 x 556 x 549 Built-in: 1225 x 556 x 550



INTEGRATED FRIDGES



1780mm with LongFresh and Soft Close Doors SKK818E9ZC

KEY FEATURES













Soft Close Doors

FRIDGE FEATURES

Auto defrost

3 full width + flexi shelf

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 2 for 6 eggs

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

Capacity

Fridge: 276 ltr

Additional Information

Annual energy consumption: 148kWh Noise Rating: C Noise Level: 37dB Door fixing: BI DoD

Colour

White

Energy Rating: E

Appliance Dimensions (HxWxD) in mm: Unit: 1769 x 556 x 549 Built-in: 1780 x 560 x 550



LongFresh

The LongFresh feature is a Zero Degree compartment with adjustable temperature settings and separate humidity. To maintain the deep blushing crimson of a fillet of beef, to ensure the sweet freshness of a lobster tail, or to hold the ultimate flavour of fresh fruit they must be treated and chilled with precision. The two Zero Degree compartments in the AEG refrigerator allow you to choose and adjust the humidity and temperature settings in each drawer. Ensure that each element is at peak condition, by chilling them in unique conditions.







1780mm with Soft Close Doors and Touch Control SKE818E1DC

KEY FEATURES















SKB812F1AC

KEY FEATURES





1225mm with Soft Close Doors and Touch Control



Soft Close Doors

Touch Control

Dyn

icAir LED Lighting

Coolmatic

LED Lighting

Coolmat

FRIDGE FEATURES

Auto defrost

4 full width + flexi shelf

1 drawer divider fresh box

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 2 for 6 eggs

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

FRIDGE FEATURES

Auto defrost

Soft Close Doors

3 full width + flexi shelf

2 half width salad drawers

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 2 for 6 eggs

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

Capacity

Fridge: 311 ltr

Additional Information

Annual energy consumption: 114kWh Noise Rating: B Noise Level: 35dB Holiday mode: Yes Door fixing: BI DoD

Colour

White

Energy Rating: E Appliance Dimensions (HxWxD) in mm:

Unit: 1769 x 556 x 549 Built-in: 1780 x 560 x 55

Capacity

Fridge 203 ltr

Additional Information

Annual energy consumption: 126kWh Noise Rating: C Noise Level: 36dB Holiday mode: Yes Door fixing: BI DoD

Colour

White

Energy Rating: F

Appliance Dimensions (HxWxD) in mm:Unit: 1219 × 556 × 550
Built-in: 1225 × 560 × 550

REFRIGERATION

FREESTANDING FRIDGE FREEZER









Matt Black 60/40 with TwinTech® NoFrost and Touch Control RCB732E4MG

KEY FEATURES















LED Lighting



Coolmatic

FREESTANDING AMERICAN STYLE & FRENCH DOOR







French Door TwinTech® NoFrost with Multi Switch Drawer RMB954F9VX

KEY FEATURES



TwinTech® NoFrost



MultiSwitch



Multi Air Flow



CustomFlex®



Connectivity



Frostmatic

FREEZER FEATURES

Auto defrost

2 full width shelves

FRIDGE FEATURES

1 full width salad drawer

Egg tray: 2 for 8 eggs

Auto defrost

2 full width and 1 half depth drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

FRIDGE FEATURES

Auto defrost

Ice & Water

1 full width + flexi shelf

2 half width salad drawers

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 1 for 12 eggs

FREEZER FEATURES

Auto defrost

2 full width drawers

DOOR FEATURES

Door open alarm

Left & right door opening

MultiSwitch drawer

Capacity

Fridge: 230 ltr

Freezer: 101 ltr

6 1:

Combined:

331 ltr

Additional Information

Annual energy consumption: 250kWh Noise Rating: D Noise Level: 42dB Power cut safe rising time: 18h

Holiday mode: No

Colour

Black

Energy Rating: ☐ Appliance Dimensions (HxWxD) in mm:

1860 x 595 x 662

Capacity

Fridge: 378 ltr

Freezer: 239 ltr

Combined: 617 ltr

Additional Information

Annual energy consumption: 412kWh Noise Rating: D

Noise Level: 42dB

Colour

Stainless steel

Energy Rating: F

Appliance Dimensions (HxWxD) in mm: 1780 x 912 x 758









Side by Side TwinTech® NoFrost with Ice & Water Dispenser RMB76121NX

KEY FEATURES







Ice & Water



Multi Air Flow



LCD Touch Display



ouch LED Lighting



Coolmatic



Frostmatic



High Temperature

FRIDGE FEATURES

FREEZER FEATURES

Auto defrost

4 full width glass shelves

Fresh box

Large pull out salad drawer

Dairy compartment with lid

Egg tray

Auto defrost

2 full width drawers

DOOR FEATURES

Door open alarm

Side by side door opening

2 shelves

Capacity

Additional Information

Fridge: Annual energy consumption: 390kWh

370 ltr Noise Rating: D
Freezer: Noise Level: 44dB

179 Itr Power cut safe rising time: 10h

Combined: Holiday mode: Yes

549 ltr Plumbed

Colour

Stainless steel

Energy Rating: F

Appliance Dimensions (HxWxD) in mm: 1780 × 912 × 738

WINE COOLING

Our Wine Cellar Range has dedicated technology for optimal wine storage, to store your wine bottles at the perfect temperature throughout the cooler.

Our wine cellars have a single temperature zone with a range of 5–20, providing the perfect environment for your wine. The UV protected glass door helps to protect your wine from light damage and our internal fan ensures a stable, consistent temperature.



WINE COOLING

UNDERCOUNTER WINE COOLERS







46 Bottle Wine Cooler AWUS052B5B

KEY FEATURES





Wine Temp



UV Glass



Simple Touch





LED Lighting







20 Bottle Wine Cooler AWUS020B5B

KEY FEATURES







UV Glass





FRIDGE FEATURES

6 full width glass shelves

DOOR FEATURES

Reversible doors (right as default)

FRIDGE FEATURES

6 full width glass shelves

DOOR FEATURES

Reversible doors (right as default)

Capacity

46 bottles

Additional Information

Annual energy consumption: 148kWh Noise Rating: D Noise Level: 42dB Minimum ambient temperature: 16° Door fixing: BI wide door

Capacity

20 bottles

Additional Information

Annual energy consumption: 137kWh Noise Rating: D Noise Level: 42dB Minimum ambient temperature: 16° Door fixing: BI wide door

Energy Rating: G

Appliance Dimensions (HxWxD) in mm: Unit: 820 x 595 x 565 Built-in: 822 x 600 x 550 **Energy Rating:** G

Appliance Dimensions (HxWxD) in mm: Unit: 820 x 294 x 571 Built-in: 822 x 300 x 550

COMPACT WINE COOLERS















18 Bottle Matt Black Wine Cooler KWK884520T

KEY FEATURES









LED Lighting

18 Bottle Wine Cooler KWK884520M



KEY FEATURES







FRIDGE FEATURES

DOOR FEATURES

2 full width shelves

Drop down opening

FRIDGE FEATURES

2 full width shelves

DOOR FEATURES

Drop down opening

Capacity

18 bottles

Additional Information

Annual energy consumption: 100kWh

Noise Rating: C Noise Level: 39dB Electronic control

Minimum ambient temperature: 16° Door fixing: BI Drop down

Capacity

18 bottles

Additional Information

Annual energy consumption: 100kWh

Noise Rating: C Noise Level: 39dB Electronic control

Minimum ambient temperature: 16° Door fixing: BI Drop down

Energy Rating: F

Appliance Dimensions (HxWxD) in mm:

Unit: 455 x 595 x 566 Built-in: 450 x 560 x 550 **Energy Rating:** F

Appliance Dimensions (HxWxD) in mm:

Unit: 455 x 595 x 566 Built-in: 450 x 560 x 550

OVENS

Our solutions help you expand your skills in the kitchen and take taste further. We encourage curiosity and explore new ingredients and techniques that exceed expectations, while also pushing the standards of healthy and sustainable cooking.

However you like to cook and whatever your favourite dishes, there's an AEG oven that's just right for you.

Featuring our intelligent technology, every oven makes it effortless and enjoyable to create great tasting food, exactly the way you like it.

IN THIS SECTION

Connected Cooking

Single Ovens

Built-In Double Ovens

Built-Under Double Oven

Compacts

Microwave Ovens

Blackline Range





GREAT TASTE, AT YOUR COMMAND

Order from your oven with Command Wheel the way you would at a restaurant. Select rare, medium or well done to enjoy perfect results at home without ever dealing with degrees. Why compromise on an oven that doesn't live up to your standards.



Command Wheel

An innovative Command Wheel removes the need for a busy dashboard and makes the cooking experience simple and streamlined for perfection on a plate, every time.



Connected

Easily monitor and set your oven programmes with our AEG App. This allows you to adjust cooking programmes, follow step by step recipes, and even allows you to set cooking programmes based on relevant recipes.

The latest furniture trends are becoming more linear and we have designed our products in line with that. We've also included more glass and less stainless steel for a seamless finish.








SenseCook

By precisely measuring the core temperature of your food, the Food Sensor lets you know when your rare, medium or well done meat is ready. It also allows you to cook fish, casseroles and vegetables just the way you like them.





SurroundCook®

Expect even, every time with SurroundCook®. Every part of your dish receives the exact consistent heat that it needs.





Pyrolytic Self Cleaning

A total self-cleaning function that automatically locks the oven door and heats up to 500°C, turning food residue to ash.

WELCOME TO THE SMART KITCHEN

EXPERIENCE OUR INTELLIGENT SOLUTIONS

Get the most out of your experience by connecting your AEG appliances. Our smart products make your everyday tasks both easier and more convenient. You are able to adapt your appliances with your personal preferences via remote monitoring and control.



My AEG Kitchen App *

To ensure peace of mind whilst owning an AEG appliance download the My AEG Kitchen App. Within the App you'll find user-friendly guides, help to set up your connected oven and the ability to register your product guarantee with ease.



Remote Monitor

Monitor the progress of your food whilst it cooks. You can easily check how your favourite dish is coming along through your smartphone whilst you're away from your oven.

Remote Control


It's simple to start & end the cooking program remotely through your smartphone and if you think the temperature needs adjusting then you can do this simply too.

Send a recipe to your oven

You can send your favourite recipe with its settings directly to your oven via the My AEG Kitchen App and your oven will take care of cooking it to perfection.





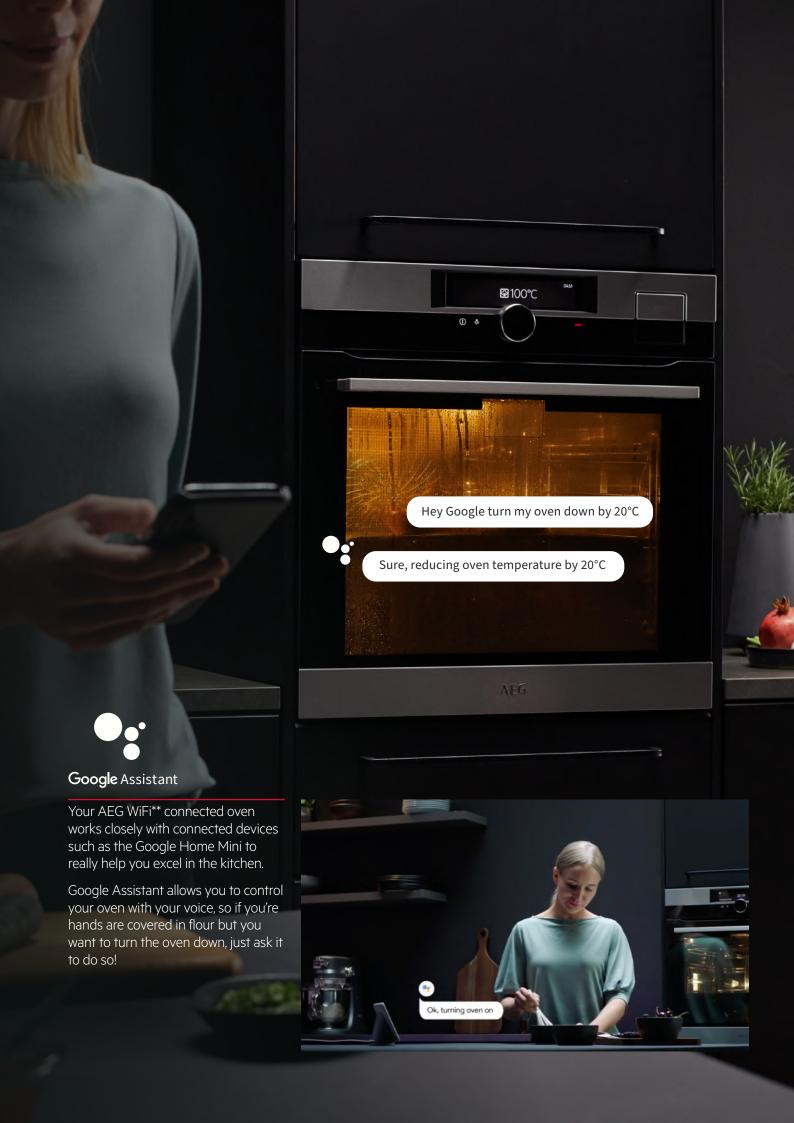

THE EXTENDED FAMILY



The CookView® Camera

Our WiFi connected oven features an internal CookView® camera located in the handle with a clear view into the oven cavity. It's wirelessly linked to the My AEG Kitchen App and allows you to watch a live feed of your food being cooked that you are able to see wherever you are.

Are you proud of what you are cooking? Then why not share the picture taken with the CookView® camera directly from your oven through social media and share with your family and friends.








CamCook

CamCook technology works in multiple ways. It operates either through the CookView® camera in our ovens or simply through the camera in your smartphone or tablet.

The technology recognises your favourite dishes, letting you achieve the same perfect result every time – for truly effortless cooking.

And for added ease, save your favourite dishes in the preferred cooking settings, for reliable results.

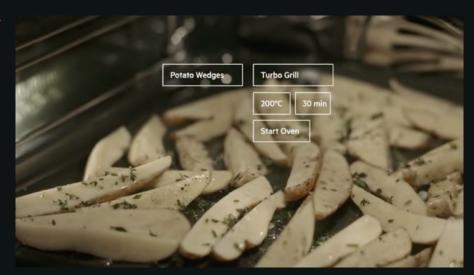



Steamify®


The Steamify® function handles all the steam settings so that you can cook exactly as you normally would.

Simply enter the cooking temperature and the oven automates everything related to the steam, enabling you to enjoy the healthy and flavourfull taste of steam cooking. Access Steamify® through the My AEG Kitchen App.



FOR MAXIMUM FLAVOUR, ADD STEAM

Our range of ovens with steam is one of the best ways to take taste further. It dispenses just the right amount of steam to lock taste and moisture into the food and make vitamins and nutrition stay. It also preserves textures and fibers, giving you more vibrant greens, more tender meat and make leftover bread as good as fresh again.

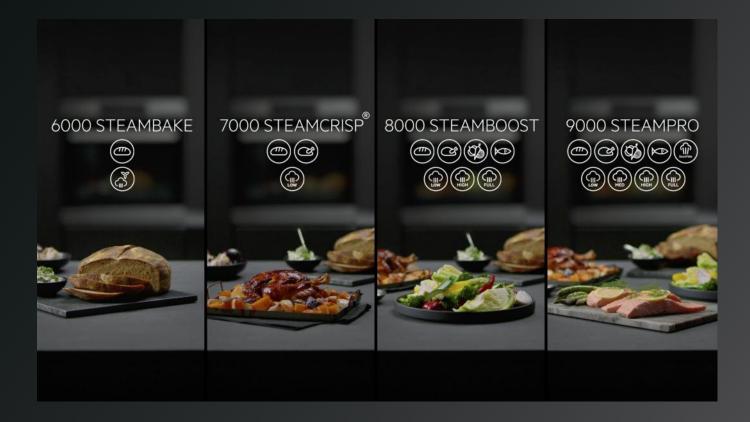


WHY STEAM?

Food stays moist. Prevents food from drying out.

Preservation. Preserves nutrients, vitamins and minerals.

Evenly cooked. Cooks food more evenly from surface to core.


More efficient. Delivers heat more efficiently to the food than dry, hot air, so the temperature can be lower.





SteamPro


SteamPro with SousVide means you can create tastier and healthier dishes. Cook with absolute purity, sealing in all the aromas, taste and nutrients under vacuum, then applying gentle steam heat to cook delicious dishes.





SteamBoost

Turn flavour up to full, whether you are baking, roasting, poaching or steaming with SteamBoost. The right amount of steam locks in the natural moisture to deliver juicy and succulent dishes.





SteamCrisp

By combining steam and traditional heat, food is cooked gently from the outside to the centre, enhancing food taste and achieving better results. Perfect for all your favourite roasting and baking recipes.





SteamBake™

Adds a bit of steam for the right colour and crust, improving all of your baking results.

COOKING ICONS

KEY FEATURES GUIDE



SteamPro

Our SteamPro multifunctional ovens provide you with the SousVide function, a powerful tool that has been used by professional chefs for many years. They also include all of the benefits of our SteamBoost and SteamCrisp models.



SteamBoost

The introduction of steam makes all the difference. Locking in the natural moisture to deliver a whole range of juicy and succulent dishes including meat, fish, casseroles and vegetables – even desserts. Our SteamBoost models have 3 levels of steam (humidity), low, medium and high.



SteamCrisp

By combining steam (to produce low humidity) and traditional heat in the Quarter steam programme, food is cooked gently from the outside to the centre, enhancing food taste and achieving better results. Perfect for cooking the Sunday roast.



SteamBake™

Adds a bit of steam for the right colour and crust, improving all of your baking results.



Steamify®

Mastering precise results with steam has never been easier. Select your desired cooking temperature and Steamify® will automatically add the optimal amount of steam.



Connected

Easily monitor and set your oven programmes with our AEG App. This allows you to adjust cooking programmes, follow step by step recipes, and even allows you to set cooking programmes based on real time food images.



SurroundCook®

Hot air fan that circulates the air more effectively than a conventional oven so that your food gets evenly cooked anywhere in the oven.



SenseCook

Food sensor that adapts to what you are cooking and helps you get the results you are aiming for. Just tell the oven how you want your dish cooked and the oven will let you know once your food has reached the right temperature.



Multifunction

Multifunction ovens have all of the familiar cooking functions, including our extra large hot air fan.



Dual Multifunction

Both oven cavities are multifunctional, which means they have all of the traditional cooking functions including True Fan.



Command Wheel

The Command Wheel gives you an intuitive way to operate all the cooking settings. It swiftly responds to your actions so that you always have control of every step of the cooking process.



ProSight / EXCite Touch Controls

Full-touch electronic control panel – simple to operate and beautifully designed.



Retractable Controls

High quality finish stainless steel retractable knobs.



800w Quartz Grill

Flexible cooking thanks to microwave functions and integrated quartz grill.



CookView

With the CookView camera and connection to the AEG app you can start to visually control and finetune the cooking progress straight from the app.



Pyrolytic

With our Pyrolysis function, this self cleaning oven heats up to 500°C and turns food residue to ash.



Catalytic Liners

The catalytic lining absorbs the grease from cooking and is activated by regular heating to 220°C. The grease residue is oxidised leaving the catalytic surface clean.



XXL

All of our single ovens have an extra large capacity, allowing you to cook on all 5 levels simultaneously.



Telescopic Runners

Allows you to pull the shelves smoothly out of the oven. This enables you to efficiently and safely access the contents of your oven



Fully Programmable

Precise timer that switches off the oven when you want. Ideal for dishes with a long cooking process.



3 Vacuum Settings

Seal your food under a range of air extraction levels, from 50% – 99% efficiency, ensuring that marinades don't leak from the bag and that no unnecessary air enters it.



Non-Vented Installation

Self ventilating microwaves, allows for more flexibility when installing.

FUNCTIONS



SousVide Cooking

SousVide cooking is an old cooking technology used by professional chefs to cook vacuum packed food slowly at a low, accurately controlled temperature.



Full Steam

The SteamBoost oven with Full Steam function makes more of the flavours within your food. Combining all of traditional oven functions with the added benefit of steam.



Humidity High

The function is suitable for cooking delicate dishes like custards, flans, terrines and fish.



Humidity Medium

The function is suitable for cooking stewed and braised meat as well as bread and sweet yeast dough. Due to the combination of steam and heat the meat gets a juicy and tender texture and yeast dough bakes get a crispy and shiny surface.



Humidity Low

The function is suitable for meat, poultry, oven dishes and casseroles. Thanks to the combination of 25% steam and 75% heat, meat gets a tender and juicy texture along with a crusty surface.



True Fan Cooking

Our true fan cooking system gently circulates hot air through the oven cavity. As the oven heats up faster, lower temperatures and shorter cooking times are used to achieve delicious results.



Conventional Cooking

Top and bottom elements heat the oven, providing traditional cooking on one shelf position, which is ideal for baking breads or fruitcakes.



Au Gratin

For dishes such as lasagne or potato gratin.



Bottom Heat

Oven is heated by the bottom element only. Food is gently reheated, ideal for pies and pastries, as it keeps the pastry crisp.



Turbo Grilling

Heat from the top element is circulated by the fan, sealing and crisping the food.



Grilling

Fully controllable powerful grill, ideal for family-sized portions of food.



Steam Assisted Fan Cooking

An improved version of the traditional True Fan cooking, combining steam with an extra large hot air fan.



Pizza Setting

Designed to ensure pastry bases, quiches and pizzas are cooked to your taste.



Moist Fan Baking

Retains moisture within the ovens, thus achieving light fluffy results whilst using the oven in an energy efficient way.



Slow Cooking

Two slow cook options, dependent on the quantity of food being cooked. Low temperature combined with patience will guarantee a good result.



Defrost

Defrost your frozen food gently in half the usual time. Ambient air is quickly circulated inside the oven cavity.



Fast Grilling

Combining grill, fan and bottom heat to efficiently produce delicious dishes. Excellent on semi-processed food such as chips and spring rolls.



Bread Baking

Optimum temperature and environment for baking yeast mixtures. Using radiant heat and steam to bake a variety of loaves to your taste.



Dough Proving

Creates the perfect environment to assist bread baking by proving your yeast mixture correctly.



Eco Roasting

Economical setting for roasting large joints or poultry. Simply select the appropriate cooking time depending on the weight of the food, and the oven automatically switches off once the cooking is complete.



Pvrolvsis

A total self-cleaning function that heats up to 500°C and turns food residue to ash.



Quarter Steam & Heat

25% steam and 75% heat locks in moisture and browns the outside for irresistible flavours.



Microwave & Grill

Combines traditional microwave and grill functions.



Microwave & Oven

Combines traditional microwave and oven functions.



Defrost by Weight

Take the guesswork away and defrost your food by weighing it during the process.



Auto Favourite

The Auto favourite function has 3 pre-set functions, these are Soften Butter, Melt Chocolate and Mug Cake. You can overwrite these with your favourite recipes.



Steam Regeneration

A great alternative to using the microwave, this function gently reheats previously cooked food using steam, without compromising on flavour or texture.

SINGLE OVENS

STEAM MULTIFUNCTION OVENS















Connected Matt Black SteamPro Oven with Command Wheel

BSK993330T

KEY FEATURES















Connected SteamPro Oven with Command Wheel BSK999330M

KEY FEATURES



Connected











Connected

SteamPro

Wheel

SteamPro

Wheel

OVEN FUNCTIONS

SousVide Cooking

Full Steam

Humidity High

Humidity Medium

Humidity Low

True Fan Cooking

Conventional Cooking

(デ) Turbo Grilling

("") Grilling

Bottom Heat

Pizza Setting

(2) Moist Fan Baking

(I°c) Slow Cooking

(XX) Defrost

Au Gratin

Bread Baking

Dough Proving

Steam Regeneration

OVEN FUNCTIONS

SousVide Cooking

Full Steam

Humidity High

Humidity Medium

(Humidity Low

True Fan Cooking

Conventional Cooking

(🖁) Turbo Grilling

(T) Grilling

) Bottom Heat

(a) Pizza Setting

Moist Fan Baking

(I°c) Slow Cooking

(XX) Defrost

(GRATIN) Au Gratin

Bread Baking

Dough Proving

Steam Regeneration

Model Features

Steam cleaning **Enamel liners**

Fully programmable timer TFT display

70 ltr oven capacity Fast heat up Surround cook

Quadruple door glazing

Telescopic runners XXL baking tray

Steam set

Humidity sensor

30°C - 230°C

Appliance/Built-in Dimensions Energy Rating: A++

(HxWxD) in mm: 594 x 595 x 567 / 590 x 560 x 550

Model Features

Steam cleaning **Enamel liners**

Fully programmable timer

TFT display

70 ltr oven capacity

Fast heat up Surround cook Quadruple door glazing

Telescopic runners

XXL baking tray

Steam set

Humidity sensor

30°C - 230°C

Energy Rating: A++

Appliance/Built-in Dimensions (HxWxD) in mm: 594 x 595 x 567 / 590 x 560 x 550







SteamPro Oven with EXCite Touch Controls BSK798380M / BSK792380B

KEY FEATURES





EXCite Touch

Controls







SenseCook SurroundCook®







SteamBoost Oven with ProSight Touch Controls BSK782320M

KEY FEATURES



SteamBoost



Touch Controls





SenseCook SurroundCook®



OVEN FUNCTIONS

3003 VIGE COOKIII

Humidity High

Full Steam

Humidity Medium

Humidity Low

True Fan Cooking

Conventional Cooking

Turbo Grilling

Grilling

Bottom Heat

Pizza Setting

Moist Fan Baking

(Pc) Slow Cooking

>>> Defrost

Au Gratin

Bread Baking

Dough Proving

Steam Regeneration

OVEN FUNCTIONS

Full Steam

Humidity High

Humidity Low

True Fan Cooking

Conventional Cooking

Turbo Grilling

Grilling

Bottom Heat

(a) Pizza Setting

Moist Fan Baking

(I°C) Slow Cooking

Defrost

Bread Baking

Dough Proving

Steam Regeneration

Model Features

Steam cleaning
Enamel liners
Fully programmable timer
White Touch Control Display
70 Itr oven capacity
Fast heat up

Double halogen lighting

Energy Rating: A++

Quadruple door glazing
Telescopic runners

XXL baking tray
XXL meat/grill pan

Steam set

30°C - 230°C

Appliance/Built-in Dimensions (HxWxD) in mm:

594 x 595 x 567 / 590 x 560 x 550

Model FeaturesSteam cleaning

Enamel liners
Fully programmable timer
White Touch Control Display
70 Itr oven capacity
Fast heat up
Double halogen lighting

Two shelves

Quadruple door glazing

2 pairs of telescopic runners

XXL baking tray
XXL meat/grill pan
Steam set

30°C − 230°C

Energy Rating: A+

Appliance/Built-in Dimensions (HxWxD) in mm: 594 × 595 × 567 / 590 × 560 × 550

SINGLE OVENS

STEAM MULITFUNCTION OVENS WITH PYROLYTIC SELF-CLEANING







Connected SteamCrisp Oven with Command Wheel Control

BSK978330M

KEY FEATURES





Connected





SteamCrisp



Wheel











with ProSight Touch Controls







OVEN FUNCTIONS

Quarter Steam and Heat

(2) Steam Regenerating

True Fan Cooking

Conventional Cooking

Turbo Grilling

Grilling

Bottom Heat

(a) Pizza Setting

(2) Moist Fan Baking

(I°C) Slow Cooking

☼ Defrost

Au Gratin

Humidity Low

Bread Baking

Dough Proving

Pyrolysis Pyrolysis

OVEN FUNCTIONS

SteamCrisp Oven

BSK774320M

KEY FEATURES

Quarter Steam and Heat

(Y) True Fan Cooking

Conventional Cooking

(♥) Turbo Grilling

_) Bottom Heat

(T) Grilling

(A) Pizza Setting Moist Fan Baking (XX) Defrost

Bread Baking

Dough Proving

(GRATIN) Au Gratin

(Humidity Low

(Pc) Slow Cooking

(PYRO-LYSIS) Pyrolysis

Steam Regeneration

Model Features

TFT display

Fast heat up

Fully programmable timer

71 ltr oven capacity

Quadruple door glazing Double halogen lighting

Energy Rating: A++

Telescopic runners

XXL baking tray

XXL meat/grill pan

30°C − 300°C

Appliance/Built-in Dimensions

(HxWxD) in mm:

594 x 595 x 567 / 590 x 560 x 550

Model Features

Fully programmable timer White LED display

71 Itr oven capacity

Fast heat up

Double halogen lighting Quadruple door glazing

XXL baking tray

XXL meat/grill pan 30°C - 300°C

Telescopic runners

Touch Control

Energy Rating: A+

Appliance/Built-in Dimensions (HxWxD) in mm:

594 x 595 x 567 / 590 x 560 x 550

PYROLYTIC SELF-CLEANING OVENS













Connected Matt Black Multifunction Oven

BPK948330T

KEY FEATURES





Connected



Multifunction



Command

Wheel





Pyrolytic

BPK948330M

KEY FEATURES



Connected Multifunction Oven with Command Wheel Control





Wheel





Pyrolytic

True Fan Cooking

OVEN FUNCTIONS

Conventional Cooking

Turbo Grilling

Grilling

Bottom Heat

(G) Pizza Setting

Moist Fan Baking

₩ Defrost

(I°c) Slow Cooking



Au Gratin

Bread Baking

Pyrolysis

OVEN FUNCTIONS

Conventional Cooking

(\vec{\varphi}) Turbo Grilling

("") Grilling

Bottom Heat

(a) Pizza Setting

(2) Moist Fan Baking

(Icc) Slow Cooking

True Fan Cooking

Bread Baking

(pc) Defrost

Dough Proving

Au Gratin

PYRO-LYSIS Pyrolysis

Telescopic runners

XXL meat/grill pan

30°C - 300°C

Model Features

Fully programmable timer

TFT display

71 Itr oven capacity

Fast heat up

Double halogen lighting

Telescopic runners

Quadruple door glazing

XXL baking tray

XXL meat/grill pan

30°C − 300°C

Model Features

Fully programmable timer

TFT display

71 ltr oven capacity

Fast heat up

Quadruple door glazing Double halogen lighting

Energy Rating: A++

Appliance/Built-in Dimensions (HxWxD) in mm:

594 x 595 x 567 / 590 x 560 x 550

Energy Rating: A++

Appliance/Built-in Dimensions (HxWxD) in mm:

594 x 595 x 567 / 590 x 560 x 550

SINGLE OVENS

PYROLYTIC SELF-CLEANING OVENS









Multifunction Oven with EXCite Touch Controls BPK748380M / BPK748380B

KEY FEATURES





Multifunction



Touch Controls











SenseCook SurroundCook®







Multifunction Oven with ProSight Touch Controls and Side Hinged Door BPK744L21M

KEY FEATURES







Touch Controls







OVEN FUNCTIONS







Grilling

Bottom Heat

Pizza Setting

(a) Moist Fan Baking

Defrost

(Icc) Slow Cooking

Dough Proving

Au Gratin

Bread Baking

Pyrolysis

OVEN FUNCTIONS

True Fan Cooking

Conventional Cooking

(\vec{\varphi}) Turbo Grilling

Grilling

Bottom Heat

Pizza Setting (a) Moist Fan Baking ₩ Defrost

(Icc) Slow Cooking

Dough Proving

(GRATIN) Au Gratin

Bread Baking

Eco Roasting

Pyrolysis

Model Features

Fully programmable timer White LED display 71 ltr oven capacity Fast heat up Double halogen lighting Quadruple door glazing

Energy Rating: A++

XXL baking tray XXL meat/grill pan 30°C – 300°C Telescopic runners

Appliance/Built-in Dimensions (HxWxD) in mm:

594 x 595 x 567 / 590 x 560 x 550

Model Features

Fully programmable timer White LED display 71 ltr oven capacity Fast heat up Double halogen lighting Quadruple door glazing

XXL baking tray XXL meat/grill pan 30°C - 300°C Telescopic runners

Energy Rating: A+

Appliance/Built-in Dimensions (HxWxD) in mm: 594 x 594 x 568 / 600 x 560 x 550

Also available: BPK744R21M – Right side hinges

PYROLYTIC SELF-CLEANING OVENS WITH STEAMBAKE™













Multifunction Oven with Retractable Controls and Soft Close Door BPK55632PM

KEY FEATURES























Conventional Cooking

Multifunction

Controls

SteamBake™ Multifunction

Retractable SurroundCook® Controls

Befrost

Pyrolysis Pyrolysis

OVEN FUNCTIONS

True Fan Cooking



Pyrolysis



Grilling

Bottom Heat

Pizza Setting

Moist Fan Baking

OVEN FUNCTIONS

Multifunction Oven

BPK355020M

KEY FEATURES

with Retractable Controls

True Fan Cooking

Conventional Cooking

Turbo Grilling

(T) Grilling

Bottom Heat

Pizza Setting

Moist Fan Baking

Model Features

Touch control fully programmable timer

White LED display XXL baking tray 71 ltr oven capacity XXL meat/grill pan 30°C - 300°C Fast heat up Single halogen lighting Telescopic runners

Energy Rating: A+

Quadruple door glazing

Appliance/Built-in Dimensions (HxWxD) in mm:

594 x 595 x 567 / 590 x 560 x 550

Model Features

Fully programmable timer XXL meat/grill pan White LED display 30°C - 300°C 71 ltr oven capacity

Energy Rating: A+

Single halogen lighting

Quadruple door glazing

Appliance/Built-in Dimensions (HxWxD) in mm: 594 x 595 x 567 / 590 x 560 x 550

SINGLE OVEN

CATALYTIC CLEANING OVEN WITH STEAMBAKE™









Multifunction Oven with Retractable Controls

BCK55632XM

KEY FEATURES













Catalytic

Liners

SteamBake™ Multifunction

Controls

SenseCook SurroundCook®

OVEN FUNCTIONS

True Fan Cooking

Pizza Setting



Moist Fan Baking



Defrost





Catalytic Liners



Model Features

Touch control fully programmable timer

White LED display 30°C - 300°C 71 ltr oven capacity Telescopic runners Single halogen lighting Touch buttons on timer Triple door glazing XXL meat/grill pan

Energy Rating: A+

Appliance/Built-in Dimensions (HxWxD) in mm:

594 x 595 x 567 / 590 x 560 x 550



CLAIM UP TO £5000 CASHBACK

Claim up to £500 cashback when you buy 3 or more AEG appliances for your kitchen.

Your purchase needs to include an AEG oven and hob.

OFFER AVAILABLE 01.05.22 - 30.11.22

Terms and conditions apply.

Speak to your AEG Premier Partner Kitchen Studio for more information.

aeg.co.uk/rewards2022H2

DOUBLE OVENS

BUILT-IN







Dual Multifunction Oven with SurroundCook® and ProSight Touch Controls

DCK731110M

KEY FEATURES









ProSight Multifunction Touch Controls

Liners

Catalytic







Dual Multifunction Oven with SurroundCook® and Retractable Controls

DCK431110M

KEY FEATURES







Multifunction



 $SurroundCook ^{\circledast}\\$



Controls



Catalytic

Liners

TOP OVEN FUNCTIONS

True Fan Cooking

Pizza Setting

(♥) Turbo Grilling

(1°c) Slow Cooking

("") Grilling

(XX) Defrost

Bottom Heat

TOP OVEN FUNCTIONS

Conventional Cooking

.) Bottom Heat

(➡) Fast Grilling

Grilling

Top heat

MAIN OVEN FUNCTIONS

Bottom Heat

Pizza Setting

Conventional Cooking

(I°C) Slow Cooking

(XX) Defrost

True Fan Cooking

(T) Grilling

Turbo Grilling

(Y) True Fan Cooking

(Conventional Cooking

MAIN OVEN FUNCTIONS

T) Grilling

Moist Fan Baking

₩ Defrost (D) Pizza Setting

(🖁) Turbo Grilling

.) Bottom Heat

Model Features

Fully programmable timer White LED display 39 ltr top oven capacity 61 ltr bottom oven capacity Single oven lights

4/5 shelf positions XXL baking tray

XXL meat/grill pan Telescopic runners

30°C − 300°C

Model Features

Fully programmable timer White LED display 43 ltr top oven capacity 68 ltr bottom oven capacity Single oven lights

4/5 shelf positions XXL baking tray XXL meat/grill pan 50°C - 275°C

Triple door glazing Energy Rating: A/A

Appliance/Built-in Dimensions (HxWxD) in mm: 888 x 594 x 568 / 875 x 560 x 550 Double door glazing Energy Rating: A/A

Appliance/Built-in Dimensions (HxWxD) in mm:

594 x 595 x 568 / 590 x 560 x 550

BUILT-UNDER







Dual Multifunction Oven with SurroundCook® and ProSight Touch Controls

DUK731110M

KEY FEATURES









Dual Multifunction

Dual SurroundCook

ProSight
Touch Controls

Catalytic Liners

TOP OVEN FUNCTIONS

True Fan Cooking

Pizza Setting

Turbo Grilling

(J°C) Slow Cooking

Grilling

Defrost

O 5

Bottom Heat

MAIN OVEN FUNCTIONS

Bottom Heat

Pizza Setting

Conventional Cooking

(I°C) Slow Cooking

Defrost

True Fan Cooking

Grilling

Turbo Grilling

Model Features

Fully programmable timer 4/4 shelf positions
ProSight Touch Controls XXL baking tray
39 ltr top oven capacity XXL meat/grill pan
45 ltr bottom oven capacity 50°C - 275°C

Single oven lights
Triple door glazing

Energy Rating: A/A Appliance/Built-in Dimensions

(HxWxD) in mm: 715 x 594 x 568 / 720 x 600 x 550

THE COMPACT RANGE THAT FITS INTO YOUR LIFESTYLE

With our widest range of high performance appliances, you can mix and match our ovens and compacts – the way you want – and it all aligns beautifully with a single, stylish design.

The Compact range also fits perfectly with our full size appliances.



Square Alignment Compacts

Create your ideal kitchen in a combination to suit your needs. By grouping your compact appliances in a cluster, a column or a sleek horizontal run you create your own, individual look.





Horizontal Alignment Oven and Compacts

Compact Appliance, Warming Drawer or Vacuum Sealer and an AEG Single Oven.



Horizontal Alignment Compacts

Two Compact Appliances with two Warming Drawers or Vacuum Sealers.





Vertical Alignment Oven and Compact

Compact above an AEG Single Oven.

THE PERFECT DESIGN ALIGNMENT

Our oven and compact range offer the perfect design alignment options, both horizontally and vertically.



For matching design alignment including user interface, pair appliances with the same controls using the below chart.

	(5)	()1)	(10)	(9)
Product Description	Command Wheel Control	EXC ite Touch Controls	ProSight Touch Controls	Retractable Rotary Controls
Single Multifunction SteamBake™ Oven with Catalytic Cleaning				BCK55632XM
Single Multifunction Oven with Pyrolytic Self-Cleaning	BPK948330M	BPK748380M		BPK55632PM
Single Multifunction Oven with Pyrolytic Self-Cleaning and Side Hinged Door			BPK744L21M BPK744R21M	
Single Multifunction SteamCrisp Oven with Pyrolytic Self-Cleaning	BSK978830M		BSK774320M	
Single Multifunction SteamBoost Oven			BSK782320M	
Single Multifunction SteamPro Oven	BSK999330M	BSK798380M		
Compact Multifunction Oven with Microwave	KMK968000M	KMK768080M		KMK565000M
Compact Microwave with Grill				KMK525800M
Compact Coffee Machine	KKK994500M		KKK884500M	
14cm Warming Drawer	KDK911424M	KDK911424M	KDK911424M	KDK911424M



Command Wheel Controls

The Command Wheel gives you an intuitive way to operate all the cooking settings. It swiftly responds to your actions so that you always have control of every step of the cooking process.



(Inj)

EXCite Touch Controls

Intuitive touch display control panel gives you access to a wide variety of oven functions to suit every dish.





ProSight Touch Controls

LCD display with electronic touch control panel – simple to operate and beautifully designed.



Retractable Rotary Controls



High quality finish stainless steel retractable knobs.



COMPACTS

MULTIFUNCTION OVENS WITH MICROWAVE













Connected Matt Black Oven with Command Wheel Control KMK968000T

KEY FEATURES





Multifunction







Command SurroundCook®

KMK968000M

Connected Multifunction Oven

with Command Wheel Control



KEY FEATURES









Wheel

Multifunction SurroundCook® Wheel

OVEN FUNCTIONS





Turbo Grilling

Grilling

Bottom Heat

Pizza Setting

Fast Grilling

₩ Defrost

Microwave function

Bread Baking

Au Gratin

Dough Proving

Eco roasting

Slow Cooking

Microwave & Oven

OVEN FUNCTIONS

True Fan Cooking

Conventional Cooking

Turbo Grilling

Grilling

Bottom Heat

Pizza Setting

(Ic) Slow Cooking

₩ Defrost

(GRATIN) Au Gratin

Bread Baking

Microwave Function

Microwave & Oven

Model Features

Fully programmable timer White LED display 43 ltr oven capacity Single halogen lighting

> **Built-in Dimensions** (HxWxD) in mm: 450 x 560 x 550

XXL baking tray

XXL meat/grill pan 30°C − 230°C

1000W microwave

Glass microwave base plate

Model Features

Fully programmable timer TFT display 43 ltr oven capacity Single halogen lighting Triple door glazing

Appliance Dimensions (HxWxD) in mm: 455 x 595 x 567

XXL baking tray XXL meat/grill pan 30°C − 230°C 1000W microwave

Glass microwave base plate

Built-in Dimensions (HxWxD) in mm: 450 x 560 x 550

Appliance Dimensions (HxWxD) in mm:

455 x 595 x 567

Triple door glazing







Multifunction Oven with EXCite Touch Controls KMK768080M / KMK768080B

KEY FEATURES



Multifunction







Wheel

SurroundCook®







Microwave function

Microwave & Oven

Multifunction Oven with Retractable Controls KMK565000M

KEY FEATURES



Multifunction





Controls



OVEN FUNCTIONS

True Fan Cooking

Conventional Cooking

Turbo Grilling

Grilling

Bottom Heat

Pizza Setting

(Defrost

Microwave Function

Bread Baking

Au Gratin

Dough Proving

Slow Cooking

Microwave & Oven

OVEN FUNCTIONS

True Fan Cooking

Conventional Cooking

Turbo Grilling

Grilling

_) Bottom Heat

Pizza Setting

(XX) Defrost

Fast Grilling

Model Features

Fully programmable timer White LED display 43 ltr oven capacity Single halogen lighting Quadruple door glazing

Appliance Dimensions 455 x 595 x 567

XXL baking tray 30°C − 230°C Touch buttons on timer

1000W microwave

Glass microwave base plate

(HxWxD) in mm:

Built-in Dimensions (HxWxD) in mm: 450 x 560 x 550

Model Features

Fully programmable timer White LED display 43 ltr oven capacity Single halogen lighting

Triple door glazing

Appliance Dimensions (HxWxD) in mm: 455 x 595 x 567

Built-in Dimensions (HxWxD) in mm: 450 x 560 x 550

Glass microwave base plate

XXL baking tray

30°C − 230°C

XXL meat/grill pan

1000W microwave

COMPACTS

MICROWAVE WITH GRILL







Microwave with Retractable Controls KMK525800M

KEY FEATURES





Controls

OVEN FUNCTIONS



Microwave & Grill



Grilling

Model Features

30°C - 230°C Fully programmable timer White LED display 1000W microwave 42 ltr oven capacity Large glass turntable Single halogen lighting 1200watt grill

Appliance Dimensions (HxWxD) in mm:

Triple door glazing

455 x 595 x 567

Built-in Dimensions (HxWxD) in mm: 450 x 560 x 550



COMPACTS

COFFEE MACHINES













Matt Black Coffee Machine with Command Wheel Control

KKK994500T

FEATURES



Wheel





Italian Coffee





Automatic



Uses Fresh Coffee Beans

Coffee Machine with Command Wheel Control KKK994500M

FEATURES











Command Wheel

Authentic Italian Coffee Automatic

Uses Fresh Coffee Beans

OVEN FUNCTIONS

Tea Water Espresso Cappuccino Latte Macchiato

Cappuccino Plus Long Coffee

Caffè Latte Warm Milk

Caffè Macchiato Ristretto

Espresso Lungo Steamer

Espresso Macchiato Jug Function

Flat White Two Cups

OVEN FUNCTIONS

Tea Water Espresso

Cappuccino Latte Macchiato

Cappuccino Plus Long Coffee

Caffè Latte Warm Milk

Caffè Macchiato Ristretto

Espresso Lungo Steamer

Espresso Macchiato Jug Function

Flat White Two Cups

Model Features

Coffee jug Water softener Thermal milk container 2.4 ltr water tank Descaler 400 gr grinder capacity Quadruple LED lighting Cleaning brush

Coffee powder spoon

Telescopic runners + soft closing

Appliance Dimensions Built-in Dimensions (HxWxD) in mm: (HxWxD) in mm: 455 x 595 x 361 450 x 560 x 550

Model Features

Coffee jug Water softener Thermal milk container 2.4 ltr water tank Descaler 400 gr grinder capacity Quadruple LED lighting Cleaning brush Coffee powder spoon

Appliance Dimensions (HxWxD) in mm:

Telescopic runners + soft closing

455 x 595 x 361

Built-in Dimensions (HxWxD) in mm: 450 x 560 x 550







Coffee Machine with ProSight Touch Controls

KKK884500M

FEATURES









ProSight Authentic Touch Controls Italian Coffee

Fully Automatic

Uses Fresh Coffee Beans

OVEN FUNCTIONS

Espresso

Cappuccino

Tea Water

Two Cups

Jug Function

Steamer

Model Features

Coffee jug

Milk container

Descaler

1.8 ltr water tank

200 gr grinder capacity

Dual LED lighting

Appliance Dimensions (HxWxD) in mm:

455 x 595 x 361

Built-in Dimensions (HxWxD) in mm: 450 x 560 x 550

COMPACTS

WARMING DRAWERS







29cm Black Glass & Stainless Steel KDK912924M

KEY FEATURES









30-80°C

30-80°C Settings Temp range







29cm Stainless Steel KDE912924M

KEY FEATURES



FUNCTIONS





12 Place Settings

Cups and Glass Warming (45°C)

30-80°C Temp range

FUNCTIONS

Cups and Glass Warming (45°C)

Plate Warming (60°C)

Food Reheating (60°C - 80°C Max) Keep Warm (70°C)

Dough Proving (30°C)

Defrosting (30°C Max)

Model Features

Variable temperature control On/off LED

Anti-slip mat

Rotary control knob

Heating element

Fan air circulation

Model Features

Variable temperature control On/off LED

Plate Warming (60°C)

Food Reheating

(60°C - 80°C Max)

Anti-slip mat

Defrosting (30°C Max)

Dough Proving (30°C)

Keep Warm (70°C)

Rotary control knob

Heating element

Fan air circulation

Appliance Dimensions (HxWxD) in mm:

295 x 595 x 535

Built-in Dimensions (HxWxD) in mm: 295 x 560 x 550

295 x 595 x 535

Appliance Dimensions (HxWxD) in mm:

Built-in Dimensions (HxWxD) in mm: 295 x 560 x 550











14cm Matt Black KDK911424T

KEY FEATURES







6 Place Settings

30-80°C

30-80°C Temp range

14cm Black Glass & Stainless Steel KDK911424M / KDE911424B

KEY FEATURES







Plate Warming (60°C)

FUNCTIONS

6 Place Settings

Cups and Glass Warming (45°C)

30-80°C Temp range

FUNCTIONS

Cups and Glass Warming (40°C)

Dough Proving (30°C)

Plate Warming (60°C)

Keep Warm (70°C)

Food Reheating

(60°C - 80°C Max)

Defrosting (30°C Max)

Model Features

Variable temperature control On/off LED

Anti-slip mat

Rotary control knob

Heating element

Fan air circulation

Model Features

Food Reheating

(60°C - 80°C Max)

Variable temperature control

On/off LED

Anti-slip mat

Rotary control knob

Dough Proving (30°C)

Defrosting (30°C Max)

Keep Warm (70°C)

Heating element Fan air circulation

Appliance Dimensions (HxWxD) in mm:

140 x 595 x 535

Built-in Dimensions (HxWxD) in mm: 141 x 560 x 550

(HxWxD) in mm: 140 x 595 x 535

Built-in Dimensions Appliance Dimensions (HxWxD) in mm: 141 x 560 x 550

COMPACTS

WARMING DRAWERS

VACUUM SEALERS



14cm Stainless Steel KDE911424M

KEY FEATURES







6 Place Settings



30-80°C Temp range







14cm Matt Black KDK911423T

KEY FEATURES





Controls





3 Vacuum

Settings

FUNCTIONS

Cups and Glass Warming (45°C)

Plate Warming (60°C)

Food Reheating

(60°C - 80°C Max)

Dough Proving (30°C)

Keep Warm (70°C)

Defrosting (30°C Max)

FUNCTIONS

Marinating/Infusion

Med. Vacuum setting

Max. Vacuum setting

Min. Vacuum setting

Sealing time displayed

Model Features

Variable temperature control On/off LED

Appliance Dimensions

(HxWxD) in mm:

140 x 595 x 535

Anti-slip mat

Rotary control knob Heating element

Fan air circulation

Built-in Dimensions (HxWxD) in mm:

141 x 560 x 550

Appliance Dimensions (HxWxD) in mm:

131 x 595 x 510

Built-in Dimensions (HxWxD) in mm: 139 x 560 x 550



14cm Black Glass & Stainless Steel/14cm Black Glass KDK911423M / KDE911423B

KEY FEATURES













Touch Controls

3 Vacuum Settings

FUNCTIONS

Marinating/Infusion

Min. Vacuum setting

Max. Vacuum setting

Sealing time displayed

Med. Vacuum setting

Appliance Dimensions (HxWxD) in mm:

131 x 595 x 510

Built-in Dimensions (HxWxD) in mm:

139 x 560 x 550

BUILT-IN MICROWAVE OVENS

AEG microwave ovens have an intuitive touchscreen control panel that features a simple wipeclean surface. The touch sensitive panel lets you change functions and timings in seconds too.





45cm High 26 Litre, with Touch Control MBE2658SEM

KEY FEATURES



Microwave





Control

Installation

FUNCTIONS



Microwave



(Child Lock





Additional Features

26 ltr capacity 32.5cm turntable LED lighting

White LED display 90min timer

Colour: Stainless Steel fascia panel

Appliance Dimensions (HxWxD) in mm: 459 x 596 x 404

Built-in Dimensions (HxWxD) in mm: 450 x 562 x 500







60cm Wide 17 Litre, with Touch Control MBB1756SEM

KEY FEATURES



800w

Microwave





Control



Non-Vented Installation







Child Lock

50cm Wide 17 Litre, with Touch Control MBB1755SEM

KEY FEATURES







800w Microwave

FUNCTIONS

Microwave


Control

Installation

FUNCTIONS









Additional Features

17 Itr Capacity 27cm turntable White LED display 90min timer

LED lighting

Colour: Stainless Steel fascia panel

Appliance Dimensions (HxWxD) in mm: 371 x 594 x 316

Built-in Dimensions (HxWxD) in mm: 360 x 562 x 300

Auto Favourite **Additional Features**

⇔ Defrost by Weight

17 Itr Capacity White LED display 27cm turntable 90min timer

LED lighting

Colour: Stainless Steel fascia panel

Appliance Dimensions Built-in Dimensions (HxWxD) in mm: (HxWxD) in mm: 371 x 494 x 316 360 x 462 x 300

> All AEG microwave ovens can be installed in all cabinetry, whether it be non-ventilated or ventilated kitchen cabinets, making them perfect for kitchen upgrades or replacements.

BLACKLINE RANGE







Multifunction SteamPro Oven with EXCite Touch Controls

BSK792380B

KEY FEATURES









SenseCook SurroundCook®







Multifunction Pyrolytic Self Cleaning Oven with EXCite Touch Controls

BPK748380B

KEY FEATURES



Multifunction









EXCite SenseCook SurroundCook® Touch Controls

OVEN FUNCTIONS

Full Steam

Humidity High

Humidity Low

Humidity Medium

True Fan Cooking

SousVide Cooking









(XX) Defrost

Au Gratin

Conventional Cooking Bread Baking

(🖁) Turbo Grilling **Dough Proving**

OVEN FUNCTIONS

True Fan Cooking

Conventional Cooking

(🖁) Turbo Grilling

‴)Grilling

Bottom Heat

(G) Pizza Setting

Moist Fan Baking

(Defrost

(Ic) Slow Cooking



Bread Baking

Dough Proving

(PYRO-LYSIS) Pyrolysis

Model Features

(Grilling

Steam cleaning **Enamel liners** Fully programmable timer White Touch Control Display 70 ltr oven capacity Fast heat up

Double halogen lighting Quadruple door glazing Telescopic runners XXL meat/grill pan Steam set 30°C - 230°C

Appliance/Built-in Dimensions (HxWxD) in mm: 594 x 595 x 567 / 590 x 560 x 550

Model Features

Fully programmable timer White LED display 71 Itr oven capacity Fast heat up Double halogen lighting Quadruple door glazing

Energy Rating: A++

XXL meat/grill pan 30°C - 300°C Telescopic runners

Appliance/Built-in Dimensions (HxWxD) in mm:

594 x 595 x 567 / 590 x 560 x 550

Energy Rating: A++







Multifunction Compact Oven with Microwave

KMK768080B

KEY FEATURES









Multifunction Microwave

EXCite SurroundCook® Touch Controls

OVEN FUNCTIONS

True Fan Cooking

(GRATIN) Au Gratin

Conventional Cooking

Dough Proving

Turbo Grilling

Dough Proving

Grilling

(I'c) Slow Cooking

Bottom Heat

Microwave & Oven

Pizza Setting

> Defrost

Microwave function

Bread Baking

Model Features

Fully programmable timer

30°C - 230°C

White LED display

1000W microwave

43 ltr oven capacity

Single halogen lighting Triple door glazing

Glass microwave base plate

XXL meat/grill pan Energy Rating: -

Appliance/Built-in Dimensions (HxWxD) in mm:

455 x 595 x 567 / 450 x 560 x 550

BLACKLINE RANGE













14cm Warming Drawer KDE911424B

KEY FEATURES







30-80°C

30-80°C Settings Temp Range

14cm Vacuum Sealer KDE911423B

KEY FEATURES











ProSight White LEDs **Touch Controls**

3 Vacuum SurroundCook® Settings

OVEN FUNCTIONS

Cups and Glass Warming (40°C)

Food Warming (80°C Max)

Plate Warming (60°C)

Defrosting (30°C Max)

OVEN FUNCTIONS

Marinating/Infusion

Max. Vacuum Setting

Sealing Time Displayed

Min. Vacuum Setting

Med. Vacuum Setting

Model Features

Variable temperature control On/off LED

Appliance Dimensions

(HxWxD) in mm:

131 x 595 x 500

Anti-slip mat

Rotary control knob Heating element Fan air circulation

Built-in Dimensions (HxWxD) in mm: 139 x 560 x 550

Appliance Dimensions (HxWxD) in mm: 131 x 595 x 500

Built-in Dimensions (HxWxD) in mm: 139 x 560 x 550



WHY LIMIT YOUR EXPECTATIONS?

At AEG we design our appliances to meet the diverse needs of the most ambitious chefs. Why limit your roasting to Sundays? What about a crisp, turnip salad on meat-free Monday, or succulent, sustainable haddock on fishy Friday? With AEG technology you can be adventurous and sustainable, with absolutely no compromise to taste.

CHALLENGE THE EXPECTED

At AEG we believe that a hob should look as good as it performs. Which is why all our induction hobs are designed not just to bring out the best in your cooking, but also to give you the flexibility you need while cooking and to look fantastic in your kitchen.

IN THIS SECTION

Induction Hobs

Ceramic Hob

Gas Hobs

Mixed Fuel Hob

Modular Hob


eXTractor Hobs





TAKE THE GUESSWORK OUT OF COOKING

Why guess when you can be precise about each degree with the SensePro® hob. The wireless food sensor measures inner temperature and communicates heat adjustments to the hob. So you can achieve perfect core results.

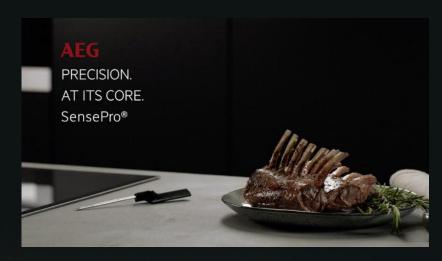







TotalFlex

The TotalFlex hob automatically detects pots and pans of various shapes and sizes, and creates a dedicated cooking zone for them. Offering you the freedom to move cookware almost anywhere on the glass surface.





Hob2Hood

The AEG Hob2Hood adapts to your cooking to keep your kitchen free of steam and vapours automatically.





Slim Installation

The slim, space-saving design embeds into worktops as shallow as 12mm, even with a drawer below.

HOB ICONS

KEY FEATURES GUIDE



ActiveTouch

The user interface is not visible until a pan is placed on the hob. The user interface contains DirekTouch for instant heat control with one touch, minute minder and auto bridge.



SenseFry®

Use the intelligent touchscreen on the SenseFry® induction hob to select the food and desired result. Rare, medium or well-done.



Touch Control

Efficient touch controls enable you to set the hob's heat level precisely, while its flat surface is easy to clean.



TFT Touch Display

A single, full colour touchscreen provides complete control over the hob. Monitor live feedback for each zone and adjust the settings accordingly.



DirekTouch Slider

This hob's direct-access heat controls enable you to switch directly to exactly the right temperature with one touch. Simply touch the correct level on the slide control.



SenseBoil™

A sensor actively monitors the progress of boiling water and automatically reduces to a simmer once boiled, keeping it ready for you to add your ingredients.



SensePro®

The most advanced induction hob with sensor technology, equipped with a wireless food probe that enables precision cooking.



MaxiSense®

The MaxiSense® induction hob has self-sizing cooking zones. Each zone detects the size and shape of the pan you're using, however large or small.



Single Bridge

Two zones can be paired at the touch of a button, providing a single bridge for cooking. By automatically aligning to share both temperature and time settings, it's optimised for using large pots and pans at once.



FlexiBridge

A multi-purpose zone that allows you to customize your own cooking area, combining up to 4 segments with a consistent and even heat distribution.



Double bridge

Two zones can be paired at the touch of a button, providing a single bridge for cooking. It's optimised for using large pots and pans by automatically aligning to share both temperature and time settings.



TotalFlex

The TotalFlex hob automatically detects pots and pans of various shapes and sizes, and creates a dedicated cooking zone for them. Offering you the freedom to move cookware almost anywhere on the glass surface.



Hob2Hood

Hob2Hood automatically turns on your cooker hood and lights when you start using the hob. The cooker hood will adjust according to the cooking levels on the induction zones.



Pure Black Design

Unique hob with pure black design. The hob controls and cooking zones are visible only when needed. When not in use, the surface is clean black, nothing to disturb the kitchen design.



Cast Iron Supports

Cast iron pan supports provide a robust and durable cooking support with professional design. Safe, long lasting and easy to clean.



Extendable Zone

Extendable zone, optimised for cooking with a wide range of pot sizes.



Slim Installation

AEG induction hobs have the slimmest platform on the market, allowing a worktop as thin as 28mm with an oven beneath the hob.



Easy Installation

Our Optifix™ spring system is self-installing and self-centering. Simply place the hob into your cut out.

KEY FEATURES GUIDE



Step Power Controls

The flame can be precisely set in 9 different levels to deliver reliable and consistent heat, every time. For cooking without guesswork.



Easy Clean

Because the surface around the pans stays cool as you cook, you can get rid of spills as you go along. Nothing gets burnt on and there's nowhere for dirt to hide.



Minute Minder

Perfect cooking results guaranteed by setting the cooking time length and the acoustic signal lets you know it has finished.



Auto Ignition

Total control of the ignition through a single-handed operation of turning the knob to automatically light the hob.



PowerSlide

From boiling to simmering to keeping warm. When you need repeated quick heat changes to create a dish, simply slide your pan from heat to heat.



Rotary

Classic rotary control knobs.

FUNCTIONS



Cook Assist

An innovative assisted cooking function. Select the dish and the desired result – rare, medium, well-done – to ensure consistent frying.



Count-Up Timer

Set a reminder or use the count-up timer to keep in control of your cooking.



Minute Minder

Each induction cooking zone has an independent 99 minute timer. The timer will switch the zone off after the time has elapsed.



Eco Timer

Energy saving timer that switches off the zone and uses residual heat to complete the last few minutes of cooking.



Zone Booster

Power booster function to reach high temperatures extra fast.



AutoMax

The hob will apply full output of heat at the beginning, before automatically dropping to the required setting.



SousVide Cooking

Cook to perfection with SousVide, a professional approach to cooking. Applies low temperature and stable temperature to vacuum packed food.



Pan Detection

The user interface is not visible until a pan is placed on the hob.



Auto Off

Safety mechanism that turns off the hob after a given time, depending on the selected heat setting.



Melting

A gentle melting function, perfect for chocolate or butter.



Burners

Number of burners.



Wok burner

Extra large burner designed for a large wok.



Stop & Go

A function that reduces all zones in operation to a 'keep warm' setting.



TripleZone

Triple extendable zone, optimized for cooking with a wide range of pot sizes.



Pause

A function that reduces all zones in operation to a 'keep warm' setting. Available with our new models.

INDUCTION HOBS







80cm SensePro® with TFT Touch Control Display and FlexiBridge IAE84881FB

KEY FEATURES





TFT Touch

Control Display





FlexiBridge



Installation





MaxiSense[®]













FUNCTIONS

Cook Assist

(C) Count Up Timer

Minute Minder

Eco Timer

Zone Booster

Stop & Go

Auto Off

(MELT-) Melting

SenseFry® assistance

SousVide

Additional Features

Residual heat indicators Child lock

Red LEDs

Bevelled 4 sides

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 44 x 780 x 520

Built-in Dimensions (HxW) in mm: 750 x 490

Electricity loading 7350W

Food probe

80cm TotalFlex with ActiveTouch, 6 Cooking Zones and Hob2Hood IKK86681FB

KEY FEATURES









ActiveTouch

Stop & Go

Slim Installation

Zones **FUNCTIONS**

Pan Detection

(C) Count Up Timer

Minute Minder

Eco Timer

Zone Booster

Additional Features

Residual heat indicators Red and White LEDs Child lock Bevelled 4 sides

Sound off Electricity loading 7350W

Acoustic Signal

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 44 x 780 x 520

Built-in Dimensions (HxW) in mm: 750 x 490







80cm SenseFry® with TFT Touch Control Display and FlexiBridge IAE84851FB

KEY FEATURES







TFT Touch

Control Display





Installation







5 Cooking







Bridge





FUNCTIONS















(全) Hob2Hood



Additional Features

Residual heat indicators

Child lock

Red LEDs

Bevelled 4 sides

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 44 x 780 x 520

Built-in Dimensions (HxW) in mm: 750 x 490

Electricity loading 7350W

80cm 5 Zone MaxiSense® with ActiveTouch and Double Bridge Zone

KEY FEATURES

IKE85651FB



Zones









FUNCTIONS

Pan Detection

Stop & Go

(do) Auto Off

(C) Count Up Timer

Minute Minder

Eco Timer

Zone Booster

Additional Features

Residual heat indicators

Child lock

Red and White LEDs

Bevelled 4 sides

Appliance Dimensions

Built-in Dimensions (HxW) in mm: 780 x 490

Electricity loading 7350W

Energy Rating: N/A

(HxWxD) in mm: 44 x 810 x 520

INDUCTION HOBS







80cm PURE with DirekTouch

IPE84531FB

KEY FEATURES



Design



DirekTouch

Slider





MaxiSense®





Slim Installation







80cm SenseBoil® with DirekTouch and Single Bridge Zone IAE84421FB

KEY FEATURES



FUNCTIONS

(A) AutoMax

(U) Count Up Timer

Minute Minder



Slider



Bridge



Slim

Installation

Zone Booster

(STOP) Stop & Go

(do) Auto Off



Hob2Hood



FUNCTIONS

(A) AutoMax

Pan Detection

(III) Count Up Timer

Minute Minder

Eco Timer

Zone Booster

Stop & Go

(do) Auto Off

Additional Features

Residual heat indicators

Child lock Red LEDs Bevelled 4 sides

Electricity loading 7350W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 44 x 780 x 520

Built-in Dimensions (HxW) in mm: 750 x 490

Additional Features

Eco Timer

Residual heat indicators

Child lock Red LEDs Bevelled 4 sides

Electricity loading 7350W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 44 x 780 x 520

Built-in Dimensions (HxW) in mm: 750 x 490







80cm 5 Zone MaxiSense® with DirekTouch

IKE85751FB **KEY FEATURES**







DirekTouch



Slider

Slim Installation



Hob2Hood



Double Bridge



80cm SenseBoil® with DirekTouch IAE84411FB

KEY FEATURES



SenseBoil™





Slider



Slim Hob2Hood Installation



Zone Booster

Stop & Go

(b) Auto Off

Zones **FUNCTIONS**

(A) AutoMax











ZONE Zone Booster

(II) Pause



Additional Features

Residual heat indicators

Child lock

Red LEDs

Bevelled 4 sides Electricity loading 7350W

Pan detection

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm:

44 x 780 x 520

Built-in Dimensions (HxW) in mm:

750 x 490

FUNCTIONS

(A) AutoMax

Count Up Timer

Minute Minder

Eco Timer

Additional Features

Residual heat indicators Child lock

Red and White LEDs

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm:

44 x 810 x 520

Bevelled 4 sides

Electricity loading 7350W

Built-in Dimensions (HxW) in mm:





INDUCTION HOBS







80cm MaxiSense® with DirekTouch

IKB84401FB

KEY FEATURES







Slider





Installation

Hob2Hood



60cm PURE with DirekTouch and Double Bridge Zone IPE64551FB

KEY FEATURES



Pure Black

Design



Slider



Bridge







FUNCTIONS

(A) AutoMax

Zone Booster

Count Up Timer

Stop & Go

Minute Minder

(b) Auto Off

Eco Timer

Additional Features

Residual heat indicators

Child lock

Red LEDs

Bevelled 4 sides

Electricity loading 7350W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm:

44 x 910 x 410

Built-in Dimensions (HxW) in mm:

750 x 490

FUNCTIONS

(A) AutoMax

(U) Count Up Timer

Minute Minder

Eco Timer

Zone Booster

Stop & Go

(b) Auto Off

Additional Features

Residual heat indicators

Child lock Red LEDs Bevelled 4 sides

Electricity loading 7350W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm:

44 x 590 x 520

Built-in Dimensions (HxW) in mm:







60cm MaxiSense® with DirekTouch and Double Bridge Zone IKE64450FB

KEY FEATURES







Slider

Double Bridge



Slim Installation







60cm SenseBoil™ with DirekTouch and Single Bridge Zone IAE64421FB

KEY FEATURES



SenseBoil™

FUNCTIONS





Bridge







FUNCTIONS

AutoMax

ZONE Zone Booster



Stop & Go



do Auto Off

Bevelled edge



Additional Features

Residual heat indicators
Child lock

Electricity loading 7350W

Red LEDs

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: $46 \times 590 \times 520$

Built-in Dimensions (HxW) in mm: 560 x 490 © Count Up Timer

(A) AutoMax

Minute Minder

Eco Timer

Stop & Go

Auto Off

Zone Booster

(do) Aut

Installation

Additional Features

Residual heat indicators

Child lock

Red and White LEDs

Steel frame

Electricity loading 7350W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm:

44 x 590 x 520

Built-in Dimensions (HxW) in mm:

INDUCTION HOBS







60cm SenseBoil™ with DirekTouch

IAE64411FB

KEY FEATURES



SenseBoil™ DirekTouch



Slider

Slim Installation



Hob2Hood



MaxiSense[®]



60cm with DirekTouch IKB64401FB

KEY FEATURES



Slider

DirekTouch Slim



Hob2Hood Installation



4 Cooking Zones

FUNCTIONS

(A) AutoMax

Zone Booster

Count Up Timer

Stop & Go

Minute Minder

(b) Auto Off

Eco Timer

Additional Features

Residual heat indicators

Child lock

Bevelled 4 sides

Electricity loading 7350W

Red LEDs

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm:

44 x 590 x 520

Built-in Dimensions (HxW) in mm:

560 x 490

FUNCTIONS

(A) AutoMax

(U) Count Up Timer

Minute Minder

Eco Timer

Zone Booster

(STOP) Stop & Go

(b) Auto Off

Additional Features

Residual heat indicators

Child lock Red LEDs Bevelled 4 sides

Electricity loading 7350W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm:

44 x 590 x 520

Built-in Dimensions (HxW) in mm:







60cm Plug and Play with Touch Control

ILB64334CB

KEY FEATURES







4 Cooking

Zones

Hob2Hood



Slim Installation







90cm MaxiSense® with DirekTouch and Double Bridge IKE95751FB

KEY FEATURES



MaxiSense®



Slider



Bridge



Installation



PowerSlide



FUNCTIONS

(A) AutoMax

Zone Booster

Count Up Timer

Stop & Go

Minute Minder

(do) Auto Off

Eco Timer

Additional Features

Residual heat indicators Frameless Child lock 13 amp plug Red LEDs Electricity loading 7350W

Energy Rating: N/A

Appliance Dimensions Built-in Dimensions (HxWxD) in mm: (HxW) in mm: 44 x 590 x 520 560 x 490

FUNCTIONS

(A) AutoMax

Count Up Timer

Minute Minder

(II) Pause (b) Auto Off

Zone Booster

Eco Timer

Additional Features

Residual heat indicators Bevelled 4 sides Child lock Electricity loading 7350W Red LEDs Pot detection

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 44 x 910 x 520

Built-in Dimensions (HxW) in mm: 880 x 490

INDUCTION HOB

CERAMIC HOB











90cm Slim Depth MaxiSense® with DirekTouch

IKK93431FB

KEY FEATURES



MaxiSense®



Slider



Installation



3 Cooking Zones

60cm with Touch Control HK634060XB

KEY FEATURES







Touch Control DoubleZone

Extendable Zone

FUNCTIONS

(A) AutoMax

Zone Booster

Count Up Timer

Stop & Go

Minute Minder

(b) Auto Off

Eco Timer

FUNCTIONS

(A) AutoMax

Stop & Go

(U) Count Up Timer Minute Minder

(do) Auto Off

Eco Timer

Additional Features

Residual heat indicators

Bevelled 4 sides

Electricity loading 6900W

Child lock

Additional Features

Residual heat indicators

Energy Rating: N/A

Appliance Dimensions

Steel frame

Child lock Red LEDs Electricity loading 7000W

Red LEDs

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 44 x 910 x 410

Built-in Dimensions (HxW) in mm: 880 x 380

(HxWxD) in mm: 38 x 576 x 516

Built-in Dimensions (HxW) in mm: 560 x 490



GAS COOKING WITH ABSOLUTE ASSURANCE




TouchSure Hob

The advanced TouchSure hob from AEG comes with a range of reassuring safety features that provide absolute confidence in – and absolute command over – gas cooking. It's a traditional method harnessed with our responsive technology, instilling confidence to turn up the heat.





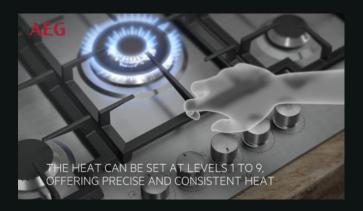



StepPower Controls

Thanks to StepPower the flame can be precisely set in 9 different levels to deliver reliable and consistent heat, every time. For cooking without guesswork.





StepPower with LED

LED lights with StepPower let you see the status of the hob at a glance. And residual heat indication shows whether pan supports are still hot after use.





Hob2Hood

The AEG Hob2Hood adapts to your cooking to keep your kitchen free of steam and vapours without you even having to touch it.

GAS HOBS









 $0 \ 0 \ 0 \ 0$

with StepPower LED Rotary Controls





90cm TouchSure Gas on Glass with Touch Control HVB95450IB

KEY FEATURES















Indicators



Hob2Hood



Minute

Minder



Supports



FUNCTIONS

Touch Control Hob2Hood

Minute Minder

Stop & Go

Cast Iron Pan Auto Ignition Supports

StepPower Controls

FUNCTIONS


Wok Burner

90cm Gas on Glass

HKB95450NB

KEY FEATURES

(A) 1 Aux. Burner



Additional Features

3 Semi-rapid Burners

Wok Burner

Thermocouple

Child lock

Residual heat indicators

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 40 x 890 x 510

Built-in Dimensions (HxW) in mm: 850 x 490

(A) 1 Aux. Burner

Additional Features

Thermocouple

Red LEDs

Residual heat indicators

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 40 x 880 x 510

Built-in Dimensions (HxW) in mm: 830 x 480













90cm Stainless Steel with StepPower Rotary Controls

HGB95522YM

KEY FEATURES







Controls

Rotary



Cast Iron Pan Auto Ignition Supports

75cm TouchSure Gas on Glass with Touch Control

HVB75450IB

KEY FEATURES



Touch Control



Hob2Hood



Minder





Supports



FUNCTIONS

Wok Burner







FUNCTIONS

Wok Burner

1 Aux. Burner

3 Semi-rapid Burners

Additional Features

Thermocouple

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 60 x 857 x 520

Built-in Dimensions (HxW) in mm: 830 x 480

Additional Features

Thermocouple

Residual heat indicators

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 52 x 750 x 510

Built-in Dimensions (HxW) in mm: 720 x 490


GAS HOBS











HKB75450NB **KEY FEATURES**



Controls



Red LED

Indicators








Minute

Minder





Cast Iron Pan Auto Ignition Supports







75cm Stainless Steel with StepPower Rotary Controls HGB75420YM

Controls

KEY FEATURES



Controls





Supports





Cast Iron Pan Auto Ignition Efficient Burners

FUNCTIONS











Additional Features

Thermocouple

Residual heat indicators

Energy Rating: N/A


Appliance Dimensions (HxWxD) in mm: 40 x 740 x 510

Built-in Dimensions (HxW) in mm: 560 x 480

FUNCTIONS



1 Aux. Burner



(1 Rapid Burner

Additional Features

Thermocouple

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 40 x 745 x 510

Built-in Dimensions (HxW) in mm: 560 x 480







60cm Gas on Glass with StepPower LED Rotary Controls HKB64450NB

KEY FEATURES







Indicators

Red LED Cast Iron Pan Auto Ignition



Supports













60cm Stainless Steel with StepPower Rotary Controls HGB64420YM

KEY FEATURES







Hob2Hood







Controls







Efficient Burners

Controls **FUNCTIONS**



Wok Burner



1 Aux. Burner



(2 Semi-rapid Burners

Additional Features

Thermocouple

Residual heat indicators

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm:

40 x 590 x 520

Built-in Dimensions (HxW) in mm:

560 x 480

FUNCTIONS



Wok Burner



1 Aux. Burner

(2 Semi-rapid Burners

Additional Features

Thermocouple

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm:

40 x 594 x 510

Built-in Dimensions (HxW) in mm:

MIXED FUEL HOB





90cm Induction Hob and Gas Wok Burner with DirekTouch

HD955100NB

KEY FEATURES







DirekTouch Slider

Cast Iron Pan Auto Ignition Supports

FUNCTIONS



4 Induction Zones

Stop & Go



Eco Timer

Additional Features

Thermocouple Child lock Electricity loading 6800W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: $47 \times 880 \times 520$

Built-in Dimensions (HxW) in mm: 830 x 490

MODULAR HOB







MaxiSense® 2 Zone Induction Hob with ActiveTouch IKE42640KB

KEY FEATURES







Function



MaxiSense®

ActiveTouch

Slim Installation

FUNCTIONS

Wok Burner

(80051

ZONE Zone Booster

Count Up Timer

Stop & Go

Minute Minder

(b) Auto Off

Eco Timer

Additional Features

Residual heat indicators Child lock Red LEDs Electricity loading 3650W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: $44 \times 360 \times 520$

Built-in Dimensions (HxW) in mm: 340 × 490

AEG

TOTALFLEX LETS YOU COOK ANYWHERE ON THE HOB'S SURFACE

The TotalFlex induction hob offers you maximum flexibility when cooking. Place pots and pans of all shapes and sizes almost anywhere across the hob's large responsive glass surface without compromising on space, taste or precision.

CHALLENGE THE EXPECTED



















FREEDOM IN KITCHEN DESIGN


Plan your kitchen, and your cooking, with the freedom your creativity deserves. Without having to bother about cooker hoods, or the sizes of your pots and pans. Enjoy ultimate flexibility, with the AEG Induction Hob with integrated Extractor. It's your kitchen, your way..





Easy Installation


Our Optifix™ spring system is self-installing and self centering. Simply place the hob into your cut out for it to secure into place.

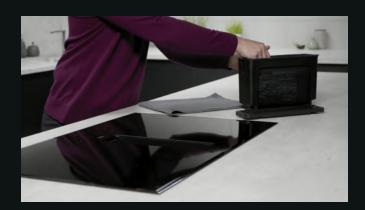



Easy Cleaning and Maintenance

The 2-in-1 Filter combines both a charcoal filter and grease filter that captures odours and grease, which can be easily removed for cleaning and maintenance. This Filter can be washed in the dishwasher and regenerated in the oven.

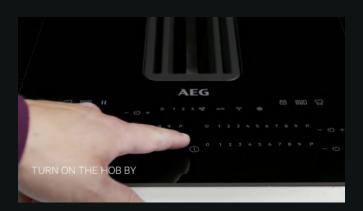



DirekTouch Slider

This hob's direct-access heat controls enable you to switch directly to exactly the right temperature with one touch. Simply touch the correct level on the slide control.

EXTRACTOR HOBS

EXTRACTOR HOBS













83cm Combined Hob & Hood with DirekTouch and FlexiBridge®

CCE84779FB - Recirculation model CDE84779FB - External ducted model

KEY FEATURES



Slider





Installation









with Touch Control and Double Bridge Zone CCE84751FB - Recirculation model CDE84751FB - External ducted model

KEY FEATURES







Connected





DirekTouch Slider



Double Bridge

HOB FUNCTIONS

(C) Count Up Timer

Minute Minder



Fasy Installation



Hob2Hood

HOB FUNCTIONS

(C) Count Up Timer

Minute Minder

HOOD FUNCTIONS

Eco Timer

(II) Pause

(b) Auto Off



Zone Booster



Double FlexiBridge®



(AUTO) Auto

HOOD FUNCTIONS

Eco Timer

(II) Pause



3 Fan Speeds + Intensive



(AUTO) Auto

(b) Auto Off

(ZONE SOOSTER) Zone Booster

O Double Bridge



(🏋) Breeze

Additional Features

Residual heat indicators

2 in 1 Filters (for Recirculation model)

Recirculation max 465 m3/h

Recirculation intensive 585 m3/h

Additional Features

(🏠) Breeze

Child lock Red LEDs

(SPAN) 3 Fan Speeds + Intensive

Recirculation max 465 m3/h

2 in 1 Filters

(for Recirculation model)

Residual heat indicators

Recirculation intensive 585 m3/h Max noise 70dB(A) Easy clean Acoustic signal Electricity loading 7400W Filter Clean Indicator

Energy Rating: A+

Appliance Dimensions (HxWxD) in mm: 210x830x515

Built-in Dimensions (HxW) in mm: 780x490

Energy Rating: A+

Child lock

Red LEDs

Easy clean

Appliance Dimensions (HxWxD) in mm: 210x830x515

Electricity loading 7400W

Built-in Dimensions (HxW) in mm: 780x490

Max noise 70dB(A)

Filter Clean Indicator

Acoustic signal

Additional installation parts maybe required, depending on the install type

Additional installation parts maybe required, depending on the install type







72cm Combined Hob & Hood with Touch Control and Single Bridge Zone IDE74243IB - Recirculation model

KEY FEATURES















Touch Control

Single Bridge

Easy Installation

Easy Clean Hob2Hood

FUNCTIONS

Minute Minder



(SFAN) 5 Fan Speeds





Single Bridge





Stop & Go

Additional Features

Child lock Recirculation max 365m3/h Red LEDs Recirculation intensive 515 m3/h

Electricity loading 7400W Max noise 67dB(A)

Energy Rating: A

Appliance Dimensions (HxWxD) in mm:

Built-in Dimensions (HxW) in mm: 560 x 490

210 x 720 x 510

 $\label{thm:model} \mbox{Model only available in Recirculation. All items for installation included}$

Our cooking environments need to be fresh, bright and peaceful, enriching the time that we spend there. We use advanced technology to ensure that the design and build of our cooker hoods give you the optimum combination of high-end design and powerful functionality.



IN THIS SECTION

Island Hoods

Ceiling Hoods

Chimney Hoods

Integrated Hoods



SILENCE TECH









SilenceTech


Our advanced hood technology allows Cooker Hoods to extract at a low 54dB, allowing you to enjoy the full cooking experience without loud sounds from your appliance.





Breeze Function

The breeze function quietly refreshes the air in your kitchen to create a more enjoyable atmosphere to relax or entertain. This function will automatically switch off for your convenience.

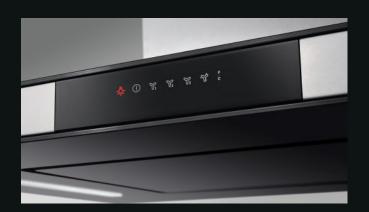



Touch on Glass Controls

Smooth and precise control of all your hood's functions with a simple touch on glass – easy to use and easy to clean.

HOOD ICONS

KEY FEATURES GUIDE



Hob2Hood

A wireless function that when paired with suitable hobs, it automatically activates and regulates the cooker hood according to your cooking activities. It provides a fresher kitchen environment so you can focus on achieving great taste.



Touch on Glass Controls

Smooth and precise control of all your hood's functions with a simple touch on glass – easy to use and easy to clean.



Push Button Controls

Precise control of the setting levels allowed through the squared push buttons.



Designer Filter Cover

High efficiency filter hidden with perfect black glass covers – the perfect look and easy to clean in the Dishwasher.



LED Lighting

LED lighting enables excellent visibility throughout the entire cooking process and provides ambient lighting in the kitchen.



Dimmable LED Lighting

Crisp bright illumination, or a gentle glow? Dimmer-controlled LED lighting means you can adjust the effect at the touch of a fingertip.



Black Glass

Beautiful design with unique black glass.



Anti Fingerprint Stainless Steel

The anti fingerprint stainless steel finishing protects the surface of your cooker hood from fingerprints.



Stainless Steel with Glass

Perfect combination of stainless steel and glass to create a unique and professional style in your kitchen.

FUNCTIONS



Fan Speeds

Number of fan speeds, allowing you to adjust the power, noise and energy consumption.



SilenceTech

Reduces the noise level down to our lowest number of decibels so that you can cook powerfully and enjoy all your favourite food without annoying sounds from the appliance.



Breeze Function

Refreshes the air in your kitchen after cooking at a very low noise level so that you have a more enjoyable and quiet atmosphere to relax or entertain.



Remote Control Included

Easy and fast control of all the hood's functions thanks to the remote control.

ISLAND HOODS



90cm Pendant with LED Lighting and Push Button Controls DLE0970M

KEY FEATURES







LED Lighting



Push Button Controls



65cm Pendant
with LED Lighting and Push Button Controls
DLE0630B

KEY FEATURES







Push Button Controls

FUNCTIONS





Additional Features

Recirculation Model Only Noise: 42dB – 72dB

Motor speed: 700 m³/h **Energy Rating:** N/A

Dimensions (HxWxD) in mm: (850–1250) 170 \times 900 \times 440

FUNCTIONS

¥ Fan speeds

Remote Control Included

Additional Features

Recirculation Model Only Noise: 44dB - 70dB Motor speed: $350 \text{ m}^3/\text{h}$

Energy Rating: N/A

Dimensions (HxWxD) in mm: $(850-1250) 170 \times 900 \times 440$

Also available: DLE0630W - White

ISLAND HOODS



50cm Pendant with LED Lighting and Push Button Controls **DLE0431W**

KEY FEATURES



LED Lighting



Push Button Controls

FUNCTIONS



Remote Control Included

Additional Features

Recirculation Model Only Motor speed: 350 m³/h Noise: 44dB - 70dB

Energy Rating: N/A

Dimensions (HxWxD) in mm: $(850-1250) \times 500 \times 500$

Also available: DLE0431B - Black / DLE0431M - Stainless Steel



100cm T Shape with Dimmable LED Lighting and Touch Controls DIK6180HG

KEY FEATURES







Touch on Glass Controls



Hob2Hood



Dimmable LED Lighting




Designer Filter Cover

FUNCTIONS



SilenceTech



Additional Features

Charcoal filter included Motor speed: 750 m³/h

Noise: 46dB - 65dB

Upgraded filter available as an accessory

Energy Rating: A+

Dimensions (HxWxD) in mm: (1150–850) 75 x 1000 x 700







90cm T Shape with Dimmable LED Lighting and Touch Controls DIE5961HG

KEY FEATURES





Glass Controls





LED

Hob2Hood Dimmable LED Lighting







90cm Downdraft with LED Lighting and Touch Controls DDE5980G

KEY FEATURES





Glass Controls







LED Strip Designer Lighting Filter Cover

FUNCTIONS

Stainless Steel



¥ Fan speeds



SilenceTech



Additional Features

Recirculation Model Only

Motor speed: 700 m³/h Noise: 44dB - 65dB

Upgraded filter available as an accessory

Energy Rating: A

Dimensions (HxWxD) in mm: (1175–758) $60 \times 898 \times 606$

FUNCTIONS



5 Fan speeds



SilenceTech

Breeze Function **Additional Features**

Charcoal filter included Motor speed: 700 m³/h Noise: 40dB - 70dB

Energy Rating: A

Dimensions (HxWxD) in mm: $407 \times 880 \times 95$

CEILING HOODS







120cm Ceiling with Dimmable LED Lighting and Push Button Controls DCK5281HG

KEY FEATURES







Push Button Controls



Dimmable LED Strip Lighting



Hob2Hood







90cm Ceiling with Dimmable LED Lighting and Push Button Controls DCE5960HM

KEY FEATURES





FUNCTIONS



Push Button Controls



Dimmable LED Strip Lighting



Hob2Hood

FUNCTIONS





Additional Features

Charcoal filter included Motor speed: 720 m³/h

Noise: 57dB - 75dB

Upgraded filter available

as an accessory

Additional Features

¥ 4 Fan speeds

(a) Remote Control Included

Charcoal filter included

Motor speed: 710 m³/h Noise: 54dB - 67dB

Upgraded filter available as an accessory

Energy Rating: A

Dimensions (HxWxD) in mm: $(382-582) 3 \times 900 \times 700$

Energy Rating: A+

Dimensions (HxWxD) in mm: (213) $3 \times 1200 \times 700$

WALL MOUNTED CHIMNEY HOODS









90cm Screen with Dimmable LED Lighting and Touch Controls DVK6981HR

KEY FEATURES







Touch on Hob2Hood Glass Controls

Dimmable LED Strip Lighting

90cm / 60cm Screen with LED Spotlights and Touch Controls **DVE5971HG / DVE5671HG**

KEY FEATURES



Black Glass

FUNCTIONS






Hob2Hood



FUNCTIONS







Additional Features

Charcoal filter included Motor speed: 750 m³/h

Noise: 43dB - 54dB

Matt black chimney section

included

Breeze Function **Additional Features**

¥ Fan speeds

Charcoal filter included Motor speed: 700 m³/h

Noise: 42dB - 64dB

Stainless steel chimney section included

SilenceTech

Upgraded filter available as an accessory

Energy Rating: A+

Dimensions (HxWxD) in mm: (1260-915) 380 x 896 x 456

Energy Rating: A

Dimensions (HxWxD) in mm:

 $\textbf{DVE5971HG 90cm} - (915-1265)\ 380 \times 898 \times 418$ **DVE5671HG 60cm** – (915–1265) 380 x 598 x 418

WALL MOUNTED CHIMNEY HOODS



90cm / 60cm T Shape with Dimmable LED Lighting and Touch Controls **DBK6980HG / DBK6680HG**

KEY FEATURES



Stainless Steel with Glass



Touch on Glass Controls



Hob2Hood



Dimmable LED Strip Lighting



Designer Filter Cover



90cm / 70cm / 60cm T Shape with LED Lighting and Touch Controls DBE5961HG / DBE5761HG / DBE5661HG

KEY FEATURES



Anti Fingerprint Stainless Steel



Touch on Glass Controls



Hob2Hood




LED Lighting

FUNCTIONS







Additional Features

Charcoal filter included Motor speed: 750 m³/h

Noise: 46dB - 65dB

Upgraded filter available as an accessory

Energy Rating: A+

Dimensions (HxWxD) in mm:

DBK6980HG 90cm – (773–1218) 75 x 898 x 455 **DBK6680HG 60cm** – (773–1218) 75 x 598 x 455

FUNCTIONS



4 Fan speeds



SilenceTech



Additional Features

Charcoal filter included

Motor speed: 700 m³/h

Upgraded filter available as an accessory

Noise: 44dB - 65dB

Energy Rating: A

Dimensions (HxWxD) in mm:

DBE5961HG 90cm - (759-1204) 60 x 898 x 455 **DBE5761HG 70cm** – (759–1204) 60 x 698 x 455 **DBE5661HG 60cm** - (759-1204) 60 x 598 x 455

INTEGRATED HOODS



90cm / 60cm Pyramid with LED Lighting and Push Button Controls DKB4950M / DKB4650M

KEY FEATURES







Push Button Controls



LED Lighting







80cm / 54cm Hidden with LED Lighting and Push Button Controls DGE5861HM / DGE5661HM

KEY FEATURES







Push Button Controls



LED Lighting



FUNCTIONS



Additional Features

Charcoal filter included

Motor speed: 603 m³/h

Noise: 46dB - 69dB

Upgraded filter available as an accessory

Energy Rating: B

Dimensions (HxWxD) in mm:

DKB4950M 90cm - (1090-665) 40 x 898 x 500 **DKB4650M 60cm** - (1090-665) 40 x 598 x 500

FUNCTIONS



¥ Fan speeds



(i) Remote Control Included

Additional Features

Charcoal filter included

Upgraded filter available as an accessory Motor speed: 700 m³/h

Noise: 54dB - 68dB

Energy Rating: A

Dimensions (HxWxD) in mm:

DGE5861HM 80cm – 331 x 770 x 300 **DGE5661HM 54cm** – 331 x 540 x 300

INTEGRATED HOODS







80cm / 54cm Hidden with LED Lighting and Push Button Controls DGE5861HB / DGE5661HB

KEY FEATURES



Anti Fingerprint Stainless Steel



Push Button Controls



LED Lighting









70cm Hidden with LED Lighting and Push Button Controls DGB3850M

KEY FEATURES







Push Button Controls



LED Lighting

FUNCTIONS



Remote Control Included

Additional Features

Charcoal filter included Motor speed: 700 m³/h Upgraded filter available as an accessory

Noise: 54dB - 68dB

Energy Rating: A

Dimensions (HxWxD) in mm:

DGE5861HB 80cm - 331 x 770 x 300 **DGE5661HB 54cm** - 331 x 540 x 300

FUNCTIONS



4 Fan speeds

Additional Features

Charcoal filter included

Upgraded filter available as an accessory Motor speed: 600 m³/h

Noise: 49dB - 63dB

Energy Rating: C

Dimensions (HxWxD) in mm: $245 \times 700 \times 285$













90cm / 60cm Pull Out with LED Lighting and Push Button Controls DPB3932S / DPB3632S updated model

KEY FEATURES







Push Button Controls

LED Lighting

60cm Hidden with LED Lighting and Slider Controls DEB2631S

KEY FEATURES



Silver





Slider Control

LED Lighting

FUNCTIONS



Additional Features

Charcoal filter included Motor speed: 370 m³/h Noise: 48dB - 68dB

Energy Rating: C

Dimensions (HxWxD) in mm: **DPB3932S 90cm** - (179) 40 x 898 x 284 **DPB3632S 60cm** - (179) 40 x 598 x 284

FUNCTIONS



2 Fan speeds

Additional Features

Charcoal filter included Motor speed: 352 m³/h Noise: 47dB - 62dB

Energy Rating: D

Dimensions (HxWxD) in mm: $400 \times 598 \times 270$

DISHWASHERS

It's not just about the food – the style of cutlery and plates affect our perceptions of what we eat. A dark chocolate dish looks best when served on an angular plate, while a round plate is better for cheesecake. So you need a range of tableware that complements your food presentation and can be cared for in the most efficient way.



IN THIS SECTION

Fully Integrated Dishwashers
Slimline Fully Integrated Dishwasher



QUICKSELECT







ComfortLift®

Raise your standards – and the lower basket of your dishwasher to a more convenient level with ComfortLift® technology. The ComfortLift® dishwasher is the first of its kind to gently slide the lower basket up for easy, ergonomic loading and unloading. That means less bending down, to make your life more comfortable.





SatelliteClean

The double rotating spray arm leaves every load spotless, delivering three-times better spray coverage with no extra water.







QuickSelect


An intuitive slider lets you control your dishwasher on your own terms. Simple, premium control that adapts the wash according to your lifestyle, allowing you to select when you want your dishes clean. The machine does the rest.





AirDry Technology

Uses natural airflow to finish the drying. By automatically opening the door by 10cm in the last part of the cycle, you will get maximum drying performance while effectively reducing your energy costs – leaving your dishes spotless.





Sliding Hinge

Allows you to install the dishwasher with any door length without the need to cut the kitchen plinth. This is also suitable for plinthless kitchens. The best solution on the market – patented by AEG.





MaxiFlex

The MaxiFlex drawer from AEG accommodates almost everything. From multiple cutlery sets to oversized utensils. Flexible dividers mean every load is customisable.

SUPERIOR CLEANING AND FULL COVERAGE

With our ProClean range of dishwashers we deliver superior cleaning and drying, ensuring that you can clean more at the same time and get a great cleaning result with superb drying.




ProClean

Our ProClean models have a larger usable internal space, combined with five spray levels, satellite and ceiling spray arm plus GlassCare package..

5 Spray Levels

Multi level spray reaches every item anywhere, giving you our most efficient spray coverage.









Glass Care Programme

A Special 45°C glass programme ensures perfect washing results while protecting your most precious glass, crystal and china.





XXL Interiors

The XXL interior of this dishwasher gives you an additional 10 litres of space – more capacity for those irregular shaped items.





SprayZone

Heavily soiled items, such as lasagne or crumble dishes, can be washed with a normal load with SprayZone. This feature activates a dedicated zone designed specifically for dishes with stubborn residue.

Features	Standard Models	ProClean	Benefits
Internal Space	Suitable for plate sizes up to 31cm diameter	Suitable for plate sizes up to 33cm diameter	Fit more dishes in!
Spray Levels	2 – 4	5	More spray levels for better cleaning.
Satellite Spray Arm	Selected models	Included as standard	Sprays from continuously varying angles and covers a lot more area compared to a standard spray arm.
Ceiling Spray Arm	Selected models	Included as standard	More spray levels for better cleaning
GlassCare Package	Selected models	Full package included as standard	Protects delicate glasses with soft grips, soft spikes and a dedicated glass programme. No more hand washing old and fragile glass.

DISHWASHER ICONS

KEY FEATURES GUIDE



ComfortLift®

The ComfortLift® basket rises on special hinges, ensuring less bending when loading and unloading dishes.



Connected

Control and monitor your dishwasher remotely by connecting it to the 'My AEG Kitchen' app. This allows you to choose and customise programmes, follow step by step maintenance and even alerts you when the rinse aid and salt is running low.



QuickSelect

Simple, premium control that adapts the wash according to your needs, allowing you to select when you want your dishes clean.



TimeBeam

Keeps you informed on the progress of the programme by projecting the remaining time on the floor.



XXL Interior

The XXL interior of this dishwasher gives you an additional 10 litres of space, more capacity for those irregular shaped items and plates up to 33cm in diameter.



Light Beam

This dishwasher is so quiet it projects a tiny red or green beam on to the floor to tell you when it's running and when it's finished.



SprayZone

Heavily soiled items, such as lasagne or crumble dishes, can be washed with a normal load by selecting the SprayZone option.



GlassCare package

Delicate wine glasses are protected with our soft spikes, soft grips and dedicated GlassCare 45°C programme.



InteriorLight

Locate items at a glance thanks to the bright internal light.



TimeSaver Function

50% less time thanks to increased power speed and water pressure.



AirDry

Uses natural airflow to finish the drying. By automatically opening the door by 10cm in the last part of the cycle, you will get maximum drying performance leaving your dishes spotless.



Deluxe Interior

Selected models have a higher level of internal finish, including stainless steel drawer handles and knife supports in the cutlery drawer.



MaxiFlex

The MaxiFlex drawer from AEG accommodates almost everything. From multiple cutlery sets to over-sized utensils.



ProClean

Our ProClean models have a larger usable internal space, combined with five spray levels, satellite and ceiling spray arm plus GlassCare package.



24 Hour Time Delay

Run your dishwasher when it suits you, thanks to the up to 24 hour delay start function.



Sliding Hinge

With this dishwasher you can choose to install it normally above a plinth. Alternatively, the sliding hinge is perfect for plinthless kitchens or for installation above a small cupboard.



SatelliteClean®

The double rotating spray arm leaves every load spotless, delivering three-times better spray coverage with no extra water.



Dual Spray Arm (slimline)

Water is evenly distributed in every dishwashing cycle with the dual spray arms. The rotating sprinklers make sure water gets into every corner, so your dishes come out sparkling.

DISHWASHERS

The AEG range of dishwashers is designed to meet the frustrations and needs of dishwasher users. The models are designed to give a better quality wash and superb drying results, combined with a larger capacity and useful features such as our glasscare package which looks after your best wine glasses.

FULLY INTEGRATED DISHWASHERS







ComfortLift® with Internal Light, TimeBeam and Cutlery Drawer FSK93847P

KEY FEATURES















QuickSelect



package





PROGRAMMES - 7

160mins

Deluxe Interior

Eco

90mins

Machine Care

60mins

30min 60°

Auto 45° - 70°

Additional Features

Auto load adjust: Sensor logic

Cutlery drawer


24 hour delay

XtraDry

Glass care option Extra silent option Soft spikes and soft grips Anti-flood protection

Xtra power option

Place Settings: 14 Water Usage: 11 ltr Noise Level: 39dB **Appliance Dimensions** (HxWxD) in mm: **Energy Rating:** D 818 x 596 x 550 Noise Rating: B



ComfortLift®

DISHWASHERS

FULLY INTEGRATED DISHWASHERS







ComfortLift® with LightBeam and Cutlery Drawer FSE83837P

KEY FEATURES





















ProClean with LightBeam, Glass Holder and Cutlery Drawer FSE74747P

KEY FEATURES











XXL interior





Light Beam



GlassCare



XXL interio







Package



Sliding hinge



24 Hour Time Delay



MaxiFlex



QuickSelect



Sliding hinge



Package

Time Delay



MaxiFlex

PROGRAMMES - 7

160mins

Eco

90mins

Machine Care

60mins

30min 60°

Auto 45° - 70°

PROGRAMMES - 7

160mins

Eco

90mins

Machine Care

60mins

Auto 45° - 70°

Additional Features

Auto load adjust: Sensor logic

Xtra power option Glass care option

Flexible basket

Cutlery drawer

XtraDry

Soft spikes and soft grips

Extra silent option

Place Settings: 14 Noise Level: 44dB **Energy Rating:** D Noise Rating: B

Anti-flood protection

Water Usage: 11 ltr **Appliance Dimensions** (HxWxD) in mm: 818 x 596 x 550

Additional Features

Auto load adjust: Sensor logic Xtra power option

Glass care option Extra silent option Lower basket glass holder

Place Settings: 15 Noise Level: 44dB **Energy Rating:** C Noise Rating: B

30min 60°

Cutlery drawer

XtraDry

Soft spikes and soft grips Anti-flood protection

Water Usage: 11 ltr **Appliance Dimensions** (HxWxD) in mm: 818 x 596 x 550







ProClean with TimeBeam and Cutlery Drawer FSK75757P

KEY FEATURES






















ProClean with LightBeam, SprayZone and Cutlery Basket FSS63607P

KEY FEATURES







Package















XXL interior







Sliding hinge



24 Hour Time Delay



MaxiFlex



QuickSelect



GlassCare Package



Sliding hinge



24 Hour Time Delay

PROGRAMMES - 7

160mins Eco 90mins Machine Care

30min 60° 60mins

Auto 45° - 70°

Cutlery drawer

PROGRAMMES - 7

160mins Eco

90mins Machine Care

30min 60° 60mins

Auto 45° - 70°

Additional Features

Auto load adjust: Sensor logic XtraDry Xtra power option Soft spikes and soft grips Anti-flood protection Glass care option Extra silent option Internal light

Place Settings: 14 Water Usage: 9.9 ltr Noise Level: 42dB **Appliance Dimensions** (HxWxD) in mm: Energy Rating: $\ensuremath{\mathsf{B}}$ 818 x 596 x 550 Noise Rating: B

Additional Features

Auto load adjust: Sensor logic Cutlery basket Xtra power option XtraDry Glass care option Soft spikes and soft grips Extra silent option Anti-flood protection SprayZone

Place Settings: 13 Water Usage: 10.5 ltr **Appliance Dimensions** Noise Level: 44dB (HxWxD) in mm: **Energy Rating:** D 818 x 596 x 550 Noise Rating: B

DISHWASHERS

FULLY INTEGRATED DISHWASHERS







QuickSelect with LightBeam and Cutlery Drawer FSK52917Z

KEY FEATURES















QuickSelect

FSB42607Z

KEY FEATURES



with AirDry Technology and Cutlery Basket





24 Hour Sliding hinge Time Delay







Light Beam

Sliding hinge



24 Hour Time Delay

PROGRAMMES - 7

160mins

Eco

90mins

Machine Care

60mins

30min 60°

Auto 45° - 70°

PROGRAMMES - 5

90mins

30min 60°

Eco

Machine Care

Auto 45° - 70°

Additional Features

Auto load adjust: Sensor logic

Auto off

Cutlery drawer XtraDry

Glass care option

Anti-flood protection

Xtra power option

Soft spikes

Lower basket glass holder

Place Settings: 14 Noise Level: 44dB Energy Rating: E Noise Rating: B Water Usage: 10.5 ltr Appliance Dimensions (HxWxD) in mm: 818 × 596 × 550 **Additional Features**

Auto load adjust: Sensor logic

Xtra power option Flexible basket

XtraDry Cutlery basket

Place Settings: 13 Noise Level: 46dB Energy Rating: E Noise Rating: C

Anti-flood protection

Water Usage: 9.9 ltr Appliance Dimensions (HxWxD) in mm: 818 x 596 x 550

SLIMLINE FULLY INTEGRATED DISHWASHER







QuickSelect with AirDry Technology and Cutlery Drawer FSE72507P

KEY FEATURES







\:=D=..



MaxiFlex



SatelliteClean®



GlassCare Package



Sliding hinge



Light Beam



24 Hour Time Delay



Dual Spray Arm

PROGRAMMES - 7

160mins

Eco

90mins

Machine Care

60mins

30min 60°

Auto 45° – 70°

Additional Features

Auto load adjust: Sensor logic

Flexible basket

Auto off

XtraDry

Glass care

Anti-flood protection

Soft spikes Cutlery drawer

Place Settings: 10 Noise Level: 44dB Water Usage: 9.9 ltr
Appliance Dimensions

Energy Rating: E
Noise Rating: B

(HxWxD) in mm: 818 x 446 x 550

WHY COMPROMISE ON CARE?

Since AEG began in 1883, we have always set new challenges. Why trust your most precious clothes to the dry cleaners? Why waste valuable energy, water and time on a wash cycle? AEG gives you the confidence to redefine the expected.

No need for compromises. Let's demand a higher standard for laundry care... and the environment.



LAUNDRY

Imagine putting your precious sweater in the washer. Imagine trusting a dryer with a silk dress.

We've not only imagined it, we've done it. Washed the black dress time after time. Dried a soft wool sweater over and over. Every time they emerge without shrinking or fading, still vibrant and soft. Because AEG has redefined what a washer and dryer are. Protectors of fabric. Defenders of colour. Guardians of fibres.

Unprecedented care for the life of your clothes. Imagine that.

IN THIS SECTION

Built-In Washing Machine

Built-In Washer Dryer

Freestanding Washing Machines

Freestanding Tumble Dryers

Freestanding Washer Dryers







Premium Design

We've been inspired by the electric turbiness manufactured at the AEG Turbine Factory in Berlin.

The positioning of the door handle at 2 o'clock makes it easy to open.





Easy to Use Control Panel

A total self-cleaning function that automatically locks the oven door and heats up to 500°C, turning food residue to ash.





Complementary Design

AEG Tumble dryers are designed to complement our washing machines and are available with stacking kits.





Built-In Laundry

Achieve that seamless look with our built-in range. Our integrated washing machines feature the same wide variety of functionalities as our freestanding ones, including ProSteam® and ProSense® technology.

OUR WASHING MACHINE RANGE

Our washing machine range is structured into 4 series levels. As you go up the series levels, our washing machines step up in the level of fabric care, and include all the technologies from the series below.

With our freestanding and built-in washing machine ranges both packed full of technology, you don't have to compromise on washing performance.

Features	6000 SERIES	7000 SERIES	8000 SERIES	9000 SERIES
SoftWater Technology				\bigcirc
ÖKOMix Technology			\bigcirc	\bigcirc
ProSteam® Technology		\bigcirc	\odot	\bigcirc
ProSense® Technology	\bigcirc	\bigcirc	\bigcirc	\bigcirc





FULL STEAM AHEAD



ProSteam®

Why needlessly waste water, energy and your time? By steaming instead of washing, you can refresh and remove creases from your clothes in just 25 mins – saving more than 40 litres of water*. Helping you care for your wardrobe and the planet.

196%

less water than a normal wash

 $\sqrt{25}$ MINS

to refresh, revice and uncrease fabrics

\30_%

fewer creases when steam is added to the wash cycle

PROSTEAM® TECHNOLOGY
OFFERS A WASH CYCLE WITH A PLUSSTEAM
OPTION OR A SEPARATE STEAM PROGRAMME

*Use steam to refresh clothes and save more than 40l of water per cycle, tested on 1kg delicate garments using the FreshScent programme compared to using the Delicates programme.



NO FADING, WASH AFTER WASH*



SoftWater

The AEG SoftWater® technology purifies and softens water by filtering out unwanted substances like calcium and magnesium.

Not only will this allow you to lower the temperature and save energy - it will also prevent colours from fading, and preserve the shape and softness of your favourite clothes.

Available on 9000 series washing machines.



*Even after 50 washes, colours will keep their intensity and black won't fade to grey. Test for colourfastness performed on black polyester after 50 washing cycles at 30°C.

WASHED WITHOUT SOFTWATER TECHNOLOGY

SHAPE LOSS

NEW GARMENT

WASHED WITH SOFTWATER TECHNOLOGY

AFTER 50 WASHES





ÖKOMix

Unique pre-mixing of detergent, softener and water to reach every fibre.





ProSense®

Adjusts time, water and energy consumption to the size of the load, even if it is just a single shirt or your entire weekly wash. This is thanks to specific sensors that will intelligently control the cycle settings and take care that your clothes are only washed for the exact amount of time needed.





AutoDose

Intelligent technology senses the weight of the load and automatically calculates the optimal amount of detergent and softener to add to each wash cycle. Ensuring your whites stay bright and colours keep their vitality, wash after wash.

OUR TUMBLE DRYER RANGE

Our tumble dryer range is structured into 3 series levels. As you go up the series levels, our tumble dryers step up the level of fabric care, and include all the technologies from the series below.

Features	6000 SERIES	7000 SERIES	8000 SERIES
AbsoluteCare® System			\oslash
SensiDry® Technology		\bigcirc	\oslash
ProSense® Technology	\bigcirc	\odot	⊘







AbsoluteCare® System

AbsoluteCare® System, a tailored program that precisely controls the movement and temperature of the drying drum. Delicate woollens with 'hand wash only' care labels are kept flat against the drum during rotations to replicate flat drying.





SensiDry®

Using low temperatures without extending drying times, AEG SensiDry® Technology ensures that garments are never subjected to unnecessary heat.






ProSense®

ProSense technology, which uses advanced humidity and temperature sensors to adjust the drying time and energy consumption for every size of load - whether it's a day's or a week's worth of washing.

OUR WASHER DRYER RANGE

We've taken the best technologies of our washing machines and tumble dryers and incorporated them into our washer dryers and incorporated them into our washer dryers, such as ProSense® and ProSteam® which can be found within our 7000 series.









DualSense®

DualSense® technology tailors the temperature and motion of the drum to different fabrics. Everything from textured jackets to soft jumpers can be carefully washed, dried and cared for in one go.





ÖКОМіх

Unique pre-mixing of detergent, softener and water to reach every fibre.





ProSense®

ProSense technology, which uses advanced humidity and temperature sensors to adjust the drying time and energy consumption for every size of load - whether it's a day's or a week's worth of washing.





ProSteam®

Using the PlusSteam® option to end a washing cycle with steam, reduces creasing by up to 30%. You can also refresh clothes with a separate steam programme to remove unwanted odours from garments.

BUILT-IN RANGE

Achieve that seamless look with an integrated washing machine or washer dryer. Our integrated machines feature the same wide variety of functionalities as our freestanding ones, including ProSteam®, ProSense® and DualSense® technology.

WASHING MACHINE









7000 Series with ProSteam® and ProSense® L7FC8432BI

TECHNOLOGY





team® I

SPECIFICATIONS

Drum: 8kg	Energy rating: D
Speed: 1400rpm	Speed: B

PROGRAMMES

Eco 40-60	Rinse
Cottons	Anti Allergy
Synthetics	Duvet
Delicates	20min – 3kg
Outdoor	Sport
Steam	Denim
Spin/Drain	Wool/Silk

Additional Features

Temperature Selection	Plus Steam
Spin Selection	Delayed Start
Stain	Time Saving
Extra Rinse	Start/Pause

Soft Plus

Colour: Silver fascia panel

Appliance Dimensions (HxWxD) in mm: $820 \times 596 \times 555$



${\sf ProSteam}^{@}$

Using the PlusSteam® option to end a washing cycle with steam, reduces creasing by up to 30%. You can also refresh clothes with a separate steam programme to remove unwanted odours from garments.

WASHER DRYER









7000 Series, 7/4kg with DualSense® and ProSense®

L7WC8632BI

TECHNOLOGY





DualSense®

ProSense®

SPECIFICATIONS

Drum: 7/4kg **Energy rating:** D / E

Speed: 1600rpm **Speed**: B

PROGRAMMES

Eco 40-60 Rinse

Cottons Machine Clean

Synthetics Anti Allergy

Delicates Sport Wear

Wool/Handwash Outdoor

Steam Denim

Spin/Drain Non Stop 60min

Additional Features

Temperature Selection Dry Mode
Spin Selection Drying Time
Prewash Autodry
Stain Start/Pause
Time Saving Delayed Start

Colour: Silver fascia panel

Appliance Dimensions (HxWxD) in mm: $820 \times 596 \times 555$



DualSense®

DualSense® technology tailors the temperature and motion of the drum to different fabrics. Everything from textured jackets to soft jumpers can be carefully washed, dried and cared for in one go.

FREESTANDING RANGE

While conventional washing machines need high temperatures to activate detergents and clean properly, the SoftWater technology in AEG 9000 Series washing machines purifies and softens water before it enters the drum

WASHING MACHINES











9000 Series with SoftWater and ÖKOMix

L9FEC966R

TECHNOLOGY









SoftWat

ProSt

ProSense

SPECIFICATIONS

Drum: 9kg	Energy rating: A
Speed: 1600rpm	Speed: B

PROGRAMMES

Eco 40-60	Steam
Cottons	ÖKOPower
Synthetics	20min – 3kg
ColourPro	Outdoor
Delicates	Anti Allergy
Wool/Silk	

Additional Features

Colour: Stainless steel fascia panel

Appliance Dimensions (HxWxD) in mm: $850\times600\times660$

Softer water, kinder to clothes

Because our advanced SoftWater technology purifies and softens water before it enters the drum, detergents can work much more effectively at low temperatures, delivering 60°C cleaning performance at only 30°C. So colours will keep their intensity wash after wash, and black won't fade to grey.











8000 Series with ÖKOMix and ProSteam® L8FEE965R

TECHNOLOGY















7000 Series with ProSteam® and ProSense® L7FEE845R

TECHNOLOGY





SPECIFICATIONS

Drum: 9kg	Energy rating: A	
Speed: 1600rpm	Speed: B	
PROGRAMMES		_
Eco 40-60	ÖKOPower	
Cottons	20min – 3kg	

Eco 40-60	ÖKOPower
Cottons	20min – 3kg
Synthetics	Outdoor
Delicates	Duvet
Wool/Silk	Anti Allergy
Steam	

Eco 40-60	ÖKOPower
Cottons	20min – 3kg
Synthetics	Outdoor
Delicates	Duvet
Wool/Silk	Anti Allergy
Steam	

Steam	
Additional Features	
PlusSteam®	Stains/Prewash
Time save	Rinse
Delay start	Extra rinse
Temperature selection	Child lock
Spin selection	

Appliance Dimensions (HxWxD) in mm: $850 \times 600 \times 660$

lour: Stainless steel fascia panel
lour: Stainless steel fascia panel

Start/Pause

SP	EC	IFI	CA	ГΙΟ	NS

Drum: 8kg	Energy rating: C
Speed: 1400rpm	Speed: B

PROGRAMMES	
Eco 40-60	20min – 3kg
Cottons	Outdoor
Synthetics	Duvet
Delicates	Sport
Wool/Silk	Anti Allergy
Steam	

Additional Features	
Soft Plus	Start/Pause
PlusSteam®	Stains/Prewash
Time save	Rinse

Delay start	Extra rinse
Temperature selection	Child lock
Spin selection	

Colour: Silver fascia panel

Appliance Dimensions (HxWxD) in mm: $850 \times 600 \times 660$

FREESTANDING RANGE

WASHING MACHINES









6000 Series AutoDose® with ProSense® L6FBG941CA

TECHNOLOGY





AutoDose®

ProSense®

SPECIFICATIONS

Drum: 9kg	Energy rating: A
Speed: 1400rpm	Speed: B

PROGRAMMES

Cottons	Anti Allergy
Eco 40-60	Quick 20min – 3kg
Synthetics	Outdoor
Delicates	Easy Iron
Wool/Silk	Spin/Drain

Additional Features

Time save	Temperature selection
Delay	Spin selection
Start/Pause	Intensive/Prewash

Colour: White fascia panel

Appliance Dimensions (HxWxD) in mm: $850 \times 600 \times 660$



ProSense®

Adjusts time, water and energy consumption to the size of the load, even if it is just a single shirt or your entire weekly wash. This is thanks to specific sensors that will intelligently control the cycle settings and take care that your clothes are only washed for the exact amount of time needed

AWARD WINNING QUALITY.





Woolmark

The Woolmark Apparel Care programme helps consumers identify quality laundry appliances that are approved by The Woolmark Company for use on woollen fabrics.

Woolmark Blue

It is the Woolmark Appared Care certification of wool cycles that identifies a machine as safe in which to wash handwash only woollen fabrics.

Woolmark Green

The gentleness required is exactly the same as for Woolmark Blue, but the programme uses less energy and water, hence the symbolic green labelling.





Ariel and Lenor certified

Our washing machine range is certified by Ariel and Lenor for their efficient use of liquid detergent and fabric softener. Any machine with ÖKOMix technology has received the premium certification by Ariel and Lenor. The certification guarantees that 90% of fabrics in a washing load are evenly covered with liquid fabric softener. AEG, Ariel and Lenor have partnered to provide you with their combined unique care expertise for fabrics.



FREESTANDING RANGE

Never dared to tumble dry wool, silk or outdoor garments before? Now you can tumble dry everything you wash with the AbsoulouteCare® system. The tailored programming precisely controls the movement and temperature of the drying drum, so silks keep their shape and wrinkles are reduced.



AbsoluteCare®

Our unique AbsoluteCare® system precisely controls the movement and temperature of the drying drum. Woollens are kept flat against the drum to replicate flat drying. Outdoor garments are given just the right amount of heat to restore the full functionality of their waterproof membrane. Every fabric gets the right movement and temperature to dry it completely, while preserving its quality, look and feel.



SensiDry®

SensiDry® technology reduces the drying temperature by almost half (compared to a condenser washer dryer) – reducing damage and wear, and maintaining the texture of your fabrics.



ProSense®

Automatically adjusts the time, water and energy consumption to suit any load size.

TUMBLE DRYERS









8000 Series with AbsoluteCare® and SensiDry® T8DEC846R

TECHNOLOGY







teCare® SensiDry®

SPECIFICATIONS

Drum: 8kg	Energy rating: A++	
PROGRAMMES		

Cotton Eco	Silk
Cottons	Bed Linen
Synthetics	Easy Iron
Mixed	Outdoor
Wool	Duvet

Additional Features

Refresh Delay start
Anti-crease Time drying
Dryness level Start/Pause
Quiet mode Child lock

Colour: Stainless steel fascia panel

Appliance Dimensions (HxWxD) in mm: $850 \times 600 \times 665$







7000 Series with SensiDry® and ProSense®

T7DEE845R

TECHNOLOGY





C---:D---®

ProSense®







6000 Series with ProSense® T6DBG821N

TECHNOLOGY



ProSensi

SPECIFICATIONS

SPECIFICATIONS

Drum: 8kg	Energy rating: A++	Drum: 8kg	Energy rating: B		
PROGRAMMES		PROGRAMMES			
Cotton Eco	Silk	Cotton Eco	Easy Iron		
Cottons	Easy Iron	Cottons	Bed Linen		
Synthetics	Bed Linen	Synthetics	Duvet		
Mixed	Duvet	Mixed	Jeans		
Wool	Sport	Delicates	Sports		
Additional Features		Additional Features			
Anti-crease	Start/Pause	Anti-crease	Start/Pause		
Dryness level	Child lock	Dryness level			
Delay start	Refresh	Delay start			
Time drying		Time drying			
Colour: Silver fascia pan	el	Colour: White fascia pa	nel		
Appliance Dimensions (HxWxD) in mm: 850 × 600 × 665		Appliance Dimensions	Appliance Dimensions (HxWxD) in mm: 850 x 596 x 626		

FREESTANDING RANGE

With the same performance and technologies as two separate machines, you can wash and dry in one go.

We offer complete care for your woollens throughout the wash and dry cycle.

WASHER DRYERS









7000 Series, 9/6kg with DualSense®

L7WEE965R

TECHNOLOGY







ProSt

ProSense

SPECIFICATIONS

Drum: 9/6kg	Energy rating: C / E
Speed: 1600rpm	Noise rating: B

PROGRAMMES

Eco 40-60	Outdoor
Cottons	Anti Allergy
Synthetics	Non Stop 60min
Delicates	Steam
Wool/Handwash	Rinse

Additional Features

Quick wash	Stains/Prewash
Delayed start	Mode
Start/Pause	Autodry
Temperature selection	Drying time
Spin selection	

Colour: Silver fascia panel

Appliance Dimensions (HxWxD) in mm: $850\times600\times660$



DualSense®

DualSense® technology tailors the temperature and motion of the drum to different fabrics. Everything from textured jackets to soft jumpers can be carefully washed, dried and cared for in one go.









7000 Series, 7/4kg with DualSense® L7WBG751R

TECHNOLOGY







DualSense®

oSteam®

ProSense

SPECIFICATIONS

Drum: 7/4kg	Energy rating: C / E
Speed: 1400rpm	Noise rating: B

PROGRAMMES

Eco 40-60	Outdoor
Cottons	Non Stop 60min
Synthetics	Steam
Delicates	Rinse
Wool/Handwash	Spin/Drain

Additional Features

Quick wash	Stains/Prewash
	Mode
Delayed start	. 1000
Start/Pause	Autodry
Temperature selection	Drying time
Spin selection	

Colour: White fascia panel

Appliance Dimensions (HxWxD) in mm: $850\times600\times576$

SMALL APPLIANCES & ACCESSORIES RANGE

Welcome to the Small Appliances and Accessories range. Each product has been specially designed to harness the power of AEG technology, bringing out the best in any ingredient so you can create great tasting dishes.

IN THIS SECTION

SMALL APPLIANCES

Gourmet 7 Kettle

Gourmet 7 Toaster

HOB ACCESSORIES

Plancha Grill

Salt Block

Fusion Wok

Non-stick Frying Pan Set

Cookware Set

OVEN ACCESSORIES

Bakery Tray

Steam Set

Large Steam Tray Set

SousVide Bags

Pizza Set

REFRIGERATOR ACCESSORIES

SpinView Shelf

Extendable Shelf



GOURMET 7 KETTLE | K7-1-6BP-U

EXACT RESULTS



GOLDEN PRECISION

Choose from seven settings to create the ideal results. AEG Different kinds of breads require different warming settings. Choose from seven browning options, for soft brioches or tougher bakes like ciabatta. Toasted to precision, customised with the twist of a dial.

INDOOR BARBECUE

Instantly turn your hob into a barbecue and get perfect outdoor grill taste all year round with the Plancha Grill.



HIMALAYAN SALT BLOCK

The Salt Block provides a platform for seasoning and serving food naturally and healthily.





Sourced from pink rock salt in the Himalayas, the block can be heated in the oven, on the hob, or chilled in the fridge or freezer.

Dimensions 8cm x 33cm x 22cm





FUSION WOK | FUSION-WOK

STIR-FRY IN A FLASH

Get fresh flavours fast with the Fusion Wok.



E V E R Y D A Y F U N C T I O N A L I T Y



This set of aluminium-coated, champagne coloured frying pans are ideal for everyday frying, searing and browning with little or no oil.

Each pan has a non-stick coating and delivers fast and even cooking whilst keeping food tender and moist.

DUPONT certified non-stick coating. Suitable for all hob types. Oven safe up to 250°C.

Diameter 26cm and 30cm

COOKWARE SET | A3SS

COOKING MASTERED

Three-piece stainless steel cookware set to master everyday cooking.



BAKING MASTERED

Enjoy freshly baked goods with a perfect golden crust.



Perforations in the tray helps the heat and steam to circulate around the dough to create a crispy texture while keeping the interior soft and tender.

The non-stick aluminium tray makes it easy to clean. Designed to be used with AEG steam ovens.

Dimensions 46.6cm × 38.5cm

STEAM SET | A90ZS10M

PROFESSIONAL PERFORMANCE

Take your steam cooking performance to the next level with the same tools used by professional chefs.



ENHANCED FLAVOUR

Designed for larger quantities of food to enhance the flavour of the ingredients.

flavour and giving even cooking results.

Suitable for fish, meat, rice and vegetables.

Includes 2 stainless steel trays. Designed to be used with AEG steam ovens. Dishwasher safe.



SOUSVIDE BAGS | A3OS1M

RESTAURANT QUALITY RESULTS


Now you can use the SousVide technique to get restaurant quality results at home.



Contains 25 bags 30cm x 20cm and 25 bags 35cm x 25cm

for preservation. To be used together with AEG steam ovens with the SousVide programme.

PERFECTLY AUTHENTIC

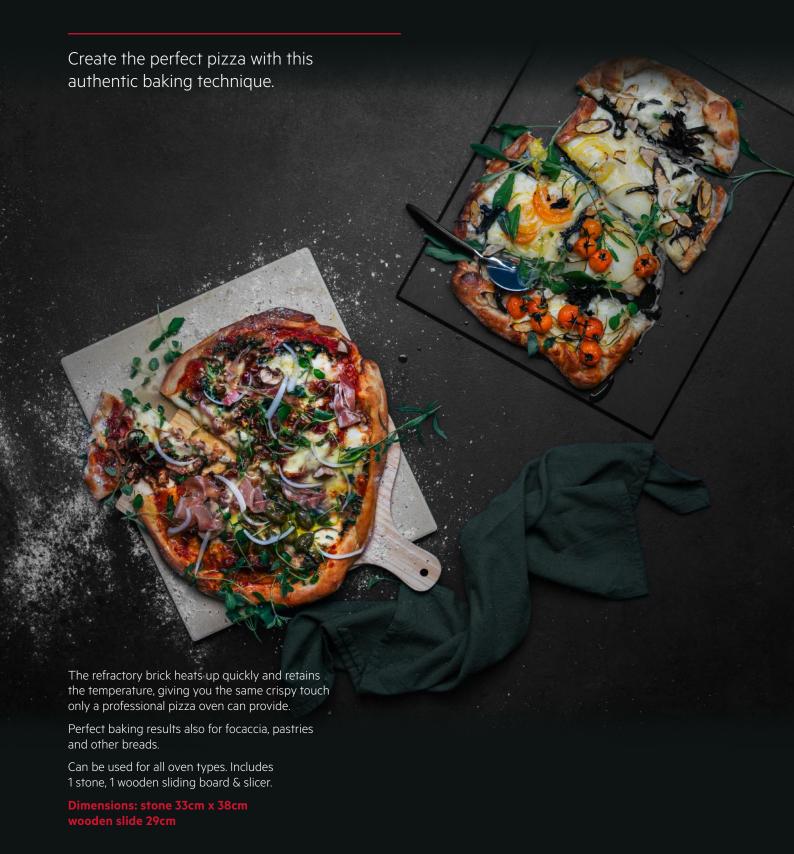

SPINVIEW SHELF | A6RHSW31

REVOLUTIONARY STORAGE

The SpinView shelf puts everything from your refrigerator within immediate reach.



No searching. No rearranging. With a revolutionary design and flexible storage, the unique 360° shelf rotates in any direction making it easier to reach your ingredients, even from the top shelf.

Fits all AEG integrated fridge freezers and fridges.

Dimensions 5.2cm x 42.3cm x 29.5cm

DESIGN AND CUSTOMISE

The Extendable Shelf Tray makes it even easier to access your refrigerated ingredients.



The extendable shelf with removable tray can be transported for use outside the fridge, making it easier to load and unload ingredients from your refrigerator.

Fits all AEG integrated fridge freezers and fridges.

Dimensions 8.5cm x 45.5cm x 30.5cm

SPECIFICATION TABLES

IN THIS SECTION

Refrigeration

Integrated Fridge Freezers

Integrated Fridges and Freezers

Freestanding Fridge Freezers

Wine Cooling

Cooking

Single Ovens

Built-In Double Ovens

Built-Under Double Oven

Compacts

Microwave Ovens

Hobs

Hoods

Dishwashers

Fully Integrated Dishwashers

Slimline Fully Integrated Dishwasher

Laundry

Built-in Washing Machine

Built-in Washer Dryer

Freestanding Washing Machines

Freestanding Tumble Dryers

Freestanding Washer Dryers





REFRIGERATION









	RCB732E4MG	SCE818C5TC	SCE818E5TC	CCE010EETC
Overview	RCB/32E4MG	SCEOIOCSTC	3CE010E31C	SCE819E5TS
FwinTech®	•	•	•	•
NoFrost	•	•	•	•
.owFrost			•	• • • • • • • • • • • • • • • • • • • •
CustomFlex®	····•	•	•	•••••
ongFresh			•	• • • • • • • • • • • • • • • • • • • •
oft Close Doors		•	•	•••••
1ulti Airflow Cooling	•		•••••	•••••
DynamicAir Technology	•	•	•	•
.CD Touch Display/Electronic Controls/	••••		•	•
Nechanical Temperature Control	Electronic Touch	Electronic Touch	Electronic Touch	Simple Touch
ED Lighting coolmatic	·····	······································		
rostmatic		<u>.</u>		
	-	•		
loliday Mode ligh Temperature Alarm				•
oor Open Alarm	•	•	•	•
Poor Opening	Right	Right & Reversible	Right & Reversible	Right & Reversible
ross Capacity (ltr/cu.ft)	341	265	265	287
let Capacity (Itr/cu.ft)	302	247	247	267
ridge Features	302	<u></u>	<u></u>	201
ross Capacity Fridge (ltr/cu.ft)	215	189	189	211
let Capacity Fridge (Itr/cu.ft)	208	189	186	211 207
Defrost – Fridge	Auto	Auto	Auto	Auto
Glass Shelves	Au10 2	Au10 3	Au10 3	Au10 3
lexi Shelf (Half Depth)	2	•	•	•
resh Box	•			•
Nottle Rack	······································	•••••	•	•
arge Telescopic Pull Out Salad Drawer	•		•••••	•
arge Salad Drawer	•	•••••	•••••	•
Extra Deep 1/2 Width Salad Drawers	••••	2 Half Width	2 Half Width	•
ull Width Recessed Salad Drawer with 2 Glass Lids	····•	Z i dii Widii	Z i idii YYidiii	
Dairy Compartment with Lid		•	•	•
No. Full Width Door Shelves			•	• • • • • • • • • • • • • • • • • • • •
/2 Width Sliding Door Shelf				•
gg Tray	2 for 8 eggs	2 for 6 eggs	2 for 6 eggs	2 for 6 eggs
reezer Features	2 101 0 0990	2 101 0 0993	21010 0993	2 101 0 0 993
ross Capacity Freezer (ltr/cu.ft)	104	76	76	76
let Capacity Freezer (Itr/cu.ft)	94	61	61	60
Defrost – Freezer	Auto	Auto	Auto	Auto
lo. Full Width Drawers	2 Full. 1 Half	3 Full Width	3 Full Width	3 Full Width
elescopic Freezer Drawers	21 ali. 11 ali	31 dii Widiii	31 dii Widiii	31 dii Widiii
roduct Dimensions				•
	10/0	17/0	17/0	100/
leight (mm) Vidth (mm)	1860	1769	1769	1884
	595	556	556	540
Depth (mm)	662	549	549	549
uilt-in Dimensions				
Built-in Height (mm)	1860	1769	1769	1898
uilt-in Width (mm)	595	556	556	556
uilt-In Depth (mm)	662	549	549	549
oor Fixing	FS	BI DoD	BI DoD	BI Slide Door
erformance				,
nnual Energy Consumption	263	120	226	233
nergy Efficiency Class	E	C	E	E
limate Class	SN-N-ST-T	SN-N-ST-T	SN-N-ST-T	SN-N-ST-T
loise	42	39	39	39 10
reezing Capacity	8	10	10	
Power Cut Safe Rising Time	18	23	23	21
Minimum Ambient Temperature	10	10	10	10









	SCE819E7TS	SCE818E8TS	SCE818E6TC	SCE818E6NS
Overview				
winTech®	•	•	•	•
oFrost	•	•	•	•
owFrost		<u>.</u>		
iustomFlex®		•	•••••	•
ongFresh				•
oft Close Doors		•		•
Aulti Airflow Cooling		•••••		•••••
DynamicAir Technology	•			•
.CD Touch Display/Electronic Controls/	Electronic Touch	Electronic Touch	Electronic Touch	Electronic Touch
1echanical Temperature Control	Electronic roden	Electronic Touch	Electronic roden	Electronic Touch
.ED Lighting	•	•	•	•
Coolmatic	•	•	•	•
rostmatic	•	•	•	•
łoliday Mode	•	•	•	•
ligh Temperature Alarm	•	•	•	•
oor Open Alarm		•	•	•
oor Opening	Right & Reversible	Right & Reversible	Right & Reversible	Right & Reversible
ross Capacity (Itr/cu.ft)	287	273	265	264
let Capacity (ltr/cu.ft)	267	253	247	239
ridge Features				
Gross Capacity Fridge (ltr/cu.ft)	211	197	189	157
let Capacity Fridge (ltr/cu.ft)	207	192	186	152
Pefrost – Fridge	Auto	Auto	Auto	Auto
Blass Shelves	3	3	3	2
lexi Shelf (Half Depth)	•	•	•	•
resh Box	•	•		• · · · · · · · · · · · · · · · · · · ·
Bottle Rack		•••••	·	
arge Telescopic Pull Out Salad Drawer	<u>.</u>			•••••
arge Salad Drawer	<u>.</u>	GreenZone		
Extra Deep 1/2 Width Salad Drawers			2 Half Width	2 Half Width
ull Width Recessed Salad Drawer with 2 Glass Lids		GreenZone		•
Dairy Compartment with Lid	•	•	•	•
No. Full Width Door Shelves				
/2 Width Sliding Door Shelf	•		•	•
gg Tray	1 for 10 eggs	2 for 6 eggs	2 for 6 eggs	2 for 6 eggs
reezer Features				
cross Capacity Freezer (ltr/cu.ft)	76	76	76	107
let Capacity Freezer (ltr/cu.ft)	60	61	61	87
Defrost – Freezer	Auto	Auto	Auto	Auto
No. Full Width Drawers	3 Full Width	3 Full Width	3 Full Width	4 Full Width
elescopic Freezer Drawers				•
Product Dimensions				
leight (mm)	1884	1772	1769	1772
Vidth (mm)	540	540	556	540
epth (mm)	549	549	549	549
uilt-in Dimensions				
Built-in Height (mm)	1898	1772	1769	1772
uilt-in Width (mm)	556	540	556	540
uilt-In Depth (mm)	549	549	549	549
oor Fixing	BI Slide Door	BI Slide Door	BI DoD	BI Slide Door
erformance				
nnual Energy Consumption	233	228	226	238
nergy Efficiency Class	E	E	E	E
limate Class	SN-N-ST-T	SN-N-ST-T	E SN-N-ST-T	SN-N-ST-T
loise	39	39	39	39
reezing Capacity	10	10	10	10
Power Cut Safe Rising Time	21	21	23	25
Minimum Ambient Temperature	10	10	10	10

REFRIGERATION









	SCE818F6NS	SCE818F6TS	SCB618F3LS	SCB718F3LS
Overview				
winTech®	•	•		
NoFrost	•	•	•	•••••
owFrost	•	•	•	•
ustomFlex®	•	•••••	•	•••••
ongFresh		•		
oft Close Doors	•	•		•••••
1ulti Airflow Cooling	····•	•	•••••	
DynamicAir Technology		•	•••••	
	·····	•	••••	•••••
.CD Touch Display/Electronic Controls/ Mechanical Temperature Control	Electronic Touch	Electronic Touch	Simple Touch	Simple Touch
•				
ED Lighting		•		•
oolmatic	•	•		•••••
rostmatic	•	•	•	•
łoliday Mode	•	•		
ligh Temperature Alarm	•	•		
oor Open Alarm	•	•		
oor Opening	Right & Reversible	Right & Reversible	Right & Reversible	Right & Reversible
ross Capacity (ltr/cu.ft)	264	273	272	269
let Capacity (ltr/cu.ft)	239	253	268	266
ridge Features				
ross Capacity Fridge (ltr/cu.ft)	157	197	199	163
let Capacity Fridge (ltr/cu.ft)	152	192	196	160
efrost – Fridge	Auto	Auto	Auto	Auto
ilass Shelves	2	3	4	3
lexi Shelf (Half Depth)	•	•		
resh Box				
Bottle Rack				
arge Telescopic Pull Out Salad Drawer				
arge Salad Drawer			•	•
Extra Deep 1/2 Width Salad Drawers	2 Half Width	2 Half Width	2 Half Width	2 Half Width
ull Width Recessed Salad Drawer with 2 Glass Lids	••••	•••••	•	
Dairy Compartment with Lid	•	•	•	•
No. Full Width Door Shelves	•••••	••••••	•••••	••••
/2 Width Sliding Door Shelf	•	•		•
gg Tray	2 for 6 eggs			
reezer Features	2.0.00990	2.0.00990	2.0.0.0990	
iross Capacity Freezer (ltr/cu.ft)	107	76	73	106
let Capacity Freezer (Itr/cu.ft)	87	61	72	106
Defrost – Freezer (111/cu.11)	Auto	Auto	Manual	Manual
lo. Full Width Drawers	4 Full Width	3 Full Width	3 Full Width	4 Full Width
	4 Full WIUIII	o ruii WIUIII	J Full WIUIII	4 ruli Wiuifi
elescopic Freezer Drawers		•	•••••	•••••
roduct Dimensions				
leight (mm)	1772	1772	1772	1772
/idth (mm)	540	540	540	540
Pepth (mm)	549	549	549	549
uilt-in Dimensions				
Built-in Height (mm)	1772	1772	1772	1772
uilt-in Width (mm)	540	540	540	540
uilt-In Depth (mm)	549	549	549	549
loor Fixing	BI Slide Door	BI Slide Door	BI Slide Door	BI Slide Door
erformance	2. 2			2. 222 2001
nnual Energy Consumption	303	291	201	293
			291 E	
nergy Efficiency Class	F SN-N-ST-T	F CN N CT T	F SN-N-ST-T	F CN N CT
limate Class		SN-N-ST-T		SN-N-ST
loise	39	40	36	36
reezing Capacity	10	10	4	4
Power Cut Safe Rising Time Minimum Ambient Temperature	24 10	21 10	22 10	22
VIDIBUID AMBIANT LAMBATATURA	7()	1()	1()	10









	SCB614F1LS	ABE682F1NF	ABB682F1NF	SFB682F1AF
Overview				
TwinTech®		•	•	•••••
NoFrost		•	•••••	• • • • • • • • • • • • • • • • • • • •
_owFrost	•	•		•••••
CustomFlex®				***************************************
_ongFresh				
Soft Close Doors				
Multi Airflow Cooling	·····	•		•••••
DynamicAir Technology	•••••	•	•	• • • • • • • • • • • • • • • • • • • •
	·····	•	•••••	•••••
.CD Touch Display/Electronic Controls/ Mechanical Temperature Control	Mechanical Control	Electronic	Electronic	Mechanical
			•	• · · · · · · · · · · · · · · · · · · ·
.ED Lighting	•	• · · · · · · · · · · · · · · · · · · ·	•	•
Coolmatic		• • • • • • • • • • • • • • • • • • • •	•••••	• • • • • • • • • • • • • • • • • • • •
rostmatic		•	•	•••••
Holiday Mode			_	
High Temperature Alarm		•	•	
Door Open Alarm		•	•	
Door Opening	Right & Reversible	Right & Reversible	Right & Reversible	Right & Reversible
Gross Capacity (ltr/cu.ft)	220	86	105	111
Net Capacity (Itr/cu.ft)	217	85	95	109
ridge Features		•		•
Gross Capacity Fridge (ltr/cu.ft)	163			111
Net Capacity Fridge (Itr/cu.ft)	160	<u> </u>		109
Net Capacity Fridge (117/cu.11) Defrost – Fridge	·······		•	•
	Auto	•	•	Auto
Glass Shelves	3	•	•	2
lexi Shelf (Half Depth)				
resh Box				• · · · · · · · · · · · · · · · · · · ·
Bottle Rack		•	•••••	• • • • • • • • • • • • • • • • • • • •
arge Telescopic Pull Out Salad Drawer		• • • • • • • • • • • • • • • • • • • •	•••••	•••••
arge Salad Drawer		•		1 Full Width
Extra Deep 1/2 Width Salad Drawers	2 Half Width			
full Width Recessed Salad Drawer with 2 Glass Lids				
Dairy Compartment with Lid	•			•
lo. Full Width Door Shelves				
/2 Width Sliding Door Shelf	•			•
gg Tray	2 for 6 eggs	•	•	1 for 6 eggs
reezer Features		•	•	
Gross Capacity Freezer (ltr/cu.ft)		94	105	
	57	86		•
let Capacity Freezer (ltr/cu.ft)	57	85	95	•
Defrost – Freezer	Manual	Auto	Manual	
No. Full Width Drawers	2 Full Width	3 Full Width	3 Full Width	
elescopic Freezer Drawers				•
roduct Dimensions				
leight (mm)	1441	815	815	815
Vidth (mm)	540	596	596	596
Pepth (mm)	549	550	550	550
Built-in Dimensions	57/		330	
	1//1	015	015	015
Built-in Height (mm)	1441	815	815	815
uilt-in Width (mm)	540	596	596	596
uilt-In Depth (mm)	549	550	550	550
Ooor Fixing	BI Slide Door	BI UC DoD	BI UC DoD	BI UC DoD
erformance				
Annual Energy Consumption	204	191	187	172
inergy Efficiency Class	F	F	F	F
limate Class	SN-N-ST-T	SN-N-ST-T	SN-N-ST-T	SN-N-ST
		42	38	38
	45			
Noise	35 /-	12		25
Noise Freezing Capacity Power Cut Safe Rising Time	35 4 20	12 13	18 21	2.5 11

REFRIGERATION









				(Married)
	SKB582F1AF	ABK818E6NC	ABB812E6NC	SKK818E9ZC
verview				
TwinTech®	······	• • • • • • • • • • • • • • • • • • • •		••••
loFrost		•	•	•••••
_owFrost			••••	•••••
CustomFlex®				•••••
_ongFresh				•
Soft Close Doors		•	•	
Multi Airflow Cooling				
DynamicAir Technology				
_CD Touch Display/Electronic Controls/		EL	EL	E
Mechanical Temperature Control	Mechanical	Electronic Touch	Electronic Touch	Electronic Touch
.ED Lighting	•	•	•••••	•
Coolmatic		•	••••••	•
rostmatic	•••••	•	•	•••••
Holiday Mode		•	•••••	•
High Temperature Alarm		•	•	•••••
Door Open Alarm	••••••	•	•	•
Ooor Opening	Right & Reversible	Right & Reversible	Right & Reversible	Right & Reversible
Gross Capacity (ltr/cu.ft)	136	216	130	298
let Capacity (Itr/cu.ft)	133	204	120	275
ridge Features				
Gross Capacity Fridge (ltr/cu.ft)	136			298
Net Capacity Fridge (Itr/cu.ft)	133			275
Defrost – Fridge	Auto			• • • • • • • • • • • • • • • • • • • •
Glass Shelves				Auto
Flexi Shelf (Half Depth)	3			3
resh Box				
Bottle Rack				•
Large Telescopic Pull Out Salad Drawer				<u>.</u>
	1 Full Width			•••••
arge Salad Drawer	I Full Width		······	•••••
2 Extra Deep 1/2 Width Salad Drawers	·····	·····	·····	•••••
full Width Recessed Salad Drawer with 2 Glass Lids	·····		•••••	
Dairy Compartment with Lid				
No. Full Width Door Shelves				
/2 Width Sliding Door Shelf	•			
gg Tray	1 for 6 eggs		•	2 for 6 eggs
reezer Features				
Gross Capacity Freezer (ltr/cu.ft)		216	130	•••••
Net Capacity Freezer (ltr/cu.ft)		204	120	
Defrost – Freezer		Auto	Auto	
No. Full Width Drawers		5 Full Width	4 Full Width	
elescopic Freezer Drawers				•
roduct Dimensions				
Height (mm)	815	1769	1224	1769
Vidth (mm)	596	556	556	556
Pepth (mm)	550	549	549	549
Built-in Dimensions				
Built-in Height (mm)	815	1769	1224	1769
Built-in Width (mm)	596	556	556	556
Built-In Depth (mm)	550	549	549	549
Door Fixing	BI UC DoD	BI DoD	BI DoD	BI DoD
Performance	2. 30 202	2. 200	2. 505	5,505
Innual Energy Consumption	118	238	183	130
nergy Efficiency Class	F	E	103 E	
limate Class	SN-N-ST-T	SN-N-ST-T	SN-N-ST-T	SN-N-ST-T
annure eidaa	37	39	39	37
Joica		J7		
		20	20	
Noise Freezing Capacity Power Cut Safe Rising Time		20 24	20 22	•••••





SKE818E1DC

SKB812F1AC

	SKEOIOLIDC	SKB0121 IAC
Overview		
TwinTech® NoFrost		•••••
_owFrost	·····	•
CustomFlex®		•
_ongFresh		•••••
Soft Close Doors		•
Multi Airflow Cooling		•
DynamicAir Technology		•
		•
LCD Touch Display/Electronic Controls/ Mechanical Temperature Control	Electronic Touch	
_ED Lighting		
Coolmatic		•
Frostmatic		
Holiday Mode		•••••
High Temperature Alarm		
Door Open Alarm	Right & Reversible	Right & Reversible
Door Opening Gross Capacity (Itr/cuft)	Rigni & Reversible 314	205
Gross Capacity (ltr/cu.ft)	314	205
Net Capacity (ltr/cu.ft) Fridge Features	טוכ	ZUZ
	71/.	205
Gross Capacity Fridge (ltr/cu.ft)	314 310	••••••
Net Capacity Fridge (ltr/cu.ft) Defrost – Fridge	310 Auto	202 Auto
Glass Shelves	4 4	3 3
Flexi Shelf (Half Depth)	•	•
Fresh Box	•	•
Bottle Rack		•
Large Telescopic Pull Out Salad Drawer		•
Large Salad Drawer		•
2 Extra Deep 1/2 Width Salad Drawers		2 Half Width
Full Width Recessed Salad Drawer with 2 Glass Lids		Z Hall Walli
Dairy Compartment with Lid	•	•
No. Full Width Door Shelves		•••••
1/2 Width Sliding Door Shelf	•	•
Egg Tray	2 for 6 eggs	2 for 6 eggs
Freezer Features		
Gross Capacity Freezer (ltr/cu.ft)		
Net Capacity Freezer (ltr/cu.ft)		• • • • • • • • • • • • • • • • • • • •
Defrost – Freezer		•••••
No. Full Width Drawers		•••••
Telescopic Freezer Drawers	•	•
Product Dimensions	······	•
Height (mm)	1769	1219
Width (mm)	556	556
Depth (mm)	549	550
Built-in Dimensions	747	JJU
Built-in Height (mm)	1769	1219
	556	556
Built-in Width (mm) Built-In Depth (mm)	549	550
Door Fixina	BI DoD	BI DoD
Performance	חטע ום	עטע ום
	11/	107
Annual Energy Consumption	114	103
Energy Efficiency Class	E	E CN N CT T
Climate Class	SN-N-ST-T	SN-N-ST-T
Noise	35	35
Freezing Capacity		•
Power Cut Safe Rising Time Minimum Ambient Temperature	10	
MINIMUM AMDIENT LEMPERATURE	10	10

REFRIGERATION





RMB954F9VX

RMR76121NX

	RMB954F9VX	RMB76121NX
Overview		
「winTech®	•	
NoFrost		•
_owFrost		
CustomFlex®		
_ongFresh		
Soft Close Doors	•	
Multi Airflow Cooling	•••••	•
DynamicAir Technology		
_CD Touch Display/Electronic Controls/	Electronic Touch	LCD touch
Mechanical Temperature Control	Electronic roden	ECD louch
ED Lighting	•	•
Coolmatic	•	•
rostmatic	•	•
Holiday Mode		•
High Temperature Alarm	•	•
Door Open Alarm	•	•
Door Opening	Left & Right	Side by side
	····	······································
Gross Capacity (ltr/cu.ft)	680	608
Net Capacity (ltr/cu.ft)	541	549
Fridge Features		
Gross Capacity Fridge (ltr/cu.ft)	413	380
Net Capacity Fridge (ltr/cu.ft)	363	370
Defrost – Fridge	Auto	Auto
Glass Shelves	1	4
Flexi Shelf (Half Depth)	1	
Fresh Box	•	•
Bottle Rack		
Large Telescopic Pull Out Salad Drawer	•••••	
Large Salad Drawer		3 Full Width
2 Extra Deep 1/2 Width Salad Drawers	•	
Full Width Recessed Salad Drawer with 2 Glass Lids	····	
Dairy Compartment with Lid	•	•
No. Full Width Door Shelves	-	-
1/2 Width Sliding Door Shelf	•	
Egg Tray	1 for 12 eggs	1 for 6 eggs
Freezer Features		
Gross Capacity Freezer (ltr/cu.ft)	267	228
Net Capacity Freezer (Itr/cu.ft)	178	179
Defrost – Freezer	Auto	Auto
No. Full Width Drawers	2 Full width	2 Full width
Telescopic Freezer Drawers	Z i dil Widili	∠ i uli wiuiii
Product Dimensions		
Height (mm)	1782	1860
Width (mm)	913	1190
Depth (mm)	746	623
Built-in Dimensions		025
Built-in Height (mm)	1782	1860
Built-in Width (mm)	913	1190
Built-In Depth (mm)	746	623
Door Fixing	FS	FS
Performance		
Annual Energy Consumption	448	467
Energy Efficiency Class	F	F
Climate Class	SN-N-ST-T	SN-N-ST-T
annual cludd		43
Voise	/.`)	
	42 10	
Noise Freezing Capacity Power Cut Safe Rising Time	42 10 14	16 10









	AWUS052B5B	AWUS020B5B	KWK884520T	KWK884520M
verview				
winTech®				
loFrost				
.owFrost				
CustomFlex®		•		***************************************
ongFresh		•••••••••••••••••••••••••••••••••••••••		•
oft Close Doors		•		•••••
Aulti Airflow Cooling				•
				•
ynamicAir Technology				•••••
CD Touch Display/Electronic Controls/	Electronic	Electronic	Electronic	Electronic
1echanical Temperature Control	LIECTIONIC	Liectronic	Liectronic	LIECTIONIC
ED Lighting	•	•	•	•
Coolmatic				•
rostmatic		•		•
Holiday Mode				•••••
······································				•
ligh Temperature Alarm		•		•••••
oor Open Alarm				
Door Opening	Right & Reversible	Right & Reversible	Drop down	Drop down
ross Capacity (ltr/cu.ft)				
let Capacity (ltr/cu.ft)				
Capacity	46 Bottles	18 Bottles	18 Bottles	18 Bottles
ridge Features				•••••••••••••••••••••••••••••••
Gross Capacity Fridge (ltr/cu.ft)	145	58	52	52
· · · · · · · · · · · · · · · · · · ·			49	•••••
Net Capacity Fridge (ltr/cu.ft)	138	56	49	49
Defrost – Fridge				
Blass Shelves	6	6	2	2
lexi Shelf (Half Depth)				
resh Box				
Bottle Rack				
arge Telescopic Pull Out Salad Drawer				•
arge Salad Drawer				•
Extra Deep 1/2 Width Salad Drawers		•		•
•		•		•••••
Full Width Recessed Salad Drawer with ! Glass Lids				
Dairy Compartment with Lid				
lo. Full Width Door Shelves				
/2 Width Sliding Door Shelf				
gg Tray		•••••••••••••••••••••••••••••••••••••••		•••••••
reezer Features				•
Gross Capacity Freezer (ltr/cu.ft)				
······································				•••••
let Capacity Freezer (ltr/cu.ft)				
Defrost – Freezer				
lo. Full Width Drawers				
elescopic Freezer Drawers				
roduct Dimensions				
leight (mm)	820	820	455	455
· · · · · · · · · · · · · · · · · · ·	595	294	595	595
Vidth (mm)		• · · · · · · · · · · · · · · · · · · ·		· •· · · · · · · · · · · · · · · · · ·
Depth (mm)	565	571	566	566
Built-in Dimensions				
Built-in Height (mm)	820	820	450	450
Built-in Width (mm)	595	294	560	560
uilt-In Depth (mm)	565	571	550	550
Door Fixing	BI Wide Door	BI Wide Door	BI Drop Down	Bl Drop Down
erformance			=:=:=6.22	= = : = : = : = : : : : : : : : : : : :
	1/0	1/ 0	07	07
nnual Energy Consumption	149	140	83	83
nergy Efficiency Class	G	G	F	F
limate Class	N-ST	N-ST	ST	ST
loise	39	41	39	39
reezing Capacity				
		· · · · · · · · · · · · · · · · · · ·		
Power Cut Safe Rising Time				

SINGLE OVENS









BSK999330T

BSK999330M

BSK798380M

BSK792380B

	D3K7773301	D3K7773301·1	D3K7 703001·1	D3R7 72300B
Oven Features				
Control Type	Command Wheel	Command Wheel	Touch	Touch
Connected Appliance	Yes	Yes		
ntegrated Oven Camera	Yes	Yes		
Menu Guided Cooking	Yes	Yes	Yes	Yes
Oven Capacity (Usable)	70	70	70	70
Number of Functions	25	25	25	25
Fast Heat Up	Yes	Yes	Yes	Yes
SoftMotion™ Soft Close Door	Yes	Yes	Yes	Yes
Fully Programmable Timer	Yes	Yes	Yes	Yes
Core Temperature Sensor	Yes	Yes	Yes	Yes
FloodLight™	Yes	Yes	Yes	Yes
SideLight	Yes	Yes	Yes	Yes
Cleaning	Steam	Steam	Steam	Steam
Oven Door Glazing	Four	Four	Four	Four
Cooling Fan	Yes	Yes	Yes	Yes
Steam	Yes & Steamify®	Yes & Steamify®	Yes & Steamify®	Yes & Steamify®
Accessories	•••••••••••	••••	••••••	•••••
Number of Shelves	Two	Two	Two	Two
Telescopic Runners	Yes	Yes	Yes	Yes
MaxiTray™				•
Full Width Grill/Meat Pan (with Trivet)	Yes	Yes	Yes	Yes
Perforated Baking Trays	Yes	Yes	Yes	Yes
Patisserie Tray	Yes	Yes	Yes	Yes
Dimensions				
Appliance Dimensions				
Height (mm)	594	594	594	594
Nidth (mm)	595	595	595	595
Depth (mm)	567	567	567	567
Aperture Dimensions				
Height (mm)	590	590	590	590
Width (mm)	560	560	560	560
Depth (mm)	550	550	550	550
Performance		•	••••••	•
Oven Temperature Range (°C)	30°C-230°C	30°C-230°C	30°C-230°C	30°C-230°C
Energy Efficiency Class	A++	A++	A++	A++
Energy Efficiency Class in Mode Static/Fan	Fan	Fan	Fan	Fan
Energy Consumption Fan (kWh)	0.52	0.52	0.52	0.52
Energy Consumption Static (kWh)	0.99	0.99	0.99	0.99
Largest Baking Sheet Surface Area	1424	1424	1424	1424
Connected Load (W)	3500	3500	3500	3500
Fuse Rating (A)	16	16	16	16







BSK782320M

BSK978330M

BSK774320M

Oven	Feat	ures
------	------	------

Oven Features			
Control Type	Touch	Command Wheel	Touch
Connected Appliance		Yes	
Integrated Oven Camera			
Menu Guided Cooking	Yes	Yes	Yes
Oven Capacity (Usable)	70	71	71
Number of Functions	17	19	18
Fast Heat Up	Yes	Yes	Yes
SoftMotion™ Soft Close Door	Yes	Yes	Yes
Fully Programmable Timer	Yes	Yes	Yes
Core Temperature Sensor	Yes	Yes	Yes
FloodLight™	Yes	Yes	Yes
SideLight SideLight	Yes	Yes	Yes
Cleaning	Steam	Pyrolytic	Pyrolytic
Oven Door Glazing	Three	Four	Four
Cooling Fan	Yes	Yes	Yes
Steam	Yes	Yes	Yes
Accessories	••••••	•	
Number of Shelves	Two	Two	Two
Telescopic Runners	••••••	Yes	Yes
MaxiTray™	Yes		Yes
Full Width Grill/Meat Pan (with Trivet)	Yes	Yes	Yes
Perforated Baking Trays	Yes	······································	
Patisserie Tray	••••••		
Dimensions	•		
Appliance Dimensions			
Height (mm)	594	594	594
Width (mm)	595	595	595
Depth (mm)	567	567	567
Aperture Dimensions	••••••	······································	
Height (mm)	590	590	590
Width (mm)	560	560	560
Depth (mm)	550	550	550
Performance	••••••	•	
Oven Temperature Range (°C)	30°C−230°C	30°C-300°C	30°C-300°C
Energy Efficiency Class	A+	A++	A+
Energy Efficiency Class in Mode Static/Fan	Fan	Fan	Fan
Energy Consumption Fan (kWh)	0.68	0.52	0.69
Energy Consumption Static (kWh)	0.99	1.09	0.99
Largest Baking Sheet Surface Area	1424	1424	1424
Connected Load (W)	3500	3500	3500
Fuse Rating (A)	16	16	16

SINGLE OVENS









BPK948330T

BPK948330M

BPK748380M

BPK748380B

_		_		
Oν	en	Fea	tu	res

Control Type	Command Wheel	Command Wheel	Touch	Touch
Connected Appliance	Yes	Yes		
ntegrated Oven Camera				•
Menu Guided Cooking	Yes	Yes	Yes	Yes
Oven Capacity (Usable)	71	71	71	71
Number of Functions	17	17	16	16
Fast Heat Up	Yes	Yes	Yes	Yes
SoftMotion™ Soft Close Door	Yes	Yes	Yes	Yes
Fully Programmable Timer	Yes	Yes	Yes	Yes
Core Temperature Sensor	Yes	Yes	Yes	Yes
FloodLight™	Yes	Yes	Yes	. Yes
SideLight	Yes	Yes	Yes	Yes
Cleaning	Pyrolytic	Pyrolytic	Pyrolytic	Pyrolytic
Oven Door Glazing	Four	Four	Four	Four
Cooling Fan	Yes	Yes	Yes	Yes
Steam				•••••
Accessories				
Number of Shelves	Two	Two	Two	Two
Telescopic Runners	Yes	Yes	Yes	Yes
MaxiTray™				
Full Width Grill/Meat Pan (with Trivet)	Yes	Yes	Yes	Yes
Perforated Baking Trays				
Patisserie Tray				
Dimensions				
Appliance Dimensions				
Height (mm)	594	594	594	594
Width (mm)	595	595	595	595
Depth (mm)	567	567	567	567
Aperture Dimensions				
Height (mm)	590	590	590	590
Nidth (mm)	560	560	560	560
Depth (mm)	550	550	550	550
Performance				
Oven Temperature Range (°C)	30°C-300°C	30°C-300°C	30°C-300°C	30°C-300°C
Energy Efficiency Class	A++	A++	A++	A++
Energy Efficiency Class in Mode Static/Fan	Fan	Fan	Fan	Fan
Energy Consumption Fan (kWh)	0.52	0.52	0.52	0.52
Energy Consumption Static (kWh)	1.09	1.09	1.09	1.09
_argest Baking Sheet Surface Area	1424	1424	1424	1424
Connected Load (W)	3500	3500	3500	3500
Fuse Rating (A)	16	16	16	16









BPK744L21M/R21M

BPK55632PM

BPK355020M

BCK55632XM

Oven Features

Oven Features				
Control Type	Touch	Retractable + Touch	Retractable + Touch	Retractable + Touch
Connected Appliance			••••	• • • • • • • • • • • • • • • • • • • •
ntegrated Oven Camera			••••	•
Menu Guided Cooking	Yes			•
Oven Capacity (Usable)	71	<u>.</u>	71	71
Number of Functions	21	10	11	11
Fast Heat Up	Yes	Yes	Yes	•
SoftMotion™ Soft Close Door		Yes	••••	Yes
Fully Programmable Timer	Yes	Yes	Yes	Yes
Core Temperature Sensor	Yes	Yes	•••••	Yes
FloodLight™	Yes	Yes		Yes
SideLight	Yes	Yes	Yes	Yes
Cleaning	Pyrolytic	Pyrolytic	Pyrolytic	Catalytic
Oven Door Glazing	Four	Three	Four	Three
Cooling Fan	Yes	Yes	Yes	Yes
Steam				•
Accessories				
Number of Shelves	Two	Two	Two	Two
Telescopic Runners		Yes		Yes
MaxiTray™	Yes	Yes		•
Full Width Grill/Meat Pan (with Trivet)	Yes	Yes	Yes	Yes
Perforated Baking Trays				••••
Patisserie Tray				•
Dimensions				
Appliance Dimensions				•
Height (mm)	594	594	594	594
Width (mm)	594	594	595	595
Depth (mm)	568	567	567	567
Aperture Dimensions			•	•••••
Height (mm)	600	590	590	590
Width (mm)	560	560	560	560
Depth (mm)	550	550	550	550
Performance				
Oven Temperature Range (°C)	30°C-300°C	30°C-300°C	30°C-300°C	30°C-300°C
Energy Efficiency Class	A+	<u>A</u> +	A+	A+
Energy Efficiency Class in Mode Static/Fan	Fan	Fan	Fan	Fan
Energy Consumption Fan (kWh)	0.69	0.69	0.69	0.69
Energy Consumption Static (kWh)	0.93	0.99	1.09	1.09
_argest Baking Sheet Surface Area	1424	1418	1418	1418
Connected Load (W)	3480	3200	3200	3200
Fuse Rating (A)	16	16	16	16

Fuse Rating (A)

DOUBLE OVENS







DCK731110N

DCK431110M

DUK731110M

	DCK/31110M	DCK43THOM	DUK/31110M
Oven Features			
T=Top/B=Bottom		•	• • • • • • • • • • • • • • • • • • • •
Control Type	Touch	Retractable	Touch
Oven Capacity (Usable)	39/61	43/68	39/46
Number of Cooking Functions	· · · · · · · · · · · · · · · · · · ·	6/8	8/10
Fully Programmable Timer		Yes	Yes
Cleaning	Catalytic	Catalytic	Catalytic
Oven Doors Glazing	3/3	2/2	3/3
Lights	1/1	1/1	1/1
Cooling Fan	Yes	Yes	Yes
Accessories			
Number of Shelves	2/2	1/2	1/2
Full Width Grill/Meat Pan (with Trivet)	Yes/Yes	_/Yes	_/Yes
Dimensions			
Appliance Dimensions		•	•
Height (mm)	888	888	715
Width (mm)	594	594	594
Depth (mm)	548	548	548
Aperture Dimensions			
Height (mm)	875	875	870
Width (mm)	560	560	600
Depth (mm)	550	550	550
Performance			
Energy Efficiency Class	A/A	A/A	A/A
Energy Efficiency Class in Mode Static/Fan	Fan/Fan	Static/Fan	Fan/Fan
Energy Consumption Fan (kWh)	0.79/0.82	N/A/0.86	0.79/0.79
Cook Time Standard Load Fan (Min)	49/49	NA/44	49/48
Energy Consumption Static (kWh)	0.89/0.89	0.78/0.86	0.85/0.75
Cook Time Standard Load Static (Min)	52/52	48/45	53/50
Largest Baking Sheet Surface Area (cm²)	1175	1175	1175
Connected Load (W)	5800	5100	5900

COMPACT COMBLOVENS









	KMK968000T	KMK968000M	KMK768080M	KMK768080B
Oven Features				
Combi Microwave, Fan Oven and Grill	Yes	Yes	Yes	Yes
Duo Microwave and Grill	Yes	Yes	Yes	Yes
Solo Microwave	Yes	Yes	Yes	Yes
Oven Volume (ltr)	43	43	43	43
Auto Cook Programmes	90	90	100	100
Control Type	Command Wheel	Command Wheel	Touch	Touch
Connected Appliance	Yes	Yes		***************************************
Electronic Clock/Programmer	Yes	Yes	Yes	Yes
Quickstart	Yes	Yes	Yes	Yes
Powersave Mode	Yes	Yes	Yes	Yes
Programme End Signal	Yes	Yes	Yes	Yes
Drop Down Door	Yes	Yes	Yes	Yes
Dimensions				
Appliance Dimensions				
Height (mm)	455	455	455	455
Width (mm)	594	594	594	594
Depth (mm)	567	567	567	
Built-in Dimensions				***************************************
Height (mm)	450	450	450	450
Width (mm)	560	560	560	560
Depth (mm)	550	550	550	550
Performance				
Microwave Output (W)	1000	1000	1000	1000
Grill Output (W)	1900	1900	1900	1900
Convection Oven Output (W)	1650	1650	1650	1650
Connected Load (W)	3000	3000	3000	3000
Fuse Rating (A)	13	16	13	13





	KMK565000M	KMK525800M
Oven Features		
Combi Microwave, Fan Oven and Grill	Yes	
Duo Microwave and Grill	Yes	Yes
Solo Microwave	Yes	Yes
Oven Volume (ltr)	43	42
Auto Cook Programmes	45	12
Control Type	Retractable + Touch	Retractable + Touch
Electronic Clock/Programmer	Yes	Yes
Quickstart	Yes	Yes
Powersave Mode	Yes	Yes
Programme End Signal	Yes	Yes
Drop Down Door	Yes	Yes
Dimensions		
Appliance Dimensions		
Height (mm)	455	455
Width (mm)	594	594
Depth (mm)	567	567
Built-in Dimensions		•••••
Height (mm)	450	450
Width (mm)	560	560
Depth (mm)	550	550
Performance		
Microwave Output (W)	1000	1000
Grill Output (W)	1900	1200
Convection Oven Output (W)	1650	
Connected Load (W)	3000	2100
Fuse Rating (A)	13	13

COFFEE MACHINES







	KKK994500T	KKK994500M	KKK884500M
Features			
Electronic Touch Controls	Command Wheel	Command Wheel	Touch
LED Display	Yes	Yes	Yes
Automatic Cappuccino Function	Yes	Yes	Yes
Pre-Programmed Coffee Selection	Yes	Yes	Yes
Water Sensor with LED when Refill Required	Yes	Yes	Yes
Steam/Water Spout with LED Indicators	Yes	Yes	Yes
Height Adjustable Coffee Dispenser	Yes	Yes	Yes
Lamp	Yes	Yes	Yes
Dimensions			
Appliance Dimensions		_	
Height (mm)	455	455	455
Width (mm)	594	594	594
Depth (mm)	361	361	361
Built-in Dimensions			•
Height (mm)	450	450	450
Width (mm)	560	560	560
Depth (mm)	550	550	550
Electrical Connection			
Connected Load (W)	1350	1350	1350
Fuse Rating (A)	13	13	13
Working Pressure (Bar)	15	15	15

WARMING DRAWERS









	KDK912924M	KDE912924M	KDK911424T	KDK911424M
Features				
Place Settings	12	12	6	6
Cups And Glass Warming (40°C)	Yes	Yes	Yes	Yes
Plate Warming (60°C)	Yes	Yes	Yes	Yes
Food Warming (80°C Max)	Yes	Yes	Yes	Yes
Defrosting (30°C Max)	Yes	Yes	Yes	Yes
Heating Element	Yes	Yes	Yes	Yes
Fan Air Circulation	Yes	Yes	Yes	Yes
Rotary Control Knob	Yes	Yes	Yes	Yes
Variable Temperature Control	Yes	Yes	Yes	Yes
On/Off LED	Yes	Yes	Yes	Yes
Anti-Slip Mat	Yes	Yes	Yes	Yes
Temperature Range	30°C-80°C	30°C-80°C	30°C-80°C	30°C−80°C
Dimensions				
Appliance Dimensions				
Height (mm)	295	295	131	131
Width (mm)	595	595	595	595
Depth (mm)	535	535	500	500
Built-in Dimensions				
Height (mm)	295	295	139	139
Width (mm)	560	560	560	560
Depth (mm)	550	550	550	550
Performance				
Connected Load (W)	550	550	430	430
Fuse Rating (A)	13	13	13	13





	KDE911424M	KDE911424B
Features		
Place Settings	6	6
Cups and Glass Warming (40°C)	Yes	Yes
Plate Warming (60°C)	Yes	Yes
Food Warming (80°C Max)	Yes	Yes
Defrosting (30°C Max)	Yes	Yes
Heating Element	Yes	Yes
Fan Air Circulation	Yes	Yes
Rotary Control Knob	Yes	Yes
Variable Temperature Control	Yes	Yes
On/Off LED	Yes	Yes
Anti-slip Mat	Yes	Yes
Temperature Range	30°C-80°C	30-80°C
Dimensions		
Appliance Dimensions		
Height (mm)	131	131
Width (mm)	595	595
Depth (mm)	500	500
Built-in Dimensions		
Height (mm)	139	139
Width (mm)	560	560
Depth (mm)	550	550
Performance		
Connected Load (W)	430	430
Fuse Rating (A)	13	13

VACUUM SEALERS







	KDK911423T	KDK911423M	KDE911423B
Features			
Place Settings	Touch	Touch	Touch
Cups and Glass Warming (40°C)	White	White	White
Plate Warming (60°C)	Yes	Yes	Yes
Variable Temperature Control	Yes	Yes	Yes
On/Off LED	Yes	Yes	Yes
Anti-slip Mat	Yes	Yes	Yes
Temperature Range	Yes	Yes	Yes
Dimensions			
Appliance Dimensions			
	131	131	131
Width (mm)	595	595	595
Depth (mm)	510	510	510
Built-in Dimensions			
Height (mm)	139	139	139
Width (mm)	560	560	560
Depth (mm)	550	550	550
Performance			
Connected Load (W)	400	400	400
Fuse Rating (A)	13	13	13

MICROWAVES







	MBE2658SEM	MBB1756SEM	MBB1755SEM
Features			
Microwave & Grill			
Solo Microwave	•	•	•
Oven Volume (Itr)	26	17	17
Auto Defrost By Weight Programmes	4	4	4
Default Favourite Auto Menus	3	3	3
Control Type	Command Wheel/ Touch on Glass	Command Wheel/ Touch on Glass	Command Wheel/ Touch on Glass
Electronic Clock/Programmer	•	•	•
Quickstart	•	•	•
Powersave Mode	•	•	•
Programme End Signal	•	•	•
Dimensions			•
Appliance Dimensions			
Height (mm)	459	371	371
Width (mm)	596	594	494
Depth (mm)	404	316	316
Aperture Dimensions			
Height (mm)	450	360	360
Width (mm)	562	562	462
Depth (mm)	500	300	300
Performance			
Microwave Output (W)	900	800	800
Grill Output (W)	•	•	•
Connected Load (W)	1400	1250	1250
Fuse Rating (A)	10	10	10

INDUCTION HOBS











	IAE84881FB	IKK86681FB	IAE84851FB	IKE85651FB	IPE84531FB
Features					
Control Type	Touch	Touch	Touch	Touch	Touch
Display	TFT	•	TFT	•	•••••
Control Position	Front Right	Front Left & Middle & Right	Front Right	N/A	Front Middle
Bridge Function	Yes	Yes	Yes	Yes	
Automatic Heat Up (Automax)	No			Yes	Yes
Stop & Go	Yes	Yes	Yes	Yes	Yes
Residual Heat Indicator	Yes	Yes	Yes	Yes	Yes
co Timer	Yes	Yes	Yes	Yes	Yes
Minute Minder	Yes	Yes	Yes	Yes	Yes
Count Up Timer	Yes	Yes	Yes	Yes	Yes
Pan Sensor	Yes	Yes	Yes	Yes	Yes
Boosters	Yes	Yes	Yes	Yes	Yes
Child Lock	Yes	Yes	Yes	Yes	Yes
Hob ² Hood		·····•	Yes	••••••••	Yes
	Yes	Yes	res	Yes	•
Pure Black Design					Yes
SenseBoil®				••••	•····
SenseFry®	Yes		Yes		••••
SensePro®	Yes				
Zone Specification		•			•
ront Left Spec	Induction	Induction	Induction	Induction	Induction
Front Left Rating (W)	2300/3200	2000/3200	2300/3200	2300/3200	2300/3200
Front Left Diameter (mm)	210	180x220	220	210	210
Rear Left Spec	Induction	Induction	Induction	Induction	Induction
Rear Left Rating (W)	2300/3200	2000/3200	2300/3200	2300/3200	2300/3200
Rear Left Diameter (mm)	210	180x220	220	210	210
Front Middle Spec	Induction	Induction		Induction	
ront Middle Rating (W)	1400/2500	2000/3200		2300/3200	
ront Middle Diameter (mm)	145	180x220		240	•
Rear Middle Spec		Induction	Induction		••••
Rear Middle Rating (W)		2300/3200	2300/3200		Induction
Rear Middle Diameter (mm)		180x220mm	210		2300/3200
Front Right Spec		Induction	Induction	Induction	210
ront Right Rating (W)		2000/3200	1800/2800	2300/3200	2300/3200
ront Right Diameter (mm)		180x220	180	210	210
Rear Right Spec	Induction	Induction		Induction	•••••
Rear Right Rating (W)	2300/3600	2000/3200		2300/3200	•
Rear Right Diameter (mm)	240	180x220		210	
Dimensions					
Appliance Dimensions				••••	•••••
Vidth (mm)	780	780	780	810	780
Depth (mm)	520	520	520	520	520
Aperture Dimensions					•••••
Height (mm)	44	44	44	44	44
Vidth (mm)	750	750	750	780	750
Depth (mm)	490	490	490	490	490
Electrical Connection					
Connected Load (W)	7350	7350	7350	7350	7400
Fuse Rating (A)	30	30	30	30	30









	IAE84421FB	IKE85751FB	IAE84411FB	IKB84401FB
Features				
Control Type	Touch	Touch	Touch	Touch
Display				•
Control Position	Front Right	Front Middle	Front Middle	Front Right
Bridge Function	Yes	Yes		
Automatic Heat Up (Automax)	Yes	Yes	Yes	Yes
Stop & Go / Pause	Yes	Yes	Yes	Yes
Residual Heat Indicator	Yes	Yes	Yes	Yes
Eco Timer	Yes	Yes	Yes	Yes
Minute Minder	Yes	Yes	Yes	Yes
Count Up Timer	Yes	Yes	Yes	Yes
Pan Sensor	Yes	Yes	Yes	Yes
Boosters	Yes	Yes	Yes	Yes
Child Lock	Yes	Yes	Yes	Yes
Hob ² Hood		• · · · · · · · · · · · · · · · · · · ·	••	•
• • • • • • • • • • • • • • • • • • • •	Yes	Yes	Yes	Yes
Pure Black Design				•
SenseBoil®	Yes	• • • • • • • • • • • • • • • • • • • •	Yes	•
SenseFry®				••••
SensePro®				
Zone Specification				
Front Left Spec	Induction	Induction	Induction	Induction
Front Left Rating (W)	2300/3200	1400/2500	2300/3200	2300/3200
Front Left Diameter (mm)	210	145	210	210
Rear Left Spec	Induction	Induction	Induction	Induction
Rear Left Rating (W)	2300/3200	2300/3200	2300/3200	2300/3200
Rear Left Diameter (mm)	210	210	210	210
Front Middle Spec	Induction	Induction	•	Induction
Front Middle Rating (W)	1400/2500	2300/3200	••••••	2300/3200
Front Middle Diameter (mm)	145	210	•	210
Rear Middle Spec	•	•	•	•••••
Rear Middle Rating (W)	•	•	•	••••••
Rear Middle Diameter (mm)	•	•		••••
Front Right Spec		Induction	Induction	
Front Right Rating (W)		1400/2500	2300/3200	
Front Right Diameter (mm)		145	210	
Rear Right Spec	Induction	Induction	Induction	Induction
Rear Right Rating (W)	2300/3600	2300/3200	2300/3200	2300/3200
Rear Right Diameter (mm)	240	210	210	210
Dimensions				
Appliance Dimensions				
Width (mm)	780	780	780	780
Depth (mm)	520	520	520	520
Aperture Dimensions	•			
Height (mm)	44	44	44	44
Width (mm)	750	750	750	750
Depth (mm)	490	490	490	490
Electrical Connection		<u></u>		•
Connected Load (W)	7350	7350	7350	7350
Fuse Rating (A)	30	30	30	30

INDUCTION HOBS









	IPE64551FB	IKE64450FB	IAE64421FB	IAE64411FB
eatures				
Control Type	Touch	Touch	Touch	Touch
Display	••••••••••••••••		••••••	••••••
Control Position	Front Middle	Front Middle	Front Middle	Front Right
ridge Function	Yes	Yes	Yes	•••••
Nutomatic Heat Up (Automax)	Yes	Yes	Yes	Yes
top & Go	Yes	Yes	Yes	Yes
Residual Heat Indicator	Yes	Yes	Yes	Yes
co Timer	Yes	Yes	Yes	Yes
linute Minder	Yes	Yes	Yes	Yes
ount Up Timer	Yes	Yes	Yes	Yes
Pan Sensor	Yes	Yes	Yes	Yes
loosters	Yes	Yes	Yes	Yes
hild Lock	Yes	Yes	Yes	Yes
		res	res	• · · · · · · · · · · · · · · · · · · ·
lob ² Hood	Yes			Yes
Pure Black Design	Yes		• • • • • • • • • • • • • • • • • • • •	
enseBoil®			Yes	Yes
enseFry®				
ensePro®	••••••		•	•••••
one Specification			•••••	•••••
ront Left Spec	Induction	Induction	Induction	Induction
ront Left Rating (W)	2300/3200	2300/3200	2300/3200	2300/3700
ront Left Diameter (mm)	210	210	210	210
Rear Left Spec	Induction	Induction	Induction	Induction
lear Left Rating (W)	2300/3200	2300/3200	2300/3200	1800/2800
ear Left Diameter (mm)	210	210	210	180
ront Middle Spec	•••••••••••••••••••••••••••••••••••••••		•	•
ront Middle Rating (W)			***************************************	••••••
ront Middle Diameter (mm)	••••••••••••••••••		•	•••••
Rear Middle Spec	•			•••••
Rear Middle Rating (W)			•	•••••
Rear Middle Diameter (mm)	••••••		•	•••••
ront Right Spec	Induction	Induction	Induction	Induction
ront Right Rating (W)	2300/3200	2300/3200	1400/2500	1400/2500
ront Right Diameter (mm)	210	210	145	145
ear Right Spec	Induction	Induction	Induction	Induction
ear Right Rating (W)	2300/3200	2300/3200	1800/2800	1800/2800
Rear Right Diameter (mm)	210	210	180	180
Dimensions	—::-			
ppliance Dimensions				
Vidth (mm)	590	590	590	590
Pepth (mm)	520	520	520	520
perture Dimensions	•••••		••••••	
leight (mm)	44	44	44	44
Vidth (mm)	560	560	560	560
Depth (mm)	490	490	490	490
	1,0			
Connected Load (W)	7400	7350	7350	7350









	IKB64401FB	ILB64334CB	IKE95751FB	IKK93431FB
Features				
Control Type	Touch	Touch	Touch	Touch
Display		•	•	••••
Control Position	Front Right	Front Right	Front Middle	Front Middle
Bridge Function			Yes	•••••
Automatic Heat Up (Automax)	Yes	Yes	Yes	Yes
Stop & Go / Pause	Yes	Yes	Yes	Yes
Residual Heat Indicator	Yes	Yes	Yes	Yes
Eco Timer	Yes	Yes	Yes	Yes
Minute Minder	Yes	Yes	Yes	Yes
Count Up Timer	Yes	Yes	Yes	Yes
Pan Sensor	•	Yes	Yes	Yes
Boosters	Yes	Yes	Yes	Yes
		• · · · · · · · · · · · · · · · · · · ·	• · · · · · · · · · · · · · · · · · · ·	•
Child Lock	Yes	Yes	Yes	Yes
Hob ² Hood	Yes		Yes	•
Pure Black Design			• • • • • • • • • • • • • • • • • • • •	
SenseBoil®				•
SenseFry®				
SensePro®	••••••	•	•	•
Zone Specification			• • • • • • • • • • • • • • • • • • • •	•••••
Front Left Spec	Induction	Induction	Induction	
Front Left Rating (W)	2300/3700	2300/3200	2300/3200	•
Front Left Diameter (mm)	210	210	220	•
Rear Left Spec	Induction	Induction	Induction	Induction
Rear Left Rating (W)	1800/2800	1800/2800	2300/3200	2300/3200
Rear Left Diameter (mm)	180	185	220	210
Front Middle Spec		105	Induction	210
Front Middle Rating (W)		•••••	1800/3700	•
Front Middle Diameter (mm)		•••••	280	•••••
Rear Middle Spec		•	200	Induction
Rear Middle Rating (W)		•	***************************************	2300/3200
Rear Middle Diameter (mm)				2300/3200
Front Right Spec	Industion	Industion	Industion	
Front Right Rating (W)	Induction 1400/2500	Induction 1400/2500	Induction 1400/2500	•
Front Right Diameter (mm)	145	1400/2500	1400/2500	
	······································	•	•	Industion
Rear Right Spec	Induction	Induction 1800/2800	Induction 2300/3200	Induction 2300/3200
Rear Right Rating (W)	1800/2800			
Rear Right Diameter (mm)	180	180	210	210
Dimensions				
Appliance Dimensions				
Width (mm)	590	590	910	910
Depth (mm)	520	520	520	410
Aperture Dimensions		••••	• • • • • • • • • • • • • • • • • • • •	•••••
Height (mm)	44	44	44	44
Width (mm)	560	560	880	880
Depth (mm)	490	490	490	380
Electrical Connection				
Connected Load (W)	7350	3000	7200	6900
Fuse Rating (A)	30	13	30	30

EXTRACTOR HOBS







/ CDF84779FB

CCE84751FB / CDE84751FB

IDE74243IB

	CCE84779FB / CDE84779FB	CCE84751FB / CDE84751FB	IDE74243IB
Hob Features			
Control Type	Touch on Glass Slide Controls	Touch on Glass Slide Controls	Touch Control
Display	LED	LED	LED
Bridge Function	 Double FlexiBridge® 	Double Bridge	• (1)
Automatic Heat Up	•		•
ause	•	•	•
Residual Heat Indicator	•		
imer	•	•	•
an Sensor	•	•	•
Child Lock	•	•	•
Zone Specification			
ront Left Spec			
ront Left Rating (W)	2300/3200	2300/3200	1600/1850
ront Left Diameter (mm)	220	210	180x200
Rear Left Spec		•	
Rear Left Rating (W)	2300/3200	2300/3200	2100/3000
Rear Left Diameter (mm)	220	210	180x200
ront Right Spec	——————————————————————————————————————		
ront Right Rating (W)	2300/3200	1200/1400	1200/1400
ront Right Diameter (mm)	220	210	160
Rear Right Spec			
Rear Right Rating (W)	2300/3200	2300/3000	2300/3000
Rear Right Diameter (mm)	220	210	200
Cooker Hood Features			
Control Type	Touch on Glass Slide Controls	Touch on Glass Slide Controls	Touch Control
an Speed	3 + Intensive, Boost and Breeze	3 + Intensive, Boost and Breeze	3 + 2 Intensive
in 1 Charcoal & Grease Filter Included	• (CCE84779FB only)	• (CCE84751FB only)	•
Grease Filter Only	Aluminium mesh CDE84779FB only	Aluminium mesh CDE84751FB only	Aluminium mesh
Efficiency Max (m3/h) (Recirculation / External Ducted)	465 / 500	465 / 500	385 / 405
Efficiency Intensive (m3/h) (Recirculation / External Ducted)	585 / 630	585 / 630	495 / 630
Dimensions		•	
Vidth (mm)	830	830	830
Depth (mm)	515	515	510
perture Dimensions			
leight (mm)	210	210	210
Vidth (mm)	780	780	720
Depth (mm)	490	490	510
Electrical Connection		•	
Connection Load (W)	7350	7350	7350
use Rating (A)	32	32	32
nergy Class	A+	A+	A

CERAMIC HOB



HK634060XB

Control Type Touch Control Position Front Right Automatic Heat Up (Automax) Yes Stop & Go Yes Residual Hearl Indicator Yes Minute Minder Yes Count Up Timer Yes Child Lock Yes Zone Specification Front Left Spec Front Left Spec Dual Hilight Front Left Rating (W) 750/2200 Front Left Rating (W) 120/210 Rear Left Spec Hilight Rear Left Spec Hilight Rear Left Diameter (mm) 145 Front Middle Spec Front Middle Spec Front Middle Spec Rear Middle Spec Rear Middle Spec Rear Middle Diameter (mm) Rear Middle Diameter (mm) 1200 Front Right Rating (W) 1500/2400 Rear Right Rating (W) 1500/2400 Rear Right Rating (W) 1500/2400 <t< th=""><th>Features</th><th></th></t<>	Features	
Automatic Heat Up (Automax) Yes Stop & Go Yes Residual Heat Indicator Yes Minute Minder Yes Count Up Timer Yes Child Lock Yes Child Lock Yes Child Lock Yes Count Up Timer Yes Child Lock Yes Zone Specification Front Left Spec Dual Hilight Front Left Rating (W) 750/2200 Front Left Rating (W) 750/2200 Front Left Diameter (mm) 120/210 Rear Left Rating (W) 1200 Rear Left Rating (W) 1200 Rear Left Rating (W) 145 Front Middle Spec Front Middle Spec Front Middle Diameter (mm) Rear Middle Diameter (mm) Rear Middle Diameter (mm) Front Right Spec Hilight Front Right Spec Hilight Front Right Spec Hilight Front Right Spec Dual Hilight Rear Right Diameter (mm) 145 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 580 Depth (mm) 38 Width (mm) 560 Depth (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W) 7000	Control Type	Touch
Stop & Go	Control Position	
Residual Heat Indicator Yes Minute Minder Yes Count Up Timer Yes Child Lock Yes Zone Specification Tent Left Spec Front Left Rating (W) 750/2200 Front Left Diameter (mm) 120/210 Rear Left Spec Hillight Rear Left Rating (W) 1200 Rear Left Diameter (mm) 145 Front Middle Spec Front Middle Spec Front Middle Rating (W) Front Middle Diameter (mm) Rear Middle Diameter (mm) Rear Middle Diameter (mm) Rear Middle Diameter (mm) 1200 Front Right Spec Hillight Front Right Rating (W) 1200 Front Right Rating (W) 1200 Front Right Rating (W) 1500/2400 Rear Right Rating (W) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 38 Width (mm) 560 Depth (mm) 490 E	Automatic Heat Up (Automax)	Yes
Minute Minder Yes Count Up Timer Yes Child Lock Yes Zone Specification Tont Left Spec Front Left Spec Dual Hillight Front Left Diameter (mm) 120/210 Rear Left Spec Hillight Rear Left Rating (W) 1200 Rear Left Rating (W) 145 Front Middle Spec Front Middle Rating (W) Front Middle Rating (W) Front Middle Diameter (mm) Rear Middle Diameter (mm) Front Right Spec Rear Middle Diameter (mm) 1200 Front Right Spec Hillight Front Right Rating (W) 1200 Front Right Rating (W) 1200 Front Right Diameter (mm) 145 Rear Right Spec Dual Hillight Rear Right Diameter (mm) 1500/2400 Rear Right Diameter (mm) 576 Dimensions Midth (mm) 576 Depth (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection	Stop & Go	Yes
Count Up Timer Yes Child Lock Yes Zone Specification Front Left Spec Dual Hilight Front Left Rating (W) 750/2200 Front Left Diameter (mm) 120/210 Rear Left Rating (W) 1200 Rear Left Rating (W) 1200 Rear Left Diameter (mm) 145 Front Middle Spec Front Middle Rating (W) Front Middle Spec Rear Middle Diameter (mm) Rear Middle Diameter (mm) Front Right Spec Hillight Front Right Spec Hillight Front Right Rating (W) 1200 Front Right Rating (W) 1200 Front Right Diameter (mm) 145 Rear Right Rear Right Spec Dual Hillight Rear Right Diameter (mm) 1500/2400 Rear Right Diameter (mm) 1500/2400 Rear Right Diameter (mm) 576 Depth (mm) 516 Aperture Dimensions Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W) 7000 Front Right Diameter (mm) Front Right Diameter (mm) Front Right Diameter (mm) Front Right Diameter (mm)	Residual Heat Indicator	Yes
Child Lock	Minute Minder	Yes
Zone Specification Dual Hillight Front Left Spec Dual Hillight Front Left Rating (W) 750/2200 Front Left Diameter (mm) 120/210 Rear Left Spec Hillight Rear Left Diameter (mm) 1200 Rear Left Diameter (mm) 145 Front Middle Spec Front Middle Spec Front Middle Diameter (mm) Rear Middle Diameter (mm) Rear Middle Diameter (mm) Front Right Spec Front Right Spec Hillight Front Right Diameter (mm) 145 Front Right Diameter (mm) 145 Rear Right Spec Dual Hillight Rear Right Diameter (mm) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection 7000	Count Up Timer	Yes
Front Left Spec	Child Lock	Yes
Front Left Rating (W) 750/2200 Front Left Diameter (mm) 120/210 Rear Left Spec Hillight Rear Left Rating (W) 1200 Rear Left Diameter (mm) 145 Front Middle Spec Front Middle Rating (W) Front Middle Diameter (mm) Rear Middle Spec Rear Middle Diameter (mm) Rear Middle Diameter (mm) Front Right Spec Hillight Front Right Spec Hillight Front Right Diameter (mm) 145 Rear Right Spec Dual Hillight Rear Right Spec Dual Hillight Rear Right Diameter (mm) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W) 7000	Zone Specification	
Front Left Rating (W) 750/2200 Front Left Diameter (mm) 120/210 Rear Left Spec Hillight Rear Left Rating (W) 1200 Rear Left Diameter (mm) 145 Front Middle Spec Front Middle Rating (W) Front Middle Diameter (mm) Rear Middle Spec Rear Middle Diameter (mm) Rear Middle Diameter (mm) Front Right Spec Hillight Front Right Spec Hillight Front Right Diameter (mm) 145 Rear Right Spec Dual Hillight Rear Right Spec Dual Hillight Rear Right Diameter (mm) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W) 7000	Front Left Spec	Dual Hilight
Front Left Diameter (mm) 120/210 Rear Left Spec Hillight Rear Left Rating (W) 1200 Rear Left Diameter (mm) 145 Front Middle Spec Front Middle Rating (W) Front Middle Diameter (mm) Rear Middle Diameter (mm) Rear Middle Rating (W) Rear Middle Diameter (mm) Front Right Spec Hillight Front Right Rating (W) 1200 Front Right Diameter (mm) 145 Rear Right Spec Dual Hillight Rear Right Diameter (mm) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W)	Front Left Rating (W)	
Rear Left Spec Hilight Rear Left Rating (W) 1200 Rear Left Diameter (mm) 145 Front Middle Spec Front Middle Rating (W) Front Middle Diameter (mm) Front Middle Diameter (mm) Rear Middle Spec Rear Middle Diameter (mm) Rear Middle Diameter (mm) Front Right Spec Front Right Rating (W) 1200 Front Right Diameter (mm) 145 Rear Right Spec Dual Hilight Rear Right Diameter (mm) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W)		· · · · · · · · · · · · · · · · · · ·
Rear Left Rating (W) 1200 Rear Left Diameter (mm) 145 Front Middle Spec Front Middle Rating (W) Front Middle Diameter (mm) Front Middle Diameter (mm) Rear Middle Spec Rear Middle Rating (W) Rear Middle Diameter (mm) Hillight Front Right Spec Hillight Front Right Rating (W) 1200 Front Right Diameter (mm) 145 Rear Right Spec Dual Hillight Rear Right Diameter (mm) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W)		
Rear Left Diameter (mm) 145 Front Middle Spec 145 Front Middle Rating (W) 145 Front Middle Diameter (mm) 145 Rear Middle Spec Rear Middle Diameter (mm) Front Right Spec Hillight Front Right Rating (W) 1200 Front Right Diameter (mm) 145 Rear Right Diameter (mm) 1500/24-00 Rear Right Rating (W) 1500/24-00 Rear Right Diameter (mm) 170/265 Dimensions 376 Appliance Dimensions 490 Height (mm) 560 Depth (mm) 490 Electrical Connection 7000	_ •	
Front Middle Spec Front Middle Rating (W) Front Middle Diameter (mm) Rear Middle Spec Rear Middle Diameter (mm) Front Right Spec Hillight Front Right Rating (W) 1200 Front Right Diameter (mm) 145 Rear Right Spec Dual Hillight Rear Right Spec Dual Hillight Rear Right Diameter (mm) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W)		······································
Front Middle Rating (W) Front Middle Diameter (mm) Rear Middle Spec Rear Middle Rating (W) Rear Middle Diameter (mm) Front Right Spec Hillight Front Right Diameter (mm) 145 Rear Right Spec Dual Hillight Rear Right Rating (W) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 316 Aperture Dimensions Height (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection 7000	•	
Front Middle Diameter (mm) Rear Middle Spec Rear Middle Rating (W) Rear Middle Diameter (mm) Front Right Spec Hillight Front Right Diameter (mm) 145 Rear Right Spec Dual Hillight Rear Right Rating (W) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 516 Aperture Dimensions Height (mm) Height (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W)	•	
Rear Middle Rating (W) Rear Middle Diameter (mm) Front Right Spec Hillight Front Right Rating (W) 1200 Front Right Diameter (mm) 145 Rear Right Spec Dual Hillight Rear Right Rating (W) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 516 Aperture Dimensions Height (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W)		
Rear Middle Diameter (mm) Hilight Front Right Spec Hilight Front Right Rating (W) 1200 Front Right Diameter (mm) 145 Rear Right Spec Dual Hilight Rear Right Rating (W) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W)	Rear Middle Spec	
Rear Middle Diameter (mm) Hilight Front Right Spec Hilight Front Right Rating (W) 1200 Front Right Diameter (mm) 145 Rear Right Spec Dual Hilight Rear Right Rating (W) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W)	Rear Middle Rating (W)	•
Front Right Rating (W) 1200 Front Right Diameter (mm) 145 Rear Right Spec Dual Hillight Rear Right Rating (W) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 516 Aperture Dimensions Height (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W)	Rear Middle Diameter (mm)	•
Front Right Rating (W) 1200 Front Right Diameter (mm) 145 Rear Right Spec Dual Hillight Rear Right Rating (W) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions Width (mm) 576 Depth (mm) 516 Aperture Dimensions Height (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W)	Front Right Spec	Hilight
Rear Right Spec Dual Hillight Rear Right Rating (W) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions 576 Width (mm) 516 Aperture Dimensions 490 Height (mm) 490 Electrical Connection 7000	Front Right Rating (W)	
Rear Right Rating (W) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions 576 Width (mm) 516 Aperture Dimensions 490 Height (mm) 490 Electrical Connection 7000	Front Right Diameter (mm)	145
Rear Right Rating (W) 1500/2400 Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions 576 Width (mm) 516 Aperture Dimensions 490 Height (mm) 490 Electrical Connection 7000		Dual Hilight
Rear Right Diameter (mm) 170/265 Dimensions Appliance Dimensions 576 Width (mm) 516 Aperture Dimensions 1490 Height (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection 200 Connected Load (W) 7000		
Appliance Dimensions Width (mm) 576 Depth (mm) 516 Aperture Dimensions 490 Height (mm) 560 Depth (mm) 490 Electrical Connection 7000		
Width (mm) 576 Depth (mm) 516 Aperture Dimensions 490 Height (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W) 7000	Dimensions	
Depth (mm) 516 Aperture Dimensions 38 Height (mm) 560 Depth (mm) 490 Electrical Connection 7000	Appliance Dimensions	
Aperture Dimensions 38 Height (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W)	Width (mm)	576
Height (mm) 38 Width (mm) 560 Depth (mm) 490 Electrical Connection Onnected Load (W)	Depth (mm)	516
Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W)	Aperture Dimensions	
Width (mm) 560 Depth (mm) 490 Electrical Connection Connected Load (W)	Height (mm)	38
Depth (mm) 490 Electrical Connection	•••••	······································
Electrical Connection Connected Load (W) 7000	•	······································
•••••••••••••••••••••••••••••••••••••••	_ •	
Fuse Rating (A) 30	Connected Load (W)	7000
	Fuse Rating (A)	30

Electrical Connection

Fuse Rating (A)

GAS HOBS







13



ontriol Type Touch Rotary Rotary Touch pos & Go Yes Yes Yes linute Minder Yes Yes Yes introl Middle Front Middle Front Middle Front Middle ED Display Red Red Red Red en Supports Cast Iron Cast Iron Cast Iron Cast Iron etal Type Yes Yes Yes Yes ob-Hood Yes Yes Yes Yes afety Themocuples Yes Yes Yes Yes afety Th		HVB95450IB	HKB95450NB	HGB95522YM	HVB75450IB
Integral Auto Integral Integral Auto Integral Auto Proposition Propo	Features				
Muto	Control Type	Touch	Rotary	Rotary	Touch
Minder Yes Red R	Ignition Type	Auto	Integral		Auto
Institute Minder	Stop & Go	Yes			Yes
Red	Minute Minder		Yes		
an Supports Cast Iron Cast Iron Cast Iron Cast Iron bol-Hood Yes Yes Yes bot-Hood Yes Yes Yes ofer by Thermocouples Yes Yes Yes ones Specification Semi Rapid Burner Semi Rapid Burner Semi Rapid Burner ront Left Spec Semi Rapid Burner Semi Rapid Burner Semi Rapid Burner ront Left Jaimeter (rmm) 80 80 133 80 ear Left Spec Semi Rapid Burner Semi Rapid Burner Semi Rapid Burner ear Left Diameter (rmm) 1900 2000 133 80 ear Left Diameter (rmm) 80 80 133 80 ront Middle Spec Sem Rapid Burner Semi Rapid Burner Semi Rapid Burner Wok Burner Wok Burner Wok Burner Wok Burner Wok Burner Semi Rapid Burner How Burner Semi Rapid Burner Rapid Burner Auxiliary Burne	Control Position	Front Middle	Front Middle	Front Middle	Front Middle
Semilar Personal	_ED Display	Red	Red		Red
obi-Hood after, Thermocouples Yes Ye	Pan Supports	Cast Iron	Cast Iron	Cast Iron	Cast Iron
obi-Hood after, Thermocouples Yes Ye	Residual Heat Indicator	Yes	Yes		Yes
afety Thermocouples Yes Yes Yes Yes one Specification Semi Rapid Burner Semi Rapid Burner Semi Rapid Burner Wok Burner Semi Rapid Burner ront Left Pating (wh) 1900 2000 6200 1900 ront Left Diameter (mm) 80 80 133 80 ear Left Spec Semi Rapid Burner 80<	Hob ² Hood	Yes			
ront Left Spec Semi Rapid Burner Semi Rapid Burner Wok Burner Semi Rapid Burner ront Left Rating (wh) 1900 2000 6200 1900 ront Left Diameter (mm) 80 80 133 80 ear Left Spec Sem Rapid Burner Semi Rapid Burner Semi Rapid Burner Semi Rapid Burner ear Left Diameter (mm) 80 80 80 ront Middle Spec Wok Burner Auxiliary Burner Wok Burner ront Middle Spec Wok Burner Auxiliary Burner Wok Burner ront Middle Spec Wok Burner Semi Rapid Burner 128 ear Middle Spec Wok Burner Semi Rapid Burner 2 ear Middle Spec Wok Burner Semi Rapid Burner 2 ear Middle Spec Wok Burner Semi Rapid Burner 2 ear Middle Diameter (mm) 128 70 2 ront Right Spec Auxiliary Burner Auxiliary Burner Rapid Burner Rapid Burner Rapid Burner Auxiliary Burner Rapid Burner Rapid Burner Semi Rapid Bu	Safety Thermocouples	Yes	Yes	Yes	
ront Left Rating (wh) 1900 2000 6200 1900 ront Left Diameter (mm) 80 80 133 80 ear Left Spec Semi Rapid Burner Semi Rapid Burner Semi Rapid Burner Semi Rapid Burner ear Left Diameter (mm) 80 80 80 80 ront Middle Spec Wok Burner Auxiliary Burner Wok Burner ront Middle Diameter (mm) 128 54 128 ear Middle Rating (wh) 4000 1000 3500 ront Middle Diameter (mm) 128 54 128 ear Middle Rating (wh) 4000 1900 1900 ear Middle Bating (wh) 4000 1900 1900 ear Middle Diameter (mm) 128 70 Auxiliary Burner ront Right Spec Auxiliary Burner Auxiliary Burner Rapid Burner Auxiliary Burner ront Right Pating (wh) 1000 1000 3000 1000 65 ear Right Rating (wh) 900 2000 1900 1900 1900	Zone Specification		***************************************	•	•
Sem Left Diameter (mm) 80 80 80 133 80	Front Left Spec	Semi Rapid Burner	Semi Rapid Burner	Wok Burner	Semi Rapid Burner
ear Left Spec Semi Rapid Burner Semi Rapid Burner Semi Rapid Burner ear Left Rating (wh) 1900 2000 1900 ear Left Diameter (mm) 80 80 80 ront Middle Spec Wok Burner Auxiliary Burner Wok Burner ront Middle Diameter (mm) 128 54 128 ear Middle Spec Wok Burner Semi Rapid Burner ear Middle Spec Wok Burner Semi Rapid Burner ear Middle Spec Wok Burner Semi Rapid Burner ear Middle Diameter (mm) 4000 1900 ear Middle Diameter (mm) 128 70 ront Right Spec Auxiliary Burner Auxiliary Burner Rapid Burner Auxiliary Burner ront Right Diameter (mm) 65 65 100 65 ear Right Spec Semi Rapid Burner Semi Rapid Burner Semi Rapid Burner ear Right Diameter (mm) 80 80 70 80 ear Right Diameter (mm) 80 80 70 80 ear Right Diameter (mm) 80 </td <td>Front Left Rating (wh)</td> <td>1900</td> <td>2000</td> <td>6200</td> <td>1900</td>	Front Left Rating (wh)	1900	2000	6200	1900
ear Leff Rating (wh) 1900 2000 1900 ear Left Diameter (mm) 80 80 80 ront Middle Spec Wok Burner Auxiliary Burner Wok Burner ront Middle Rating (wh) 3500 1000 3500 ront Middle Diameter (mm) 128 54 128 ear Middle Rating (wh) 4000 1900 1900 ear Middle Rating (wh) 4000 1900 1900 ear Middle Diameter (mm) 128 70 1900 ear Middle Diameter (mm) 128 70 1900 ear Middle Diameter (mm) 128 70 1900 ear Middle Diameter (mm) 1000 1000 3000 1000 ront Right Spec Auxiliary Burner Auxiliary Burner Rapid Burner Auxiliary Burner ront Right Diameter (mm) 65 65 100 65 ront Right Diameter (mm) 80 80 70 80 ear Right Rating (wh) 1900 2000 1900 1900 1900	Front Left Diameter (mm)	80	80	133	80
ear Leff Rating (wh) 1900 2000 1900 ear Left Diameter (mm) 80 80 80 ront Middle Spec Wok Burner Auxiliary Burner Wok Burner ront Middle Rating (wh) 3500 1000 3500 ront Middle Diameter (mm) 128 54 128 ear Middle Rating (wh) 4000 1900 1900 ear Middle Rating (wh) 4000 1900 1900 ear Middle Diameter (mm) 128 70 1900 ear Middle Diameter (mm) 128 70 1900 ear Middle Diameter (mm) 128 70 1900 ear Middle Diameter (mm) 1000 1000 3000 1000 ront Right Spec Auxiliary Burner Auxiliary Burner Rapid Burner Auxiliary Burner ront Right Diameter (mm) 65 65 100 65 ront Right Diameter (mm) 80 80 70 80 ear Right Rating (wh) 1900 2000 1900 1900 1900	Rear Left Spec	Semi Rapid Burner	Semi Rapid Burner		Semi Rapid Burner
ront Middle Spec Wok Burner Auxiliary Burner Wok Burner ront Middle Daing (wh) 3500 1000 3500 ront Middle Diameter (mm) 128 54 128 ear Middle Spec Wok Burner Semi Rapid Burner Semi Rapid Burner ear Middle Diameter (mm) 128 70 1900 ear Middle Diameter (mm) 128 70 Auxiliary Burner Rapid Burner Auxiliary Burner ront Right Spec Auxiliary Burner Auxiliary Burner Rapid Burner Auxiliary Burner ront Right Diameter (mm) 65 65 100 65 ear Right Diameter (mm) 65 65 100 65 ear Right Spec Semi Rapid Burner	Rear Left Rating (wh)	1900			1900
ront Middle Rating (wh) 3500 1000 3500 ront Middle Diameter (mm) 128 54 128 ear Middle Rating (wh) 4000 1900 1900 ear Middle Diameter (mm) 128 70 128 70 ront Right Spec Auxiliary Burner Auxiliary Burner Rapid Burner Auxiliary Burner ront Right Rating (wh) 1000 1000 3000 1000 ront Right Diameter (mm) 65 65 100 65 ear Right Spec Semi Rapid Burner Semi Rapid Burner <td>Rear Left Diameter (mm)</td> <td>80</td> <td>80</td> <td></td> <td>80</td>	Rear Left Diameter (mm)	80	80		80
ront Middle Rating (wh) 3500 1000 3500 ront Middle Diameter (mm) 128 54 128 ear Middle Spec Wok Burner Semi Rapid Burner Semi Rapid Burner ear Middle Diameter (mm) 128 70 ront Right Spec Auxiliary Burner Auxiliary Burner Rapid Burner Auxiliary Burner ront Right Rating (wh) 1000 1000 3000 1000 ront Right Diameter (mm) 65 65 100 65 ear Right Spec Semi Rapid Burner S	ront Middle Spec	Wok Burner	-	Auxiliary Burner	Wok Burner
ear Middle Spec Wok Burner Semi Rapid Burner ear Middle Rating (wh) 4000 1900 ear Middle Diameter (mm) 128 70 ront Right Spec Auxiliary Burner Auxiliary Burner Rapid Burner Auxiliary Burner ront Right Rating (wh) 1000 1000 3000 1000 oront Right Diameter (mm) 65 65 100 65 ear Right Spec Semi Rapid Burner Semi Ra	Front Middle Rating (wh)	3500		1000	3500
ear Middle Rating (wh) 4000 1900 ear Middle Diameter (mm) 128 70 ront Right Spec Auxiliary Burner Auxiliary Burner Rapid Burner Auxiliary Burner ront Right Rating (wh) 1000 1000 3000 1000 ront Right Diameter (mm) 65 65 100 65 ear Right Spec Semi Rapid Burner Semi Rapid Burner<	ront Middle Diameter (mm)	128		54	128
ear Middle Diameter (mm) 128 70 ront Right Spec Auxiliary Burner Auxiliary Burner Rapid Burner Auxiliary Burner ront Right Rating (wh) 1000 1000 3000 1000 ront Right Diameter (mm) 65 65 100 65 ser Right Spec Semi Rapid Burner Semi Rapid Burne	Rear Middle Spec		Wok Burner	Semi Rapid Burner	
ront Right Spec Auxiliary Burner Auxiliary Burner Rapid Burner Auxiliary Burner ront Right Rating (wh) 1000 1000 3000 1000 ront Right Diameter (mm) 65 65 100 65 ear Right Spec Semi Rapid Burner Semi Rapid Bu	Rear Middle Rating (wh)		4000	1900	•
ront Right Rating (wh) 1000 1000 3000 1000 ront Right Diameter (mm) 65 65 100 65 ear Right Spec Semi Rapid Burner	Rear Middle Diameter (mm)		128	70	
ront Right Diameter (mm) 65 65 100 65 ear Right Spec Semi Rapid Burner	Front Right Spec	Auxiliary Burner	Auxiliary Burner	Rapid Burner	Auxiliary Burner
ear Right Spec Semi Rapid Burner Rapid Ra	Front Right Rating (wh)	1000	1000	3000	1000
ear Right Rating (wh) 1900 2000 1900 1900 ear Right Diameter (mm) 80 80 70 80 lax Gas Power (W) 10200 11000 14000 10200 immediates ppliance Dimensions lidth (mm) 890 880 857 750 epth (mm) 510 510 520 510 perture Dimensions eight (mm) 40 40 60 52 /idth (mm) 850 830 830 720	Front Right Diameter (mm)		65	100	
ear Right Diameter (mm) 80 80 70 80 lax Gas Power (W) 10200 11000 14000 10200 imensions ppliance Dimensions /idth (mm) 890 880 857 750 epth (mm) 510 510 520 510 perture Dimensions eight (mm) 40 40 60 52 /idth (mm) 850 830 830 720	Rear Right Spec	Semi Rapid Burner	Semi Rapid Burner	Semi Rapid Burner	Semi Rapid Burner
lax Gas Power (W) 10200 11000 14000 10200 imensions	Rear Right Rating (wh)	1900	2000	1900	1900
lax Gas Power (W) 10200 11000 14000 10200 imensions	Rear Right Diameter (mm)	80	80	70	80
ppliance Dimensions 890 880 857 750 epth (mm) 510 510 520 510 perture Dimensions 510 40 60 52 leight (mm) 40 40 60 52 /idth (mm) 850 830 830 720	Max Gas Power (W)				
(idth (mm) 890 880 857 750 epth (mm) 510 510 520 510 perture Dimensions 510 510 520 510 eight (mm) 40 40 60 52 /idth (mm) 850 830 830 720	Dimensions				
epth (mm) 510 510 520 510 perture Dimensions 510 520 510 leight (mm) 40 40 60 52 /idth (mm) 850 830 830 720	Appliance Dimensions				
Perture Dimensions eight (mm) 40 40 60 52 /idth (mm) 850 830 830 720	Width (mm)	890	880	857	750
eight (mm) 40 40 60 52 /idth (mm) 850 830 830 720	Depth (mm)	510	510	520	510
/idth(mm) 850 830 830 720	Aperture Dimensions				
/idth(mm) 850 830 830 720	Height (mm)	40	40	60	52
	Width (mm)				
	Depth (mm)	490	480	480	490





HKB75450NB

HGB75420YM

	111075450110	1100/3420111
Features		
Control Type	Rotary	Rotary
lgnition Type	Integral	Integral
Stop & Go		•
Minute Minder	Yes	•••••
Control Position	Front Middle	Front Middle
LED Display	Red	•••••
Pan Supports	Cast Iron	Cast Iron
Residual Heat Indicator	Yes	••••
Hob ² Hood	Yes	••••
Safety Thermocouples	Yes	Yes
Zone Specification		
Front Left Spec	Semi Rapid Burner	Semi Rapid Burner
Front Left Rating (wh)	2000	1900
Front Left Diameter (mm)	80	70
Rear Left Spec	Semi Rapid Burner	Semi Rapid Burner
Rear Left Rating (wh)	2000	1900
Rear Left Diameter (mm)	80	70
Front Middle Spec		•
Front Middle Rating (wh)		•••••
Front Middle Diameter (mm)		••••
Rear Middle Spec	Wok Burner	Wok Burner
Rear Middle Rating (wh)	3900	4000
Rear Middle Diameter (mm)	128	. 122
Front Right Spec	Auxiliary Burner	Auxiliary Burner
Front Right Rating (wh)	1000	1000
Front Right Diameter (mm)	65	54
Rear Right Spec	Semi Rapid Burner	Rapid Burner
Rear Right Rating (wh)	2000	3000
Rear Right Diameter (mm)	80	100
Max Gas Power (W)	10900	12000
Dimensions		
Appliance Dimensions		•••••
Width (mm)	740	745
Depth (mm)	510	510
Aperture Dimensions		
Height (mm)	45	40
Width (mm)	560	560
Depth (mm)	480	480
Electrical Connection		
Fuse Rating (A)	13	13

GAS HOBS





HKB64450NB

HGB64420YM

Control Type	Rotary	Rotary
gnition Type	Integral	Integral
Stop & Go		•·····································
Minute Minder	Yes	•
Control Position	Front Middle	Front Right
LED Display	Red	
Pan Supports	Cast Iron	Cast Iron
Residual Heat Indicator	Yes	••••••
Hob ² Hood	Yes	••••
Safety Thermocouples	Yes	Yes
Zone Specification		•
Front Left Spec	Wok Burner	Wok Burner
Front Left Rating (wh)	3900	4000
Front Left Diameter (mm)	128	122
Rear Left Spec	Semi Rapid Burner	Semi Rapid Burner
Rear Left Rating (wh)	2000	1900
Rear Left Diameter (mm)	80	70
Front Middle Spec		•
Front Middle Rating (wh)		
Front Middle Diameter (mm)		
Rear Middle Spec		
Rear Middle Rating (wh)		
Rear Middle Diameter (mm)		••••
Front Right Spec	Auxiliary Burner	Auxiliary Burner
Front Right Rating (wh)	1000	1000
Front Right Diameter (mm)	65	54
Rear Right Spec	Semi Rapid Burner	Semi Rapid Burner
Rear Right Rating (wh)	2000	1900
Rear Right Diameter (mm)	80	70
Max Gas Power (W)	8900	8800
Dimensions		
Appliance Dimensions		•••••
Width (mm)	590	594
Depth (mm)	520	510
Aperture Dimensions		••••
Height (mm)	40	40
Width (mm)	560	560
Depth (mm)	480	480
Electrical Connection		

MIXED FUEL HOB



HD955100NB

Control Position Front Automatic Heat Up (Automax) Yes stop & Go Yes Stop & Go Yes Stesidual Heat Indicator Yes OKO Timer Yes Valuate Minder Yes Count Up Timer Yes Van Sensor Yes Soosters Yes Child Lock Yes Cone Specification Dual Crown Burner Cone I Left Paining (W) Crown Burner Year Left Paining (W) Soon Rear Left Rating (W) 5000 Rear Left Rating (W) 2000 Rear Left Diameter (mm) 134 Year Left Paining (W) 2000 Rear Left Rating (W) 2000 Rear Left Paining (W) 1400/2500 Rear Middle Rating (W)	Features	
Control Position	Control Type	Touch/Rotary
Stop & Go Yes	Control Position	
Stop & Go Yes	Automatic Heat Up (Automax)	Yes
New Yes	Stop & Go	
Note	Residual Heat Indicator	
Minute Minder	ÖKO Timer	
Sensor	Minute Minder	
Pan Sensor Yes Boosters Yes Cone Specification Yes Front Leff Spec Front Leff Rating (W) Boost Left Rating (W) Sound Crown Burner Rear Left Spec Dual Crown Burner Rear Left Rating (W) 5000 Rear Left Diameter (mm) 134 Front Middle Spec Induction Front Middle Rating (W) 2200/3600 Front Middle Diameter (mm) 210 Rear Middle Rating (W) 1400/2500 Rear Middle Diameter (mm) 145 Rear Right Rating (W) 1400/2500 Bront Right Diameter (mm) 145 Rear Right Rating (W) 1800/2800 Rear Right Diameter (mm) 180 Dimensions Notes (Middle (Mid	Count Up Timer	
Section Sect	Pan Sensor	
Cone Specification Front Left Spec Front Left Rating (W) Front Left Diameter (mm) Rear Left Spec Dual Crown Burner Rear Left Rating (W) 5000 Rear Left Diameter (mm) 134 Front Middle Spec Induction Front Middle Rating (W) 2200/3600 Front Middle Diameter (mm) 210 Rear Middle Spec Induction Rear Middle Diameter (mm) 145 Rear Might Spec Induction Rear Right Spec Induction Rear Right Rating (W) 1800/2800 Rear Right Rating (W) 1800/2800 Rear Right Diameter (mm) 180 Dimensions Note of the properties of the propert	Boosters	
Cone Specification Cont Left Spec Front Left Spec Front Left Spec Front Left Diameter (mm) Dual Crown Burner Rear Left Rating (W) 5000 Rear Left Rating (W) 134 Front Middle Spec Induction Front Middle Rating (W) 2200/3600 Front Middle Diameter (mm) 210 Rear Middle Spec Induction Rear Middle Rating (W) 1450/2500 Rear Middle Diameter (mm) 145 Front Right Spec Induction Front Right Rating (W) 1400/2500 Front Right Rating (W) 145 Rear Right Rating (W) 1800/2800 Rear Right Diameter (mm) 180 Dimensions Notes (mm) Appliance Dimensions Notes (mm) Vidth (mm) 880 Depth (mm) 520 Apperture Dimensions 40 Vidth (mm) 830 Depth (mm) 490 Electrical Connection 6800	•	·····
ront Left Rating (W) ront Left Diameter (mm) Rear Left Spec Dual Crown Burner Rear Left Rating (W) S000 Rear Left Diameter (mm) 134 ront Middle Spec Induction ront Middle Spec Induction Ront Middle Spec Induction Roter Middle Spec Induction Rear Middle Spec Induction Rear Middle Spec Induction Rear Middle Diameter (mm) 210 Rear Middle Diameter (mm) 145 Rear Middle Diameter (mm) 145 ront Right Spec Induction Ront Right Spec Induction Ront Right Spec Induction Ront Right Diameter (mm) 145 Rear Right Spec Induction Rear Right Spec Induction Rear Right Spec Induction Rear Right Diameter (mm) 180 Rear Right (mm) 180 Rear Right (mm) 180 Reprince Dimensions Roter (mm) 180 Reprince Dimensions Roter (mm) 180 Reprince Dimensions Registrory (mm) 180 Regis	Zone Specification	······································
Pront Left Diameter (mm) Pront Left Diameter (mm) Pront Left Spec Pront Burner	Front Left Spec	
Rear Left Spec Dual Crown Burner Rear Left Rating (W) 5000 Rear Left Rating (W) 5000 Rear Left Diameter (mm) 134 Front Middle Spec Induction Rear Middle Diameter (mm) 210 Rear Middle Diameter (mm) 1400/2500 Rear Middle Diameter (mm) 145 Rear Right Spec Induction Rear Right Diameter (mm) 145 Rear Right Spec Induction Rear Right Rating (W) 1800/2800 Rear Right Diameter (mm) 180 Dimensions Name Uppliance Dimensions Name Vight (mm) 880 Depth (mm) 40 Vight (mm) 49 Depth (mm) 490 Electrical Connection 6800	Front Left Rating (W)	
Rear Leff Rating (W) 5000 Rear Leff Diameter (mm) 134 Front Middle Spec Induction Gront Middle Diameter (mm) 2200/3600 Front Middle Diameter (mm) 210 Rear Middle Daimeter (mm) 1400/2500 Rear Middle Diameter (mm) 145 Front Right Spec Induction Front Right Rating (W) 1400/2500 Front Right Diameter (mm) 145 Rear Right Diameter (mm) 1800/2800 Rear Right Diameter (mm) 1800/2800 Rear Right Diameter (mm) 180 Dimensions Vidith (mm) Vepth (mm) 520 Vepth (mm) 40 Vidith (mm) 830 Vepth (mm) 490 Clectrical Connection 6800	Front Left Diameter (mm)	
Rear Left Diameter (mm) 134 Front Middle Spec Induction Front Middle Rating (W) 2200/3600 Front Middle Diameter (mm) 210 Rear Middle Spec Induction Rear Middle Rating (W) 1450/2500 Rear Middle Diameter (mm) 145 Front Right Spec Induction Front Right Pating (W) 1450/2500 Front Right Diameter (mm) 145 Rear Right Rating (W) 1800/2800 Rear Right Diameter (mm) 180 Dimensions Notes and the state of	Rear Left Spec	Dual Crown Burner
Induction Indu	Rear Left Rating (W)	
Induction Indu	Rear Left Diameter (mm)	
Property	Front Middle Spec	
Page	Front Middle Rating (W)	
Rear Middle Spec Induction Rear Middle Rating (W) 1400/2500 Rear Middle Diameter (mm) 145 Front Right Spec Induction Front Right Pating (W) 1450/2500 Front Right Diameter (mm) 145 Rear Right Rating (W) 1800/2800 Rear Right Diameter (mm) 180 Dimensions Vight Induction Vight Income Dimensions 880 Vight (mm) 520 Apperture Dimensions 40 Vight (mm) 830 Vight (mm) 490 Deepth (mm) 490 Electrical Connection 6800	Front Middle Diameter (mm)	
Rear Middle Diameter (mm) 145 Front Right Spec Induction Front Right Rating (W) 1400/2500 Front Right Diameter (mm) 145 Rear Right Spec Induction Rear Right Rating (W) 1800/2800 Rear Right Diameter (mm) 180 Dimensions Vidth (mm) Appliance Dimensions 880 Vidth (mm) 520 Apperture Dimensions 40 Height (mm) 40 Vidth (mm) 830 Depth (mm) 490 Electrical Connection 6800	Rear Middle Spec	•
Rear Middle Diameter (mm) 145 Front Right Spec Induction Front Right Rating (W) 1400/2500 Front Right Diameter (mm) 145 Rear Right Spec Induction Rear Right Rating (W) 1800/2800 Rear Right Diameter (mm) 180 Dimensions Vidth (mm) Appliance Dimensions 880 Vidth (mm) 520 Apperture Dimensions 40 Height (mm) 40 Vidth (mm) 830 Depth (mm) 490 Electrical Connection 6800	Rear Middle Rating (W)	1400/2500
ront Right Rating (W) 1400/2500 ront Right Diameter (mm) 145 kear Right Spec Induction Rear Right Rating (W) 1800/2800 Rear Right Rating (W) 1800/2800 Rear Right Rating (W) 1800/2800 Rear Right Diameter (mm) 180 Pimensions Rypliance Dimensions Width (mm) 880 Repetit (mm) 520 Repetit (mm) 40 Repetit (mm) 40 Repetit (mm) 830 Repetit (mm) 490 Repetit (mm) 490 Relectrical Connection Ronnected Load (W) 6800	Rear Middle Diameter (mm)	145
ront Right Diameter (mm) 145 Rear Right Spec Induction Rear Right Rating (W) 1800/2800 Rear Right Diameter (mm) 180 Dimensions Vippliance Dimensions Vidth (mm) 880 Depth (mm) 520 Aperture Dimensions Height (mm) 40 Vidth (mm) 830 Depth (mm) 490 Rear Right Right Diameter (mm) 490 Rear Right Rating (W) 6800 Rear Right Rating (W) 6800	Front Right Spec	Induction
ront Right Diameter (mm) 145 Rear Right Spec Induction Rear Right Rating (W) 1800/2800 Rear Right Diameter (mm) 180 Dimensions Vippliance Dimensions Vidth (mm) 880 Depth (mm) 520 Aperture Dimensions Height (mm) 40 Vidth (mm) 830 Depth (mm) 490 Rear Right Right Diameter (mm) 490 Rear Right Rating (W) 6800 Rear Right Rating (W) 6800	Front Right Rating (W)	1400/2500
Rear Right Rating (W) 1800/2800 Rear Right Diameter (mm) 180 Dimensions Image: Comparison of the properties of the pro	Front Right Diameter (mm)	
Rear Right Diameter (mm) 180 Dimensions Appliance Dimensions Vidth (mm) 880 Depth (mm) 520 Apperture Dimensions 40 Height (mm) 830 Depth (mm) 490 Electrical Connection 6800	Rear Right Spec	Induction
Rear Right Diameter (mm) 180 Dimensions Appliance Dimensions Vidth (mm) 880 Depth (mm) 520 Apperture Dimensions 40 Height (mm) 830 Depth (mm) 490 Electrical Connection 6800	Rear Right Rating (W)	1800/2800
Appliance Dimensions 880 Vidth (mm) 880 Jepth (mm) 520 Aperture Dimensions 40 Height (mm) 40 Vidth (mm) 830 Jepth (mm) 490 Electrical Connection 6800	Rear Right Diameter (mm)	
Width (mm) 880 Depth (mm) 520 Aperture Dimensions 40 Height (mm) 40 Width (mm) 830 Depth (mm) 490 Electrical Connection 6800	Dimensions	
Depth (mm) 520 Aperture Dimensions 40 Vidth (mm) 830 Depth (mm) 490 Electrical Connection 6800	Appliance Dimensions	
Aperture Dimensions 40 Height (mm) 40 Width (mm) 830 Depth (mm) 490 Electrical Connection 6800	Width (mm)	880
Height (mm) 40 Vidth (mm) 830 Depth (mm) 490 Electrical Connection 6800	Depth (mm)	520
Vidth (mm) 830 Depth (mm) 490 Electrical Connection 6800	Aperture Dimensions	
Vidth (mm) 830 Depth (mm) 490 Electrical Connection 6800	Height (mm)	40
Depth (mm) 490 Electrical Connection 6800	Width (mm)	
Electrical Connection Connected Load (W) 6800	Depth (mm)	490
	Electrical Connection	•••••
	Connected Load (W)	6800
	Fuse Rating (A)	· · · · · · · · · · · · · · · · · · ·

MODULAR HOB



IKE42640KB

Features	2.7 M::C
Hob Type	2 Zone MaxiSense
Control Type	ActiveTouch
Fuel Type	Induction
Triple Zone	
Bridge Function	Yes
Automatic Heat Up (Automax)	Yes
Stop & Go	Yes
Residual Heat Indicator	Yes
Minute Minder	Yes
Count Up Timer	Yes
Pan Sensor	Yes
Booster	Yes
Child Lock	Yes
Gas Safety Shut off	
Zone Specification	
Front Spec	Induction
Front Rating (kW)	2.3/3.2
Front Diameter (mm)	170x265
Rear Spec	Induction
Rear Rating (kW)	2.3/3.2
Rear Diameter (mm)	170x265
Dimensions	••••••
Appliance Dimensions	
Width (mm)	360
Depth (mm)	520
Aperture Dimensions	
Height (mm)	44
Width (mm)	340
Depth (mm)	490
Electrical Connection	
Connected Load (W)	3650
Fuse Rating (A)	16
Lpg Conversion Kit	

Specification	tables

DESIGNER HOODS







DLE0970M

DLE0630B/W

DLE0431W/B/M

Key Features		,	
Control type	Electronic push button	Electronic push button	Electronic push button
Hob2Hood			
Fan Speed	4	4	4
Breeze function	•••••	•••••	•••••
Lights	LED spotlight	LED spotlight	LED spotlight
No of lamp x W	5	3	3
Charcoal filter	2; Included	1; Included	1; Included
Charcoal filter type	MCFB29	MCFB29	MCFB29
Ultra charcoal filter	N/A	N/A	N/A
Ultra charcoal filter type	N/A	N/A	N/A
Grease filter Type	Aluminium mesh	Aluminium mesh	Aluminium mesh
Ducted Max (ca, m³/h)	N/A	N/A	N/A
Ducted boost (ca, m³/h)	N/A	N/A	N/A
Noise (Max setting) Ducted	N/A	N/A	N/A
Recirculation maximum (ca,m³/h)	700	350	350
Recirculation boost (ca, m³/h)	700	350	350
Noise (Max Setting) Recirculation (dB(A))	72	70	70
Annual energy consumption, kWh/annum	0.0	0.0	0.0
Energy efficiency class	N/A	N/A	N/A
Fluid Dynamic Efficiency Class	N/A	N/A	N/A
Lighting efficiency Class	N/A	N/A	N/A
Grease filter Efficiency	N/A	N/A	N/A
Grease filter Efficiency Class	0.0	0.0	0.0
Off mode power (W)	0.0	0.0	0.0
Stand by Power (W)	0.0	0.0	0.0
Install height (mm)	•		•
Minimum distance from cooking top - electric	50	50	50
Minimum distance from cooking top - gas	65	65	65
Dimensions			
Width	900	900	500
Depth	440	440	500
Height Max	1250	1250	1250
Height of Body	170	170	170
Other	170		
Air Outlet	N/A	N/A	N/A
All Outlet	IN/A	IN/A	IN/A

HOODS











	DIK6180HG	DIE5961HG	DDE5980G	DCK5281HG	DCE5960HM
Overview					
Control Type	Touch on glass	Touch on glass	Touch on Glass	Electronic push buttons	Electronic push buttons
Hob ² Hood	•	•		•	•
Fan Speed	5	4	5	4	4
Breeze Function					
Lights	Dimmable LED Stripe	LED Spotlight	LED Strip	Dimmable LED Stripe	Dimmable LED Stripe
No. of Lamp x W	2	4	1	1	1
Charcoal Filter	2; Included	1; Included	2; Included	1; Included	1; Included
Charcoal Filter Type	MCFB58	MCFB58	MCFE38	MCFB60	MCFB60
Ultra Charcoal Filter	2; Accessory	2; Accessory		2; Accessory	2; Accessory
Ultra Charcoal Filter Type	MCFB59	MCFB59		MCFB62	MCFB62
Grease Filter Type	Aluminium mesh	Aluminium mesh	Stainless Steel Design Filter	Aluminium mesh	Aluminium mesh
Ducted Maximum (ca. m³/h)	500	400	350	590	590
Ducted Boost (ca. m³/h)	750	700	700	720	710
Noise (Max. Setting) Ducted (dB(A))	65	65	70	70	63
Recirculation Maximum (ca. m³/h)	475	380	335	580	580
Recirculation Boost (ca. m³/h)	530	480	680	700	690
Noise (Max. Setting) Recirculation (dB(A))	69	66	61	76	67
Annual Energy Consumption, kWh/annum	43.1	55.2	59.5	40.1	55
Energy Efficiency Class	A+	A	A	A+	A
Fluid Dynamic Efficiency Class	А	A	A	A	A
Lighting Efficiency Class	A	A	А	A	A
Grease Filter Efficiency	75.1	85.1	65.1	65.1	65.1
Grease Filter Efficiency Class	С	В	D	D	D
Off Mode Power (W)	0.49	0.49	0.85	0.49	0.49
Stand-by Power (W)					
Installation Height (mm)					
Minimum Distance from Cooking Top – Electric	50	50	30 – 50	75	75
Minimum Distance from Cooking Top – Gas	65	65	30 – 50	75	75
Dimensions (mm)					
Width	1000	898	880	1200	900
Depth	700	606	95	700	700
Height Max	1150	1175	407	273	582
Height of Body	75	60	407	3	3
Other	•			·····	***************************************
Air Outlet	150	150	150	150	150

HOODS











	DVK6981HR	DVE5971HG	DVE5671HG	DBK6980HG	DBK6680HG
Overview					
Control Type	Touch on glass	Touch on glass	Touch on glass	Touch on glass	Touch on glass
Hob²Hood	*		•	•	
Fan Speed	5	4	4	5	5
Breeze Function	•	•		•	
Lights	Dimmable LED Stripe	Squared LED	Squared LED	Dimmable LED Stripe	Dimmable LED Stripe
No. of Lamp x W	1	2	2	1	1
Charcoal Filter	2; Included	2; Included	2; Included	1; Included	1; Included
Charcoal Filter Type	MCFB63	ECFB02	ECFB02	MCFB58	MCFB58
Ultra Charcoal Filter	2; Accessory	2; Accessory	2; Accessory	2; Accessory	2; Accessory
Ultra Charcoal Filter Type	MCFB64	MCFB52	MCFB52	MCFB59	MCFB59
Grease Filter Type	Aluminium mesh	Aluminium mesh	Aluminium mesh	Aluminium mesh	Aluminium mesh
Ducted Maximum (ca. m³/h)	500	400	400	500	500
Ducted Boost (ca. m³/h)	750	700	700	750	750
Noise (Max. Setting) Ducted (dB(A))	66	64	64	65	65
Recirculation Maximum (ca. m³/h)	550	310	310	475	475
Recirculation Boost (ca. m³/h)	720	425	425	530	530
Noise (Max. Setting) Recirculation (dB(A))	68	64	64	69	69
Annual Energy Consumption, kWh/annum	39.4	51.1	51.1	41.5	41.5
Energy Efficiency Class	A+	А	Α	A+	A+
Fluid Dynamic Efficiency Class	Α	А	Α	A	A
Lighting Efficiency Class	Α	А	A	A	A
Grease Filter Efficiency	65.1	65.1	65.1	75.1	75.1
Grease Filter Efficiency Class	D	D	D	C	C
Off Mode Power (W)	0.49	0.49	0.49	0.49	0.49
Stand-by Power (W)					•
Installation Height (mm)					•
Minimum Distance from Cooking Top – Electric	50	50	50	50	50
Minimum Distance from Cooking Top – Gas	50	50	50	65	65
Dimensions (mm)	-		•	•	• • • • • • • • • • • • • • • • • • • •
Width	896	898	598	898	598
Depth	456	418	418	455	455
Height Max	1260	1265	1265	1218	1218
Height of Body	380	380	380	75	75
Other					
Air Outlet	150	150	150	150	150
All Outici	iju .	IJU		130	











	DBE5961HG	DBE5761HG	DBE5661HG	DKB4950M	DKB4650M
Overview					
Control Type	Touch on glass	Touch on glass	Touch on glass	Mechanical Push Buttons	Mechanical Push Buttons
Hob ² Hood		•	•		
Fan Speed	4	4	4	3	3
Breeze Function		•	•		
Lights	LED Spotlight	LED Spotlight	LED Spotlight	LED Spotlight	LED Spotlight
No. of Lamp x W	2	2	2	2	2
Charcoal Filter	1; Included	1; Included	1; Included	1; Included	1; Included
Charcoal Filter Type	MCFB58	MCFB58	MCFB58	MCFE01	MCFE01
Ultra Charcoal Filter	2; Accessory	2; Accessory	2; Accessory	1; Accessory	1; Accessory
Ultra Charcoal Filter Type	MCFB59	MCFB59	MCFB59	MCFE11	MCFE11
Grease Filter Type	Aluminium mesh	Aluminium mesh	Aluminium mesh	Aluminium Cassette	Aluminium Cassette
Ducted Maximum (ca. m³/hh)	400	400	400	603	603
Ducted Boost (ca. m³/hh)	700	700	700	_	
Noise (Max. Setting) Ducted (dB(A))	65	65	65	69	69
Recirculation Maximum (ca. m³/h)	380	380	380	400	400
Recirculation Boost (ca. m³/h)	480	480	480	_	
Noise (Max. Setting) Recirculation (dB(A))	66	66	66	75	75
Annual Energy Consumption, kWh/annum	51.5	51.5	51.5	81.9	81.9
Energy Efficiency Class	A	Α	Α	В	В
Fluid Dynamic Efficiency Class	A	A	A	В	В
Lighting Efficiency Class	A	Α	Α	F	F
Grease Filter Efficiency	85.1	85.1	85.1	76	76
Grease Filter Efficiency Class	В	В	В	C	C
Off Mode Power (W)	0.49	0.49	0.49	••••	•
Stand-by Power (W)		•	***************************************	••••	•
Installation Height (mm)		•	***************************************	••••	•
Minimum Distance from Cooking Top – Electric	50	50	50	50	50
Minimum Distance from Cooking Top – Gas	65	65	65	65	65
Dimensions (mm)		•	• • • • • • • • • • • • • • • • • • • •	•	
Width	898	698	598	898	598
Depth	455	455	455	500	500
Height Max	1204	1204	1204	1090	1090
Height of Body	60	60	60	40	40
Other					
Air Outlet	150	150	150	150	150

HOODS











	DGE5861HM	DGE5661HM	DGE5861HB	DGE5661HB	DGB3850M
Overview					
Control Type	Electronic push buttons	Electronic push buttons	Electronic push buttons	Electronic push buttons	Electronic Push Button
Hob²Hood		•			•
Fan Speed	4	4	4	4	4
Breeze Function					
Lights	LED Spotlight	LED Spotlight	LED Spotlight	LED Spotlight	LED
No. of Lamp x W	2	2	2	2	2
Charcoal Filter	1; Included	1; Included	1; Included	1; Included	2; Included
Charcoal Filter Type	ECFB01	ECFB01	ECFB01	ECFB01	ECFB02
Ultra Charcoal Filter	1; Accessory	1; Accessory	1; Accessory	1; Accessory	2; Accessory
Ultra Charcoal Filter Type	ECFBLL02	ECFBLL02	ECFBLL02	ECFBLL02	ECFBLL01
Grease Filter Type	Aluminimum cassette	Aluminimum cassette	Aluminimum cassette	Aluminimum cassette	Stainless Steel
Ducted Maximum (ca. m³/h)	580	580	580	580	600
Ducted Boost (ca. m³/h)	700	700	700	700	
Noise (Max. Setting) Ducted (dB(A))	70	70	70	70	63
Recirculation Maximum (ca. m³/h)	430	430	430	430	350
Recirculation Boost (ca. m³/h)	435	435	435	435	
Noise (Max. Setting) Recirculation (dB(A))	74	74	74	74	. 70
Annual Energy Consumption, kWh/annum	54.7	54.7	54.7	54.7	96.5
Energy Efficiency Class	A	A	A	A	C
Fluid Dynamic Efficiency Class	A	A	A	A	D
Lighting Efficiency Class	A	A	A	A	A
Grease Filter Efficiency	65.1	65.1	65.1	65.1	83.5
Grease Filter Efficiency Class	D	D	D	D	C
Off Mode Power (W)	0.49	0.49	0.49	0.49	• · · · · · · · · · · · · · · · · · · ·
Stand-by Power (W)					• · · · · · · · · · · · · · · · · · · ·
Installation Height (mm)					
Minimum Distance from Cooking Top – Electric	50	50	50	50	50
Minimum Distance from Cooking Top – Gas	57	57	57	57	65
Dimensions (mm)					
Width	770	540	770	770	700
Depth	300	300	300	300	285
Height Max	331	331	331	331	245
Height of Body		•	•	•	245
Other		•	•	•	•
Air Outlet	150	150	150	150	150







DPB3932S

DPB3632S

DEB2631S

Overview			
Control Type	Mechanical Push Buttons	Mechanical Push Buttons	Electronic Slider
Hob ² Hood		•••••••••••••••••••••••••••••••••••••••	
Fan Speed	3	3	Continuous + boost
Breeze Function			
Lights	LED	LED	LED
No. of Lamp x W	2	2	2
Charcoal Filter	2; Included	2; Included	1; Included
Charcoal Filter Type	ECFB03	ECFB03	Type 57
Jltra Charcoal Filter			-
Ultra Charcoal Filter Type			-
Grease Filter Type	Aluminium Cassette	Aluminium Cassette	Aluminium Cassette
Ducted Maximum (ca. m³/h)	370	370	352
Ducted Boost (ca. m³/h)			
Noise (Max. Setting) Ducted (dB(A))	68	68	62
Recirculation Maximum (ca. m³/h)	125	125	232
Recirculation Boost (ca. m³/h)		•	
Noise (Max. Setting) Recirculation (dB(A))	72	72	67
Annual Energy Consumption, kWh/annum	48.9	48.9	106.1
Energy Efficiency Class	С	C	D
Fluid Dynamic Efficiency Class	D	D	D
Lighting Efficiency Class	E	E	A
Grease Filter Efficiency	72.1	72.1	66
Grease Filter Efficiency Class	D	D	D
Off Mode Power (W)	•••	•	
Stand-by Power (W)	••••	•••••••••••••••••••••••••••••••••••••••	
nstallation Height (mm)	••••	•••••••••••••••••••••••••••••••••••••••	
Minimum Distance from Cooking Top – Electric	50	50	50
Minimum Distance from Cooking Top – Gas	65	65	70
Dimensions (mm)	••••	•••••••••••••••••••••••••••••••••••••••	
Width	898	598	598
Depth	284	284	270
Height Max	180	180	400
Height of Body	40	40	400
Other	•••••	•	
Air Outlet	150	150	120

DISHWASHERS









	FSK93847P	FSE83837P	FSE74747P	FSK75757P
Capacity (Number of IEC Place Settings)	14	14	15	14
(XL Tub (Large Interior)	•	•	•	•
Control Type	Touch Control	Touch Control	Touch Control	Touch Control
onnected				•
lumber of Temperatures	4	4	4	4
lumber of Programmes .utomatic 45°C–70°C Programme	·····	<u> </u>		
uickwash 60°C, 30 Min Programme	•	•	•	•
co Programme	•	•	•	•
b0 min programme	•	•	•	•
0 min programme	•	•	•	•
0 min programme	•	•	•	•
laintenance Cycle / Machine care		•		•
xtra silent Programme		***************************************		
lasscare Option	•	•	•	•
tra Power Option	•	•		•
prayZone Option				<u></u>
irDry Technology (Automatic door opening)		······		•
lass care, Soft Spikes	····	······		••••••
lass care, Soft Grips elayStart	•	•	•	•
ime Remaining	•	•	•	•
omfortLift	•	•	•	•
atellite spray arm	•	•	•	•
eiling spray arm	•	•	•	•
eight adjustable upper basket	•	•	•	•
oldable plate racks - bottom basket		•	•	•
oldable cup shelves - bottom basket	•	•	•	•
ower basket glass holder			•	
prayZone				
ime beam - spotlight	•	•	•••••	•
ight beam - spotlight		•	•	
inges 	Sliding Hinges	Sliding Hinges	Sliding Hinges	Sliding Hinges
imensions				
ppliance Dimensions	040	040	040	040
eight /idth	818	818	818	818
epth	596 550	596 550	596 550	596 550
perture dimensions	550	550	550	
uilt-in Height	820	820	820	820
uilt-in Width	900	900	900	900
uilt-in Depth	600	600	600	600
urniture door dimensions				
oor Height (Min – Max)	670-820	670-820	670-820	670-820
oor Weight (Min – Max)	1.5-10	1.5-10	1.5-10	1.5-10
erformance				
nergy consumption / 100 cycles (kWh)	0.5			
	85	85	86	64
	D	D	С	В
nergy Efficiency Index (EEI)	D 499	D 49.9	C 43.9	B 37.9
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh)	D 499 0.848	D 49.9 0.848	C 43.9 0.86	B 37.9 0.664
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) ater consumption / cycle (l)	D 499 0.848 11	D 49.9 0.848 11	C 43.9 0.86 11	B 37.9 0.664 9.9
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) ater consumption / cycle (l) rogramme duration (min)(E20)	D 499 0.848 11 240	D 49.9 0.848 11 240	C 43.9 0.86 11 240	B 37.9 0.664 9.9 240
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) ater consumption / cycle (l) rogramme duration (min)(E20) irborne acoustical noise emissions (dB(A) re 1 pW)	D 499 0.848 11 240 39	D 49.9 0.848 11 240 44	C 439, 0.86 11 240 44	B. 37.9 0.664 9.9 240 42
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) afer consumption / cycle (I) orgramme duration (minXE20) rborne acoustical noise emissions (dB(A) re 1 pW) rborne acoustical noise emission class	D 499 0.848 11 240 39 B	D 4999 0.848 11 240 44 B	C 439 0.86 11 240 44 B	B 379 0.664 99 240 42 B
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) ater consumption / cycle (l) ogramme duration (min)(E20) irborne acoustical noise emissions (dB(A) re 1 pW) irborne acoustical noise emission class eaning performance index	D 499 0.848 11 240 39 B	D 499 0.848 11 240 44 B	C 439 0.86 11 240 44 B	B 379 0.664 99 240 42 B 1121
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) later consumption / cycle (l) rogramme duration (min)(E20) irborne acoustical noise emissions (dB(A) re 1 pW) irborne acoustical noise emission class leaning performance index rying performance index	D 499 0.848 11 240 39 B 1121	D 499 0.848 11 240 44 B 1.121	C 439 0.86 11 240 44 B 1121	B 379 0.664 99 240 42 B 1121
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) ater consumption / cycle (I) ogramme duration (min)(E20) rborne acoustical noise emissions (dB(A) re 1 pW) rborne acoustical noise emission class eaning performance index rying performance index ff-mode (W)	D 499 0848 11 240 39 8 1121 1061	D 4999 0.848 11 240 44 8 1121 1.061 0.5	C 43.9 0.86 11 240 44 B 1121 1.061 0.5	B 379 0.664 99 240 42 B 1121 1.061 0.5
nergy Efficiency Index (EEI) nergy consumption / cycle (Wh) afer consumption / cycle (Wh) afer consumption / cycle (I) orgamme duration (min)(E2O) irborne acoustical noise emissions (dB(A) re 1 pW) irborne acoustical noise emission class eaning performance index rying performance index ff-mode (W) andby mode (W)	D 499 0.848 11 240 39 B 1121 1.061 0.5	D 49.9 0.848 11 240 44 B 1.121 1.061 0.5	C 439, 0.86 11 240 44 B 1121 1.061 0.5	B 379 0.664 99 240 42 B 1121 1.061 0.5
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) afer consumption / cycle (I) orgamme duration (min)(E20) rborne acoustical noise emissions (dB(A) re 1 pW) rborne acoustical noise emission class eaning performance index rying performance index ff-mode (W) andby mode (W) elay start (W)	D 499 0.848 11 240 39 B 1.121 1.061 0.5 0.5	D 4999 0.848 111 240 44 B 1.121 1.061 0.5 0.5	C 439, 0.86 11 240 44 B 1121, 1.061 0.5 0.5	B 379 0.664 99 240 42 B 1.121 1.061 0.5 0.5
tergy Efficiency Index (EEI) tergy consumption / cycle (Wh) after consumption / cycle (I) ogramme duration (min)(E20) thorne acoustical noise emissions (dB(A) re 1 pW) thorne acoustical noise emission class eaning performance index ying performance index f-mode (W) andby mode (W) elay start (W) etworked standby (W)	D 499 0.848 11 240 39 B 1121 1.061 0.5	D 49.9 0.848 11 240 44 B 1.121 1.061 0.5	C 439, 0.86 11 240 44 B 1121 1.061 0.5	B 379 0.664 99 240 42 B 1121 1.061 0.5
tergy Efficiency Index (EEI) tergy consumption / cycle (kWh) ater consumption / cycle (I) orgramme duration (min)(E20) rborne acoustical noise emissions (dB(A) re 1 pW) rborne acoustical noise emission class eaning performance index ying performance index f-mode (W) andby mode (W) elay start (W) etworked standby (W) ther	D 499 0.848 11 240 39 B 1.121 1.061 0.5 0.5	D 4999 0.848 111 240 44 B 1.121 1.061 0.5 0.5	C 439, 0.86 11 240 44 B 1121, 1.061 0.5 0.5	B 379 0.664 99 240 42 B 1.121 1.061 0.5 0.5
tergy Efficiency Index (EEI) tergy consumption / cycle (kWh) ater consumption / cycle (I) orgamme duration (min)(E20) rborne acoustical noise emissions (dB(A) re 1 pW) rborne acoustical noise emission class eaning performance index ying performance index f-mode (W) andby mode (W) elay start (W) there	D 499 0.848 11 240 39 B 1121 1061 0.5 0.5	D 4999 0.848 11 240 44 B 1121 1.061 0.5 0.5	C 439 0.86 11 240 44 B 1121 1.061 0.5 0.5	B 379 0.664 99 240 42 B 1121 1.061 0.5 0.5
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) ater consumption / cycle (l) ogramme duration (min)(E20) rborne acoustical noise emissions (dB(A) re 1 pW) rborne acoustical noise emission class eaning performance index ying performance index ff-mode (W) andby mode (W) elay start (W) etworked standby (W) ther	D 499 0.848 11 240 39 B 1,121 1,061 0.5 0.5 4 2	D 49.9 0.848 11 240 44 B 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200	C 439 0.86 11 240 44 B 111 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200	B 379 0.664 99 240 42 B 1.121 1.061 0.5 0.5 4 2
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) later consumption / cycle () rorgamme duration (min)(E20) irborne acoustical noise emissions (dB(A) re 1 pW) irborne acoustical noise emission class leaning performance index rying performance index ff-mode (W) andby mode (W) elay start (W) etworked standby (W) ther bitage lequency connected Load	D 499 0.848 11 240 39 B 1.121 1.061 0.5 0.5 4 2 2 220-240 50/60 1550-2200	D 49.9 0.848 11 240 44 B 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10	C 439 0.86 11 240 44 8 1121 1061 0.5 0.5 4 2 220-240 50/60	B 379 0.664 99 240 42 B 1121 1.061 0.5 0.5 4 2
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) later consumption / cycle (l) rorgamme duration (min)(E2O) irborne acoustical noise emissions (dB(A) re 1 pW) irborne acoustical noise emission class leaning performance index rying performance index ff-mode (W) andby mode (W) elay start (W) etworked standby (W) ther oltage requency onnected Load use Rating linimum Water Pressure 1 bar/15 psi	D 499 0.848 11 240 39 B 1,121 1,061 0.5 0.5 4 2	D 49.9 0.848 11 240 44 B 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200	C 439 0.86 11 240 44 B 111 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200	B 379 0.664 99 240 42 B 1.121 1.061 0.5 0.5 4 2
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) later consumption / cycle (l) rorroramme duration (min)(E20) irborne acoustical noise emissions (dB(A) re 1 pW) irborne acoustical noise emission class leaning performance index rying performance index ff-mode (W) leandby mode (W) leay start (W) etworked standby (W) ther oltage lequency onnected Load use Rating linimum Water Pressure 1 bar/15 psi let Hose with 3/4" BSP Thread Hose Connection	D 499 0.848 11 240 39 B 1.121 1.061 0.5 0.5 4 2 2 220-240 50/60 1550-2200	D 49.9 0.848 11 240 44 B 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10	C 439 0.86 11 240 44 B 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10	B 379 0.664 99 240 42 B 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10
nergy Efficiency Index (EEI) nergy consumption / cycle (Wh) later consumption / cycle (Wh) lirborne acoustical noise emissions (dB(A) re 1 pW) lirborne acoustical noise emission class leaning performance index rying performance index rying performance index ff-mode (W) landby mode (W) lelay start (W) leav start (W) letworked standby (W) ther loltage lequency lonnected Load lise Rating linimum Water Pressure 1 bar/15 psi let Hose with 3/4" BSP Thread Hose Connection later Softener	D 499 0.848 11 240 39 B 1121 1.061 0.5 0.5 4 2 2 220-240 50/60 1550-2200	D 49.9 0.848 111 240 44 B 1121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10 • •	C 43.9 0.86 11 240 44 8 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10 • •	B 379 0.664 99 240 42 B 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10 •
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) (after consumption / cycle (l) rogramme duration (min)(E2O) irborne acoustical noise emissions (dB(A) re 1 pW) irborne acoustical noise emission class leaning performance index rying performance index (ff-mode (W) (andby mode (W) (elay start (W) etworked standby (W) **ther ololtage requency onnected Load use Rating linimum Water Pressure 1 bar/15 psi liet Hose with 3/4" BSP Thread Hose Connection (after Softener (after Sopply (Max. 60°)	D 499 0.848 11 240 39 B 1.121 1.061 0.5 0.5 4 2 2 220-240 50/60 1550-2200	D 49.9 0.848 11 240 44 B 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10	C 439 0.86 11 240 44 B 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10	B 379 0.664 99 240 42 B 1121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) after consumption / cycle () rorgamme duration (min)(E2O) irborne acoustical noise emissions (dB(A) re 1 pW) irborne acoustical noise emission class leaning performance index rying performance index ff-mode (W) andby mode (W) elay start (W) etworked standby (W) ther bltage requency onnected Load use Rating linimum Water Pressure 1 bar/15 psi liet Hose with 3/4* BSP Thread Hose Connection later Softener later Supply (Max. 60°) after Refill Indicator	D 499 0.848 11 240 39 B 1121 1.061 0.5 0.5 4 2 2 220-240 50/60 1550-2200	D 49.9 0.848 111 240 44 B 1121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10 • •	C 43.9 0.86 11 240 44 8 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10 • •	B 379 0.664 99 240 42 B 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10 •
nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) (after consumption / cycle (t) rogramme duration (min)(E2O) irrborne acoustical noise emissions (dB(A) re 1 pW) irrborne acoustical noise emission class leaning performance index ryying performance index (w) there (w) telay start (W) letworked standby (W) there (oltage requency onnected Load use Rating finimum Water Pressure 1 bar/15 psi let Hose with 3/4" BSP Thread Hose Connection (after Softener Vater Supply (Max. 60°) alt Refill Indicator inse Aid Refill Indicator	D 499 0.848 11 240 39 B 1121 1.061 0.5 0.5 4 2 2 220-240 50/60 1550-2200	D 49.9 0.848 111 240 44 B 1121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10 • •	C 43.9 0.86 11 240 44 8 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10 • •	B 379 0.664 99 240 42 B 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10 •
nergy efficiency class (EEC) nergy Efficiency Index (EEI) nergy consumption / cycle (kWh) //ater consumption / cycle (I) rogramme duration (min)(E2O) irborne acoustical noise emissions (dB(A) re 1 pW) irborne acoustical noise emission class leaning performance index vrying performance index strying performance index strying performance index ff-mode (W) tandby mode (W) lelay start (W) letworked standby (W) tetworked standby (W) tetworked standby (W) tetworked standby (W) letworked (W) letworked standby (W) letworked (W) let	D 499 0.848 11 240 39 B 1121 1.061 0.5 0.5 4 2 2 220-240 50/60 1550-2200	D 49.9 0.848 111 240 44 B 1121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10 • •	C 43.9 0.86 11 240 44 8 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10 • •	B 379 0.664 99 240 42 B 1.121 1.061 0.5 0.5 4 2 220-240 50/60 1550-2200 10 •









	FSS63607P	FSK52917Z	FSB42607Z	FSE72507P
Capacity (Number of IEC Place Settings)	13	14	13	9
XL Tub (Large Interior)				
ontrol Type	Touch control	Touch control	Touch control	Electronic
onnected umber of Temperatures				/
		3	<u></u>	4
umber of Programmes		<u>.</u>	5	
utomatic 45°C–70°C Programme	······································	······	······································	
uickwash 60°C, 30 Min Programme	··· · ·····		······································	······
co Programme	<u>.</u>		•	
0 min programme		•		
O min programme				
O min programme				······································
aintenance Cycle / Machine care			-	······································
xtra silent Option lasscare Option				······································
ra Power Option				······································
	······································	······	······································	·······
orayZone Option	······			······································
rDry Technology (Automatic door opening)	····	······	<u> </u>	
ass care, Soft Spikes		•	•••••	•
ass care, Soft Grips	-		<u> </u>	
elayStart	-		•	•
me Remaining	•	•	•	•
omfortLift	······································	.		
atellite spray arm	•	<u> </u>		•
eiling spray arm	•	•		•
eight adjustable upper basket	•	•	•	•
oldable plate racks - bottom basket	•	•		•
oldable cup shelves - bottom basket	•	•	···	•
ower basket glass holder		•		
prayZone	•			
ime beam - spotlight				
ight beam - spotlight	•	•		•
inges	Sliding Hinges	Sliding Hinges	Sliding Hinges	Sliding Hinges
imensions				
ppliance Dimensions				
eight	818	818	818	818
idth	596	596	596	446
epth	550	550	550	550
perture dimensions				
uilt-in Height	820	820	820	820-880
uilt-in Width	880	880	880	450
uilt-in Depth	600	600	600	550
urniture door dimensions	000	000		
oor Height (Min – Max)	670-820	645-776	645-776	645-776
				2.0-6.0KG
oor Weight (Min – Max)	1.5-10	2.0-10	2.0-10	2.U-6.UKG
erformance				
nergy consumption / 100 cycles (kWh)	84	95	94	75
nergy efficiency class (EEC)	D	E	<u> </u>	<u>E</u> _
nergy Efficiency Index (EEI)	49.9	55.9	55.9	55.9
nergy consumption / cycle (kWh)	0.835	0.950	0.936	0.754
ater consumption / cycle (I)	10.5	10.5	9.9	9.9
ogramme duration (min)(E20)	240	240	227	240
rborne acoustical noise emissions (dB(A) re 1 pW)	44	44	46	44
rborne acoustical noise emission class	В	В	C	В
eaning performance index	1.121	1.121	1.121	1.121
rying performance index	1.061	1.061	1.061	1.061
ff-mode (W)	0.5	0.5	0.5	0.5
andby mode (W)	0.5	0.5	0.5	0.5
elay start (W)	4	4	4	4
etworked standby (W)	2	2		
ther				•
oltage	220-240	220-240	200-240	220-240
equency	50/60	50/60	50/60	50/60
onnected Load	1550-2200	1550-2200	1550-2200	1550-2200
ise Rating	10	10	10	10
	•			
inimum Water Pressure 1 bar/15 psi let Hose with 3/4" BSP Thread Hose Connection		<u></u>	······································	
	<u> </u>	· · · · · · · · · · · · · · · · · · ·		-
ater Softener	Cold as Ust	Cold c- U-+	Cold or Hot	•
ater Supply (Max. 60°)	Cold or Hot	Cold or Hot	Cola or Hot	Cold or Hot
alt Refill Indicator	•	•	<u>.</u> •	•
nse Aid Refill Indicator		•	•	•
ater Hardness Setting		•		•

op and side fixing brackets Vorktop steam protection			•	•

WASHING MACHINES











L9FEC966R

L8FEE965R

L7FEE845R

L6FBG941CA

L7FC8432BI

Wash Capacity (kg)	9	9	8	9	8
oin Speed (rpm)	1600	1600	1400	1400	1400
isplay	Large Display	Medium Display	Medium Display	Medium Display	Medium Display
ascia Panel	Stainless Steel	Matte Silver	Matte Silver	White	Silver
oor Colour/Type	Silver	Silver	Silver	White	
	Silver	Silver	Silver	wniie	Silver
echnology					
2000 Series Technology	•				• · · · · · · · · · · · · · · · · · · ·
3000 Series Technology	•	•		•	•
'000 Series Technology	•	•	•	•	•
000 Series Technology	•	•	•	•	•
Awards					
Voolmark	Green	Green	Blue	Blue	Blue
Ariel + Lenor Certified	•	•	•	•	•
Programmes		•••••		•	• · · · · · · · · · · · · · · · · · · ·
	•				
ColourPro	······		•		•
ÖKOPower		<u> </u>			
Cottons	•	······	•	•	•
Eco 40-60	•	•	•	<u>.</u>	
Synthetics	•	•	•	<u></u>	•
Delicates	•	•	•		•
Vool					
Vool/Silk	•	•	•	•	•
Down Jacket					
20min 3kg	•	•	•	•	•
Steam	•	•	•		•
Spin/Drain		•••••	•••••	•	•
Dutdoor	•	•	•	•	•
Duvet		•	•	•	•
Anti Allergy	•	•	•	•	•
Easy Iron		•••••		•	•
Sport		•••••	•	•	•
Denim		•			
· · · · · · · · · · · · · · · · · · ·				•	•
Options					
Steam	•	•	•		•
Anti Allergy	•	•	•		•
Start/Pause	•	•	•	•	
Femp Selection	•	•	•	•	•
Spin Selection	•	•	•	•	•
tains/Prewash	•	•	•	•	•
Rinse	•	•	•	•	•
Fime Saving	•	•	•	•	•
Delayed Start	•	•	•	•	•
Energy and Water Performance			•••••	-	•
Energy Efficiency Class	A	A	С	A	D
pin Drying Efficiency Class	B	B	В	В	В
					•••••
Airborne Acoustical Noise Emission Class	B	B	B 75	B	A
Airborne Acoustical Noise Emissions (dB)	75	76	75	75	68
nergy Consumption / 100 Cycles (kWh)	49	49	63	49	73
Vater Consumption Per Cycle (L)	49	46	47	50	47
ycle Duration, Program Eco 40-60 (h:min)	03:40	03:40	03:30	03:40	03:30
Dimensions					
Height (mm)	850	850	850	850	819
Vidth (mm)	600	600	600	600	596
Depth Max (mm)	660	660	600	660	553
Net Weight (kg)	80.5	78.5	72.5	76.5	71.5

TUMBLE DRYERS

Power Cord Length (mm)







T8DEC846R

T7DEE845R

T6DBG821N

Overview			
Dry Capacity (kg)	8	8	8
isplay	Large Display	Medium Display	Medium Display
ontrols	Dial and Touch Buttons	Dial and Touch Buttons	Dial and Touch Buttons
ascia Panel	Stainless Steel	Matte Silver	White
oor Colour/Type	Premium Silver Door	Premium Silver Door	White Door
echnology			
000 Series Technology	•		
	•		
000 Series Technology	······································	······································	
000 Series Technology	······	•	•
wards			
/oolmark	Blue		
uiet Mark			
rogrammes			
ottons	•	•	•
otton Eco			•
/nthetics	•	•	•
efresh	••••••••••••		
elicates			•
/ool	•	•	•••••
ool Refresh		••••	•••••
ixed	•	•	•
ilk		•	-
	•	•	
edlinen			
asy Iron	•	······································	•
utdoor	•		
uvet	•	•	•
ports	•	•	•
ctive Wear		•	
eans			•
reshen Up			
ime 30			
ottons — Extra Dry			•
ottons – Strong Dry			
ottons – Cupboard Dry			•
ottons – Iron Dry			•
ynthetics – Extra Dry			•
ynthetics – Cupboard Dry			
ynthetics – Cupboald Dry ynthetics – Iron Dry		•••••	······
		••••	
ptions			
elay Start	•	•	•
elicate			•
Prying Mode			
nti-crease	•	•	•
ryness Level	•	•	•
ime Drying	•	•	•
tart/Pause	•	•	•
hild Lock	•	•	•
uiet	•		••••••
team Level			•
ensitive	······································		
uzzer			•••••
	•	•	•
efresh	•	•	
nergy Performance			
nergy Efficiency Class	A++	A++	В
nnual Energy Consumption (kWh)	235	235	561
rying Noise (dB)	66	66	65
tand-by Power (W)	1.9	1.9	1.9
imensions			
leight (mm)	850	850	850
/idth (mm)	600	600	596
Pepth Max (mm)	665	665	626
et Weight (kg)	48.26	48.46	38.46
.cc.giii (kg)	40.20	70.40	30.40

1450

1450

1450

WASHER DRYERS







L7WEE965R

L7WBG751R

L7WC8632BI

	L7WEE965R	L7WBG751R	L7WC8632BI
Overview			
Wash Capacity (kg)	9	7	8
Dry Capacity (kg)	6	5	4
Spin Speed (rpm)	1600	1400	1600
)isplay	Medium Display	Small Display	Medium Display
Controls	Dial and Touch Buttons	Dial and Touch Buttons	
			Dial and Touch Buttons
ascia Panel	Silver	White	Silver
Door Colour/Type	Silver	White	White
Technology Technology			
000 Series		-	
		•	•
000 Series			
000 Series	•	•	•
000 Series	•	•	•
wards	•••••	•	•••••
Voolmark	DI	Dl	Dl
	Blue	Blue	Blue
Ariel + Lenor Certified		•	•
Programmes			
Cottons	•		•
co 40-60	•	•	•
	···· ·	••••••	•••••
ynthetics	•	<u></u>	•
Pelicates	•	•	•
Vool	•	•	•
Denim	•••••	•	•
Silk			
		•	
lon Stop 3h/3kg			
iteam	•	•	•
pin/Drain		•	•
Dutdoor	•	•	•
Duvet		•	
Anti Allergy	•		•
port			•
Non Stop 60min	•	••••••	•
			•••••••••••
Rinse			
Machine Clean			•
Quick 20 Wash & Dry 60		•	
Options	•		
Start/Pause	•		•
	<u>.</u>	•	······
Temp Selection	•	•	
Spin Selection	•	•	•
itains/Prewash	•	•	•
Extra Rinse	····		•
		•	••••••••••
Fime Saving		•	
Delayed Start	•	•	•
Quick Wash	•	•	
Anti-Crease	•••••	•••••	•••••••••••
		•	•
Vash/Dry mode		•	
ime Drying	•	•	•
uto Drying	•	•	•
	•	•	
Child Lock	•••••	•	•••••
nergy and Water Performance			
nergy Efficiency Wash Class	A	В	D
Energy Efficiency Wash and Dry Class	E	E	E
pin Drying Efficiency Class	В	В	В
Airborne Acoustical Noise Emission Class			•••••
	B	B	A
Airborne Acoustical Noise Emissions (dB)	76	75	70
nergy Consumption Wash / 100 Cycles (kWh)	49	52	73
Energy Consumption Wash Dry / 100 Cycles (kWh)	376	325	266
Vater Consumption Per Wash Cycle (L)	46	•	47
		41	
Vater Consumption Per Wash Dry Cycle (L)	70	67	60
Cycle Duration, Wash Program Eco 40-60 (h:min)	03:04	03:25	03:30
Cycle Duration, Wash Dry Program Eco 40-60 (h:min)	08:05	06:20	06:15
Dimensions	50.05	<u></u>	00.15
	6:-		
Height (mm)	847	847	820
Vidth (mm)	597	597	596
Pepth Max (mm)	631	631	540
Net Weight (kg)	78.5	69.5	72.5
Power Cord Length (m)	76.5	1.8	1.5

Specification	tables

INSTALLATION DIAGRAMS

AEG has always been committed to supporting its retail partners and professional installers by providing them with best in class installation solutions. AEG kitchens are simple to install and use only one Torx T20 screwdriver to install all of our appliances, allowing installers to save time. In 2018, AEG launched a first of its kind Installer App, giving professional installers access to installation information at their fingertips.

IN THIS SECTION

Refrigeration

Integrated Fridge Freezers

Integrated Fridges and Freezers

Freestanding Fridge Freezers

Wine Cooling

Cooking

Single Ovens

Built-In Double Ovens

Built-Under Double Oven

Compacts

Microwave Ovens

Hobs

Hoods

Dishwashers


Fully Integrated Dishwashers

Slimline Fully Integrated Dishwasher

Laundry


Built-in Washing Machine

Built-in Washer Dryer

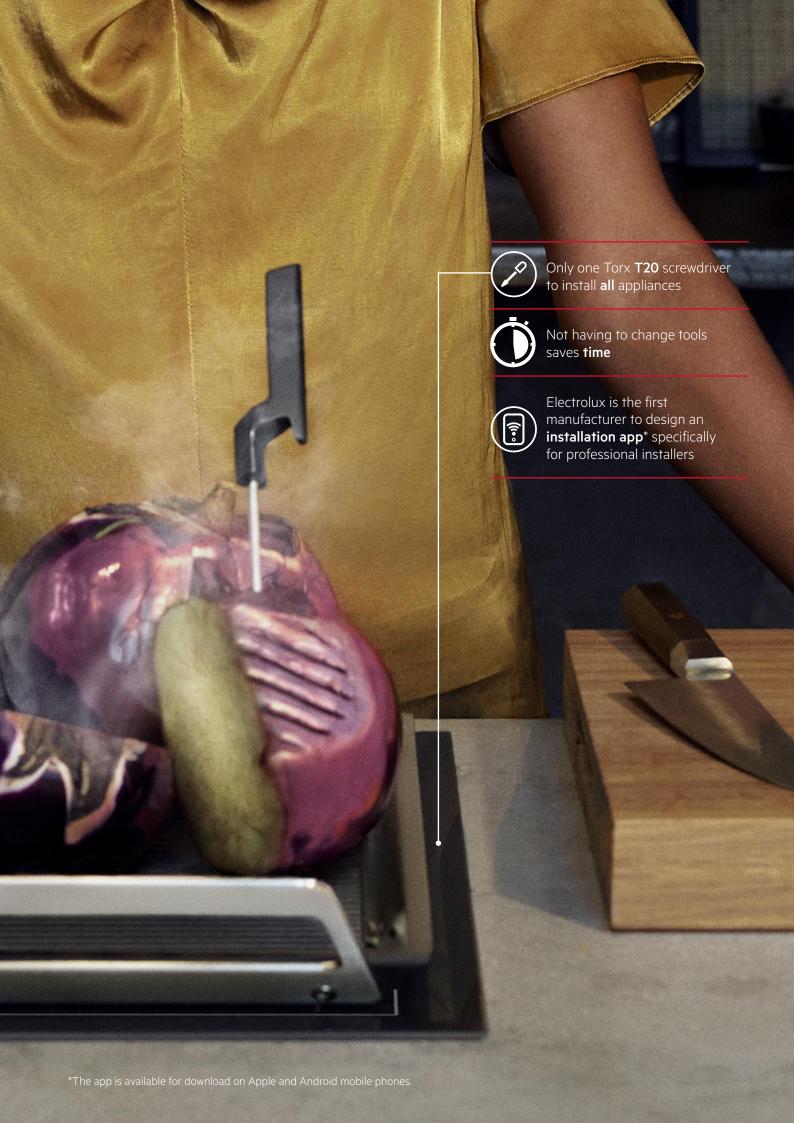


INTEGRATED FRIDGE FREEZERS


SCE818C5TC, SCE818E5TC, SCE818E6TC




SCE818E6NS




SCE818E8TS



SCB614F1LS




SCE819E5TS, SCE819E7TS




INTEGRATED FRIDGES/FREEZERS


ABE682F1NF, ABB682F1AF, SFB5821VAF, SKB582F1AF




SKK818E9ZC



ABK818E6NC, SKE818E1DC




SKB812F1AC




SIDE BY SIDE FRIDGE FREEZERS

RMB76111NX




WINE COOLING


AWUS052B5B



RMB854F9UX




AWUS020B5B




COMPACT WINE COOLER

KWK884520M, KWK884520T




SINGLE OVENS

ALL MODELS EXCLUDING BPK744L21M, BPK744R21M




DOUBLE OVENS


DCK731110M, DCK431110M BUILT-IN



BPK744L21M, BPK744R21M




DUK731110M BUILT UNDER




COMPACT OVENS






BEAN TO CUP COFFEE MACHINES

KKK994500M, KKK994500T




KKK884500M




WARMING DRAWERS

KDK912924M, KDE912924M




KDK911424M, KDK911424T, KDE911424M, KDE911424B




VAC SEALERS

KDK911423M, KDK911424T, KDE911423B




MICROWAVE OVENS

MBE2658SEM




MBB1756SEM, MBB1755SEM




*For perfect horizontal alignment please check the individual product dimensions..

INDUCTION HOBS


IAE844881FB, IAE844851FB, IPE84531FB, IAE84421FB, IKE85751FB, IAE84411FB, IKB84401FB, IKK86681FB



IKE85651FB




IPE64551FB, IKE64450FB, IAE64421FB, IAE64411FB, IKB64401FB, ILB64334CB




INDUCTION HOBS

IKE95751FB




IKK93431FB




EXTRACTOR HOBS

CCE84779FB, CDE84779FB, CCE84751FB, CDE84751FB

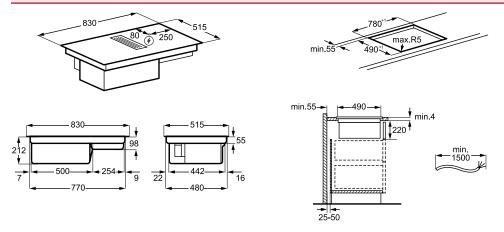


IDE74243IB

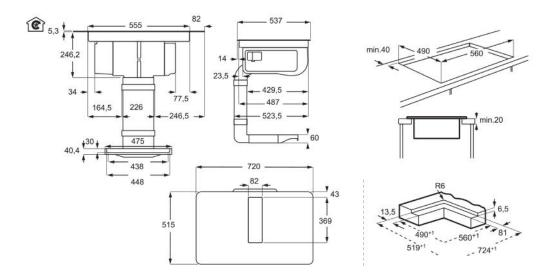


CERAMIC HOB

HK634060XB




GAS HOBS


HVB95450IB




HKB95450NB




HGB95522YM




HVB75450IB




HKB75450NB




HGB75420YM



HKB64450NB




HGB64420YM




MIXED FUEL HOB

HD955100NB




MODULAR HOB

IKE42640KB




DESIGNER HOODS


DLE0970M

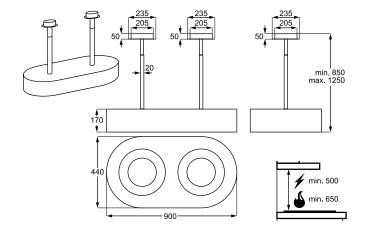

DLE0630B/W




DLE0431W/B/M




HOODS


DIK6180HG




DIE5961HG




DDE5980G




DCK5281HG




DCE5960HM




DVK6981HR




DVE5971HG




DKB4950M, DKB4650M




DVE5671HG




DBK6980HG



DBK6680HG




DBE5961HG/DBE5761HG/DBE5661HG




HOODS


DGE5861HM, DGE5861HB




DPB3632S




DGE5661HM, DGE5661HB




DPB3932S



DGB3850M




DEB2631S




DISHWASHERS

FSK93847P, FSE83837P, FSE74747P, FSK75757P, FSS63607P




FSE72507P

SLIMLINE INTEGRATED




FSK52917Z, FSB42607Z


FULLY INTEGRATED




LAUNDRY

L7FC8432BI, L7WC8632BI








ENERGY INFORMATION


UK & EUROPEAN EFFICIENCY SCALE

This scheme, which covers refrigerators, freezers, wine coolers, washing machines, washer dryers and dishwashers is designed to offer you a standardised method of choosing the most energy efficient appliances. For washer dryers, the label will scale separately washing & drying, and washing.

Energy Label for customers in **England, Scotland and Wales**

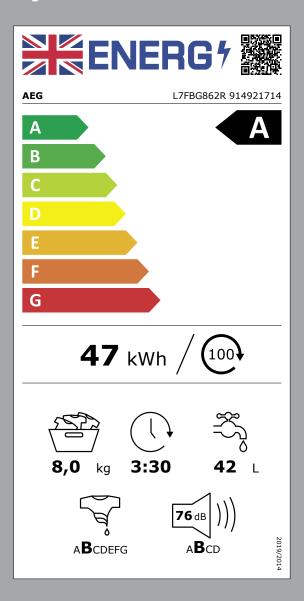

Energy Label for customers in **Republic of Ireland and Northern Ireland**

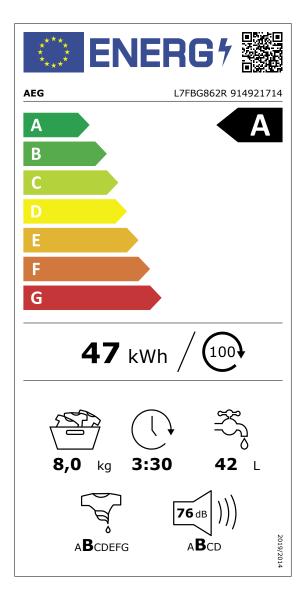

AFTER SALES SUPPORT & CUSTOMER CARE

Customer Service

Should you need to contact us about your product we have a dedicated AEG customer service team to help. Our team is based in the AEG UK head office and can be contacted by phone on **03445 611 611** or via **aeg.co.uk**

Local service, nationwide

Our national network of Service Force agents provide product maintenance, genuine parts and repairs for all AEG Major Appliances. Genuine AEG parts ensure you continue to experience the excellent performance you expect from your AEG product.

If you require a visit from one of our agents for your Major Appliance please call our Service Force team on **03445 616 616**.



AEG Major Appliances Addington Way Luton LU4 9QQ

Telephone: 03445 611 611

AEG Major Appliances is a division of Electrolux plc. Registered in England, No. 2331516. Registered Office, Addington Way, Luton LU4 9QQ

AEG Major Appliances Electrolux Group Ireland Ltd Suite 7 & 8 Westland House, Westland Business Park, Nangor Road, Dublin 12 D12 TR98

Tel: 00353 (0)818 543000

Registered in Ireland No 9118. Registered Office: Nangor Road, Dublin 12 D12 TR98





We are AEG.

We exist to redefine what you expect out of your household appliances, which is why we want to challenge the boundaries of everyday life.

Since our start in Berlin in 1887, we've never settled for good enough. And we don't think you should have to either.

That's why we never compromise with innovations for your home. We believe in responsible innovations that stand out today and help build a better tomorrow. So you can live on your own terms while also living up to the terms of the environment.

CHALLENGE THE EXPECTED