








## Product Specifications

| Incident Detection Cameras |  |   |  |  |  |  |
|----------------------------|--|--|---|---|---|---|
|                            |  | iDS-TCS800-C(I)  | iDS-TCS807-C(I)R  | iDS-TCS817-CR   | iDS-TCS817-C  | iDS-TCS907-CE(I)R   |
| Visible Camera             | Image Sensor   | 8 MP (1/1.2" CMOS)   |   |   |   | 9 MP (1" GMOS)  |
|                            | Focal Length   | 15-50 mm (default)<br>5.7-21 mm  |   |   |   | 11 to 40 mm<br>25 mm  |
|                            | Max. Image Dimensions  | /  | /   | 640 × 512   | 640 × 512   | /   |
| Thermal Imaging            | Focal Length   | /  | /   | 25 mm (default), Optional: 10, 15, 50 mm  |   | /   |
|                            | Measuring Temperature Range  | /  | /   | 0° - 550°C  | 0° - 550°C  | /   |
|                            | Central Frequency  | /  | 77 GHz  | 77 GHz  | /   | 77 GHz  |
| Radar                      | Measurement Accuracy   | /  | ±2 km/h   | ±2 km/h   | /   | ±2 km/h   |
|                            | Tracking Target  | /  | 128   | 128   | /   | 128   |
|                            | Shell Material   | Aluminum alloy   | Aluminum alloy  | Aluminum alloy  | Stainless steel 316L  | Aluminum alloy  |
| Coverage                   | 2-3 lanes  | 2-3 lanes  | 2-3 lanes   | 2-3 lanes   | 2-3 lanes   |   |
| Incident Detection         | Smart Functions  | Driving on lane lines, lane changes, wrong-way driving, stopped vehicle, emergency lane occupation, roadblocks, construction, fallen objects, pedestrians, congestion, fire/smoke detected in tunnel |   |   |   |   |
|                            | Sudden Speed Drop  | ⊖  | ✔   | ✔   | ⊖   | ✔   |
|                            | Speeding   | ⊖  | ✔   | ✔   | ⊖   | ✔   |
|                            | Under-speed Driving  | ⊖  | ✔   | ✔   | ⊖   | ✔   |
|                            | Animal Detection (needs customization)   | ⊖  | ⊖   | ✔   | ✔   | ⊖   |
|                            | Phone Calling  | ⊖  | ⊖   | ⊖   | ⊖   | ✔   |
|                            | Seatbelt Violation (with flash supplemental light)   | ⊖  | ⊖   | ⊖   | ⊖   | ✔   |
| Traffic - Flow             | Vehicle type (big, small, motorcycle), lane flow, lane speed, space headway, time headway, lane time occupancy rate, lane space occupancy rate, queuing length, and traffic status (smooth, slow, congested) |  |   |   |   |   |

| Incident Detection Servers |   |    |  |
|----------------------------|---|---|---|
|                            |   | iDS-TSS300-C  | iDS-TSS500-C  |
| Operating System           | Embedded Linux Operating System   | Centos  |   |
| Accessed Camera            | Supports access to <b>four channels</b> of 4 MP conventional security cameras, smart security camera, or ONVIF protocol-supported third-party cameras to detect traffic incidents and collect traffic parameters simultaneously | Supports access to <b>sixteen channels</b> of 4 MP conventional security cameras, smart security cameras, or ONVIF protocol-supported third-party cameras to detect traffic - incidents and collect traffic - parameters simultaneously |   |
| USB Interface              | 1 × USB 3.0   | 4 × USB 3.0, 2 × USB 2.0  |   |
| On-board Storage           | 1 × 4 TB 3.5-inch SATA HDD (Default)<br>4 × 6 TB (Scalable)   | 240 GB for image storage  |   |
| Device Deployment          | <b>Front-end</b> Intersection Cabinet   | <b>Back-end</b> Platform Center   |   |
| Incident Detection         | Driving on lane lines, lane changes, wrong-way driving, stopped vehicle, emergency lane occupation, roadblocks, construction, fallen objects, pedestrians, congestion, fire/smoke detected in tunnel                            |   |   |
| Traffic - Flow             | Vehicle type (big, small, motorcycle), lane flow, lane speed, space headway, time headway, lane time occupancy rate, lane space occupancy rate, queuing length, and traffic status (smooth, slow, congested)                    |   |   |

**HIKVISION**



**Headquarters**  
No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

Distributed by

 Hikvision
  hikvision
  HikvisionHQ
  HikvisionHQ
  Hikvision\_Global
  Hikvision Corporate Channel



**HIKVISION**

**EARLIER DETECTION,  
BETTER PREVENTION**  
Traffic Incident Detection System



# HIKVISION'S TRAFFIC INCIDENT DETECTION SYSTEM

Excessive traffic is a growing issue on road networks around the world. Civil authorities are facing increasing pressure to keep traffic on the move safely and efficiently, as well as optimize traffic order with data analysis.

To this end, Hikvision has combined a deep-learning algorithm with front- and back-end products to offer multi-functional incident detection systems, providing earlier detection, achieving better prevention, and reducing potential risks. Ensure road safety and efficient traffic flow wherever it's implemented.

## Why Choose

### Hikvision's Incident Detection System?



#### The flexible product portfolio meets all kinds of needs

Hikvision dedicates its best-in-class deep-learning algorithms in front-end cameras and back-end servers, satisfying diverse needs in the market. Remarkably, those back-end servers support various types of cameras, not only Hikvision cameras but other ONVIF or RTSP protocol-supported third-party cameras.



#### Multi-functional products extend application value

Hikvision's incident detection system was developed with practical functions, comprising incident detection and traffic flow data collection. These integrated functions boost traffic safety and promote more fluid traffic flow.




#### Traffic data gets managed on one intuitive platform

All Hikvision incident detection systems align with HikCentral to achieve holistic management. Powered by intelligent analysis, all traffic data collected can be transformed and presented by easy-to-understand reports, enabling flexible and efficient management.

## Incident Detection

Hikvision's incident detection products provide early warnings and collect evidence around events and parameters that affect vehicles and traffic safety on the road. It's the best tool to ensure safety and promote fluid vehicle movement on the roadways.

Powered by tremendous amounts of video samples, multi-frame recognition, and deep-learning algorithms, Hikvision's detection system detects a range of incidents that effectively regulate driver activity, ensuring road safety and improving the conditions for law enforcement.

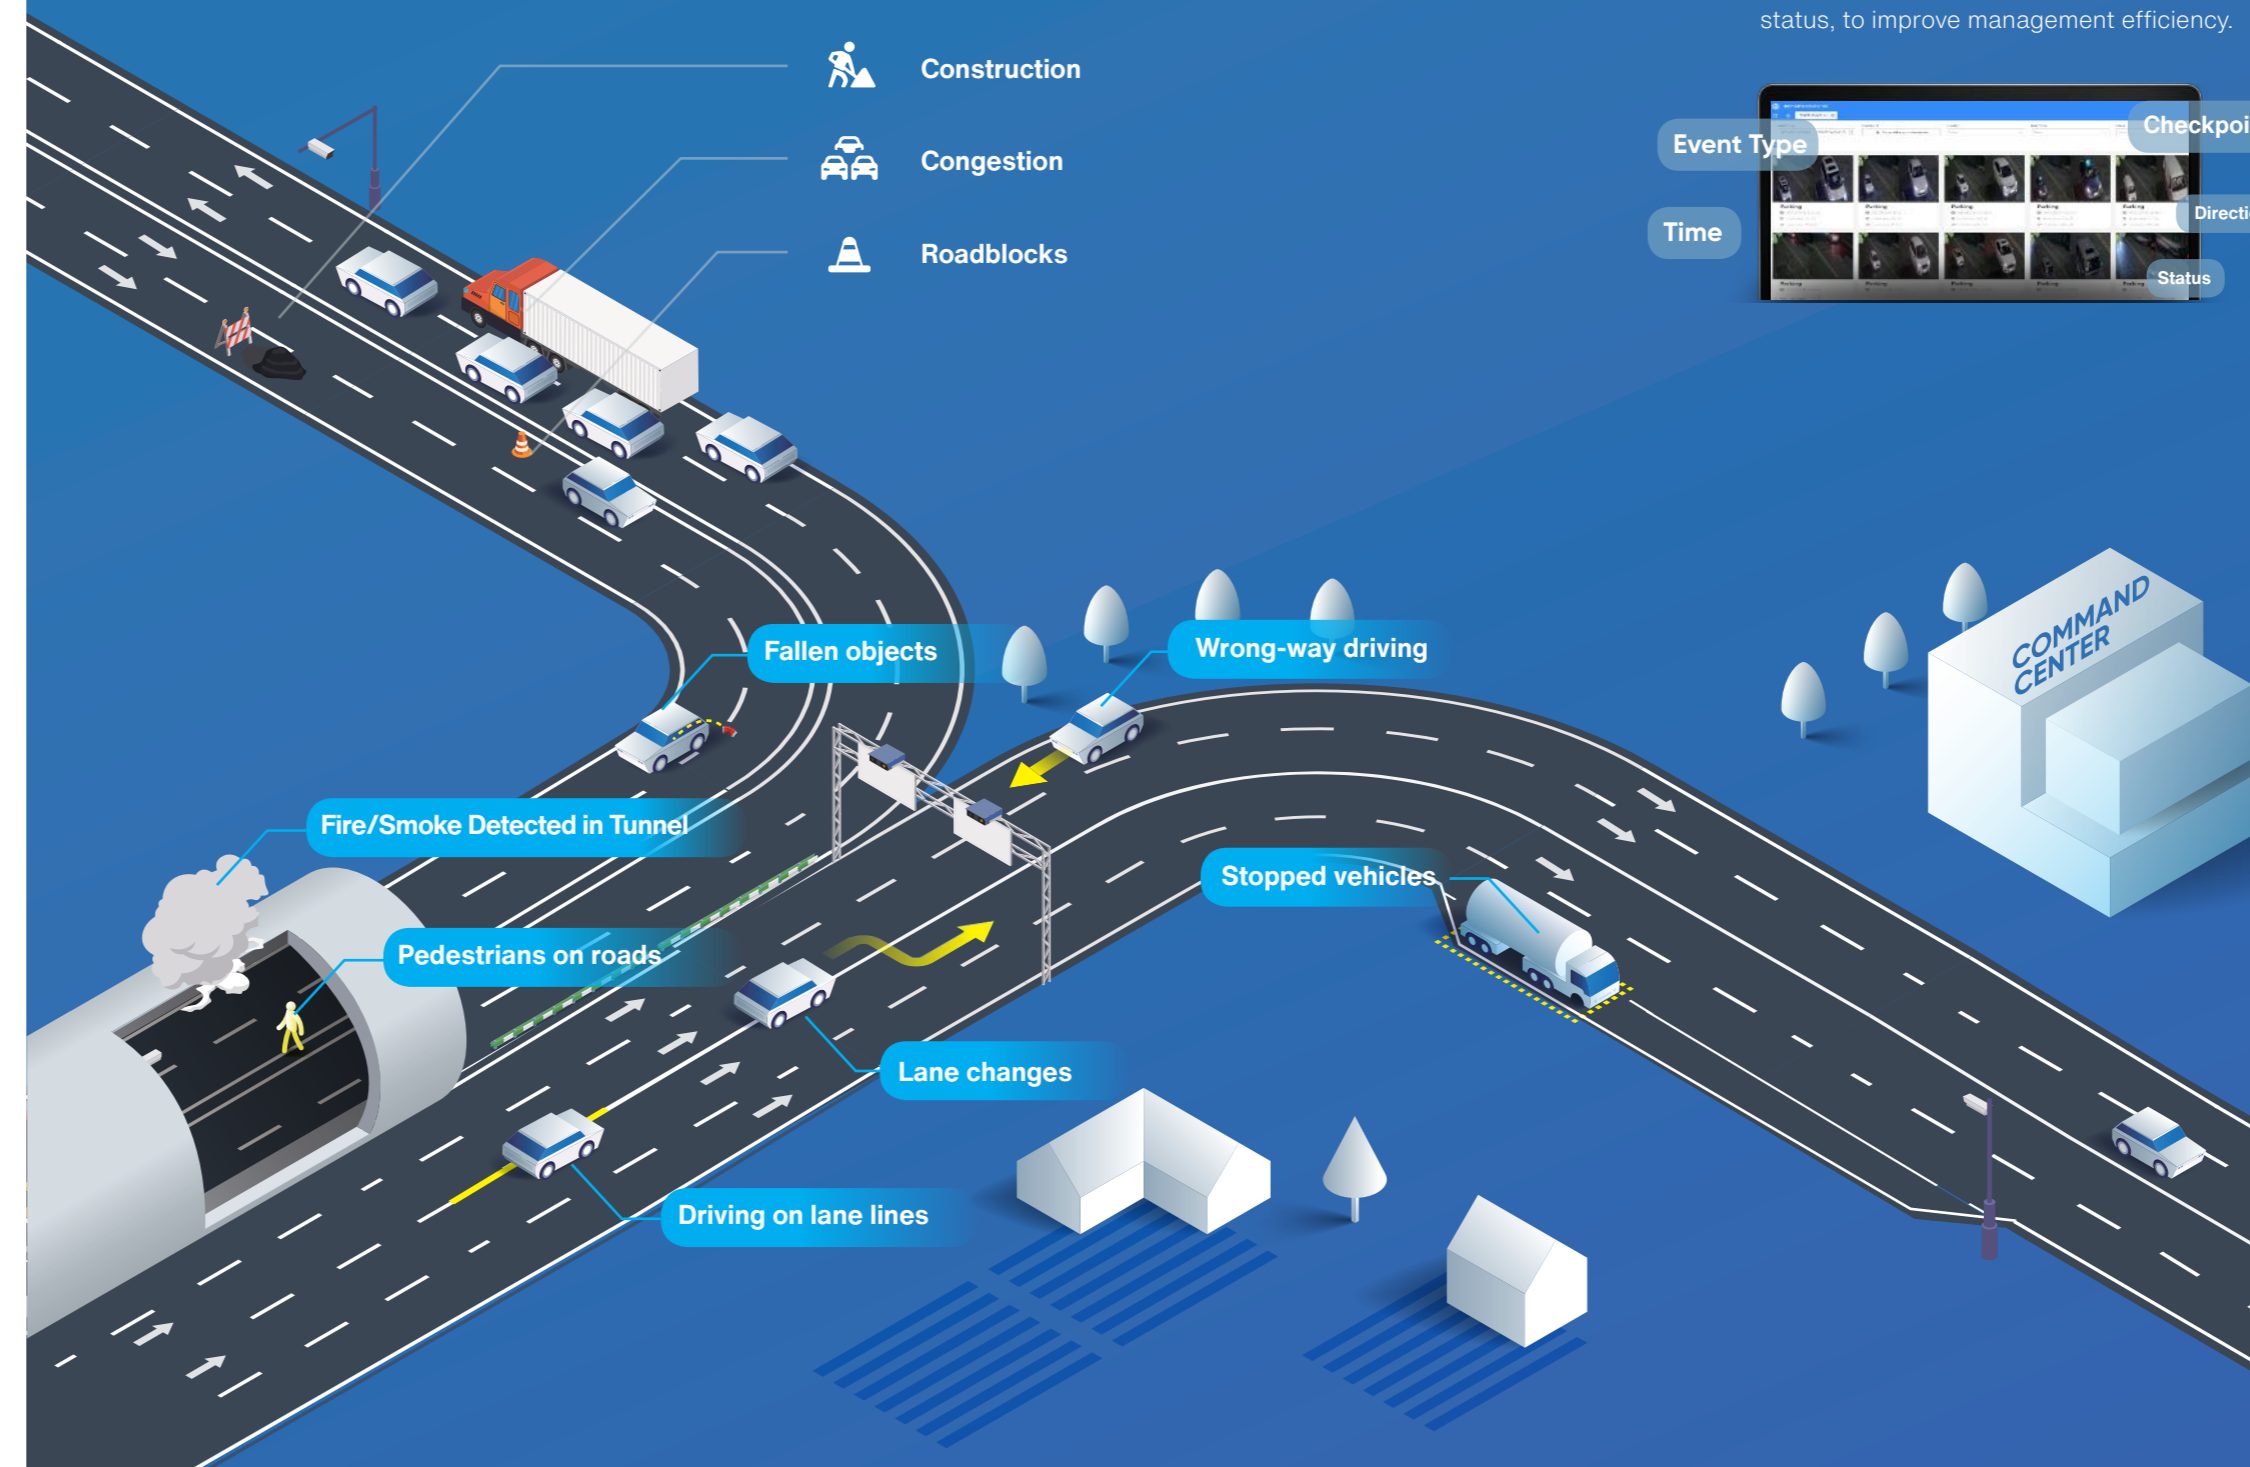


## Traffic Data Management

Hikvision's incident detection system can collect real-time traffic information and align with HikCentral to provide a wide array of traffic data from multiple perspectives. This gives civil engineers and administrators what they need to manage best.


### Traffic event searches

Traffic event searches can be completed by event type, time, checkpoint, direction, and status, to improve management efficiency.

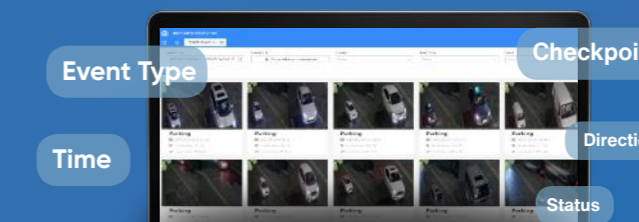

### Traffic event statistics

Traffic event retrieval in terms of status, checkpoint, time, and type, can help optimize the traffic management with data analysis.

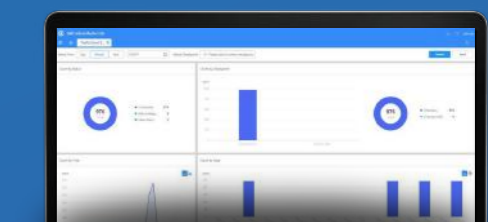

### Traffic flow statistics

Traffic flow statistics with time, checkpoint, and statistics mode assist traffic authorities in making well-informed traffic guidance decisions.



### Traffic event real-time map

Traffic events are visualized in real-time along with traffic conditions for efficient enforcement and fluid driving conditions.

