


CÔNG TY TNHH GIẢI PHÁP CÔNG NGHỆ THÀNH PHÁT

THANHPHAT TECH LTD



SmartRetail

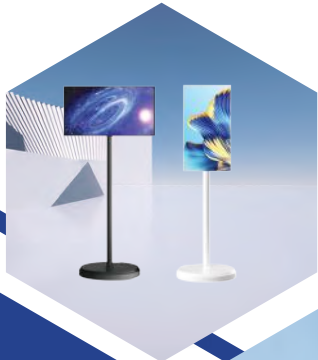

COMPANY
PROFILE





MỤC LỤC

VỀ CHÚNG TÔI

MỤC TIÊU VÀ ĐỊNH HƯỚNG

SẢN PHẨM VÀ DỊCH VỤ

GIẤY PHÉP KINH DOANH, CHỨNG NHẬN

ĐỐI TÁC KINH DOANH



01

05

07

49

51



VỀ CHÚNG TÔI

SmartRetail với nhiều năm kinh nghiệm OEM/ ODM các giải pháp hiển thị kỹ thuật số: Màn hình quảng cáo; Digital Standee; Kiosk tra cứu thông tin; Màn hình ghép; Màn hình LED... Phân phối các sản phẩm và giải pháp các hãng: Innolux/ BoE/ TCL/ LG/ Samsung/ ViewSonic.

Chúng tôi tập trung các nhóm sản phẩm và dịch vụ:

1. Nhập khẩu và phân phối.
2. Tư vấn giải pháp/ Thi công và triển khai dự án.
3. OEM/ ODM – Thiết kế màn hình theo yêu cầu.
4. Cung cấp dịch vụ nhập khẩu ủy thác, tìm nguồn hàng theo yêu cầu.



CHUYÊN CUNG CẤP CÁC SẢN PHẨM LCD VÀ THIẾT KẾ THEO YÊU CẦU



CITY	FARE	FLIGHT	GATE	REMARKS
Amherst	8:20am	90	On Time	
Amherst	8:20am	568	On Time	
Boston	11:40am	57	On Time	
Boston	11:40am	53	None	
Chicago/Heard	11:00am	55A	None	
Chicago/Heard	12:15pm	568	On Time	
Chicago/Heard	2:15pm	57	On Time	
Chicago/Heard	2:45pm	568	On Time	
Chicago/Heard	5:00pm	568	On Time	
Chicago/Heard	5:00pm	56A	On Time	
Chicago/Heard	7:50pm	568	On Time	
Chicago/Heard	11:40pm	55A	On Time	
Dallas/Ft. Worth	1:15pm	13	On Time	
Dallas/Ft. Worth	2:25pm	On Time		
Dallas/Ft. Worth	3:25pm	On Time		
Dallas/Ft. Worth	4:55pm	On Time		
Dallas/Ft. Worth	6:00pm	On Time		
Las Vegas	12:00pm	On Sale		
Las Vegas	1:25pm	On Time		
Las Vegas	2:40pm	On Time		
Las Vegas	4:50pm	On Time		
Las Vegas	6:10pm	On Time		
Las Vegas	6:10pm	On Time		
Las Vegas	8:00pm	On Time		

TÂM NHÌN



Trở thành Công ty hàng đầu về cung cấp giải pháp và thiết bị công nghệ cho ngành Bán lẻ; Quảng cáo; Sự kiện và Giáo dục tại Việt Nam.

SỨ MỆNH



Tập thể lãnh đạo và cán bộ nhân viên phấn đấu xây dựng, nâng cao trí tuệ và sự sáng tạo dựa trên các giá trị được vun đắp. Chúng tôi nhận thức rằng, những nỗ lực để mang lại thành công và giá trị bền vững là cam kết trách nhiệm của mỗi cá nhân để đảm bảo uy tín và thực hiện dựa trên đạo đức và sự chính trực.

GIÁ TRỊ CỐT LÕI



KHÁCH HÀNG

Đặt Khách hàng làm trung tâm. Đáp ứng hiệu quả nhất mọi nhu cầu vì lợi ích khách hàng và chất lượng dịch vụ. Thỏa mãn cao nhất, kịp thời nhất mọi nhu cầu sẵn có và tiềm ẩn của Khách hàng.



NHÂN LỰC

Đặt nhân lực làm nền tảng phát triển. Luôn quan tâm và phát triển nguồn nhân lực tại chỗ để xây dựng đội ngũ kế thừa.



CỔ ĐÔNG

Chia sẻ sự thịnh vượng với các cổ đông và thành viên; Cùng chia sẻ lợi ích và gắn kết vào sự phát triển chung của công ty.



THÍCH NGHI

Không ngừng nghiên cứu, đổi mới và phát triển để đáp ứng nhanh với môi trường kinh doanh năng động.

MỤC TIÊU VÀ ĐỊNH HƯỚNG

Với cuộc cách mạng công nghiệp số, chúng tôi không ngừng nỗ lực và nghiên cứu để mang đến những sản phẩm và dịch vụ tốt nhất cho Khách hàng của mình. Song song với việc đa dạng hóa đề xuất phương án triển khai để phù hợp và thuận tiện với môi trường kinh doanh của Khách hàng. Chúng tôi không ngừng nâng cao chất lượng dịch vụ dựa trên các giá trị với phương châm.

“Giải pháp tối ưu – Thái độ tích cực

Lợi ích hài hòa – Giá trị gia tăng cho khách hàng”



BUSINESS GOALS



MÀN HÌNH QUẢNG CÁO LCD





MÀN HÌNH QUẢNG CÁO CHÂN ĐỨNG

Điểm chạm đầu tiên
—— tại điểm đón khách.

KÍCH THƯỚC: 32 INCH - 98 INCH

- ✔ Được thiết kế với màu sắc sang trọng
- ✔ Tấm nền hiển thị 24/7
- ✔ Cập nhật nội dung qua điện thoại/ USB
- ✔ Kính cường lực toàn màn hình siêu mỏng



MADE IN CHINA

 BẢO HÀNH
24 THÁNG

32", 55" & 98"

Kiểu dáng đẹp, phong cách thiết kế mỏng đến khó tin, nhưng vẫn cực kỳ nổi bật với nhiều kích cỡ. Kích thước từ: 32" đến 98" với màn hình 400 nits có độ sáng cao. Được thiết kế để nổi bật trong môi trường bán lẻ và thương mại.

ĐẶC ĐIỂM NỔI BẬT



Cập nhật nội dung qua điện thoại



Tủ khóa bên trong có đầu vào AV



Loa âm thanh nổi bật



Hiển thị 24/7

TIỆN ÍCH CÓ SẴN



Wifi



Hệ điều hành Android



Plug & Play



Logo trên mặt kính đáy in bằng đèn nền LED

TẤM NỀN IPS LCD

Sử dụng tấm nền LCD IPS thương hiệu LG Display chuyên dụng để hoạt động liên tục 24/7. Độ phân giải 4K với góc nhìn toàn màn hình (H/V): 178 độ. Tỷ lệ khung hình 16:9, công nghệ IPS cho hình ảnh hiển thị với góc nhìn rộng và độ phân giải lớn hơn, không bị biến màu khi nhìn ở các góc khác nhau.

CẬP NHẬT NỘI DUNG QUA ĐIỆN THOẠI

Với tính năng được phát triển thêm đi kèm, nhằm hỗ trợ sự tiện lợi cho người dùng. Chỉ với vài thao tác đơn giản qua ứng dụng trên điện thoại, bạn có thể cập nhật nội dung quảng cáo ngay tức thì mà không cần đến máy tính hay phần mềm phức tạp. Điều này giúp tiết kiệm thời gian, đảm bảo thông điệp quảng cáo luôn được hiển thị kịp thời.

HỆ THỐNG QUẢN LÝ MÀN HÌNH TỪ XA

Giải pháp Digital Signage là giải pháp phần mềm quản lý giải pháp LCD Digital Signage/ Phần mềm quản lý màn hình trong cùng hệ thống. Digital Signage giúp quản lý màn hình từ xa thông qua kết nối internet.



MÀN HÌNH QUẢNG CÁO CHÂN ĐỨNG


32 INCH - 98 INCH



THÔNG SỐ

INNOADS	SIZE (Inch)	55"	65"	75"
	Product code	FS-LG55-ANIB	FS-LG65-ANIB	FS-LG75-ANIB
Panel Details	Brightness (cd/ m ²)	450 nits	500 nits	550 nits
	Panel Technology	IPS LCD Non-touch (Touchscreen Optional)	IPS LCD Non-touch (Touchscreen Optional)	IPS LCD Non-touch (Touchscreen Optional)
	Panel Type	24/7	24/7	24/7
	Resolution	4K-UHD / (2160x3840) / (9:16)	4K-UHD / (2160x3840) / (9:16)	4K-UHD / (2160x3840) / (9:16)
	Backlight Type	Edge Type LED	Edge Type LED	Edge Type LED
	Contrast Ratio	1000:1	1000:1	1000:1
	Dynamic Contrast Ratio	70000:1	70000:1	70000:1
	Panel Life Time (Min.)	60000 H	60000 H	60000 H
System configuration	Viewing Angle	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)
	CPU	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz
	RAM	4GB-RAM (LDDR4X)	4GB-RAM (LDDR4X)	4GB-RAM (LDDR4X)
	Storage	32GB-ROM (eMMC)	32GB-ROM (eMMC)	32GB-ROM (eMMC)
	Operation System	Google Android™ 11.0	Google Android™ 11.0	Google Android™ 11.0
	SoC	Built-in Digital Signage	Built-in Digital Signage	Built-in Digital Signage
	Interface	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card
App/ Software	Auto On/ Off	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device
	Update Data	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB
	CMS Cloud Platform	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)
Audio	Speaker Type	Stero 2x10W, 8Ω	Stero 2x10W, 8Ω	Stero 2x10W, 8Ω
	Video	HDMI, DVI	HDMI, DVI	HDMI, DVI
AV inputs	Audio	Audio Socket (3.5mm)	Audio Socket (3.5mm)	Audio Socket (3.5mm)
Power	Power Consumption (W)	105 W	105 W	105 W
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz
Environmental	Operating Temperature	0° - 40° C	0° - 40° C	0° - 40° C
	Storage Temperature	e 0° - 50° C	e 0° - 50° C	e 0° - 50° C
	Operating Humidity	-30° to 60° C	-30° to 60° C	-30° to 60° C
	Storage Humidity	10% to 80%	10% to 80%	10% to 80%
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI
Design	Enclosure material	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover
Customize	Size	32"/ 43"/ 50"/ 55"/ 65"/ 75"/ 86"/ 98"		
	Panel Brand	INNOLUX / BoE / AUO / LG / TCL		

CÁC LOẠI KÍCH THƯỚC CỦA MÀN HÌNH QUẢNG CÁO CHÂN ĐỨNG

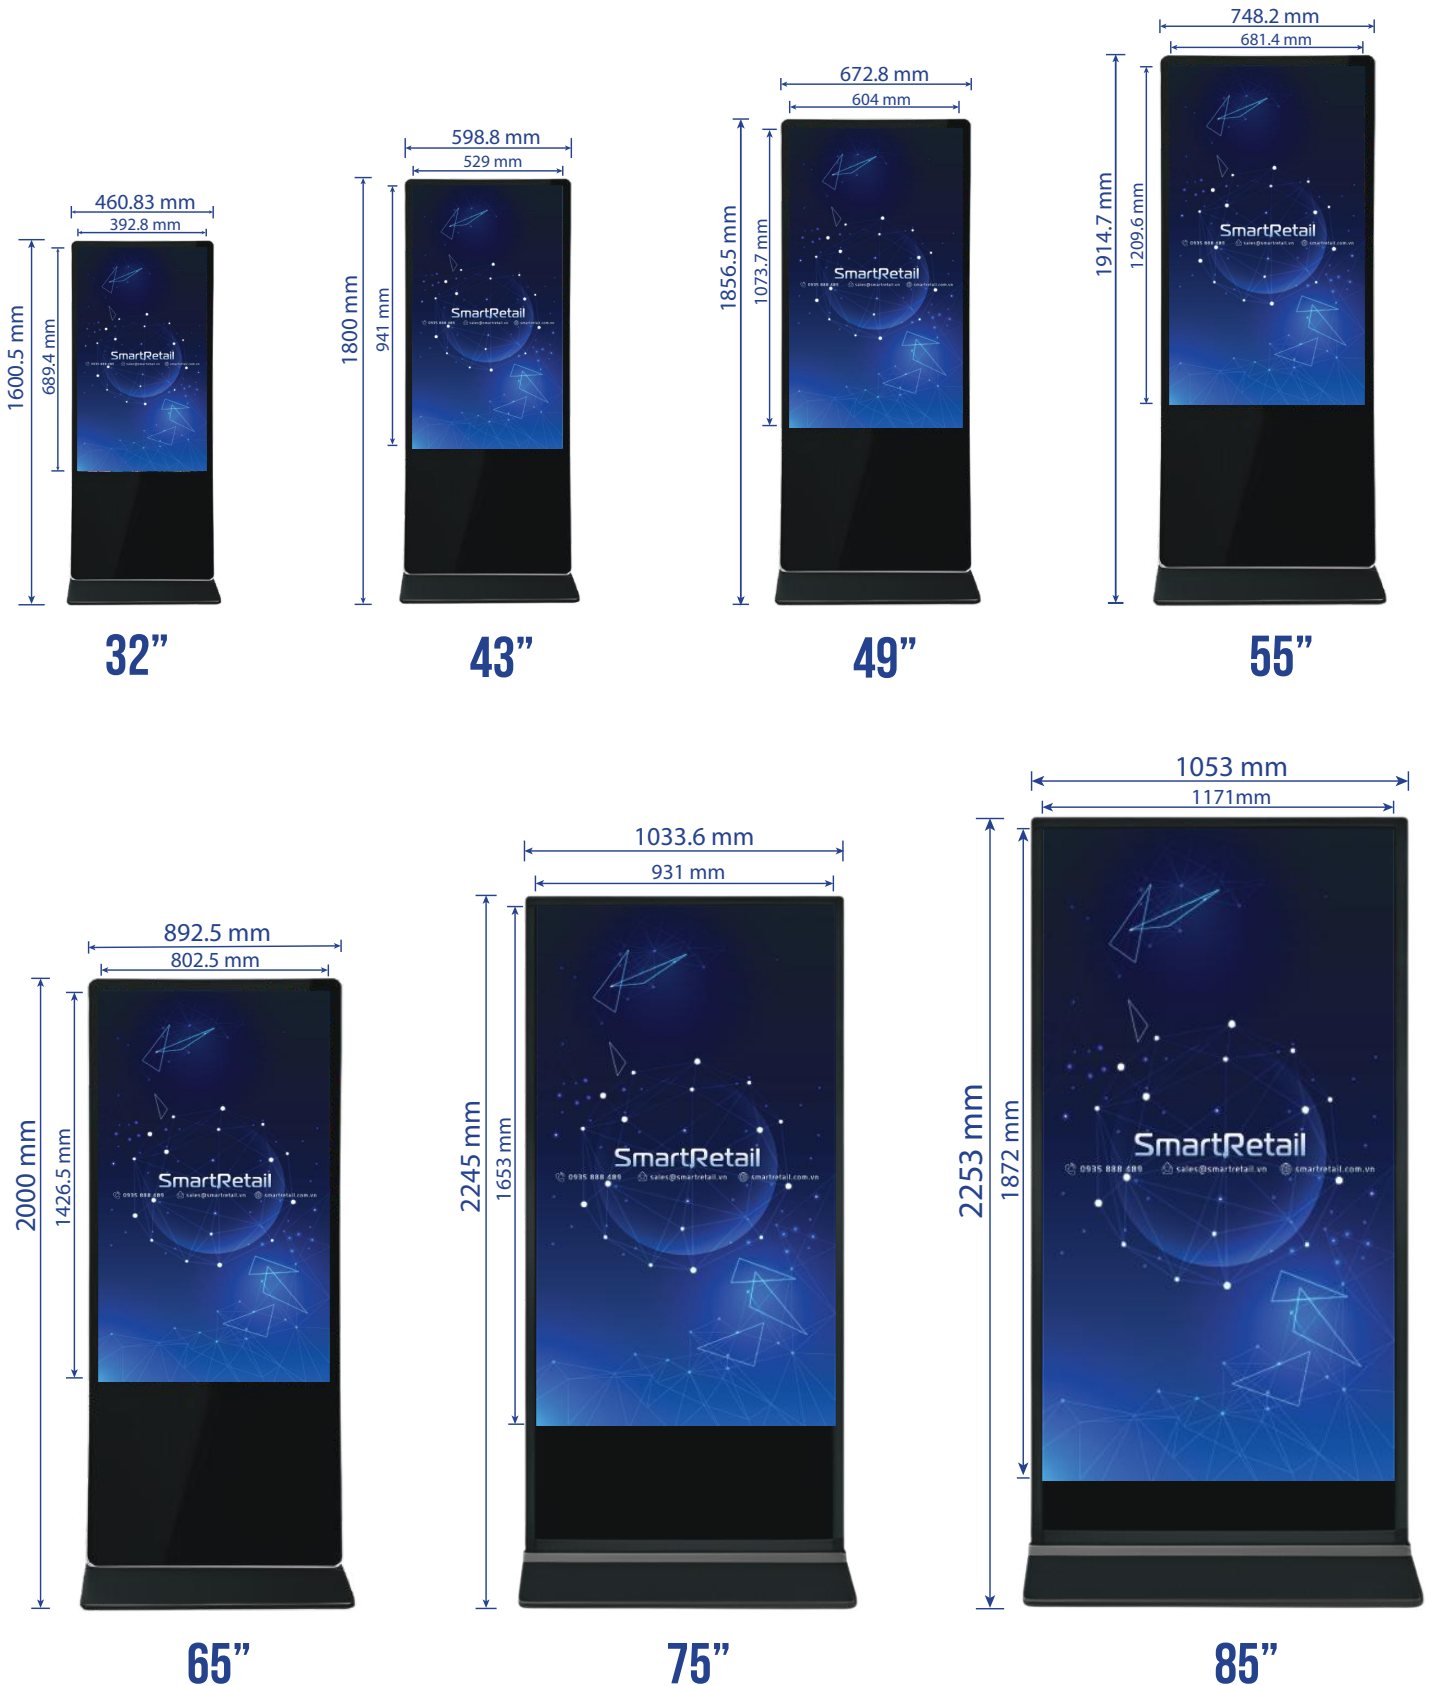



MÀN HÌNH QUẢNG CÁO CHÂN ĐỨNG 2 MẶT

43 INCH - 55 INCH



THÔNG SỐ

INNOADS	SIZE (Inch)	43"	50"	55"
	Product code	FS-LG43-ANIB	FS-LG50-ANIB	FS-LG55-ANIB
Panel Details	Brightness (cd/ m ²)	400 nits	400 nits	450 nits
	Panel Technology	IPS LCD Non-touch (Touchscreen Optional)	IPS LCD Non-touch (Touchscreen Optional)	IPS LCD Non-touch (Touchscreen Optional)
	Panel Type	24/7	24/7	24/7
	Resolution	4K-UHD / (2160x3840) / (9:16)	4K-UHD / (2160x3840) / (9:16)	4K-UHD / (2160x3840) / (9:16)
	Backlight Type	Edge Type LED	Edge Type LED	Edge Type LED
	Contrast Ratio	1000:1	1000:1	1000:1
	Dynamic Contrast Ratio	70000:1	70000:1	70000:1
	Panel Life Time (Min.)	60000 H	60000 H	60000 H
	Viewing Angle	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)
System configuration	CPU	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz
	RAM	4GB-RAM (LDDR4X)	4GB-RAM (LDDR4X)	4GB-RAM (LDDR4X)
	Storage	32GB-ROM (eMMC)	32GB-ROM (eMMC)	32GB-ROM (eMMC)
	Operation System	Google Android™ 11.0	Google Android™ 11.0	Google Android™ 11.0
	SoC	Built-in Digital Signage	Built-in Digital Signage	Built-in Digital Signage
	Interface	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card
App/ Software	Auto On/ Off	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device
	Update Data	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB
	CMS Cloud Platform	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)
Audio	Speaker Type	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω
AV inputs	Video	HDMI, DVI	HDMI, DVI	HDMI, DVI
	Audio	Audio Socket (3.5mm)	Audio Socket (3.5mm)	Audio Socket (3.5mm)
Power	Power Consumption (W)	105 W	105 W	105 W
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz
	Operating Temperature	0° - 40° C	0° - 40° C	0° - 40° C
Environmental	Storage Temperature	e 0° - 50° C	e 0° - 50° C	e 0° - 50° C
	Operating Humidity	-30° to 60° C	-30° to 60° C	-30° to 60° C
	Storage Humidity	10% to 80%	10% to 80%	10% to 80%
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI
Design	Enclosure material	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/Spray cold roll steel sheets body/ Tempered glass cover
Customize	Size	43"/ 50"/ 55"		
	Panel Brand	INNOLUX / BoE / AUO / LG / TCL		

STARBUCKS[®]
REWARDS



**TẢI ỨNG DỤNG
STARBUCKS[®] REWARDS
& TÍCH LŨY SAO
ĐỂ MỞ KHÓA ĐẶC QUYỀN**

Khám phá những đặc quyền
dành riêng cho thành viên Starbucks[®] Rewards



Thức uống
& bánh sinh nhật
miễn phí



Đặt hàng
qua ứng dụng
Starbucks VN



Tích lũy Sao
với mọi hình thức
thanh toán



TẢI ỨNG DỤNG

STARBUCKS[®]



MÀN HÌNH QUẢNG CÁO CHÂN ĐỨNG CHỮ A

43 INCH - 55 INCH



THÔNG SỐ

INNOADS (Non-touch)	SIZE (Inch)	43"	50"	55"
	Product code	AK-LG43-ANIB	AK-LG50-ANIB	AK-LG55-ANIB
Panel Details	Brightness (cd/ m ²)	400 nits	400 nits	450 nits
	Panel Technology	IPS LCD Non-touch (Touchscreen Optional)	IPS LCD Non-touch (Touchscreen Optional)	IPS LCD Non-touch (Touchscreen Optional)
	Panel Type	24/7	24/7	24/7
	Resolution	Full HD/ (1080x1920) / (9:16)	Full HD/ (1080x1920) / (9:16)	Full HD/ (1080x1920) / (9:16)
	Backlight Type	Edge Type LED	Edge Type LED	Edge Type LED
	Contrast Ratio	1000:1	1000:1	1000:1
	Dynamic Contrast Ratio	70000:1	70000:1	70000:1
	Panel Life Time (Min.)	60000 H	60000 H	60000 H
	Viewing Angle	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)
System configuration	CPU	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz
	RAM	4GB-RAM (LDDR4X)	4GB-RAM (LDDR4X)	4GB-RAM (LDDR4X)
	Storage	32GB-ROM (eMMC)	32GB-ROM (eMMC)	32GB-ROM (eMMC)
	Operation System	Google Android™ 11.0	Google Android™ 11.0	Google Android™ 11.0
	SoC	Built-in Digital Signage	Built-in Digital Signage	Built-in Digital Signage
	Interface	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card
App/ Software	Auto On/ Off	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device
	Update Data	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB
	CMS Cloud Platform	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)
Audio	Speaker Type	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω
AV inputs	Video	HDMI, DVI	HDMI, DVI	HDMI, DVI
	Audio	Audio Socket (3.5mm)	Audio Socket (3.5mm)	Audio Socket (3.5mm)
Power	Power Consumption (W)	105 W	105 W	105 W
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz
Environmental	Operating Temperature	0° - 40° C	0° - 40° C	0° - 40° C
	Storage Temperature	e 0° - 50° C	e 0° - 50° C	e 0° - 50° C
	Operating Humidity	-30° to 60° C	-30° to 60° C	-30° to 60° C
	Storage Humidity	10% to 80%	10% to 80%	10% to 80%
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI
Design	Enclosure material	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/Spray cold roll steel sheets body/ Tempered glass cover
Customize	Size	43"/ 50"/ 55"		
	Panel Brand	INNOLUX / BoE / AUO / LG / TCL		

MÀN HÌNH LG IPS CÔNG NGHIỆP

Màn hình LG IPS FHD 1080P, chất lượng hình ảnh tuyệt vời, màu hiển thị 8bit 16,7M, tuổi thọ 60000 giờ



Tấm nền IPS



100% màu sắc



16.7 triệu màu



Tuổi thọ cao



MÀN HÌNH QUẢNG CÁO TREO TƯỜNG

Thu hút khách hàng
từ cái nhìn đầu tiên.

KÍCH THƯỚC: 22 INCH - 110 INCH

- ✓ Được thiết kế với màu sắc sang trọng
- ✓ Tắm nền hiển thị 24/7
- ✓ Cập nhật nội dung qua điện thoại/ USB
- ✓ Kính cường lực toàn màn hình siêu mỏng



SIZE: 22 INCH - 110 INCH

Có nhiều kích thước khác nhau, Có thể tùy chỉnh theo yêu cầu, phù hợp với vị trí đặt/hiển thị/trình chiếu. Chúng tôi có thể thiết kế mẫu màn hình riêng theo yêu cầu của khách hàng. Bảng hiệu kỹ thuật số treo tường có thể gắn màn hình để treo trên trần nhà/thả trần nhà.

TẮM NỀN IPS LCD

Sử dụng tấm nền LCD IPS Full HD thương hiệu LG Display chuyên dụng để hoạt động liên tục 24/7. Độ phân giải Full HD góc nhìn toàn màn hình (H/V): 178 độ. Tỷ lệ khung hình 16:9, công nghệ IPS cho hình ảnh hiển thị với góc nhìn rộng và độ phân giải lớn hơn, không bị biến màu khi nhìn ở các góc khác nhau.

CẬP NHẬT NỘI DUNG QUA ĐIỆN THOẠI

Với tính năng được phát triển thêm đi kèm, nhằm hỗ trợ sự tiện lợi cho người dùng. Chỉ với vài thao tác đơn giản qua ứng dụng trên điện thoại, bạn có thể cập nhật nội dung quảng cáo ngay tức thì mà không cần đến máy tính hay phần mềm phức tạp. Điều này giúp tiết kiệm thời gian, đảm bảo thông điệp quảng cáo luôn được hiển thị kịp thời.

HỆ THỐNG QUẢN LÝ MÀN HÌNH TỪ XA

Giải pháp Digital Signage là giải pháp phần mềm quản lý giải pháp LCD Digital Signage/Phần mềm quản lý màn hình trong cùng hệ thống. Digital Signage giúp quản lý màn hình từ xa thông qua kết nối internet.

MADE IN CHINA

 **BẢO HÀNH
24 THÁNG**

ĐẶC ĐIỂM NỔI BẬT



Cập nhật nội dung
qua điện thoại



Tủ khóa bên trong có
đầu vào AV



Loa âm thanh nổi bật



Hiển thị 24/7

TIỆN ÍCH CÓ SẴN



Wifi







Hệ điều hành Android



Plug & Play



Logo trên mặt kính đáy
in bằng đèn nền LED

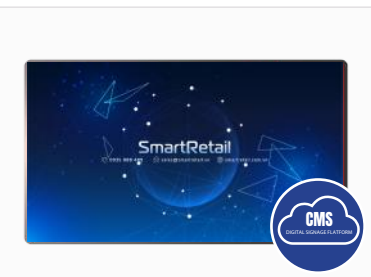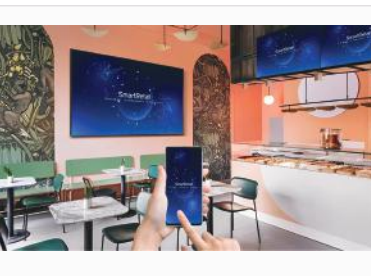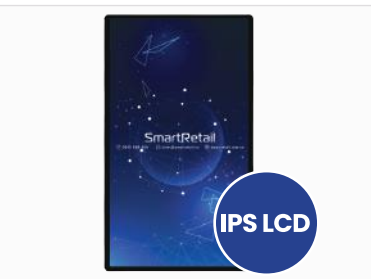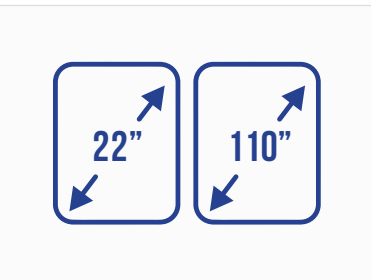

MÀN HÌNH QUẢNG CÁO TREO TƯỜNG

22 INCH - 110 INCH



THÔNG SỐ

INNOADS (Non-touch)	SIZE (Inch)	55"	65"	75"
	Product code	WM-LG55-ANIB	WM-LG65-ANIB	WM-LG75-ANIB
Panel Details	Brightness (cd/ m ²)	450 nits	500 nits	550 nits
	Panel Technology	IPS LCD Non-touch	IPS LCD Non-touch	IPS LCD Non-touch
	Panel Type	24/7	24/7	24/7
	Resolution	4K-UHD / (3840x2160) / (16:9)	4K-UHD / (3840x2160) / (16:9)	4K-UHD / (3840x2160) / (16:9)
	Backlight Type	Edge Type LED	Edge Type LED	Edge Type LED
	Contrast Ratio	1000:1	1000:1	1000:1
	Dynamic Constrast Ratio	70000:1	70000:1	70000:1
	Panel Life Time (Min.)	60000 H	60000 H	60000 H
System configuration	Viewing Angle	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)
	CPU	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz
	RAM	4GB-RAM (LDDR4X)	4GB-RAM (LDDR4X)	4GB-RAM (LDDR4X)
	Storage	32GB-ROM (eMMC)	32GB-ROM (eMMC)	32GB-ROM (eMMC)
	Operation System	Google Android™ 11.0	Google Android™ 11.0	Google Android™ 11.0
	SoC	Built-in Digital Signage	Built-in Digital Signage	Built-in Digital Signage
App/ Software	Interface	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card
	Auto On/ Off	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device
	Update 1 Data	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB
Audio	CMS Cloud Platform	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)
	Speaker Type	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω
AV inputs	Video	HDMI, DVI	HDMI, DVI	HDMI, DVI
	Audio	Audio Socket (3.5mm)	Audio Socket (3.5mm)	Audio Socket (3.5mm)
Power	Power Consumption (W)	105 W	105 W	105 W
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz
Environmental	Operating Temperature	0° - 40° C	0° - 40° C	0° - 40° C
	Storage Temperature	e 0° - 50° C	e 0° - 50° C	e 0° - 50° C
	Operating Humidity	-30° to 60° C	-30° to 60° C	-30° to 60° C
	Storage Humidity	10% to 80%	10% to 80%	10% to 80%
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI
Design	Enclosure material	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover
	Size	22"/ 32"/ 43"/ 50"/ 55"/ 65"/ 75"/ 86"/ 98"/ 110"		
Customize	Panel Brand	INNOLUX / BoE / AUO / LG / TCL		





MÀN HÌNH QUẢNG CÁO TREO TƯỜNG VIỀN MỎNG

Thu hút khách hàng
từ cái nhìn đầu tiên.

KÍCH THƯỚC: 32 INCH - 65 INCH

- ✓ Được thiết kế với màu sắc sang trọng
- ✓ Tắm nền hiển thị 24/7
- ✓ Cập nhật dữ liệu qua điện thoại/ USB
- ✓ Kính cường lực toàn màn hình siêu mỏng




SIZE: 32 INCH - 65 INCH

Có nhiều kích thước khác nhau, Có thể tùy chỉnh theo yêu cầu, phù hợp với vị trí đặt/hiển thị/trình chiếu. Chúng tôi có thể thiết kế mẫu màn hình riêng theo yêu cầu của khách hàng. Bảng hiệu kỹ thuật số treo tường có thể gắn màn hình để treo trên trần nhà/thả trần nhà.



TẮM NỀN IPS LCD

Sử dụng tấm nền LCD IPS thương hiệu LG Display chuyên dụng để hoạt động liên tục 24/7. Độ phân giải 4K với góc nhìn toàn màn hình (H/V): 178 độ. Tỷ lệ khung hình 16:9, công nghệ IPS cho hình ảnh hiển thị với góc nhìn rộng và độ phân giải lớn hơn, không bị biến màu khi nhìn ở các góc khác nhau.

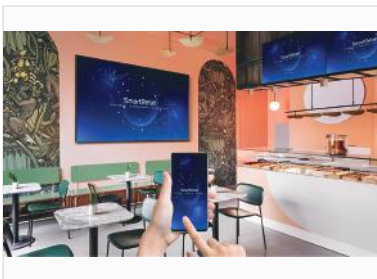


CẬP NHẬT NỘI DUNG QUA ĐIỆN THOẠI

Với tính năng được phát triển thêm đi kèm, nhằm hỗ trợ sự tiện lợi cho người dùng. Chỉ với vài thao tác đơn giản qua ứng dụng trên điện thoại, bạn có thể cập nhật nội dung quảng cáo ngay tức thì mà không cần đến máy tính hay phần mềm phức tạp. Điều này giúp tiết kiệm thời gian, đảm bảo thông điệp quảng cáo luôn được hiển thị kịp thời.

HỆ THỐNG QUẢN LÝ MÀN HÌNH TỪ XA

Giải pháp Digital Signage là giải pháp phần mềm quản lý giải pháp LCD Digital Signage/Phần mềm quản lý màn hình trong cùng hệ thống. Digital Signage giúp quản lý màn hình từ xa thông qua kết nối internet.

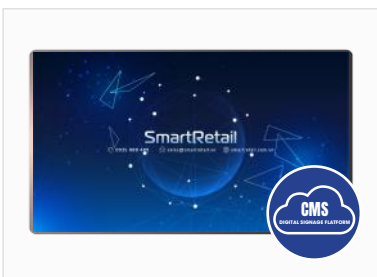

MADE IN CHINA

BẢO HÀNH
24 THÁNG

ĐẶC ĐIỂM NỔI BẬT



Cập nhật nội dung
qua điện thoại



Tủ khóa bên trong
có đầu vào AV



Loa âm thanh nổi bật



Hiển thị 24/7

TIỆN ÍCH CÓ SẴN



Wifi



Hệ điều hành Android



Plug & Play



Logo trên mặt kính đáy
in bằng đèn nền LED

MÀN HÌNH QUẢNG CÁO TREO TƯỜNG VIỀN MỎNG

32 INCH - 65 INCH



THÔNG SỐ

INNOADS (Non-touch)	SIZE (Inch)	43"	50"	55"
	Product code	WM-LG43-DMBA	WM-LG50-DMBA	WM-LG55-DMBA
Panel Details	Brightness (cd/ m ²)	400 nits	400 nits	450 nits
	Panel Technology	IPS LCD Non-touch	IPS LCD Non-touch	IPS LCD Non-touch
	Panel Type	24/7	24/7	24/7
	Resolution	4K-UHD / (3840x2160) / (16:9)	4K-UHD / (3840x2160) / (16:9)	4K-UHD / (3840x2160) / (16:9)
	Backlight Type	Edge Type LED	Edge Type LED	Edge Type LED
	Contrast Ratio	1000:1	1000:1	1000:1
	Dynamic Constrast Ratio	70000:1	70000:1	70000:1
System configuration	Panel Life Time (Min.)	60000 H	60000 H	60000 H
	Viewing Angle	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)
	CPU	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz
	RAM	4-GB RAM (LDDR4X)	4-GB RAM (LDDR4X)	4-GB RAM (LDDR4X)
	Storage	32-GB ROM (eMMC)	32-GB ROM (eMMC)	32-GB ROM (eMMC)
	Operation System	Google Android™ 11.0	Google Android™ 11.0	Google Android™ 11.0
	SoC	Built-in Digital Signage	Built-in Digital Signage	Built-in Digital Signage
App/ Software	Interface	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card
	Auto On/ Off	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device
	Update Data	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB
Audio	Speaker Type	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω
	Video	HDMI, DVI	HDMI, DVI	HDMI, DVI
AV inputs	Audio	Audio Socket (3.5mm)	Audio Socket (3.5mm)	Audio Socket (3.5mm)
Power	Power Consumption (W)	105 W	105 W	105 W
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz
Environmental	Operating Temperature	0° - 40° C	0° - 40° C	0° - 40° C
	Storage Temperature	e 0° - 50° C	e 0° - 50° C	e 0° - 50° C
	Operating Humidity	-30° to 60° C	-30° to 60° C	-30° to 60° C
	Storage Humidity	10% to 80%	10% to 80%	10% to 80%
Design	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI
	Enclosure material	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover
Customize	Size	32"/ 43"/ 50"/ 55"/ 65"		
	Panel Brand	INNOLUX / BoE / AUO / LG / TCL		

MÀN HÌNH QUẢNG CÁO TREO TRẦN 2 MẶT

43 INCH - 55INCH



THÔNG SỐ

INNOADS	SIZE (Inch)	43"	50"	55"
	Product code	DS-LG43-ANIW	DS-LG50-ANIW	DS-LG55-ANIW
Panel Details	Brightness (cd/ m ²)	400 nits	400 nits	450 nits
	Panel Technology	IPS LCD Non-touch	IPS LCD Non-touch	IPS LCD Non-touch
	Panel Type	24/7	24/7	24/7
	Resolution	4K-UHD / (3840x2160) / (16:9)	4K-UHD / (3840x2160) / (16:9)	4K-UHD / (3840x2160) / (16:9)
	Backlight Type	Edge Type LED	Edge Type LED	Edge Type LED
	Contrast Ratio	1000:1	1000:1	1000:1
	Dynamic Constrast Ratio	70000:1	70000:1	70000:1
	Panel Life Time (Min.)	60000 H	60000 H	60000 H
System configuration	CPU	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz
	RAM	4-GB RAM (LDDR4X)	4-GB RAM (LDDR4X)	4-GB RAM (LDDR4X)
	Storage	32-GB ROM (eMMC)	32-GB ROM (eMMC)	32-GB ROM (eMMC)
	Operation System	Google Android™ 11.0	Google Android™ 11.0	Google Android™ 11.0
	SoC	Built-in Digital Signage	Built-in Digital Signage	Built-in Digital Signage
	Interface	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card
App/ Software	Auto On/ Off	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device
	Update Data	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB
	CMS Cloud Platform	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)
Audio	Speaker Type	Stero 2x10W, 8Ω	Stero 2x10W, 8Ω	Stero 2x10W, 8Ω
	Video	HDMI, DVI	HDMI, DVI	HDMI, DVI
AV inputs	Audio	Audio Socket (3.5mm)	Audio Socket (3.5mm)	Audio Socket (3.5mm)
Power	Power Consumption (W)	105 W	105 W	105 W
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz
Environmental	Operating Temperature	0° - 40° C	0° - 40° C	0° - 40° C
	Storage Temperature	e 0° - 50° C	e 0° - 50° C	e 0° - 50° C
	Operating Humidity	-30° to 60° C	-30° to 60° C	-30° to 60° C
	Storage Humidity	10% to 80%	10% to 80%	10% to 80%
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI
Design	Enclosure material	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover
	Size	43"/ 50"/ 55"		
Customize	Panel Brand	INNOLUX / BoE / AUO / LG / TCL		



MÀN HÌNH CẢM ỨNG CHÂN QUỖ

Tối ưu hóa
trải nghiệm của khách hàng.

KÍCH THƯỚC: 32 INCH - 65 INCH

- ✓ Được thiết kế với màu sắc sang trọng
- ✓ Tấm nền IPS hiển thị 24/7
- ✓ Cảm ứng mượt mà với 20 điểm chạm
- ✓ Kính cường lực toàn màn hình siêu mỏng



MADE IN CHINA

 **BẢO HÀNH
24 THÁNG**



32", 50" & 65"

Kiểu dáng đẹp, phong cách thiết kế mỏng đến khó tin, nhưng vẫn cực kỳ nổi bật với nhiều kích cỡ. Kích thước từ: 32", 50" và màn hình 65" có độ sáng 400 nits. Được thiết kế để nổi bật trong môi trường bán lẻ và thương mại.


CẢM ỨNG MƯỢT MÀ

Cảm ứng đa điểm cho phép người dùng tương tác linh hoạt, chạm cùng lúc nhiều điểm trên màn hình để thao tác nhanh chóng và chính xác, tạo trải nghiệm mượt mà, tối ưu cho việc tìm kiếm thông tin, xem chi tiết, khảo sát,...trực tiếp trên màn hình



TẤM NỀN IPS/LCD

Tấm nền IPS hoạt động 24/7, kiểu dáng thời trang và mỏng nhưng cực kỳ dễ nhìn với các lựa chọn kích thước: 32", 50", & 65", tất cả đều có màn hình độ sáng 400 nits.

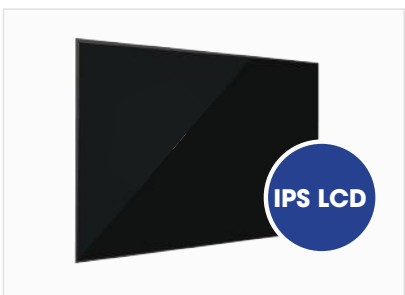

ĐẶC ĐIỂM NỔI BẬT



Màn hình cảm ứng mượt mà



Tủ khóa bên trong có đầu vào AV



Loa âm thanh nổi bật



Hiển thị 24/7

TIỆN ÍCH CÓ SẴN



Wifi



Hệ điều hành Android



Hệ điều hành Windows



Logo trên mặt kính đáy được in bằng đèn nền LED

MÀN HÌNH CẢM ỨNG CHÂN QUỠ

32 INCH - 65 INCH




**BẢO HÀNH
24 THÁNG**

THÔNG SỐ

INNOADS (Touch)	SIZE (Inch)	43"	50"	55"
	Product code	SR-LG43-IFKT	SR-LG50-IFKT	SR-LG55-IFKT
Panel Details	Brightness (cd/ m ²)	400 nits	400 nits	450 nits
	Panel Technology	IPS LCD IR Touch or P-CAP Pro Touchscreen	IPS LCD IR Touch or P-CAP Pro Touchscreen	IPS LCD IR Touch or P-CAP Pro Touchscreen
	Panel Type	24/7	24/7	24/7
	Resolution	4K-UHD / (3840x2160) / (16:9)	4K-UHD / (3840x2160) / (16:9)	4K-UHD / (3840x2160) / (16:9)
	Backlight Type	Edge Type LED	Edge Type LED	Edge Type LED
	Contrast Ratio	1000:1	1000:1	1000:1
	Dynamic Constrast Ratio	70000:1	70000:1	70000:1
	Panel Life Time (Min.)	60000 H	60000 H	60000 H
Dual-System	Viewing Angle	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)
	Windows OS	Intel® Core™ i7-Gen 12 (Option)	Intel® Core™ i7-Gen 12 (Option)	Intel® Core™ i7-Gen 12 (Option)
		8GB-DDR4	8GB-DDR4	8GB-DDR4
		256GB-SSD	256GB-SSD	256GB-SSD
		Windows 10 Pro 64-bit OEM (Trial/ English)	Windows 10 Pro 64-bit OEM (Trial/ English)	Windows 10 Pro 64-bit OEM (Trial/ English)
	Android OS	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card
		RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz
		4GB-RAM	4GB-RAM	4GB-RAM
32GB-ROM		32GB-ROM	32GB-ROM	
	Google Android™ 11.0	Google Android™ 11.0	Google Android™ 11.0	
	SoC Built-in Digital Signage	SoC Built-in Digital Signage	SoC Built-in Digital Signage	
	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card	
App/ Software	Auto On/ Off	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device
	Update Data	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB
	CMS Cloud Platform	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)
Audio	Speaker Type	Stero 2x10W, 8Ω	Stero 2x10W, 8Ω	Stero 2x10W, 8Ω
AV inputs	Video	HDMI, DVI	HDMI, DVI	HDMI, DVI
	Audio	Audio Socket (3.5mm)	Audio Socket (3.5mm)	Audio Socket (3.5mm)
Power	Power Consumption (W)	105 W	105 W	105 W
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz
Environmental	Operating Temperature	0° - 40° C	0° - 40° C	0° - 40° C
	Storage Temperature	e 0° - 50° C	e 0° - 50° C	e 0° - 50° C
	Operating Humidity	-30° to 60° C	-30° to 60° C	-30° to 60° C
	Storage Humidity	10% to 80%	10% to 80%	10% to 80%
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI
Design	Enclosure material	Aluminum frame/Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/Spray cold roll steel sheets body/ Tempered glass cover
Customize	Size	32"/ 43"/ 50"/ 55"/ 65"		
	Panel Brand	INNOLUX/ BoE / AUO / LG / TCL		

MÀN HÌNH LCD THIẾT KẾ THEO YÊU CẦU




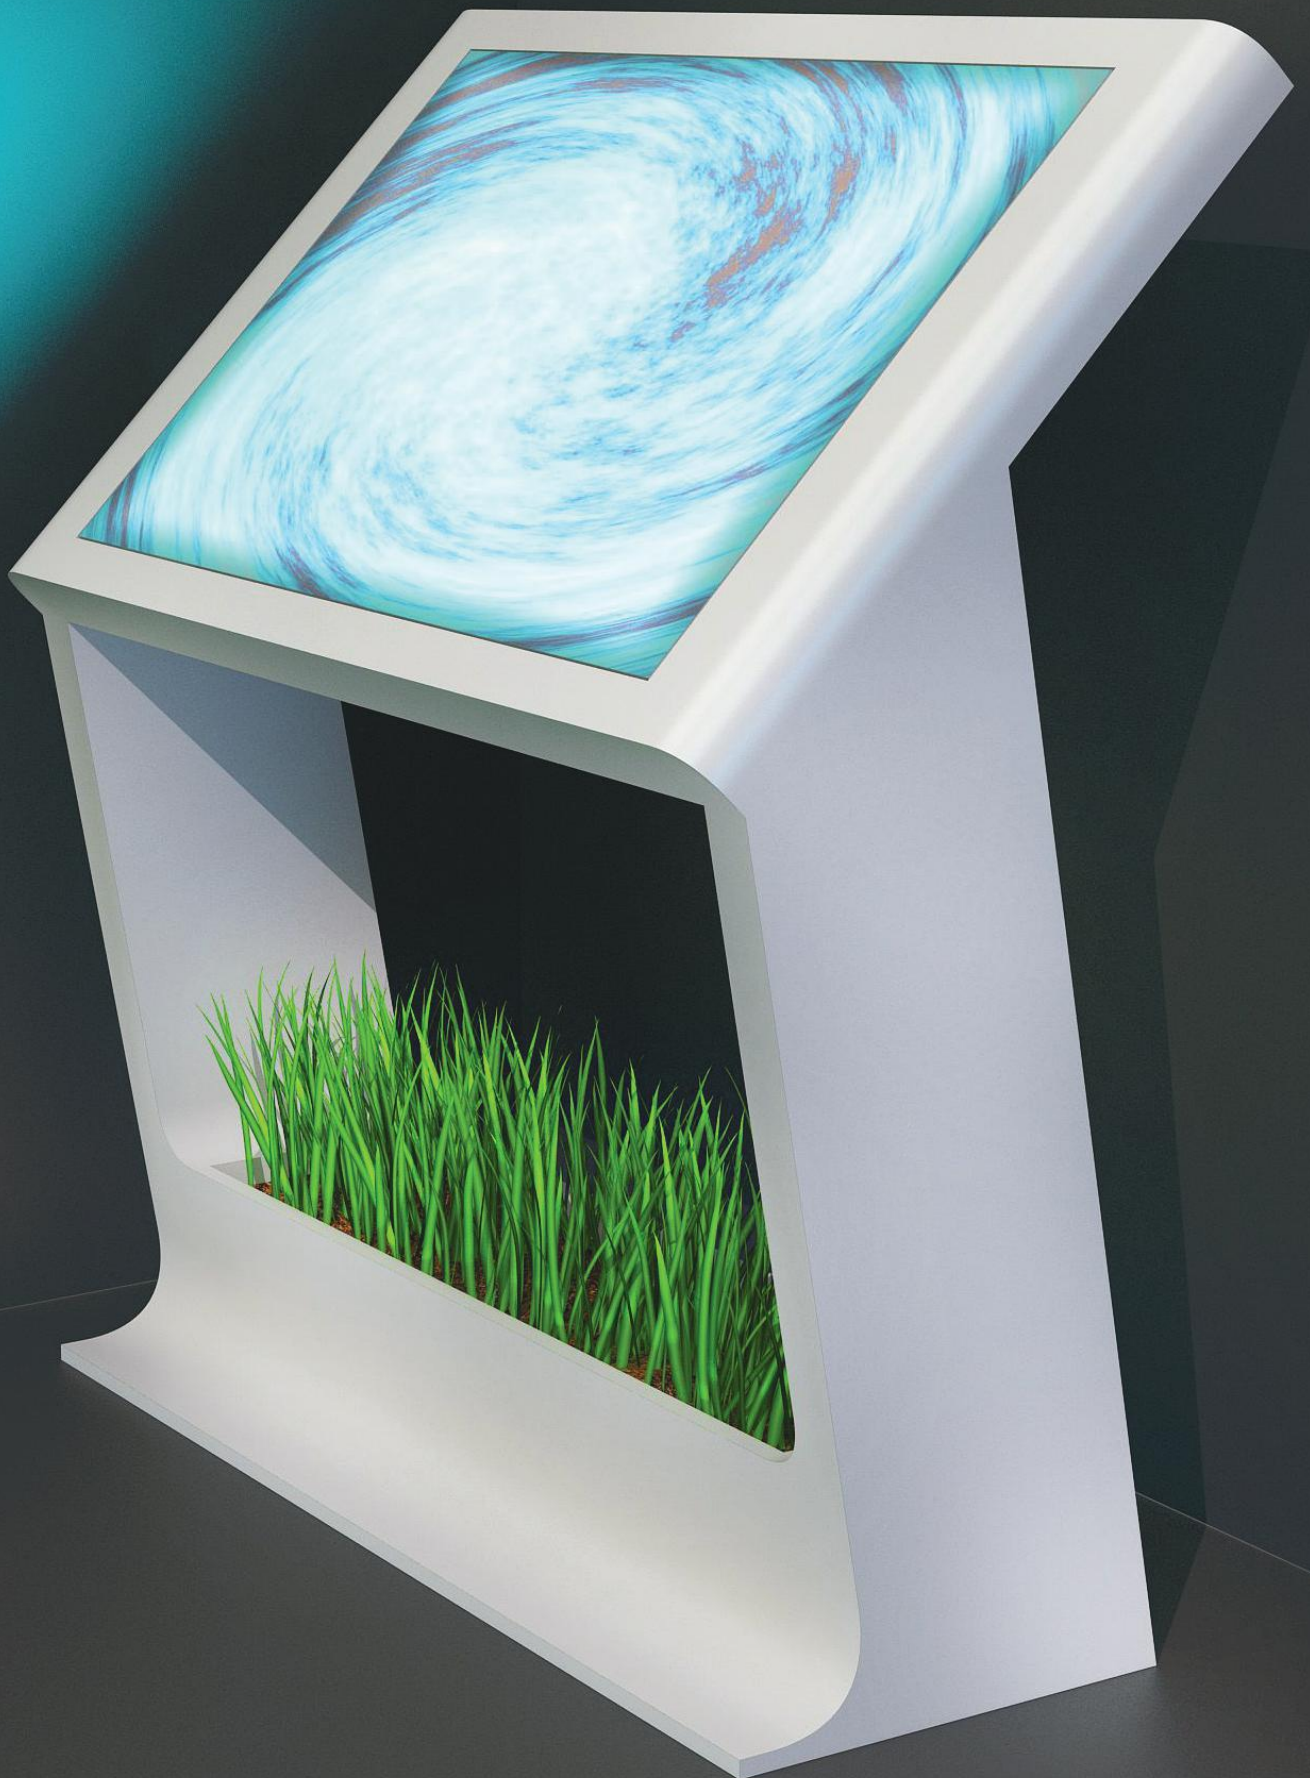

MÀN HÌNH GHÉP


BOE/ LG/ SAMSUNG/ INNOLUX 46 INCH - 50 INCH - 55 INCH

“Giải pháp hàng đầu cho không gian lớn”

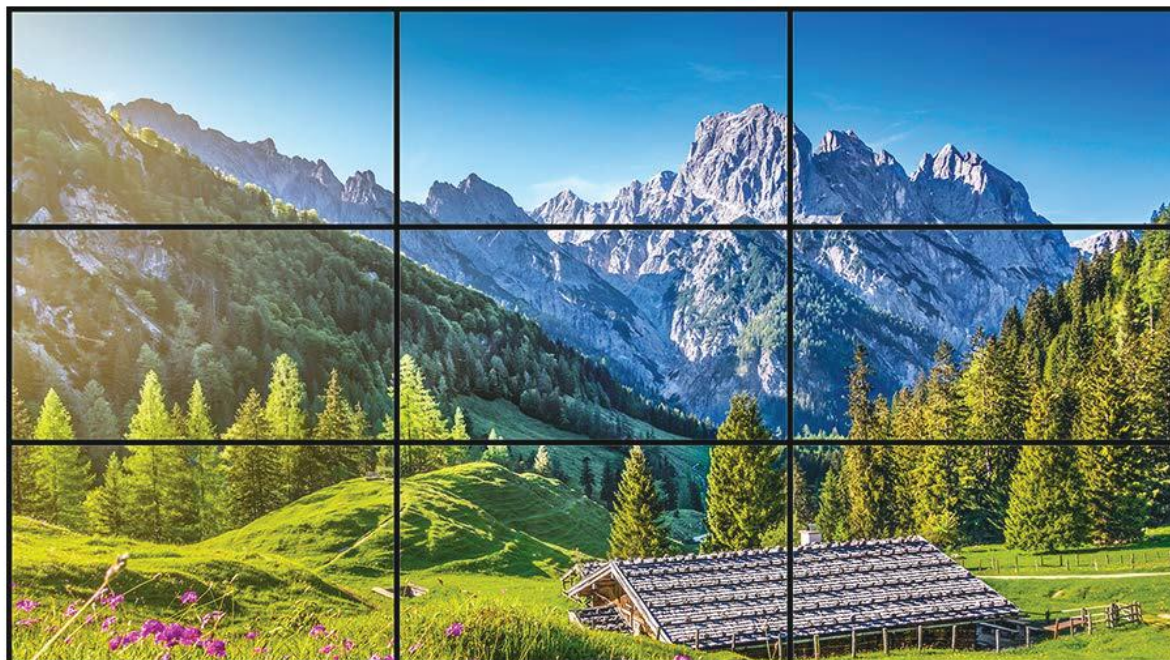

THÔNG SỐ

INNOVIEW	SIZE	46"	50"	55"
	Product code	DV460FHM-NVD	DV500FHM-NVD	DV550FHM-NVD
Panel Details	Brightness (cd/ m ²)	500 nits	500 nits	500 nits
	Panel Technology	IPS LCD - Non-Touch	IPS LCD - Non-Touch	IPS LCD - Non-Touch
	Panel Type	24/7	24/7	24/7
	Resolution	Full HD / (1920x1080) / (16:9)	Full HD / (1920x1080) / (16:9)	Full HD / (1920x1080) / (16:9)
	Backlight Type	Edge Type LED	Edge Type LED	Edge Type LED
	Contrast Ratio	1000:1	1000:1	1000:1
	Dynamic Contrast Ratio	70000:1	70000:1	70000:1
	Panel Life Time (Min.)	60000 H	60000 H	60000 H
Audio	Viewing Angle	178°(85/85/85 - L/R/U/D)	178°(85/85/85 - L/R/U/D)	178°(85/85/85 - L/R/U/D)
	Speaker Type	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω
AV inputs	Video	HDMI, DVI	HDMI, DVI	HDMI, DVI
	Audio	Audio Socket (3.5mm)	Audio Socket (3.5mm)	Audio Socket (3.5mm)
Power	Power Consumption (W)	105 W	105 W	105 W
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz
Environmental	Operating Temperature	0° - 40° C	0° - 40° C	0° - 40° C
	Storage Temperature	e 0° - 50° C	e 0° - 50° C	e 0° - 50° C
	Operating Humidity	-30° to 60° C	-30° to 60° C	-30° to 60° C
	Storage Humidity	10% to 80%	10% to 80%	10% to 80%
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI
Design	Enclosure material	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover
Customize	Size	46"/ 50"/ 55"		
	Panel Brand	INNOLUX/ BoE / SAMSUNG / LG		

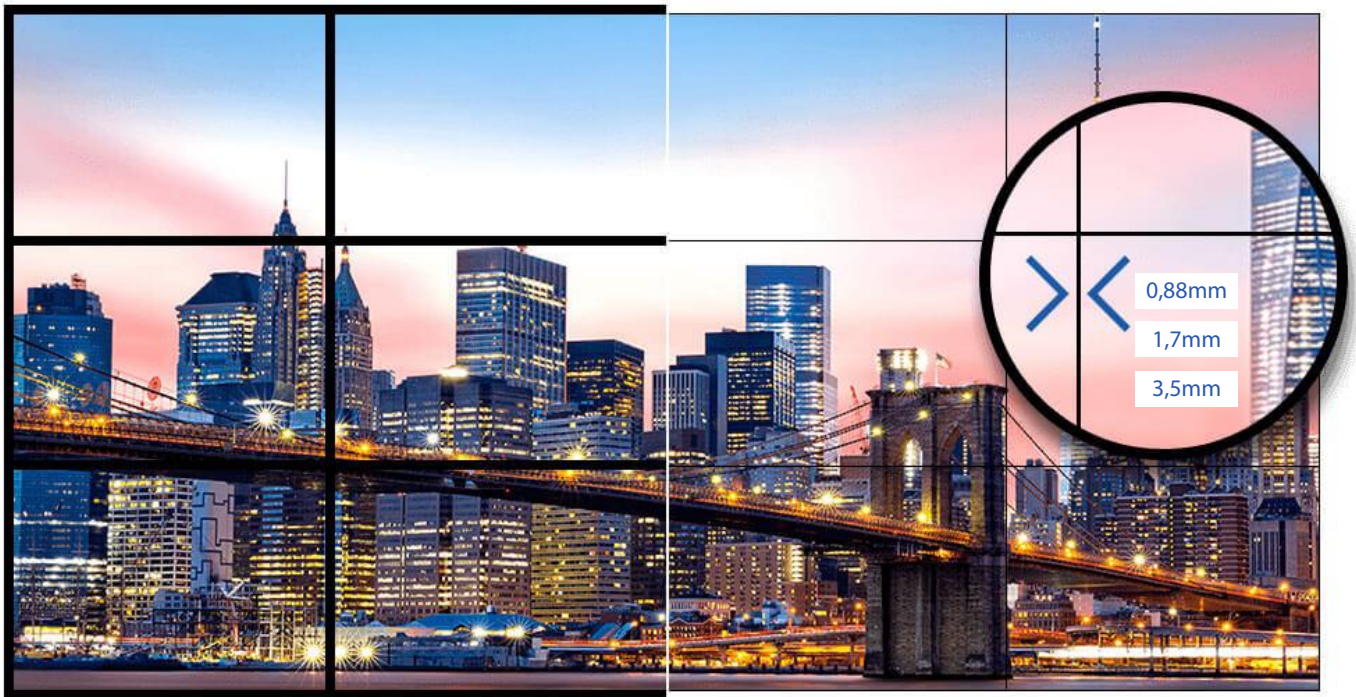

MÀN HÌNH TƯƠNG TÁC THÔNG MINH

55 INCH - 110 INCH

“Giải pháp hàng đầu cho Giáo dục và Doanh nghiệp”



IPS



THÔNG SỐ

INNOBOARD (Touch)	SIZE (Inch)	65"	75"	86"	
	Product code	SR-LG65-ISBW	SR-LG75-ISBW	SR-LG86-ISBW	
Panel Details	Brightness (cd/ m ²)	500 nits	500 nits	500 nits	
	Panel Technology	IPS LCD IR Touch	IPS LCD IR Touch	IPS LCD IR Touch	
	Panel Type	24/7	24/7	24/7	
	Resolution	4K-UHD / (3840x2160) / (16:9)	4K-UHD / (3840x2160) / (16:9)	4K-UHD / (3840x2160) / (16:9)	
	Backlight Type	Edge Type LED	Edge Type LED	Edge Type LED	
	Contrast Ratio	1000:1	1000:1	1000:1	
	Dynamic Contrast Ratio	70000:1	70000:1	70000:1	
	Panel Life Time (Min.)	60000 H	60000 H	60000 H	
Dual-System	Windows OS	Viewing Angle	178'(85/85/85/85 - L/R/U/D)	178'(85/85/85/85 - L/R/U/D)	178'(85/85/85/85 - L/R/U/D)
		Intel® Core™ i7 (Option)	Intel® Core™ i7 (Option)	Intel® Core™ i7 (Option)	
		8GB-DDR4	8GB-DDR4	8GB-DDR4	
		256GB-SSD	256GB-SSD	256GB-SSD	
		Windows 10 Pro 64-bit OEM (Trial/ English)	Windows 10 Pro 64-bit OEM (Trial/ English)	Windows 10 Pro 64-bit OEM (Trial/ English)	
	Android OS	Built-in Digital Signage	Built-in Digital Signage	Built-in Digital Signage	
		RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card	
		2x ARM® Cortex™-A53 + 2x ARM® Cortex™-A73 @1.5GHz	2x ARM® Cortex™-A53 + 2x ARM® Cortex™-A73 @1.5GHz	2x ARM® Cortex™-A53 + 2x ARM® Cortex™-A73 @1.5GHz	
		4GB-RAM	4GB-RAM	4GB-RAM	
		32GB-ROM	32GB-ROM	32GB-ROM	
Audio	Speaker Type	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω	
	AV inputs	Video	HDMI, DVI	HDMI, DVI	HDMI, DVI
Audio		Audio Socket (3.5mm)	Audio Socket (3.5mm)	Audio Socket (3.5mm)	
Power	Power Consumption (W)	105 W	105 W	105 W	
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	
Environmental	Operating Temperature	0° - 40° C	0° - 40° C	0° - 40° C	
	Storage Temperature	e 0° - 50° C	e 0° - 50° C	e 0° - 50° C	
	Operating Humidity	-30° to 60° C	-30° to 60° C	-30° to 60° C	
	Storage Humidity	10% to 80%	10% to 80%	10% to 80%	
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	
Design	Enclosure material	Aluminum frame/Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/Spray cold roll steel sheets body/ Tempered glass cover	
Customize	Size	55"/ 65"/ 75"/ 86"/ 98"/ 110"			
	Panel Brand	INNOLUX / BoE / AUO / LG / TCL			

A large, wall-mounted digital display screen in a meeting room. The screen shows the SmartRetail logo in blue, with the website address smartretail.com.vn below it. The background of the screen is white. The screen is mounted on a wall with a wood-grain pattern.

SmartRetail
smartretail.com.vn



MÀN HÌNH QUẢNG CÁO THANH DÀI



THÔNG SỐ

INNOADS (Non-touch)	SIZE (Inch)	19.5"	24"	28"
	Product code	WW-LG19-ANIB	WW-LG24-ANIB	WW-LG28-ANIB
Panel Details	Brightness (cd/ m ²)	350 nits	350 nits	350 nits
	Panel Technology	IPS LCD Non-touch	IPS LCD Non-touch	IPS LCD Non-touch
	Panel Type	24/7	24/7	24/7
	Resolution	Full HD / (1920x540) / (32:9)	Full HD / (1920x360) / (64:9)	Full HD / (1920x540) / (32:9)
	Backlight Type	Edge Type LED	Edge Type LED	Edge Type LED
	Contrast Ratio	1000:1	1000:1	1000:1
	Dynamic Contrast Ratio	70000:1	70000:1	70000:1
	Panel Life Time (Min.)	60000 H	60000 H	60000 H
Viewing Angle	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)	
System configuration	CPU	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz	RK3568 64-bit Quad-core Cortex-A55, @2.0 GHz
	RAM	2GB-RAM (LDDR4X)	2GB-RAM (LDDR4X)	2GB-RAM (LDDR4X)
	Storage	32GB-ROM (eMMC)	32GB-ROM (eMMC)	32GB-ROM (eMMC)
	Operation System	Google Android™ 11.0	Google Android™ 11.0	Google Android™ 11.0
	SoC	Built-in Digital Signage	Built-in Digital Signage	Built-in Digital Signage
	Interface	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card	RJ45/ Wifi/ HDMI/ USB/ SD Card
App/ Software	Auto On/ Off	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device
	Update Data	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB
	CMS Cloud Platform	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)
Audio	Speaker Type	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω
	Video	HDMI, DVI	HDMI, DVI	HDMI, DVI
AV inputs	Audio	Audio Socket (3.5mm)	Audio Socket (3.5mm)	Audio Socket (3.5mm)
Power	Power Consumption (W)	105 W	105 W	105 W
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz
Environmental	Operating Temperature	0° - 40° C	0° - 40° C	0° - 40° C
	Storage Temperature	e 0° - 50° C	e 0° - 50° C	e 0° - 50° C
	Operating Humidity	-30° to 60° C	-30° to 60° C	-30° to 60° C
	Storage Humidity	10% to 80%	10% to 80%	10% to 80%
Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	
Design	Enclosure material	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/Spray cold roll steel sheets body/ Tempered glass cover
Customize	Size	19.5"/ 24"/ 28"		
	Panel Brand	INNOLUX / BoE / AUO / LG / TCL		

DIGITAL SIGNAGE

Desktop Type



● Black ○ White	8"	10.1"	10.35"
Item Number	DT-IN8-ATIB	DT-IN10-ATIB	DT-IN10-ATIB
Panel type	LCD panel	LCD panel	LCD panel*2
Resolution	1280x800	1280x800	1332x800
Interactive Touch	5 point Capacitive	10 point Capacitive	10 point Capacitive
Aspect Ratio	16:10	16:10	16:9
Camera	none	none	5MP Routine angle
CPU	RK3128,RK3288, RK3399, RK3566,RK3568	RK3128, RK3288, RK3399, RK3566,RK3568	RK3288, RK3568
RAM	1GB(RK3128) / 2GB, Optional 4GB	1GB(RK3128) / 2GB, Optional 4GB	2GB, Optional 4GB
ROM	16GB/ Optional 32GB/64GB	16GB/ Optional 32GB/64GB	16GB/ Optional 32GB/64GB
OS	RK3128 Android 6.0, RK3288 Android 8.1/10 RK3399 Android 7.1/10.0, RK3566/RK3568 Android 11	RK3128 Android 6.0, RK3288 Android 8.1/10 RK3399 Android 7.1/10.0, RK3566/RK3568 Android 11	RK3288 Android 8.1/10, RK3568 Android 11
Network	Wi-Fi 802.11 b/g/n, Bluetooth 4.0	Wi-Fi 802.11 b/g/n, Bluetooth 4.0	Wi-Fi 802.11 b/g/n, Bluetooth 4.0
Interfaces	DC In, RJ45, Serial port, USB host, 3.5mm AudioJack, TFcard slot, Type-C	DC In, RJ45, Serial port, USB host, 3.5mm AudioJack, TFcard slot, Type-C	DC In, RJ45, TF Card, Type-C, USB serial, USB host, 3.5mm earphone, Power jack
Speaker	2x2W	2x2W	2x3W
Power input	12V/1.5A	12V/1.5A	12V/2A
Net weight	0.45KG	0.67KG	1.35KG
Product size	196.1x55x130mm	236.1x63.3x156.8mm	247.7x156.5x125mm
VESA mount	none	none	none
Gift box size	309x180x89mm	354x215x89mm	364x145x220mm
Carton size	468x378x327mm	448x377x372mm	455x379x460mm

DIGITAL SIGNAGE



LED Light Bar Type



● Black ○ White	10.1"	10.1"	10.1"
Item Number	LLW-IN10-ATIB	LLW-IN10-ATIW	LLW-IN10-ATIB
Panel type	none	none	none
Resolution	1280x800	1280x800	1280x800
Interactive Touch	10-Point capacitive touch	10-Point capacitive touch	10-Point capacitive touch
Aspect Ratio	none	none	none
Camera	2MP Wide angle	2MP Wide angle (Optional Binocular Camera)	5MP Routine angle
CPU	RK3288, RK3399, RK3566, RK3568	RK3288, RK3399, RK3566	RK3288, RK3399, RK3566, RK3568
RAM	2GB/ Optional 4GB	2GB/Optional 4GB	2GB/ Optional 4GB
ROM	16GB/ Optional 32GB/64G	16GB/ Optional 32GB/64G	16GB/Optional 32GB/64GB
OS	RK3288 Android 8.1/10, RK3399 Android 7.1/9.0/10 RK3566/RK3568 Android 11	RK3288 Android 8.1/10, RK3399 Android 7.1/9.0/10.0 RK3566 Android 11	RK3288 Android 8.1/10, RK3399 Android 7.1/9.0/10.0 RK3566/RK3568 Android 11
Network	Wi-Fi 802.11b/g/n, Bluetooth 4.0 Wi-Fi 802.11 a/b/g/n/ac, Bluetooth 4.2, NFC/RFID (Optional)	Wi-Fi 802.11b/g/n, Bluetooth 4.0 Wi-Fi 802.11 a/b/g/n/ac, Bluetooth 4.2, NFC/RFID(Optional)	Wi-Fi 802.11b/g/n, Bluetooth 4.0 Wi-Fi 802.11 a/b/g/n/ac, Bluetooth 4.2, NFC/RFID(Optional)
Interfaces	DC In, RJ45, Recovery, USB host, USB serial port, SD Card, 3.5mm earphone, Micro USB OTG, 4G LTE (Optional)	DC In, RJ45, Recovery, USB host, USB serial port, 3.5mm Audio Jack Output, Micro USB OTG, SD Card	DC In, Micro USB OTG, RJ45, USB host, USB serial port 3.5mm Audio Jack Output, SD Card Slot, SIM Card(Optional)
Speaker	2x3W	2x2W	2x2W
Power input	12V/1.5A	12V/1.5A	12V/1.5A
Net weight	0.9KG	0.72KG	0.94KG
Product size	255.85x175.83x31.7mm	273.7x189.7x30.2mm	259.36x178.36x28mm
VESA mount	75x75mm	75x75mm	75x75mm
Gift box size	368x75x240mm	368x75x240mm	363x65x225mm
Carton size	474x380x260mm	474x380x260mm	378x347x470mm

DIGITAL SIGNAGE

L Type

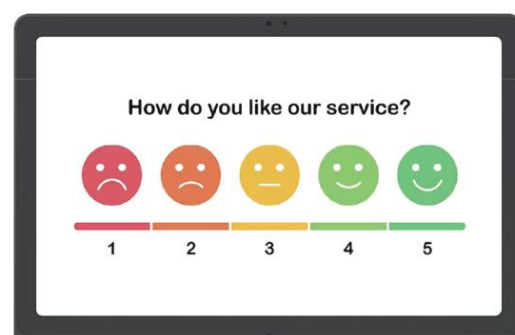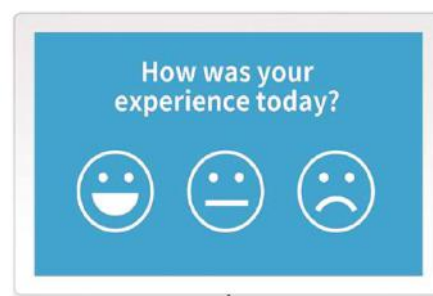

● Black ○ White	10.1"	10.35"	13.3"
Item Number	DTL-IN10-ATIB	DTL-IN10-ATIW	DTL-IN13-ATIB
Panel type	none	none	none
Resolution	1280x800	1332x800	1920x1080
Interactive Touch	10 point Capacitive touch	10 point Capacitive touch	10 point Capacitive touch
Aspect Ratio	16:10	16:10	16:9
Camera	No Camera	5MP Routine angle	5MP Routine angle
CPU	RK3128, RK3288, RK3399, RK3566, RK3568	RK3288, RK3566	RK3288, RK3399, RK3566
RAM	1GB/ 2GB Optional 4GB	2GB Optional 4GB	2GB Optional 4GB
ROM	16GB/ Optional 32GB/64G	16GB/ Optional 32GB/64G	16GB Optional 32GB/64GB
OS	RK3128 Android 6.0, RK3288 Android 8.1/10 RK3399 Android 7.1/9.0/10, RK3566/RK3568 Android 11	RK3288 Android 8.1/10, RK3566 Android 11	RK3288 Android 8.1/10, RK3399 Android 7.1/9.0/10 RK3566 Android 11
Network	Wi-Fi 802.11b/g/n, Bluetooth 4.0, NFC(Optional)	Wi-Fi 802.11 b/g/n, Bluetooth 4.0	Wi-Fi 802.11 b/g/n, Bluetooth 4.0 Wi-Fi 802.11a/b/g/n/ac, Bluetooth 4.2, NFC/4G LTE(Optional)
Interfaces	DC In, HDMI output(RK3566 Not supported), RJ45, USB slave USB serial port, USB host x2,TF Card, 3.5mm Audio Jack	DC In, HDMI output, RJ45, USB Device, USB serial port, USB hostx2,TF Card, 3.5mm Audio Jack	DC In, HDMI output, TF Card, 3.5mm Audio Jack, USB host 2.0 USB Device only, USB for serial port, RJ45
Speaker	2x2W	2x2W	2x1W
Power input	12V/1.5A	12V/1.5A	12V/2A
Net weight	0.66KG	0.83KG	1.23KG
Product size	243.18x162.53x103.26mm	247.76x160x102mm	330x206x116mm
VESA mount	none	none	none
Gift box size	294x205x123mm	304x205x115mm	393x270x138mm
Carton size	513x428x314mm	597x319x430mm	570x408x290mm

DIGITAL SIGNAGE

L Type



● Black ○ White	14"	15.6"	17.3"
Item Number	SR-LG14-140H	SR-LG15-156H	SR-LG17-173H
Panel type	none	none	none
Resolution	1920x1080	1920x1080	1920x1080
Interactive Touch	10 point Capacitive touch	10 point Capacitive touch	10 point Capacitive touch
Aspect Ratio	16:9	16:9	16:9
Camera	2MP Routine angle /5MP Routine angle (WL1413T/WL1418T)	5MP Routine angle	5MP Routine angle
CPU	RK3288, RK3399, RK3566, RK3568	RK3288, RK3399, RK3566	RK3288, RK3399, RK3566
RAM	2GB/Optional 4GB	2GB/ Optional 4GB	2GB/ Optional 4GB
ROM	16GB/ Optional 32GB/64G	16GB/ Optional 32GB/64G	16GB/Optional 32GB/64GB
OS	RK3288 Android 8.1/10, RK3399 Android 7.1/9.0/10 RK3566/RK3568 Android 11	RK3288 Android 8.1/10, RK3399 Android 7.1/9.0/10 RK3566 Android 11	RK3288 Android 8.1/10, RK3399 Android 7.1/9.0/10 RK3566 Android 11
Network	Wi-Fi 802.11 b/g/n, Bluetooth 4.0 Wi-Fi 802.11a/b/g/n/ac, Bluetooth 4.2, NFC/4G LTE (Optional)	Wi-Fi 802.11 b/g/n, Bluetooth 4.0 Wi-Fi 802.11a/b/g/n/ac, Bluetooth 4.2, NFC/4G LTE(Optional)	Wi-Fi 802.11 b/g/n, Bluetooth 4.0 Wi-Fi 802.11a/b/g/n/ac, Bluetooth 4.2, NFC/4G LTE (Optional)
Interfaces	DC In, HDMI output, TF Card, 3.5mm Audio Jack, USB host 2.0 USB Device only, USB for serial port, RJ45	DC In, HDMI output, TF Card, 3.5mm Audio Jack, USB host 2.0 USB Device only, USB for serial port, RJ45	DC In, HDMI output, TF Card, 3.5mm Audio Jack, USB host 2.0 USB Device only, USB for serial port, RJ45
Speaker	2x2W	2x2W	2x2W
Power input	12V/2A	12V/2A	12V/2A
Net weight	1.21KG	1.78KG	2.14KG
Product size	349.2x112.26x226.6mm	389.16x242.9x142.3mm	427.8x268.03x153mm
VESA mount	none	none	none
Gift box size	409x290x135mm	452x305x170mm	492x330x180mm
Carton size	560x424x310mm	467x335x325mm	507x358x350mm

DIGITAL SIGNAGE

PCAP - Pro Touchscreen



● Black ○ White	21.5"	24"	32"
Item Number	WMI-IN22-ATIW	WMI-IN24-ATIW	WMI-IN32-ATIW
Panel type	none	none	none
Resolution	1920x1080	1920x1080	1920x1080
Interactive Touch	10 point Capacitive touch	In cell touch(10-point)	In cell touch(10-point)
Aspect Ratio	none	none	none
Camera	Optional External USB type camera (2.0 MPor 5.0MP)	Optional External USB type camera (2.0 MPor 5.0MP)	Optional External USB type camera (2.0 MPor 5.0MP)
CPU	RK3399, RK3568, RK3566, RK3588	RK3399, RK3588	RK3399, RK3588
RAM	2GB/4GB (Optional 8GB RK3588)	2GB(Optional/4GB RK3399)/4GB(Optional/8GB RK3588)	2GB(Optional/4GB RK3399)/4GB(Optional/8GB RK3588)
ROM	16GB/32GB (Optional 64GB RK3588)	16GB/ Optional 32GB/64GB	16GB/ Optional 32GB/64GB
OS	Android 12	Android 12	Android 12
Network	WiFi 802.11b/g/n/a/ac, WiFi 802.11b/g/n/a/ac/ax (wifi 6), Bluetooth 5.0, WiFi 802.11b/g/n, Bluetooth 4.0	WiFi 802.11b/g/n/a/ac, WiFi 802.11b/g/n/a/ac/ax (WiFi 6) Bluetooth 5.0, 4G LTE(Optional)	WiFi 802.11b/g/n/a/ac, WiFi802.11b/g/n/a/ac/ax (WiFi 6) Bluetooth 5.0, 4G LTE(Optional)
Interfaces	DC power input, Type-c, USB/Touch, Optional SIM Slot, USB Host*2, HDMI IN, RJ45,3.5mm earphone	DC power input, MIC IN, Earphone Output, USB/Touch Optional SIM Slot, USB Host*3,HDMI IN, RJ45,3.5mm earphone	DC power input, MIC IN, Earphone Output, USB/Touch Optional SIM Slot, USB Host*3,HDMI IN, RJ45,3.5mm earphone
Speaker	4*5W*2	4*5W*2	4*5W*2
Power input	12V/3A	12V/4A	12V/5A
Net weight	3.5KG	4.06KG	6.53KG
Product size	512.8x308.9x33.5mm	549.7x335.7x27.8mm	733.4x432x37mm
VESA mount	100x100mm	100x100mm	100x100mm
Gift box size	558x115x395mm	640x120x410mm	832x127x508mm
Carton size	575x250x415mm	656x258x430mm	848x143x528mm

SMART LCD MOVE360

24 INCH & 32 INCH



IPS

4K
ULTRAHD



BẢO HÀNH
24 THÁNG

THÔNG SỐ

INNOMOVE	SIZE (Inch)	24"	32"
	Product code	SR-LG24-SMIT	SR-LG32-SMIT
Panel Details	Brightness (cd/ m ²)	300 nits	300 nits
	Panel Technology	IPS LCD - P-CAP Pro Touchscreen	IPS LCD - P-CAP Pro Touchscreen
	Panel Type	24/7	24/7
	Resolution	4K-UHD / (3840x2160) / (16:9)	4K-UHD / (3840x2160) / (16:9)
	Backlight Type	Edge Type DLED	Edge Type DLED
	Contrast Ratio	1000:1	1000:1
	Dynamic Contrast Ratio	70000:1	70000:1
	Panel Life Time (Min.)	60000 H	60000 H
System configuration	Viewing Angle	178°(85/85/85/85 - L/R/U/D)	178°(85/85/85/85 - L/R/U/D)
	CPU	6 CORE (RK3399 Cortex-A72*2+Cortex-A53*4) 64-Bit	6 CORE (RK3399 Cortex-A72*2+Cortex-A53*4) 64-Bit
	RAM	4GB-RAM (LDDR4X)	4GB-RAM (LDDR4X)
	Storage	64GB-ROM (eMMC)	64GB-ROM (eMMC)
	Operation System	Google Android™ 12.0	Google Android™ 12.0
	SoC	Built-in Digital Signage	Built-in Digital Signage
Interface	WIFI 6/ Bluetooth 5.0/ LAN/ USB/ HDMI/ Type-C/ Speaker	WIFI 6/ Bluetooth 5.0/ LAN/ USB/ HDMI/ Type-C/ Speaker	
Audio	Speaker Type	Stereo 2x10W, 8Ω	Stereo 2x10W, 8Ω
AV inputs	Video	HDMI, DVI	HDMI, DVI
	Audio	Audio Socket (3.5mm)	Audio Socket (3.5mm)
Power	Power Consumption (W)	105 W	105 W
	Input Voltage	DC-24V/ 3A	DC-24V/ 3A
Environmental	Operating Temperature	0° - 40° C	0° - 40° C
	Storage Temperature	e 0° - 50° C	e 0° - 50° C
	Operating Humidity	-30° to 60° C	-30° to 60° C
	Storage Humidity	10% to 80%	10% to 80%
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI
Design	Enclosure material	Aluminum frame/ Spray cold roll steel sheets body/ Tempered glass cover	Aluminum frame/Spray cold roll steel sheets body/ Tempered glass cover
Customize	Size	24"/ 32"	
	Panel Brand	INNOLUX	



ĐỂ SẠC DI ĐỘNG

Phía dưới có thiết kế bộ bánh xe lăn Có thể luôn di chuyển đến nơi bạn cần

- CÓ THỂ THÁO RỜI**
Free to move position
Place at will
- BÁNH XE ĐA NĂNG**
5 universal wheels
Move at will
- TÍCH HỢP PIN**
Built-in battery
Endurance time 3~4h

* Battery and bracket are optional

Android 12 latest OS

android 12	android 11
RK3288	RK3299
4+32G, 4+64G	2+16G, 4+32G
Optional	Optional

MÀN HÌNH INCELL

10 ĐIỂM CHẠM

- 1000:1 Contrast Ratio
- 1920*1080 Resolution
- 178° Viewing Angle

General screen vs Incell screen comparison showing better color and contrast.

27.8 mm Ultra thin body
9.7 mm Super narrow bezel

MÀN HÌNH RỘNG

MÀN HÌNH ĐÚC

Kết nối qua các thiết bị android thuận tiện cho giải trí

- Apple Airplay
- Miracast
- Android DLNA
- Chromecast
- Wi-Fi
- Bluetooth

HỖ TRỢ GẮN TƯỜNG

GIÁ TREO TƯỜNG VESA

ANDROID BOX DIGITAL SIGNAGE


Thiết bị phát quảng cáo Android Box 4K hay còn gọi là Android Box Digital Signage, thiết bị này cho phép phân phát các mẫu quảng cáo với các định dạng dữ liệu đa phương tiện: Video; Audio; Hình ảnh; Url (Tỷ giá, thị trường chứng khoán, Website),... đến màn hình kỹ thuật số như: LCD, LED, TV/ Smart TV, Monitor theo thời gian thực. Android Digital Signage sử dụng được thiết kế theo chuẩn công nghiệp, hoạt động ổn định và liên tục 24/7.



THÔNG SỐ

INNOEQI	Product code	IN-AB4K-566S	IN-AB4K-568S	IN-AB4K-399F
Details	Resolution	4K-UHD	4K-UHD	4K-UHD
	Operation	24/7	24/7	24/7
System configuration	CPU	RK3566 64-bit Quad-core Cortex-A17, @1.8 GHz	RK3568 64-bit Quad-core Cortex-A17, @2.0 GHz	RK3399 64-bit Dual-core A72 + Quad core A53, @1.8GHz
	RAM	4GB-LDDDX4	4GB-LDDDX4	4GB-LDDDX4
	ROM	32GB-eMMC	32GB-eMMC	32GB-eMMC
	Operation System	Google Android™ 11.0	Google Android™ 11.0	Google Android™ 11.0
	SoC	Built-in SoC Digital Signage	Built-in SoC Digital Signage	Built-in SoC Digital Signage
App/ Software	Interface	None	None	None
	Auto On/ Off	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device	Automatic Timer To Turn On/ Off the Device
	Update Data	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB	Update Content Via Mobile Or USB
Power	CMS Cloud Platform	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)	App Digital Signage connects to CMS Cloud Platform - SaaS Cloud (Centralized management software via the Internet), Paid software (Not required)
	Power Consumption (W)	105 W	105 W	105 W
Environmental	Input Voltage	Adapter DC 12V-2A	Adapter DC 12V-2A	Adapter DC 12V-2A
	Operating Temperature	0° - 40° C	0° - 40° C	0° - 40° C
	Storage Temperature	e 0° - 50° C	e 0° - 50° C	e 0° - 50° C
	Operating Humidity	-30° to 60° C	-30° to 60° C	-30° to 60° C
	Storage Humidity	10% to 80%	10% to 80%	10% to 80%
Design	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI
Customize	Enclosure material	Aluminum frame/ Spray cold roll steel sheets body/ Black luxury	Aluminum frame/ Spray cold roll steel sheets body/ Black luxury	Aluminum frame/ Spray cold roll steel sheets body/ Black luxury
	Panel Brand	INNOLUX		



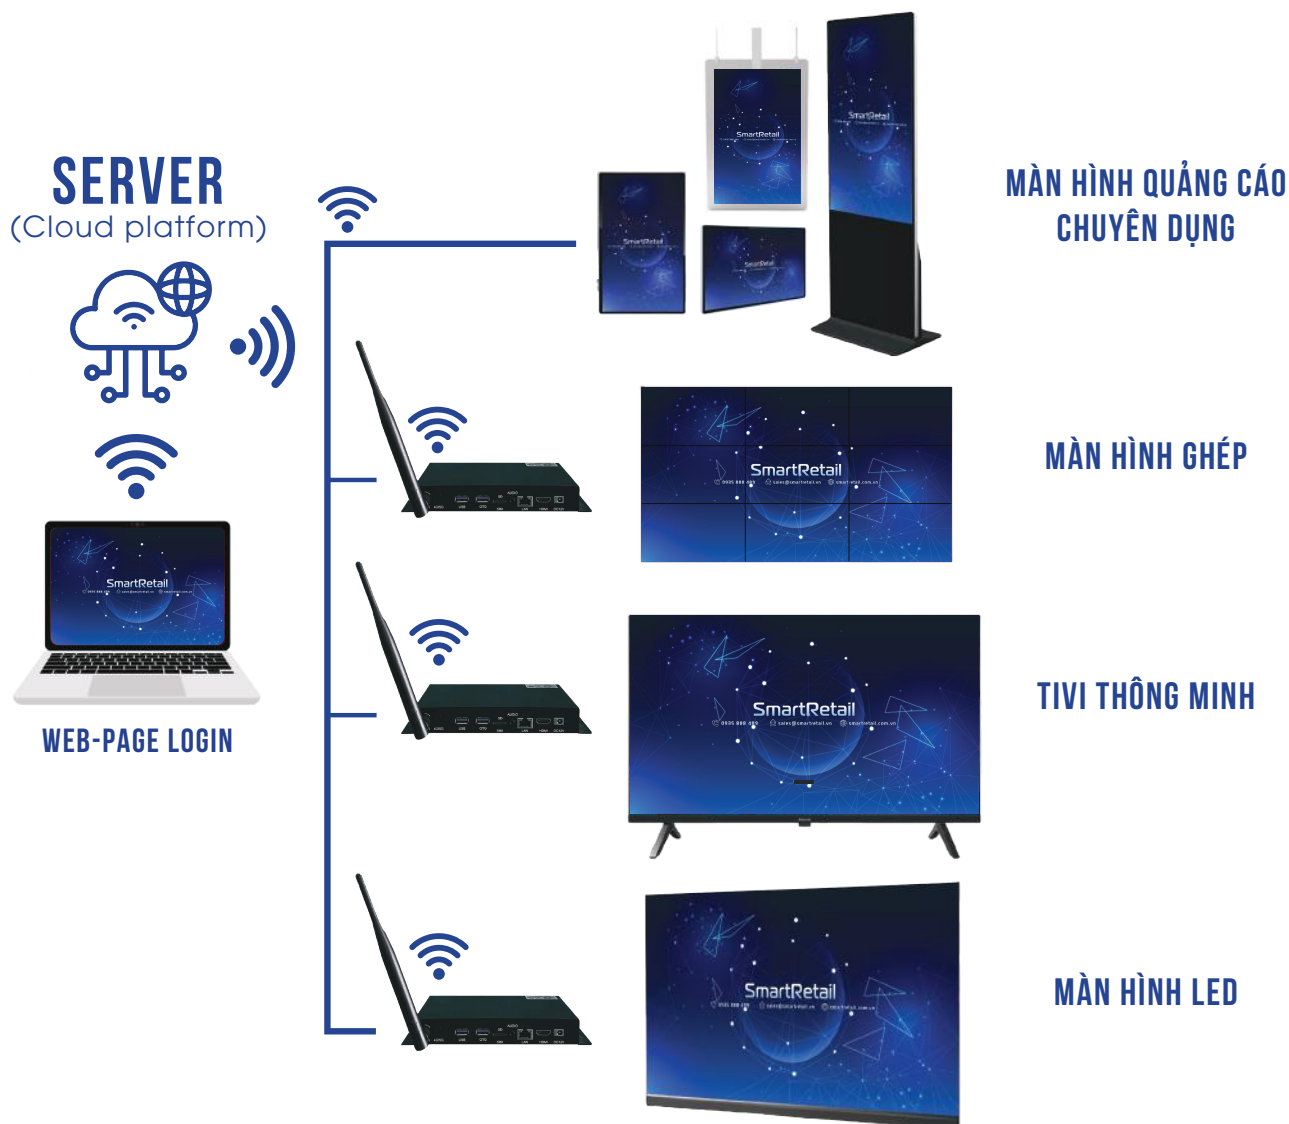

Thiết kế trên nền tảng Google Android™ với cấu hình hệ thống CPU- RK3568 64-bit Quad-core Cortex-A17, @2.0 GHz/ 4GB-LDDDR4X/ 32GB-eMMC (5.1); GPU- Quard-core ARM® Mali™ -G52 2EE @600MHz; Hệ điều hành: Android™ 11/ SoC - Built-in SoC Digital Signage.



Thiết bị phân phát nội dung quảng cáo với các định dạng dữ liệu đa phương tiện: Video; Audio; Hình ảnh; Url (Tỷ giá, thị trường chứng khoán, Website),... đến màn hình kỹ thuật số LCD, TV/ Smart Tivi theo thời gian thực. Digital Signage Player được thiết kế trên nền Android theo chuẩn công nghiệp, hoạt động ổn định và liên tục 24/7.



Không có bất kỳ ràng buộc nào, bạn chỉ cần thêm các ứng dụng tương tác hoặc cảm biến bên ngoài vào bảng chỉ dẫn Android box để tăng mức độ thu hút khách hàng.



Không có bất kỳ ràng buộc nào, bạn chỉ cần thêm các ứng dụng tương tác hoặc cảm biến bên ngoài vào bảng chỉ dẫn trên Android để tăng mức độ thu hút khách hàng.



Android Box này được cài đặt App Digital Signage kết nối phần mềm CMS Digital Signage, giúp cho việc vận hành và quản lý tất cả các thiết bị trên cùng một hệ thống thông qua kết nối Internet.



Người dùng có thể điều khiển và theo dõi trạng thái của nhiều màn hình ở các vị trí khác nhau trong thời gian thực, tính năng này cũng khả dụng trên các thiết bị di động có kết nối internet, giúp bạn nhanh chóng phản ứng với các tình huống khẩn cấp.

MÀN HÌNH LED





MÀN HÌNH LED TRONG NHÀ



Pixel Pitch(mm)	P1.25	P1.538	P1.667	P1.86	P2	P2.5	P3	P3.076	P4	P5
Module size(mm)	320*160	320*160	320*160	320*160	320*160	320*160	192*192	320*160	256*128 256*256	320*160
Pixel Density(m ²)	640000	422753	359856	289050	250000	160000	111111	105688	62500	40000
Scan	1/64	1/52	1/48	1/43	1/40	1/32	1/32	1/26	1/16	1/16
LED Lamp	SMD 1010	SMD1212	SMD1212	SMD1515	SMD1515	SMD2020	SMD2020	SMD2020	SMD2020	SMD2020
Brightness	600	600	600	600	600	600	600	600	600	600
Resolution (WxH)	256*128	208*104	192*96	172*86	160*80	128*64	64*64	104*52	64*32	64*32
Cabinet size	640*480*60	640*480*60	640*480*60	640*480*60	640*480*60	640*480*60	576*576*60	640*480*60	512*512*60	640*480*60
Resolution (WxH)	512 *384	416*312	384*288	344*258	320*240	256*192	192*192	208*156	128*128	128*96
Cabinet material	diecasting aluminum	diecasting aluminum	diecasting aluminum	diecasting aluminum	diecasting aluminum	diecasting aluminum	diecasting aluminum	diecasting aluminum	diecasting aluminum	diecasting aluminum
Cabinet weight (kg)	7.0	7.0	7.0	7.0	7.0	7.0	7.5	7.0	6.5	7.0
Maintenance way	front	front	front	front	front	front	front	front	front	front
Refresh rate	3840	3840	3840	3840	3840	1920/3840	1920/3840	1920/3840	1920/3840	1920/3840
Viewing angle	150/150	150/150	150/150	150/150	150/150	150/150	150/150	150/150	150/150	150/150
Max power/sqm(w)	650	650	650	650	650	650	680	650	650	650
Grey scale levels	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits
IP	IP31	IP31	IP31	IP31	IP31	IP31	IP31	IP31	IP31	IP31



MÀN HÌNH LED NGOÀI TRỜI





Pixel Pitch(mm)	P2	P2.5	P3	P3.076	P4	P4	P5	P6	P8	P10
Module size(mm)	160*160	320*160	192*192	320*160	256*128	320*160	320*160	192*192	320*160	320*160
Pixel Density(m ²)	250000	160000	111111	105688	62500	62500	40000	27777	15625	10000
Scan	1/20	1/16	1/16	1/13	1/8	1/10	1/8	1/8	1/5	1/2
LED Lamp	SMD 1211	SMD 1415	SMD 1415	SMD 1415	SMD1921	SMD 1921	SMD 1921	SMD 3535	SMD 3535	SMD 3535
Brightness	5000	5000	5000	5000	5000	5000	5000	5500	5500	5500
Resolution (WxH)	80*80	128*64	64*64	104*52	64*32	80*40	64*32	32*32	40*20	32*16
Cabinet size	960*960*150 customized basic on module size	960*960*150 customized basic on module size	960*960*150 customized basic on module size	960*960*150 customized basic on module size	1024*1024*150 customized basic on module size	960*960*150 customized basic on module size	960*960*150 customized basic on module size	960*960*150 customized basic on module size	960*960*150 customized basic on module size	960*960*150 customized basic on module size
Resolution (WxH)	480 *480	384 *384	320 *320	312 *312	256*256	240 *240	192 *192	160*160	120 *120	96 *96
Cabinet material	iron/aluminum	iron/aluminum	iron/aluminum	iron/aluminum	iron/aluminum	iron/aluminum	iron/aluminum	iron/aluminum	iron/aluminum	iron/aluminum
Cabinet weight (kg)	34/27	34/27	34/27	34/27	40/32	34/27	34/27	34/27	34/27	34/27
Maintenance way	back	back	back	back	back	back	back	back	back	back
Refresh rate	1920/3840	1920/3840	1920/3840	1920/3840	1920/3840	1920/3840	1920/3840	1920/3840	1920/3840	1920/3840
Viewing angle	150/150	150/150	150/150	150/150	150/150	150/150	150/150	150/150	150/150	150/150
Max power/sqm(w)	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
Grey scale levels	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits
IP	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65





MÀN HÌNH LED TRONG NHÀ

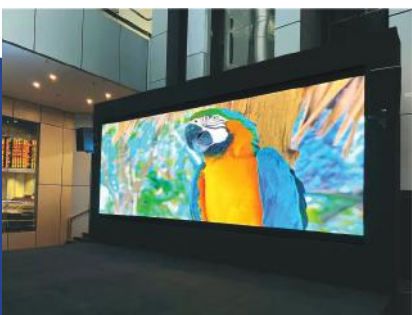

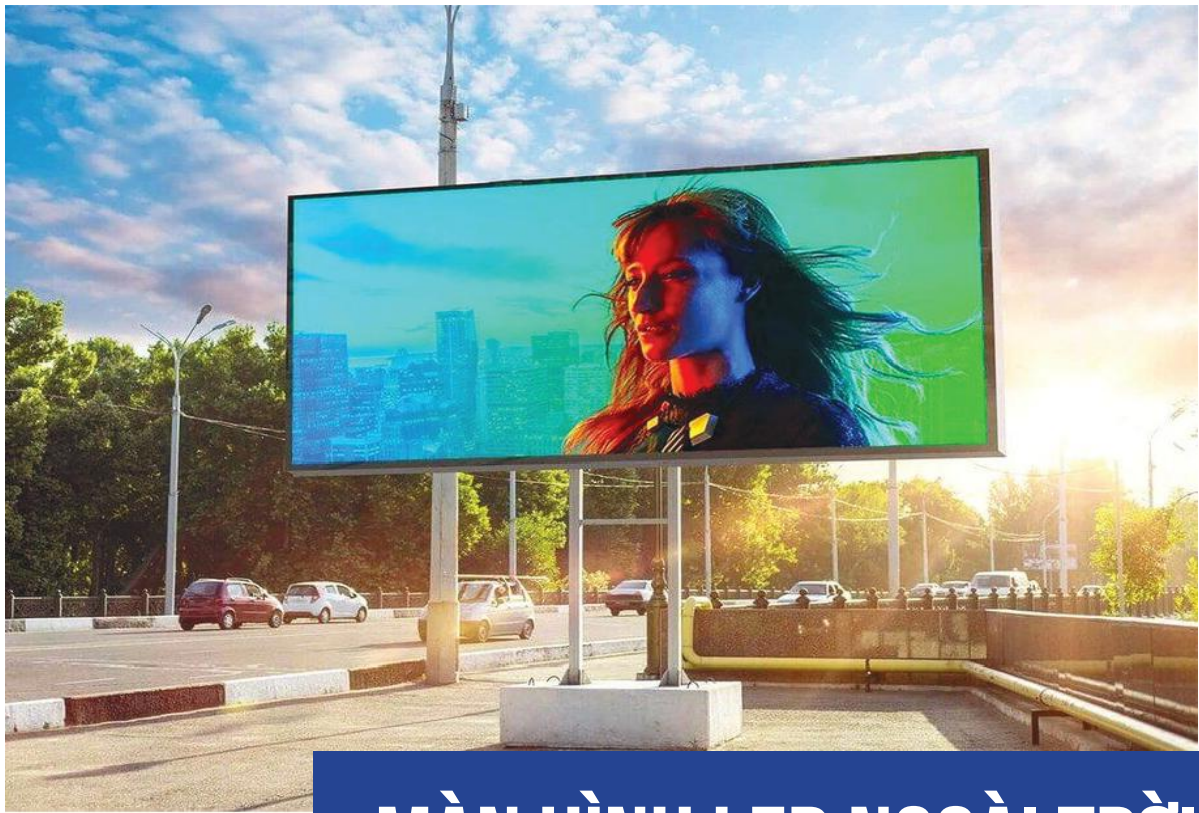

MÀN HÌNH LED NGOÀI TRỜI



SỞ KẾ HOẠCH VÀ ĐẦU TƯ
THÀNH PHỐ HỒ CHÍ MINH
PHÒNG ĐĂNG KÝ KINH DOANH

CỘNG HÒA XÃ HỘI CHỦ NGHĨA VIỆT NAM
Độc lập – Tự do – Hạnh phúc

**GIẤY CHỨNG NHẬN ĐĂNG KÝ DOANH NGHIỆP
CÔNG TY TRÁCH NHIỆM HỮU HẠN HAI THÀNH VIÊN TRỞ LÊN**

Mã số doanh nghiệp: 0314763940

Đăng ký lần đầu: ngày 29 tháng 11 năm 2017

Đăng ký thay đổi lần thứ: 3, ngày 18 tháng 05 năm 2023

1. Tên công ty

Tên công ty viết bằng tiếng Việt: CÔNG TY TNHH GIẢI PHÁP CÔNG NGHỆ
THÀNH PHÁT

Tên công ty viết bằng tiếng nước ngoài: THANHPHAT TECHNOLOGY
SOLUTIONS COMPANY LIMITED

Tên công ty viết tắt: THANHPHAT SOLUTIONS LTD

2. Địa chỉ trụ sở chính

1227/3 Lê Đức Thọ, Phường 13, Quận Gò Vấp, Thành phố Hồ Chí Minh, Việt Nam

Điện thoại: 0935 888 489

Fax:

Email: sales@smartretail.vn

Website: smartretail.com.vn

3. Vốn điều lệ

4.500.000.000 đồng

Bằng chữ: Bốn tỷ năm trăm triệu đồng

4. Danh sách thành viên góp vốn

STT	Tên thành viên	Quốc tịch	Địa chỉ liên lạc đối với cá nhân; địa chỉ trụ sở chính đối với tổ chức	Phần vốn góp (VNĐ và giá trị tương đương theo đơn vị tiền nước ngoài, nếu có)	Tỷ lệ (%)	Số Giấy tờ pháp lý của cá nhân; Mã số doanh nghiệp đối với doanh nghiệp; Số Giấy tờ pháp lý của tổ chức	Ghi chú
1	NGUYỄN HỮU THÀNH	Việt Nam	35/1 Đường Số 51, Phường 14, Quận Gò Vấp, Thành phố Hồ Chí Minh, Việt Nam	3.681.000.000	81,800	087084011150	

2	NGUYỄN THANH TRÀ	Việt Nam	54/53/13 KP 2a, Phường Tân Chánh Hiệp, Quận 12, Thành phố Hồ Chí Minh, Việt Nam	450.000.000	10,000	080082000026
3	PHẠM ĐĂNG KHOA	Việt Nam	Số 62/11/7 Lâm Văn Bền, Phường Tân Kiểng, Quận 7, Thành phố Hồ Chí Minh, Việt Nam	369.000.000	8.200	079090020907

5. Người đại diện theo pháp luật của công ty

* Họ và tên: NGUYỄN HỮU THÀNH

Giới tính: *Nam*

Chức danh: *Giám đốc*

Sinh ngày: *1984*

Dân tộc: *Kinh*

Quốc tịch: *Việt Nam*

Loại giấy tờ pháp lý của cá nhân: *Thẻ căn cước công dân*

Số giấy tờ pháp lý của cá nhân: *087084011150*

Ngày cấp: *20/12/2022*

Nơi cấp: *Cục Cảnh sát quản lý hành chính về trật tự xã hội*

Địa chỉ thường trú: *Mương Nhà Máy, Phường An Thạnh, Thành phố Hồng Ngự, Tỉnh Đồng Tháp, Việt Nam*

Địa chỉ liên lạc: *35/1 Đường Số 51, Phường 14, Quận Gò Vấp, Thành phố Hồ Chí Minh, Việt Nam*

TRƯỞNG PHÒNG

PHÓ TRƯỞNG PHÒNG



Nguyễn Trung Chánh

CHỨNG NHẬN



Cảm ơn **6000+** Khách hàng và Đại lý đang được phục vụ bởi SmartRetail



SmartRetail

CÔNG TY TNHH GIẢI PHÁP CÔNG NGHỆ THÀNH PHÁT



Mobile/ Zalo: 0935 888 489 - 0967 049 018



sales@smartretail.com.vn



www.smartretail.com.vn



A60 & 106 Tô Ký, KP2, Phường Đông Hưng Thuận, Quận 12, TP Hồ Chí Minh

