


AS2632/AS2632E **MOBILE ELEVATING** **WORK PLATFORMS**

Offering electric or hydraulic motor drive configurations, the Pettibone AS2632E and AS2632 mobile elevating work platforms provide personnel with a reliable, reinforced lift for safely working indoors at heights up to 32.8 feet.



SPECIFICATIONS

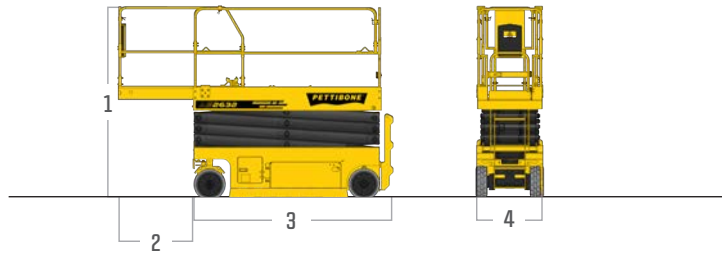

AS2632E

AS2632

DIMENSIONS			
1	Overall Height	6.4' (195 cm) - rails down 7.6' (232 cm) - rails up	6.4' (195 cm) - rails down 7.6' (232 cm) - rails up
2	Platform Extension	3' (91 cm)	3' (91 cm)
3	Overall Length	7.9' (241 cm)	7.9' (241 cm)
4	Overall Width	2.7' (82 cm)	2.7' (82 cm)
	Work Height	32.8' (1,000 cm)	32.8' (1,000 cm)
	Machine Weight	4,718 lbs (2,140 kg)	4,718 lbs (2,140 kg)
PERFORMANCE			
	Platform Capacity	510 lbs (231 kg)	510 lbs (231 kg)
	On-Deck Extension Capacity	265 lbs (120 kg)	265 lbs (120 kg)
	Platform Occupants	2 - indoor use only	2 - indoor use only
	Drive Speed	Lowered: 2.2 ± 0.12 mph (3.5 ± 0.19 km/h) Elevated: 0.5 ± 0.06 mph (0.8 ± 0.1 km/h)	Lowered: 2.2 ± 0.12 mph (3.5 ± 0.19 km/h) Elevated: 0.5 ± 0.06 mph (0.8 ± 0.1 km/h)
	Lift Time	31 ± 3 seconds	31 ± 3 seconds
	Lower Time	40 ± 3 seconds	40 ± 3 seconds
	Gradeability	25%	25%
	Maximum Slope	1.5° / 3°	1.5° / 3°
	Maximum Ground Pressure	122.2 psi	122.2 psi
	Inside Turning Radius	11" (28 cm)	11" (28 cm)
	Outside Turning Radius	7' (213 cm)	7' (213 cm)
	Standards Compliance	ANSI A92.20 CSA-B354.6	ANSI A92.20 CSA-B354.6

FEATURES & OPTIONS

FEATURES

Optimized electronic control system	Motion alarm
Optimized hydraulic system	Flashing beacon/buzzer
Universal drive control box	Emergency descent
Proportional control	Descent alarm and protection
Quick disconnect for control box	Overload alarm
Emergency stop device	Horn/hour meter
Platform power 120VAC (GFCI)	4x2 drive
Foot pedal control for platform extension	Extra wide, non-marking tires
Fold-in guard rails	Pothole guards
Self-closing, self-catching entry gate	Two-wheel brake
Lanyard anchor point	Manual brake release
Large scissor arms	Advanced battery charger with voltage protection
Pressure transducer	Slide-out component tray
Full-height drive	Charging status indicator
Intelligent diagnostic system	Charging operation limit
Tilt sensor and alarm	
Slope sensor	

* Specifications are subject to change.

PETTIBONE

PETTIBONE, LLC

1100 Superior Avenue
Baraga, MI 49908

P: 800.467.3884
info@gopettibone.com
www.gopettibone.com

**1-2-5
WARRANTY**

1 Year

Full machine and attachment

2 Years
or 2,000 hrs

Electric & hydraulic drive motors, lift cylinders, hydraulic valves, & hydraulic pumps

5 Years

Frame weldment, scissor stacks & platform weldment

WARRANTY

