


# AS4046/AS4046E MOBILE ELEVATING WORK PLATFORMS

Offering electric or hydraulic motor drive configurations, the Pettibone AS4046E and AS4046 mobile elevating work platforms provide personnel with a reliable, reinforced lift for safely working indoors at heights up to 46 feet.



# SPECIFICATIONS

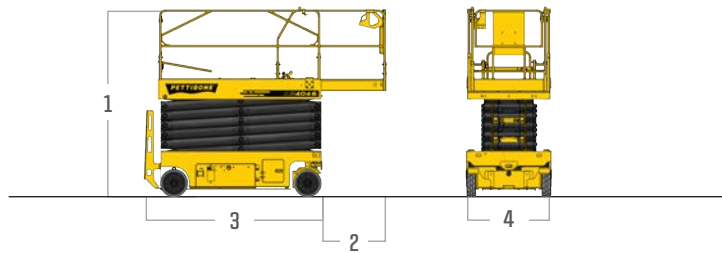

AS4046E

AS4046

DIMENSIONS			
1	Overall Height	6.5' (198 cm) - rails down 8.4' (256 cm) - rails up	6.5' (198 cm) - rails down 8.4' (256 cm) - rails up
2	Platform Extension	3' (91 cm)	3' (91 cm)
3	Overall Length	8.1' (247 cm)	8.1' (247 cm)
4	Overall Width	3.9' (119 cm)	3.9' (119 cm)
	Work Height	46' (1,402 cm)	46' (1,402 cm)
	Machine Weight	7,275 lbs (3,300 kg)	7,275 lbs (3,300 kg)
PERFORMANCE			
	Platform Capacity	705 lbs (320 kg)	705 lbs (320 kg)
	On-Deck Extension Capacity	265 lbs (120 kg)	265 lbs (120 kg)
	Platform Occupants	2 - indoor use only	2 - indoor use only
	Drive Speed	Lowered: 1.9 ± 0.12 mph (3.1 ± 0.19 km/h) Elevated: 0.5 ± 0.06 mph (0.8 ± 0.1 km/h)	Lowered: 1.9 ± 0.12 mph (3.1 ± 0.19 km/h) Elevated: 0.5 ± 0.06 mph (0.8 ± 0.1 km/h)
	Lift Time	58 ± 4 seconds	65 ± 4 seconds
	Lower Time	60 ± 4 seconds	60 ± 4 seconds
	Gradeability	25%	25%
	Maximum Slope	1.5° / 3°	1.5° / 3°
	Maximum Ground Pressure	184.8 psi	184.8 psi
	Inside Turning Radius	13" (33 cm)	13" (33 cm)
	Outside Turning Radius	7.5' (229 cm)	7.5' (229 cm)
	Standards Compliance	ANSI A92.20 CSA-B354.6	ANSI A92.20 CSA-B354.6

# FEATURES & OPTIONS

## FEATURES

Optimized electronic control system	Motion alarm
Optimized hydraulic system	Flashing beacon/buzzer
Universal drive control box	Emergency descent
Proportional control	Descent alarm and protection
Quick disconnect for control box	Overload alarm
Emergency stop device	Horn/hour meter
Platform power 120VAC (GFCI)	4x2 drive
Foot pedal control for platform extension	Extra wide, non-marking tires
Fold-in guard rails	Pothole guards
Self-closing, self-catching entry gate	Two-wheel brake
Lanyard anchor point	Manual brake release
Large scissor arms	Advanced battery charger with voltage protection
Pressure transducer	Slide-out component tray
Full-height drive	Charging status indicator
Intelligent diagnostic system	Charging operation limit
Tilt sensor and alarm	
Slope sensor	

\* Specifications are subject to change.

**PETTIBONE**

## PETTIBONE, LLC

1100 Superior Avenue  
Baraga, MI 49908

P: 800.467.3884  
info@gopettibone.com  
www.gopettibone.com



1 Year

Full machine and attachment

2 Years  
or 2,000 hrs

Electric & hydraulic drive motors, lift cylinders, hydraulic valves, & hydraulic pumps

5 Years

Frame weldment, scissor stacks & platform weldment

## WARRANTY

