


bestrongworld bestrongworld usa.bestrong.com usa@bestrong.com

## **Muscle Groups Focus**



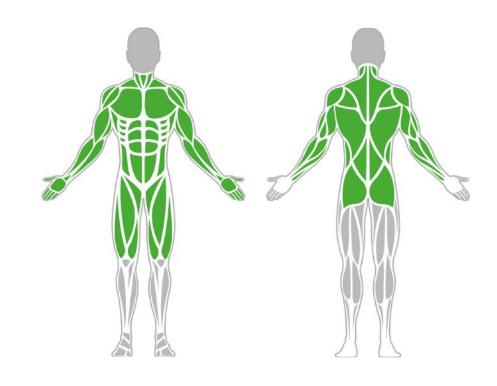

#### **Multifunctional Trainer 950**

The multifunctional trainer is a versatile piece of workout equipment that allows for leg raises, knee raises, and dips with the front handles of the element. This versatility makes this element the perfect choice for those people who are looking for complex outdoor training equipment for the home.

#### **Attributes**

Product code Certificate

Age group

Capacity

Max. weight load

Type

Difficulty level

1-1-042 EN 16630, ASTM F3101


14 + years

1 person 218.26 lbs


**Fitness** 

Medium

### **Side View**

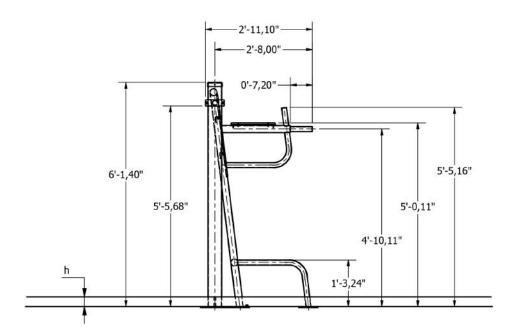

## Plan View

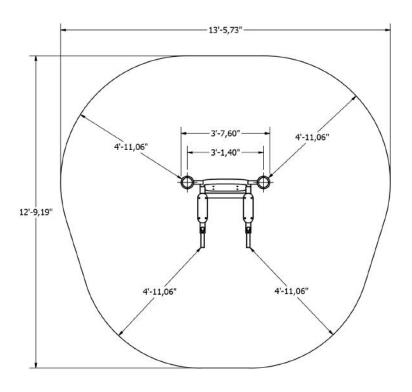

#### Installation information

Number of installers (concrete) At least 2 people Total installation time (concrete) 45-90 min. Number of installers (equipment) At least 2 people Total installation time (equipment) 30-60 min. Excavation volume 27,55 ft<sup>3</sup> Concrete volume 27,55 ft<sup>3</sup> 59.6 x 59.6 x 13.78 " Size of the base structure Anchoring options In-g
In combined structures, the volume of concrete required varies. In-ground or surface

### **Technical specification**

Safety surfice area Around 4.92 ft radius Net weight 136.69 lbs Material S235 Critic fall height 53.94" Color options

### Warranty

Structure
Steel
Paint
Plastic
Rubber
Moving parts  Detailed information in the warranty document

25 years 15 years 2 years 5-10 years 1-3 years 2 years

# Material specification





The element is made of high quality S235 steel, which has been cleaned via sandblasting. A corrosion resistant powder coating finish is then applied. Also available with galvanized surface for even greater protection and longevity!



The clamp system allows for easy assembly and extreme stability.



The seats and backrests are made of strong HDPE material. Which is fully heat, moisture and UV resistant.



The connecting ments are fastened with vandal-proof stainless steel screws and nuts.



The ends of the bars and posts are sealed with injection-moulded plastic caps.















