


hydraBOND®

New!

500
Series

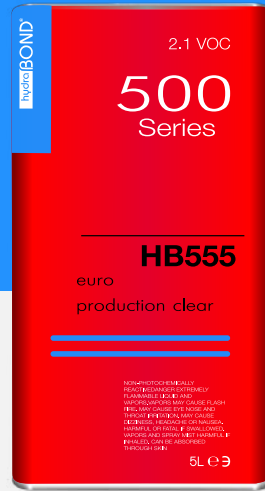

Introducing the New!

HydraBOND® HB555 Low VOC Clearcoat and Hardeners: Cost-Effective Excellence in Automotive Finishing

Embrace the unparalleled gloss, durability, and UV protection offered by the HydraBOND® 500 Series. Whether you're a professional seeking the highest quality finishes or an enthusiast aiming for a top-tier look for your project, our HB555 Low VOC Clearcoat and tailored hardeners ensure your results not only meet but exceed expectations.

The Economical Choice for Flawless Finishes

In the realm of automotive refinishing, professionals and enthusiasts alike seek products that don't just meet the highest standards of quality and durability but also offer economic efficiency. HydraBOND® introduces the HB555 Low VOC Clearcoat paired with a versatile range of Hardeners, presenting an unparalleled solution that balances cost-effectiveness with superior finish performance.

Designed for those who prioritize both the environment and their budget, the HB555 Low VOC Clearcoat stands out as a cost-effective option without compromising on quality. Its innovative formulation ensures a brilliant gloss and exceptional durability, making it the ideal foundation for stunning automotive finishes.

Scan the QR Code
to Download TDS
for instructions on
VOC regulated areas



HydraBOND® 500 Series

Unmatched Quality for Automotive Refinishing

HB555 Low VOC Clearcoat (5L): The Foundation of Flawless Finishes

- Achieve Outstanding Gloss and Protection**
- UPC: 767787958770
- EAN: 0767787958770
- Part Number: HB555
- Packaging: Packaged 4 units per case, with a total weight of 51 lbs.
- Dimensions are 13¼"x8¼"x12¼".



Customize Your Finish with Our Premium Hardeners

HB556 Low VOC Fast Hardener (2.5L) Engineered for Rapid Projects

- Speed Up Your Workflow**
- UPC: 767787958787
- EAN: 0767787958787
- Part Number: HB556
- Packaging: Comes in 4 units per case, weighing 26 lb
- Dimensions of 17¼"x7"x7¼"



HB557 Low VOC Medium Hardener (2.5L) Designed for Balanced Drying

- Versatility for Various Project Demands**
- UPC: 767787958794
- EAN: 0767787958794
- Part Number: HB557
- Packaging: Each case contains 4 units, with a weight of 28 lbs
- Dimensions of 17¼"x7"x7¼"



HB558 Low VOC Slow Hardener (2.5L) Perfect for Precision Finishing

- Extend Your Work Time for Detailed Jobs
- UPC: 767787958800
- EAN: 0767787958800
- Part Number: HB558
- Packaging: 4 units per case, total weight of 29 lbs,
- Dimensions are 17¼"x7"x7¼"



Ensure Flawless Application with 500 Series: A Detailed Procedure

To achieve exceptional results, follow our detailed mixing and application guide. The 500 Series is designed to provide a premium finish efficiently and effectively.

Mixing & Application Instructions for HB555 Low VOC Clearcoat with Hardeners

1. Mixing Ratio: Adhere to a precise 4:1 mix ratio of HB555 Clearcoat to your chosen Hardener, ensuring optimal consistency and finish quality.
2. Application Process: Apply 2-3 medium wet coats, allowing 7-10 minutes flash time between each coat to achieve the desired gloss and leveling.
3. Pot Life: The mixture remains viable for 2 hours at 68°F (20°C), offering ample time for adjustments.
4. Recommended Spray Gun Setup: For HVLP Gravity Feed, use a 1.3-1.5mm tip and needle. The same setup is advised for Conventional spray guns.

Detailed Drying Times & Post-Application Guidelines

- Dust Free Time: 30 minutes at 68°F (20°C)
- Tack Free Time: Achieved within 15-20 minutes
- Sand & Polish Ready: Between 12-24 hours, with accelerated curing options available.

Optimal Coverage & Storage Solutions

- Coverage Efficiency: Enjoy coverage of 388.49 square feet per gallon at a 50-micron film thickness.
- Storage Recommendations: Store in a cool, dry place. Clearcoat has a shelf life of one year, Hardener six months.

Safety Practices & Environmental Compliance

- Employ proper safety gear and ensure good ventilation during application. Our low VOC formula supports a healthier work environment.

Packaging Details for Each Component

- Clearcoat and Hardeners are carefully packaged, with detailed weights and dimensions provided above to assist in inventory and storage planning.

For unparalleled finishes and quality, HydraBOND® 500 Series is your premier choice. Visit our website or contact our customer service for further details and support.

HydraBOND® - Where Innovation Meets Environmental Responsibility and Affordability.

Features and Benefits:

Optimized for Performance: Achieve high gloss, durability, and UV protection with our specially formulated clearcoats and hardeners.

Environmental Responsibility: Our Low VOC formulas support healthier work environments and comply with industry regulations.

Versatility: Suitable for a wide range of automotive painting projects, from cars to trucks.

Ease of Use: User-friendly products that are easy to mix and apply, ensuring professional results even for beginners.

Economical: Designed to provide exceptional value without compromising on quality or performance.

For detailed information on application guidelines and additional product features, visit our website or contact our support team. With the 500 Series Clearcoat and Hardeners, you're not just painting; you're elevating the standard of your finish.

These specifications provide a comprehensive overview of the hydraBOND® 500 Series Low VOC 2K Urethane Primer and its associated hardeners, including details on packaging, VOC content, and application guidelines. For more information: Please read the TDS and SDS

*****Note there is a minimum*** Please contact your distributor for Special Orders!**



Scan the QR Code
to Download TDS
for instructions on
VOC regulated areas