



# Achrom

A CALIBRE SCIENTIFIC COMPANY

YOUR LABSTORE STARTS HERE



#2

# LABORTOPS

VALID UNTIL 30.06.2024

General Laboratory Supply	2 - 4	pH- and Conductivity Measurement	18 - 19
Cleanroom	5	Sampling / Sample Preparation	20 - 21
Personal Protection	6 - 7	Tempering	22 - 23
Waste Disposal	8	Ultrasonic	24
Filtration	9	Laboratory Burner	25
Chromatography	10	Time and Environmental Measurement	26
Dispensing and Titration	11	Temperature Measurement	27
Liquid Handling	12 - 13	Stirring, Shaking and Mixing	28 - 29
Genomics	14	Weighing	30
Microscopy	15	Centrifugation	31
Spectroscopy	16 - 17	Vacuum Technology	32

LLG-Draining racks, PE-coated wire



Wall or bench mounting for 50 reagent bottles and 5 flasks. With drip channels and plastic-covered feet. Dimensions (L x W x H): 360 x 130 x 650 mm.

**-70%**

Type	PK	Cat. No.	Price	Now
LLG-Draining racks	1	6.281 619	EUR <del>96,10</del>	EUR <b>28,83</b>

LLG-Laboratory Power Failure Detector



- Immediate visual and acoustic alarm
- Alarm can sound for short power outages or larger periods of at least 12 hours (can be switched off manually).
- Plug safety cover offers protection against accidental disconnection of the plug
- Maximum total power of connected devices. 3500W power supply 230 V 50 Hz
- Suitable for European plugs
- Max. Rating 16 A
- With built-in battery

**Scope of supply:**  
1 x power failure detector  
2 x plug safety caps  
2 x screws



**-60%**

Type	PK	Cat. No.	Price	Now
LLG-Laboratory Power Failure Detector	1	6.255 819	EUR <del>68,40</del>	EUR <b>27,36</b>

LLG-All-round Cutter with rubber grip



Easy and comfortable handling is ensured by the ergonomically shaped grip. The break-off device is integrated into the grip section of the ABS plastic casing. Comes with a metal blade guide and auto-lock system. Both cutters will be delivered on blister cards including 2 spare cutting blades.

**-75%**

Type	PK	Cat. No.	Price	Now
LLG-All-round Cutter 18 mm	1	9.160 656	EUR <del>12,10</del>	EUR <b>3,03</b>

Tally counter, digital



Effective and practical counter with a sturdy, chrome-finished housing. Ideal for counting blood cells, bacterial colonies, liquid drops or any other repetitive step with a tally level up to 9999. TALLY COUNTER - "handy" Features a quick-reset knob, lens window for easy reading, and a finger ring for a secure grip.

**-80%**

Description	PK	Cat. No.	Price	Now
Tally counter	1	6.267 411	EUR <del>30,70</del>	EUR <b>6,14</b>

Microtube racks, PP, 96-Well



Autoclavable. Polypropylene rack has 96 wells for 0.5 ml microcentrifuge tubes on one side and 96 wells for 1.5 ml to 2.0 ml microcentrifuge tubes on the other side. Wells are arranged in a standard 8 x 12 array. The handy lid snaps into place using tabs on each end of the rack. Dimensions (L x W x H): 246 x 121 x 50 mm.



**-75%**

Colour	PK	Cat. No.	Price	Now
Blue, green, pink, yellow and orange	5	9.193 982	EUR <del>131,20</del>	EUR <b>32,80</b>



- New Assortment
- For Transportation and Storage



LLG-Carboy, PP, with handles



LLG-Carboy with screw cap made of PP for storing and dispensing media, solutions and other liquids. The practical shoulder handle facilitates transport and pouring.

- With graduation
- Autoclavable
- Stable bottom with curved corners
- Leak-proof

**-60%**

Capacity	Dimensions (dia. x H)	Neck diam.	Cap size	PK	Cat. No.	Price	Now
l	mm	mm				EUR	EUR
10	249 x 376	65	83	1	4.692.534	<del>58,00</del>	<b>23,20</b>
20	285 x 518	65	83	1	4.692.535	<del>97,00</del>	<b>38,80</b>
50	376 x 665	65	83	1	4.692.536	<del>173,00</del>	<b>69,20</b>

LLG-Wide mouth bottle, HDPE, rectangular



- Space-saving, rectangular wide mouth bottle with sturdy, uniform wall construction. Ideal for easy filling, storage or transport of liquids, powders and granulates.

- With screw cap
- Exceptional chemical resistance to most acids, bases and alcohols
- Autoclavable
- Leak-proof

**-50%**

Capacity	Dimensions (W x D x H)	Cap size	Neck diam. int.	PK	Cat. No.	Price	Now
ml	mm		mm			EUR	EUR
125	39.4 x 60.0 x 97.3	28	21.1	12	4.692.551	<del>19,00</del>	<b>9,50</b>
250	54.0 x 75.5 x 112.0	38	28.8	12	4.692.552	<del>26,00</del>	<b>13,00</b>
500	64.7 x 100.0 x 140.6	48	38.0	12	4.692.553	<del>40,00</del>	<b>20,00</b>
1000	70.2 x 125.2 x 175.0	53	43.7	6	4.692.554	<del>46,00</del>	<b>23,00</b>

LLG-Wide mouth bottle, PP



Ideal for easy filling, storage or transport of liquids, powders and granulates.

- With a screw cap made of PP
- Autoclavable
- Bottom with curved corners
- Leak-proof

**-65%**

Capacity	Diam.	Neck diam. int.	Height	PK	Cat. No.	Price	Now
ml	mm	mm	mm			EUR	EUR
30	34.8	21.4	59.8	12	4.692.538	<del>17,00</del>	<b>5,95</b>
60	39.7	21.3	82.5	12	4.692.539	<del>19,00</del>	<b>6,65</b>
125	50.6	28.6	95.5	12	4.692.540	<del>29,00</del>	<b>10,15</b>
250	61.6	33.0	127.4	12	4.692.541	<del>37,00</del>	<b>12,95</b>
500	73.1	43.8	164.0	12	4.692.542	<del>61,00</del>	<b>21,35</b>
1000	92.7	53.3	195.0	6	4.692.543	<del>40,00</del>	<b>14,00</b>

LLG-Wide mouth bottle, HDPE, round



Ideal for easy filling, storage or transport of liquids, powders and granulates.

- With a screw cap made of PP
- Excellent chemical resistance
- Autoclavable
- Bottom with curved corners
- Leak-proof

**-60%**

Capacity	Diam.	Neck diam. int.	Height	PK	Cat. No.	Price	Now
ml	mm	mm	mm			EUR	EUR
30	34.6	21.0	59.1	12	4.692.544	<del>16,00</del>	<b>6,40</b>
60	39.2	21.1	81.5	12	4.692.545	<del>19,00</del>	<b>7,60</b>
125	50.3	28.3	94.7	12	4.692.546	<del>25,00</del>	<b>10,00</b>
250	60.9	32.8	127.0	12	4.692.547	<del>31,00</del>	<b>12,40</b>
500	72.7	44.0	164.0	12	4.692.548	<del>50,00</del>	<b>20,00</b>
1000	92.0	51.9	195.0	6	4.692.549	<del>34,00</del>	<b>13,60</b>
2000	119.0	90.8	236.0	1	4.692.550	<del>49,00</del>	<b>7,60</b>

Label printer DYMO® LabelWriter™ 550



- High Print Resolution
- Including Labels



Compact label printer with direct thermal printing technology for fast and efficient label printing without additional ink cartridges or toner cartridges. The latest label recognition technology provides information on the size, type, and colour of the loaded labels and automatically displays the number of remaining labels.

- Print resolution of up to 300 x 300 dpi
- Customised label design with DYMO® Connect for Desktop software
- Printing precise label quantities without cumbersome label sheets
- Automatic energy-saving mode
- PC connection via USB interface

**Scope of supply:** Label printer, 1 x label starter roll (28 x 89 mm), power adapter, power cable, USB cable, quick start guide.

**Specifications**

Max. label width:	59 mm
Print speed:	62 labels/min.
Dimensions (WxDxH):	127 x 187 x 136 mm
Weight:	640 g
Power supply:	100 ... 240 V, 50/60 Hz, 24 V

Type	PK	Cat. No.	Price	Now
			EUR	EUR
DYMO® LabelWriter™ 550	1	4.687 585	<del>128,00</del>	<b>82,80</b>

**-40%**

Deep freeze labels TOUGH-SPOTS®



Adhesive dots for 0.5/1.5/2.0 ml reaction tubes. Temperature resistance from -196 °C to 80 °C. Tear-resistant, can be written on with almost any marker.

Diam.	Colour	For vessels	PK	Cat. No.	Price	Now
mm					EUR	EUR
9.5	White	0.5 ml Tubes	1000	9.040 711	<del>58,60</del>	<b>26,37</b>
9.5	Blue	0.5 ml Tubes	1000	9.040 712	<del>58,60</del>	<b>26,37</b>
9.5	Green	0.5 ml Tubes	1000	9.040 713	<del>58,60</del>	<b>26,37</b>
9.5	Red	0.5 ml Tubes	1000	9.040 714	<del>58,60</del>	<b>26,37</b>
9.5	Yellow	0.5 ml Tubes	1000	9.040 715	<del>58,60</del>	<b>26,37</b>
13.0	White	1.5/2.0 ml Tubes	1000	9.040 716	<del>58,60</del>	<b>26,37</b>
13.0	Blue	1.5/2.0 ml Tubes	1000	9.040 717	<del>58,60</del>	<b>26,37</b>
13.0	Green	1.5/2.0 ml Tubes	1000	9.040 718	<del>58,60</del>	<b>26,37</b>
13.0	Red	1.5/2.0 ml Tubes	1000	9.040 719	<del>58,60</del>	<b>26,37</b>
13.0	Yellow	1.5/2.0 ml Tubes	1000	9.040 720	<del>58,60</del>	<b>26,37</b>
13.0	Lavendel	1.5/2.0 ml Tubes	1000	6.287 530	<del>58,60</del>	<b>26,37</b>

**-55%**

Sample transport box DuraPorter® XL



High-capacity container for the safe and convenient transport of laboratory samples, instruments and valuable items. Specially designed to meet the stringent demands of clinical and research laboratories.

- Also meets transport requirements for secondary packaging as per UN3373
- Dual latches with security tag feature to protect providing tamper-evidence
- With silicone seal for airtight and watertight closure
- Different inserts for a variety of tube sizes are available separately

**Scope of supply:** Sample transport box, insert MultiTube Rack.

**Specifications**

Dimensions (WxDxH):	406 x 413 x 178 mm
With lid:	Yes
Stackable:	No

Colour	PK	Cat. No.	Price	Now
			EUR	EUR
Blue	1	4.692 499	<del>210,00</del>	<b>147,00</b>
Red	1	4.692 500	<del>210,00</del>	<b>147,00</b>
Yellow	1	4.692 501	<del>210,00</del>	<b>147,00</b>

**-30%**

Inserts for sample transport box DuraPorter XL



Suitable for a variety of reaction tubes and blood collection tubes.

- Separately usable
- The lid can be easily and fully removed
- Sufficient depth for filling with ice

For tubes diam.	For tubes ml	Array	PK	Cat. No.	Price	Now
mm	ml				EUR	EUR
13	3.5 ... 7.5	168	3	4.692 503	<del>70,00</del>	<b>52,50</b>
18	10 ... 15	100	3	4.692 502	<del>70,00</del>	<b>52,50</b>
13 ... 30	3.5 ... 50	-	3	4.692 504	<del>70,00</del>	<b>52,50</b>

**-25%**



## Cleanroom Gloves AdvanTech529, nitrile

EN ISO 374-1 Type B EN ISO 374-5 EN 421



Enhanced mechanical resistance for short-term operations. The manufacturing process guarantees a very low level of contaminants: particle rates, powder-free, non-volatile residue, extractable content; compliant with ISO 5 class (Class M3.5 for International systems). 100% nitrile formula enables anti-static properties. Offers protection against accidental chemical splashes. Recommended for people who are sensitive to the proteins in natural latex. Thickness: 0.1 mm. Packaging: 100 gloves/bag

- **Cat. III**  
According to EN ISO 374-1:2016/Type B, EN ISO 374-5:2016, EN 421

Size	Length mm	PK	Cat. No.	-55%	
				Price EUR	Now EUR
6	300	100	6.270 501	<del>54,40</del>	<b>24,48</b>
7	300	100	6.270 502	<del>54,40</del>	<b>24,48</b>
8	300	100	6.270 503	<del>54,40</del>	<b>24,48</b>
9	300	100	6.270 504	<del>54,40</del>	<b>24,48</b>
10	300	100	6.270 505	<del>54,40</del>	<b>24,48</b>

## Cleanroom Wipes Sontara® MicroPure, polyester/cellulose



Sontara® MicroPure nonwovens (cellulose/polyester) have been specially developed for use in cleanrooms. The nonwoven combines the absorbency of natural fibres with the purity and strength of a synthetic material. No binding agents or chemicals are used in its manufacture. Due to its cellulose content, the nonwoven material has a high absorption capacity for particles and liquids.

Type	Dimensions mm	Cleanroom Class ISO	PK	Cat. No.	-50%	
					Price EUR	Now EUR
100	305 x 305	5 + 6	150	9.390 185	<del>50,10</del>	<b>25,05</b>
100	224 x 224	5 + 6	300	9.390 186	<del>49,70</del>	<b>24,85</b>
AP	305 x 305	6 - 9	150	9.390 187	<del>51,50</del>	<b>25,75</b>
AP	224 x 224	6 - 9	300	9.390 188	<del>48,90</del>	<b>24,45</b>
SV	305 x 305	7 - 9	250	9.390 189	<del>53,30</del>	<b>26,65</b>
SV	224 x 224	7 - 9	500	9.390 190	<del>65,60</del>	<b>32,80</b>

## Panoramic Eyeshield 619



Panoramic Eyeshield is designed for use in rooms with controlled contaminations (sterile and clean rooms) or aseptic conditions. Its soft structure supports multiple repetitive steam cycles and gamma or beta sterilization without perceptible changes.

- Sterilizable through autoclave with steam
- New elastic strap in antistatic silicone
- Innovative quick elastic band adjustment system
- With direct ventilation

Lens	PK	Cat. No.	-65%	
			Price EUR	Now EUR
clear / 2C-1.2 U 1 B CE	1	6.286 800	<del>78,10</del>	<b>27,34</b>

## Sticky Swabs, ESD



Sticky Swabs - ESD-safe cleaning stems: Lint-free sticky swabs are specially used and designed for a high-degree dust-free environment (class 10-100). Anti-static treatment can safely dissipate electrostatic charge. Sticky swabs are applicable for manufacturing and assembling static-sensitive products. Property: ESD safe, effective absorption, soft and good tenacity, excellent agility, non-volatile, environment-friendly, no thrill odour.

Material:  
Tip: PVAC (Polyvinyl acetate), Ethyl acetate - Isopentyl acetate  
Handle: PVC

Description	Cleanroom Class ISO	PK	Cat. No.	-30%	
				Price EUR	Now EUR
1 mm Ø	1-2	25	6.272 061	<del>39,20</del>	<b>27,44</b>
2 mm Ø	1-2	25	6.272 062	<del>39,20</del>	<b>27,44</b>
3 mm Ø	1-2	25	6.272 063	<del>39,20</del>	<b>27,44</b>
Kit, box of 75 swabs mixed (25 x 1mm, 25 x 2 mm, 25 x 3 mm)	1-2	1	6.272 064	<del>87,20</del>	<b>61,04</b>

LLG-Laboratory coat, 100% cotton



- Very sturdy material, excellent wearing comfort
- Snap fasteners (press buttons); easy and quick to open
- With fold-down collar
- One outside breast pocket and two side pockets
- Washable up to 60 °C
- Ladies coat with stitched-down back belt

Material: 100% cotton  
 Colour: White  
 Weight: 220 g/m<sup>2</sup>

**-65%**

Description	Size	PK	Cat. No.	Price	Now
				EUR	EUR
Ladies coat	36/38	1	9.414 342	<del>38,40</del>	<b>13,44</b>
Ladies coat	40/42	1	9.414 343	<del>38,40</del>	<b>13,44</b>
Ladies coat	44/46	1	9.414 344	<del>38,40</del>	<b>13,44</b>
Mens coat	44/46	1	9.414 345	<del>38,40</del>	<b>13,44</b>
Mens coat	48	1	9.414 346	<del>38,40</del>	<b>13,44</b>
Mens coat	50	1	9.414 347	<del>38,40</del>	<b>13,44</b>
Mens coat	52	1	9.414 348	<del>38,40</del>	<b>13,44</b>
Mens coat	54	1	9.414 349	<del>38,40</del>	<b>13,44</b>
Mens coat	56	1	9.414 350	<del>42,90</del>	<b>15,02</b>

LLG-Safety Eyeshields *basic* +



- CE approved to EN 166 and EN 170
- Economic Safety Eyeshields are ideal for essential protection
- 180° field of vision
- Frame made of tested hypo-allergenic material
- 100% UV protection (up to 380 nm)
- Especially light
- Weight: 23 g

**-60%**

Lens	PK	Cat. No.	Price	Now
			EUR	EUR
Clear, uncoated, 2-1.2 U 1 F CE	10	6.290 868	<del>46,40</del>	<b>18,56</b>

Laboratory coat Kimtech™ A7 P+, PP



- Certified PPE Cat III acc. to directive 89/686/EEC
- Type 6 limited chemical splash protection
- Micro-organism protection tested
- EN1149-1:1995 Antistatic clothing
- High-performance chemical-resistant fabric
- Low lint fabric, Helmke Drum Category II
- 99% particle and bacterial filtration efficiency
- Individually packed, 15 p. in an outer package for ISO 7 Grade C areas
- Silicon-Free
- Abrasion-resistant film-coated polypropylene
- Mandarin collar
- Elastic cuff, thumb-loops and extra-length arms
- High strength triple stitched seams

**-70%**

Size	PK	Cat. No.	Price	Now
			EUR	EUR
S	15	4.653 906	<del>191,50</del>	<b>57,45</b>
M	15	4.653 907	<del>191,50</del>	<b>57,45</b>
L	15	4.653 908	<del>191,50</del>	<b>57,45</b>
XL	15	4.653 909	<del>191,50</del>	<b>57,45</b>
XXL	15	4.653 910	<del>191,50</del>	<b>57,45</b>

Premium Respirators 8825+ and 8835+, Moulded Masks



Respirators Premium 8825+ and 8835+ moulded masks offer the new patented 3-dimensional face seal with integrated nose profile of 3M Premium+ Series, the convenience of a disposable mask, as well as the concept of tailor-made face seal of reusable respirator masks. The face seal of the masks 8825+ and 8835+ improves the sealing fit. The profile of the respirator directs the air escaping through the filter medium away from the face. The upward air flow is minimized as much as possible, reducing the fogging of safety glasses.

Authorization: EU construction test  
 Testing standards: EN 149:2001

**-55%**

Type	Protection-level	Usage restrictions	PK	Cat. No.	Price	Now
					EUR	EUR
8825+	FFP2 RD	12 x TLV	5	6.284 248	<del>72,50</del>	<b>32,63</b>
8835+	FFP3 RD	50 x TLV	5	6.284 249	<del>83,60</del>	<b>37,62</b>


### Safety shower combination ClassicLine, free-standing



#### Combined Body and Eye Shower

ClassicLine safety shower combination, with safety eye shower optionally with bowl, lid and face wash unit, floor mounted.

- Including upper and lower 1 1/4-inch IG water connection for installation in circulation pipes, 1 1/4-inch stainless steel plug
- Stand with 4-fixing holes made of stainless steel, chemical-resistant green powder-coated, diameter 200 mm.
- A 3/4-inch brass ball valve, with quick-fit system and tie-rod actuation, DIN-DVGW tested and approved
- Integrated ClassicLine safety eye shower with two 45° shower heads, chemical-resistant green powder-coated, 3/4-inch tap connection
- Following BGI/GUV-I 850-0, DIN 1988 and DIN EN 1717
- In accordance with ANSI Z358.1-2014, DIN EN 15154-1:2006, DIN EN 15154-2:2006 and DIN EN 15154-5:2019
- DIN-DVGW tested and approved

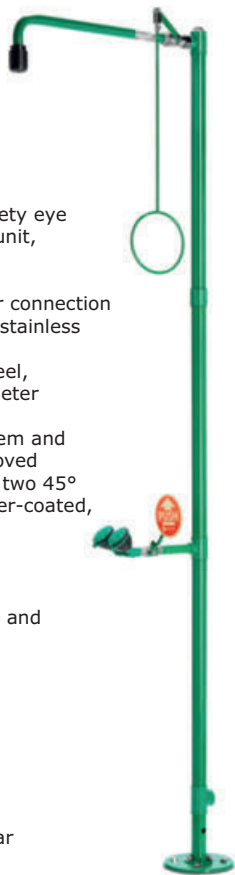

**-40%**

#### Specifications

Total height:	2330 mm
Projection:	630 mm
Installation height for eye shower:	900 mm
Operating pressure:	1.5 to 3 bar
Flow rate body shower:	50 l/min
Water inlet:	1 1/4" female
Flow rate eye shower:	14 litre/minute

Description	PK	Cat. No.	Price	Now
			EUR	EUR
without bowl	1	6.239 809	<del>1.116,00</del>	<b>669,60</b>
with bowl	1	6.239 810	<del>1.328,00</del>	<b>796,80</b>
with face wash unit, bowl and lid	1	6.317 045	<del>1.652,00</del>	<b>991,20</b>

### Safety Shower Test Cart, Tank Capacity 30 litres, Mobile



With the safety shower test cart, you can keep the monthly required functional test simple and easy.

- mobile collecting tray equipped with 4 roles made of black plastics
- two integrated grip recesses
- one drain screw
- total height 2100 mm
- tank capacity 30 litre
- total weight 7 kg
- detachable in 3 parts for simple storage

**-50%**

Description	PK	Cat. No.	Price	Now
			EUR	EUR
Safety shower test cart	1	7.656 739	<del>270,00</del>	<b>135,00</b>

### LLG-Disposable Gloves, standard long, Nitrile, Powder-Free

EN ISO 374-1 Type B EN ISO 374-5 EN 421 EN 420



Disposable protective gloves in nitrile with enhanced comfort during use and provide greater chemical protection - the standard glove for the laboratory.



- **For forearm protection, 300 mm length**
- Very comfortable to wear
- For single use in applications with an increased need for safety when handling chemicals
- Free from phthalates/softeners and allergenic latex proteins
- Particularly skin-friendly
- Colour blue - suitable for areas subject to HACCP standards
- **Cat. III. AQL 1.5.**

According to EN ISO 374-1:2016/Type B, EN ISO 374-5:2016, EN 421, and EN 420 are suitable for food handling.

You can find the appropriate compatibility list on [www.llg-labware.com](http://www.llg-labware.com) in the Downloads section.

Glove shape:	flat with rolled edge (ambidextrous)
Material:	nitrile
Colour:	blue
Outside:	textured
Inside:	powder-free halogenated
Size/total length:	S, M, L, XL/med. 300 mm
Thickness (measured in double layer):	<b>0.16 mm</b>

**-70%**

Size	PK	Cat. No.	Price	Now
			EUR	EUR
S	100	6.270 366	<del>25,90</del>	<b>7,77</b>
M	100	6.270 367	<del>25,90</del>	<b>7,77</b>
L	100	6.270 368	<del>25,90</del>	<b>7,77</b>
XL	90	6.270 369	<del>25,90</del>	<b>7,77</b>

### Glove Box Pure, PMMA



Aluminium frame with acrylic glass (PMMA) panes, polyethylene base. With a pair of size 9 gloves made of UV-resistant EPDM. Integrated UV lamp with lifetime monitoring in the top for surface and air disinfection in the work area, lamp can be replaced.

#### Specifications

Capacity Box:	290 l
Internal Dimensions Box (W x D x H):	850 x 540 x 650 mm
Max. Load Box:	40 kg
Inlet openings:	Ø 190 mm
Working Temperature Range:	-20 - 70 °C
Power supply:	240 V, 50/60 Hz

**-25%**

Type	External dimensions (W x D x H) mm	Weight kg	PK	Cat. No.	Price	Now
					EUR	EUR
Pure	1210 x 600 x 700	22	1	6.312 313	<del>7.725,10</del>	<b>5.793,83</b>

## LLG-Autoclavable bags, PP



Produced from durable PP film with a broad seam at the bottom. For the disposal of contaminated labware. When autoclaving, the neck of the bag must be left open. Film thickness: 50 µm.

**-60%**

Description	Dimensions (D x W)	Auto-clavable at	PK	Cat. No.	Price	Now
					EUR	EUR
standard	400 x 780	134 °C	250	9.404 221	<del>106,40</del>	<b>42,56</b>
standard	500 x 780	134 °C	250	9.404 222	<del>128,30</del>	<b>51,32</b>
standard	600 x 800	134 °C	250	9.404 223	<del>143,00</del>	<b>57,56</b>
standard	600 x 780	134 °C	100	9.404 103	<del>61,00</del>	<b>24,40</b>
standard	700 x 1100	134 °C	250	9.404 224	<del>254,00</del>	<b>101,60</b>
standard	700 x 1100	134 °C	75	9.404 105	<del>78,00</del>	<b>31,56</b>
highly transparent	200 x 300	121 °C	100	9.404 020	<del>15,60</del>	<b>6,24</b>
highly transparent	400 x 780	121 °C	500	9.404 101	<del>202,00</del>	<b>116,80</b>
highly transparent	600 x 800	121 °C	500	9.404 102	<del>362,00</del>	<b>144,80</b>
highly transparent	700 x 1100	121 °C	350	9.404 104	<del>390,00</del>	<b>156,00</b>

## LLG-Autoclavable Bags, PP, with Biohazard printing



Autoclavable bags imprinted with biohazard labelling. Made of polypropylene. Strong side seams for securely holding items. Front write-on panel.

**-55%**

Dimensions (D x W)	Colour	Auto-clavable at	Thickness	PK	Cat. No.	Price	Now
						EUR	EUR
mm			µm			EUR	EUR
310 x 660	transparent	121 °C	45	50	9.404 050	<del>36,00</del>	<b>16,20</b>
415 x 600	transparent	121 °C	45	50	9.404 051	<del>43,50</del>	<b>19,58</b>
610 x 810	transparent	121 °C	45	50	9.404 052	<del>73,90</del>	<b>33,26</b>
500 x 600	red*	134 °C	50	200	6.285 813	<del>125,00</del>	<b>56,25</b>
630 x 890	red*	134 °C	50	200	6.285 814	<del>234,20</del>	<b>105,39</b>
910 x 1150	red*	134 °C	50	100	6.285 815	<del>216,30</del>	<b>97,34</b>

\* with sterilisation indicator

## Holder for Waste Sacks



- White
- Steel wire
- Epoxy resin coating
- With rubber feets

**-15%**

Description	Int. diam.	Height	PK	Cat. No.	Price	Now
					EUR	EUR
Stand	mm	mm	1	7.060 716	<del>8,30</del>	<b>7,06</b>

## Safety and space-saving canisters, HDPE, electrically conductive



**-35%**

Type	Nom. capacity L	PK	Cat. No.	Price	Now
				EUR	EUR
Space saver canisters	5	1	4.687 106	<del>90,00</del>	<b>64,35</b>
Safety canister*	10	1	4.005 602	<del>60,40</del>	<b>39,26</b>
Safety canister*	20	1	4.005 671	<del>82,40</del>	<b>53,56</b>

\* with UN approval



Qualitative filter papers MN 614, round filters



**Medium-fast.**

- Embossed
- For determination of sugar content, colour, essential oils and emulsions
- Weight: 75 g/m<sup>2</sup>
- Thickness: 0.25 mm

**-30%**

Diam.	Filtration time	PK	Cat. No.	Price	Now
mm	secs.			EUR	EUR
55	20	100	9.047 400	<del>5,90</del>	<b>4,13</b>
70	20	100	9.047 401	<del>5,90</del>	<b>4,13</b>
90	20	100	9.047 402	<del>7,30</del>	<b>5,11</b>
110	20	100	9.047 403	<del>9,90</del>	<b>6,93</b>
125	20	100	9.047 404	<del>10,60</del>	<b>7,42</b>
150	20	100	9.047 405	<del>14,80</del>	<b>10,36</b>
185	20	100	9.047 406	<del>20,10</del>	<b>14,07</b>
240	20	100	9.047 407	<del>31,90</del>	<b>22,33</b>
270	20	100	9.047 408	<del>38,80</del>	<b>27,16</b>
320	20	100	9.047 409	<del>52,40</del>	<b>36,68</b>
385	20	100	9.047 410	<del>78,60</del>	<b>55,02</b>
500	20	100	9.047 411	<del>120,00</del>	<b>97,30</b>

Filter paper, qualitative, type MN 615 1/4, filter circles



Medium fast filtration, smooth.

For fat determinations, free from lipids and resins. Ether soluble residue <0.1 mg for diam. 270 mm filters.

**-40%**

Diam.	Filtration time	Thickness	PK	Cat. No.	Price	Now
mm	secs.	mm			EUR	EUR
110	22	0.16	100	9.048 503	<del>28,10</del>	<b>16,86</b>
125	22	0.16	100	9.048 504	<del>28,10</del>	<b>16,86</b>
150	22	0.16	100	9.048 505	<del>28,10</del>	<b>16,86</b>
185	22	0.16	100	9.048 506	<del>31,00</del>	<b>18,60</b>
240	22	0.16	100	9.048 507	<del>45,00</del>	<b>27,54</b>
270	22	0.16	100	9.048 508	<del>53,20</del>	<b>31,92</b>
320	22	0.16	100	9.048 509	<del>65,40</del>	<b>39,24</b>

LLG-Extraction thimbles, cellulose



Neutral and fat-free. With excellent retention capacity.

**-70%**

Diam.	Length	PK	Cat. No.	Price	Now
mm	mm			EUR	EUR
20	80	25	9.045 701	<del>84,90</del>	<b>25,47</b>
22	80	25	9.045 700	<del>73,40</del>	<b>22,02</b>
25	100	25	9.045 709	<del>76,30</del>	<b>22,89</b>
26	60	25	9.045 707	<del>75,60</del>	<b>22,68</b>
28	80	25	9.045 711	<del>75,50</del>	<b>22,65</b>
30	80	25	9.045 708	<del>77,00</del>	<b>23,10</b>
33	80	25	9.045 702	<del>79,90</del>	<b>23,97</b>
33	94	25	9.045 703	<del>88,00</del>	<b>26,40</b>
33	100	25	9.045 704	<del>83,20</del>	<b>24,96</b>
33	118	25	9.045 706	<del>87,30</del>	<b>26,19</b>
43	123	25	9.045 710	<del>138,30</del>	<b>41,49</b>

LLG-Qualitative filter paper, circles



Made from 100% cellulose. Ash content 0.06%. Filtration speed according to DIN 53137. Capacity of separation according to DIN 53135.

**Medium fast.**

- For fast filtration with fine particles

**-50%**

Diam.	Filtration time	Pore size	PK	Cat. No.	Price	Now
mm	secs.	µm			EUR	EUR
42.5	88	5 - 13	100	9.045 800	<del>5,90</del>	<b>2,95</b>
47.0	88	5 - 13	100	9.045 801	<del>6,00</del>	<b>3,00</b>
55.0	88	5 - 13	100	9.045 802	<del>6,30</del>	<b>3,15</b>
70.0	88	5 - 13	100	9.045 803	<del>6,60</del>	<b>3,30</b>
90.0	88	5 - 13	100	9.045 804	<del>7,40</del>	<b>3,70</b>
110.0	88	5 - 13	100	9.045 805	<del>8,30</del>	<b>4,15</b>
125.0	88	5 - 13	100	9.045 806	<del>9,20</del>	<b>4,65</b>
150.0	88	5 - 13	100	9.045 807	<del>11,80</del>	<b>5,90</b>
185.0	88	5 - 13	100	9.045 808	<del>14,70</del>	<b>7,35</b>
240.0	88	5 - 13	100	9.045 809	<del>21,10</del>	<b>10,55</b>

LLG-Qualitative filter paper, sheets



**Medium fast, pore size 5 to 13µm.**

- For analytical works in laboratories

**-80%**

Dimensions	Filtration time	PK	Cat. No.	Price	Now
mm	secs.			EUR	EUR
460 x 570	88	100	9.045 810	<del>122,80</del>	<b>24,56</b>

## HPLC starter kits Generation 2.0, GL 45



HPLC Starter Kit 1

Maximum safety for HPLC solvent supply. The integrated air valve (B) blocks hazardous vapours and cleans the inflowing air (M) from dust and dirt particles.

- Complete set for one HPLC system with up to 4 solvent reservoirs
- Price advantage compared to ordering piece by piece
- Suitable for all current HPLC systems
- Use the supplied blind plugs to tighten connectors which are temporarily inactive or not in use

### Contents of the different sets:

- HPLC SafetySet 1:** 3 x SafetyCaps I (V 2.0), 1 x SafetyCap II (V 2.0), 1 x blind plug UNF 1/4" 28G, 4 x air valve
- HPLC SafetySet 2:** 4 x SafetyCaps II (V 2.0), 4 x blind plug UNF 1/4" 28G, 4 x air valve
- HPLC SafetySet 3:** 4 x SafetyCaps III (V 2.0), 8 x blind plug UNF 1/4" 28G, 12 x fitting 1.6 mm, 12 x fitting 2.3 mm, 12 x fitting 3.2 mm, 4 x air valve, 8 x insertion label

Type	PK	Cat. No.	-30%	
			Price	Now
			EUR	EUR
HPLC safety set 1	1	4.669 378	<del>259,00</del>	<b>181,30</b>
HPLC safety set 2	1	4.669 379	<del>279,00</del>	<b>195,30</b>
HPLC safety set 3	1	4.678 694	<del>299,00</del>	<b>209,30</b>

## Exhaust Filter, GL 14, PP



b.safe

Lid with integrated ventilation openings and service life indicator. The filling of activated carbon is protected by two porous membranes made of PE. This design allows for an unobstructed flow of exhaust air. Solvents are adsorbed by the activated carbon, ensuring that only filtered air streams out. Suitable for all waste caps with GL14 thread.

Type	Life time	PK	Cat. No.	-25%	
				Price	Now
				EUR	EUR
SMALL	3 months	2	6.313 839	<del>85,00</del>	<b>63,75</b>
MEDIUM	6 months	2	6.313 840	<del>141,10</del>	<b>105,83</b>
LARGE	6 months	2	6.313 841	<del>180,60</del>	<b>135,45</b>


## 2in1 KITs with Short Thread Vials ND9 (wide opening)



2in1 KITs contain 100 vials (1.5 ml) and 100 closures in a PP Box. As both components are always required at the same time, 2in1 KITs are a convenient way to obtain and store all required items for analysis. All advantages of the individual components (cleanroom packaging of the vials, replaceability of the packaging, etc.) remain unchanged. Cover type: UltraBond Short Thread Cap, blue, hole, Silicon beige/PTFE white, slit.

Description	PK	Cat. No.	-40%	
			Price	Now
			EUR	EUR
clear, labelling field	100	6.266 923	<del>62,70</del>	<b>37,62</b>

## LLG-Glass-Syringes, borosilicate glass

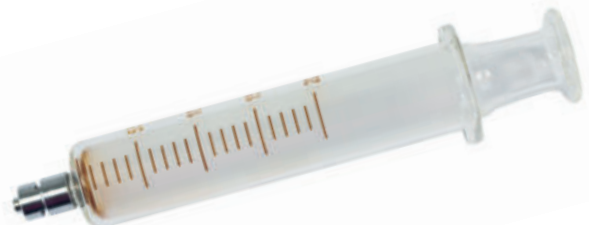


With brown graduations. Sterilisable up to 134 °C. Material Cone: Metal, Nozzle type: Luer-Lock.

Capacity	PK	Cat. No.	-50%	
			Price	Now
			EUR	EUR
1 ml	5	6.314 007	<del>39,50</del>	<b>19,75</b>
2 ml	5	6.314 008	<del>39,50</del>	<b>19,75</b>
5 ml	5	6.314 009	<del>42,50</del>	<b>21,25</b>
10 ml	5	6.314 010	<del>51,50</del>	<b>25,75</b>
20 ml	5	6.314 011	<del>77,00</del>	<b>38,50</b>
50 ml	5	6.314 012	<del>173,00</del>	<b>86,50</b>

### Bottletop dispenser LLG-uniTOPDISPENS 2



- High chemical resistance due to springless PTFE valve block and PTFE piston including chemically resistant ETP O-ring
- Glass cylinder made of borosilicate glass 3.3
- Specially developed cylinder adapter enables 360° rotation
- Five bottle adapters included (28 mm, 32 mm, 37 mm, 40 mm and 45 mm), standard thread: 30 mm
- Fully autoclavable at 121 °C, 15 psi for 10 to 15 min
- Individually calibrated according to ISO 8655 standards, each unit is supplied with an individual calibration certificate
- The corresponding compatibility list can be found at [www.llg-labware.com](http://www.llg-labware.com) in the Downloads section.
- 3-year warranty

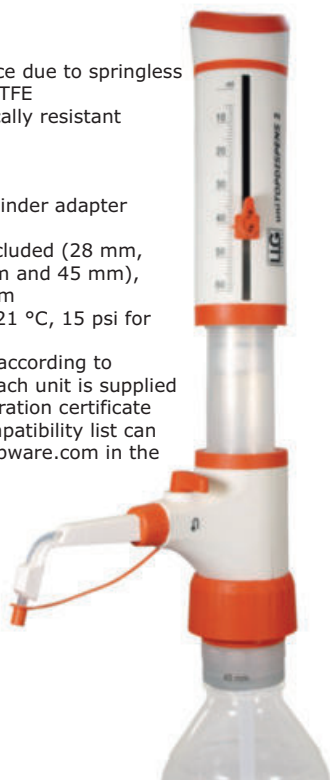

**-60%**

Volume	Graduations	Accuracy max. vol. (± R%)	Precision max. vol. (≤ CV%)	PK	Cat. No.	Price	Now
ml	ml					EUR	EUR
0.25 - 2.5	0.05	0.6	0.2	1	6.282 275	<del>245,00</del>	<b>98,00</b>
0.5 - 5	0.1	0.6	0.2	1	6.282 276	<del>245,00</del>	<b>98,00</b>
1 - 10	0.2	0.6	0.2	1	6.282 277	<del>245,00</del>	<b>98,00</b>
2.5 - 30	0.5	0.6	0.2	1	6.282 278	<del>285,00</del>	<b>114,00</b>
5 - 60	1.0	0.6	0.2	1	6.282 279	<del>285,00</del>	<b>114,00</b>
10 - 100	2.0	0.6	0.2	1	6.282 280	<del>345,00</del>	<b>138,00</b>

### Laboratory bottle, DURAN® amber glass, with screw cap and pouring ring made of PP



- UV protection up to approx. 500 nm
- ISO 4796-1
- USP standard
- Retrace code
- Autoclavable

**-55%**

Capacity	Dimensions (dia. x H)	Neck thread	PK	Cat. No.	Price	Now
ml	mm	GL			EUR	EUR
25*	36 x 74	25	1	6.262 931	<del>21,50</del>	<b>14,18</b>
50	46 x 91	32	1	7.671 498	<del>22,30</del>	<b>14,54</b>
100	56 x 105	45	1	6.262 932	<del>35,80</del>	<b>16,11</b>
250	70 x 143	45	1	9.071 961	<del>50,90</del>	<b>22,91</b>
500	86 x 181	45	1	6.259 101	<del>63,00</del>	<b>28,35</b>
1000	101 x 230	45	1	6.259 102	<del>77,10</del>	<b>34,70</b>
2000	136 x 265	45	1	6.259 797	<del>119,30</del>	<b>53,69</b>

\* With specially shaped glass rim for better pouring, thus an additional pouring ring made of plastic is not necessary.

### Bottle top burette Titrette®



- High Accuracy
- Compact Design, Lightweight and Stable
- Easy Maintenance and Cleaning

- High accuracy
- Smooth-running operation for sensitive, drop-wise titration and fast filling of the device
- No switching between fill and titrate

**Items supplied:** Titrette® bottle-top burette, DE-M marking, performance certificate, telescoping filling tube (170 to 330 mm), recirculation tube, 2 x 1.5 V batteries (AAA/UM4/LR03), 4 x PP bottle adapters (GL45/32, GL 45/38, GL 45/S40 and GL32/NS 29/32), 2 coloured light shield inspection windows, operating manual

**-30%**

Volume	Accuracy max. vol. (± R%)	Precision max. vol. (≤ CV%)	PK	Cat. No.	Price	Now
ml					EUR	EUR
10	0.10	0.05	1	6.259 209	<del>924,50</del>	<b>647,15</b>
25	0.07	0.025	1	9.271 332	<del>924,50</del>	<b>647,15</b>
50	0.06	0.02	1	9.271 333	<del>924,50</del>	<b>647,15</b>

### Automatic burettes with splinter protection, Schilling pattern, borosilicate glass 3.3



Burette according to Dr. Schilling with splinter protection, with Schellbach stripes, automatic zero point extraction and Bürkle dosing device.

- Adjusted to Ex
- Shatterproof, resistant to chemicals
- Exact spout tip, fine droplet formation
- Parts in contact with the medium: PE, natural rubber, PP, Borosilicate glass



**-35%**

Capacity	Grad.	Tolerance	Height	PK	Cat. No.	Price	Now
ml	ml	± ml	mm			EUR	EUR
15	0.1	0.045	520	1	6.280 403	<del>76,30</del>	<b>49,60</b>
25	0.1	0.075	650	1	6.280 404	<del>76,30</del>	<b>49,60</b>
50	0.1	0.075	920	1	6.280 405	<del>86,30</del>	<b>56,10</b>

## Single channel microliter pipettes Acura® manual 825, variable




This pipette line was developed with the highest customer demands in mind.

- User-friendly, slim shape, low weight.
- Justip™ tip adjustment concept, patented.
- Integrated InLab calibration system, patented
- Fully assembled autoclavable at 121 °C
- 3-year warranty

**-40%**

Capacity	Increments	Accuracy max. vol. (± R%)	Precision max. vol. (≤ CV%)	PK	Cat. No.	Price	Now
µl	µl					EUR	EUR
0.1 - 2	0.002	2.0	1.5	1	9.411 590	<del>270,00</del>	<b>162,00</b>
0.5 - 10	0.01	1.0	0.5	1	9.411 591	<del>270,00</del>	<b>162,00</b>
1 - 10	0.01	1.0	0.7	1	9.411 592	<del>253,10</del>	<b>151,86</b>
2 - 20	0.02	1.0	0.5	1	9.411 593	<del>253,10</del>	<b>151,86</b>
5 - 50	0.1	1.0	0.4	1	9.411 594	<del>253,10</del>	<b>151,86</b>
10 - 100	0.1	0.8	0.2	1	9.411 595	<del>253,10</del>	<b>151,86</b>
20 - 200	0.2	0.6	0.2	1	9.411 596	<del>253,10</del>	<b>151,86</b>
100 - 1000	1	0.5	0.2	1	9.411 597	<del>253,10</del>	<b>151,86</b>

## LLG-Labware pipette tips, economy 2.0, PP

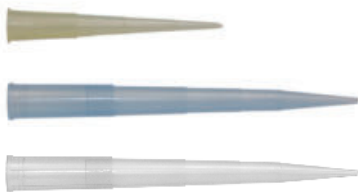

The new generation of LLG Labware Pipette tips economy. Racked-tip boxes are delivered in a dispenser, which can be opened from two sides facilitating the use of the product in two workspaces. Compatible with all common pipette brands. You can find the appropriate compatibility list on [www.llg-labware.com](http://www.llg-labware.com) in the Downloads section.

- Improved optical clarity and pipette fit
- Coloured coded rack inserts for easy identification
- Autoclavable
- DNase and RNase-free

**-60%**

Capacity	Colour	Package contents	PK	Cat. No.	Price	Now
µl					EUR	EUR
0.1 ... 10	transparent	10 x 96	960	4.668 776	<del>57,50</del>	<b>23,00</b>
0.1 ... 10	transparent	10 x 96	960	6.491 406	<del>57,50</del>	<b>23,00</b>
1 ... 200	transparent	10 x 96	960	4.668 778	<del>57,70</del>	<b>23,08</b>
1 ... 200	yellow	10 x 96	960	4.668 779	<del>57,70</del>	<b>23,08</b>
100 ... 1000	transparent	8 x 96	768	4.668 782	<del>52,40</del>	<b>20,96</b>
100 ... 1000	blue	8 x 96	768	4.668 783	<del>52,40</del>	<b>20,96</b>

## Pipette stands Twister™ universal 336 for single channel microliter pipettes



Unique design 6-position pipette workstation with great characteristics. Model fits six pipettes of most brands providing for an ideal storage solution in any laboratory. Rotation enables quick instrument selection. Easy disassembling for simple maintenance.

**-35%**

Colour	PK	Cat. No.	Price	Now
			EUR	EUR
Sapphire blue	1	6.253 916	<del>116,10</del>	<b>75,47</b>

## LLG-Disposable Reagent reservoirs economy, PS



Made from polystyrol. Designed for use with multi-channel pipettes and can accommodate up to 12-channel standard pipettes. Available as sterile and non-sterile versions.

- DNase-, RNase- and pyrogen-free certified.

**-75%**

Capacity	Description	PK	Cat. No.	Price	Now
ml				EUR	EUR
25	non-sterile, bulk	100	6.282 144	<del>70,00</del>	<b>17,73</b>
25	sterile, single packed	100	6.282 145	<del>132,00</del>	<b>33,00</b>
50	non-sterile, bulk	100	6.282 146	<del>86,00</del>	<b>21,73</b>
50	sterile, single packed	100	6.282 147	<del>172,20</del>	<b>43,05</b>



Macro pipette controllers



The handwheel allows precise suction of the liquid into the pipette with one hand.

**-65%**

For	PK	Cat. No.	Price	Now
			EUR	EUR
Pipette volume up to 2 ml	1	4.008 322	<del>15,20</del>	<b>5,32</b>
Pipette volume up to 10 ml	1	4.008 323	<del>15,20</del>	<b>5,32</b>
Pipette volume up to 25 ml	1	4.008 324	<del>16,70</del>	<b>5,85</b>

Pipette tray, PVC



PVC. Tidy tray. With 4 long compartments for approx. 30 graduated pipettes (1 ml to 20 ml).

**-75%**

Dimensions (W x D x H)	PK	Cat. No.	Price	Now
mm			EUR	EUR
426 x 300 x 30	1	9.200 394	<del>58,80</del>	<b>14,70</b>

Volumetric pipettes, USP, class AS, AR-glass®, blue graduation



BLAUBRAND®, DE-M marking. DIN EN ISO 648. Calibrated to deliver (TD, EX). Marks and inscriptions in high-contrast blue enamel. Incl. one USP batch certificate. The batch certificate or individual certificate is also available to download from the manufacturer's website.



**-50%**

Volume ml	Tolerance ± ml	Overall length ± 10 mm	PK	Cat. No.	Price	Now
					EUR	EUR
0.5*	0.005	300	1	6.262 520	<del>10,60</del>	<b>5,30</b>
1	0.006	300	1	7.659 228	<del>8,35</del>	<b>4,18</b>
2	0.006	330	1	6.262 521	<del>8,35</del>	<b>4,18</b>
3	0.01	330	1	6.262 522	<del>10,20</del>	<b>5,10</b>
4	0.01	400	1	6.262 523	<del>11,80</del>	<b>5,90</b>
5	0.01	400	1	7.659 239	<del>10,20</del>	<b>5,10</b>
10	0.02	440	1	7.659 240	<del>10,50</del>	<b>5,25</b>
20	0.03	510	1	6.262 529	<del>13,10</del>	<b>6,55</b>
25	0.03	520	1	6.262 530	<del>13,40</del>	<b>6,70</b>
50	0.05	540	1	6.262 532	<del>16,90</del>	<b>8,45</b>

\* Error limit USP ±0.006 ml

Pasteur pipettes, PE



Disposable pipettes with fine tips for precise dispensing. Length: 150 mm

- With suction ball
- Graduated
- Non-sterile in multi-packs

**-75%**

Nominal capacity ml	PK	Cat. No.	Price	Now
			EUR	EUR
1	500	6.206 154	<del>40,20</del>	<b>10,05</b>
3	500	6.206 772	<del>40,20</del>	<b>10,05</b>

Pipettes, Pasteur, PE



For transfer of liquids. Resistant against almost all acids. Soft and elastic bulb.

**-55%**

Type	Capacity ml	Length mm	Sterile	Graduations	PK	Cat. No.	Price	Now
							EUR	EUR
Standard	1.0	150	-	+	500	9.411 031	<del>47,10</del>	<b>21,20</b>
Standard, single wrapped*	1.0	150	+	+	500	9.411 038	<del>57,30</del>	<b>25,79</b>
Standard	1.5	230	-	+	400	7.200 111	<del>23,50</del>	<b>10,58</b>
Standard	2.0	153	-	+	500	7.631 961	<del>43,40</del>	<b>19,53</b>
Standard	2.5	150	-	+	500	6.229 723	<del>37,70</del>	<b>16,97</b>
Macro	3.0	155	-	+	500	9.411 030	<del>46,00</del>	<b>20,70</b>
Macro, single wrapped	3.0	150	+	+	500	9.411 035	<del>59,50</del>	<b>26,78</b>
Macro	3.0	155	+	+	500	4.653 509	<del>56,80</del>	<b>25,56</b>
Standard	4.0	150	-	-	500	6.234 514	<del>24,60</del>	<b>11,07</b>
Macro	6.0	149	-	-	400	9.411 034	<del>39,40</del>	<b>17,73</b>
Standard, with ring mark	10.0	170	-	-	200	9.411 033	<del>23,90</del>	<b>10,76</b>
Standard	10.0	300	-	-	100	6.203 402	<del>49,80</del>	<b>22,41</b>

\* Total volume

UV sterilisation cabinets



- Ideal for PCR Preparations
- Efficient Decontamination with UV Light
- Doors with Safety Switches



Cost-effective alternative to cleanrooms for PCR in nucleic acid-free environments. The four powerful UV lamps denature nucleic acids safely in 5 to 30 min. user from UV light thanks to safety switches in the doors. Timer function for UV lamp. The chamber made of 10 mm acrylic also serves as an efficient shield against beta radiation emissions and can therefore be used safely with isotopes such as <sup>32</sup>P.


Specifications

UV Lights:	4 x 15 W
White Lights:	15
Dimensions (H x W x D):	770 x 580 x 420 mm / 620 x 580 x 420 mm / 450 x 580 x 350 mm
Weight:	19 kg/14.6 kg/12 kg

Description	PK	Cat. No.	Price	
			EUR	Now
UV sterilisation cabinets Maxi with timer, four UV lights and white light	1	9.584 774	<del>2.694,10</del>	<b>1.616,46</b>
General purpose tray white, 680 x 540 mm	1	6.258 034	<del>115,00</del>	<b>69,00</b>
Radiation hazard tray yellow, 680 x 540 mm	1	9.584 788	<del>137,50</del>	<b>82,50</b>

**-40%**

DNA AWAY™ for surface decontaminant



Eliminates unwanted DNA and DNase from glassware and plasticware without affecting subsequent DNA samples. Degrades DNA more quickly and effectively than autoclaving.

This product is a disinfectant containing biocides. Please inquire about its availability and legal information.

Type	Capacity	PK	Cat. No.	Price	
				EUR	Now
MBP DNA Away®	250 ml	1	6.228 401	<del>27,50</del>	<b>12,42</b>

**-55%**

LLG-96-well PCR Plates, PP




- Clear well bottom for sample visibility, with V-Bottom
- Compatible with thermocyclers of all leading brands
- Consistent wall thickness for uniform heat transfer
- Holes in the skirt for easy handling
- Virgin polypropylene, certified RNase-, DNase- and Endotoxin-free

Description	Capacity	PK	Cat. No.	Price	
				EUR	Now
96 Well Plate, skirted	200 µl	50	6.313 409	<del>194,40</del>	<b>126,36</b>
96 Well Plate, non-skirted	200	100	6.313 408	<del>230,30</del>	<b>149,70</b>
96 Well Plate, half skirted	200	50	6.313 394	<del>188,70</del>	<b>122,66</b>

**-35%**

LLG-PCR adhesive film and foil

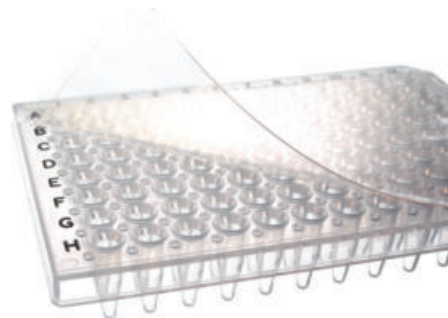

For use in cycles with screw-down or clip-down lids.

PCR Film: Clear film enables visual inspection of samples and fluorescence measurements.

PCR Foil: Aluminium, easy to pierce, no adhesive residue on the pipette tips.

QPCR Foil: Adhesive seal optically clear, peelable, for QPCR and fluorescence applications.

Description	Temp. range °C	PK	Cat. No.	Price	
				EUR	Now
PCR film	-40 ... 102	100	6.313 398	<del>79,60</del>	<b>47,76</b>
PCR foil	-80 ... 104	100	6.313 400	<del>99,40</del>	<b>59,64</b>
QPCR foil	-70 ... 100	100	6.313 399	<del>199,80</del>	<b>119,88</b>

**-40%**

Greenough-Stereomicroscope  
Educational-Line OSE



Ideal for Schools and Training Purposes



- Ideal for workshops, schools and training.
- Tube 45° inclined
  - WF 10x/ Ø 20 mm
  - Diopter adjustment: Both-sided
  - Illumination 1 W LED incident and transmitted
  - Integrated handle and arm curved stand

Total dimension (W x D x H): 230 x 130 x 300 mm  
 Weight: 2.0 kg  
 Power supply: 230 V/50 Hz, battery

**-40%**

Type	Description	Mag-nification	PK	Cat. No.	Price	Now
					EUR	EUR
OSE 421	Binocular	2x / 4x	1	4.666 529	<del>310,00</del>	<b>186,00</b>

Staining jar, PMP (TPX®),  
Hellendahl pattern



Accepts 16 slides 76 x 26 mm (8 pairs back to back).  
 Transparent, with grooves. Complete with lid.

**-75%**

Dimensions (W x D x H) mm	PK	Cat. No.	Price	Now
			EUR	EUR
58 x 53.5 x 86	1	9.161 350	<del>22,00</del>	<b>5,70</b>

Phase contrast microscopes  
Professional line OBN



This series features professional Köhler illumination with an adjustable field diaphragm and Infinity optics. A C-mount adapter is required to connect a camera (optional).

**OBN 158:**

- Phase contrast microscope, incl. centring eyepiece
- Objective: 4x, 10xPH, 20xPH, 40xPH, 100xPH
- 5-fold condenser wheel with 10x/20x/40x/100x Infinity PH plan objectives (complete set)
- Including blue and green colour filter

**OBN 159:**

- Trinocular
- Tube 30° inclined, 360° rotatable
- Eyepieces: HWF 10x/20 mm
- Dioptre compensation on both sides
- 5x nosepiece
- Objective quality: Infinity Plan
- Coaxial coarse and fine drive

**Scope of supply:** Phase contrast microscope, centring eyepiece, protective dust cover, eyecups, user manual

**-40%**

Type	Lighting	PK	Cat. No.	Price	Now
				EUR	EUR
OBN 158	20 W halogen	1	4.666 528	<del>2.970,00</del>	<b>1.782,00</b>
OBN 159	3 W LED	1	6.491 267	<del>2.990,00</del>	<b>1.794,00</b>

LLG-Slide dispenser



The slide dispenser can dispense 72 slides individually. By turning the knob, one slide is dispensed. Only dry slides should be inserted into the storage magazine. With a transparent, removable upper section for easy viewing of remaining slides and clean storage. For microscope slides with dimensions 75 x 25 mm and 76 x 26 mm.

**-65%**

Type	PK	Cat. No.	Price	Now
			EUR	EUR
Dispenser	1	9.161 000	<del>37,30</del>	<b>13,06</b>

## Spectrophotometer LLG-uniSPEC 2



High-quality and cost-efficient UV/VIS spectrophotometers for pharmaceutical, biochemical and clinical lab applications. Suitable for different measurement types such as kinetics, wavelength scans, quantitative analysis, multi-wavelength and DNA/Protein analysis.

- Single beam system, grid with 1200 lines/mm
- Silicon photodiode detector
- Parallel port for printer output
- USB port
- 4-position cell holder (10 mm) included
- Additional cell holders are optionally available
- LCD
- Deuterium and tungsten lamp
- Automatic wavelength adjustment

**Scope of supply:** LLG-uniSPEC 2 Photometer, software for connection to PC, 4 glass cells, and 2 quartz cells.

### Specifications

Optical System:	Single beam
Wavelength range:	190 to 1100 nm
Bandwidth:	2 nm
Wavelength accuracy:	±0.5 nm
Stray light:	≤0.1%T
Display:	128 x 64 Dots LCD
Dimension (W x D x H):	460 x 360 x 225 mm
Weight:	18 kg
Power supply:	220 V/50 Hz or 110 V/60 Hz

**-50%**

Type	Plug type	PK	Cat. No.	Price	Now
LLG-uniSPEC 2	EU	1	6.263 610	<del>3.875,00</del>	<b>1.937,50</b>

## LLG-Cuvette rack, PP



Ideal for storing up to 16 cuvettes with a 12.5 mm width. The two-tier arrangement of the cuvette rows ensures clarity.

- Numbered positions
- Autoclavable at 121 °C

**-45%**

Length	Width	Height	PK	Cat. No.	Price	Now
mm	mm	mm			EUR	EUR
210	70	35	1	4.682 061	<del>11,73</del>	<b>6,45</b>

## Densitometer DEN-600



Portable densitometer for OD600 method, McFarland (McF) turbidity method measurement and Bradford protein assay method for protein concentration.

- LCD
- Battery mode possible
- Software for measurement, results, upload and analysis (USB connectivity)
- Compatible with cuvettes, round bottom tubes and falcon tubes (10 mm)

### Specifications

Light source:	LED
Measuring range absorbance:	0 ... 3.000
Measuring range McFarland:	0.00 ... 16.00
Accuracy absorbance:	±0.006 at 1 Abs
Accuracy McFarland:	±0.1 at 0 ... 8 McF
Power supply:	100 ... 240 V 50/60 Hz or lithium-ion polymer battery

**-30%**

Type	Wave-length nm	Dimensions (W x D x H) mm	Weight kg	PK	Cat. No.	Price	Now
DEN-600	600 ± 10	120 x 145 x 65	0.5	1	4.684 303	<del>916,00</del>	<b>641,20</b>

## Macro and semi micro cuvettes



Sorted by mould cavity number. PMMA or PS. Path length: 10 mm.

### Quality characteristics:

- Minimal extinction value variation
- Optically perfect transmission range
- Recessed window to protect against scratches
- Arrowhead marking shows the direction of transmission

### Polymethylmethacrylate (PMMA) cuvettes

- Typical operating range: from 300 nm to 900 nm
- Standard deviation at 320 nm ±0.004 extinction units

### Polystyrene (PS) cuvettes

- Typical operative range: from 340 nm to 900 nm
- Standard deviation at 360 nm ≤ ±0.005 extinction units

Dimensions: 12.5 x 12.5 x 45 mm  
 Window: Macro cell 10 x 35 mm  
 Semi micro cell 4.5 x 23 mm

**-35%**

Description	Volume ml	Operating range nm	Material	PK	Cat. No.	Price	Now
Macro	2.5 to 4.5	300 to 900	PMMA	100	9.406 111	<del>14,40</del>	<b>9,36</b>
Semi-micro	1.5 to 3.0	300 to 900	PMMA	100	9.406 115	<del>15,10</del>	<b>9,82</b>
Macro	2.5 to 4.5	340 to 900	PS	100	9.406 110	<del>13,60</del>	<b>8,84</b>
Semi-micro	1.5 to 3.0	340 to 900	PS	100	9.406 114	<del>14,20</del>	<b>9,23</b>



## Reflectance spectrophotometer TR 515



- Switchable Aperture
- Incl. Calibration Plates



Ergonomic and flexible reflectance spectrophotometer for measuring samples in the fields of food, medicine, coatings and plastics. With a camera-based, integrated localisation device and black and white calibration plates.

- CMOS sensor (256 picture elements, double array)
- Intuitive 3.5 inch TFT colour LCD (capacitive), symbol-based
- Free PC-based OnShade software, which allows graphs and statistical process control
- Operation languages: EN, FR, DE, ES
- Switchable aperture ( $\varnothing$  8 mm /  $\varnothing$  4 mm) for adapting the measurement size to the surface
- Can determine accurate colour difference values, formulas and indices in common colour spaces

**Scope of supply:** Reflectance spectrophotometer, OnShade PC software, black and white calibration board (white tile and black light trap), dust cover, USB cable, external DC power supply, USB stick with user manual in English and Chinese, carrying case

**Specifications**

Optical geometry:	45°/0°
Colour difference formula:	$\Delta E^*ab$ , $\Delta E^*uv$ , $\Delta E^*94$ , $\Delta E^*cmc$ (2:1), $\Delta E^*cmc$ (1:1), $\Delta E^*00v$ , $\Delta E$ (Hunter)
Spectral range:	400 ... 700 nm
Spectral interval:	10 nm
Memory:	1000 standards, 30000 samples
Interface:	USB, Bluetooth® 4.0
Light source:	combined LED light, UV light
Dimensions (W x D x H):	184 x 105 x 77 mm
Weight:	600 g
Power supply:	Li-ion battery

**-25%**

Type	Aperture	PK	Cat. No.	Price	Now
	mm			EUR	EUR
TR 515	10/8 + 5/4	1	6.325 549	<del>7.798,50</del>	<b>5.848,88</b>

## Cells W600



Cells made of optical glass or Borosilicate glass 3.3, 21 x 40 mm, for instrument Models Fs, PFXi/PFX195, 880, 950 and 995. (Note: PFXi/PFX-195 max. path length 50 mm).

W600/OG/xx for unheated samples (up to 40 °C)  
W600/B/xx for heated samples (up to max. 100 °C)

Further versions are available on request.

**-20%**

Type	Path length	Material	PK	Cat. No.	Price	Now
	mm				EUR	EUR
W600/OG/10	10	optical glass	1	6.207 120	<del>57,70</del>	<b>46,16</b>
W600/OG/1"	25.4	optical glass	1	9.947 342	<del>66,30</del>	<b>53,04</b>
W600/OG/33	33	optical glass	1	6.093 322	<del>79,10</del>	<b>63,28</b>
W600/OG/50	50	optical glass	1	6.207 119	<del>89,80</del>	<b>71,84</b>
W600/OG/100	100	optical glass	1	6.235 055	<del>166,70</del>	<b>133,36</b>
W600/OG/5¼"	133.35	optical glass	1	9.947 343	<del>123,90</del>	<b>99,12</b>
W600/B/10	10	Borosilicate glass 3.3	1	6.241 927	<del>72,70</del>	<b>58,16</b>
W600/B/33	33	Borosilicate glass 3.3	1	6.086 921	<del>102,60</del>	<b>82,08</b>
W600/B/100	100	Borosilicate glass 3.3	1	6.253 940	<del>213,70</del>	<b>170,96</b>
W600/B/5¼"	133.35	Borosilicate glass 3.3	1	9.947 345	<del>160,30</del>	<b>128,24</b>

## LLG-Cuvettes, glass



LLG-Cuvettes have two clear windows and two side walls, and they are available as optical glass or in quartz variants. The walls and the base are polished inside and frosted outside. The thickness of the windows and the base is 1.25 mm. The overall height of standard-type cells is 45 or 48 mm. Each cuvette is supplied with a PTFE lid.

- Optical Glass: 335 to 2500 nm
- Quartz: 200 to 2700 nm

**-40%**

Type	Volume	Path length	PK	Cat. No.	Price	Now
	ml	mm			EUR	EUR
quartz glass	3.5	10	2	4.681 513	<del>91,70</del>	<b>55,02</b>
quartz glass	17.5	50	2	4.681 514	<del>271,30</del>	<b>162,78</b>
optical glass	3.5	10	4	4.681 515	<del>49,10</del>	<b>29,46</b>
optical glass	17.5	50	4	4.681 516	<del>105,40</del>	<b>63,24</b>

## LLG-pH electrode with gel electrolyte



Basic pH combination electrode with plastic shaft, gel reference system and temperature sensor.  
Suitable for all pH meters with DIN plug and 4-mm banana plug.

Temperature range: 0 ... 80 °C  
pH range: 0 ... 14 pH  
Length/Ø: 120/12 mm  
Temperature sensor: NTC 30kΩ  
Cable length: 1 m  
Electrolyte: Gel  
Diaphragm: Fibre

**-50%**

Type	PK	Cat. No.	Price	Now
LLG-pH electrode with gel electrolyte	1	4.681 924	<del>214,30</del>	<b>107,15</b>

## Technical pH buffer solutions



Colour coded. Tested and ISO 17025 Certified at 25 °C. Uncertainty of measurement ±0.02 pH. Temperature dependence data is printed on the label as are lot numbers and expiry dates. These pH buffer solutions are suitable for use where very accurate measurements are required and are supplied with a detailed Certificate of Analysis which outlines traceability to N.I.S.T (the N.I.S.T SRM(s) Lot No. is stated on the certificate). This item has a 12 to 36-month shelf life from the date of manufacture depending on pH value.

**-60%**

pH-value at 25 °C	Colour	Capacity ml	PK	Cat. No.	Price EUR	Now EUR
2.00	Red	250	1	9.040 949	<del>29,30</del>	<b>11,72</b>
4.01	Red	250	1	9.040 950	<del>29,30</del>	<b>11,72</b>
7.00	Yellow	250	1	6.240 744	<del>29,30</del>	<b>11,72</b>
9.21	Blue	250	1	9.040 951	<del>29,30</del>	<b>11,72</b>
10.00	Blue	250	1	6.240 745	<del>29,30</del>	<b>11,72</b>
4.01	Red	500	1	6.206 907	<del>33,40</del>	<b>13,36</b>
7.00	Yellow	500	1	6.229 762	<del>33,40</del>	<b>13,36</b>
4.01	Red	1000	1	9.040 955	<del>47,00</del>	<b>18,80</b>
7.00	Yellow	1000	1	6.238 677	<del>47,00</del>	<b>18,80</b>
10.00	Blue	1000	1	6.238 676	<del>47,00</del>	<b>18,80</b>

## LLG-Universal Indicator strips "Premium" in a vial with a snap lid



A flip-top vial is easy to open and close with one hand. The new LLG pH strips offer the utmost convenience and ease of use in laboratory-grade testing. With a single colour match, and a 12 mm reagent pad, these universal pH strips (0.0-14.0) belong in every lab.

- pH measuring range: 0 - 14
- 12 mm matching area for quick matches,
- Flip-top vial stays closed when dropped but is easy to open with one hand.
- Vial keeps strips safe from the elements
- 1 pack (vial) of 100 strips

**-45%**

Range	PK	Cat. No.	Price	Now
pH 0 ... 14	100	9.129 808	<del>13,90</del>	<b>7,59</b>

## pH-Fix indicator strips, special



For determination of pH-value.  
Permanent colour.  
Non-bleeding.

**-35%**

Range	PK	Cat. No.	Price	Now
pH 1.7 ... 3.8	100	9.130 386	<del>14,30</del>	<b>9,30</b>
2.0 ... 9.0	100	9.130 380	<del>14,30</del>	<b>9,30</b>
3.6 ... 6.1	100	9.130 387	<del>14,30</del>	<b>9,30</b>
4.0 ... 7.0	100	6.280 450	<del>14,30</del>	<b>9,30</b>
4.5 ... 10.0	100	9.130 383	<del>14,30</del>	<b>9,30</b>
6.0 ... 10.0	100	9.130 392	<del>14,30</del>	<b>9,30</b>
7.5 ... 9.5	100	9.130 390	<del>14,30</del>	<b>9,30</b>

Laboratory instrument inoLab® pH 7110

Basic pH/mV laboratory instrument for all tasks where reliable, accurate readings are required quickly and easily. With a large LCD segment display and an easy-to-read keyboard.

**Scope of supply:** Instrument, mains power adapter, stand.

**Specifications**

- Ranges: All values ±1 digit
- pH: -2.0 ... 20.0 ±0.1 pH  
-2.00 ... 20.00 ±0.01 pH  
-2.000 ... 19.999 ±0.005 pH
- mV: ±(1200.0 ±0.3) mV  
±(2000 ±1) mV
- Calibration: 1-, 2- or 3 point WTW technical buffer or DIN/NIST
- Temperature: -5.0 ... 105.0 °C ±0.1 °C
- Power supply: Universal power supply 100 to 240 V, 50/60 Hz,  
4 x 1.5 V AA or 4 x 1.2 V NiMH rechargeable batteries



- AutoRead Function
- High Measuring Range



**-30%**

Type	Description	PK	Cat. No.	Price	Now
				EUR	EUR
pH 7110	Stand-alone instrument with DIN connection	1	9.920 090	<del>778,00</del>	<b>544,60</b>
pH 7110 SET 2	Instrument incl. SenTix® 41, buffer 4.7 / 10.01 and 3 mol/l KCl	1	9.920 091	<del>1.006,00</del>	<b>704,20</b>
pH 7110 SET 4	Instrument incl. SenTix® 81, buffer 4.7 / 10.01 and 3 mol/l KCl	1	9.920 092	<del>1.035,00</del>	<b>724,50</b>

pH meter FiveGo™ F2



- Portable pH Meter
- For Field and Laboratory use

Portable pH meter for field work and laboratories.

- Measurement made easy: A large, well-structured display, intuitive button arrangement, and simple menu ensure measurements can be performed in just a few clicks
- IP67 Water and dustproof.

**Scope of delivery:**

- F2-Meter:** Meter only
- F2-Standard kit:** Meter with LE438 sensor



**Specifications**

- pH**
  - Measuring range: 0.00 ... 14.00
  - Resolution: 0.01
- mV**
  - Measuring range: -1999... 1999 mV
  - Resolution: 1 mV
  - Temperature Compensation: ATC and MTC
  - Calibration: 3 points, 4 predefined buffer groups
  - Memory size: 200 measurements, current calibration
- Temperature**
  - Measuring range: 0 ... 100 °C
  - Resolution: 0.1 °C

**-40%**

Type	PK	Cat. No.	Price	Now
			EUR	EUR
F2-Meter	1	6.280 111	<del>356,00</del>	<b>213,60</b>
F2-Standard kit	1	6.280 112	<del>530,00</del>	<b>318,00</b>

Conductivity Pocket Tester Elite CTS Pin/Cup

The Elite CTS pocket tester simultaneously displays conductivity/TDS/salinity with temperature. With a leakproof, transparent wide-base cap for upright standing with a fill line indicator.

- 1-push calibration
- Large 4-digit double line display
- Backlit graphic display
- Auto-hold readings
- Easy-to-operate, intuitive keypad
- Auto-off

**Scope of supply:**  
**Elite CTS Pin/Cup:**  
Tester incl. batteries, lanyard

**Elite CTS Pin/Cup Kit:**  
Tester incl. batteries, lanyard, soft carry case, CTS conductivity Standard Sachets (5 x 1413 µS/cm KCl and 5 x 2764 µS/cm KCl)



- Specifications**
- Conductivity range: 0.0 µS ... 20.00 mS
- TDS range: 0.0 ... 10000 ppm
- Salinity range: 0 ... 10000 ppm
- Resolution: 100 ppm
- Temperature range: 0 ... 60.0 °C
- Resolution: 0.1 °C
- Operating temperature: 5 ... 45 °C
- Relative humidity: 5 ... 85%, non-condensing
- Temperature compensation: ATC
- Power supply: 4 x AAA 1.5 V batteries
- IP code: IP 67

**-50%**

Type	PK	Cat. No.	Price	Now
			EUR	EUR
Elite CTS Pin	1	6.290 132	<del>158,00</del>	<b>79,00</b>
Elite CTS Pin Kit	1	6.290 138	<del>183,00</del>	<b>91,50</b>
Elite CTS Cup	1	6.290 133	<del>168,00</del>	<b>84,00</b>
Elite CTS Cup Kit	1	6.290 139	<del>183,00</del>	<b>91,50</b>



### ChemoSampler, PP



Grey. For sampling aggressive liquids, e.g. acids, alkalis, detergents. The samples are drawn directly into the screw-on original sampling bottle. The tamperproof bottle closure of these bottles with the original safety ring ensures unadulterated sample transport.

- Resistant to acids and alkalis
- Incl. sample bottle 1000 ml
- An extension rod 100 cm is available as an accessory

**-40%**

Length	PK	Cat. No.	Price	Now
mm			EUR	EUR
1000	1	9.303 940	<del>98,20</del>	<b>58,92</b>

### Vampire Sampler



The self-priming peristaltic pump is also suitable for dirty or particle-containing substances with a maximum viscosity. 500 mPas. Ideal for sampling from barrels, tanks, wells, water separators, wastewater and sewage treatment plants. The samples are fed directly into the sample container via the closed hose system.

- Battery-powered hose pump
- Suction depth up to 5 metres

**Scope of supply:** Drive unit, pump head, pump hose (30 cm, Marprene), suction hose (5 m, PE), hose connector (PP), sample bottle (250 ml, LDPE), bottle basket, two rechargeable batteries, battery charger

**-20%**

Type	PK	Cat. No.	Price	Now
			EUR	EUR
Vampire sampler, complete	1	9.303 851	<del>1.068,80</del>	<b>855,04</b>

### Disposable scoops SteriPlast®, PS



White. The scoops are also available with a transparent cover to close them immediately after the sampling procedure to secure a sterile and contamination-free sample.

- Individually packed
- Gamma-sterilized
- Production, assembling and packaging acc. to Cleanroom class 7 (10000)
- According to EU food and FDA guidelines

**-35%**

Capacity	Length	PK	Cat. No.	Price	Now
ml	mm			EUR	EUR
25	141	10	6.265 037	<del>20,10</del>	<b>13,07</b>
50	160	10	6.265 039	<del>20,80</del>	<b>13,52</b>
100	205	10	6.265 041	<del>21,50</del>	<b>13,98</b>
150	216	10	6.265 043	<del>22,00</del>	<b>14,30</b>
250	232	10	6.269 512	<del>26,80</del>	<b>17,42</b>
500	280	10	6.269 514	<del>47,50</del>	<b>30,88</b>
500	283	10	6.269 515	<del>80,60</del>	<b>52,39</b>
1000	332	10	6.284 542	<del>73,10</del>	<b>47,52</b>
2000	381	10	4.680 855	<del>84,60</del>	<b>54,99</b>

### Disposable spoons SteriPlast®, PS



White. The spoons are ideal for sampling powders, granules and pastes.

- Individually packed
- Gamma-sterilised
- Production, assembly and packaging acc. to Cleanroom class 7 (10000)
- According to EU food and FDA guidelines

**-35%**

Capacity	Length	PK	Cat. No.	Price	Now
ml	mm			EUR	EUR
2.5	127	100	6.265 045	<del>44,40</del>	<b>28,86</b>
10	170	100	6.265 046	<del>47,20</del>	<b>30,68</b>



Erlenmeyer flasks, wide mouth, GL 45, PP, with blue screw neck



Transparent. Suitable for storage and cultivation of cell cultures. To preserve markings, do not clean at temperatures exceeding 60 °C.

- Suitable for microwaves
- Food-safe products according to EC Directive No. 10/2011

Nominal capacity ml	Grad. ml	PK	Cat. No.	Price	
				EUR	Now
75	10	1	9.141 000	<del>6,15</del>	<b>3,38</b>
125	20	1	9.141 001	<del>6,65</del>	<b>3,66</b>
250	50	1	9.141 002	<del>9,45</del>	<b>5,20</b>
500	100	1	9.141 003	<del>10,90</del>	<b>6,00</b>
1000	200	1	9.141 004	<del>13,70</del>	<b>7,54</b>

**-45%**

Mortars only, porcelain



To DIN 12906. With spout, pestle not supplied. Glazed externally. Inside rough.

Capacity ml	Int. diam. mm	Height mm	PK	Cat. No.	Price	
					EUR	Now
70	65	40	1	9.164 206	<del>23,20</del>	<b>12,76</b>
170	90	55	1	9.164 209	<del>34,80</del>	<b>19,14</b>
400	130	65	1	9.164 212	<del>59,20</del>	<b>32,56</b>
700	150	70	1	9.164 215	<del>89,60</del>	<b>49,28</b>
1000	180	80	1	9.164 218	<del>246,20</del>	<b>135,41</b>

**-45%**

Laboratory Blender Waring® 8011



Versatile laboratory mixer ideally suited for general laboratory work supplied either with a 1 L stainless steel container or a 1.2 L glass container.

- Two velocity settings (18000 or 22000 rpm)
- Epoxy-coated motor housing
- Two-piece lid vinyl/styrene

**Scope of supply:** Mixer, container (stainless steel or glass) with handle and lid

Type	With	PK	Cat. No.	Price	
				EUR	Now
8011EG	Glass container, 1.2 l	1	6.284 693	<del>1.030,00</del>	<b>618,00</b>
8011ES	Stainless steel container, 1 l	1	6.284 694	<del>1.154,00</del>	<b>692,40</b>

**-40%**

Pestles only, porcelain



To DIN 12906. With a glazed handle. Unglazed grinding surface.

Head diam. mm	Length mm	Nominal diam. mm	PK	Cat. No.	Price	
					EUR	Now
24	115	50 / 63	1	9.164 306	<del>15,00</del>	<b>8,25</b>
30	135	90	1	9.164 309	<del>18,60</del>	<b>10,23</b>
36	150	125	1	9.164 312	<del>26,60</del>	<b>14,63</b>
42	175	150	1	9.164 315	<del>38,00</del>	<b>20,90</b>
55	210	180	1	9.164 318	<del>50,20</del>	<b>27,61</b>

**-45%**

Nominal size = mortar internal diameter

## Heating oven, ED 23, with gravity convection



Diversity for all types of thermal, whether efficient drying, long-term controlled elevated temperatures or sterilization tasks for homogeneous temperature distribution.

### Equipment:

- Temperature range from 5 °C above ambient temperature to 300 °C
- Independent adjustable temperature safety device class 2 (DIN 12880), with visual temperature alarm

**-30%**

Nom. capacity	Max. grids	Included grids	External dimensions (W x D x H) mm	PK	Cat. No.	Price	Now
L	4	2	435 x 520 x 495	1	9.883 529	EUR <del>1.807,00</del>	EUR <b>1.264,90</b>

## Safety Gloves Clavies®, Heat Protection up to 232 °C



Soft, pliant, all-cotton terry cloth gloves are superb for handling hot objects out of the autoclave or oven, or for other heat protection in the lab, school or industry. Note: Gloves are not waterproof and should not be used to handle dry ice. 1 pair per pack.

**-65%**

Length gauntlet mm	Overall length mm	PK	Cat. No.	Price	Now
130	330	1	9.005 271	EUR <del>93,00</del>	EUR <b>32,55</b>
280	470	1	9.005 272	EUR <del>126,60</del>	EUR <b>44,31</b>

## Peltier-recirculating chiller TE 400



- Precise Temperature Control
- Touch Display
- Low Maintenance Requirements

**New**



Robust Peltier chiller with precise temperature control for simple temperature control tasks in laboratories and research facilities. It works without refrigerant and is therefore very environmentally friendly and low-maintenance. The TE 400 offers a cooling capacity of up to 400 watts and a pump capacity of up to 7 l/min. The operating mode "Silent Mode" reduces the noise level by lowering the cooling power requirements.

- High-temperature stability
- Touch display for easy operation
- Economical and environmentally friendly operation thanks to high energy efficiency and low energy consumption
- RS232 interface
- Low-maintenance
- Pump connection thread M16x1 external thread

### Specifications

Temperature:	-5 ... 40 °C
Temperature stability:	±0.02 °C
Max. Delivery rate:	7 l/min
Max. Delivery pressure:	1.2 bar
Cooling capacity at 20 °C:	0.4 kW
Heating capacity:	0.45 kW
Dimensions (WxDxH):	274 x 413 x 400 mm
Weight:	24 kg
Plug type:	EU/CH/UK/US
Power supply:	100 ... 230 V, 50/60 Hz

**-10%**

Type	PK	Cat. No.	Price	Now
TE 400	1	6.492 490	EUR <del>5.300,00</del>	EUR <b>4.770,00</b>

### Cryo Protection Gloves CRYOKIT 400

EN 511 EN 388 EN 420



Suitable for all work with liquid nitrogen and other cryogenic gases up to approx. minus 196 °C. Protects against cold and contact burns in case of leakage of liquid gas. Interior insulation: polyester multi-layer fabric ( 410 g/m<sup>2</sup> ) and polyolefin parallel membrane. According to normative EN 511, EN 420, EN 388, Cat III. Warning: Not intended for immersion in liquid nitrogen or other liquid cryogenes. 1 pair per pack.

**-40%**

Size	Length	PK	Cat. No.	Price	Now
	mm			EUR	EUR
7	400	1	6.270 632	<del>141,00</del>	<b>84,60</b>
8	400	1	6.270 633	<del>141,00</del>	<b>84,60</b>
9	400	1	6.270 634	<del>141,00</del>	<b>84,60</b>
10	400	1	6.270 635	<del>141,00</del>	<b>84,60</b>
11	400	1	6.270 636	<del>141,00</del>	<b>84,60</b>

### Cryogenic vial racks, PC



- Drainage holes in each well
- Alphanumeric identification
- Temperature resistant up to -196 °C
- Autoclavable



**-50%**

Volume	Array	For tubes diam.	PK	Cat. No.	Price	Now
litres		mm			EUR	EUR
2 ... 5	50	12.9	4	6.238 908	<del>127,20</del>	<b>63,60</b>



For precise gripping and safe removal of cryogenic microtubes and vials, as well as crimped vaccine/serum vials from cold storage boxes. The set includes one gripper for cryogenic vials (Ø 13.5 mm) and one gripper for vaccine vials (Ø 21 mm).

- Ergonomic squeeze area
- Autoclavable at 121 °C



**New**

**-70%**

Type	PK	Cat. No.	Price	Now
			EUR	EUR
Grippers	2	6.492 241	<del>49,70</del>	<b>14,91</b>

### Cooled incubators FOC series



- With Internal Sockets
- High Temperature Stability



Versatile cooled incubators with auto-tuning temperature control system for optimal temperature stability.

- 2-internal sockets for further devices
- Software TEMPSoft™ for setting times, temperatures, ramps and alarm thresholds
- Wireless (WIFI) and wired connectivity
- Life span counter for key components is built in
- Forced ventilation for uniform temperature distribution



**Scope of supply:** Cooled incubator, shelves

#### Specifications

Temperature range: 3 ... 50 °C  
 Temperature accuracy: ±0.5 °C  
 Display: 3-digit LCD  
 Interface: Wi-Fi, 2 x RS485  
 Power supply: 230 V, 50/60 Hz

**-20%**

Type	Nom. capacity	Included grids	External dimensions (W x D x H) mm	PK	Cat. No.	Price	Now
	L					EUR	EUR
FOC 120E	109	2	540 x 550 x 912	1	6.316 555	<del>1.764,00</del>	<b>1.411,20</b>
FOC 200E	169	3	540 x 550 x 1263	1	6.316 556	<del>2.013,00</del>	<b>1.610,40</b>

### LLG-Cryotubes, PP, sterile



With a star shape in the screw cap, for an automated capper/uncapper. Temperature resistance down to -196 °C. **Not appropriate for operations in liquid nitrogen.** Printed graduations for accurate measurements. Large white area for writing specimen identification.

Packed in 2 bags of 50 tubes.



**-60%**

Capacity	Description	Thread	PK	Cat. No.	Price	Now
ml					EUR	EUR
1.2	Self-standing	External	100	9.401 160	<del>38,60</del>	<b>15,44</b>
1.2	Self-standing	Internal	100	9.401 161	<del>38,60</del>	<b>15,44</b>
2.0	Self-standing	External	100	9.401 162	<del>38,60</del>	<b>15,44</b>
2.0	Self-standing	Internal	100	9.401 163	<del>38,80</del>	<b>15,52</b>
2.0	Without ring	External	100	9.401 164	<del>38,60</del>	<b>15,44</b>
2.0	Without ring	Internal	100	9.401 165	<del>38,60</del>	<b>15,44</b>
5.0	Self-standing	External	100	9.401 166	<del>38,60</del>	<b>15,44</b>
5.0	Without ring	Internal	100	9.401 167	<del>38,60</del>	<b>15,44</b>
5.0	Self-standing	Internal	100	9.401 168	<del>38,60</del>	<b>15,44</b>

### Grippers for cryogenic and vaccine vials, PP



For precise gripping and safe removal of cryogenic microtubes and vials, as well as crimped vaccine/serum vials from cold storage boxes. The set includes one gripper for cryogenic vials (Ø 13.5 mm) and one gripper for vaccine vials (Ø 21 mm).

- Ergonomic squeeze area
- Autoclavable at 121 °C



**New**

**-70%**

Type	PK	Cat. No.	Price	Now
			EUR	EUR
Grippers	2	6.492 241	<del>49,70</del>	<b>14,91</b>



## Ultrasonic cleaning units Elmasonic Select



- 4 Individual Cleaning Programs
- Autostart Function



Versatile ultrasonic baths with an ultrasonic frequency of 37 kHz, 5 ultrasonic modes (dynamic, pulse, sweep, degas, eco), heating and the possibility to save up to 4 individual cleaning programmes.

- Mode dynamic combines pulse and sweep modes for higher cleaning performance
- Mode pulse for powerful sample preparation
- Mode sweep for uniform cleaning throughout the bath
- Mode degas is optimised for degassing liquids
- Mode eco for quiet, energy-efficient operation and longer lifetime
- Digital control panel with wipeable membrane keypad and easy-to-read display for all operating states
- Setup menu for individual adjustment of the device functions
- Autostart function for temperature-controlled start of cleaning
- Dry run protection
- Adjustable limit temperature from 40 to 60 °C
- With stopcock (except Select 30 and 40)

**Scope of supply:** Ultrasonic bath, lid

### Specifications

Temperature:	25 ... 80 °C
Sound pressure level (LpAU):	<80 dB
Ultrasonic sound level (LpZ):	<110 dB
Power supply:	220 ... 240 V~, 50/60 Hz
IP code:	IP 20

Type	Capacity of the bath litres	External dimensions (W x D x H) mm	PK	Cat. No.	Price	
					EUR	Now EUR
Select 30	2.7	305 x 170 x 230	1	6.321 722	<del>665,00</del>	<b>399,00</b>
Select 40	3.9	305 x 170 x 280	1	4.684 652	-	<b>995,00</b>
Select 60	5.9	370 x 210 x 275	1	4.684 653	<del>1.170,00</del>	<b>702,00</b>
Select 80	9.3	570 x 195 x 280	1	4.684 654	<del>1.360,00</del>	<b>816,00</b>
Select 100	9.5	380 x 300 x 280	1	4.684 655	<del>1.390,00</del>	<b>834,00</b>
Select 120	12.9	380 x 300 x 330	1	4.684 656	<del>1.790,00</del>	<b>1.074,00</b>
Select 300	27.5	575 x 360 x 330	1	4.684 659	<del>2.440,00</del>	<b>1.464,00</b>

**-40%**

## LLG-Erlenmeyer flasks, borosilicate glass 3.3, with a screw cap



Erlenmeyer flasks made of borosilicate glass 3.3, screw cap with PTFE liner.

- White graduation and labelling field
- GL thread

**-65%**

Capacity	Thread	PK	Cat. No.	Price	Now
ml	GL			EUR	EUR
100	32	2	4.686 198	<del>29,80</del>	<b>10,43</b>
250	32	2	4.686 199	<del>39,80</del>	<b>13,93</b>
500	32	2	4.686 200	<del>45,00</del>	<b>15,75</b>
1000	32	1	4.686 201	<del>40,60</del>	<b>14,21</b>

## LLG Weighting Rings, Cast Iron, Vinyl Coated



To stabilise glassware in water or oil baths. The vinyl coating prevents vessels and apparatus from being scratched or marked.

**-40%**

For flasks	Int. diam.	PK	Cat. No.	Price	Now
ml	mm			EUR	EUR
100 ... 500	48	1	4.682 062	<del>35,92</del>	<b>21,55</b>
250 ... 1000	56	1	4.682 063	<del>38,47</del>	<b>23,08</b>
500 ... 2000	61	1	4.682 064	<del>44,39</del>	<b>26,63</b>
1000 ... 4000	74	1	4.682 065	<del>48,76</del>	<b>29,26</b>

## Insert baskets for ultrasonic cleaning units Elmasonic Select



Aperture size:  
11x15/10x10 mm



**-35%**

For bath type	Dimensions (W x D x H) mm	Max. load kg	PK	Cat. No.	Price	Now
Select 30	195 x 105 x 50	1	1	4.688 713	<del>50,00</del>	<b>32,50</b>
Select 40	195 x 105 x 95	3	1	4.688 714	<del>58,00</del>	<b>37,70</b>
Select 60	255 x 105 x 95	5	1	4.688 715	<del>70,00</del>	<b>45,50</b>
Select 80	455 x 105 x 55	5	1	4.688 716	<del>130,00</del>	<b>84,50</b>
Select 100	250 x 195 x 90	6	1	4.688 717	<del>150,00</del>	<b>97,50</b>
Select 120	250 x 195 x 135	7	1	4.688 718	<del>150,00</del>	<b>97,50</b>



## Bunsen burner with needle valve



DIN 30665. Air regulation, pilot flame.

Rubber sucker base (Art. Nr. 9.018 360), please order separately.

**-35%**

Type	Height	Weight	PK	Cat. No.	Price	Now
	mm	g			EUR	EUR
Natural with needle valve	155	220	1	9.018 365	<del>40,30</del>	<b>26,20</b>
Propane with needle valve	155	220	1	9.018 366	<del>40,30</del>	<b>26,20</b>

## Teclu burners with needle valve



Acc. to DIN 30665, with air regulation, with low flame.

**-35%**

Type	Height	Weight	PK	Cat. No.	Price	Now
	mm	g			EUR	EUR
Natural	155	260	1	9.018 375	<del>50,50</del>	<b>32,83</b>
Propane	155	260	1	9.018 376	<del>50,50</del>	<b>32,83</b>

## Tripod Stand




Zinc-plated steel. With a circular top and flared legs.  
Zinc plating of tripod stands serves as temporary corrosion protection. May peel off after direct contact with an open burner flame.

**-30%**

Diam.	Height	PK	Cat. No.	Price	Now
mm	mm			EUR	EUR
100	180	1	9.034 110	<del>12,30</del>	<b>8,61</b>
120	210	1	9.034 112	<del>13,70</del>	<b>9,59</b>
120	250	1	6.200 910	<del>17,50</del>	<b>12,25</b>
120	260	1	6.234 831	<del>18,50</del>	<b>12,95</b>
140	220	1	9.034 114	<del>15,50</del>	<b>10,85</b>
160	230	1	6.059 957	<del>18,10</del>	<b>12,67</b>

## Wire gauze, steel, galvanised

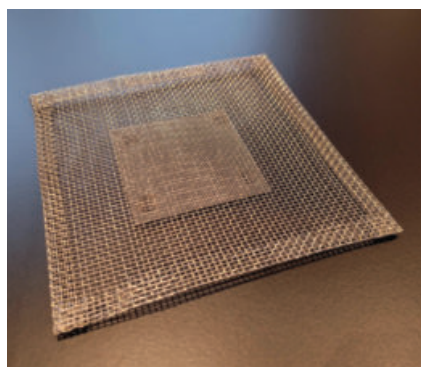

- Folded edges
- Fine-meshed, heat-resistant stainless steel centre

**-20%**

Dimensions (D x W)	PK	Cat. No.	Price	Now
mm			EUR	EUR
155 x 155	1	4.688 237	<del>4,75</del>	<b>3,80</b>
195 x 195	1	4.688 238	<del>6,00</del>	<b>4,80</b>

## Electric arc lighter

Lighter for lighting Bunsen and gas burners with an electrically generated arc. Since the lighter does not produce an open flame, it offers more safety than conventional lighters. The protective cover also prevents accidental ignition.

- Safe and easy-to-use
- Works with an electric arc
- LED light indicates when the battery is running low
- Charging via micro-USB cable (included)
- With safety cover and automatic switch-off after 10 seconds



**-50%**

Description	Dimensions (W x D x H)	PK	Cat. No.	Price	Now
	mm			EUR	EUR
Electric arc lighter	192 x 26 x 19	1	6.492 358	<del>17,80</del>	<b>8,90</b>
Electric arc lighter with flexible neck	219 x 26 x 18	1	6.492 359	<del>16,00</del>	<b>8,00</b>

## LLG-Short period timer with alarm



Easy-to-use combination timer and stopwatch, with large display and alarm function from/up to 99 min. and 59 sec. With a magnet for easy fixing. Battery LR 44 inclusive.

Dimensions (Ø x H): 54 x 16.5 mm  
Weight: approx.40 g

**-45%**

Type	PK	Cat. No.	Price	Now
LLG-Short period timer with alarm	1	9.260 150	EUR <del>10,25</del>	EUR <b>5,64</b>

## Temperature/Humidity data logger EBI 20-TH1



- Visual Alarm
- Max/min values on display
- Stores 40000 readings, can be read off at any time
- Replaceable battery

### Specifications

Measuring range temperature: -30 to +70 °C  
Measuring range humidity: 0% to 100% R.H.  
Resolution temperature: 0.1 °C  
Resolution humidity: 0.1% R.H.  
Memory: 40000 samples  
Sensor: NTC for temperature/capacitive for humidity  
Measuring period: 1 minute to 24 hours  
Power supply: 3V lithium (CR 2450)  
IP code: IP 52  
Housing: ABS  
Dimensions (L x W x H): 69 x 48 x 22 mm

**-35%**

Type	PK	Cat. No.	Price	Now
EBI 20-TH1-Set	1	9.908 074	EUR <del>223,00</del>	EUR <b>144,95</b>

## Digital Thermo-/Hygrometer EXACTO



For monitoring temperature and humidity. With a display of min and max values.

- Permanent display of daily maximum and minimum values with automatic reset after 24 hours.
- Backlighting
- With magnet, stand and mounting hole

### Specifications

Temperature range: -20 ... 70 °C  
Temperature accuracy: ±1 °C  
Temperature resolution: 1 °C  
Humidity range: 1 ... 99%  
Humidity accuracy: ±3% at 35 ... 75%, otherwise ±5%  
Humidity resolution: 1%  
Power supply: 2 x 1.5 V AAA (not included in scope of supply)  
Dimensions (W x D x H): 74 x 26 x 90 mm  
Weight: 106 g

**-45%**

Type	PK	Cat. No.	Price	Now
EXACTO	1	4.670 846	EUR <del>18,00</del>	EUR <b>9,90</b>

## Stopwatch, digital



1/100 sec., split time, clock, date with weekday, hourly chime, alarm with snooze function, lanyard.

Measuring range:  
Time up to 23 h, 59 min, 59 sec.

Dimensions (W x H x D):  
65 x 79 x 21 mm, weight: 50 g.

Incl. 1x 1.5 V LR44 battery, EK-EL.

**-40%**

Type	PK	Cat. No.	Price	Now
Stopwatch	1	9.851 018	EUR <del>9,40</del>	EUR <b>5,64</b>

## Temperature data logger Traceable® Excursion-Trac™, with 1 insertion probe



Temperature data logger for monitoring the temperature in refrigerators and freezers. Transmission of the data recorded in CSV format via a USB port.

- Display of max./min. Temperature and current temperature
- Smart-Alarm™ with visual and acoustic alarm in the event of limit violations
- Large measurement data memory
- Switchable °C/°F
- Storage of up to 10 different alarm messages
- NIST-traceable certificate included

**Scope of supply:** Temperature data logger with 1 insertion probe, 3 m cable, stand, hook-and-loop strips, magnetic strips, wall mount, batteries, NIST-traceable calibration certificate


### Specifications

Temperature range:	-90 ... 105 °C
Accuracy:	±0.2 °C
Resolution:	0.01 °C
Memory:	525600 measured values
Dimensions probe (WxDxH):	70 x 19 x 108 mm
Dimensions probe (L x Ø):	159 x 3.2 mm
Power supply:	2 x AAA

**-35%**

Type	PK	Cat. No.	Price	Now
Traceable® Excursion-Trac™ with 1 insertion probe	1	4.687 369	EUR 258,00	EUR 167,70

## 8-step irreversible temperature strips testoterm®

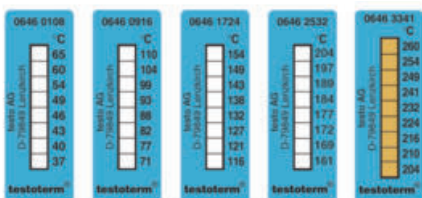

Strips for 8 temperatures with 5 types covering the measuring range from 37 to 260 °C. Each strip displays 8 different temperatures. Each strip measures 50 x 18 mm.

**-30%**

Measuring range °C	PK	Cat. No.	Price	Now
37 ... 65	10	9.246 002	EUR 31,00	EUR 21,70
71 ... 110	10	9.246 003	EUR 31,00	EUR 21,70
116 ... 154	10	9.246 004	EUR 31,00	EUR 21,70
161 ... 204	10	9.246 005	EUR 31,00	EUR 21,70
204 ... 260	10	9.246 006	EUR 31,00	EUR 21,70

## Laboratory Thermometer TFX 410



Robust and impact-resistant temperature measurement device for Pt 1000 penetration probe (connection Lemo size 0). Conform to HACCP and DIN EN 13485. With battery and factory calibration certificate.

- Probes made of stainless steel, for temperatures up to +400 °C
- Accuracy: exceeds DIN IEC 584, class 1

### Specifications:

Measurement range TFX 410:	-50 ... +300 °C
Accuracy:	±0.3 °C
Resolution:	0.1 °C
Sensor:	Pt 1000 (connection Lemo size 0)
Housing material:	ABS
Certificate:	3-point factory calibration
Operating temperature:	-25 °C to +50 °C
Storage temperature:	-30 °C to +70 °C
Dimensions (L x W x H):	54 x 22 x 109 mm (without probe)
Weight:	Approximately 90 g
Power supply:	3.0 V Lithium, replaceable
Battery lifetime:	Approximately 5 years
IP code:	IP 67

**-40%**

Type	Description	PK	Cat. No.	Price	Now
TFX 410	Laboratory thermometer with assigned probe	1	6.206 350	EUR 277,00	EUR 166,20
TFX 410-1	Laboratory thermometer (without probe)	1	6.207 171	EUR 239,00	EUR 143,40
TFX 410-1 + TPX 200	Laboratory thermometer with probe without cable	1	6.205 687	EUR 349,00	EUR 209,40
TFX 410-1 + TPX 400	Laboratory thermometer with probe with tip and 60 cm cable	1	6.205 686	EUR 349,00	EUR 209,40
TFX 410-1 + TPX 400-150	Laboratory thermometer with probe with tip and 150 cm cable	1	6.243 018	EUR 349,00	EUR 209,40

## LLG- General-purpose thermometers, red filling



Enclosed-scale type, with eyelet. With uncoated, prismatic measuring capillary. Red spirit filling (except 9.235 265: blue).

**-50%**

Measuring range °C	Length mm	Diam. mm	PK	Cat. No.	Price	Now
-10/0 ... 50	200	7 ... 8	1	9.235 245	EUR 15,40	EUR 7,70
-10/0 ... 100	260	7 ... 8	1	9.235 250	EUR 15,70	EUR 7,85
-10/0 ... 150	260	7 ... 8	1	9.235 255	EUR 17,30	EUR 8,65
-10/0 ... 200*	300	7 ... 8	1	9.235 260	EUR 19,90	EUR 9,95
-10/0 ... 250*	300	7 ... 8	1	9.235 265	EUR 29,10	EUR 14,55

\* Note: With these types the colour can fade after extended periods of use at higher temperatures.

## Magnetic stirrer with heating LLG-uniSTIRRER 3 pro, complete set

- ! - New Design
- Proven Quality



Universal magnetic stirrer with outstanding price-performance ratio and new, improved design.

- Stainless steel plate with ceramic coating
- Digital speed and temperature control
- LED display
- "HOT" display for hot surfaces, even when the device is switched off
- Fixed safety circuit of the hotplate temperature at 320 °C
- Connection for PT1000 temperature probe, integrated control function. The control accuracy with the temperature sensor is ±0.5 °C.

**Scope of supply:** Magnetic stirrer, PT1000 temperature probe, rod, holder



### Specifications

Max. Stirring volume:	3 l
Speed:	200 ... 1500 rpm
Heating temperature:	RT ... 280 °C
Ø working area:	135 mm
Permissible ambient temperature:	5 ... 40 °C
Dimensions (WxDxH):	220 x 160 x 95 mm
Weight:	1400 g
Power supply:	200 ... 240 V/100 ... 120 V, 50/60 Hz
Protection class (IP):	IP 21



**-50%**

Type	Plug type	PK	Cat. No.	Price	Now
LLG-uniSTIRRER 3 pro	EU	1	6.263 400	EUR <del>366,50</del>	EUR <b>183,25</b>

## Magnetic stirrer TWISTER

- ! - Innovative Concept
- Modular System



Without heating. The TWISTER is a universal and particularly compact mixer with a magnetic drive. The mixing positions can be controlled separately or simultaneously (leader-follower principle).

- Intuitive and chemically resistant 360° LED glass display for conveying all information without an alphanumeric display
- Integrated beaker detection
- Suitable for operation in incubators up to 40 °C

**Set 1 Scope of delivery:** 1 x TWISTER magnetic stirrer, 1 x plug-in power supply unit with adapter, 1 x IKAFLON 25-round magnetic stirring bar.

**Set 2 Scope of delivery:** 2 x magnetic stirrers TWISTER, 1 x plug-in power supply unit with adapter, 2 x magnetic stirring bars IKAFLON 25 rounds.

### Specifications

Max. stirred volume per position:	5 l
Speed range:	100 ... 3000 rpm
Permissible ambient temperature:	5 ... 40 °C
Permissible relative humidity:	80%
Material Top plate:	Glass
Dimensions Top plate (W x D):	124 x 124 mm
Dimensions (W x D x H):	135 x 135 x 24 mm
Weight:	0.6 kg
Power supply:	100 ... 240 V, 50/60 Hz
IP code:	IP 66

**-30%**

Type	Stirring capacity	PK	Cat. No.	Price	Now
TWISTER Set 1	5	1	4.685 997	EUR <del>419,00</del>	EUR <b>293,30</b>
TWISTER Set 2	10	1	4.685 998	EUR <del>787,00</del>	EUR <b>550,90</b>

## Magnetic stirrer MST Digital



Small, lightweight magnetic stirrer for volumes up to 5 l.

- Timer
- Auto reverse function

### Specifications

Volume (H <sub>2</sub> O):	5 l
Speed (max.):	1500 rpm
Display:	Digital
Timer:	1 ... 900 min
Dimensions (W x D x H):	120 x 145 x 50 mm
Power supply:	100 ... 240 V, 50/60 Hz
Warranty:	3 years

**-30%**

Type	PK	Cat. No.	Price	Now
MST Digital	1	4.666 683	EUR <del>152,00</del>	EUR <b>106,40</b>

## Magnetic stirring bar protest set 1



Magnetic stirring bars protest<sup>®</sup>, Set 1 in a transparent box with a hinged lid. Consisting of: 2x 20 x 6 mm, 2x 25 x 6mm, 2x 30 x 6 mm, 2x 40 x 8 mm, 1x 50 x 8 mm, 1x 60 x 9 mm

**-40%**

Description	PK	Cat. No.	Price	Now
MS-Set 1	1	6.267 317	EUR <del>44,30</del>	EUR <b>26,58</b>



## Rocking shakers Duomax 1030



- Different Tilt Angles
- Overheating Protection



The Rocking shakers Duomax are suitable for the modular Incubator 1000 and are recommended for applications which require variable temperatures. With 2-dimensional tilting movement, suitable for Petri dishes, culture bottles, Erlenmeyer flasks and all standard vessels.

- 2 models available: Tilt angle to 5° for soft and gentle movements or tilt angle to 10° for a much stronger motion
- An overtemperature sensor preventatively shuts off the unit in a dangerous heat-up situation, particularly valuable for you in case of continuous operation
- Set and continuously adjust the variable speed on the analogue control knob, suitable for all standard vessels

### Specifications

Type of movement:	rocking
Tumbling angle:	5° or 10°
Speed range:	2 ... 50 rpm
Max. Load:	5 kg
Timer:	1 ... 120 min
Power consumption:	115 W
Permissible ambient temperature:	5 ... 31 °C
Permissible relative moisture:	80%
Platform dimensions (W x D):	290 x 258 mm
Overall dimensions (W x D x H):	320 x 375 x 185 mm
Weight:	8 kg
Power supply:	230 V, 50/60 Hz
Protection class acc. to DIN EN 60529:	IP 40

Type	Inclination angle	PK	Cat. No.	Price	Now
	°			EUR	EUR
Duomax 1030	5	1	9.839 855	<del>1.806,00</del>	<b>1.354,50</b>
Duomax 1030	10	1	9.839 856	<del>1.794,00</del>	<b>1.345,50</b>

**-25%**

## Shaker VORTEX 2



Vortex shaker especially for short-time operation (Touch function) or continuous operation.

### Specifications

Type of movement:	orbital
Orbital diameter:	4 mm
Max. shaken quantity:	400 g
Motor rating input/output:	39/9 W
Speed range:	500 to 2500 rpm
Dimensions (W x H x D):	120 x 138 x 140 mm
Weight:	3.9 kg
Enclosure according to DIN EN 60529:	IP 21

Type	Plug type	PK	Cat. No.	Price	Now
				EUR	EUR
VORTEX 2	EU	1	7.971 443	<del>293,00</del>	<b>205,10</b>
VORTEX 2	UK	1	6.317 556	<del>293,00</del>	<b>205,10</b>
VORTEX 2	CH	1	6.492 282	<del>293,00</del>	<b>205,10</b>

**-30%**

## LLG-Centrifuge Tubes economy, PP



- With additional graduation in the cone base
- Max. rotate speed up to 12000 x g and 6000 x g for self-standing tubes
- Autoclavable at 121 °C
- Freezable to -80 °C
- Pyrogen free
- DNase/RNase-free
- Aseptically, bulk pack



Capacity	Form	Height	Diam.	PK	Cat. No.	Price	Now
ml		mm	mm			EUR	EUR
15	conical	119.6	17	500	6.270 403	<del>116,50</del>	<b>46,60</b>
50	conical	113.9	30	500	6.270 404	<del>129,30</del>	<b>51,72</b>
50	with rim	116.5	30	500	6.270 405	<del>155,90</del>	<b>62,36</b>

**-60%**

## Precision balances Entris® II, LLG Premium Line



SARTORIUS



- LLG Premium Line
- Quality "Made in Germany"
- Very Fast Stabilization and Settling Times
- High Chemical Resistance



The evolution of the Entris® balance series. The large portfolio offers the right model for every weighing task. With many convenient functions for efficiency and accuracy in the laboratory. Quality "Made in Germany".

- Modern sensors ensure very fast stabilisation time
- Automatic, internal calibration and adjustment function (isoCAL) for all "i" models
- A weighing platform made of stainless steel
- Excellent readability and operability with a hybrid touch display

**Scope of supply:** Precision balance, power supply unit, display protection cover

### Specifications

Weighing platform: 182 x 182 mm  
 Dimensions (W x D x H): 219 x 317 x 94 mm  
 Power supply: 100 ... 240 V, 50 ... 60 Hz

**-20%**

Type	Capacity	PK	Cat. No.	Price	Now
	g			EUR	EUR
BCE622i-1S	620	1	4.669 160	<del>1.280,00</del>	<b>1.024,00</b>
BCE822i-1S	820	1	4.669 184	<del>1.440,00</del>	<b>1.128,00</b>
BCE2202i-1S	2200	1	4.669 120	<del>1.650,00</del>	<b>1.320,00</b>
BCE3202i-1S	3200	1	4.669 132	<del>1.770,00</del>	<b>1.416,00</b>
BCE4202i-1S	4200	1	4.669 140	<del>1.880,00</del>	<b>1.504,00</b>
BCE6202i-1S	6200	1	4.669 156	<del>2.120,00</del>	<b>1.696,00</b>

## LLG-Sample dishes, Aluminium



High-quality aluminium sample dishes for moisture determination.

**-75%**

Description	Diam.	Height	PK	Cat. No.	Price	Now
	mm	mm			EUR	EUR
Sample dishes	90	7	80	6.282 670	<del>44,40</del>	<b>11,03</b>
Sample dishes	100	7	80	6.265 408	<del>45,00</del>	<b>11,25</b>
Sample dishes with rim	100	7	80	6.281 537	<del>45,00</del>	<b>11,25</b>

## Analytical balance Type ACJ



- Single Cell Weighing System
- Short Settling Time
- Stable Temperature Behaviour



The bestseller in analytical balances, now with a high-quality single-cell weighing system.

- With EC type approval, integrated RS-232 and USB data interface
- Automatic internal adjustment in the case of a change in temperature >2 °C or time-controlled every 4 hours
- Dosage aid: High-stability mode and other filter settings can be selected
- Simple recipe weighing and documenting with a combined tare/print function
- Large LCD, digit height 14 mm



A DAkkS calibration with a DAkkS calibration certificate is optionally available and must be specified when ordering the balances.

### Specifications

Overall dimensions (W x D x H): 210 x 340 x 325 mm  
 Dimensions weighing space (W x D x H): 174 x 162 x 227 mm  
 Permissible ambient temperature: 10 °C/30 °C  
 Net weight: approx. 6 kg

**-40%**

Type	Capacity	PK	Cat. No.	Price	Now
	g			EUR	EUR
ACJ 80-4M	82	1	4.680 329	<del>1.370,00</del>	<b>822,00</b>
ACJ 100-4M	120	1	6.316 869	<del>1.420,00</del>	<b>858,00</b>
ACJ 200-4M	220	1	4.680 330	<del>1.530,00</del>	<b>918,00</b>
ACJ 300-4M	320	1	6.314 246	<del>1.730,00</del>	<b>1.038,00</b>

## Halogen Moisture Analyser DBS 60-3



Modern moisture analyser with 10 memories and graphic display.

- Halogen quartz glass heater 400 W
- Backlit LCD, digit height 15 mm: Previous drying time, current temperature, unit for displaying the results, current moisture content in %, drying mode/Status display drying
- Observation window over the sample, useful during the initial adjustment



### Specifications

Readability: 0.01% or 0.001 g  
 Weighing range, max: 60 g  
 Reproducibility, weight of sample 2 g: 0.15%  
 Reproducibility, weight of sample 10 g: 0.02%  
 Temperature range: 50 ... 200 °C  
 Dimensions (W x D x H): 204 x 336 x 167 mm

**-40%**

Type	PK	Cat. No.	Price	Now
			EUR	EUR
DBS 60-3	1	9.901 441	<del>1.650,00</del>	<b>990,00</b>

Mikrocentrifuge Frontier™ FC5513-K



With Unbalance Sensor



Compact high-speed microcentrifuge with modern touch-wheel interface. Ideal suited for general laboratory applications.

- Backlit, two-lined LCD
- Powerful brushless induction motor
- 10 acceleration and deceleration rates
- Memory for up to 99 parameters
- Imbalance sensor
- Small footprint

**Scope of supply:** Centrifuge, angle rotor for 24 x 1.5/2.0 ml tubes

**Specifications**

Max. RCF:	17317 x g
Max. Speed:	20 ... 13500 rpm
Max. Load:	24 x 1.5/2.0 ml
Timer:	10 s ... 99 h 59 min 59 s, continuous
Power consumption:	170 W
Dimensions (W x D x H):	277 x 356 x 236 mm
Weight:	13.1 kg
Power supply:	230 V, 50/60 Hz

**-40%**

Type	PK	Cat. No.	Price	Now
FC5513-K	1	6.323 158	<del>1.670,00</del>	<b>1.002,00</b>

LLG-Microcentrifuge tubes, PP



Certified DNase-, RNase- and pyrogen-free. Clear, in bags. Suitable for microbiology. Guaranteed metal-free.

**Specifications**  
**Autoclavability**

Temperature:	121 °C
Pressure:	1.05 bar or 15 psi
Time:	20 min or less

**Centrifugation**

Fixed angle rotor:	25000 x g
Swing out rotor:	70000 x g

**-50%**

Form	Volume	Max.	PK	Cat. No.	Price	Now
	ml	rcf			EUR	EUR
conical	0.5	20000	1000	9.409 023	<del>21,10</del>	<b>10,55</b>
conical	1.5	25000	1000	9.409 024	<del>21,00</del>	<b>10,95</b>
round	2.0	25000	1000	9.409 025	<del>25,00</del>	<b>12,95</b>

Mini centrifuges LLG-uniCFUGE 2 and LLG-uniCFUGE 2/5



- Proven Quality
- Topseller



LLG-uniCFUGE 2



LLG-uniCFUGE 2/5

Compact and reasonably priced mini centrifuges with two rotor types. Speed can be adjusted to 4000 rpm or 6000 rpm. Powerful motor for fast starting. Quick stop when the lid is opened.

LLG-uniCFUGE 2 with **Universal rotor** for 6 x 1.5/2.0 ml and 6 x 0.5 ml tubes and 2 times 8 x 0.2 ml PCR strips.

LLG-uniCFUGE 2/5 with **rotor for 4 x 5 ml tubes**.

**Scope of supply:** Centrifuge, mains cable

**Specifications**

Max. RCF:	1200 x g and 2000 x g
Max. speed:	4000 rpm and 6000 rpm
Motor:	brushless DC motor
Max. load:	6 x 0.5/1.5/2 ml and 2 x 8-tube PCR strips (0.2 ml) or 4 x 5 ml tubes
Dimensions (diam. x H):	140 x 120 mm
Weight:	0.7 kg
Power supply:	100 ... 240 V, 50/60 Hz
Warranty:	3 years

**-65%**

Description	Plug type	PK	Cat. No.	Price	Now
LLG-uniCFUGE 2 with universal rotor	EU	1	6.263 510	<del>225,00</del>	<b>78,75</b>
LLG-uniCFUGE 2/5 with rotor for 5 ml tubes	EU	1	6.263 515	<del>225,00</del>	<b>78,75</b>

LLG-Centrifuge tubes, 5 ml, PP, with Safe-Lock lid

- Conical shape
- Frosted labelling area on the lid
- Lid membrane can be easily pierced
- Easy opening and closing with one hand
- Graduation lines for visual volume control
- RNase- and DNase-free
- max. RZB: 25000 x g
- Temperature range: -86 ... 121 °C



**-75%**

Capacity	PK	Cat. No.	Price	Now
ml			EUR	EUR
5	200	6.322 888	<del>36,00</del>	<b>9,00</b>

# LABORTOPS

Mini-Diaphragm vacuum pumps LABOPORT® N96, chemically-resistant



- Topseller
- Compact
- High Flow Rate

The pump combines a high flow rate with a very compact design. Suitable for filtration, SPE, and liquid aspiration using a vacuum. Due to the manual rotational speed control, the pump is quiet, very energy efficient, and can be optimally adjusted following the application.

- Easy-to-clean surface
- Minimised footprint
- Adjustable in flowrate due to manual rotational speed control
- PTFE-coated diaphragm for use with aggressive/corrosive gases and vapours

**Specifications**

Ultimate vacuum (abs.):	<130 mbar
Operating pressure:	2.5 bar
Connectors for tube:	ID 6 mm
Permissible ambient temperature:	5 ... 40 °C
Pump head:	PPS
Diaphragm:	PTFE coated
Valves:	FKM



**-35%**

Type	Flow rate L / min.	Ultimate vacuum mbar (abs).	Dimensions (W x D x H) mm	Weight kg	PK	Cat. No.	Price EUR	Now EUR
N96	7	130	75 x 156 x 119	1.3	1	4.672.374	<del>468,00</del>	<b>304,20</b>