


Elevator Series Wireless Bridge

Elevate Your Connection



Say goodbye to cables and **hello to wireless elevator solutions**

Easy installation, greater peace of mind

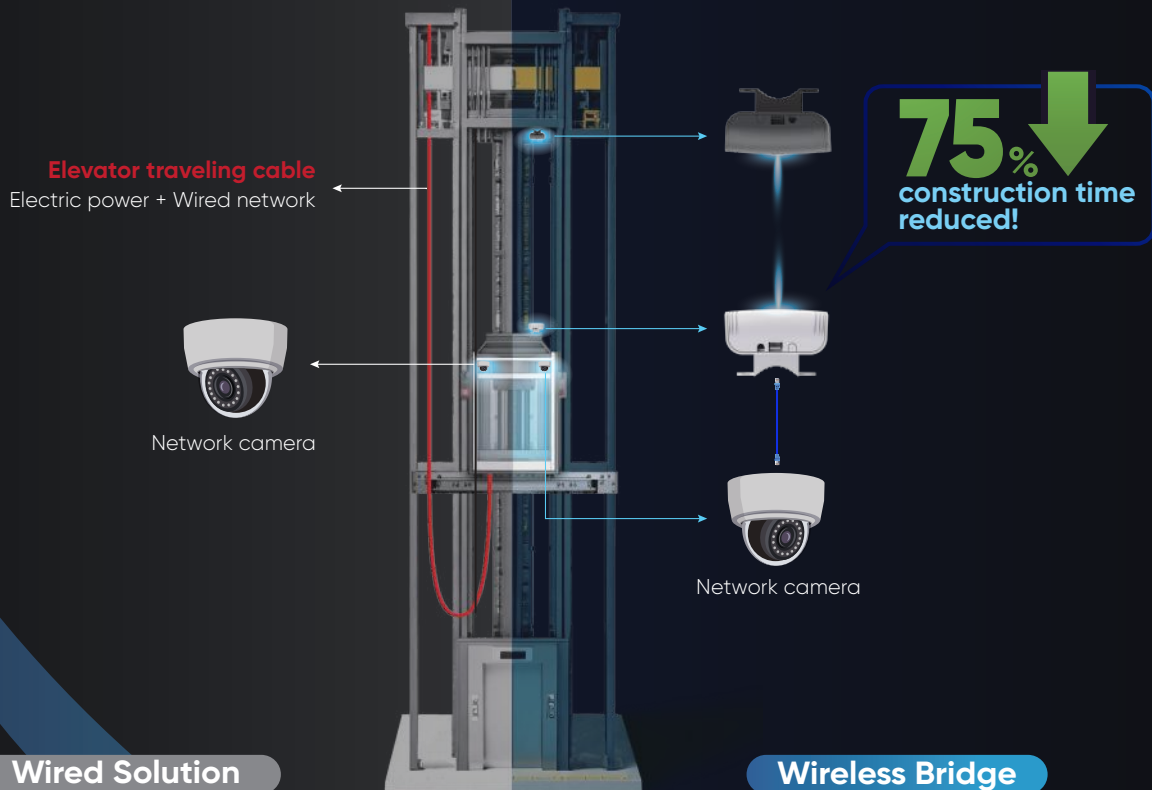


- **Complex** setup requiring wired installation
- **High** maintenance costs

- **Simple** setup with PoE and wireless
- **Easy** maintenance, reduced costs

Streamline elevator ads via remote management

Connect elevator advertising screens to monitoring centers for remote ads updates, no longer needing manual SD card changes.

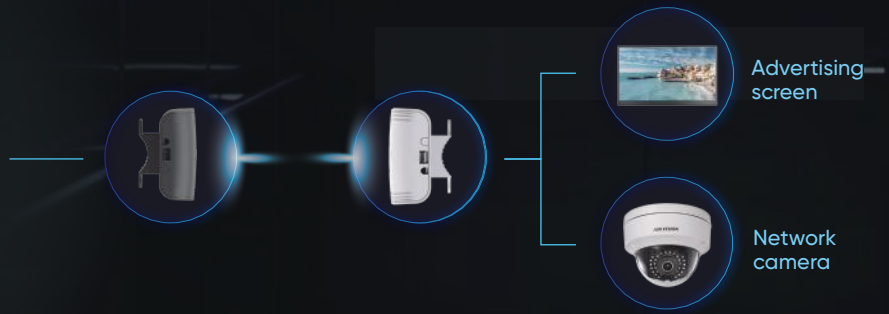

Why choose Hikvision wireless bridges?



Dual network ports

Connect cameras and advertising screens simultaneously



Standard PoE input & output

Power cameras directly without extra adapters



Automatic pairing

Enjoy plug and play convenience for easy setup

**The features are currently available for specific products.*



DS-3WF0BC-2NT(B)

- 200 m, 2.4 GHz, 1 FE
- Super cost-effective



DS-3WF0EC-2NT

- 500 m, 2.4 GHz, 2 FE
- 12-24 V passive PoE



DS-3WF0EC-5ACT(B)

- 500 m, 5 GHz, 2 FE
- Standard PoE Input & Output



www.hikvision.com
support@hikvision.com



Distributor Address