


InertSearch™ for GC

InertCap® Applications

Xylenes, Styrene

Data No. GA064-0000

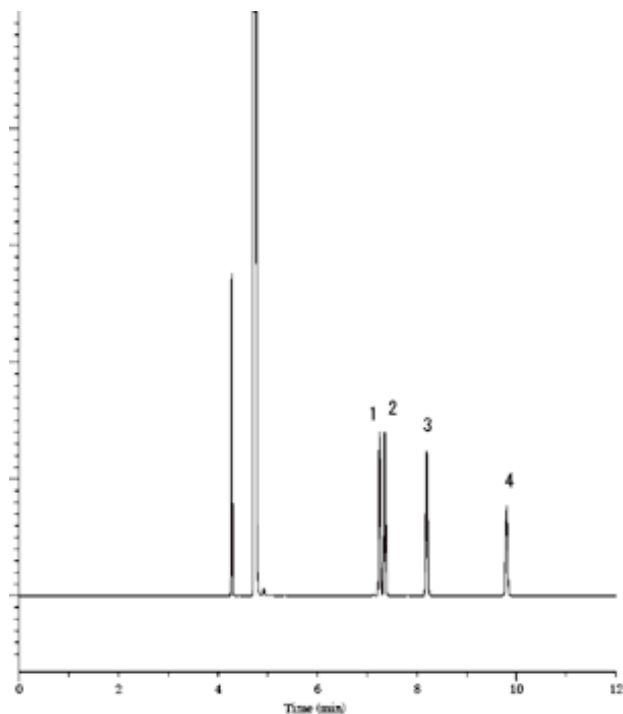

System : GC/FID
Column : TC-FFAP
0.25mmI.D.×60m df=0.5µm
Column Temp. : 150°C

Injection : 250°C
Detection : FID
250°C

Sample : Xylenes Styrene

Solutes : 1. p-Xylene
2. m-Xylene
3. o-Xylene
4. Styrene