



TC-30/60

- 13 mph max speed
- 136 in turning radius
- 30,000-60,000 lb tow capacity*



VERSATILE TOWING SOLUTIONS



The TC-30/60 tow tractor is designed to provide a versatile and highly maneuverable solution for your towing requirements demanding 3,000-6,000 pounds (14-27 kN) of drawbar pull.

The TC-30/60 is available with multiple engine packages to meet a variety of environmental conditions. The standard unit is equipped with a gas engine, fully welded steel frame, all-wheel suspension with hydroboost, dual caliper rear disc brakes, and tractor style tires. Some customizable options are an enclosed cab or overhead guard, hydrostatic steering, and diesel or LPG engine. This efficient towing vehicle has excellent steering capability and durability that will withstand harsh environments while maintaining operator comfort. Visit our website for additional Tiger tractor images, videos, information, and custom modifications at taylor-dunn.com.

SPEED	13 mph	21 km/h
TOW CAPACITY	30-60k lb	14-27 t
TURNING RADIUS	136 in	345 cm
LENGTH	113 in	287 cm
WIDTH	55.5 in	141 cm
HEIGHT (- cab)	60 in	152 cm

*** Based on Standard Configuration**

Actual towing capacity is dependent on application, vehicle configuration, ballast weight, and operating environment.

Note: Photos are shown with optional features.

FEATURES & BENEFITS:


- Hydroboost, dual caliper rear disc brakes
- Fully welded steel frame
- Available in gas, diesel or LPG
- Customizable to fit your application



TC-30/60


PERFORMANCE

DRAWBAR PULL	3000-6000 lb	14-27 kN
MAX SPEED (UNLOADED)	13 mph	21 km/h
TURNING RADIUS	136 in	345 cm

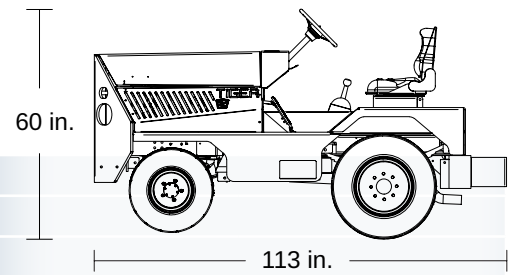

DIMENSIONS

OVERALL LENGTH	113 in	287 cm
OVERALL WIDTH	55.5 in	141 cm
OVERALL HEIGHT (- cab)	60 in	152 cm
OVERALL HEIGHT (+ cab)	78 in	198 cm
WHEEL BASE	58.5 in	149 cm
GROUND CLEARANCE	5 in	13 cm



POWER SUPPLY / DRIVE TRAIN

ENGINE	GM I-4, 3.0L, Gas, 95 hp / 166 lb-ft Torque
TRANSMISSION	Automatic 3-Speed, Neutral Start Interlock Switch
SYSTEM VOLTAGE	12V Negative Ground w/ Heavy-Duty Starter, Alternator and Battery

CHASSIS

FRAME	Fully Welded Steel
STEERING	Manual Steering Gearbox
DRIVE AXLE	Double Reduction Heavy Duty
SUSPENSION	Leaf Springs, Front and Rear
BRAKES	Hydroboost, Dual Caliper Rear Wheel Disc, Hand-Operated Parking Brake

COOLING SYSTEM

ENGINE	Water Cooled
TRANSMISSION	Radiator Cooled

GENERAL

UNIT WEIGHT (lb/kg)	TC-30: 4200/1905	TC-40: 5550/2494	TC-50: 6800/3084	TC-60: 7800/3538
FUEL SYSTEM	12 Gallon Gas Tank	45.4 L		
TIRES	Front: Load Range E, 6.50 X 10 Rear: Load Range E, LT225 / 75R16			
SEAT	Driver Vinyl Bucket Type, Adjustable			
INSTRUMENTATION	Engine Coolant Temperature, Engine Oil Pressure, Voltmeter, Fuel Level, Hour Meter, Electric Horn			
LIGHT ACCESSORIES	Dual Head Lights, Brake/Tail Lights & Reverse Lights			
CONFORMANCE	This vehicle conforms to applicable sections as described in OSHA Standard Section 1910.178 (Powered Industrial Trucks) and with all applicable portions of the American National Standard for Operator Controlled Industrial Tow Tractors (ANSI B56.9).			

OPTIONS

- SHIFT INHIBITOR
- BACK-UP ALARM
- AIR CONDITIONER
- TURN SIGNALS
- FRONT BRAKES
- SNOW PLOW
- 3.3L CUMMINS DIESEL OR LPG
- PASSENGER SEAT/SEAT BELT
- BATTERY DISCONNECT SWITCH
- CAB OR OVERHEAD GUARD
- BEACON OR STROBE LIGHT
- HYDROSTATIC STEERING
- HEATER / DEFROSTER
- VARIOUS HITCHES
- ENGINE SHUTDOWN
- FIRE EXTINGUISHER
- CUSTOM PAINT COLOR

Specifications, standard equipment, accessories and modifications are subject to change without notice.