



SOLUTIONS FOR CONFINED SPACE, FALL PROTECTION & LOAD ARREST

www.globestocksafety.com

www.glob

Welcome

Established in 1982, Globestock Safety manufacture and supply a wide range of high-quality systems for confined space entry, fall protection and load arrest.

We take immense pride in our many years of British manufacturing heritage and to this day we engineer products that we are proud to put our name to. An in-house Design & Development department, backed-up by our manufacturing operation in the same building, alongside our quality test and inspection areas, all ensure we have control over every aspect of our products.

For products we don't manufacture ourselves, we select only the most reputable manufacturers and the very most reliable equipment.

You can be confident in our ability to deliver for you and your client.



+44 (0) 1691 654 966 | info@globestocksafety.com | www.globestocksafety.com

estocksafety.com



December 2024

Globestock Ltd. reserve the right to change specifications without prior notice.
All information herein is copyright protected by Globestock Ltd. 2024.
The Globestock name is a registered trademark of Globestock Ltd.
The GUARD LOAD ARREST logo is a registered trademark of Globestock Ltd.

SAVER



FALL ARRESTER WITH RESCUE MECHANISM / SRL-R

The highly-acclaimed SAVER is a retractable type fall arrester with an integrated emergency rescue mechanism (SRL-R 3-way).

May be used in conjunction with appropriate, certified anchorages and harnesses in confined space / fall protection applications.



SAVER fitted to a SENTRY Tripod



- Recovery winch with anti-run brake
- Shock absorbing brake mechanism
- Approx. 3 m per minute retrieval
- Stopping distance 0.6 m to 1 m
- Snaphook karabiner with fall indicator
- Synthetic rope option

Our TF heat-treated aluminium castings are ultra robust and durable, capable of withstanding the harshest conditions and rough treatment.

The rope is secured with a secondary backup feature to ensure full protection even at the rope termination.

A top shackle is not included with the SAVER.

SAVER ACCESSORIES



Arrester brackets enable a SAVER or STOP fall arrester (SRL) to be securely fitted to a SENTRY Tripod.

GSE230AB14 (for 32 -46 ft)
GSE230AB34 (for 82 -98 ft)



Holdall Bag
GSE-H/ALL









GSE430G

GSE414G


SETTING UP THE SAVER SRL-R

GLOBESTOCK
SAFETY

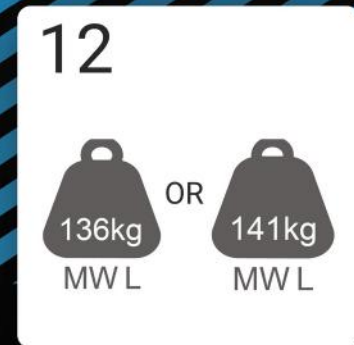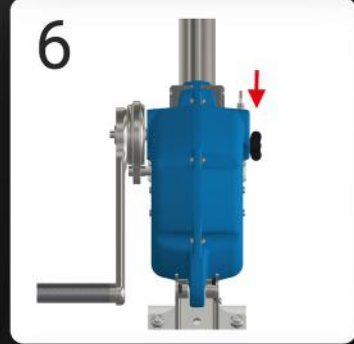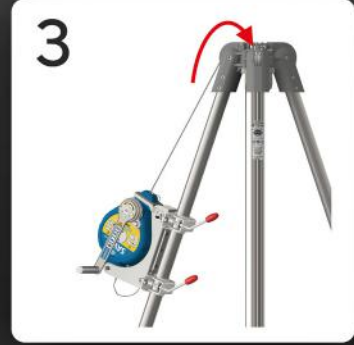

Product Code	Conformity	Max. Working Load	Min. Working Load	Lifeline Length	Lifeline / Snap Hook Material
GSE414G	EN 360: 2023 / EN 1496:2017 Class A / ANSI/ASSP Z359.14-2021 / CSA Z259.2.2-17 / AS-NZS 1891.3-2020	141 kg / 310 lb	60 kg / 132 lb	14 m / 46 ft	Zinc plated steel
GSE410SSK				10 m / 32 ft	Stainless steel
GSE414P				14 m / 46 ft	Synthetic lifeline, zinc plated steel snap hook
GSE430G				30 m / 98 ft	Zinc plated steel
GSE425SSK				25 m / 82 ft	Stainless steel
GSE430P				30 m / 98 ft	Synthetic lifeline, zinc plated steel snap hook

GSE414G / GSE410SSK / GSE414P
Measurements in mm

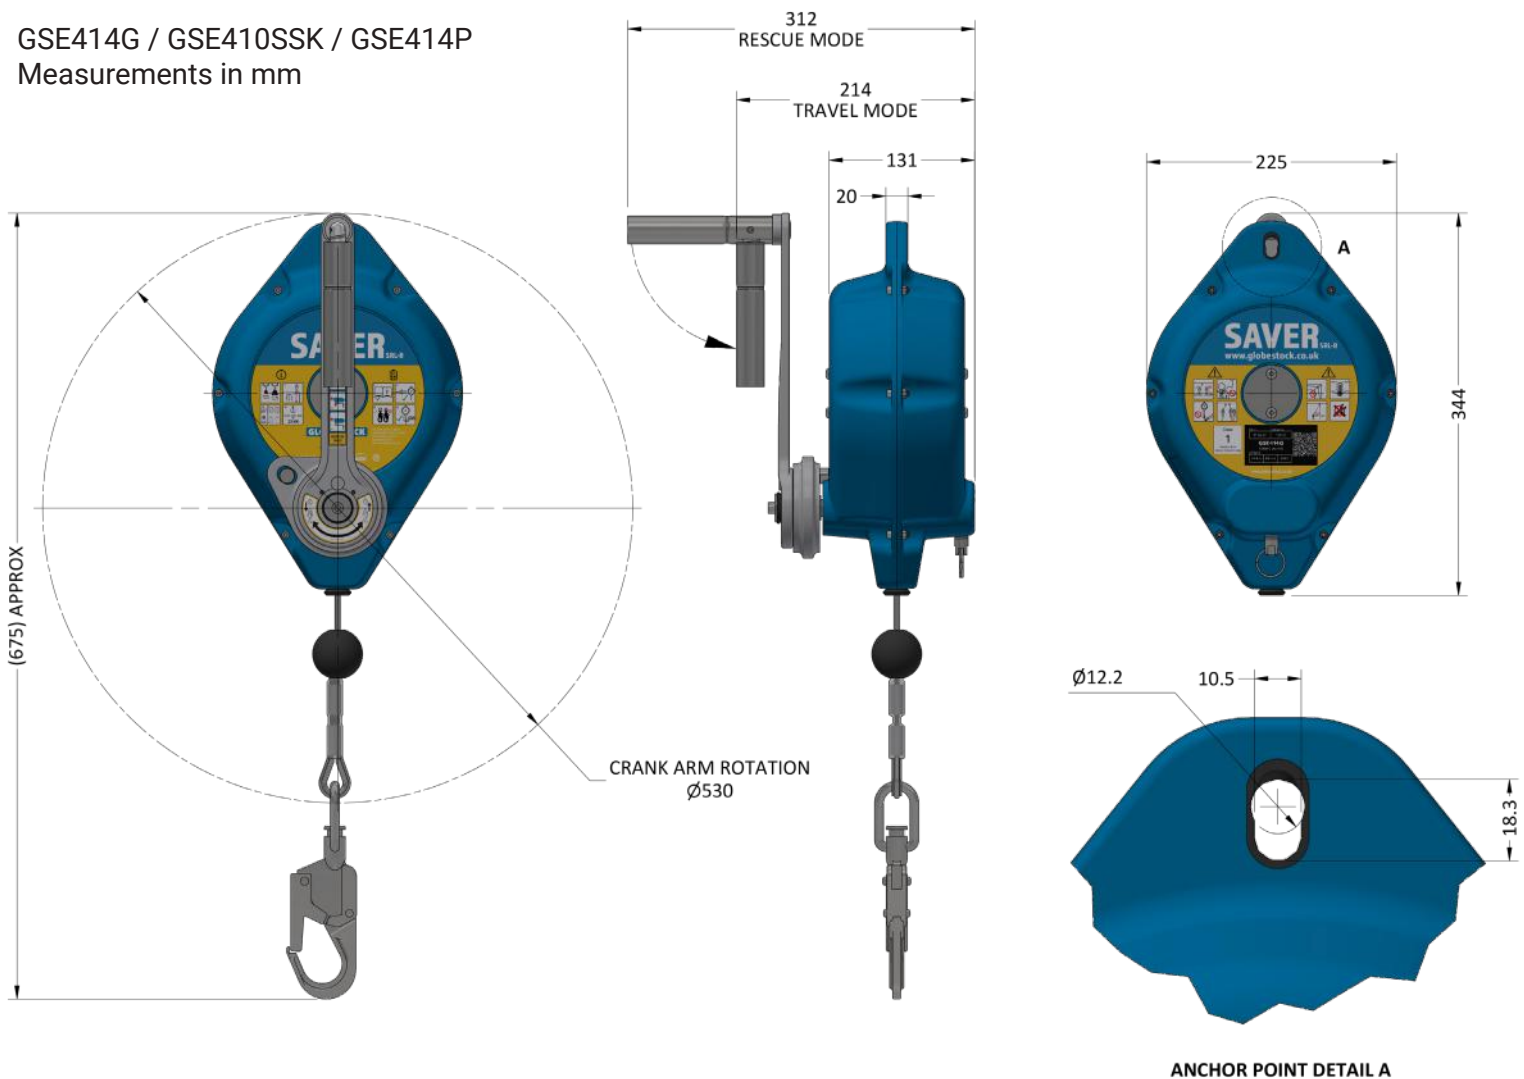

SENTRY



CONFINED SPACE SYSTEM

The SENTRY Tripod is an ANSI/ASSP Z359.18-2017 Type A + CSA Z259.15-22 Class A anchorage device that is durable and lightweight. It provides a secure and stable anchorage for confined space entry.

SENTRY TRIPOD

XTIRPA WINCH

**SAVER
SRL-R**

May be used as an anchor by more than one person simultaneously, providing the max. working load is not exceeded.

Available in two different sizes:
Compact (GSE230C) / *Standard* (GSE230S)

- Robust and lightweight
- Simple folding design
- Three pulley head
- Two person




Product Code	MWL	Weight (Approx)	Conformities
GSE230C	200 kg (personnel) 250 kg (materials)	18 kg	EN795:2012 type B CEN/TS 16415:2013 Directive 2006/42/ EC ISO 12100:2010 ANSI/ASSP Z359.18-2017 Type A
GSE230S		21 kg	CSA Z259.15-22 Class A AS/NZS 5532:2013 OSHA 1910.140 OSHA 1926.502






SETTING UP THE SENTRY KIT


GLOBESTOCK
SAFETY





PRE-USE
CHECK




PRE-USE
CHECK



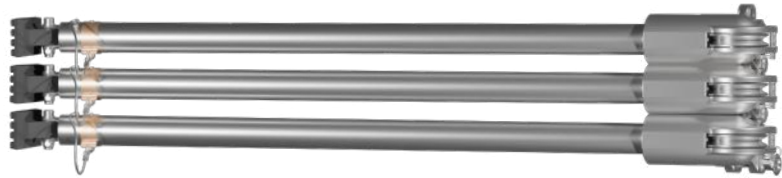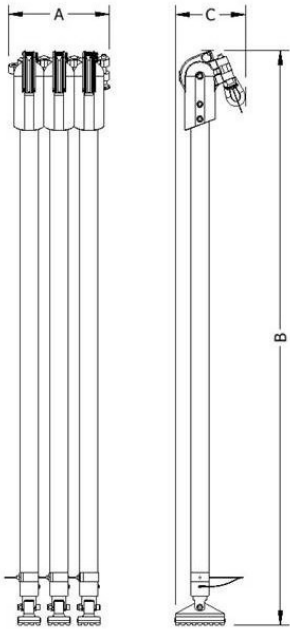

Folded dimensions (inches):

SIZE	A	B	C
COMPACT (GSE230C)	270	1217	180
STANDARD (GSE230S)	270	1527	180

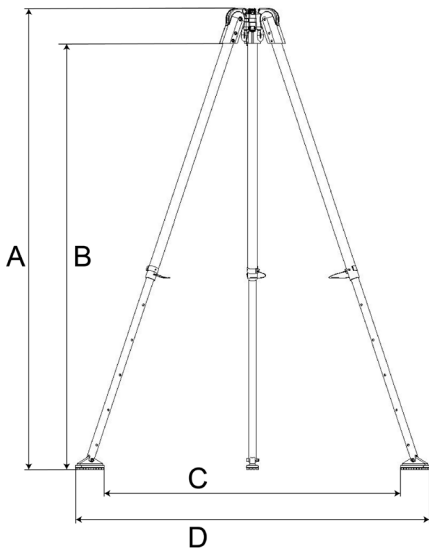

Assembled dimensions (inches):


SIZE / CODE	A	B	C	D
COMPACT (GSE230C) *	1131	963	841	1112
COMPACT (GSE230C) **	1747	1579	1315	1585
STANDARD (GSE230S) *	1421	1253	1064	1334
STANDARD (GSE230S) **	2307	2172	1744	2015

* at lowest setting
 ** at tallest setting

TRIPOD BAG

Tripod Bag GSETB230

- Document window
- Wheels
- Internal straps
- Water resistant fabric and zip
- 1000D Cordura

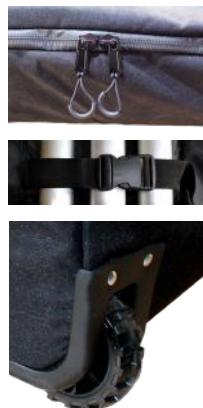

STOP




FALL ARRESTER / SRL

The STOP is a durable fall arrest block (SRL 2-way) with a steel or synthetic cable. Engineered to remain in service for longer and conform to the latest ANSI/ASSP Z359.14-2021 and CSA Z259.2.2-17.



- Shock absorbing brake
- Stopping distance 0.6 m to 1 m
- Snaphook karabiner with fall indicator
- Steel or synthetic lifeline options
- Built to last
- Includes top karabiner



ANCHOR POINT DETAIL A



KARABINER DETAIL B

GSE514G / GSE510SSK / GSE514P
Measurements in mm

Product Code	Conformity	Max. Working Load	Min. Working Load	Lifeline Length	Lifeline / Snap Hook Material
GSE510SSK	BS EN 360:2023 ANSI/ASSP Z359.14-2021 CSA Z259.2.2-17 AS-NZS 1891.3-2020	310 lb / 141 kg	132 lb / 60 kg	32 ft / 10 m	Stainless steel
GSE514G				46 ft / 14 m	Zinc plated steel
GSE514P					Synthetic lifeline, zinc plated steel snap hook
GSE525SSK				82 ft / 25 m	Stainless steel
GE530G				98 ft / 30 m	Zinc plated steel
GSE530P					Synthetic lifeline, zinc plated steel snap hook


SYNTHETIC ROPE OPTION

The SAVER & STOP fall arresters are available with a steel or synthetic lifeline.

The new synthetic models follow the same construction and function of the popular SAVER/STOP fall arrester range, but are fitted with a high performance, Dyneema-equivalent HMPE fibre lifeline with a minimum brake load 7495 lbs. Using synthetic ropes for fall arrest systems can offer several benefits compared to traditional materials like steel cables:



- **Lightweight:** Synthetic ropes are significantly lighter than steel cables, making them easier to handle and transport.
- **Energy Absorption:** Synthetic ropes have some inherent elasticity, which means they will absorb energy in the event of a fall.
- **Corrosion Resistance:** Unlike steel cables, synthetic ropes are not susceptible to rust or corrosion.
- **Improved Handling:** Synthetic ropes are generally easier to handle than steel cables. They are less prone to causing hand injuries due to fraying or sharp edges.
- **Maintenance:** Synthetic lifelines are less likely to split, deform or kink in the way metal lifelines sometimes do.
- **Reduce Electrocution Risk:** This new product variant was specifically requested by several customers who work with electrical networks.

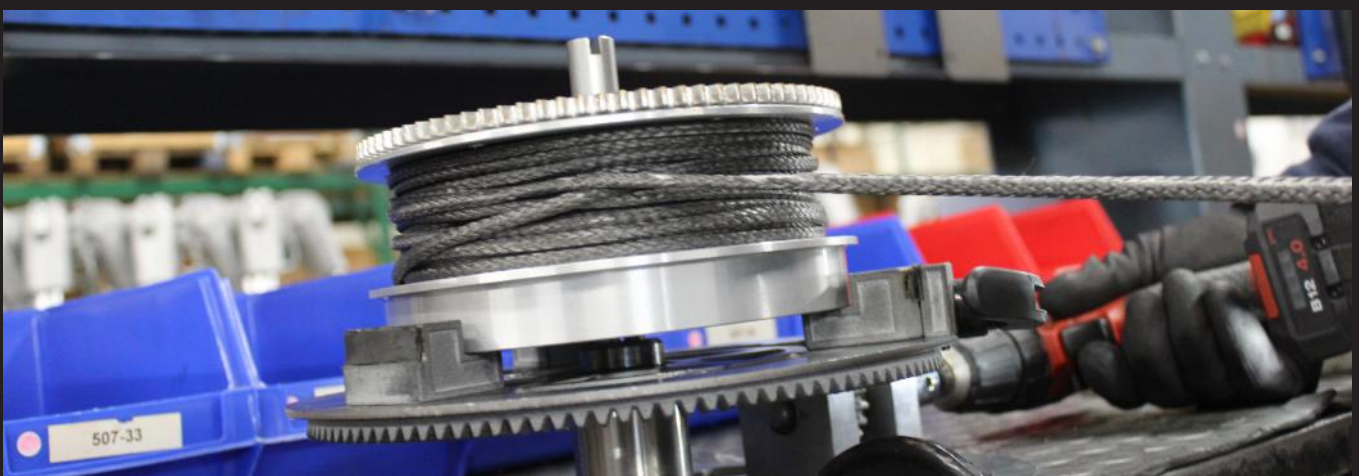

High grade synthetic rope being fitted to a SAVER rope drum



Brackets available for a range of anchorages, including XTIRPA.



**STOP
SRL**

WINCH



WINCH FOR LIFTING PERSONNEL OR MATERIALS

The Globestock WINCH is specifically certified for the lifting of both personnel and materials. It is a personnel winch that may also be used for load lifting.



The anti-run braking mechanism means that, if the winding arm is released during lifting, the winch automatically locks, holding the person / load steady until the handle is rotated again by the operator.

The 1:8.9 gear ratio makes personnel lifting easy, and delivers 50 mm of rope retrieval per rotation.

May be mounted to various anchorages, including the SENTRY Tripod and XTIRPA range.

- **Up to 250 kg MWL**
- **Heavy duty**
- **Anti-run brake**
- **Up to 40 m rope**
- **Galvanised or stainless steel rope**





WINCH fitted to a SENTRY Tripod






Product Code	MWL	Weight (Approx.)	Max. Rope Length	Rope Kit
GSE070-20G	250 kg	20.5 kg	20 m	Galvanised steel rope & alu karabiner
GSE070-40G		22 kg	40 m	
GSE070-40SSK	200kg	22 kg	40 m	Stainless steel rope & alu karabiner

SETTING UP THE GLOBESTOCK WINCH

GLOBESTOCK
SAFETY

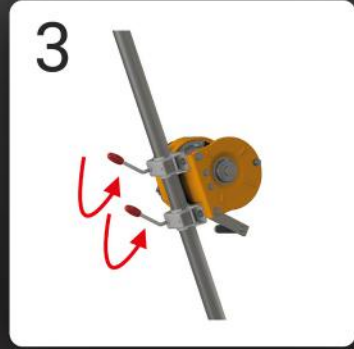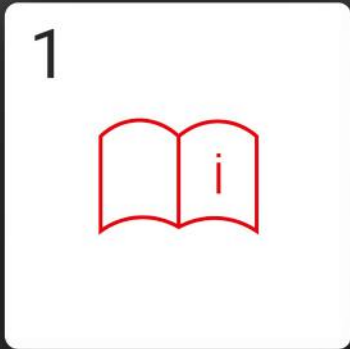

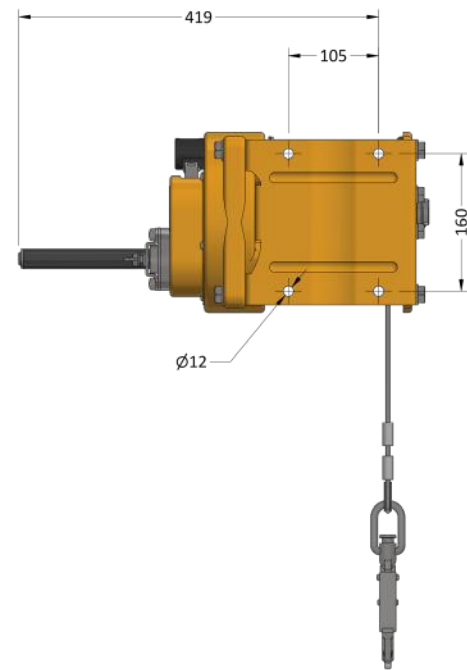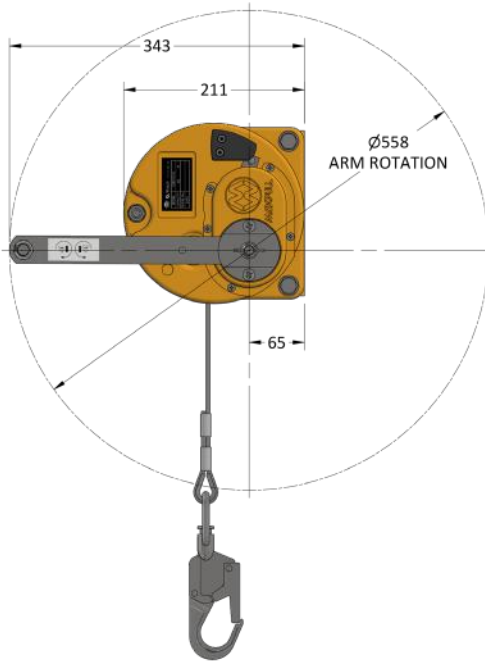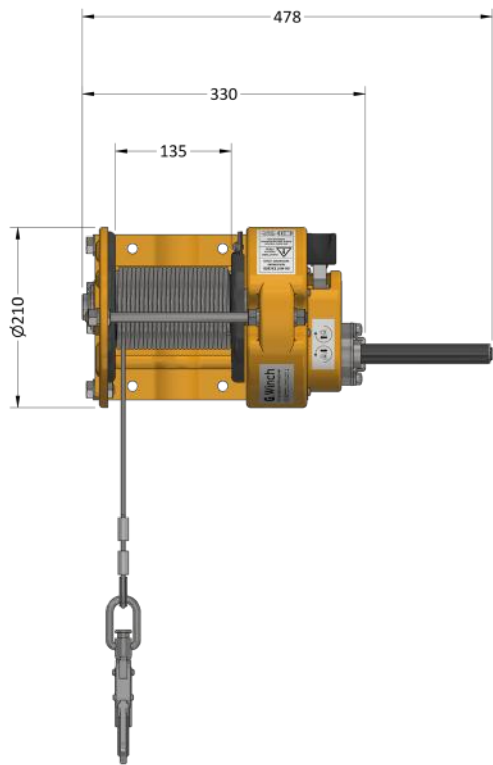

WINCH ACCESSORIES



WINCH Bracket
(for XTIRPA anchorages)
GSE200WBX



Winch Bracket Assembly x2
(for SENTRY Tripod)
GSE200WBK



Holdall bag
GSE-H/ALL



250 kg Lifting Pulley
GSE070250USP

GUARD LOAD ARREST

LOAD ARRESTORS

Guard load arrestors are heavy-duty fall arrest blocks for protecting equipment that is suspended at height.

- For loads from 150 kg to 1500 kg
- Rope lengths up to 25 m
- Shock absorption minimises damage
- Fall indicator lens for easy monitoring
- Galvanized or stainless steel rope options
- Rope automatically extends / retracts



#GuardAgainstGravity

What is a load arrestor?

Load arrestors provide a secondary safety back-up for overhead loads, used in conjunction with a primary lifting device or support, such as a hoist or fixed anchorage. If the primary support fails, the load arrestor will automatically stop the load from falling, thereby preventing damage to the load and, more importantly, protecting people below.

Guard load arrestors have a high-strength retractable rope that extracts and retracts, following the movement of the load. This means Guards can be fitted to equipment that needs to be moved (dynamic loads), as well as to non-moving (static) loads.




Name	Product Code	Maximum Working Load		Minimum Working Load		Rope Length		Wire Rope Material	Minimum Anchor Strength		Maximum Running Speed	
		kg	lbs	kg	lbs	m	ft		kN	lbf	m s ⁻¹	ft s ⁻¹
GUARD150	GUARD150-14G	150	330	10	22	14	46	Galvanised Steel	7.4	1,663	1	3.280
	GUARD150-14S	150	330	10	22	14	46	Stainless Steel	7.4	1,663	1	3.280
GUARD300	GUARD300-10G	300	660	50	110	10	33	Galvanised Steel	14.1	3,169	0.7	2.297
	GUARD300-10S	300	660	50	110	10	33	Stainless Steel	14.1	3,169	0.7	2.297
	GUARD300-25G	300	660	50	110	25	82	Galvanised Steel	14.1	3,169	0.7	2.297
	GUARD300-25S	300	660	50	110	25	82	Stainless Steel	14.1	3,169	0.7	2.297
GUARD500	GUARD500-10S	500	1,100	100	220	10	33	Stainless Steel	20.6	4,631	0.7	2.297
	GUARD500-24S	500	1,100	100	220	24	79	Stainless Steel	20.6	4,631	0.7	2.297
	GUARD500-10G	500	1,100	100	220	10	33	Galvanised Steel	20.6	4,631	0.7	2.297
	GUARD500-24G	500	1,100	100	220	24	79	Galvanised Steel	20.6	4,631	0.7	2.297
GUARD800	GUARD800-10S	800	1,760	150	330	10	33	Stainless Steel	45.1	10,123	0.6	1.969
GUARD1000	GUARD1000-10G	1000	2,200	150	330	10	33	Galvanised Steel	45.1	10,123	0.6	1.969
GUARD1500	GUARD1500-10G	1500	3,300	200	440	10	33	Galvanised Steel	63.3	14,230	0.6	1.969



GUARD300-10

GUARD300-25

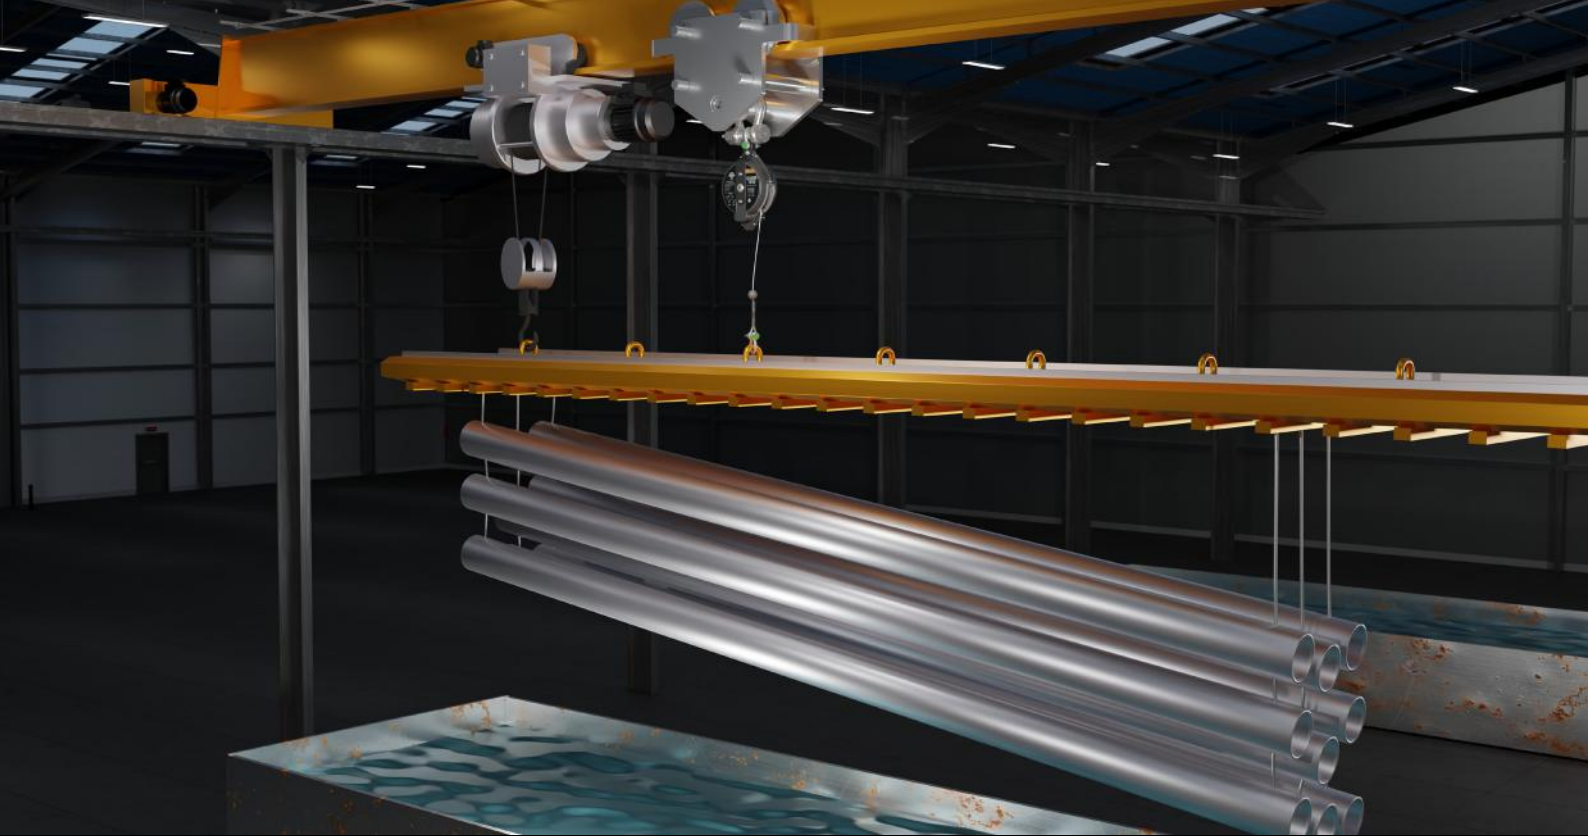

Load arrestors provide fall protection for equipment. There are a huge number of applications where load arrestors may be deployed, across a range of industries. Do you lift or suspend equipment that cannot be allowed to drop? If so, consider installing a Guard Load Arrest device as a safeguard in case the primary lifting equipment fails.



A Guard's cable automatically extends and retracts, following the movement of the load. This is ideal for loads that need to move, and often means the cable does not need to be disconnected when changing lights or speakers, for example.


INSTALLATION EXAMPLES



Single Hoist Installation

A Guard Load Arrest device running in conjunction with your primary lifting equipment can help you to establish a safe system of work that minimises risk.

Need help?
Visit www.guardloadarrest.com

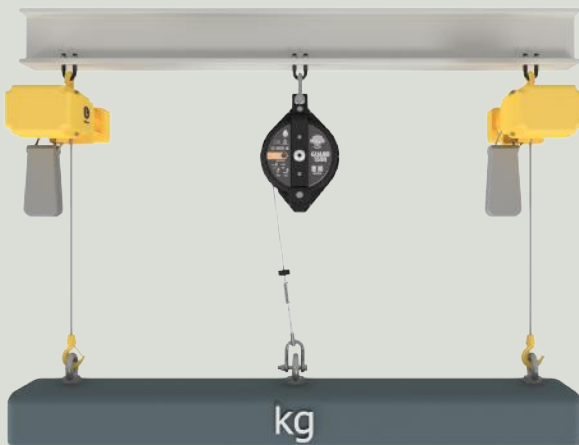

Multiple Hoist Installation



Pulley Connector Installation

**Protect loads from 150 kg
to 1500 kg**



Fall indicator for easy monitoring



Rope lengths up to 25 m



**Galvanized or
stainless steel
rope options**

December 2024

Globestock Ltd. reserve the right to change specifications without prior notice.
All information herein is copyright protected by Globestock Ltd. 2024.
The Globestock name is a registered trademark of Globestock Ltd.
The GUARD LOAD ARREST logo is a registered trademark of Globestock Ltd.



www.globestocksafety.com