

Q 360

Innovation and Technology

RACK PDU CATALOG

IT POWER DISTRIBUTION



PDU Feature



0.5%
Billing Grade Metering Accuracy

2X
Gigabyte Network Controller

64
Units of PDU High Speed Cascading

60°C
Operating Temperature

4-in-1
Combo Outlet
Neutral Locking
Secure Fit with any power cord



Low Profile Design
slim-profile design to save more equipment space in rack.

Hot-swappable Controller
Replace the controller online without interrupting operation.


Environmental Monitoring
Supports sensors for humidity/temperature, leakage detection, door status, liquid pressure, electric handle and more.

Alternative Phase with colored outlet
Different colored outlets for each phase to prevent errors and simplify usage



Rack-mounted PDUs are an essential element of critical load power infrastructure in data centers, server rooms, telecommunications and industrial IT closets. Q360 PDUs meet the highest demands of the industry: with comprehensive configurations, a wide range of operating conditions, and reliable power distribution, power measurement and network management.

Network Management Controller

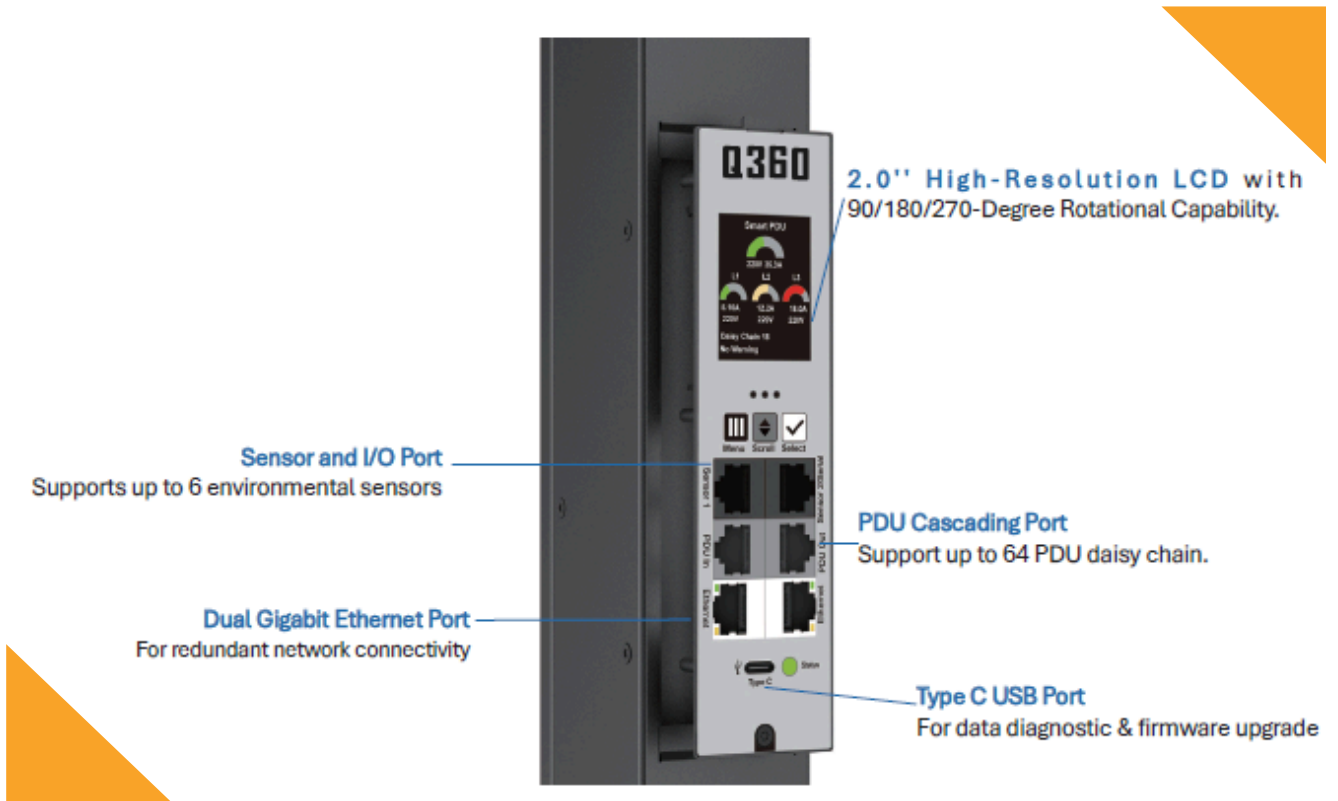

PDU with Featured Outlet



Acts as any of these outlet types:



C13



C15



C19



C21

Versatile 4-in-1 hybrid outlet supports C14, C16, C20 & C22 power cords in a single socket, simplifying IT equipment deployment.

Key Features : Type

Key PDU Features	Model Stream	Model Xstream
High Speed Ethernet Port	10M / 100M	Gigabit
Dual Network Port	x	√
High Speed Cascading	32	64
Billing Grade Accuracy	1 %	0.5 %
Color LED Display	1.8" LCD	2" LCD
Hot Swappable NMC	√	√
10 kAIC Breaker Option	√	√
60°C Operating Temperature	√	√
Environmental Sensor Support-Liquid Cooling Sensors	√	√
Outlet Density (MSPO)	42	54
Combination Outlets (C13/C19/C15/C21)	x	√
Alternating Phase Outlets (3PH)	√	√
Native Locking Outlets	Option	√
Residual Current Monitoring (RCM) Option	√	√
Global Compliances	√	√
High kVA Solutions (AI Application)	Up to 63A/3PP	3PP/100A(UL) 125A(CE) with 56mm Width

Q360 rack-mounted power distribution units provide reliable power distribution in enclosures. The model range is available in various PDU types and form factors: Legacy IEC outlet and High density Combo outlet. Legacy units provide Basic, Metered Input, Metered Outlet and Switched Metered outlet with load capacities from 3.7 to 43.5kVA. HD combo units are offering full range of PDU types applying worldwide compliance for both NAM and Europe & Asia locations. The warranty period for the rack-mounted power distribution units is 2 years.



Rack PDUs Model : Stream [Vertical]

Type: Model Stream

- Number of phases: 1 or 3
- Input current 16A to 63A
- Load capacity 3700, 7400, 11000, 22000VA and 43.5kVA
- Compact, aluminum & rugged steel housing
- Exhaustive outlet configurations for all scenarios
- Outlets are evenly distributed across the entire height of the vertical PDUs
- Various installation options without the need to purchase additional accessories

Vertical Model Stream PDUs

Catalog Numbers

Specifications

Basic	Local Metered	Metered Input	Input Plug	Outlets	Breakers	kVA
E0-1520A	E1-1520A	EP-1520A	C20 inlet to L5-20	(24) 5-20		1.9
E0-1530A	E1-1530A	EP-1530A	NEMA L5-30P	(24) 5-20		2.9
E0-L620A	E1-L620A	EP-1020A	C20 inlet to L6-20	(20) C13 + (4) C19		3.7
E0-1116A	E1-1116A	EP-1116A	IEC 60309 16A 2P+E	(20) C13 + (4) C19		3.7
E0-L630A	E1-L630A	EP-1030A	NEMA L6-30P	(18) C13 + (6) C19	2 Dual Pole	5.0
E0-2120A	E1-2120A	EP-1120A	NEMA L21-20P	(18) C13 + (6) C19 + (6) 5-20		5.8
E0-1332A	E1-1332A	EP-1332A	IEC 60309 32A 2P+E	(20) C13 + (4) C19	2 Single Pole	7.4
E0-2130A	E1-2130A	EP-1130A	NEMA L21-30P	(24) C13 + (6) C19	3 Dual Pole	8.6
E0-2130B	E1-2130B	EP-1130B	NEMA L21-30P	(18) C13 + (6) C19 + (6) 5-20	3 Dual Pole	8.6
E0-1516A	E1-1516A	EP-1516A	IEC 60309 16A 3P+N+E	(24) C13 + (6) C19		11.0
E0-8365X	E1-8365X	EP-1365X	CS8365	(30) C13 + (12) C19	6 Dual Pole	14.4
E0-4609B	E1-4609B	EP-1609B	IEC 60309 60A 3P+E	(12) C13 + (18) C19	6 Dual Pole	17.3
E0-4609X	E1-4609X	EP-1609X	IEC 60309 60A 3P+E	(30) C13 + (12) C19	6 Dual Pole	17.3
E0-1230X	E1-1230X	EP-1230X	NEMA L22-30P	(36) C13 + (6) C19	6 Dual Pole	17.3
E0-1532X	E1-1532X	EP-1532X	IEC 60309 32A 3P+N+E	(24) C13 + (12) C19	6 Single Pole	22.1

Vertical Model Stream PDUs

Catalog Numbers

Specifications

Metered Outlet	Switched	MSPO	Input Plug	Outlets	Breakers	kVA
	EP-5520A	EP-6520A	C20 inlet to L5-20	(24) 5-20		1.9
	EP-5530A	EP-6530A	NEMA L5-30P	(24) 5-20		2.9
	EP-5020A	EP-6020A	C20 inlet to L6-20	(20) C13 + (4) C19		3.7
EP-2116A	EP-5116A	EP-6116A	IEC 60309 16A 2P+E	(20) C13 + (4) C19		3.7
EP-2030A	EP-5030A	EP-6030A	NEMA L6-30P	(18) C13 + (6) C19	2 Dual Pole	5.0
EP-2120A	EP-5120A	EP-6120A	NEMA L21-20P	(18) C13 + (6) C19 + (3) 5-20		5.8
EP-2332A	EP-5332A	EP-6332A	IEC 60309 32A 2P+E	(20) C13 + (4) C19	2 Single Pole	7.4
EP-2130A	EP-5130A	EP-6130A	NEMA L21-30P	(21) C13 + (6) C19	3 Dual Pole	8.6
EP-2130B	EP-5130B	EP-6130B	NEMA L21-30P	(18) C13 + (6) C19 + (3) 5-20	3 Dual Pole	8.6
EP-2516A	EP-5516A	EP-6516A	IEC 60309 16A 3P+N+E	(18) C13 + (6) C19		11.0
EP-2365X	EP-5365X	EP-6365X	CS8365	(18) C13 + (6) C19	6 Dual Pole	14.4
EP-2609B	EP-5609A	EP-6609A	IEC 60309 60A 3P+E	(18) C13 + (6) C19	6 Dual Pole	17.3
EP-2609X	EP-5609B	EP-6609B	IEC 60309 60A 3P+E	(12) C13 + (12) C19	6 Dual Pole	17.3
EP-2230X	EP-5230X	EP-6230X	NEMA L22-30P	(18) C13 + (6) C19	6 Dual Pole	17.3
EP-2532X	EP-5532X	EP-6532X	IEC 60309 32A 3P+N+E	(24) C13 + (12) C19	6 Single Pole	22.1

Rack PDUs Model : Stream [Horizontal]

1U Horizontal Model Stream PDUs

Catalog Numbers

Specifications

Basic	Local Meter	Meter Input	Input Plug	Outlets	Breakers	kVA
E0-H1520A		EP-1H520A	C20 inlet to L5-20	(10) 5-20		1.9
E0-H1530A		EP-1H530A	NEMA L5-30P	(10) 5-20		2.9
E0-HL620A		EP-1H020A	C20 inlet to L6-20	(8) C13		3.7
E0-H1116A		EP-1H116A	IEC 60309 16A 2P+E	(8) C13 + (4) C19		3.7
E0-HL630A		EP-1H030A	NEMA L6-30P	(8) C13 + (4) C19	2 Dual Pole	5.0
Metered Outlet	Switched	MSPO	Input Plug	Outlets	Breakers	kVA
	EP-5H530A	EP-6H530A	NEMA L5-30P	(8) 5-20		2.9
	EP-5H020A	EP-6H020A	C20 inlet to L6-20	(8) C13		3.7
	EP-5H116A	EP-6H116A	IEC 60309 16A 2P+E	(8) C13		3.7


2U Horizontal Model Stream PDUs

Catalog Numbers

Specifications

Basic	Local Meter	Meter Input	Input Plug	Outlets	Breakers	kVA
E0-HL630A		EP-1H630A	NEMA L6-30P	(18) C13 + (6) C19	2 Dual Pole	5.0
E0-H1530A		EP-1H530A	NEMA L15-30P	(18) C13 + (6) C19	3 Dual Pole	8.6
E0-H2130A		EP-1H130A	NEMA L21-30P	(12) C13 + (6) C19 + (4) 5-20	3 Dual Pole	8.6
E0-H1332A		EP-1H332A	IEC 60309 32A 2P+E	(12) C13 + (4) C19	2 Single Pole	7.4

Basic PDU

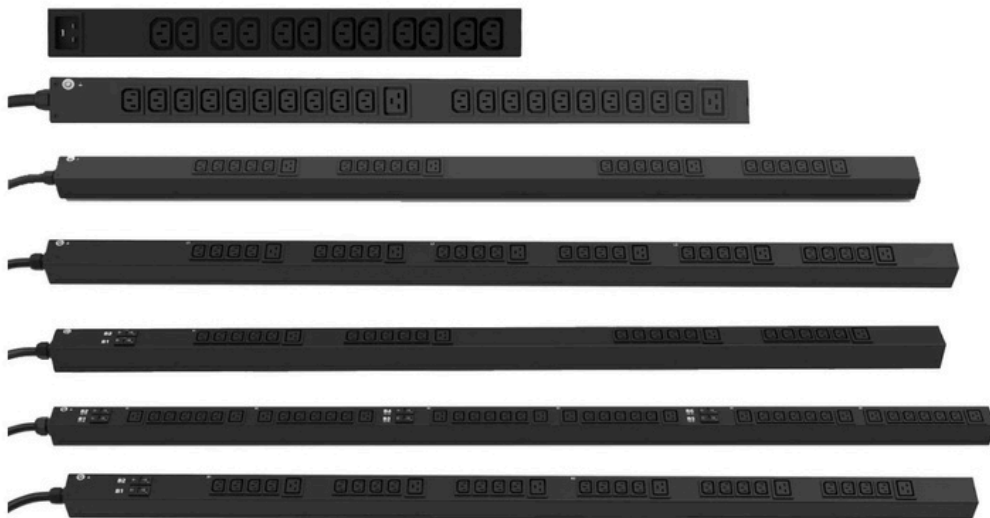

Rack PDUs Model : **Xtream** [Vertical]

Type: Model Xtream

- Wider range of input current: 10A up to 125A
- Form factors: Vertical Zero U & Horizontal 1U, 2U & 3U
- Neutral locking outlets for both C13/C15/C19/C21 connections
- Support communications protocols SNMP v1, v2 & v3, SNTP, HTTP, HTTPS, FTP
- USB Type-C port for local firmware upgrade and downloading event logs
- Provide support multi-functional sensors for temperature and humidity monitoring, leakage and smoke detection, rack door status, liquid pressure measurement, and more.
- PDU cascading capability up to 64

Vertical Model Xtream PDUs

Catalog Numbers		Specifications			
Basic	Meter Input	Input Plug	Outlets	Breakers	kVA
A0-1630X	AP-1630X	NEMA L6-30P	(20) C13/C15, (20) C13/C15/C19/C21	2 Dual Pole	5.0
A0-2120A	AP-1120A	NEMA L21-20P	(12) C13/C15, (12) C13/C15/C19/C21		5.8
A0-L530X	AP-1530X	NEMA L15-30P	(21) C13/C15, (21) C13/C15/C19/C21		8.6
A0-2130X	AP-1130X	NEMA L21-30P	(21) C13/C15, (21) C13/C15/C19/C21	3 Dual Pole	8.6
A0-8365X	AP-1365X	CS8365	(24) C13/C15, (24) C13/C15/C19/C21	6 Dual Pole	14.4
A0-4609X	AP-1609X	IEC 60309 60A 3P+E	(21) C13/C15, (21) C13/C15/C19/C21	6 Dual Pole	17.3
A0-1563X	AP-1563X	IEC 60309 60/63A 3P+N+E	(21) C13/C15, (21) C13/C15/C19/C21	12 Single Pole	43.5 (IEC), 34.6 (UL)
A0-1116A	AP-1116A	IEC 60309 16A 2P+E	(12) C13/C15, (12) C13/C15/C19/C21		3.7
A0-1132A	AP-1132A	IEC 60309 32A 2P+E	(12) C13/C15, (12) C13/C15/C19/C21	2 Single Pole	7.4
A0-1132X	AP-1132X	IEC 60309 32A 2P+E	(21) C13/C15, (21) C13/C15/C19/C21	2 Single Pole	7.4
A0-1516A	AP-1516A	IEC 60309 16A 3P+N+E	(12) C13/C15, (12) C13/C15/C19/C21		11.0
A0-1516X	AP-1516X	IEC 60309 16A 3P+N+E	(24) C13/C15, (24) C13/C15/C19/C21		11.0
A0-1532A	AP-1532A	IEC 60309 30/32A 3P+N+E	(12) C13/C15, (12) C13/C15/C19/C21	6 Single Pole	22.1 (IEC), 17.3 (UL)
A0-1532X	AP-1532X	IEC 60309 30/32A 3P+N+E	(24) C13/C15, (24) C13/C15/C19/C21	6 Single Pole	22.1 (IEC), 17.3 (UL)

Vertical Model Xtream PDUs

Catalog Numbers		Specifications				
Metered Outlet	Switch	MSPO	Input Plug	Outlets	Breakers	kVA
		AP-6520A	C20/L6-20P	(12) C13/C15, (12) C13/C15/C19/C21		3.8
		AP-6630A	NEMA L6-30P	(12) C13/C15, (12) C13/C15/C19/C21	2 Dual Pole	5.0
AP-2630X	AP-5630X	AP-6630X	NEMA L6-30P	(20) C13/C15, (20) C13/C15/C19/C21	2 Dual Pole	5.0
	AP-5120A	AP-6120A	NEMA L21-20P	(12) C13/C15, (12) C13/C15/C19/C21		5.8
		AP-6120B	NEMA L21-20P	(12) C13/C15, (12) C13/C15/C19/C21		5.8
		AP-6530A	NEMA L15-30P	(12) C13/C15, (12) C13/C15/C19/C21, (3) 5-20R	3 Dual Pole	8.6
	AP-5530X	AP-6530X	NEMA L15-30P	(21) C13/C15, (21) C13/C15/C19/C21	3 Dual Pole	8.6
		AP-6130A	NEMA L21-30P	(12) C13/C15, (12) C13/C15/C19/C21	3 Dual Pole	8.6
AP-2130X	AP-5130X	AP-6130X	NEMA L21-30P	(21) C13/C15, (21) C13/C15/C19/C21	3 Dual Pole	8.6
	AP-5365X	AP-6365X	CS8365	(21) C13/C15, (21) C13/C15/C19/C21	6 Dual Pole	14.4
AP-2609X	AP-5609X	AP-6609X	IEC 60309 60A 3P+E	(21) C13/C15, (21) C13/C15/C19/C21	6 Dual Pole	17.3
	AP-5563X	AP-6563X	IEC 60309 60/63A 3P+N+E	(21) C13/C15, (21) C13/C15/C19/C21	12 Single Pole	43.5 (IEC), 34.6 (UL)
	AP-5116A	AP-6116A	IEC 60309 16A 2P+E	(12) C13/C15, (12) C13/C15/C19/C21		3.7
	AP-5132A	AP-6132A	IEC 60309 32A 2P+E	(12) C13/C15, (12) C13/C15/C19/C21	2 Single Pole	7.4
AP-2132X	AP-5132X	AP-6132X	IEC 60309 32A 2P+E	(21) C13/C15, (21) C13/C15/C19/C21	2 Single Pole	7.4
	AP-5516A	AP-6516A	IEC 60309 16A 3P+N+E	(12) C13/C15, (12) C13/C15/C19/C21		11.0
	AP-5516X	AP-6516X	IEC 60309 16A 3P+N+E	(24) C13/C15, (24) C13/C15/C19/C21		11.0
	AP-5532A	AP-6532A	IEC 60309 30/32A 3P+N+E	(12) C13/C15, (12) C13/C15/C19/C21	6 Single Pole	22.1 (IEC), 17.3 (UL)
AP-2532X	AP-5532X	AP-6532X	IEC 60309 30/32A 3P+N+E	(24) C13/C15, (24) C13/C15/C19/C21	6 Single Pole	22.1 (IEC), 17.3 (UL)

Rack PDUs Model : Xstream [Horizontal]

1U Horizontal Model Xstream PDUs

Catalog Numbers

Specifications

Basic	Local Meter	Meter Input	Input Plug	Outlets	Breakers	kVA
A0-H1515A		AP-1H515A	NEMA 5-15P	(8) 5-15		1.4
A0-H1520A		AP-1H520A	NEMA L5-20P	(8) 5-20		1.9
A0-H1014A		AP-1H014A	C14 Inlet	(8) C13		2.5
A0-H1020A		AP-1H020A	C20 Inlet	(8) C13		3.3

Metered Outlet	Switched	MSPO	Input Plug	Outlets	Breakers	kVA
	AP-5H515A	AP-6H515A	NEMA 5-15P	(8) 5-15		1.4
	AP-5H520A	AP-6H520A	NEMA L5-20P	(8) 5-20		1.9
	AP-5H014A	AP-6H014A	C14 Inlet	(8) C13		2.5
	AP-5H020A	AP-6H020A	C20 Inlet	(8) C13		2.5

2U&3U Horizontal Model Xstream PDUs


Catalog Numbers

Specifications

Basic	Local Meter	Meter Input	Input Plug	Outlets	Breakers	kVA
A0-HL530A		AP-1H530A	NEMA L5-30P	(16) 5-20		2.9
A0-HL630A		AP-1H630A	NEMA L6-30P	(12) C13, (4) C13/C15/C19/C21	2 Dual Pole	5.0
A0-H1332A		AP-1H332A	IEC 60309 32A 2P+E	(12) C13, (4) C13/C15/C19/C21	2 Single Pole	7.4
A0-H8365A		AP-1H365A	CS8365	(12) C13, (4) C13/C15/C19/C21	6 Dual Pole	14.4

Metered Outlet	Switched	MSPO	Input Plug	Outlets	Breakers	kVA
	AP-5H530A	AP-6H530A	NEMA L5-30P	(16) 5-20		2.9
	AP-5H630A	AP-6H630A	NEMA L6-30P	(12) C13, (4) C13/C15/C19/C21	2 Dual Pole	5.0
	AP-5H332A	AP-6H332A	IEC 60309 32A 2P+E	(12) C13, (4) C13/C15/C19/C21	2 Single Pole	7.4
		AP-6H563A	IEC 60309 60/63A 3P+N+E	(6) C13, (18) C13/C15/C19/C21	12 Single Pole	43.5 (IEC) 34.6 (UL)

Metered Input&Switched Per Outlet PDU

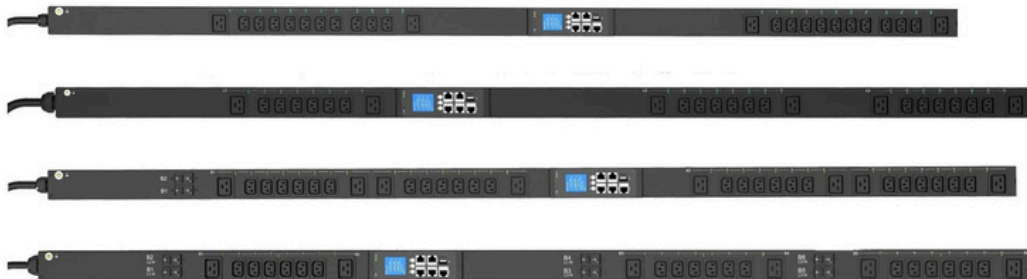

High Density Rack PDUs Model : Xtream [Vertical]

Vertical Model Xtream High Density PDUs

Catalog Numbers		Specifications			
Basic	Meter Input	Input Plug	Outlets	Breakers	kVA
	AP-1563AH	IEC 60309 60/63A 3P+N+E	(12) C19	12 Single Pole	43.5 (IEC), 34.6 (UL)
	AP-1563A	IEC 60309 60/63A 3P+N+E	(12) C13/C15, (12) C13/C15/C19/C21	12 Single Pole	43.5 (IEC), 34.6 (UL)
	AP-1563B	IEC 60309 60/63A 3P+N+E	(15) C13/C15, (15) C13/C15/C19/C21	12 Single Pole	43.5 (IEC), 34.6 (UL)
A0-1563X	AP-1563C	IEC 60309 60/63A 3P+N+E	(18) C13/C15, (18) C13/C15/C19/C21	12 Single Pole	43.5 (IEC), 34.6 (UL)
	AP-1563X	IEC 60309 60/63A 3P+N+E	(24) C13/C15, (24) C13/C15/C19/C21	12 Single Pole	43.5 (IEC), 34.6 (UL)
	AP-1596A	IEC 60309 125A 3P+N+E	(12) C13/C15, (12) C13/C15/C19/C21	18 Single Pole	66.5 (IEC)
A0-1596X	AP-1596C	IEC 60309 125A 3P+N+E	(18) C13/C15, (18) C13/C15/C19/C21	18 Single Pole	66.5 (IEC)
	AP-1596X	IEC 60309 125A 3P+N+E	(24) C13/C15, (24) C13/C15/C19/C21	18 Single Pole	66.5 (IEC)
	AP-1596XL	IEC 60309 125A 3P+N+E	(27) C13/C15, (27) C13/C15/C19/C21	18 Single Pole	66.5 (IEC)
A0-1580X	AP-1580A	IEC 60309 100A 3P+E	(24) C13/C15/C19/C21	6 20A Dual Pole	28.8 (UL)
	AP-1580C	IEC 60309 100A 3P+E	(18) C13/C15, (18) C13/C15/C19/C21	6 20A Dual Pole	28.8 (UL)
	AP-1580X	IEC 60309 100A 3P+E	(24) C13/C15, (24) C13/C15/C19/C21	6 20A Dual Pole	28.8 (UL)
A0-15100X	AP-15100C	IEC 60309 100A 3P+N+E	(18) C13/C15, (18) C13/C15/C19/C21	9 30A Single Pole	51.8 (UL)
	AP-15100X	IEC 60309 100A 3P+N+E	(24) C13/C15, (24) C13/C15/C19/C21	12 30A Single Pole	57.5 (UL)
A0-15125X	AP-15125C	IEC 60309 125A 3P+N+E	(18) C13/C15, (18) C13/C15/C19/C21	24 Single Pole	86.6 (IEC)
	AP-15125K	IEC 60309 125A 3P+N+E	(21) C13/C15, (21) C13/C15/C19/C21	18 30A Single Pole	86.6 (IEC)
	AP-15125X	IEC 60309 125A 3P+N+E	(24) C13/C15, (24) C13/C15/C19/C21	24 Single Pole	86.6 (IEC)

Vertical Model Xtream High Density PDUs

Catalog Numbers		Specifications				
Metered Outlet	Switch	MSPO	Input Plug	Outlets	Breakers	kVA
AP-2563A	AP-5563AH	AP-6563AH	IEC 60309 60/63A 3P+N+E	(12) C19	12 Single Pole	43.5 (IEC), 34.6 (UL)
	AP-5563A	AP-6563A	IEC 60309 60/63A 3P+N+E	(12) C13/C15, (12) C13/C15/C19/C21	12 Single Pole	43.5 (IEC), 34.6 (UL)
		AP-6563B	IEC 60309 60/63A 3P+N+E	(15) C13/C15, (15) C13/C15/C19/C21	12 Single Pole	43.5 (IEC), 34.6 (UL)
AP-2563C	AP-5563C	AP-6563C	IEC 60309 60/63A 3P+N+E	(18) C13/C15, (18) C13/C15/C19/C21	12 Single Pole	43.5 (IEC), 34.6 (UL)
	AP-5563X	AP-6563X	IEC 60309 60/63A 3P+N+E	(24) C13/C15, (24) C13/C15/C19/C21	12 Single Pole	43.5 (IEC), 34.6 (UL)
AP-2596A	AP-5596A	AP-6596A	IEC 60309 125A 3P+N+E	(12) C13/C15, (12) C13/C15/C19/C21	18 Single Pole	66.5 (IEC)
AP-2596C	AP-5596C	AP-6596C	IEC 60309 125A 3P+N+E	(18) C13/C15, (18) C13/C15/C19/C21	18 Single Pole	66.5 (IEC)
	AP-5596X	AP-6596X	IEC 60309 125A 3P+N+E	(24) C13/C15, (24) C13/C15/C19/C21	18 Single Pole	66.5 (IEC)
AP-2580A			IEC 60309 125A 3P+N+E	(27) C13/C15, (27) C13/C15/C19/C21	18 Single Pole	66.5 (IEC)
	AP-5580A	AP-6580A	IEC 60309 100A 3P+E	(24) C13/C15/C19/C21	6 20A Dual Pole	28.8 (UL)
AP-2580C	AP-5580C	AP-6580C	IEC 60309 100A 3P+E	(18) C13/C15, (18) C13/C15/C19/C21	6 20A Dual Pole	28.8 (UL)
	AP-5580X	AP-6580X	IEC 60309 100A 3P+E	(24) C13/C15, (24) C13/C15/C19/C21	6 20A Dual Pole	28.8 (UL)
AP-25100C	AP-55100C	AP-65100C	IEC 60309 100A 3P+N+E	(18) C13/C15, (18) C13/C15/C19/C21	9 30A Single Pole	51.8 (UL)
	AP-55100X	AP-65100X	IEC 60309 100A 3P+N+E	(24) C13/C15, (24) C13/C15/C19/C21	12 30A Single Pole	57.5 (UL)
	AP-55125C	AP-65125C	IEC 60309 100A 3P+N+E	(18) C13/C15, (18) C13/C15/C19/C21	24 Single Pole	86.6 (IEC)
			IEC 60309 100A 3P+N+E	(21) APP 2007G, (3) C13/C15, (3) 4-in-1	18 30A Single Pole	86.6 (IEC)
	AP-55125X	AP-65125X	IEC 60309 100A 3P+N+E	(24) C13/C15, (24) C13/C15/C19/C21	24 Single Pole	86.6 (IEC)

High Density Rack PDUs Model : Xtream [Horizontal]

2U&3U Horizontal Model Xtream High Density PDUs

Catalog Numbers

Specifications

Basic	Meter Input	Input Plug	Outlets	Breakers	kVA
A0-H1560A	AP-1H560A	IEC 60309 60A 3P+E, 9H	(6) C13, (12) C13/C15/C19/C21	6 Dual Pole	17.3
A0-H1540A	AP-1H540A	IEC 60309 60/63A 3P+N+E	(18) C13/C15/C19/C21	6 Single Pole	28.8 (UL)
A0-H1563A	AP-1H563A	IEC 60309 60/63A 3P+N+E	(6) C13, (12) C13/C15/C19/C21	12 Single Pole	43.5 (IEC), 34.6 (UL)

2U&3U Horizontal Model Xtream High Density PDUs

Catalog Numbers

Specifications

Meter Outlet	MSPO	Input Plug	Outlets	Breakers	kVA
AP-2H560A	AP-6H560A	IEC 60309 60A 3P+E, 9H	(6) C13, (12) C13/C15/C19/C21	6 Dual Pole	17.3
AP-2H540A	AP-6H540A	IEC 60309 60/63A 3P+N+E	(18) C13/C15/C19/C21	6 Single Pole	28.8 (UL)
AP-2H563A	AP-6H563A	IEC 60309 60/63A 3P+N+E	(6) C13, (12) C13/C15/C19/C21	12 Single Pole	43.5 (IEC), 34.6 (UL)
	AP-6H563B	IEC 60309 60/63A 3P+N+E	(6) C13, (18) C13/C15/C19/C21	12 Single Pole	43.5 (IEC), 34.6 (UL)




Application: Artificial Intelligence




Application: Artificial Intelligence

Accessories PDUs

Supported Sensors

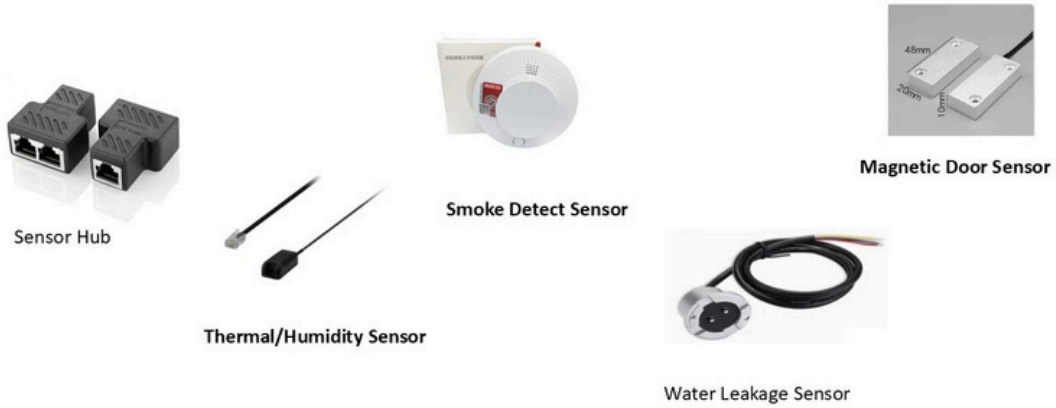

Expand to 4 Sensors

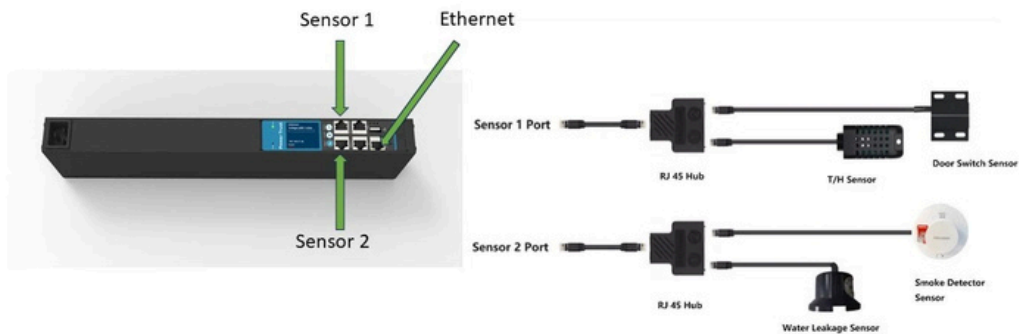

Fruitful accessories in data center

Sensor Hub

Smoke Detect Sensor

Magnetic Door Sensor

Thermal/Humidity Sensor

Water Leakage Sensor

Maintain compatibility with racks and cabinets



Thank You!

"Innovative Power Distribution,
Tailored for You."



**Let's Get
In Touch**



E-Book Catalog

Contact Us