

THE RENOVATION WAREHOUSE



**HOLLOW METAL COMMERCIAL DOORS AND HARDWARE
PRODUCT CATALOG**



DOOR SOLUTIONS

- Trending door styles with ADA-compliant options
- Customized door sizes
- Doors and frames are fire-rated for up to 90 minutes
- Custom face and edge preps
- Can match any manufacturer's hinge or lock location
- Steel plate reinforcements for closer and panic preps
- Multi-point hardware preps on steel-edge doors
- No maximum or minimum ordering requirements



PROJECT TYPES

- Residential Living
- Office Buildings
- Hotel and Hospitality
- Multi-family
- Student Housing
- Assisted Living
- Hospitals and Clinics
- Places of Worship
- Financial Institutions
- Warehouses
- Manufacturing Facilities
- and more...




DOOR CONSTRUCTION

Discover Taylor’s precision-crafted steel doors, featuring robust American-made, hot-dipped galvanized steel and innovative design. From the injected polyurethane foam inner core to advanced features like full steel-edge perimeters and reinforced hinges, our doors set new standards for durability and customization in entryway solutions.

HOT-DIPPED GALVANIZED STEEL

Taylor exclusively utilizes American-made, hot-dipped galvanized steel with a G40 coating in manufacturing steel entry doors. Galvanized steel doors with a G40 coating are highly effective at handling the challenges of harsh environments, especially coastal conditions. This specific coating involves applying 0.40 oz/sq ft. of zinc, creating a protective layer that prevents corrosion in demanding environments and enhances rust resistance.

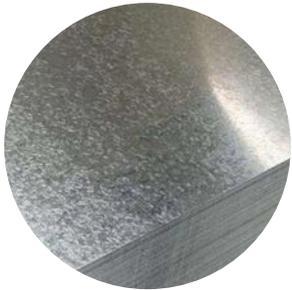

PRIMED SURFACE

Our smooth steel doors feature a durable baked-on white polyester primer on the exterior and an epoxy coating on the interior. In contrast, the Norwood textured steel door comes with a distinctive beige primer tailored for stain. Whether smooth or textured, they present customization and aesthetic flexibility to meet diverse design preferences.



FULL STEEL-EDGE PERIMETER

Taylor’s steel-edge doors boast a full steel-edge perimeter, enhancing strength and security. Achieving the highest Grade 40 rating in rigorous forced entry tests—withstanding more than seven hits from a 100-pound test weight—these doors offer industry-leading security. Conforming to ASTM F476 standards, they excel in restraining, delaying, and frustrating break-in attempts, providing peace of mind and top-tier protection.



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Panic Device and Lever Handle

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Fire Rated
Door



Click Here
For a
Impact Rated
Door

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Lever Handle

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Fire Rated
Door



Click Here
For a
Impact Rated
Door

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal 6 Panel Door with Lever Handle

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Fire Rated
Door



Click Here
For a
Impact Rated
Door

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Full Louver and Lever Handle

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty



Click Here
For a
Air Louver
Door

Click Here
For a
Impact Rated
Louver Door

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Lever Handle and Impact Bottom Louver

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Air Louver
Door

Click Here
For a
Fire Rated
Louver Door

Click Here
For a
Impact Rated
Louver Door

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Lever Handle , Bottom Louver and ½ Lite

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For A
Air
Louver/Non
Rated
Door

Click Here
For a
Fire Rated
Lite/Louver
Door

Click Here
For a
Impact Rated
Lite/Louver
Door

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Lever Handle and Narrow Lite

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite

Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Lever Handle and Small Top Lite

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite

Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Lever Handle and Impact ½ Lite

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite

Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Lever Handle and Impact Full Lite

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite

Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Lever Handle and Double Lite

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite

Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Panic Device Handle and Narrow Lite

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite



Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Panic Device Handle and Small Top Lite

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite



Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Panic Device Handle and 1/2 Lite

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite



Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Door with Panic Device Handle and Full Lite

△ Rust-inhibiting galvaneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite

Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame with a Solid Core Wood Door and Lever Handle

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Solid Door

Click Here
For a
Fire Rated
Solid Door

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame with a Solid Core Wood Door and Panic Device

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Solid Door

Click Here
For a
Fire Rated
Solid Door

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 6" x 27" Lite and Lever Handle**

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite

Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 24" x 30" Lite and Lever Handle**

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite

Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 24" x 60" Lite and Lever Handle**

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite

Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 12" x 12" Lite and Lever Handle**

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite

Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 6" x 27" Lite and Lever Handle**

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite

Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 24" x 30" Lite and Panic Device**

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite

Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 24" x 60" Lite and Panic Device**

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Lite

Click Here
For a
Fire Rated
Door Lite

Click Here
For a
Impact Rated
Door Lite

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 24" x 60" Air Louver and Lever Handle**

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Louver



Click Here
For a
Impact Rated
Door Louver

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 24" x 24" Air Louver and Lever Handle**

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Louver

Click Here
For a
Fire Rated
Door Louver

Click Here
For a
Impact Rated
Door Louver

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

Click On The Door Image to See The Price.

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 24" x 18" Air Louver and Lever Handle**

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Louver

Click Here
For a
Fire Rated
Door Louver

Click Here
For a
Impact Rated
Door Louver

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 18" x 24" Air Louver and Lever Handle**

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Louver



Click Here
For a
Impact Rated
Door Louver

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 18" x 18" Air Louver and Lever Handle**

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Louver



Click Here
For a
Impact Rated
Door Louver

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 24" x 12" Air Louver and Lever Handle**

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Louver



Click Here
For a
Impact Rated
Door Louver

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 18" x 12" Air Louver and Lever Handle**

△ Rust-inhibiting galvalneal steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Louver



Click Here
For a
Impact Rated
Door Louver

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details



**Fire - Rate d***

- Up to 3hr.
- Singles / Pairs

**Hurricane***

- Up to +/- 90psf
- Singles / Pairs

**Thermal Value**

- R Value = 2.08
- U Value = 0.48

Commercial Hollow Metal Frame**with a Solid Core Wood Door, 12" x 12" Air Louver and Lever Handle**

△ Rust-inhibiting galvalume steel △ Tested to 1,000,000 cycles (Level A) △ 10-year warranty

Click Here
For a
Non Rated
Door Louver



Click Here
For a
Impact Rated
Door Louver

**Door Sizes | 6'8" Height**

Call Size	Nominal Width	Nominal Height
2068	2'0" (24 inch)	6'8" (80 inch)
2468	2'4" (28 inch)	6'8" (80 inch)
2668	2'6" (30 inch)	6'8" (80 inch)
2868	2'8" (32 inch)	6'8" (80 inch)
21068	2'10" (34 inch)	6'8" (80 inch)
3468	3'4" (40 inch)	6'8" (80 inch)
3668	3'6" (42 inch)	6'8" (80 inch)
3868	3'8" (44 inch)	6'8" (80 inch)
4068	4'0" (48 inch)	6'8" (80 inch)

Door Sizes | 7'0" Height

Call Size	Nominal Width	Nominal Height
2070	2'0" (24 inch)	7'0" (84 inch)
2470	2'4" (28 inch)	7'0" (84 inch)
2670	2'6" (30 inch)	7'0" (84 inch)
2870	2'8" (32 inch)	7'0" (84 inch)
21070	2'10" (34 inch)	7'0" (84 inch)
3470	3'4" (40 inch)	7'0" (84 inch)
3670	3'6" (42 inch)	7'0" (84 inch)
3870	3'8" (44 inch)	7'0" (84 inch)
4070	4'0" (48 inch)	7'0" (84 inch)

Door Sizes | 8'0" Height

Call Size	Nominal Width	Nominal Height
2080	2'0" (24 inch)	8'0" (96 inch)
2480	2'4" (28 inch)	8'0" (96 inch)
2680	2'6" (30 inch)	8'0" (96 inch)
2880	2'8" (32 inch)	8'0" (96 inch)
21080	2'10" (34 inch)	8'0" (96 inch)
3480	3'4" (40 inch)	8'0" (96 inch)
3680	3'6" (42 inch)	8'0" (96 inch)
3880	3'8" (44 inch)	8'0" (96 inch)
4080	4'0" (48 inch)	8'0" (96 inch)

*See specific listings for full details




SD SERIES

Grade 2 Standard Duty Cylindrical Lock

Click On The Lock Image to See The Price.

Typical Applications

- Assisted Living
- Hospitality
- Houses of Worship
- Industrial
- Medium/Light Commercial Installations
- Multi-family
- Offices
- Retail

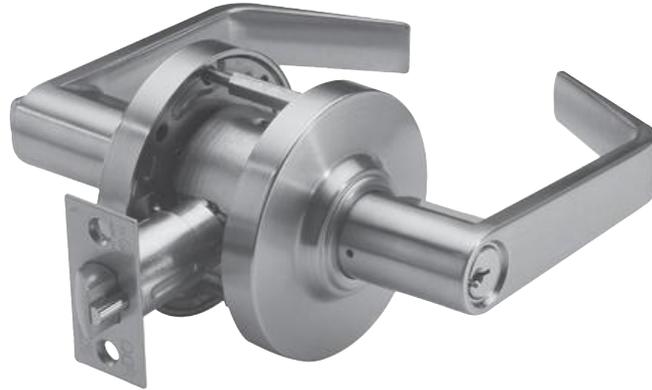

Specifications



ADA COMPLIANT

FOR DOORS:	• 1-3/8" to 1-3/4" thick • Preset for 1-3/4" door
APPLICATION:	• Through door thru-bolting • Fits standard 160 and 161 Door prep • Thru-Bolts are removable
BACKSET:	• 2-3/4" standard • 2-3/8", 3-3/4", 5" optional
CHASSIS:	• Heavy-gauge cold rolled steel mechanism • Dichromated for corrosion resistance
FRONT:	• 2-1/4" x 1-1/8" or 2-1/4" x 1" • Stainless Steel or Wrought Brass
STRIKE:	• ASA standard • T-Strike or Full Lip Strike optional • Stainless Steel or Wrought Brass
LEVERS:	• Philadelphia, Boston, Miami, Memphis, Orlando
ROSE:	• 3-3/8" DIA Wrought
LATCHBOLT:	• 1/2" Throw
HAND:	• Non-handed (Except Memphis)
TRIM:	• Solid diecast PHL, BSN, MIA, MEM and ORL Levers
KEYS:	• Two (2) per Lock • Wrought Brass Roses • Concealed Screws
KEYWAYS:	• SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
INTERCHANGEABLE CORE:	• 6 or 7-pin • Large Format IC Core available for PHL Lever ONLY • Compatible with Best, Falcon & Arrow. Not available with Memphis lever
CYLINDER:	• 6-pin Brass Insert Cylinder keyed to 5-pins • Standard High Security and UL437 Cylinders Available
KEYING:	• Options: MK, CMK or GMK / Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) • Can be keyed into existing master key systems
FINISHES:	• 605 (US3), 606 (US4), 613E, 622 (US19), 626 (US26D) †
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL listed for 3 hrs, for single doors up to 4'0" x 8'0" • Certified to ANSI/BHMA A156.2 Grade 2 • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • TAA compliant. Country of origin: KR • Five (5) year Limited Warranty
WARRANTY:	

† Available with antimicrobial coating, technology that is known to inhibit the growth of microbes.

SV SERIES

Grade 2 Standard Duty Ball Knob Cylindrical Lock

Click On The Lock Image to See The Price.

Typical Applications

- Apartments
- Back-of-House Hotel/Motel
- Heavy-Duty Residential
- Houses of Worship
- Medium Traffic Commercial Applications
- Offices
- Retail Backroom
- Retrofit/Repair/Replacement
- Warehouses

Features

- UL listed for 3-hour fire door
- ANSI/BHMA A156.2 Grade 2
- 9 standard functions
- Various strike and latch options to accommodate any opening
- Available in keyways of most major manufacturers
- Tactile abrasive coating option
- Antimicrobial coating option
- One (1) year limited warranty



**Click on Lock Image
to See Price**

Specifications



FOR DOORS:	• 1-3/8" to 1-3/4" thick
BACKSET:	• 2-3/4" standard • 2-3/8"
FRONT:	• 2-1/4" x 1-1/8" or 2-1/4" x 1" • Stainless Steel or Wrought Brass
STRIKE:	• 4-7/8" x 1-1/4" (ASA). "T" or "FL" Strike optional. Stainless steel or wrought bronze.
ROSE:	• 3" DIA Wrought
LATCHBOLT:	• 1/2" throw. Solid brass. Adjustable for beveled doors.
HAND:	• Non-handed
KEYS :	• Two change keys per lock.
KEYWAYS :	• Available in keyways of most major manufacturers.
CYLINDER :	• Brass 6-pin cylinder keyed to 5 pins. • Standard High Security and UL437 Cylinders Available
TRIM:	• Stainless Steel or Wrought Brass Knobs and Roses
KEYING:	• Can be MK, CMK, GMK, or CK. Available Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA). Can be keyed into existing masterkey systems of other manufacturers.
FINISHES:	• 605 (US3), 613E, 630 (US32D) • Optional Antimicrobial Coating available
WARRANTY:	• One (1) Year Limited Warranty
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• Certified to ANSI/BHMA A156.2, Grade 2 • UL/CUL 10C listed for 3 hrs, for single doors up to 4'0" x 8'0" • TAA compliant. Country of origin: KR

4200R SERIES

Commercial Wide Stile Rim Exit Device



Click on Panic Device
Image to See Price

RIM
ANSI TYPE 1



ADA COMPLIANT

Specifications

CHASSIS:	• Corrosion resistant plated steel
RAIL:	• Heavy gauge steel or stainless steel
LATCH:	• RIM (R) – 3/4" throw
BACKSET:	• 2-3/4" Backset Compatible with 161 prep
HAND:	• Device is non-handed
DOGGING:	• Hex key dogging standard • Dogging not available on fire listed devices
MINIMUM STILE WIDTH:	• 4-1/4" for device (exit only) • Minimum stile requirements with trim varies by trim type
DOOR THICKNESS:	• 1-3/4" standard
DOOR WIDTH:	• Standard for 3 ft doors, option available for doors up to 4'
FINISHES:	• 626 – Satin Chrome, 630 – Satin Stainless Steel, 689 – Aluminum, 693 – Black, 695 – Duro Bronze, 696 – Gold
FASTENERS:	• Includes machine screws and wood screws • Sex nuts supplied with all Fire Listed devices
WARRANTY:	• Five (5) year limited warranty
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL 305 listed for "Panic" , UL listed for "Fire Exit Hardware" labeled for up to 1-1/2 hours, 3'0" x 7'0" Max Size • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • TAA compliant. Country of origin: Taiwan

4200 SERIES

Commercial Wide Stile Exit Device Trim

Lever Styles



BOSTON — BSN
4S TRIM ONLY



MIAMI — MIA
4S TRIM ONLY



PHILADELPHIA — PHL

Trim Types



EW - ESCUTCHEON
WIDE



EN - ESCUTCHEON
NARROW



GW - GRIP PULL
WIDE



S - SECTIONAL
LEVER



P03 - PULL



P02 - PULL



P01 - PLATE



K - SECTIONAL
KNOB

Click on Product Image to See Price

Grade 1 Closer Collection

Click On The Closer Image to See The Price.

Making Door Control Easy

TRW offers a comprehensive line of door closers designed and manufactured to ensure superior performance and reliability. They offer the perfect combination of reliability, appearance, and durability. With a wide range of models and features, TRW has a door closer for most application

Comprehensive Offering

7100

Institutional



Applications

7100 — The 7100 Series is PDQ's top of line heavy duty closer. It is designed for high use, high abuse institutional applications such as K-12, higher education and government buildings. 7100 Series closers are ideal for retrofit and new construction applications where strength and durability are required.

5100

Institutional



Applications

5100 — 5100 Series Door Closer is a heavy duty multi-feature closer that is perfect for high use, high abuse applications such as K-12, higher education, and government buildings. The 5100's compact design is ideal for interior door applications where it's distinctive lines harmonize with most decors.

5500

Commercial



Applications

5500 (Full cover) — Designed for maximum versatility, the 5500 Series sports a full cover and can be used for both commercial and institutional applications. This rugged workhorse is perfect for high traffic applications including federal/state buildings, assisted living facilities, hospitality, retail, religious, and medical buildings.

5300

Commercial




Applications

5300 (Slim cover) — The aesthetically pleasing 5300 Series comes standard with a slim line cover and offers the ideal combination of appearance, reliability, and durability for today's market. This rugged closer is perfect for high traffic applications such healthcare, hospitality, government, assisted living, retail, and religious facilities.

3100

Standard Commercial

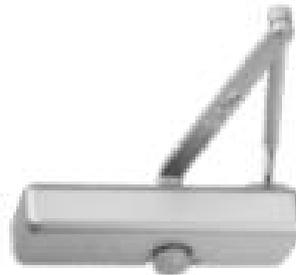

Applications

3100—Designed for medium-light duty applications, the 3100 Series is ideal for aluminum storefronts, interior offices, multi family, hospitality and many other applications. The 3100 combines dependable operation, low maintenance and stylish look.

SF SERIES

Grade 2 Standard Duty Cylindrical Lock

Reliable Security for Multi-Family, Multi-Tenant and Light Commercial Applications.

- 5 functions - Privacy, Passage, Entrance Storeroom plus Single Dummy
- Heavier duty cylindrical lock is more durable than a tubular lock
- 5 designer levers to choose from
- 7 architectural finishes
- Stylish 2-9/16" round rose and 2-15/16" square rose
- Retrofits all major manufacturer's door preps
- Adjustable 2-3/8" – 2-3/4" backset latch is standard.
- Optional fixed backset latch adds fire label and BHMA certification.
- Conventional and SFIC core cylinders.
- Anti-lockout kick-off feature (Privacy)
- Suitable for doors 1-3/8" – 1-3/4" thick
- Shares common levers with SD Cylindrical and CL Interconnected locks. Mix and match for a uniform look.



Applications



MULTI-FAMILY
HOUSING



SENIOR
LIVING



STUDENT
HOUSING



LIGHT
COMMERCIAL

Specifications



ADA COMPLIANT

FOR DOORS:	• 1-3/8" to 1-3/4" thick • Preset for 1-3/4" door
APPLICATION:	• Fits standard 160 and 161 door prep • No additional thru-bolt
BACKSET:	• Adjustable - 2-3/8" - 2-3/4" (Optional UL Listed fire latch has fixed backsets, 2-3/8" or 2-3/4")
CHASSIS:	• Heavy-gauge cold rolled steel mechanism • Dichromated for corrosion resistance
FRONT:	• 1" face width, 1/4" radius with square corner filler for 1-1/8" width.
STRIKE:	• Full Lip Strike standard, ASA and T-Strike optional
LEVERS:	• Philadelphia, Boston, Miami, Memphis and Orlando
ROSE:	• 2-9/16" Diameter Round Rose, 2-15/16" Square Rose
LATCHBOLT:	• Adjustable - 2-3/8" - 2-3/4" latch standard for Non-Keyed functions, with optional UL fire-rated 2-3/4" or 2-3/8" fixed backset. • Fixed backset 2-3/8" or 2-3/4" latchbolt standard for Keyed functions.
HAND:	• Non-handed
TRIM:	• Solid diecast PHL, BSN, MIA, MEM and ORL levers • Wrought brass roses • Concealed screws
KEYS:	• Two (2) per Lock
KEYWAYS:	• SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
INTERCHANGEABLE CORE:	• 6 or 7-pin • Compatible with Best, Falcon & Arrow. Not available with Memphis lever.
CYLINDER:	• 6-pin Brass Insert Cylinder keyed to 5-pins • Standard High Security and UL437 Cylinders Available
KEYING:	• Options: MK, CMK or GMK / Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) • Can be keyed into existing master key systems
FINISHES:	• 605 (US3), 606 (US4), 613E, 619 (US15), 622 (US19), 625 (US26), 626 (US26D)
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• Entry function and optional fixed backset latch only. – Certified to ANSI/BHMA 156.2, Grade 2 (fixed backset latch only). – UL listed for single doors up to 4'0" x 8'0" when ordered with UL latchbolt, contact factory for details. • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • TAA compliant. Country of origin: KR
WARRANTY:	• Three (3) year Limited Warranty

GP SERIES

Grade 2 Heavy Duty Cylindrical Lock



ASSEMBLED
IN THE USA

Click On The Lock Image to See The Price.

Typical Applications

- Government Facilities
- Healthcare
- Higher Education
- Hospitality
- Houses of Worship
- Industrial
- K-12 Education
- Multi-family
- Offices
- Public Buildings



Specifications



ADA COMPLIANT

FOR DOORS:	• 1-3/8" to 1-3/4" thick • Preset for 1-3/4" door
APPLICATION:	• Through door thru-bolting • Fits 160 and 161 Door prep
BACKSET:	• 2-3/4" standard • 2-3/8"
CHASSIS:	• Heavy duty diecast, investment cast, cold rolled steel, stainless steel mechanism
FRONT:	• 2-1/4" x 1-1/8" or 2-1/4" x 1" • Stainless Steel or Wrought Brass • Beveled 1/8" on 2"
STRIKE:	• ASA standard • Stainless Steel or Wrought Brass • T-Strike or Full Lip Strike optional
LEVERS:	Philadelphia (SFL and LFL), Boston (SFL), Miami (SFL)
ROSE:	• 3-3/8" DIA Wrought
LATCHBOLT:	• 1/2" Throw
HAND:	• Non-handed
TRIM:	• Solid diecast PHL, BSN or MIA Levers • 65° Lever Rotation • Wrought Brass Roses • Concealed Screws
KEYS:	• Two (2) per Lock
KEYWAYS:	• SCC standard (Schlage C Compatible) • Compatible with Best, Falcon and Arrow small format IC cores
INTERCHANGEABLE CORE:	• Available for all keyed functions • Large Format IC Core available for PHL Lever ONLY. • 6 or 7-pin • Compatible with Best, Falcon & Arrow
CYLINDER:	• 6-pin Brass Insert Cylinder keyed to 5-pins • Standard High Security and UL437 Cylinders Available
KEYING:	• Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) Can be keyed into existing master key systems
FINISHES:	• 605 (US3), 606 (US4), 612 (US10), 613E, 619 (US15), 622 (US19), 625 (US26), 626 (US26D) • Optional Antimicrobial Coating Available for 626 (USD26D) only • Optional Weatherized Finish for 626 (USD26D) only
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL listed for 3 hrs, for single doors up to 4'0" x 8'0" • Certified to ANSI/BHMA 156.2, Grade 2 • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
WARRANTY:	• Eight (8) Year Limited Warranty
COUNTRY OF ORIGIN:	• Assembled in the U.S.A. with U.S. and foreign material. • Meets requirements of the Buy American Act as a COTS product manufactured in the United States.

GT SERIES

Grade 1 Heavy Duty Cylindrical Lock



ASSEMBLED
IN THE USA

Typical Applications

- Federal and State Government
- Healthcare
- Higher Education
- Hospitality
- Houses of Worship
- Industrial
- K-12 Education
- Offices
- Public Buildings



Specifications



ADA COMPLIANT



FOR DOORS:	• 1-3/4" to 2-1/4" thick • Preset for 1-3/4" door
APPLICATION:	• Through door thru-bolting
DOOR PREP:	• Standard ANSI A156.115 (161) for Cylindrical Locks
BACKSET:	• 2-3/4"
CHASSIS:	• Heavy duty diecast, investment cast, chromated cold rolled steel and stainless steel mechanism. Billet Steel spindles for locking functions
FRONT:	• 2-1/4" x 1-1/8" • Stainless Steel or Wrought Brass • Beveled 1/8" in 2"
STRIKE:	• ASA standard • T-Strike or Full Lip Strike optional • Stainless Steel or Wrought Brass
LEVERS:	• Philadelphia (SFL and LFL), Boston (SFL), Miami (SFL)
ROSE:	• 3-3/8" DIA Wrought
LATCHBOLT:	• 9/16" Throw Deadlocking
HAND:	• Non-handed
TRIM:	• Solid diecast PHL, BSN or MIA Levers • 41° Lever Rotation Standard with 2-3/4" Backset • Wrought Brass Roses, Concealed Screws • 65° Lever Rotation Standard with 2 3/4" latch for double doors
KEYS:	• Two (2) per Lock
KEYWAYS	• SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
INTERCHANGEABLE CORE:	• Available for all keyed functions • 6 or 7-pin • Large Format IC Core available for PHL Lever ONLY. • Compatible with Best, Falcon and Arrow small format IC cores
CYLINDER:	• 6-pin Brass Insert Cylinder keyed to 5-pins • Standard High Security and UL437 Cylinders Available
KEYING:	• Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) Can be keyed into existing master key systems
FINISHES:	• 605 (US3), 606 (US4), 612 (US10), 613E, 619 (US15), 622 (US19), 625 (US26), 626 (US26D) • Optional Antimicrobial Coating 626 (USD26D) only† • Optional Weatherized Finish for 626 (USD26D) only
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL listed for 3 hrs, for single doors up to 4'0" x 8'0" • Certified to ANSI/BHMA A156.2, Grade 1 • California Education Code Compliant (Functions GT135, GT135LED, GT145) • Federal Specification FF-H-10C (Superseded by A156.2) • Approved for Florida HVHZ (High Velocity Hurricane Zone). PDQ Product Approval: FL 21376. Design load rating: ± 70.0 PSF for single door (3' x 7') • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
WARRANTY:	• Twenty-five (25) year Limited Warranty
COUNTRY OF ORIGIN:	• Proudly Assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act as a COTS product manufactured in the United States.

† Available with antimicrobial powder coating, treated with silver ionic technology that is known to inhibit the growth of microbes.

XGT SERIES

Grade 1 Extra Heavy Duty Cylindrical Lock



ASSEMBLED
IN THE USA

Click On The Lock Image to See The Price.

Typical Applications

- Federal and State Government
- Healthcare
- Higher Education
- Hospitality
- Houses of Worship
- Industrial
- K-12 Education
- Offices
- Public Buildings



ADA COMPLIANT



Specifications

FORDOORS:	• 1-3/4" to 2-1/4" thick • Preset for 1-3/4" door
APPLICATION:	• Through door thru-bolting
DOOR PREP:	• Standard ANSI A156.115 (I61) for Cylindrical Locks
BACKSET:	• 2-3/4" • Heavy duty diecast, investment cast, chromated cold rolled steel and stainless steel mechanism. • Billet Steel spindles for locking functions
FRONT:	• 2-1/4" x 1-1/8" • Stainless Steel or Wrought Brass • Beveled 1/8" in 2"
STRIKE	• ASA standard • T-Strike or Full Lip Strike optional • Stainless Steel or Wrought Brass
LEVERS:	• Philadelphia (SFL and LFL), Boston (SFL), Miami (SFL)
ROSE:	• 3-3/8" DIA Wrought
LATCHBOLT:	• 9/16" Throw Deadlocking
HAND:	• Non-handed
TRIM:	• Solid diecast PHL, BSN or MIA Levers • 41° Lever Rotation Standard with 2-3/4" Backset • Wrought Brass Roses, Concealed Screws • 65° Lever Rotation Standard with 2 3/4" latch for double doors
KEYS:	• Two (2) per Lock
KEYWAYS	• SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
INTERCHANGEABLE CORE:	• Available for all keyed functions • 6 or 7-pin • Large Format IC Core available for PHL Lever ONLY. • Compatible with Best, Falcon and Arrow small format IC cores
CYLINDER:	• 6-pin Brass Insert Cylinder keyed to 5-pins • Standard High Security and UL437 Cylinders Available
KEYING:	• Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) Can be keyed into existing master key systems
FINISHES:	• 605 (US3), 606 (US4), 612 (US10), 613E, 619 (US15), 622 (US19), 625 (US26), 626 (US26D) • Optional Antimicrobial Coating 626 (USD26D) only† • Optional Weatherized Finish for 626 (USD26D) only
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL listed for 3 hrs, for single doors up to 4'0" x 8'0" • Certified to ANSI/BHMA A156.2, Grade 1 • California Education Code Compliant (Functions XGT135, XGT135LED, XGT145) • Federal Specification FF-H-10C (Superseded by A156.2) • Approved for Florida HVHZ (High Velocity Hurricane Zone). PDQ Product Approval: FL 21376. • Design load rating: ± 70.0 PSF for single door (3' x 7') • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
WARRANTY:	• Limited Lifetime Warranty
COUNTRY OF ORIGIN:	• Proudly Assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act as a COTS product manufactured in the United States.

† Available with antimicrobial powder coating, treated with silver ionic technology that is known to inhibit the growth of microbes.

SX SERIES


Grade 1 Heavy Duty Ball Knob Cylindrical Lock

Typical Applications

- Apartments
- Back-of-House Hotel/Motel • Healthcare
- Commercial Buildings
- Government Buildings
- High Traffic Areas
- Houses of Worship • Military Barracks • Retail Backroom
- Retrofit/Repair/Replacement

Features

- UL listed for 3-hour fire door
- Exceeds ANSI/BHMA A156.2 Grade 1
- 5 standard functions
- Various strike and latch options to accommodate any opening
- Available in keyways of most major manufacturers
- Tactile abrasive coating option
- Antimicrobial coating option
- Five (5) year limited warranty

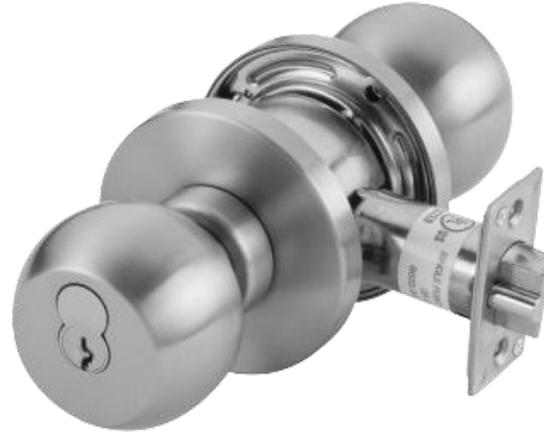

Specifications



FORDOORS:	• 1-3/8" to 2" thick.
DOOR PREP:	• Fits Standard 160 or 161 Door Prep.
BACKSET:	• 2-3/8" • 2-3/4"
CASE:	• Steel, Yellow Chromate Plate
FRONT:	• 2-1/4" x 1-1/8" or 2-1/4" x 1" • Stainless Steel or Wrought Bronze.
STRIKE:	• 4-7/8" x 1-1/4" (ASA). "T" or "FL" Strike Optional.
UL F LATCHBOLT:	• Stainless Steel or Wrought Bronze. • 3 hours of fire testing qualified, stainless steel latch bolt.
ROSE:	• 3" DIA Wrought.
HAND:	• Non-handed.
TRIM:	• CQ ball knob. Stainless steel or wrought brass. • Available in keyways of most major manufacturers.
KEYWAYS:	• Supplied standard to accommodate SFIC core. (Cylinder not included).
CYLINDER:	• Standard High Security and UL437 Cylinders Available
KEYING:	• Standard core is available and can be MK, CMK, GMK, or CK. Available Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA). Can be keyed into existing masterkey systems of other manufacturers.
FINISHES:	• 630 (US32D)
WARRANTY:	• Five (5) Year Limited Warranty
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• Meets ANSI/BHMA A156.2–2003 Grade 1, surpassed 800,000 cycles • UL/CUL 10C listed for 3 hrs, for single doors up to 4'0" x 8'0" • TAA compliant. Country of origin: Taiwan

‡ Available with antimicrobial coating, technology that is known to inhibit the growth of microbes.

Click On The Deadbolt Image to See The Price.

Typical Applications

- Commercial
- Government
- Hospitality
- Institutional
- Military
- Multi-family
- Offices
- Retail



Specifications




FOR DOORS:	• 1-3/4" thick standard, contact factory for other thicknesses
DOOR PREP:	• 2-1/8" DIA
BACKSET:	• 2-3/4" (Default) • 2-3/8" available
FRONT:	• 2-1/4" x 1-1/8" or 2-1/4" x 1" • Stainless Steel or Wrought Brass
STRIKE:	• 2-3/4" x 1-1/8" • Stainless Steel or Wrought Brass • Dust Box Included
DEADBOLT:	• 1" Throw • Brass Bolt containing two concealed 1/4" case-hardened Steel Roll Pins
HAND:	• Non-handed
TRIM:	• Wrought Brass Scalp • Reinforced Diecast Rose
KEYS:	• Two (2) per Lock
KEYWAYS:	• SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
CYLINDER:	• 6-pin Brass Mortise Cylinder keyed to 5-pins
KEYING:	• Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) • Can be keyed into existing master key systems
FINISHES:	• 605 (US3), 606 (US4), 612 (US10), 613E, 625 (US26), 626 (US26D)
WARRANTY:	• One (1) year Limited Warranty
LISTINGS:	• UL 10C listed, 3-hour fire rated as auxiliary locks for A label single doors • UL 10B listed for neutral pressure doors

KM SERIES

Heavy Duty Deadbolt

Typical Applications

- Commercial
- Government
- Hospitality
- Institutional
- Military
- Multi-family
- Offices
- Retail

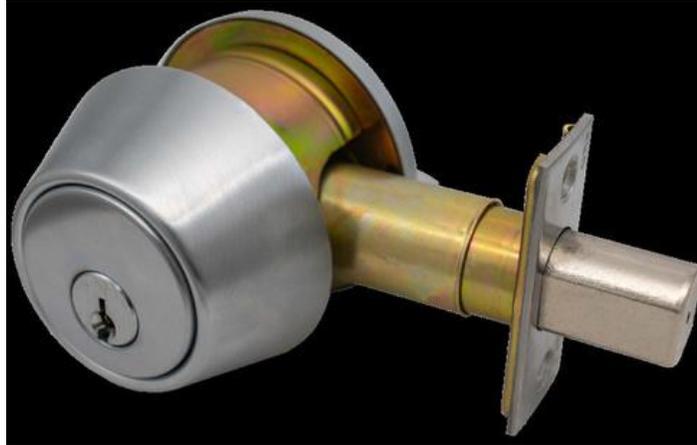

ADA COMPLIANT

Specifications

FOR DOORS:	• 1-3/8" to 1-3/4" thick for Conventional Cylinder, 1-1/2" to 2" for SFIC
DOOR PREP:	• 2-1/8" DIA
BACKSET:	• 2-3/4" - 2-3/8" adjustable (Default) • 2-3/4" (Option)
FRONT:	• 2-1/4" x 1-1/8" (Default) • 2-1/4" x 1" faceplate available • Stainless Steel or Wrought Brass
STRIKE:	• 2-3/4" x 1-1/8" • Stainless Steel or Wrought Brass • Dust Box Included
DEADBOLT:	• 1" Throw • Brass Bolt containing one 1/4" case-hardened Steel Roll Pin
THUMBTURN:	• ADA Compliant
HAND:	• Non-handed
TRIM:	• Stainless Steel or Wrought Brass Scalp • Reinforced Diecast Rose
KEYS:	• Two (2) per Lock
KEYWAYS:	• SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
INTERCHANGEABLE CORE:	• 6 or 7-pin • Compatible with Best, Falcon and Arrow
CYLINDER:	• 6-pin Brass Insert Cylinder keyed to 5-pins • Standard High Security and UL437 Cylinders Available
KEYING:	• Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) • Can be keyed into existing master key systems
FINISHES:	• 605 (US3), 606 (US4), 613E, 622 (US19), 626 (US26D), 630 (US32D)
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL 10C listed, 3-hour fire rated as auxiliary locks for A label single doors • UL 10B listed for neutral pressure doors • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • TAA compliant. Country of origin: KR • One (1) year Limited Warranty
WARRANTY:	

Click On The Deadbolt Image to See The Price.

Typical Applications

- Light Commercial Installations
- Low Security Applications
- Residential



Unoccupied

Occupied

KV with Privacy Indicator

Specifications



FOR DOORS:	• 1-3/8" to 1-3/4" thick for Conventional Cylinder, 1-1/2" to 2" for SFIC
DOOR PREP:	• 2-1/8" DIA
BACKSET:	• 2-3/4" - 2-3/8" adjustable (Default)
FRONT:	• 2-1/4" x 1" with filler plate • Stainless Steel or Wrought Brass
STRIKE:	• 2-3/4" x 1" • Stainless Steel or Wrought Brass • Dust Box Included
DEADBOLT:	• 1" Throw • Brass Bolt containing one 1/4" case-hardened Steel Roll Pin
HAND:	• Non-handed
TRIM:	• Stainless Steel or Wrought Brass Scalp
KEYS:	• Two (2) per Lock
KEYWAYS:	• SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
INTERCHANGEABLE CORE:	• 6 or 7-pin • Compatible with Best, Falcon and Arrow
CYLINDER:	• 6-pin Brass Insert Cylinder keyed to 5-pins • Standard High Security and UL437 Cylinders Available
KEYING:	• Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) • Can be keyed into existing master key systems
FINISHES:	• 605 (US3), 606 (US4), 613E, 622 (US19), 629 (US32), 630 (US32D)
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• ANSI "Positive Pressure Fire Tests of Door Assemblies" for up to and including 3 hrs. • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Building • UL 10C listed, 3-hour fire rated as auxiliary locks for A label single doors • UL 10B listed for neutral pressure doors • TAA compliant. Country of origin: KR
WARRANTY:	• One (1) year Limited Warranty

MJ SERIES

Heavy Duty Mortise Cylinder Deadbolt

Typical Applications

- Auxiliary Doors
- Closets
- Commercial/Institutional/Military
- Common Areas
- Equipment Rooms
- Storerooms
- Restrooms
- Privacy Rooms



Specifications

Small Mortise Body Type Prep




ADA COMPLIANT



FOR DOORS:	• 1-3/4"
BACKSET:	• 2-3/4"
CASE:	• Steel — Dichromated for corrosion resistance
FACEPLATE:	• 1-1/4" x 5-5/8"
STRIKE:	• 2-1/4" x 1" • Stainless Steel.
DEADBOLT:	• 1" Throw. • Stainless Steel.
THUMBTURN:	• Standard ADA Compliant *134LH & 134RH thumbturn varies from standard thumbturn - it is not ADA Compliant*
INDICATOR:	• Vacant/Occupied available.
HAND:	• Non-handed except for function MJ134 Classroom. (See Function Table and How to Order Guide).
KEYS:	• Two (2) per Lock.
KEYWAYS:	• SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
INTERCHANGEABLE CORE:	• 6 or 7-pin • Compatible with Best, Falcon & Arrow • Large Format IC Cores compatible with Schlage.
CYLINDER:	• 6 or 7-pin Mortise Cylinder
KEYING:	• Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) • Can be keyed into existing master key systems
FINISHES:	• 605 (US3), 606 (US4), 612 (US10), 613E, 622 (US19), 629 (US32), 630 (US32D)
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL listed for 3 hours, for single doors up to 4'0"x 8'0" • TAA compliant. Country of origin: Taiwan
WARRANTY:	• 10-Year Limited Warranty

4200V SERIES

Commercial Wide Stile Surface Vertical Rod Exit Device

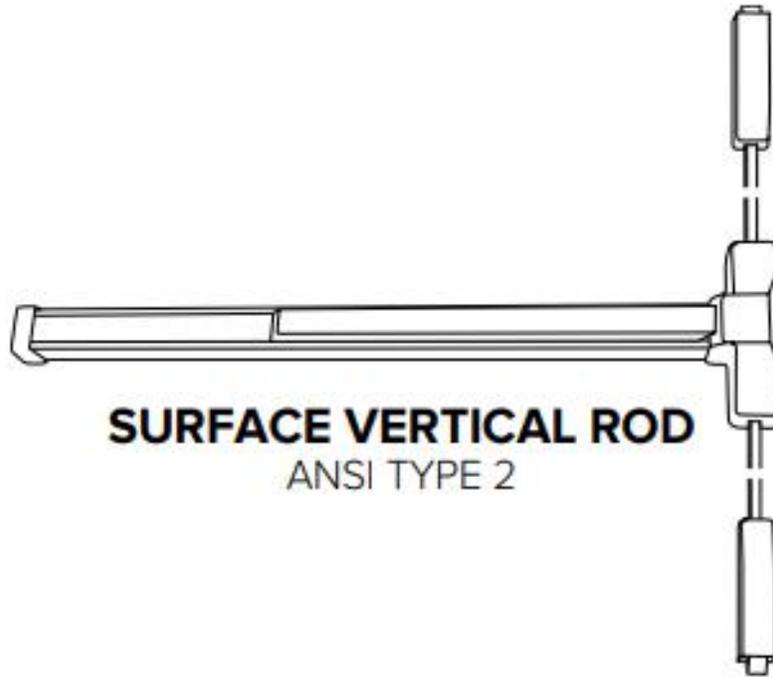

ADA COMPLIANT

Specifications

CHASSIS:	• Corrosion resistant plated steel
RAIL:	• Heavy gauge steel or stainless steel
LATCH:	• SURFACE VERTICAL ROD (V) – Top Latch-Pullman with dead latching 5/8" throw • Bottom Latch- Pullman with 5/8" throw, held retracted during door swing
BACKSET:	• 2-3/4" Backset Compatible with 161 prep
HAND:	• Device is non-handed
DOGGING:	• Hex key dogging standard • Dogging not available on fire listed devices
MINIMUM STILE WIDTH:	• 4-1/4" for device (exit only) • Minimum stile requirements with trim varies by trim type
DOOR THICKNESS:	• 1-3/4" standard
DOOR WIDTH:	• Standard for 3 ft doors, option available for doors up to 4'
FINISHES:	• 626 – Satin Chrome, 630 – Satin Stainless Steel, 689 – Aluminum, 693 – Black, 695 – Duro Bronze, 696 – Gold
FASTENERS:	• Includes machine screws and wood screws • Sex nuts supplied with all Fire Listed devices
VERTICAL RODS:	• Stock for 7' doors standard. Rod extensions available for doors up to 10'.
WARRANTY:	• Five (5) year limited warranty
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL 305 listed for "Panic", UL listed for "Fire Exit Hardware" labeled for pair of doors up to 1-1/2 hours, 6'0" x 7'0" Max Opening • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • TAA compliant. Country of origin: Taiwan

6300/6400R SERIES

Wide/Narrow Stile Rim Exit Device

ASSEMBLED IN THE USA



Click On The Device Image to See The Price.

6300R Wide Stile/6400R Narrow Stile Panic & Fire Rated



Specifications

Rail	
Latch	• Stainless steel dead locking with 3/4" throw
Hand	• Device is non-handed • Trim is non-handed or field reversible
Dogging	• Hex key dogging standard • Cylinder dogging optional • Dogging not available for fire labeled devices & 24" devices
Minimum Stile Width	• 6300 - 3-1/2" • 6400 - 3 1/8" with 639027/639057 strike and 2 1/8" on aluminum frames with blade stop strike.
Door Thickness	• 1-3/4" - 2" (Consult factory for other)
Door Width	• 24", 36", 48" standard
Door Height	• Panic - Up to 10' • Fire - See fire ratings charts page 150
Strike Options	• Roller (Default) • Blade stop • Double door • Windstorm/Fire Mullion - Panic Mullion uses standard roller strike
Finishes	• 605 - Polished Brass, 606 - Satin Brass, 613E - Dark Oxidized Satin Bronze (Equivalent), 622 - Flat Black, 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F - Full Stainless Steel • Optional Anti Microbial Coating available on 626 & 630
Fasteners	• Includes machine and wood screws • SNB Optional
Warranty	• Ten (10) year limited warranty
Electrified Options	• Motorized Latch Retraction • Request to Exit/Signal Switch • Alarmed Exit • Latch Bolt Monitor • ISMC Connectors • Delayed Egress
Certifications: Compliances: Listings:	<ul style="list-style-type: none"> • ETL listed for UL 305 "Panic", listed for UL 10C "Fire Exit Hardware" up to 3 hours • Certified to ANSI/BHMA A156.3 Grade 1 • 8th edition (2023) FBC structural requirements compliant including the HVHZ • FL #40297 +60/-65 psf 4080 16ga Single • FL #40297 +50/-50 psf 4080 18ga Single • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • Meets requirements of the BAA as a COTS product manufactured in the United States • Meets CBC Chapter 11B-309.4 when ordered with 5P option

6300/6400V SERIES

ASSEMBLED IN THE USA

Wide/Narrow Stile Surface Vertical Rod Exit Device

6300V Wide Stile/6400V Narrow Stile Panic & Fire Rated



Specifications



Rail	• Extruded aluminum
Latch	• Top - Stainless Steel 3/4" toggle • Bottom - 5/8" Travel Drop Bolt • Less bottom rod option
Hand	• Device is non-handed • Trim is non-handed or field reversible
Dogging	• Hex key dogging standard • Cylinder dogging optional • Dogging not available for fire labeled devices & 24" devices
Minimum Stile Width	• 6300 - 3-1/2" • 6400 - 3 1/8" with 639027/639057 strike and 2 1/8" on aluminum frames with blade stop strike.
Door Thickness	• 1-3/4" - 2" (Consult factory for other)
Door Width	• 24", 36", 48" standard
Door Height	• Panic - Up to 10' • Fire - See fire ratings charts page 150
Strike	• Cast top strike, plate bottom strike
Finishes	• 605 - Polished Brass, 606 - Satin Brass, 613E - Dark Oxidized Satin Bronze (Equivalent), 622 - Flat Black, 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F - Full Stainless Steel • Optional Anti-Microbial Coating available on 626 & 630
Fasteners	• Includes machine screws and wood screws • SNB Optional
Warranty	• Ten (10) year limited warranty
Electrified Options	• Motorized Latch Retraction • Request to Exit/Signal Switch • Alarmed Exit • Latch Bolt Monitor • ISMC Connectors • Delayed Egress (Can only be used on a door with a 3 1/2" or larger stile)
Certifications: Compliances: Listings:	• ETL listed for UL 305 "Panic", listed for UL 10C "Fire Exit Hardware" up to 3 hours. • ANSI/BHMA A156.3 Grade 1 • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • FL #40297 +50/-50 psf 8080 18ga Pair • Meets requirements of the BAA as a COTS product manufactured in the United States • Meets CBC Chapter 11B-309.4 when ordered with 5P option (Available with Top & Bottom Rod and Less Bottom Rod (LBR))

6300/6400C

SERIES

ASSEMBLED
IN THE USA



Wide/Narrow Stile Concealed Vertical Rod Exit Device

Click On The Device Image to See The Price.

6300C Wide Stile/6400C Narrow Stile Panic & Fire Rated



Specifications



Rail	• Extruded aluminum
Latch	• Top - Stainless Steel 3/4" toggle • Bottom - 5/8" Travel Drop Bolt • Less bottom rod option
Hand	• Device is non-handed • Trim is non-handed or field reversible
Dogging	• Hex key dogging standard • Cylinder dogging optional • Dogging not available for fire labeled devices & 24" devices
Minimum Stile Width	• 6300 - 3-1/2" • 6400 - 3 1/8" with 639027/639057 strike and 2 1/8" on aluminum frames with blade stop strike.
Door Thickness	• 1-3/4" - 2"
Door Width	• 24", 36", 48" standard
Door Height	• Panic - Up to 10' • Fire - See fire ratings charts page 150
Strike	• Cast top strike, plated bottom strike
Finishes	• 605 - Polished Brass, 606 - Satin Brass, 613E - Dark Oxidized Satin Bronze (Equivalent), 622 - Flat Black, 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F - Full Stainless Steel • Optional Anti-Microbial Coating available on 626 & 630
Fasteners	• Includes machine and wood screws • SNB Optional
Warranty	• Ten (10) year limited warranty
Electrified Options	• Motorized Latch Retraction • Request to Exit/Signal Switch • Alarmed Exit • Latch Bolt Monitor • ISMC Connectors • Delayed Egress
Certifications: Compliances: Listings:	• ETL listed for UL 305 "Panic", listed for UL 10C "Fire Exit Hardware" up to 3 hours. • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • Meets requirements of the BAA as a COTS product manufactured in the United States • Certified to ANSI/BHMA A156.3 Grade 1 • Meets CBC Chapter 11B-309.4 when ordered with 5P option (Available with Top & Bottom Rod and Less Bottom Rod (LBR))

6300M SERIES

ASSEMBLED IN THE USA



Mortise Exit Device

6300M Wide Stile Panic & Fire Rated



TLA Head Cover
Optional head cover
*630 Finish only



Specifications

Rail	• Extruded aluminum
Latch	• Stainless steel dead locking with 3/4" throw
Hand	• Field reversible
Dogging	• Hex key dogging standard • Cylinder dogging optional • Dogging not available for fire labeled devices & 24" devices
Minimum Stile Width	• 5"
Door Thickness	• 1-3/4" - 2"
Door Width	• 24", 36", 48" standard
Door Height	• Panic - Up to 10' • Fire - See fire ratings charts page 150
Strike Options	• Default ASA (4-7/8")
Finishes	• 605 - Polished Brass, 606 - Satin Brass, 613E - Dark Oxidized Satin Bronze (Equivalent), 622 - Flat Black, 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F - Full Stainless Steel • Optional Anti Microbial Coating available on 626 & 630
Fasteners	• Includes machine screws and wood screws • SNB Optional
Warranty	• Ten (10) year limited warranty
Electrified Options	• Motorized Latch Retraction • Request to Exit/Signal Switch • Alarmed Exit • Latch Bolt Monitor • ISMC Connectors • Delayed Egress
Certifications: Compliances: Listings:	• ETL listed for UL 305 "Panic", listed for UL 10C "Fire Exit Hardware" up to 90 minutes. • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • Meets requirements of the BAA as a COTS product manufactured in the United States

6300D SERIES

Dummy Exit Device



ASSEMBLED
IN THE USA

Click On The Device Image to See The Price.

6300D Dummy



6300D



ADA COMPLIANT

Specifications

Rail	• Extruded aluminum
Hand	• Device is non-handed
Dogging	• Dogging standard • Active push bar, dog to make inactive • Dogging not available for 24" devices
Minimum Stile Width	• 3"
Door Thickness	• 1-3/4" - 2" (Consult factory for other)
Door Width	• 24", 36", 48" standard
Finishes	• 605 - Polished Brass, 606 - Satin Brass, 613E - Dark Oxidized Satin Bronze (Equivalent), 622 - Flat Black, 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F - Full Stainless Steel • Optional Anti Microbial Coating available on 626 & 630
Fasteners	• Includes machine and wood screws • SNB Optional
Warranty	• Ten (10) year limited warranty
Electrified Options	• Request to Exit/Signal Switch • ISMC Connectors
Certifications: Compliances: Listings:	• Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • Meets requirements of the BAA as a COTS product manufactured in the United States

6300/6400 SERIES

Wide Stile/Narrow Stile Exit Device Trims

Trims are non-handed and use simple door prep based on a 2 hole bolt pattern with 7" centers, or a 4 hole bolt pattern with 7"x1-3/8" centers.
Narrow escutcheons work with both wide and narrow stile devices. Wide escutcheons work only with wide stile devices.



6N Narrow Escutcheon - A narrow profile escutcheon for 6300 or 6400 device. Available in 6 lever styles, and in 6 functions. Use with narrow stile devices or a wide stile device when a slimmer look is desired.



6W Wide Escutcheon - A wide escutcheon for the 6300 device. Available in 6 lever styles, and 5 functions - including electric locking. Use with wide stile devices, when a more substantial look is desired, or for retrofit where covering existing holes is important.

**Not compatible with 6400 narrow stile devices*



6T Thumb Latch - A grip pull with a thumb latch for 6300 or 6400 devices. Available in 4 functions.

**Not compatible with 6400C narrow stile devices.*



6P Pull Plates - Stainless Steel pull plate for 6300 device.

**Not compatible with 6400 narrow stile devices.*



6G Grip Pull - A grip pull for 6300 or 6400 devices. Made of stainless steel, this grip pull is available in 2 functions.



6S Rose Trim - Rose trim that fits into standard 161 prepped door with thru bolts. Works with 6300 rim, SVR and CVR devices. Available in 3 lever styles and in 4 functions.

**Not compatible with 6400 narrow stile devices*



6GW Grip Pull - A wide grip pull designed for 6300 exit devices. Available in 3 finishes and 2 functions.
**Not compatible with 6400 devices*



6C Cylinder only - Order this trim option for cylinder only, NightLatch (F03) Function. Includes rim cylinder or *IC rim housing, collar, and required mounting hardware. *IC core sold separately

Lever Styles

PHL



BSN



MIA



ORL



CHI



LAX



6300/6400 SERIES

The following Rim Strike options are available when ordering 6300/6400 devices.

BS – Blade Stop Strike (631041) – Rim Device

This strike is used on aluminum store front doors with a 1/2" blade stop. Strike comes with a protective plate to latch rubbing on frame and required mounting hardware.

Strike is optional on both 6300 and 6400 devices.



ML – Mullion Fire Strike (639080) – Rim Device

This strike must be used for fire labeled rim devices when used with the 9300F mullion. It is also used for windstorm HVHZ labeled devices.

(2) ML strikes are included with every fire rated mullion.

DD – Double Door Strike (631035) – Rim Device

This strike is used to mount a rim device on a pair of doors where one door is fixed by another means (e.g. Flush bolts, Surface bolts)



Rim Device Stile Width Chart

Order Option	Strike #	Application	6300 Min Stile	6400 Min Stile
Default Panic	639027	Standard Panic Labeled	4-1/4"	3-1/8"
Default Fire	639057	Standard Fire Labeled	4-1/4"	3-1/8"
Default Panic	639027	Panic Labeled Mullion	4-3/4"	3-5/8"
ML	639080	Fire Labeled Mullion	4-7/8"	3-3/4"
WS	639080	Windstorm	4-3/8"	3-1/4"
DD	639714	Double Door Strike	4-1/4"	3-1/8"
BS	631041	Panic Labeled Blade Stop	3-1/2"	2-1/8"

Click On The Image to See The Price.

Typical Applications

- High-End Residential
- Multi-family
- Offices

Features

- Contemporary decorative trim perfect for high end residential and office work
- Designed to compliment MR Series Mortise locks sharing the same sectional rose diameter and levers
- Investment cast stainless steel trim
- Range of lever styles available
- Available in round rose or square rose
- Uses a slender 2-3/8" diameter rose providing a clean contemporary look



Round Rose Trim
with Dallas Lever



Square Rose Trim
with Orlando Lever

Specifications

ADA COMPLIANT

FOR DOORS:	• For doors 1-3/8" (35mm) to 1-3/4" (44mm) thick standard
BACKSET:	• 2-3/4" (70mm) default. Optional: 2-3/8" (60mm);
STRIKE:	• "Full Lip" strike default. "T" strike and ASA strike optional
ROSE DIMENSIONS:	• Round Rose: 2-3/8" DIA • Square Rose: 2-9/16"
DOOR PREP:	• ANSI Standard 115.2, Type 161 for 2-3/4" Backset • Type 160 optional
LATCH BOLTS:	• 2-3/4" Backset has 1-1/8" faceplate. 2-3/8" Backset has a 1" faceplate filler
HAND:	• Non-handed, except Memphis. (Orlando, Los Angeles, Houston is handed for 211 function only)
FINISHES:	• 605 (US3) Bright Brass, 606 (US4) Satin Brass, 612 (US10) Satin Bronze, 613E Dark Oxidized Satin Bronze (Equivalent), 622 (US19) Flat Black, 629 (US32) Bright Stainless Steel, 630 (US32D) Satin Stainless Steel
TRIM:	• Stainless Steel Levers and Roses
LEVER DESIGNS:	• Philadelphia, Boston, Miami, Chicago, Houston, Memphis, Orlando, Los Angeles, Dallas and Ball Knob.
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings (except ball knob).
WARRANTY:	• Five (5) year limited warranty

XGT/ GT199A

Electrified Cylindrical Lock Grade 1 Heavy Duty



ASSEMBLED
IN THE USA

Click On The Image to See The Price.

Typical Applications

- Computer Rooms
- High Security Areas
- Pharmacies
- Stairwell Towers
- Tenant Spaces



Specifications



ADA COMPLIANT



PERFORMANCE:	<ul style="list-style-type: none"> • Motor drive factory tested to over 1.4 million cycles (nearly 3x the ANSI/BHMA Grade 1 Standard).
RECOMMENDED POWER SUPPLY:	<ul style="list-style-type: none"> • PDQ Model # PS220. <ul style="list-style-type: none"> – Input: 110-120 VAC 60Hz – Output: 24VDC, 2A, filtered and regulated. • Rated for simultaneous operation of 2ea mortise lock assemblies. • Power Supply Requirements: <ul style="list-style-type: none"> – AC/DC Output Voltage – 1A min (filtered and regulated).
ELECTRICAL SPECIFICATIONS:	<ul style="list-style-type: none"> • Input voltage: 12-24VDC or 12-24VAC. • Max In-rush current: 1.0A. • Standby current: <ul style="list-style-type: none"> – 12VAC: 12mA. – 24VAC: 10mA. – 12VDC: 3mA. – 24VDC: 5mA. • 12-24VDC @ < 1A initial surge (1 sec), 5mA standby after 30 sec. <ul style="list-style-type: none"> – AC Output Voltage. • 12-24VAC (60Hz) @ < 1A initial surge (1 sec), 15mA standby after 30 sec <p>Note: Operating voltage at ± 10% of rated voltage.</p>
CERTIFICATIONS, LISTINGS, COMPLIANCES:	<ul style="list-style-type: none"> • ANSI/UL10C and CAN/ULC-5104 Listed for "Fire Exit Hardware" up to 3 hours for 4'0" x 8'0" maximum single • Assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act as a COTS product manufactured in the United States.
WARRANTY:	<ul style="list-style-type: none"> • 25-Years Mechanical / 2-Years Electronic

Trim/Levers



ALL LEVERS



PHILADELPHIA — PHL



SFL



LFL



BOSTON — BSN



SFL



MIAMI — MIA



SFL

9300 SERIES

Mullions

Click On The Image to See The Price.


9300 Mullion

The TRW 9300 Series removable mullions are designed for use with the 6300/6400 Series Rim Exit Devices on pairs of doors. They are designed for quick removal from the top bracket by simple operation of the rim cylinder when a clear, unobstructed large opening is required. Once the mullion is removed, carts, gurneys, large machinery and the like can freely pass through the opening. When the mullion is re-installed, the unit will self lock in place without a key.

Specifications

Mullion Head/Foot brackets:	• Cast Stainless Steel
Tube Dimensions:	• Powder Coated 2" x 3" Steel - 3/16" Wall
Strike:	• 639080 Strike included for Fire Labeled • Strike not included for panic mullion. Use supplied strike with exit device.
Size:	• 8' or 10' lengths - Can easily be cut to shorter size in field
Finish:	• Powder Coated 689 (Aluminum) • 600 - Primed for Painting
Electrified Options:	• Wire routing w/ plugs
Warranty:	• One (1) year limited warranty
Certifications: Compliances: Listings:	• Fire model is 3 hour fire labeled for pairs up to and including 8' x 8' (With 6300RF/6400RF Rim Device) • Meets requirements of the BAA as a COTS product manufactured in the United States

Orientation

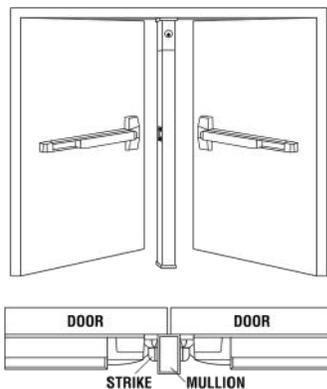

Typical Applications

- Assisted Living
- Hospitality
- Military Housing
- Multi-family
- Offices
- Retail



Specifications

FOR DOORS:	• 1-3/8" and 1-3/4" thick.
PREPARATION:	• ANSI/BHMA A156.115 for 4" and 5-1/2" hole centers, field selectable.
DUST BOX:	• Included for Latchbolt and Deadbolt.
LATCHBOLT BACKSET:	• 2-3/8" or 2-3/4" (Default). Specify when ordering
DEADBOLT BACKSET:	• Field adjustable for 2-3/8" and 2-3/4" (Default).
STRIKE:	• "T"-Strike (Default) • ASA or Full-Lip optional
LEVERS:	• Boston, Miami, Memphis, Orlando, Philadelphia
ROSE:	• 2-3/8" Round Rose, 2-15/16" Square Rose
INSIDE ESCUTCHEON:	• 3-3/4"W x 9-3/4"H (Wrought)
LATCHBOLT:	• 1/2" Throw
DEADBOLT:	• 1" Throw • Brass Bolt containing one 1/4" case-hardened Steel Roll Pin
HANDING:	• Non-handed (Except for Memphis Lever)
KEYS:	• Two (2) per Lock
KEYWAYS:	• SCC Default (Schlage C Compatible). For additional keyways, see Cylinders and Keying section.
INTERCHANGEABLE CORE:	• 6-pin or 7-pin • Compatible with Best SFIC. • Not available in high security.
CONVENTIONAL KEY IN KNOB/LEVER CYLINDER:	• 6-pin Cylinder keyed to 5-pins
KEYING:	• Options: MK, CMK, or GMK, Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) • Can be keyed into existing master key systems. See Keyways Section.
FINISHES:	• 605 (US3), 613E, 622 (US19), 626 (US26D) * OTHER FINISHES AVAILABLE. CONTACT CUSTOMER SERVICE FOR QUOTE AND LEAD-TIME.
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• ANSI, Grade 2 • UL listed for 3 hrs, for single doors up to 4'0" x 8'0" • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • TAA compliant. Country of origin: KR
WARRANTY:	• Two (2) year Limited Warranty

Click On The Image to See The Price.

ACCESS CONTROL CREDENTIALS



PHONE



RFID



KEY



PIN

Features

- Built from TRW's KM Series Heavy Duty Deadbolt • Designed for quick installation • 4 AA Alkaline batteries last up to 2 years or 5V DC • Able to schedule specific access windows • Log and track access events and status • Monitors and protects openings with door obstruction alerts • Battery status and low battery alerts

Specifications



ADA COMPLIANT

DOOR THICKNESS:	• 1-3/8" to 1-3/4"
BACKSET:	• 2-3/8" - 2-3/4" (Adjustable)
CREDENTIALS:	• RFID • Smartphone • PIN • Mechanical Key
KEYWAYS:	• Conventional • SFIC • High Security • UL437
CREDENTIAL COMPATIBILITIES:	• Prox (Optional) • MIFARE DESFire EV1/EV2/EV3/Light • MIFARE Ultralight EV1/AES • MIFARE Classic
COMMUNICATION:	• BLE 4.2 • BLE 5.2
ENCRYPTION:	• AES 256
BATTERIES REQUIRED:	• 4 AA Alkaline Batteries
OPERATING TEMPERATURES:	• -20C to 65C • 0-95% Humidity (Non-Condensing)
CERTIFICATIONS & COMPLIANCES:	• FCC Part 15 • UL/cUL 10C 20-Minutes • Complies with ADA (Americans with Disabilities Act)
MODES:	• Standalone • Online
FINISHES:	• 606 (US4), 613E, 622 (US19), 626 (US26D)
WARRANTY:	• Two (2) year Mechanical / Two (2) year Electronics
COUNTRY OF ORIGIN:	• Assembled in USA



EXTERIOR VIEW



INTERIOR VIEW

Cylinders



Architectural Finishes



606 (US4)
Satin Brass



613E
Dark Oxidized Satin
Bronze (Equivalent)



622 (US19)
Flat Black



626 (US26D)
Satin Chromium

CLS-SP

Interconnected

Click On The Image to See The Price.

ACCESS CONTROL CREDENTIALS



PHONE



RFID



KEY



PIN



EXTERIOR VIEW

Features

- Built from TRW's CL Series Interconnected Lock
- Designed for quick installation
- 4 AA Alkaline batteries last up to 2 years or 5V DC
- Able to schedule specific access windows
- Log and track access events and status
- Monitors and protects openings with door obstruction alerts
- Battery status and low battery alerts

Specifications



ADA COMPLIANT

DOOR THICKNESS:	• 1-3/8" to 1-3/4"
BACKSET:	• 2-3/4" (Adjustable)
CREDENTIALS:	• RFID • Smartphone • PIN • Mechanical Key
KEYWAYS:	• Conventional • SFIC • High Security • UL437
CREDENTIAL COMPATIBILITIES:	• Prox (Optional) • MIFARE DESFire EV1/EV2/EV3/Light • MIFARE Ultralight EV1/AES • MIFARE Classic
COMMUNICATION:	• BLE 4.2 • BLE 5.2
ENCRYPTION:	• AES 256
BATTERIES REQUIRED:	• 4 AA Alkaline Batteries
OPERATING TEMPERATURES:	• -20C to 65C • 0-95% Humidity (Non-Condensing)
CERTIFICATIONS & COMPLIANCES:	• FCC Part 15 • UL/cUL 10C 20-Minutes • Complies with ADA (Americans with Disabilities Act)
MODES:	• Standalone • Online
FINISHES:	• 606 (US4), 613E, 622 (US19), 626 (US26D)
WARRANTY:	• Two (2) year Mechanical / Two (2) year Electronics
COUNTRY OF ORIGIN:	• Assembled in USA

Cylinders



Levers



PHILADELPHIA — PHL



BOSTON — BSN



MIAMI — MIA



ORLANDO — ORL

Architectural Finishes



606 (US4)
Satin Brass



613E
Dark Oxidized Satin
Bronze (Equivalent)



622 (US19)
Flat Black



626 (US26D)
Satin Chromium

ACCESS CONTROL CREDENTIALS



Features

- Built from TRW's SD Series Grade 2 Cylindrical Lock
- Designed for quick installation
- 4 AA Alkaline batteries last up to 2 years or 5V DC
- Able to schedule specific access windows
- Log and track access events and status
- Enable auto lock/unlock for enhanced security
- Battery status and low battery alerts



EXTERIOR VIEW

Cylinders



Specifications




ADA COMPLIANT

DOOR THICKNESS:	• 1-3/8" to 1-3/4"
BACKSET:	• 2-3/8" • 2-3/4" (Standard) • 5"
CREDENTIALS:	• RFID • Smartphone • PIN • Mechanical Key
KEYWAYS:	• Conventional • SFIC • High Security • UL437
CREDENTIAL COMPATIBILITIES:	• Prox (Optional) • MIFARE DESFire EV1/EV2/EV3/Light • MIFARE Ultralight EV1/AES • MIFARE Classic
COMMUNICATION:	• BLE 4.2 • BLE 5.2
ENCRYPTION:	• AES 256
BATTERIES REQUIRED:	• 4 AA Alkaline Batteries
OPERATING TEMPERATURES:	• -20C to 65C • 0-95% Humidity (Non-Condensing)
CERTIFICATIONS & COMPLIANCES:	• FCC Part 15 • UL/cUL 10C 20-Minutes • Complies with ADA (Americans with Disabilities Act)
MODES:	• Standalone • Online
FINISHES:	• 606 (US4), 613E, 622 (US19), 626 (US26D)
WARRANTY:	• Two (2) year Mechanical / Two (2) year Electronics
COUNTRY OF ORIGIN:	• Assembled in USA

Levers



Architectural Finishes

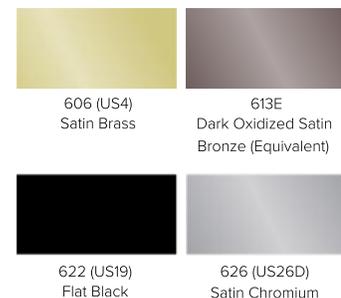

GTS-SP

Cylindrical Lock

Click On The Image to See The Price.

ACCESS CONTROL CREDENTIALS



PHONE



RFID



KEY



PIN

Features

- Built from TRW's World-Class GT Series Grade 1 Cylindrical Lock
- Designed for quick installation
- 4 AA Alkaline batteries last up to 2 years or 5V DC
- Able to schedule specific access windows
- Log and track access events and status
- Enable auto lock/unlock for enhanced security
- Battery status and low battery alerts
- Local-activated lockdown for instant door security
- Do not disturb mode that temporarily blocks access
- Monitor egress with request to exit function

Specifications



ADA COMPLIANT

DOOR THICKNESS:	• 1-3/4" to 2-1/4"
BACKSET:	• 2-3/4" (Standard) • 5" (Optional)
CREDENTIALS:	• RFID • Smartphone • PIN • Mechanical Key
KEYWAYS:	• Conventional • SFIC • High Security • UL437
CREDENTIAL COMPATIBILITIES:	• Prox (Optional) • MIFARE DESFire EV1/EV2/EV3/Light • MIFARE Ultralight EV1/AES • MIFARE Classic
COMMUNICATION:	• BLE 4.2 • BLE 5.2
ENCRYPTION:	• AES 256
BATTERIES REQUIRED:	• 4 AA Alkaline Batteries
OPERATING TEMPERATURES:	• -20C to 65C • 0-95% Humidity (Non-Condensing)
CERTIFICATIONS & COMPLIANCES:	• FCC Part 15 • UL/cUL 10C 45-Minutes • Complies with ADA (Americans with Disabilities Act) • Standalone • Online
MODES:	
FINISHES:	• 606 (US4), 613E, 622 (US19), 626 (US26D)
WARRANTY:	• Twenty-Five (25) year Mechanical / Two (2) year Electronics
COUNTRY OF ORIGIN:	• Assembled in USA



EXTERIOR VIEW



INTERIOR VIEW

Cylinders



Levers



PHILADELPHIA — PHL

BOSTON — BSN

MIAMI — MIA

Architectural Finishes



606 (US4)
Satin Brass



613E
Dark Oxidized Satin
Bronze (Equivalent)



622 (US19)
Flat Black



626 (US26D)
Satin Chromium

MRS-SP

Mortise Lock Sectional Trim

ACCESS CONTROL CREDENTIALS



Features

- Built from TRW's World-Class MR Series Grade 1 Mortise Lock
- Designed for quick installation
- 4 AA Alkaline batteries last up to 2 years or 5V DC
- Able to schedule specific access windows
- Log and track access events and status
- Enable auto lock/unlock for enhanced security
- Battery status and low battery alerts
- Do not disturb mode that temporarily blocks access
- Key override lets you know when the key has been used
- Latchbolt monitor lets you know when the lock has been used
- Monitor egress with request to exit function

Specifications



ADA COMPLIANT

DOOR THICKNESS:	• 1-3/4" (Standard) • 2" • 2-1/4" (Optional)
CREDENTIALS:	• RFID • Smartphone • PIN • Mechanical Key
KEYWAYS:	• Conventional • SFIC • LFIC • High Security • UL437
CREDENTIAL COMPATIBILITIES:	• Prox (Optional) • MIFARE DESFire EV1/EV2/EV3/Light • MIFARE Ultralight EV1/AES • MIFARE Classic
COMMUNICATION:	• BLE 4.2 • BLE 5.2
ENCRYPTION:	• AES 256
BATTERIES REQUIRED:	• 4 AA Alkaline Batteries
OPERATING TEMPERATURES:	• -20C to 65C • 0-95% Humidity (Non-Condensing)
CERTIFICATIONS & COMPLIANCES:	• FCC Part 15 • UL/cUL 10C 3-Hour • Complies with ADA (Americans with Disabilities Act)
MODES:	• Standalone • Online
FINISHES:	• 606 (US4), 613E, 622 (US19), 630 (US32D)
WARRANTY:	• Limited Lifetime Mechanical / Two (2) year Electronics
COUNTRY OF ORIGIN:	• Assembled in USA



EXTERIOR VIEW

Cylinders



Rose Designs



ROUND ROSE
J-TRIM

SQUARE ROSE (SR)
J-TRIM

Levers



PHILADELPHIA — PHL



BOSTON — BSN



CHICAGO — CHI



MIAMI — MIA



MEMPHIS — MEM



DALLAS — DAL



ORLANDO — ORL



LOS ANGELES — LA

Architectural Finishes



606 (US4)
Satin Brass



613E
Dark Oxidized Satin
Bronze (Equivalent)



622 (US19)
Flat Black



626 (US26D)
Satin Chromium

6EWS-SP

Exit Device Trim

Click On The Image to See The Price.

ACCESS CONTROL CREDENTIALS



PHONE



RFID



KEY



PIN

Features

- Built from TRW's World-Class 6W Series Exit Device Trim
- For use with TRW's 6300 Series RIM and Surface Vertical Rod
- 4 AA Alkaline batteries last up to 2 years or 5V DC • Able to schedule specific access windows • Log and track access events and status • Enable auto lock/unlock for enhanced security • Battery status and low battery alerts



EXTERIOR VIEW

Cylinders



Levers



PHILADELPHIA — PHL



BOSTON — BSN



MIAMI — MIA



CHICAGO — CHI



ORLANDO — ORL

Specifications



ADA COMPLIANT

DOOR THICKNESS:	• 1-3/4" to 2-1/4"
CREDENTIALS:	• RFID • Smartphone • PIN • Mechanical Key
KEYWAYS:	• Conventional • SFIC • LFIC • High Security • UL437
CREDENTIAL COMPATIBILITIES:	• Prox (Optional) • MIFARE DESFire EV1/EV2/EV3/Light • MIFARE Ultralight EV1/AES • MIFARE Classic
COMMUNICATION:	• BLE 4.2 • BLE 5.2
ENCRYPTION:	• AES 256
BATTERIES REQUIRED:	• 4 AA Alkaline Batteries
OPERATING TEMPERATURES:	• -20C to 65C • 0-95% Humidity (Non-Condensing) • UL/cUL 10C 3-Hour
CERTIFICATIONS & COMPLIANCES:	• FCC Part 15 • Complies with ADA (Americans with Disabilities Act)
MODES:	• Standalone • Online
FINISHES:	• 606 (US4), 613E, 622 (US19), 626 (US26D)
WARRANTY:	• Two (2) year Electronics
COUNTRY OF ORIGIN:	• Assembled in USA

Architectural Finishes



606 (US4)
Satin Brass



613E
Dark Oxidized Satin
Bronze (Equivalent)



622 (US19)
Flat Black



626 (US26D)
Satin Chromium

Flat Goods

Click On The Image to See The Price.



Privacy Latches



Flush and Surface Bolts



Coordinators




Push Plates



Pulls and Pull Plates



Push and Push-Pull Bars

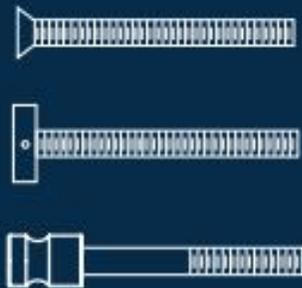

Fasteners



Door Protection Plates

Commercial Hinges

Click On The Image to See The Price.



**Plain Bearing
Standard Weight**



**2 Ball Bearing
Standard Weight**



**4 Ball Bearing
Heavy Weight**



**Spring Hinge
Standard Weight**



**Power Transfer
Standard Or Heavy Weight**

Specifications



MATERIALS:	<ul style="list-style-type: none"> • STEEL — Applications: Interior doors, non-corrosive environments. • STAINLESS STEEL — Applications: Exterior, doors, corrosive environments
PACKAGING:	<ul style="list-style-type: none"> • Qty Of Hinges Per Individual Carton: 3 ea For Plain, 2 Ball Bearing and 4 Ball Bearing Hinges 3 ea For Spring Hinges 1 ea for Electrified Hinges • Qty Of Hinges Per Master Carton: 48 ea For Plain, 2 Ball Bearing and 4 Ball Bearing Hinges
FASTENERS:	<ul style="list-style-type: none"> • All hinges packed with Machine Screws (12-24 x 1/2" FHMS) and Wood Screws (12 x 1-1/4" FHWS)
CERTIFICATIONS, LISTINGS, COMPLIANCES:	<ul style="list-style-type: none"> • Conforms with the requirements of NFPA 80-2010, Section 6.4.3.1. • Certified to ANSI/BHMA A156.1-2013: <ul style="list-style-type: none"> — Grade 3, Plain Bearing (PL) 350,000 cycles — Electrified hinges tested to over 100,000 cycles • UL listed: <ul style="list-style-type: none"> — SH Series Spring Hinges — EL Series Electrified Hinges
WARRANTY:	<ul style="list-style-type: none"> • Five (5) year limited warranty

General Hardware

Click On The Image to See The Price.



**Wall Stops
and Holders**



**Floor Stops
and Holders**



**Kick Down Door
Stops**



Hinge Stops



Roller Stops




**Roller Latches,
Catches and
Protectors**



Weather Stripping



**Hooks, Silencers,
Door Viewers and
Strikes**

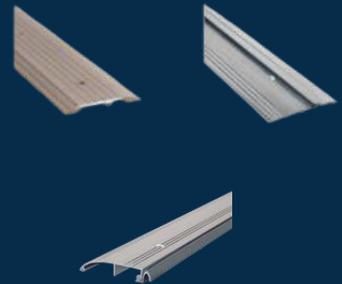

Thresholds

8500/9910 SERIES

Electric Strikes

Click On The Image to See The Price.



Specifications for 85001 and 85003

85001 ELECTRIC STRIKE:	• Designed for use with all TRW Grade 1 and Grade 2 Cylindrical Locks •
85003 ELECTRIC STRIKE:	Designed for use with all TRW MR Series Mortise Locks WITHOUT Deadbolt
FEATURES:	<ul style="list-style-type: none"> • Input voltage:12-24 VDC • Field changeable from FAIL SECURE to FAIL SAFE • Factory tested to 1,000,000 cycle • 0.28A @ 12 VDC • 0.14A @ 24 VDC
CURRENT:	• 630 (US32D) Satin Stainless Steel
FINISH:	

Specifications for 9910

9910 ELECTRIC STRIKE:	• Designed for use with all TRW 6300 / 6400 Rim Exit Devices • Completely surface-mounted
FEATURES:	<ul style="list-style-type: none"> • Accommodates 1/2" to 3/4" (13mm–19mm) latch projection • Mounting spacer included to provide enhanced latch engagement • Stainless steel ensures superior strength and creates a sleek aesthetic design • Horizontal adjustment ensures proper latch positioning to compensate for door misalignment – up to 1/4" (6.4mm) • Conventional keeper design • Plug-in wire connectors • Lockdown holes for secure mount • HEX socket head cap screws for added support • Installation tool included • Non-handed
CERTIFICATIONS, LISTINGS, COMPLIANCES:	<ul style="list-style-type: none"> • 1,500lbf Static • 70 ft-lb Dynamic • 250,000 Cycles • Fail-Secure • 3-Hour Fire Rated
CURRENT:	• 500mA Field-Selectable 12/24VDC & 12-24VAC (Max at 12VDC)
WARRANTY:	• 5 Year Limited Warranty
FINISH:	• 630 (US32D) Satin Stainless Steel

Electric Strikes

PART NO.	DESCRIPTION
85001	For Cylindrical Locks
85003	For Mortise locks (no Deadbolt)
9910	For 6300 / 6400 Exit Devices

8100 SERIES

Key Switches Push Buttons



Key Switch W/Lights
81310-2MT / 81310-2MM



Key Switch
81310-4MT / 81310-4MM



Push Button Switch
81320-1MT / 81320-1MM



Push Button Switch Narrow
81320-6MT / 81320-6MM



Mushroom Push Button
81320-5MT / 81320-5MM

Electrified Accessories

PART NUMBER	DESCRIPTION
81310-2MT	62 Key Switch with Lights Maintained
81310-2MM	62 Key Switch with Lights Momentary
81310-4MT	62 Key Switch Narrow Maintained
81310-4MM	62 Key Switch Narrow Momentary
81320-1MT	62 Push Button Maintained
81320-1MM	62 Push Button Momentary
81320-5MT	62 Push Button Mushroom Maintained
81320-5MM	62 Push Button Mushroom Momentary
81320-6MT	62 Push Button Narrow Maintained
81320-6MM	62 Push Button Narrow Momentary

MR SERIES

Grade 1 Mortise



ASSEMBLED
IN THE USA

Typical Applications

- Assisted Living
- Government Facilities
- Healthcare
- Hospitality
- Houses of Worship
- Industrial
- Multi-family
- Offices
- Public Buildings
- Retail
- Higher Education
- K-12 Education



ADA COMPLIANT




Specifications

FOR DOORS:	• 1-3/4" standard, 2"-3" thick doors available as special order
BACKSET:	• 2-3/4"
CASE:	• 12-gauge cold rolled steel mechanism • Dichromated for corrosion resistance • Features weakened spindle design to prevent case damage
ARMOR FRONT:	• Beveled 1/8" on 2"
STRIKE:	• 625 (US26) & 630 (US32D) use stainless steel as base material, all other finishes use stainless steel or brass as base material • Handed Curved Lip Strike
LEVERS:	• F Series Sectional/Escutcheon: Philadelphia, Boston, Miami • J Series Sectional/Escutcheon: Philadelphia, Boston, Miami, Chicago, Dallas, Houston, Los Angeles, Memphis, Orlando, Ball Knob
LATCHBOLT:	• 3/4" Throw • Investment Cast Stainless Steel • Anti-friction
DEADBOLT:	• 1" Throw • Investment Cast Stainless Steel
HAND:	• Most functions field reversible. Specify handing for Strikes, consult factory for details
TRIM:	• F trim - forged brass levers and escutcheons • Round and square rose available • J Trim - stainless steel sectional/escutcheon trim and levers, PHL, MEM, MIA and BSN are solid levers LAX, ORL, DAL and CHI are tube levers
KEYS:	• Two (2) per Lock
KEYWAYS:	• SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
INTERCHANGEABLE CORE:	• 6 or 7-pin • Compatible with Best, Falcon & Arrow • Large Format IC Cores compatible with Schlage.
CYLINDER:	• 6 or 7-pin Brass Mortise Cylinder • Standard High Security and UL437 Cylinders Available
KEYING:	• Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) Can be keyed into existing master key systems
FINISHES:	• F Series Trim: 626 (US26D) • J Trim: 605 (US3), 606 (US4), 612 (US10), 613E, 622 (US19), 629 (US32), 630 (US32D) • Antimicrobial Coating available on 626 (US26D) & 630 (US32D) for F and J Trim. • Optional Weatherized Finish for 626 (US26D) only
PERFORMANCE:	• Tested to over 11 million cycles, 11X ANSI/BHMA standard
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL listed for 3 hrs, for single doors up to 4'0" x 8'0" • Certified to ANSI/BHMA 156.13 Operational Grade 1 and Security Grade 1 • Approved for Florida HVHZ (High Velocity Hurricane Zone). PDQ Product Approval: FL 21376. Design load rating: ± 70.0 PSF for single door (3' x 7') • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • J Wide Escutcheon Trim complies with Unified Facilities Guide Specification 08 71 00 (August 2008)
WARRANTY:	• Lifetime Limited Warranty
COUNTRY OF ORIGIN:	• Assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act as a COTS product manufactured in the United States.

Note: Heavy Duty Spindle for High Abuse situations is available for F trim.

Lite Commercial Steel Doors

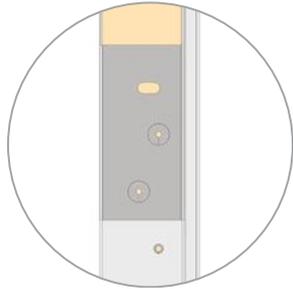


The **heavy gauge hinge reinforcement** ensures long-term performance and enhanced security.



The **injected inner core of polyurethane foam** enhances insulation, acting as a bonding agent to lock all internal components in place for enhanced durability.


Doors are constructed with two steel sheets, available in different gauge thicknesses, and feature **hot-dip galvanized steel** for added durability and corrosion resistance.

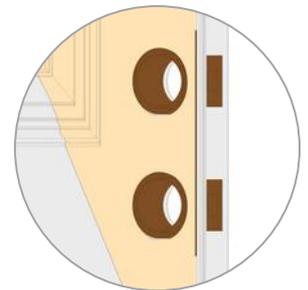

The **composite lock block** provides secure mounting of door hardware and enhanced structural integrity.




Door sweep weatherstrip enhances weather resistance, improves energy efficiency, and deters the entry of insects and debris.

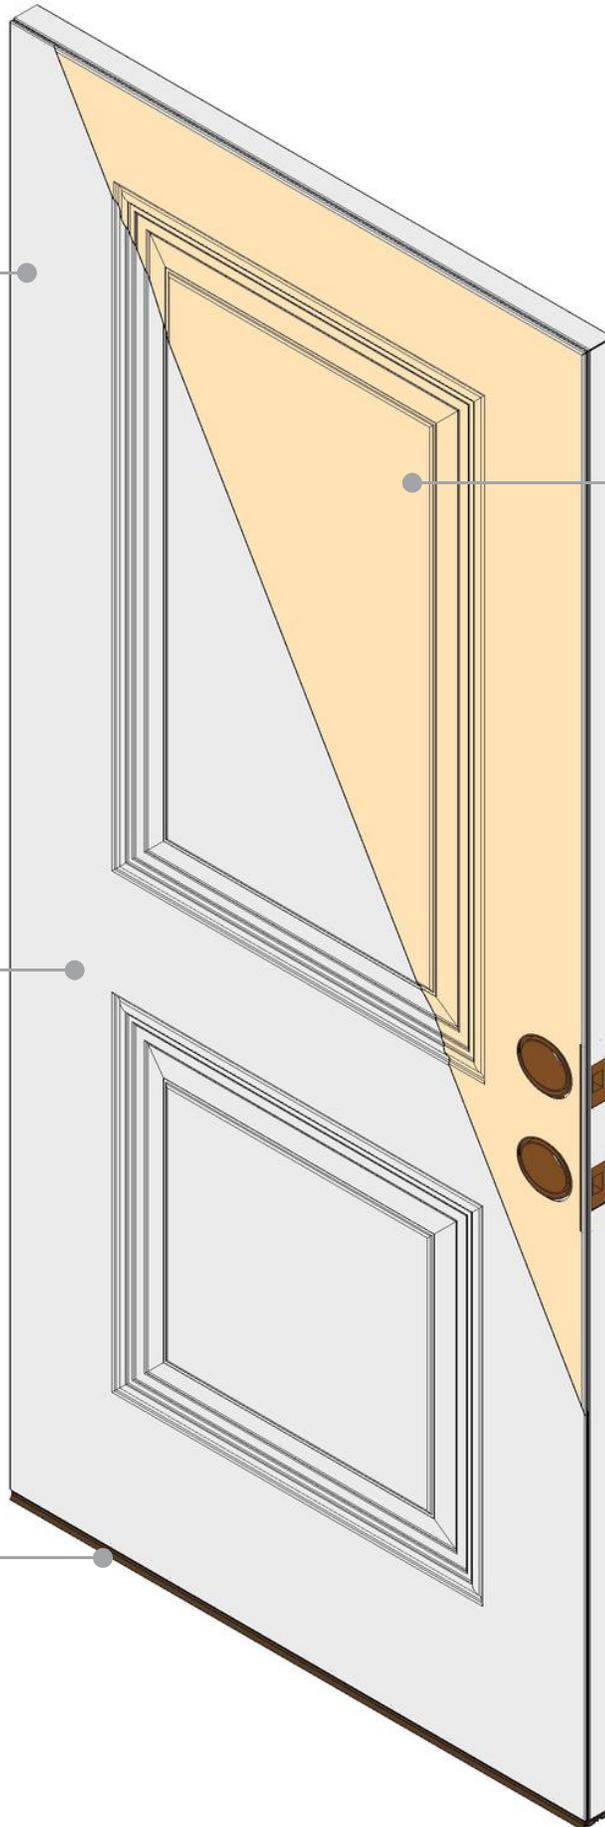

DOOR CONSTRUCTION


POLYURETHANE FOAM CORE

The polyurethane foam core plays a versatile role that goes beyond insulation in the creation of our doors. With improved soundproofing and insulation capabilities, it forms a reliable barrier against external noise and temperature fluctuations. Additionally, this foam serves as a robust bonding agent, firmly securing internal components. This careful integration ensures superior durability, enhancing the overall structural integrity of our doors.

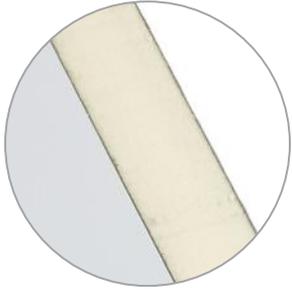


THERMAL BREAK

Our steel entry doors incorporate a vital thermal break to enhance energy efficiency and performance. This integral feature effectively prevents cold conduction from the outside to the inside of your home, minimizing heat transfer between the inner and outer sections and maintaining consistent indoor temperatures. The inclusion of the thermal break not only enhances overall insulation performance but also emphasizes our dedication to providing products that exceed contemporary benchmarks for sustainability and thermal efficiency.

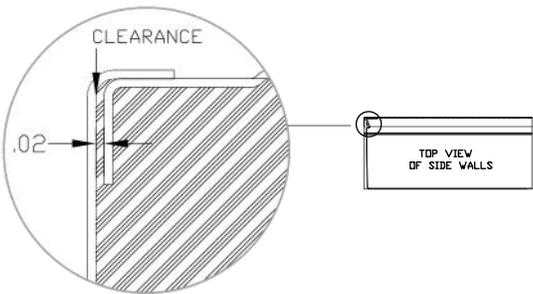

Clearance held for polyurethane foam fill of top and bottom.

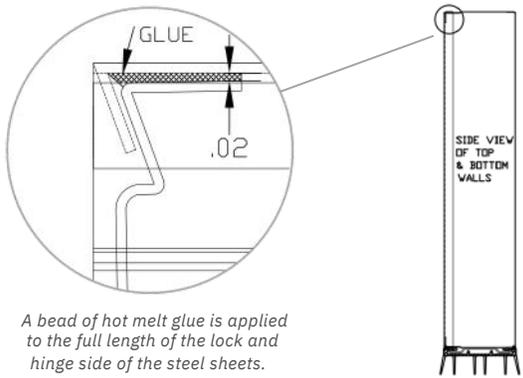


A bead of hot melt glue is applied to the full length of the lock and hinge side of the steel sheets.

HINGE REINFORCEMENTS

Our doors boast a heavy gauge hinge reinforcement plate, ensuring long-term performance and enhanced security. This strategically designed plate prevents wear and tear over time, adding durability to the hinge area.

Our offering includes: 20-gauge (*surface mounted fixed hinge prep*), 11-gauge (*adjustable hinge prep*) and 7-gauge (*commercial mortise prep*) hinge reinforcement plates.

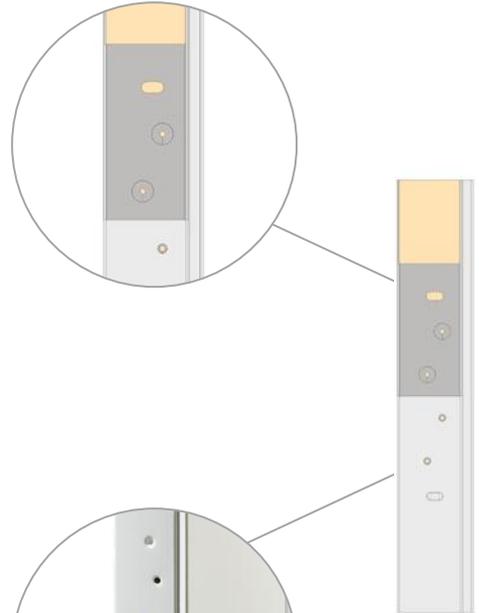

FIXED HINGE PREP

The fixedhinge prep is standard on Taylor doors, featuring a 4" surface mount hinge prep with a sturdy fixed hinge reinforcement plate. This straightforward design ensures ease of installation and long-term performance.




MORTISE HINGE PREP

The 4.5" mortise commercial hinge prep is designed for projects requiring a recessed hinge pocket. Exclusive to the WestGuard door series, this prep is tailored for hollow metal frames and resolves the need for under-sizing doors. Its unhandled design provides flexibility, accommodating both left-handed and right-handed installations. Additionally, filler plates come standard with each door.



ADJUSTABLE HINGE PREP



Taylor's Adjustable HingePlate System is a versatile solution for your door needs, featuring a 4" surface mount hinge prep with an accompanying adjustable hinge backer plate. This unique hinge system allows for easy adjustments up/down and in/out without removing the door from the frame, all achieved effortlessly with a simple screwdriver.

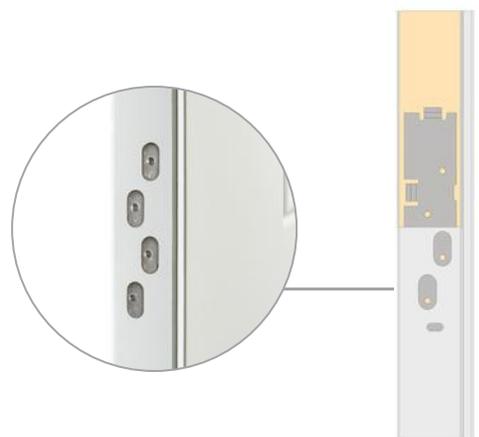


DOOR CONSTRUCTION

REINFORCED LOCK BLOCK AREA


Our steel doors are constructed with a composite lock block to provide secure mounting of door hardware and superior structural integrity. This precision-engineered component offers more screw-holding power than traditional wood lock blocks. Whether you opt for a single prep, deadbolt prep, triple prep, or another configuration, our lock blocks provide tailored solutions. Additionally, our range includes wood lock blocks for those seeking alternative options.

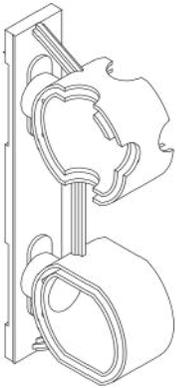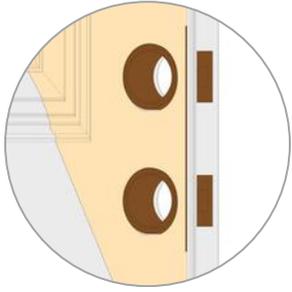


COMPOSITE LOCK BLOCK



SINGLE COMPOSITE LOCK BLOCK

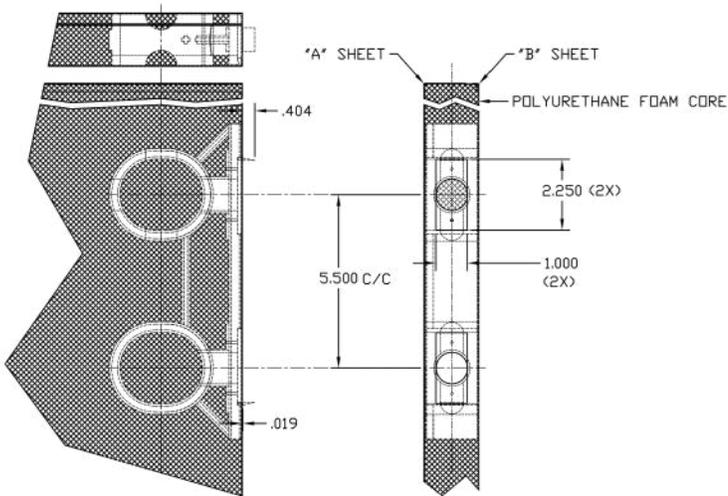

Detail features 1 x 2-1/4" residential edge prep, and composite lock block with 5-1/2" centers.

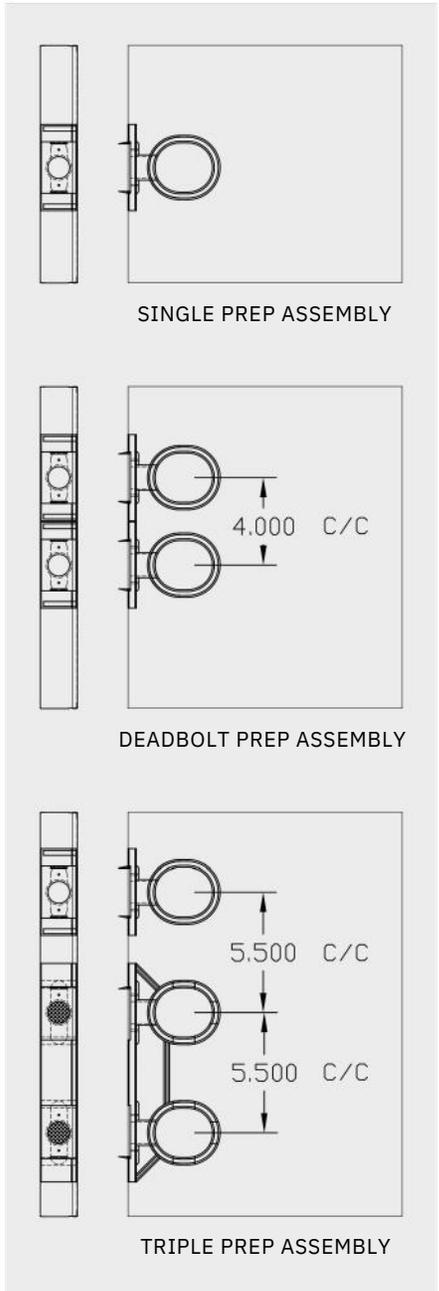

WESTGUARD SERIES

The WestGuard Series delivers superior performance and withstands regular wear and tear with its 20-gauge, hot-dipped galvanized steel doors. This construction, combined with an innovative injected polyurethane foam core, makes it the perfect door for commercial and high-traffic applications, ensuring unmatched durability, reliability, and thermal insulation in demanding environments.

STANDARD SPECIFICATIONS

FACE MATERIAL	G40 hot-dipped galvanized steel skin
SKIN GAUGE	20-gauge
SKIN SURFACE	Smooth
FINISH	Baked-on polyester primer
CORE MATERIAL	Injected polyurethane foam core
EDGE CONSTRUCTION	Full steel-edge perimeter
THICKNESS	1.720" (nominal 1-3/4")
LOCK BLOCK	Composite lock block
HINGE REINFORCEMENTS	20-gauge fixed hinge reinforcement
HINGE PREP	4" surface mount, fixed hinge prep



WARRANTY

COMMERCIAL	Limited 7-Year Warranty *
RESIDENTIAL	Limited Lifetime Warranty *

*Refer to full warranty for details.

AVAILABLE OPTIONS

HINGE PREP	4" surface mount, fixed hinge 4" surface mount, adjustable hinge 4" surface mount, template fixed hinge 4-1/2" surface mount, commercial template fixed hinge 4-1/2" mortise commercial hinge
CLOSER PREP	Steel closer reinforcement plates
PANIC PREP	Exit hardware reinforcement
ADA COMPLIANCE	10" ADA bottom rail on specific styles

DOOR TESTING



Refer to Rating section for details.

FIRE RATING	20-minute or 90-minute
SECURITY RATING	Grade 40
STC RATING	21
OITC RATING	25
U-VALUE	0.17

HEIGHT 6'8" & 7'0"

PROFILE FL

STYLE FLUSH

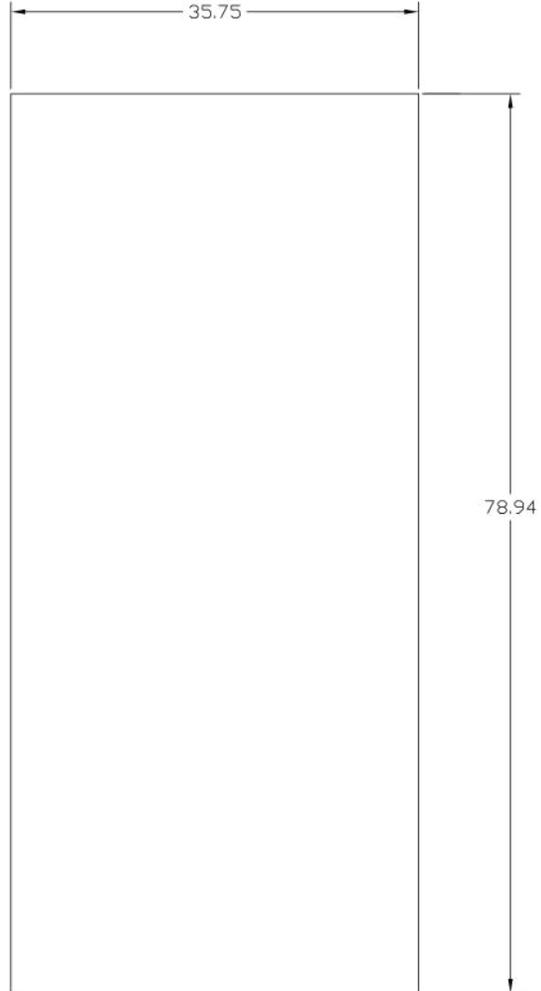

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge
- 4-1/2" mortise commercial hinge

ADA COMPLIANCE

flush panel

FIRE RATING

- 20-minute
- 90-minute

IMPACT RATED



YES

Click On The Image to See The Price.

HEIGHT 6'8 - 7'0" & 8'0"

PROFILE FL

STYLE FLUSH

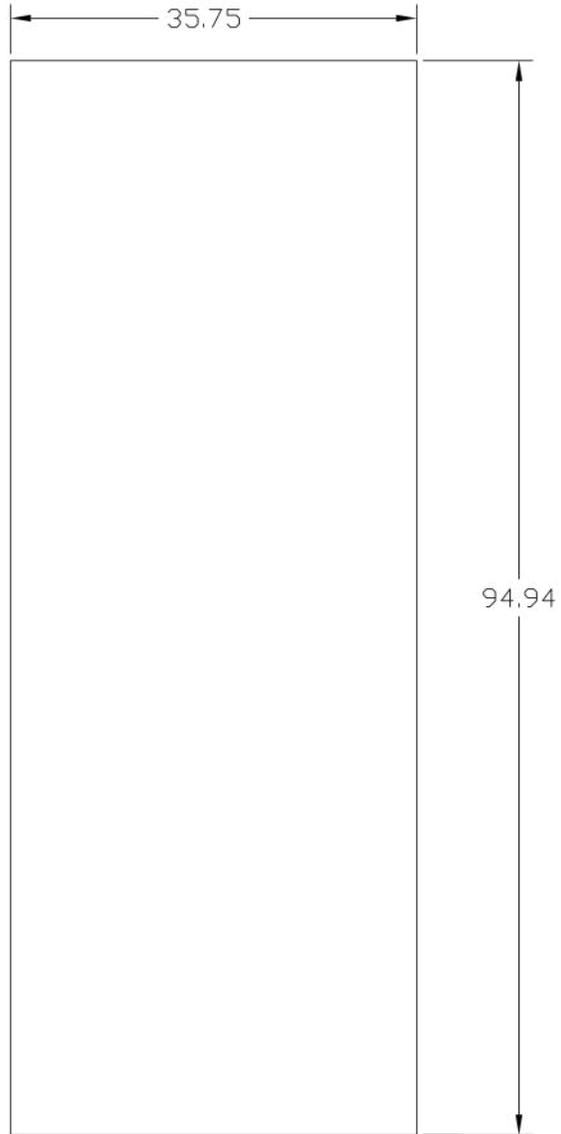

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge
- 4-1/2" mortise commercial hinge

ADA COMPLIANCE

flush panel

FIRE RATING

- 20-minute
- 90-minute

IMPACT RATED


YES

WESTGUARD SERIES Lite Commercial Steel or Solid Core Molded Wood Doors

HEIGHT 6'8" & 7'0"

PROFILE 1FPS

STYLE 1-PANEL FLAT SHAKER

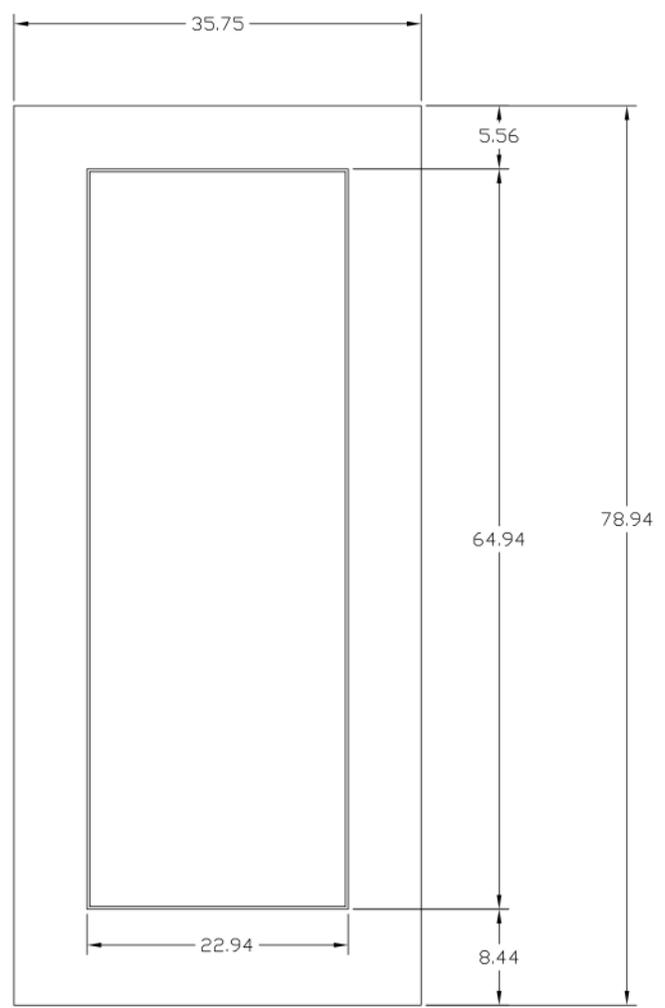

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge
- 4-1/2" mortise commercial hinge

ADA COMPLIANCE

10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

IMPACT RATED

YES

Click Here For a
Steel Door
Hurricane Impact or
Fire Rated


Click Here For a
Solid Core Molded Wood
20 Minute Fire Rated

WESTGUARD SERIES Lite Commercial Steel or Solid Core Molded Wood Doors

HEIGHT 6'8" - 7'0" & 8'0"

PROFILE 1FPS

STYLE 1-PANEL FLAT SHAKER

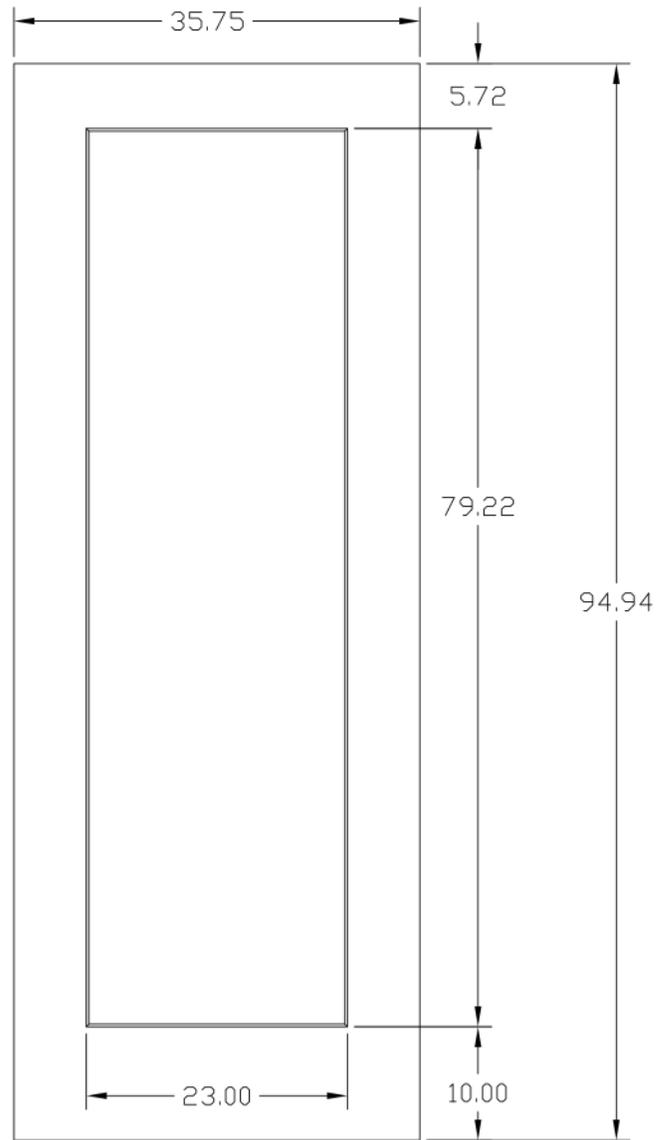

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge
- 4-1/2" mortise commercial hinge

ADA COMPLIANCE

- 10" bottom rail

FIRE RATING

- 20-minute
- 90-minute

IMPACT RATED

- YES

[Click Here For a Steel Door Hurricane Impact or Fire Rated](#)


[Click Here For a Solid Core Molded Wood 20 Minute Fire Rated](#)

WESTGUARD SERIES Lite Commercial Steel or Solid Core Molded Wood Doors

HEIGHT 6'8" & 7'0"

PROFILE 2FPS

STYLE 2-PANEL FLAT SHAKER

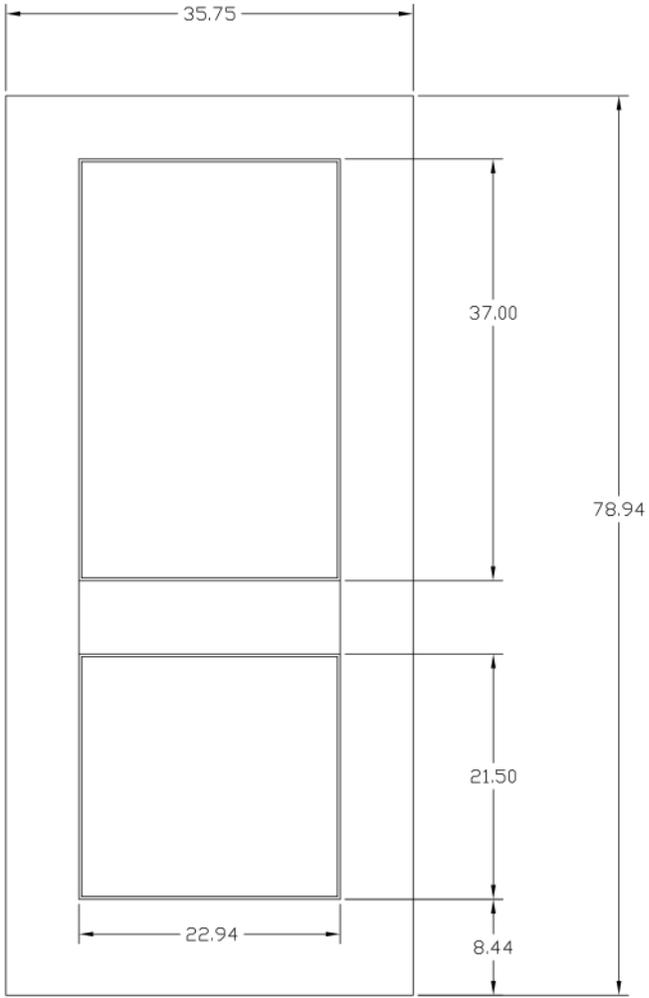

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge
- 4-1/2" mortise commercial hinge

ADA COMPLIANCE

- 10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

IMPACT RATED

YES

[Click Here For a Steel Door Hurricane Impact or Fire Rated](#)


[Click Here For a Solid Core Molded Wood 20 Minute Fire Rated](#)

WESTGUARD SERIES Lite Commercial Steel or Solid Core Molded Wood Doors

HEIGHT 6'8" - 7'0" & 8'0"

PROFILE 2FPS

STYLE 2-PANEL FLAT SHAKER

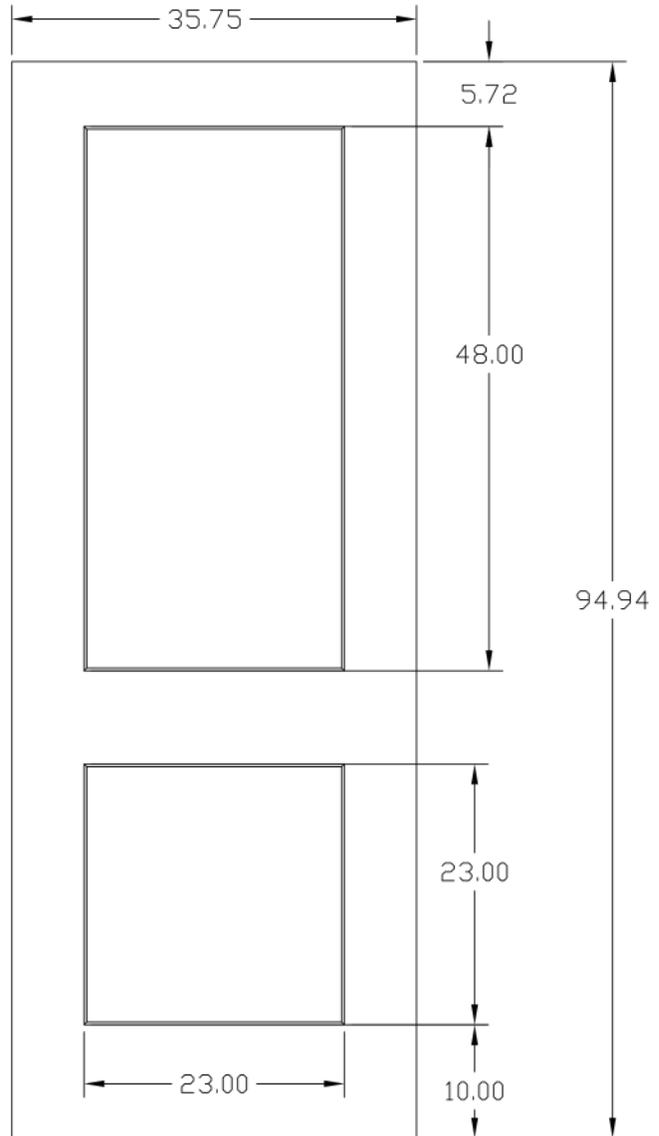

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge
- 4-1/2" mortise commercial hinge

ADA COMPLIANCE

- 10" bottom rail

FIRE RATING

- 20-minute
- 90-minute

IMPACT RATED

YES

Click Here For a
Steel Door
Hurricane Impact or
Fire Rated


Click Here For a
Solid Core Molded Wood
20 Minute Fire Rated

WESTGUARD SERIES Lite Commercial Steel or Solid Core Molded Wood Doors

HEIGHT 6'8" & 7'0"

PROFILE 2PHD

STYLE 2-PANEL RAISED

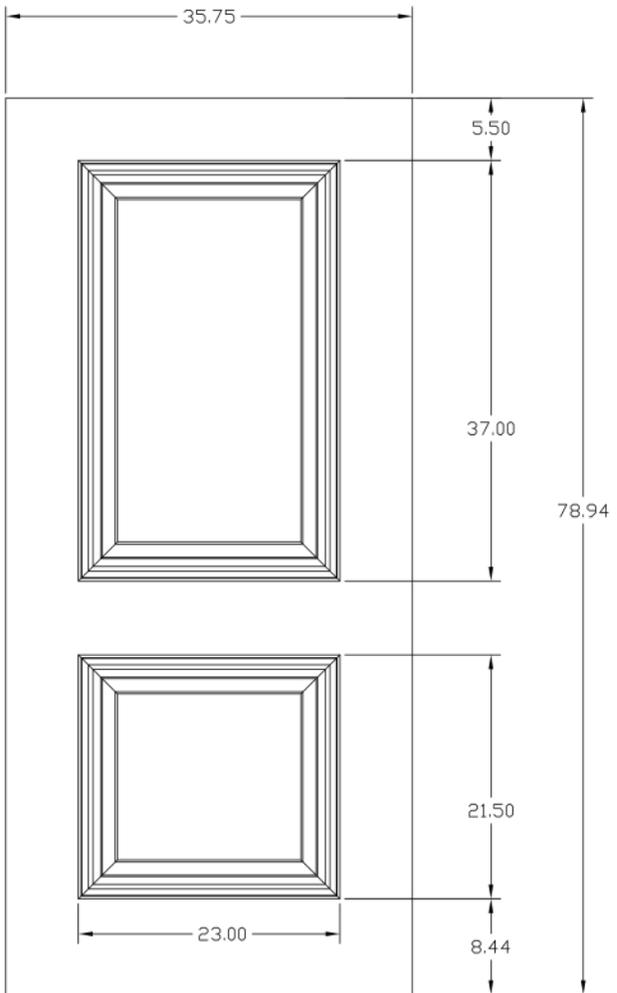

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge
- 4-1/2" mortise commercial hinge

ADA COMPLIANCE

- 10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

IMPACT RATED

YES

[Click Here For a Steel Door Hurricane Impact or Fire Rated](#)


[Click Here For a Solid Core Molded Wood 20 Minute Fire Rated](#)

WESTGUARD SERIES Lite Commercial Steel or Solid Core Molded Wood Doors

HEIGHT 6'8" - 7'0" & 8'0"

PROFILE 2PHD

STYLE 2-PANEL RAISED

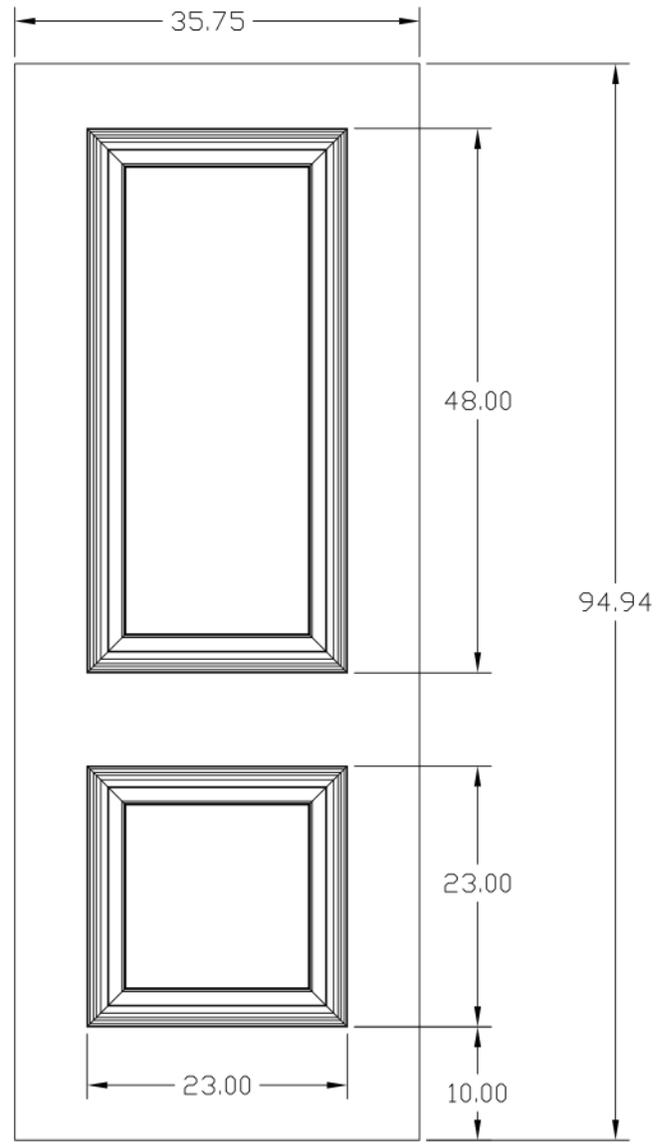

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge
- 4-1/2" mortise commercial hinge

ADA COMPLIANCE

10" bottom rail

FIRE RATING

- 20-minute
- 90-minute

IMPACT RATED


YES

Click Here For a
Steel Door
Hurricane Impact or
Fire Rated

Click Here For a
Solid Core Molded Wood
20 Minute Fire Rated

WESTGUARD SERIES Lite Commercial Steel or Solid Core Molded Wood Doors

HEIGHT 6'8" & 7'0" **PROFILE** 2PATHD **STYLE** 2-PANEL ARCH TOP RAISED

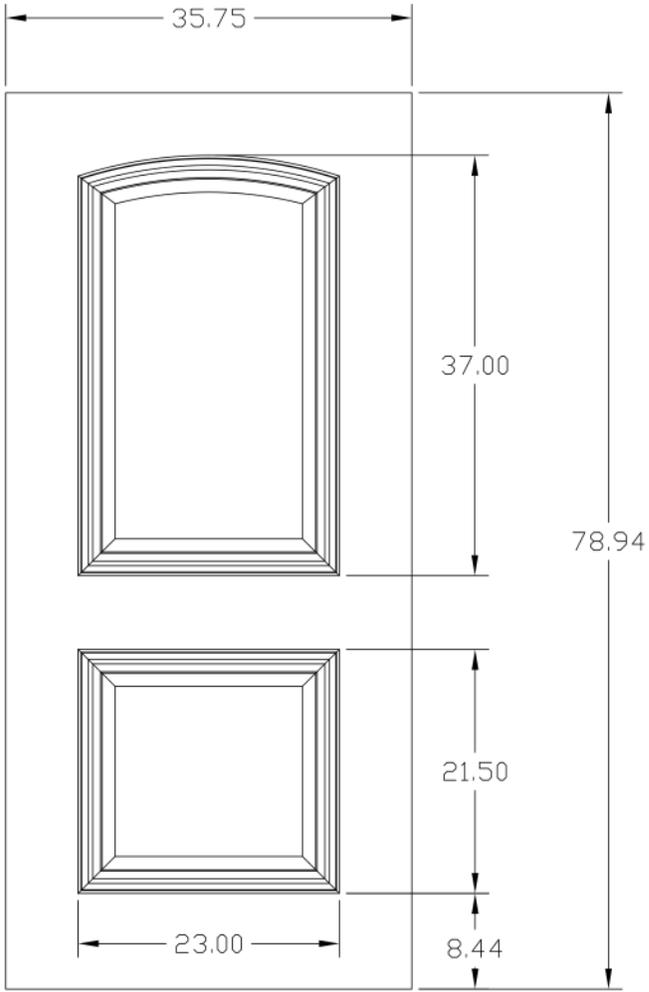

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge
- 4-1/2" mortise commercial hinge

ADA COMPLIANCE

10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

IMPACT RATED

YES

Click Here For a
Steel Door
Hurricane Impact or
Fire Rated



Click Here For a
Solid Core Molded Wood
20 Minute Fire Rated

WESTGUARD SERIES Lite Commercial Steel or Solid Core Molded Wood Doors

HEIGHT 6'8" & 7'0"

PROFILE 3PEFS

STYLE 3-PANEL HORIZONTAL FLAT SHAKER

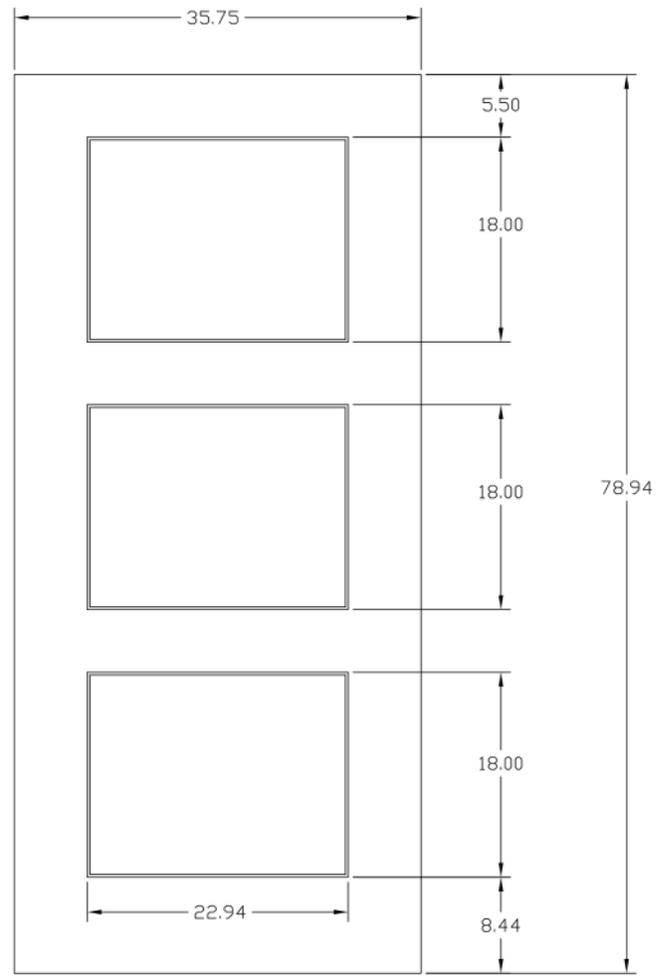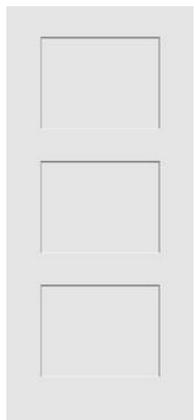

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge
- 4-1/2" mortise commercial hinge

ADA COMPLIANCE

- 10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

IMPACT RATED

YES


Click Here For a
Steel Door
Hurricane Impact or
Fire Rated

Click Here For a
Solid Core Molded Wood
20 Minute Fire Rated

HEIGHT 6'8" & 7'0"

PROFILE 3FPS

STYLE 3-PANEL FLAT SHAKER

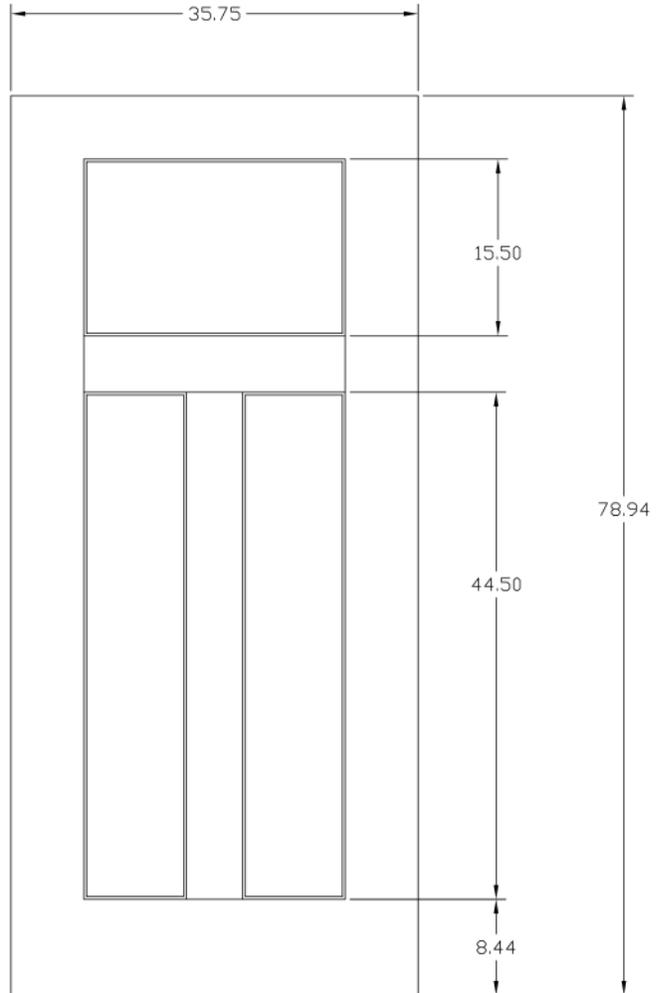

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge
- 4-1/2" mortise commercial hinge

ADA COMPLIANCE

- 10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute


IMPACT RATED

YES

HEIGHT 6'8" & 7'0"

PROFILE 4PBTHD

STYLE 4-PANEL BLANK TOP RAISED

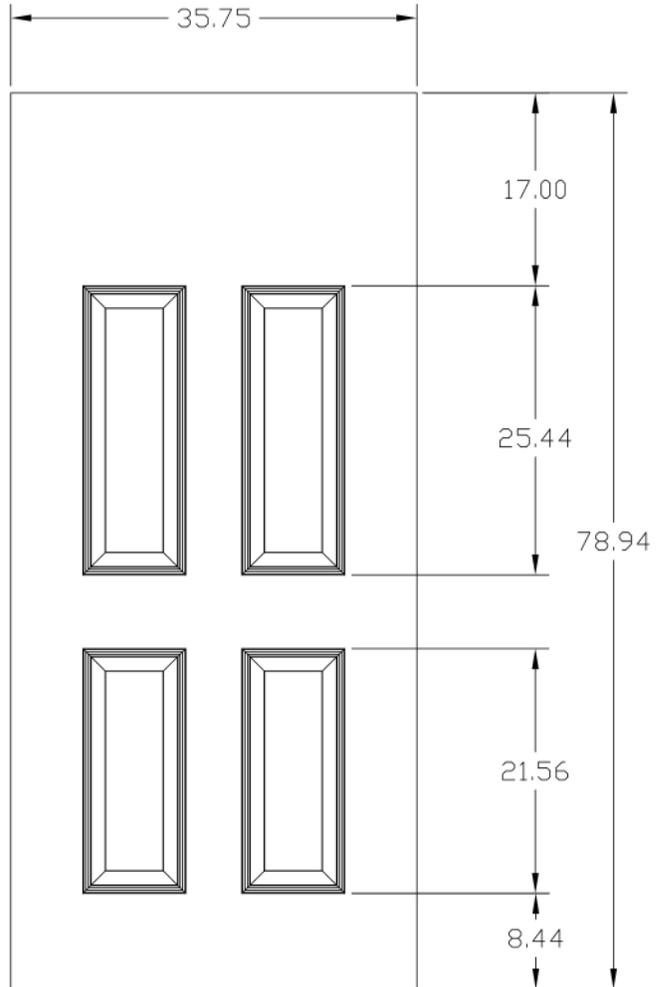

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge
- 4-1/2" mortise commercial hinge

ADA COMPLIANCE

- 10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

IMPACT RATED


YES

WESTGUARD SERIES Lite Commercial Steel or Solid Core Molded Wood Doors

HEIGHT 6'8" & 7'0"

PROFILE 5PE

STYLE 5-PANEL HORIZONTAL SHAKER

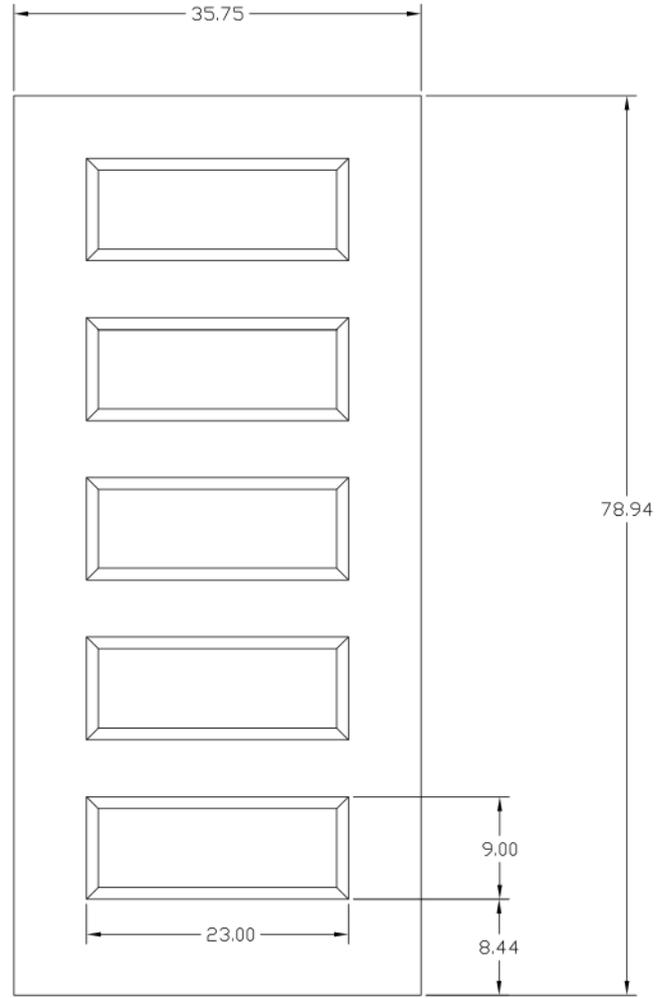

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge
- 4-1/2" mortise commercial hinge

ADA COMPLIANCE

- 10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

IMPACT RATED

YES

Click Here For a
Steel Door
Hurricane Impact or
Fire Rated


Click Here For a
Solid Core Molded Wood
20 Minute Fire Rated

WESTGUARD SERIES Lite Commercial Steel or Solid Core Molded Wood Doors

HEIGHT 6'8 - 7'0" & 8'0"

PROFILE 6PE

STYLE 6-PANEL HORIZONTAL SHAKER

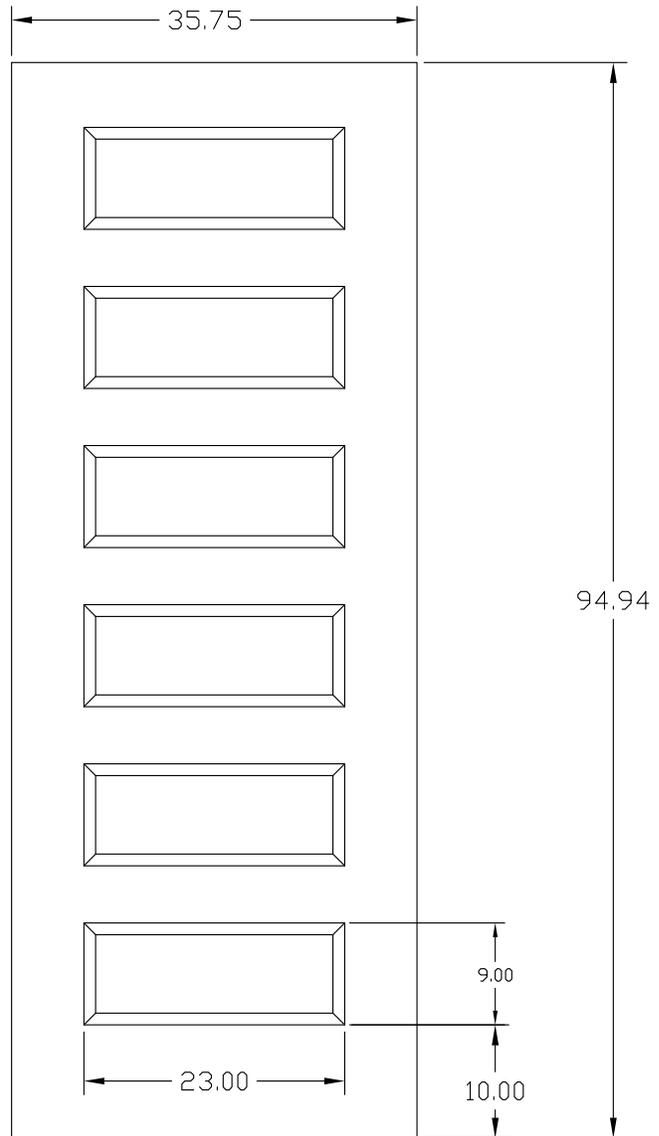

HINGE PREP OPTIONS

4" surface mount, fixed hinge

4" surface mount, adjustable hinge

4" surface mount, template fixed hinge

4-1/2" surface mount, commercial template fixed hinge

4-1/2" mortise commercial hinge

ADA COMPLIANCE

10" bottom rail

FIRE RATING

20-minute

90-minute

IMPACT RATED

YES

Click Here For a
Steel Door
Hurricane Impact or
Fire Rated


Click Here For a
Solid Core Molded Wood
20 Minute Fire Rated

WESTGUARD SERIES Lite Commercial Steel or Solid Core Molded Wood Doors

HEIGHT 6'8" & 7'0"

PROFILE 6PHD

STYLE 6-PANEL RAISED

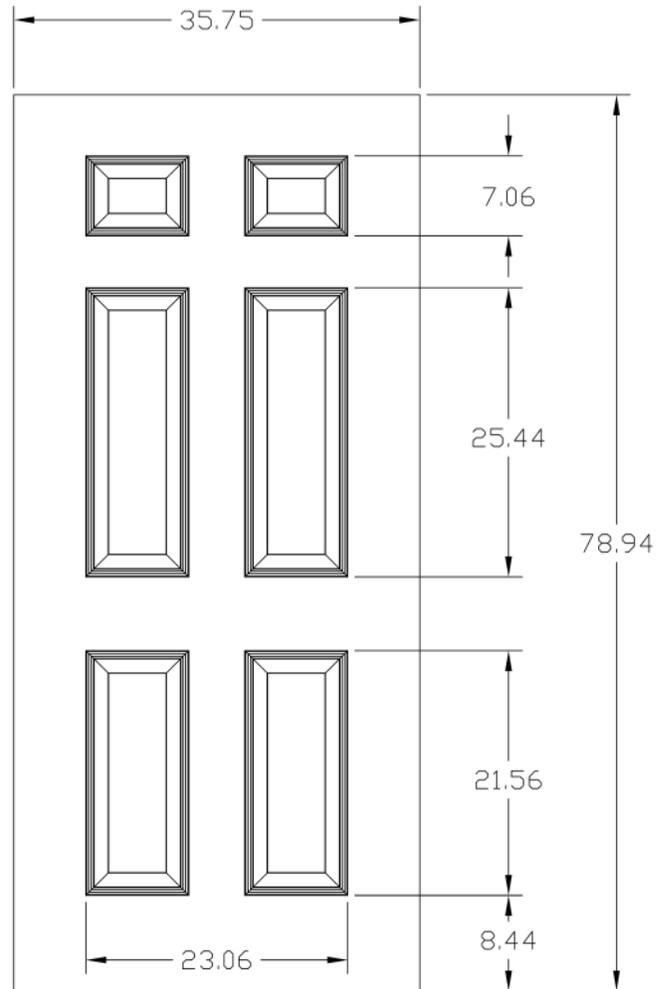

HINGE PREP OPTIONS

4" surface mount, fixed hinge

4" surface mount, adjustable hinge

4" surface mount, template fixed hinge

4-1/2" surface mount,
commercial template fixed hinge

4-1/2" mortise commercial hinge

ADA COMPLIANCE

10.44" bottom rail option

FIRE RATING

20-minute

90-minute

IMPACT RATED

YES

[Click Here For a
Steel Door
Hurricane Impact or
Fire Rated](#)

[Click Here For a
Solid Core Molded Wood
20 Minute Fire Rated](#)

CAMBRIDGE SERIES Lite Commercial Steel or Solid Core Molded Wood Doors

HEIGHT 6'8" & 7'0"

PROFILE 3/4-2PSTHD

STYLE 3/4 2-PANEL RAISED



HINGE PREP OPTIONS

4" surface mount, fixed hinge

4" surface mount, adjustable hinge

4" surface mount, template fixed hinge

4-1/2" surface mount,
commercial template fixed hinge

ADA COMPLIANCE

10.44" bottom rail option


FIRE RATING

20-minute

90-minute

IMPACT RATED

YES

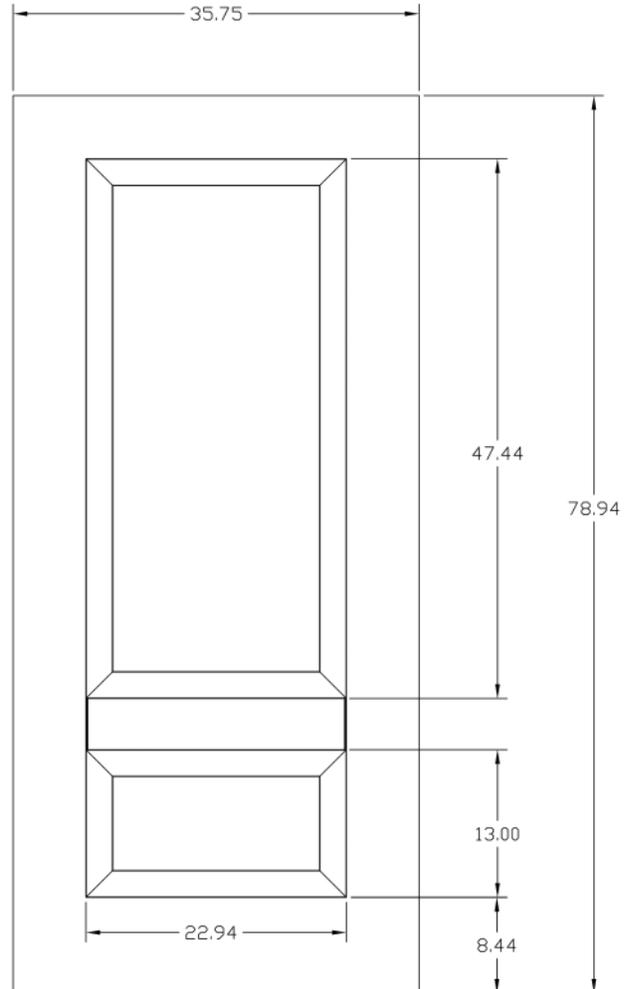


[Click Here For a
Steel Door
Hurricane Impact or
Fire Rated](#)

[Click Here For a
Solid Core Molded Wood
20 Minute Fire Rated](#)

HEIGHT 6'8" & 7'0" **PROFILE** 8P

STYLE 8-PANEL RAISED

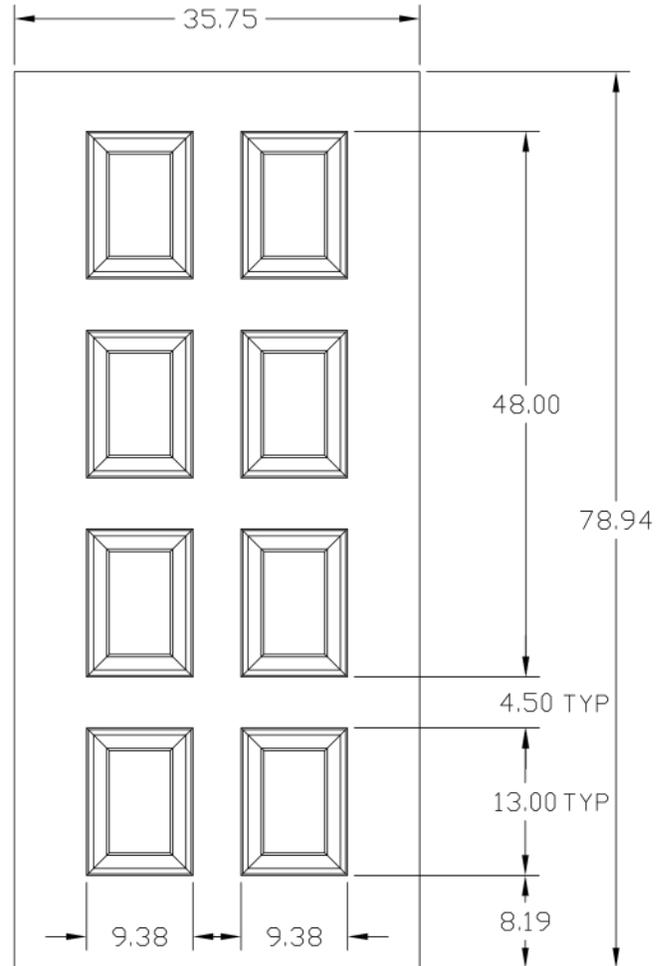

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge

ADA COMPLIANCE

- 10.19" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

IMPACT RATED

YES

DOOR LABELS

Taylor doors are described and marked with a product identification nomenclature. Below is a door label example and a part number breakdown—a guide to understanding the door nomenclature and interpreting specifications.

  **GENERAL INSTRUCTIONS:** A finish coat is required within 30 days of installation. For detailed technical information, finishing instructions, or code compliance, visit taylordoor.com/technical-library.
STORMDOORS: Anon-ventilated storm door will buildup heat that can damage this door.

MADE IN USA

manufacturing order #
customer part number #

PO: purchase order #



AN22VG_2668_R50_4PBTNF_CB_LT7_P3_9TN - Stainable - Adj Hinge, 22 Ga


2023 ENERGY STAR 7.0

- Doors with no glass (opaque) WILL qualify (U-Factor = 0.17)
- ENERGY STAR 7.0 effective 10/23/23



	Product Qualified All 50 States
	Product Qualified Northern / North-Central
	Product Qualified Southern / South-Central

Smooth Steel or Norwood Steel (steel-edge)	Description	Unit qualifies with:			
		Clear (IG 1" (Intercept))	Low-E 1" (Cardinal 270 or 366)	Blinds (Open)	Decorative Glass
1/4 Lite Doors	Craftsman	.24 / .10	.22 / .05	n/a	.22 / .09
	1/2 Round Top Lite	.24 / .10	.22 / .04	n/a	.22 / .09
	Center Lite	.24 / .10	.22 / .05	n/a	.22 / .09
	Twin Top Lite	.24 / .10	.22 / .05	n/a	.22 / .09
1/2 Lite Doors	1/2 Lite	.29 / .19	.25 / .09	.30 / .19	.26 / .16
	Twin 1/2 Lite	.29 / .19	.25 / .09	.30 / .19	.26 / .16
	3/4 Oval	.26 / .16	.25 / .07	n/a	.26 / .16
	Single Vertical Lite	.29 / .19	.25 / .09	.30 / .19	.26 / .19
3/4 Lite Doors	3/4 Lite	.33 / .26	.28 / .12	.33 / .26	.29 / .21
	Twin 3/4 Lite	.33 / .26	.28 / .12	.33 / .26	.29 / .21
	Full Oval	.33 / .26	.28 / .12	n/a	.30 / .21
Full Lite Doors	Full Lite	.38 / .34	.31 / .16	.38 / .34	.34 / .28
	Twin Full Lite	.38 / .34	.31 / .16	.38 / .34	.34 / .28
Sidelites	1/2 Lite	.16 / .06	.15 / .05	.16 / .06	.15 / .05
	3/4 Lite	.18 / .08	.16 / .07	.18 / .08	.16 / .07
	Full Lite	.20 / .10	.18 / .09	.20 / .10	.19 / .09

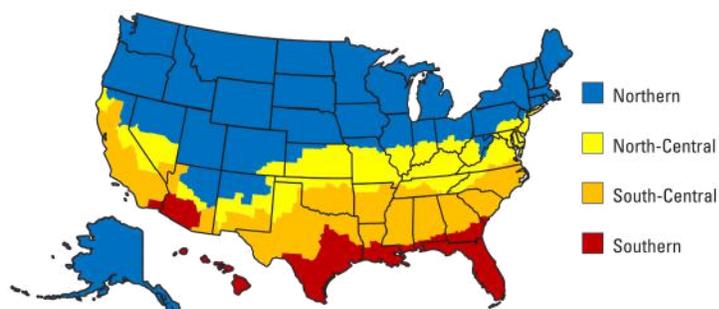

ENERGY STAR® Certification Criteria for Residential Doors

DOORS			
Glazing Level	Climate Zone	U-Factor ¹	SHGC ²
Opaque	All Zones	≤ 0.17	No Rating
≤ 1/2-Lite	All Zones	≤ 0.23	≤ 0.23
> 1/2-Lite	Northern	≤ 0.26	≤ 0.40
	North-Central	≤ 0.26	≤ 0.40
	South-Central / Southern	≤ 0.28	≤ 0.23

¹ Air Leakage for Sliding Doors ≤ 0.3 cfm/ft²
¹ Air Leakage for Swinging Doors ≤ 0.5 cfm/ft²
² Solar Heat Gain Coefficient

FIRE RATED DOORS

Steel doors with a steel edge are tested to withstand a minimum of 90 minutes of fire exposure at temperatures reaching more than 1,400 degrees Fahrenheit. Fire rated doors are tested and classified by Intertek's Warnock Hersey.



Max Size Allowed	Limitations	Max Hourly Rating	Neutral or Positive Pressure	Maximum Glass Size Allowed	Single, Pairs or Double Egress
3'0" x 7'0"	Unit, Mortise, or Cylindrical Latches/Deadbolts max 2 3/4" backset, door bottoms, thresholds.	20 minutes	Neutral Pressure	792 square inches	Single Only
3'0" x 7'0"	Unit, Mortise, or Cylindrical Latches/Deadbolts max 2 3/4" backset, Mortise Exit Devices/Surface mounted Vertical Rod Fire Exit Devices, RIM Type Fire Exit Devices/Surface Mounted Closers, door bottoms, thresholds.	90 minutes	Neutral Pressure	100 square inches	Single Only
3'0" x 7'0"	Unit, Mortise, or Cylindrical Latches/Deadbolts max 2 3/4" backset, Mortise Exit Devices/Surface mounted Vertical Rod Fire Exit Devices, RIM Type Fire Exit Devices/Surface Mounted Closers, door bottoms, thresholds.	20 minutes	Neutral Pressure	792 square inches	Single Only
3'6" x 7'0"	Unit, Mortise, or Cylindrical Latches/Deadbolts max 5" backset, Mortise Exit Devices/Surface mounted Vertical Rod Fire Exit Devices, RIM Type Fire Exit Devices/Surface Mounted Closers, door bottoms, thresholds.	90 minutes	Positive Pressure	100 square inches	Single Only
3'0" x 8'0"	Unit, Mortise, or Cylindrical Latches/Deadbolts max 2 3/4" backset, Mortise Exit Devices/Surface mounted Vertical Rod Fire Exit Devices, RIM Type Fire Exit Devices/Surface Mounted Closers, door bottoms, thresholds.	20 minutes	Neutral Pressure	792 square inches	Single Only
3'0" x 8'0"	Unit, Mortise, or Cylindrical Latches/Deadbolts max 2 3/4" backset, Mortise Exit Devices/Surface mounted Vertical Rod Fire Exit Devices, RIM Type Fire Exit Devices/Surface Mounted Closers, door bottoms, thresholds.	90 minutes	Neutral Pressure & Positive Pressure	100 square inches	Single Only
4'0" x 8'0"	20 Gauge Only, Unit, Mortise, or Cylindrical Latches/Deadbolts max 2 3/4" backset, Mortise Exit Devices/Surface mounted Vertical Rod Fire Exit Devices, RIM Type Fire Exit Devices/Surface Mounted Closers, door bottoms, thresholds.	90 minutes	Positive Pressure	100 square inches	Single Only

FIRE LABELS

Alabelon a fire-rated door is a vital visual confirmation of its compliance with rigorous fire safety standards, indicating its capacity to effectively contain fire, heat, and smoke. Our Intertek metal and mylar fire labels utilize a paint mask to protect the label during the painting/staining process.



90 Minute Mylar Neutral Pressure fire label - 9YN



90 Minute Mylar Positive Pressure fire label - 9YP



90 Minute Metal Neutral Pressure fire label - 9TN



90 Minute Metal Positive Pressure fire label - 9TP



20 Minute Mylar Neutral Pressure fire label - 2YN



FRAMES



QUIKFIT ADJUSTABLE FRAME SYSTEM

The QuikFit Door Frame System is an entrance system that features a steel-edge door panel prehung into an adjustable steel frame. This system is easy to install and offers the industry's highest fire and security ratings, making it ideal for a variety of project types.

SPECIFICATIONS



MATERIAL	Two-piece adjustable galvanized steel frame
GAUGE	Main frames are 18-gauge steel. Closer trim is 22-gauge for walls up to 7-1/2" and 18-gauge for walls over 7-1/2".
WALL CONSTRUCTION	4-1/2" to 12-1/2" (1" adjustments) for 1-3/4" door
INSTALLATION	Anchoring holes and nail clearance slots for wood casing
WARRANTY	1-Year Warranty

AVAILABLE OPTIONS

SIZES	6'8", 7'0", and 8'0" heights
FINISH / COLOR	White powder coat finish (standard) Brown and Satin Black (special request)
SILLS	Thermally broken sills (Inswing, Outswing, or ADA-compliant)
CASING	1-1/2" Flat Casing, 1-3/4" Colonial Casing
G	Variety of hinge preps, types, and finishes
HINGE	Retainer and slide-on sweep for door panel
S	

FRAME SYSTEM TESTING

SWEEP	
FIRE RATING	20-minute or 90-minute
DESIGN PRESSURE (DP) RATINGS	+/- 60 up to 3670
FBC / TDI RATINGS	Florida Building Code (FBC) and Texas Department of Insurance (TDI) approved

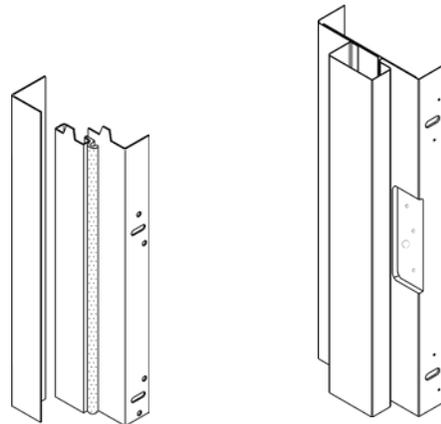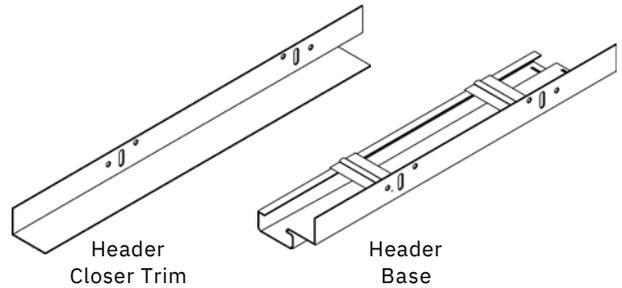

COLORS



WHITE

BROWN

SATIN BLACK

CASING



COLONIAL CASING

FLAT CASING


REMODELER FRAME SYSTEM

Enhance your door's performance and security with the Remodeler Frame System. This system fits over existing wood frames for effortless installation of replacement units. Combine this corrosion-resistant, 18-gauge steel frame with a steel-edge door for top-notch durability, energy efficiency, and security.

SPECIFICATIONS	
MATERIAL	Galvanized steel frame with weatherstrip and an adjustable threshold
GAUGE	18-gauge
HINGE REINFORCEMENTS	11-gauge hinge reinforcements, spot-welded for maximum strength
INSTALLATION	Designed to fit over existing wood frames. Anchoring holes and slots for wood casing.
FINISH / COLOR	White powder coat finish, requiring no sanding or recoating
SILL	Adjustable sill
FRAME ASSEMBLY	Up to 6'11" height

AVAILABLE OPTIONS	
SIZES	2'5", 2'7", 2'9", and 2'11" widths, 6'5", 6'7", 6'9", and 6'11" heights


FRAME SYSTEM TESTING	
SECURITY TESTING	Surpasses the most stringent forced entrance security test

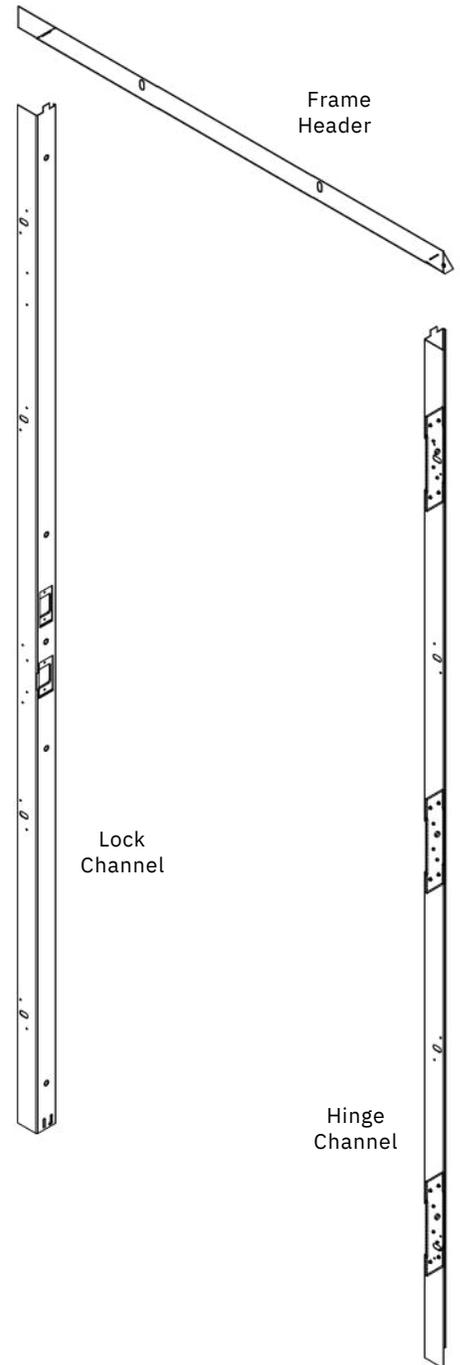

Hinge Details



Lock Details

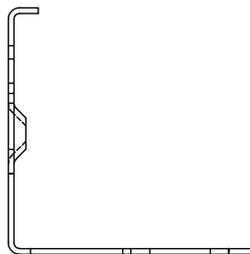

Hinge & Lock Profile

PRO18 ADJUSTABLE FRAME SYSTEM

Enhance your commercial projects with the PRO18 Adjustable Frame System; designed with a mortise hinge pocket, it's a perfect fit for our WestGuard door series. The durable 18-gauge steel provides exceptional strength and longevity. Its expandable steel frame adapts to various jamb depths, offering versatility for evolving project requirements.

SPECIFICATIONS

MATERIAL	Adjustable galvanized steel frame
GAUGE	18-gauge
WALL CONSTRUCTION	Accommodates 4-1/16" to 8-1/16" jamb depths
INSTALLATION	Knock Down (KD) frame featuring 9/64" nail holes and oblong slots for trim installation. Fits tightly around pre-framed wood or metal stud walls. Shimless installation using #10 pan head screws.
FINISH / COLOR	White baked-on primed finish
WARRANTY	1-Year Warranty

AVAILABLE OPTIONS



SIZES	6'8" and 7'0" heights
CASING	Not available
HINGE PREP	4-1/2" mortise commercial hinge pocket 4" radius non-template fixed

ROUGH OPENING (RO) SIZES

NEW CONSTRUCTION	RO width = Nominal + 1-1/8" RO height = Nominal + 9/16"
EXISTING CONSTRUCTION	Nominal width = RO width - 1-1/8" Nominal height = RO height - 9/16"

FRAME SYSTEM TESTING


FIRE RATING	Up to 90-minute (Maximum sizes: 3'0" x 7'0" single, 6'0" x 7'0" double)
--------------------	--

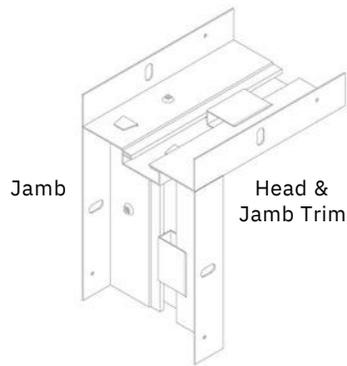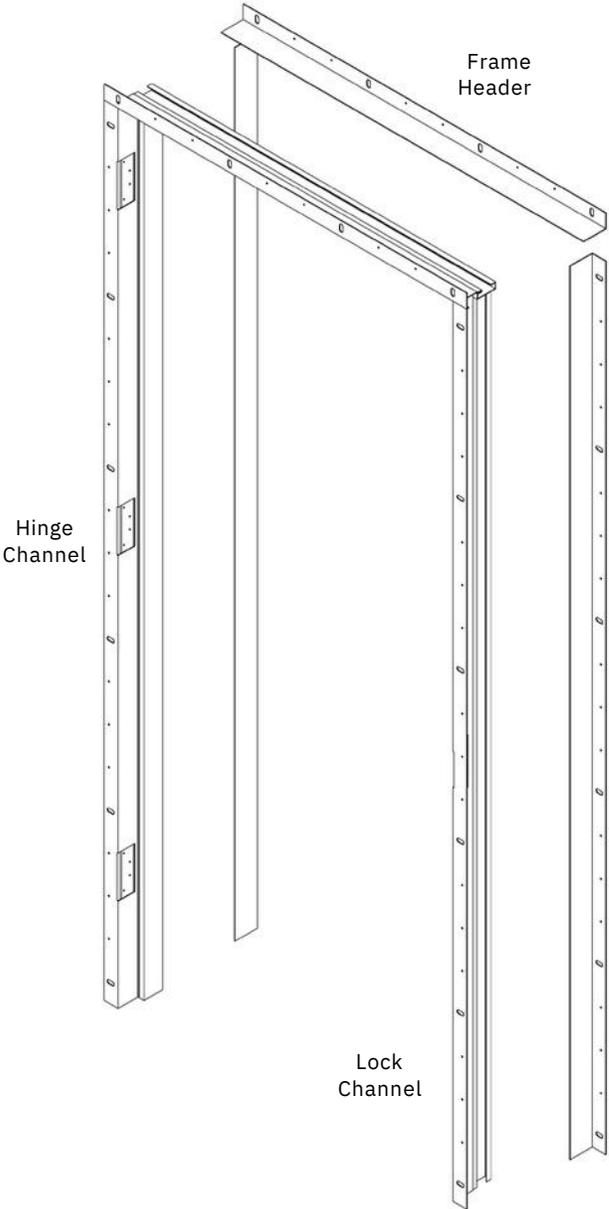


SILLS

ADA-COMPLIANT SILLS


- 1/2" sill height
- ADA-compliant fixed saddle sill
- All-aluminum construction




5" ADA SADDLE
fits 4.5" - 5.5" wall thickness



6" ADA SADDLE
fits 5.5" - 6.5" wall thickness




7" ADA SADDLE
fits 6.5" - 7.5" wall thickness




8" ADA SADDLE
fits 7.5" - 8.5" wall thickness

INSWING & OUTSWING SILLS


- 1-1/4" sill height with 5° slope
- Durable extruded finish
- Full composite substrate
- Modify widths with extenders




11/16" EXTENDER
A-112-B sill extender




1-1/4" EXTENDER
A-140-B sill extender




2" EXTENDER
A-112-C sill extender
- STOCK -

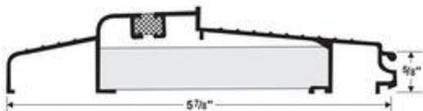

OUTSWING SILL
A-111 thermal break fixed sill

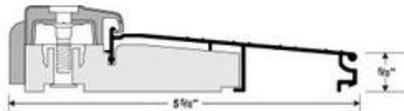

ADJUSTABLE INSWING SILL
P-2000 adjustable sill (A-280 extrusion)

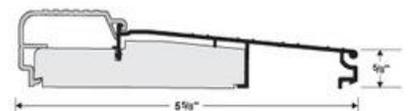

FIXED INSWING SILL
A-280 fixed cap sill
- STOCK -

ADD-ONS

Explore our comprehensive components selection, where customization meets quality. Elevate every aspect of your entryway with our premium additions, offering versatile solutions from meticulously engineered door jambs and weatherstripping to durable sills. Tailor your door to perfection with these components—all in stock and ready to transform your entryway.

FRAME WEATHERSTRIP

Experience optimal insulation and protection against the elements with our weatherstripping options.

WEATHERSTRIP			
	37"	82"	97"
Header	<input type="radio"/>		
Jamb		<input type="radio"/>	<input type="radio"/>

WEATHERSTRIP RETAINER FOR SWEEP

The metal retainer, securely riveted to the bottom of our steel doors, offers versatile compatibility with our slide-on sweeps. This strategic integration ensures a seamless and durable connection, reinforcing the door's defenses against drafts and enhancing efficiency.





DOOR SWEEP WEATHERSTRIP

Upgrade the bottom of your door with our efficient door sweeps, expertly designed to prevent drafts, improve energy efficiency, and enhance weather resistance. Our door sweep weatherstrip helps to maintain indoor comfort and effectively deters the entry of insects and debris.



SLIDE-ON BULB SWEEP		2'6"	2'7"	2'8"	2'11"	3'0"	3'6"
Beige		○	○	○	○	○	○
Brown				○		○	○

For doors with bottom weatherstrip retainer.

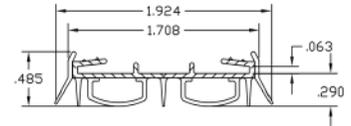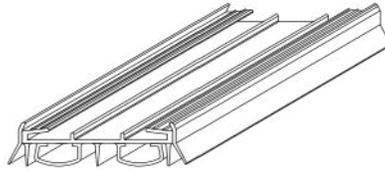



SLIDE-ON FINNED SWEEP		2'5"	2'6"	2'7"	2'8"	2'11"	3'0"	3'6"
Beige					○		○	○
Brown		○	○	○	○	○	○	○

For doors with bottom weatherstrip retainer.

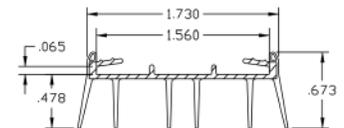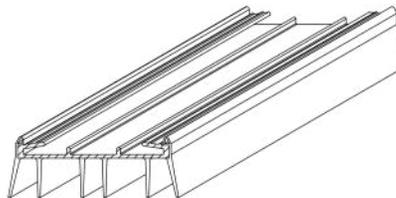



SCREW-ON FINNED SWEEP		2'6"	2'8"	2'10"	3'0"
Beige					
Brown		○	○	○	○

For doors with bottom weatherstrip retainer.

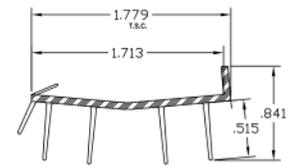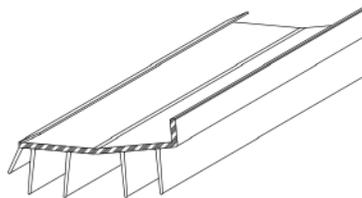

POUND-IN FINNED SWEEP		2'8"	3'0"	3'6"	4'0"
Beige		○	○	○	○
Brown		○	○	○	○

For doors without bottom weatherstrip retainer.
Used on Edgewood series.

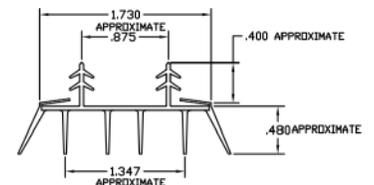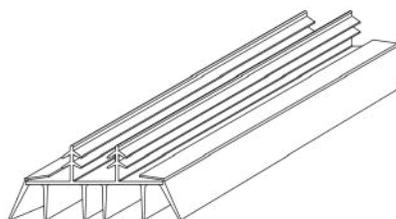


SILLS

Create a smooth transition between indoor and outdoor spaces with our selection of stocked sills, including ADA-compliant and fixed inswing sills. These additions are engineered for durability, enhancing essential functionality in your entryway.

	ADA-COMPLI		
	2'8"	3'0"	3'6"
5" ADA Saddle	<input type="radio"/>	<input type="radio"/>	
Sill 6" ADA		<input type="radio"/>	
Saddle Sill 7"	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
ADA Saddle Sill	<input type="radio"/>	<input type="radio"/>	

Additional options available upon request.

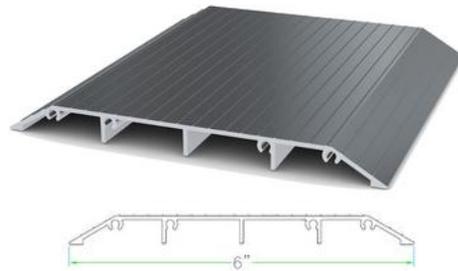


	INSWING & OUTSWING SILLS			
	2'6"	2'8"	2'10"	3'0"
Outswing Sill				
Adjustable Inswing Sill				
Fixed Inswing Sill	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
2" Extender for Fixed Inswing Sill				<input type="radio"/>

Additional options available upon request.



FIXED INSWING SILL
A-280 fixed cap sill



2" EXTENDER
A-112-C sill extender

*Choose The Renovation
Warehouse for doors that not
only meet standards but
exceed expectations.
Your vision, our precision.*

Let's build something exceptional together.

PHONE: 954-746-3031

VISIT US: www.renovation305.com

We reserve the right to change product features and specifications without prior notice. Photography used herein may not represent current product offering. The door glass shown in the photography is not provided by Taylor Entrance Systems. Taylor Entrance Systems is a trademark of Wausau Supply Co.

For California Residents Only

WARNING: This product can expose you to chemicals known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.