



● **Naturale Rettificato**
Unpolished Rectified
Matt Rectifiziert
Naturel Rectifié

◐ **Lucidato Rettificato**
Half Polished Rectified
Halbpoliert Rectifiziert
Semi-poli Rectifié




Porfirica Aglo




Porfirica Aglo **Grey**



Porfirica Aglo **Purple**

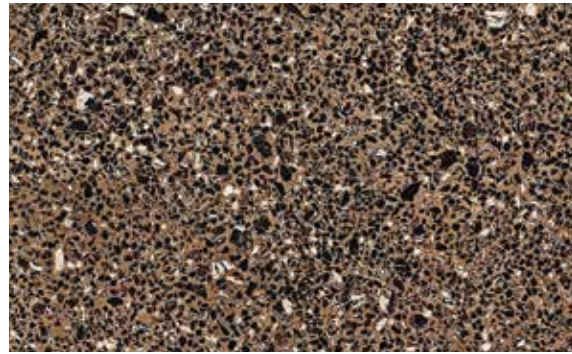

Porfirica Aglo **Brown**

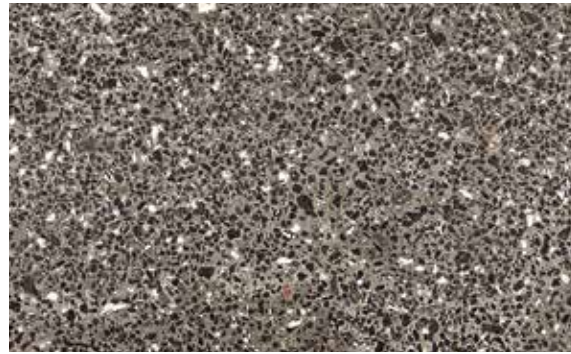

Porfirica Aglo **Graphite**



Porfirica Aglo **Black**







SUPERFICI SURFACES OBERFLÄCHEN SURFACES

● **Naturale Rettificato**
Unpolished Rectified
Matt Rektifiziert
Naturel Rectifié

◐ **Lucidato Rettificato**
Half Polished Rectified
Halbpoliert Rektifiziert
Semi-Poli Rectifié

◻ **Mix Naturale Lucidato Aglo Naturale Aglo Lucidato Rettificato**
Mix Unpolished Half Polished Aglo Unpolished Aglo Half Polished Rectified
Mix Matt Halbpoliert Aglo Matt Aglo Halbpoliert Rektifiziert
Mix Naturel Semi-Poli Aglo Naturel Aglo Semi-Poli Rectifié



Formati	Colori	Superfici		Scatole			Pallet			≠
		Naturale Rettificato Unpolished Rectified Matt Rektifiziert Naturel Rectifié	Lucidato Rettificato Half Polished Rectified Halbpoliert Rektifiziert Semi-Poli Rectifié	Pz/Sc Pcs/Box Stck/Kart. Pcs/Boîte	Mq/Sc Sqm/Box Qm/Kart. M²/Boîte	Kg/Sc Kg/Box Kg/Kart. Kg/Boîte	Colli Boxes Kart Boîtes	Mq Sqm Qm M²	Kg Kg Kg Kg	
 75x149,7 - 30°x59°	Aglo Grey Aglo Purple Aglo Graphite Aglo Brown Aglo Black	POA713R POA715R POA717R POA718R POA710R	POA713L POA715L POA717L POA718L POA710L	1	1,1227	26	24	26,9448	650	10 mm
 75x75 - 30°x30°	Aglo Grey Aglo Purple Aglo Graphite Aglo Brown Aglo Black	POA753R POA755R POA757R POA758R POA750R	POA753L POA755L POA757L POA758L POA750L	2	1,125	25,5	42	47,25	1081	10 mm
 60x60 - 24°x24°	Aglo Grey Aglo Purple Aglo Graphite Aglo Brown Aglo Black	POA603R POA605R POA607R POA608R POA600R	POA603L POA605L POA607L POA608L POA600L	4	1,44	31,5	30	43,20	955	10 mm
 75x60 - 3°x24° Battiscopa - Bullnose Sockel - Plinthe	Aglo Grey Aglo Purple Aglo Graphite Aglo Brown Aglo Black	POAB63R POAB65R POAB67R POAB68R POAB60R	POAB63L POAB65L POAB67L POAB68L POAB60L	22	MI 13,2	22				

gres360°
STONE THROUGHOUT

Gres Porcellanato Porcelain Stoneware Feinsteinzeug Grès Cérame EN 14411:2012 ANNEX G GROUP B1a UGL





 **(V3): Piastrelle con media variazione di tono e disegno**
Tiles with moderate shade and aspect variation
Fliesen mit gemäßigt unterschiedlichen Tonalitäten und Muster
Carreaux avec faible différence de nuance et structure

- | | |
|---|--|
| <input checked="" type="checkbox"/> Pavimento - Floor coverings
Bodenbeläge - Sol | <input checked="" type="checkbox"/> Traffico leggero
Light traffic areas - Geringe Begehungsfrequenz
Zones à trafic léger |
| <input checked="" type="checkbox"/> Rivestimento - Wall coverings
Wandbeläge - Faïence | <input checked="" type="checkbox"/> Traffico pesante (Naturale)
Heavy traffic areas - Starke Begehungsfrequenz
Zones à trafic intense |
| <input checked="" type="checkbox"/> Residenziale - Residential areas
Wohngebiete - Zones résidentielles | <input type="checkbox"/> Zone limitrofe a piscina
Swimming pool areas - Schwimmbadbereich
Abords de piscines |
| <input type="checkbox"/> Esterno
Outdoor areas - Außenbereiche
Espaces extérieurs | <input checked="" type="checkbox"/> Rivestimenti esterni / Pareti ventilate
External cladding / Ventilated facade - Außenverkleidung / Hinterlüftete Fassaden
Murs extérieurs / Façades ventilées |

DIGITAL HD 3D **Fino a 100 grafiche differenti**
Up to 100 different graphics
Jusqu'à 100 graphiques différentes
Bis zu 100 verschiedene Grafiken

> 20%
WE FEEL GREEN **Elevato contenuto di materiale riciclato**
High content of recycled material
Hoher Anteil an Recycelten Rohstoffen
Haute teneur en matériaux recyclés

Pag. 629
eco+
THE GREEN SOUL OF PORCELAIN STONWARE

 Resistente al gelo	 Naturale	 Naturale DRY: > 0,40 WET: > 0,40	 Naturale WET: ≥ 0,42
---	---	---	--

* **DCOF Test su superficie Lucidato disponibile su richiesta.** - DCOF Test on Half Polished surface available on request.
DCOF-Test auf Halbpoliert Oberfläche auf Anfrage. - RESISTENTE DCOF Test sur surface Semi-Poli disponible sur demande.