

Brighten Every Moment

Cut-edge LED Module

Indoor

Outdoor



Extended Splicing Angles



Energy-Saving




No Extra Cuts Needed

Cut-edge modules ensure no extra cuts or seams are needed for curved displays

Extended Splicing Angles

Splice the display outward to anywhere from 90 to 180 degrees

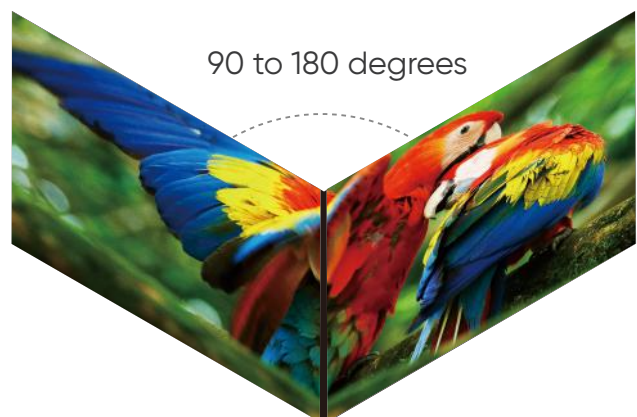

90 to 180 degrees



Energy-Saving Design

- PWM energy-saving driver IC with built-in current adjustment, offering 64 levels of brightness control
- Supports 4.2V, 4.5V, and 5V switching power supply

Application Scenarios



Key Spec

Indoor	DS-D41Q15CA-1PHT	DS-D41Q18CA-1PHT	DS-D41Q20CA-1PHT	DS-D41Q25CA-1PHT
Pixel Pitch	P1.53	P1.86	P2.0	P2.5
Module Size	320*160mm			
Lamp Size	1212	1515	1515	1515
Refresh Rate (Hz)	3840HZ			
Brightness (nits)	500-550nits			
Resolution	208 * 104 resolution	172 * 86 resolution	160 * 80 resolution	128 * 64 resolution

Outdoor	DS-D4340CA-1PHT	DS-D4350CA-1PHT	DS-D4360CA-1PHT	DS-D4380CA-1PHT
Pixel Pitch	P4.0	P5.0	P6.6	P8.0
Module Size	160*160mm			
Lamp Size	1921			
Refresh Rate (Hz)	3840HZ			
Brightness (nits)	4500 nits			
Resolution	40 * 40 resolution	32 * 32 resolution	24 * 24 resolution	20 * 20 resolution



Hikvision

HikvisionHQ

HikvisionHQ

Hikvision Corporate Channel

hikvisionoverseas

Hikvision Commercial Display

HikvisionOverseas

HIKVISION