

AGIBOT C5

Your Solution for Commercial & Industrial Cleaning
Intelligent commercial cleaning robot



YouTube



LinkedIn



Double-roller brush structure, vacuuming & scrubbing in one; high water volume and high scrubbing pressure, single-pass heavy stain removal



Laser - Vision fusion positioning, more reliable



Automatic Charging, Automatic Water Refill and Drainage, Self-cleaning Dirty Water Tank, Access Control and Elevator Linkage, Minimized Manual Intervention



Floor scrubbing width: 550 mm, theoretical debris removal efficiency: up to 1980 m²/h



The first dual-chamber squeegee design, less residual water in gaps and cleaner water absorption



Simple maintenance, with the industry's first self-cleaning dirty water tank, which reduces daily maintenance time by half



Side brushes close to the edge, re-cleaning for missing spots, closed-loop cleaning, cleaning every corner



High specification for selection, fan lifespan of 10000h with the minimum lifecycle cost



Parameters

AGIBOT C5


Garbage collection rate	Machine weight
95%	170 kg
Self-cleaning dirty water tank	Battery specification
4 min	24V 80 Ah
Maximum efficiency	Overall noise
1980 m²/h	<68 db(A)
Lifespan of Fan	Extra large volume of water tank
10000h	90L
Floor scrubbing endurance	Scrubbing pressure
3h	25 kg
Scrubbing width	
550 mm	





Station

Water tank capacity
8L
Water filling speed
7-10 L/min
Dirty water discharging speed
10-15 L/min
Maximum power
1800W
Rated input voltage
200-240V

Application scenarios

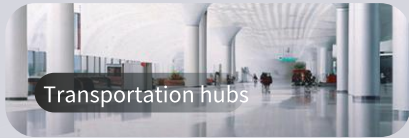

Applicable Floor Types

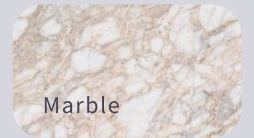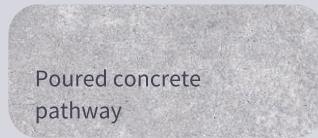

Customer Support



Training Support

Custom tutorial videos on the Zhiding online learning platform



Response Speed

Rapid response within 0.5h



Value-Added Services

Regular inspection, extended warranty, consumable bundles, all-inclusive packages, and tailored solutions



Global Presence

Covers 150+ cities across China and reaches global markets



Initial Maintenance Policy

Initial maintenance for free

