

# Hikvision PDS Products



Efficient  
Cabling



Reliable  
UPS



Versatile  
Monitors



# Hikvision PDS Products Family

Hikvision provides cutting-edge video security systems and a range of supplementary security solutions, including **Premises Distribution System (PDS) products** for efficient data transmission, reliable **UPS** units for power backup, and high-quality **Monitors** for monitoring, office work, gaming, and other applications.

## PDS Products




 Network Cables



 Coaxial Cables




 Path Cord,  
Balun, Plug



 Alarm Cables



 PDS Accessories


## UPS

## Monitors




 Backup Type UPS



 SOHO and Professional Series



 Mini DC UPS

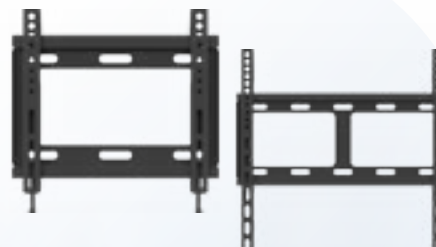

 Wall-Mounted Bracket

# PDS

## (Premises Distribution System)

Hikvision's PDS product lines provide a diverse range of offerings to support a wide variety of IP applications, catering to the specific needs of modern networking requirements.



### Network Cables

Flame-retardant with multiple qualifications:  
CPR Eca/CPR Cca CPR Fca CPR Eca/Fca

Low smoke zero halogen cables

Patch Cord



### Coaxial Cables

Mini RG59 + 3-Power cables

RG59 + 2-Power cables

RG59 cables



### PDS Accessories

RJ45 plug

Patch panel

Cable management

Balun

Faceplate

Keystone jack



# Network Cables

## Pure Copper

Superior copper content, tight tolerances, and consistent quality

Wire diameters available to meet mainstream market demands: 23, 24, 25 AWG.

## Wide Selection

Diverse categories such as Cat5e, Cat6, and Cat6a, all meeting industry standards

## Versatile Applications

Fire safety certifications

Indoor and outdoor models

LSZH (Low Smoke Zero Halogen) options



# Path Cord




No need for an additional crystal connector



Convenient and easy to carry



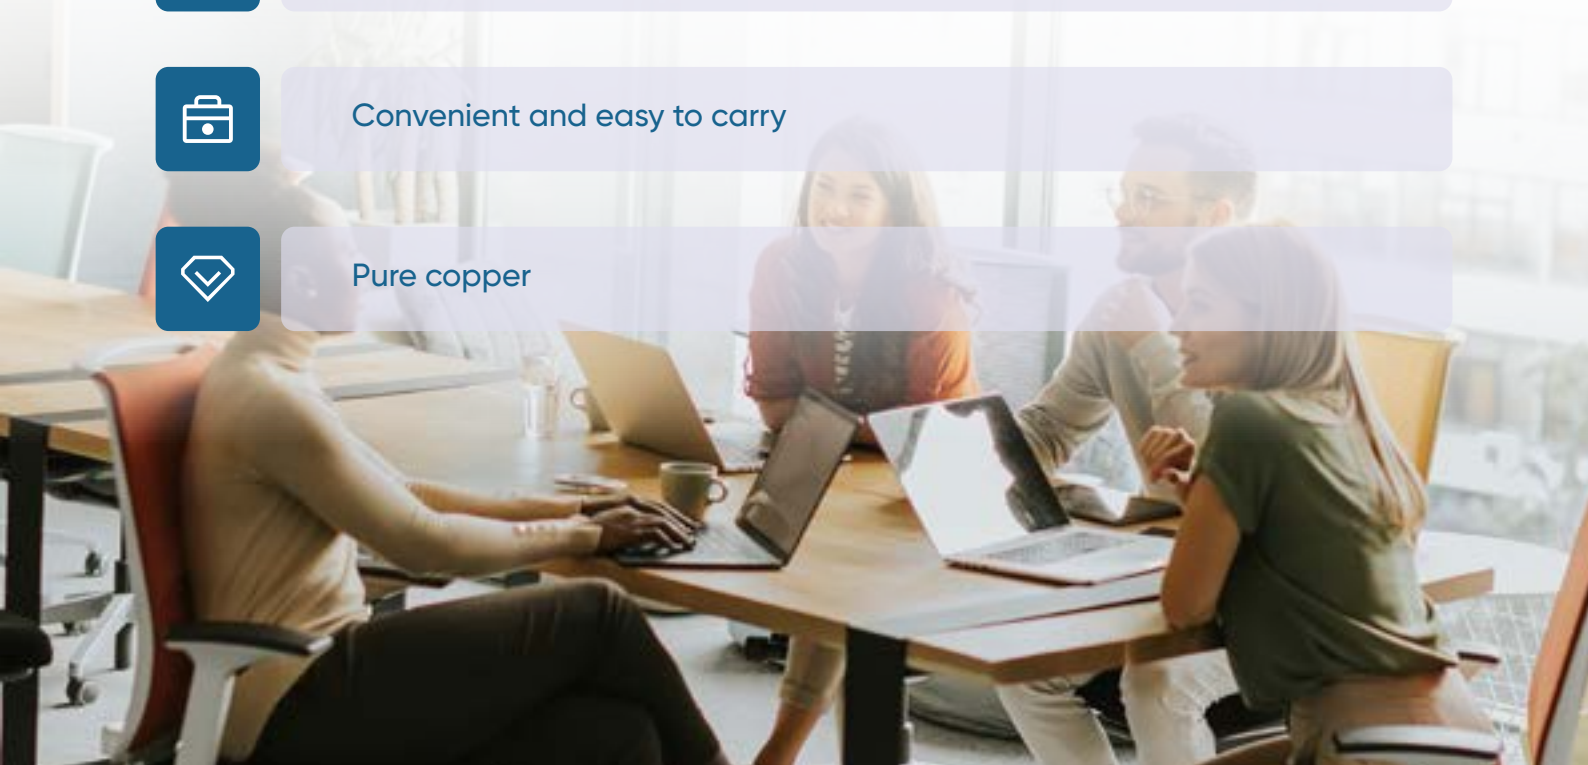

Pure copper







# Product Showcase

## Network cables - Cat5e







Product Category	(CPR Fca) No Flame Retardant	(CPR Fca) No Flame Retardant	Single Cable Flame Retardant	Bunched Cable Flame Retardant
<b>Model</b>	<b>DS-1LN5EU-SCO</b>	<b>DS-1LN5EUECO</b>	<b>DS-1LN5E-E/E</b>	<b>DS-1LN5E-S</b>
<b>Image</b>				
<b>Conductor Material</b>	Solid Copper	Solid Copper	Solid Copper	Solid Copper
<b>Type</b>	Cat5e	Cat5e	Cat5e	Cat5e
<b>Diameter</b>	24 AWG 0.50 mm	25 AWG 0.45 mm	25 AWG 0.45 mm	24 AWG 0.50 mm
<b>Structure</b>	U/UTP	U/UTP	U/UTP	U/UTP
<b>Sheath Material</b>	PVC	PVC	PVC	PVC
<b>Length (m)</b>	305	305	305	305
<b>Flame Retardant Certificate</b>	CPR Eca	CPR Fca	UL CMX	UL CM CPR Eca

**Network cables - Cat5e**

Product Category	(CPR Fca) Outdoor with PE Sheath	(CPR Fca) Outdoor with PE Sheath	(Low smoke zero halogen) (CPR Eca/CPR Cca)	(Low smoke zero halogen) (CPR Eca/CPR Cca)
<b>Model</b>	<b>DS-1LN5EO-UU/E</b>	<b>DS-1LN5EOPSPE</b>	<b>DS-1LN5EUSL5</b>	<b>DS-1LN5EPSL3</b>
<b>Image</b>				
<b>Conductor Material</b>	Solid Copper	Solid Copper	Solid Copper	Solid Copper
<b>Type</b>	Cat5e	Cat5e	Cat5e	Cat5e
<b>Diameter</b>	24 AWG 0.50 mm	24 AWG 0.50 mm	24 AWG 0.50 mm	24 AWG 0.50 mm
<b>Structure</b>	U/UTP	F/UTP	U/UTP	F/UTP
<b>Sheath Material</b>	PE	PE	LSZH	LSZH
<b>Length (m)</b>	305	305	305	305
<b>Flame Retardant Certificate</b>	CPR Fca	CPR Fca	CPR Eca	CPR Cca s1b d1 a1






# Product Showcase

## Network cables - Cat6

Product Category	(CPR Eca/Fca) Copper Clad Aluminium	(CPR Eca/Fca) Copper Clad Aluminium	(CPR Fca) No Flame Retardant	(CPR Fca) No Flame Retardant	(CPR Fca) No Flame Retardant	(CPR Fca) No Flame Retardant
<b>Model</b>	DS-1LN6U-W/CCA	DS-1LN6UU/CCA	DS-1LN6U-G	DS-1LN6U-SCO	DS-1LN6UECO	DS-1LN6UTC0
<b>Image</b>						
<b>Conductor Material</b>	CCA	CCA	Solid Copper	Solid Copper	Solid Copper	Solid Copper
<b>Type</b>	Cat6	Cat6	Cat6	Cat6	Cat6	Cat6
<b>Diameter</b>	23 AWG 0.585 mm	23 AWG 0.57 mm	23 AWG 0.55 mm	23 AWG 0.55 mm	24 AWG 0.53 mm	24 AWG 0.515 mm
<b>Structure</b>	U/UTP	U/UTP	U/UTP	U/UTP	U/UTP	U/UTP
<b>Sheath Material</b>	PVC	PVC	PVC	PVC	PVC	PVC
<b>Length (m)</b>	305	305	305	305	305	305
<b>Flame Retardant Certificate</b>	CPR Eca	CPR Fca	CPR Eca	CPR Eca	CPR Fca	CPR Eca








**Network cables - Cat6**






Product Category	(CPR Fca) No Flame Retardant	Bunched Cable Flame Retardant	Bunched Cable Flame Retardant	(CPR Fca) Outdoor with PE Sheath	(CPR Fca) Outdoor with PE Sheath
<b>Model</b>	DS-1LN6UZC0	DS-1LN6-UU	DS-1LN6-UE-W	DS-1LN6OPSPE	DS-1LN6OUSPE
<b>Image</b>					
<b>Conductor Material</b>	Solid Copper	Solid Copper	Solid Copper	Solid Copper	Solid Copper
<b>Type</b>	Cat6	Cat6	Cat6	Cat6	Cat6
<b>Diameter</b>	24 AWG 0.5 mm	23 AWG 0.565 mm	24 AWG 0.53 mm	23 AWG 0.565 mm	23 AWG 0.55 mm
<b>Structure</b>	U/UTP	U/UTP	U/UTP	F/UTP	U/UTP
<b>Sheath Material</b>	PVC	PVC	PVC	PE	PE
<b>Length (m)</b>	305	305	305	305	305
<b>Flame Retardant Certificate</b>	CPR Fca	UL CM CPR Eca	UL CM CPR Fca	CPR Fca	CPR Eca

# Product Showcase

## Network cables - Cat6


Product Category	(CPR Fca) Outdoor with PE Sheath	(CPR Fca) Outdoor with PE Sheath	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)
<b>Model</b>	<b>DS-1LN6OUTPE</b>	<b>DS-1LN6AUSPE</b>	<b>DS-1LN6USL5</b>	<b>DS-1LN6USL3</b>	<b>DS-1LN6UEL5</b>
<b>Image</b>					
<b>Conductor Material</b>	Solid Copper	Solid Copper	Solid Copper	Solid Copper	Solid Copper
<b>Type</b>	Cat6	Cat6A	Cat6	Cat6	Cat6
<b>Diameter</b>	24 AWG 0.515 mm	23 AWG 0.56 mm	23 AWG 0.565 mm	23 AWG 0.565 mm	24 AWG 0.53 mm
<b>Structure</b>	U/UTP	U/UTP	U/UTP	U/UTP	U/UTP
<b>Sheath Material</b>	PE	PE	LSZH	LSZH	LSZH
<b>Length (m)</b>	305	305	305	305	305
<b>Flame Retardant Certificate</b>	CPR Fca	CPR Fca	CPR Fca	CPR Cca s1b d1 a1	CPR Fca

**Network cables - Cat6**

Product Category	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)
<b>Model</b>	<b>DS-1LN6UEL3</b>	<b>DS-1LN6AUSL5</b>	<b>DS-1LN6APSL4</b>	<b>DS-1LN6APSL3</b>	<b>DS-1LN6AFPSL4</b>
<b>Image</b>					
<b>Conductor Material</b>	Solid Copper	Solid Copper	Solid Copper	Solid Copper	Solid Copper
<b>Type</b>	Cat6	Cat6A	Cat6A	Cat6A	Cat6A
<b>Diameter</b>	24 AWG 0.53 mm	23 AWG 0.56 mm	23 AWG 0.56 mm	23 AWG 0.56 mm	23 AWG 0.56 mm
<b>Structure</b>	U/UTP	U/UTP	U/UTP	U/UTP	S/FTP
<b>Sheath Material</b>	LSZH	LSZH	LSZH	LSZH	LSZH
<b>Length (m)</b>	305	305	305	305	305
<b>Flame Retardant Certificate</b>	CPR Cca s1b d1 a1	CPR Fca	CPR Dca s1 d2 a1	CPR Cca s1 d1 a1	CPR Dca s2 d2 a1

# Product Showcase




Network cables - Path cord

Model	DS-1NP6UEC0		
Image			
Type	Cat6		
Size	0.50 ± 0.005 mm		
Structure	U/UTP		
Length (m)	0.5, 1, 2, 3, 5, 10		
Sheath Material	PVC		
Gold Plating	30 U		

# Coaxial Cables

Coaxial cables provide reliable connectivity and deliver quality images. Specifically, 3+1 and 2+1 cables enable simultaneous transmission of video signals and power supplies.



- 
 Optimal video transmission capability
- 
 Guaranteed genuine quality with stable craftsmanship
- 
 Versatile options with single coaxial cable and 2+1/3+1 configurations to suit various requirements

# Alarm Cables

Hikvision alarm cables are essential for connecting security devices and transmitting alarm signals. They are widely used for linking door magnets, infrared detectors, smoke alarms, and other vital security equipment.



◀ Versatile applications in diverse scenarios





CPR Eca flame retardant certification ▶



◀ Low smoke halogen-free

# Product Showcase

## Coaxial Cables

Product Category	3+1 Siamese Cable	2+1 Siamese Cable		1-core Coaxial Cable
Model	DS-1LH1SCAM593C	DS-1LH1SCAM592C	DS-1LH1S2C-20	DS-1LC1SSA
Image				
Description	Mini RG59 Cable, CL2 26 AWG, 3 * Power Cable, PVC, Black	Mini RG59 Cable, CU, 26 AWG, 2 * Power Cable (0.2), PVC, Black	Mini RG59 Cable, CU, 28 AWG, 2 * Power Cable, 24 AWG, PVC, Black	RG59 Cable, CCS, 20 AWG, 60% Braiding Density, PVC, Black
Sheath Material	PVC	PVC	PVC	PVC
Length (m)	180	90/180	20	305

**Alarm Cables**

Model	DS-1AC2A2BPL1	DS-1AC2B4APL1	DS-1AC2B6APL1	DS-1AC2C4APL1	DS-1AC2C6APL1	DS-1AC4APL1	DS-1AC6APL1
<b>Image</b>							
<b>Description</b>	2+2 cores: 2 * 0.22 mm <sup>2</sup> (7-strand) + 2 * 0.50 mm <sup>2</sup> (16-strand)	2+4 cores: 2 * 0.5 mm <sup>2</sup> (16-strand) + 4 * 0.22 mm <sup>2</sup> (7-strand)	2+6 cores: 2*0.5 mm <sup>2</sup> (16-strand) + 6*0.22 mm <sup>2</sup> (7-strand)	2+4 cores: 2 * 0.75 mm <sup>2</sup> (24-strand) + 4 * 0.22 mm <sup>2</sup> (7-strand)	2+6 cores: 2 * 0.75 mm <sup>2</sup> (24-strand) + 6 * 0.22 mm <sup>2</sup> (7-strand)	4-core: 4 * 0.22 mm <sup>2</sup> (7-strand)	6-core: 6 * 0.22 mm <sup>2</sup> (7-strand)
<b>Color and Sheath</b>	Blue, LSZH	Blue, LSZH	Blue, LSZH	Blue, LSZH	Blue, LSZH	Blue, LSZH	Blue, LSZH
<b>Package</b>	Color, 305-m/Package	Color, 305-m/Package	Color, 305-m/Package	Color, 305-m/Package	Color, 305-m/Package	Color, 305-m/Package	Color, 305-m/Package
<b>Flame Retardant Certificate</b>	CPR Eca	CPR Eca	CPR Eca	CPR Eca	CPR Eca	CPR Eca	CPR Eca

# PDS Accessories



## Faceplates

Available in two product types: single-port and dual-port



## Keystone Jacks

Available in a range of types, including shielded, unshielded, 90°, 180°, punch down, and tool-less



## Patch Panel

Available in various products: with or without keystone jacks, shielded, and unshielded types



## Cable Management

Available in 1U, 12-slot, 24-slot types



## Balun

Available in 1U, 12-slot, 24-slot types



## Cabinet

In sizes from 4U-12U



## Cat5e

## Cat6



Cat5e and cat6 plugs make it quick and easy to terminate or join cables together







# Product Showcase




## Faceplates

Model	DS-1FPA1	DS-1FPA2
Image		
Type	1-Port	2-Port
Flame Retardant Certificate	UL94V-0 Flame Retardant	UL94V-0 Flame Retardant
Package	20 Pcs/Box	20 Pcs/Box


## Cable Management

Model	DS-1CM1U12	DS-1CM1U24
Image		
Type	12-Slot	24-Slot
Size	1U	1U
Package	1/Box	1/Box

## Patch Panels








Model	DS-1CP0P24-1U	DS-1CP0U24-1U	DS-1CP6U24-1U
Image			
Type	24-Port	24-Port	24-Port
Type	Blank	Blank	Cat6
Shield	Shielded	Unshielded	Unshielded
Package	1/Box	1/Box	1/Box

## Balun



Model	DS-1H18S/E(C)
Image	
Description	Single-Channel Passive HD Video Twisted Pair Transmitter

# Product Showcase






## Keystone Jacks

Model	DS-1CK6U90T	DS-1CK6U90N	DS-1CK6U180T	DS-1CK6U180N	DS-1CK6P180N	DS-1CK6AU180T	DS-1CK6AP180N
Image							
Angel	90°	90°	180°	180°	180°	180°	180°
Type	Cat6	Cat6	Cat6	Cat6	Cat6	Cat6a	Cat6a
Shield	Unshielded	Unshielded	Unshielded	Unshielded	Shielded	Unshielded	Shielded
Tool	Punch Down	Tool-Less	Punch Down	Tool-Less	Tool-Less	Punch Down	Tool-Less
Package	50 Pcs/Box	50 Pcs/Box	50 Pcs/Box	50 Pcs/Box	50 Pcs/Box	50 Pcs/Box	50 Pcs/Box

## Plugs

Model	DS-1M5EUA-15/30U	DS-1M6UA-15/30U
Image		
Type	Cat5e	Cat6
Gold Plating	15/30U	15/30U
Shield	Unshielded	Unshielded
Package	100 Pcs/Box	100 Pcs/Box

## Cabinets

Model	DS-XS6404-S/B	DS-XS6406-S/B	DS-XS6409-S/B	DS-XS6412-S/B	DS-XSPB04-S/B
Image					
Type	4U	6U	9U	12U	N/A
Size	600*450*281 mm, Load Bearing: 40 kg	6U, 600*450*368 mm, Load Bearing: 40 kg	600*450*501 mm, Load Bearing: 40 kg	600*450*635 mm, Load Bearing: 40 kg	Standard Tray for 4/6/9/12U

# UPS

Hikvision provides reliable UPS units that offer seamless power backup, safeguarding against potential outages and ensuring uninterrupted system operations.

Computer power supply for home or offices

Power supply for switches

Power supply for security systems

Power supply for routers

## Backup Type UPS

### Adaptability

Automatically adjust for voltage fluctuations in the power grid to maintain stable output

### Safety

Immediately switch to backup power during mains outage to sustain equipment operation

### Reliability

Feature multiple circuit protection mechanisms (overload, short circuit, overvoltage, under voltage) to protect connected devices



600VA/360W  
1000VA/600W  
1200VA/720W

2000VA/1200W

3000VA/1800W

### Stability

Prevent equipment damage or data loss from unstable grid voltages, ensuring continuous operation

## Mini DC UPS

### Convenient

DC power output supports devices like routers

### Efficient

High-performance lithium battery for long backup power



### Practical

Compact and lightweight, ideal for office or home desktop use

### Reliable

Provide overload, overvoltage, and overheat protections for safe operation

# Product Showcase

**Backup series UPS**

Model	DS-UPS600	DS-UPS1000	DS-UPS1200	DS-UPS2000	DS-UPS3000
Image					
Capacity	600 VA/360 W	1000 VA/600 W	1200 VA/720 W	2000 VA/1200 W	3000 VA/1800 W
Output Voltage	110 V/220 V	110 V/220 V	110 V/220 V	110 V/220 V	110 V/220 V
Battery Capacity	12 V/7 Ah	12 V/9 Ah	12 V/7 Ah	12 V/9 Ah	12 V/9 Ah
Battery Number	1	1	2	2	4

**DC UPS**

Model	DS-UPS18D-Z
Image	
Capacity	18 W, 8000 mAh
Output	USB 5 V 2 A, DC 5 V 2 A, DC 9 V 1 A, DC 12 V 1 A, PoE 15 V 0.8 A/PoE 24 V 0.5 A

# Monitors

Hikvision has SOHO and professional monitors for a variety of applications. Products include 4K monitors and 7X24 monitors for the security industry.



## SOHO and Professional Series



Wide viewing angle



Super narrow bezel



Various resolution option



VESA mounting standard



Low blue light design for eye care








Multiple interface options

# SOHO and Professional Series

Industrial grade panel life 50,000~60,000 hours



-  Multimedia
-  Built-in speaker
-  3D noise reduction
-  VESA mounting standard
-  Max 7/24 operations



-  Multimedia
-  Built-in speaker
-  4K resolution
-  VESA mounting standard
-  Max 7/24 operations







# Product Showcase

**SOHO Monitor**

Model	DS-D5019S0-1P0	DS-D5022F2-1V1	DS-D5022F2-2V1	DS-D5022F2-1V2	DS-D5022F2-2V2	DS-D5022F2-1P2
<b>Image</b>						
<b>Product Descriptions</b>	18.5" 1366*768, HDMI/VGA input, view angle: 178°/178°, plastic casing, ERP level A, VESA, base bracket included, 7*24h	21.5", VA, HDMI/VGA input, 75Hz, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	21.5", VA, HDMI/VGA input, 75Hz, "V" shaped base, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	21.5", VA, HDMI/VGA input, Audio Output, 100Hz, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	21.5", VA, HDMI/VGA input, Audio Output, 100Hz, "V" shaped base, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	21.5", IPS, HDMI/VGA input, Audio output, 100Hz, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms
<b>7x24H</b>	yes	no	no	no	no	no
<b>Size</b>	18.5"	21.5"	21.5"	21.5"	21.5"	21.5"
<b>Resolution</b>	1366*768	1080P	1080P	1080P	1080P	1080P
<b>OC Type</b>	IPS	VA	VA	VA	VA	IPS
<b>Max Refresh Rate (HZ)</b>	60	75	75	100	100	100
<b>Visual Angle</b>	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
<b>Response Time (ms)</b>	6.5	6.5	6.5	6.5	6.5	6.5
<b>Brightness (nits)</b>	200	250	250	250	250	250
<b>Interface</b>	HDMI, VGA, Audio IN	HDMI, VGA	HDMI, VGA	HDMI, VGA, Audio out	HDMI, VGA, Audio out	HDMI, VGA, Audio out
<b>Speaker</b>	NO	NO	NO	NO	NO	NO

# Product Showcase

## SOHO Monitor

Model	DS-D5022F2-2P2A	DS-D5022F2-1V2S	DS-D5024F2-AP2	DS-D5024F2-BV2S	DS-D5027F2-1P2	DS-D5027F2-2P2
Image						
Product Descriptions	21.5", IPS, HDMI/VGA input, Audio output, 100Hz, "V" shaped base, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	21.5", VA, HDMI/VGA input, Audio Input, 100Hz, Speaker included, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	23.8" 1080P, HDMI/VGA input, Audio output, IPS technology, view angle:178°/178°, plastic casing, VESA, base bracket included, 100Hz refresh rate, 12V DC	23.8" 1080P, HDMI/VGA input, Audio input, build-in speaker, view angle:178°/178°, plastic casing, VESA, base bracket included, 100 Hz refresh rate, 12V DC	27", IPS, HDMI/VGA input 100HZ, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	27", IPS, HDMI/VGA input, 100Hz, "V" shaped base, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms
7x24H	no	no	no	no	no	no
Size	21.5"	21.5"	23.8"	23.8"	27"	27"
Resolution	1080P	1080P	1080P	1080P	1080P	1080P
OC Type	IPS	VA	IPS	VA	IPS	IPS
Max Refresh Rate (HZ)	100	100	100	100	100	100
Visual Angle	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
Response Time (ms)	6.5	6.5	6.5	6.5	6.5	6.5
Brightness (nits)	200	250	250	250	300	300
Interface	HDMI, VGA, Audio out	HDMI, VGA, Audio in	HDMI, VGA, Audio out	HDMI, VGA, Audio in	HDMI, VGA	HDMI, VGA
Speaker	NO	YES	NO	YES	NO	NO



SOHO Monitor





Model	DS-D5032F3-1V0S
Image	
Product Descriptions	32", VA, HDMI/VGA input, speaker included, Brightness 300nits, Contrast ratio 4000:1, Response time 8ms
7x24H	yes
Size	31.5"
Resolution	1080P
OC Type	VA
Max Refresh Rate (HZ)	60
Visual Angle	178°/178°
Response Time (ms)	8
Brightness (nits)	300
Interface	HDMI, VGA, Audio in
Speaker	YES

Professional Monitor



Model	DS-D5222F2-1V1S	DS-D5224F2-1V1S	DS-D5227U3-1P0	DS-D5232F2-1V1S
Image				
Product Descriptions	21.5" 1080P, HDMI/VGA input, BNC in, build-in speaker, USB 2.0, view angle:178°/178°, plastic casing, 100~240V AC input, VESA, base bracket included, 7*24h	23.8" 1080P, HDMI/VGA input, BNC in, build-in speaker, view angle:170°/160°, plastic casing, VESA, base bracket included, 7*24h	27" 4K, DP, HDMI input, audio input, build-in speaker, view angle 178°/178°, plastic casing, VESA, 7*24h	31.5" 1080P, HDMI/DVI/VGA/BNC input, BNC output, build-in speaker, USB, view angle:178°/178°, plastic casing, VESA, 7*24h
7x24H	yes	yes	yes	yes
Size	21.5"	23.8"	27"	31.5"
Resolution	1080P	1080P	4K	1080P
OC Type	VA	VA	IPS	VA
Max Refresh Rate (HZ)	75	75	60	60
Visual Angle	178°/178°	178°/178°	178°/178°	178°/178°
Response Time (ms)	6.5	6.5	6.5	8
Brightness (nits)	250	250	300	350
Interface	HDMI, VGA, USB, Audio in	HDMI, VGA, BNC, USB	HDMI*2, DP, audio out	HDMI, VGA, BNC in, BNC out, DVI, USB, RS232 in, RS232 out
Speaker	YES	YES	NO	YES

# Product Showcase

4K Monitor

Model	DS-D5043F3-1V0	DS-D5043U3-1V0	DS-D5050U3-1V0	DS-D5055U3-1V0	DS-D5065UC-C
Image					
Product Descriptions	43" 1080P, HDMI/VGA input, USB, Build in speaker, view angle:178°/178°, 300cd/m², plastic casing, VESA, base bracket included	43" 4K, HDMI*3 USB2.0, build-in speaker, view angle 178°/178°, plastic casing, VESA	50" 4K, HDMI*1, VGA*1, USB*1, build-in speaker, view angle 178°/178°, plastic casing, VESA	55" 4K, HDMI*3 build-in speaker, view angle 178°/178°, plastic casing, VESA	65" 4K, HDMI*2, VGA*1, USB*1, Audio in, build-in speaker, view angle 178°/178°, plastic casing, VESA, 7*24h
7x24H	no	no	no	no	yes
Size	43"	43"	50"	55"	65"
Resolution	1080P	4K	4K	4K	4K
OC Type	VA	VA	VA	VA	IPS
Max Refresh Rate (HZ)	60	60	60	60	60
Visual Angle	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
Response Time (ms)	6.5	6.5	6.5	6.5	8
Brightness (nits)	300	300	300	300	350
Interface	HDMI, VGA, USB	HDMI, VGA, Audio in	HDMI, VGA, USB	HDMI	HDMI, VGA, USB, Audio in, RS232 in
Speaker	YES	YES	YES	YES	YES

Wall mount

Model	DS-DM1940W	DS-DM4255W
Image		
Product Descriptions	<p>Wall-mounted bracket, Dimension 250 mm × 220 mm × 25mm, VESA 200 (H) mm × 200 (V) mm, recommended for small size monitor (≤40-inch)</p>	<p>Wall-mounted bracket, Dimension 450 mm × 420 mm × 25mm, VESA 400 (H) mm × 400 (V) mm, recommended for larger size monitor (&gt;40-inch)</p>



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



**Hik-Partner Pro**  
Scan and download  
the app

**HIKVISION**<sup>®</sup>