

14"

STAINLESS STEEL

HIGH VELOCITY FAN



STANDARD

YM - YOKE MOUNT

ADDITIONAL MOUNTING OPTIONS:



CW Column-Wall
55 lbs (w/ fan)



PS Portable Stroller
78 lbs (w/ fan)

SHIPPING WEIGHT:

SIZE	CFM	HP	FAN DIMENSIONS			AIR THROW DISTANCE	SHIPPING WEIGHT
			W	D	ID		
14"	2600	1/4	20"	16"	14.625"	60'	42 lbs

FEATURES

Propeller: 14" Diameter, 3 Blade Stainless Steel, 37°
Fan Inlet/Outlet: #304 Polished Stainless Steel Hull
Finger Guards: OSHA Compliant, Stainless Steel Spiral
Power Cord (115V Only): 12' Length
RPM: 1725
Decibels: 66.5 @ 20' - 73.9 @ 3'
Coverage: 1800 ft²

Warranty: 2 Years

MOTOR

VOLTAGE	MOTOR AMPS	RUNNING AMPS
115V/208-230V*	2.8/1.4	2.8/1.4
208-230/460V	1.5-1.4/.75	1.4/.70
277V	1.1	1.1


Enclosure: TEAO Standard

Frame: 48

Ambient Temperature: 104°F

Duty Cycle: Continuous

*standard

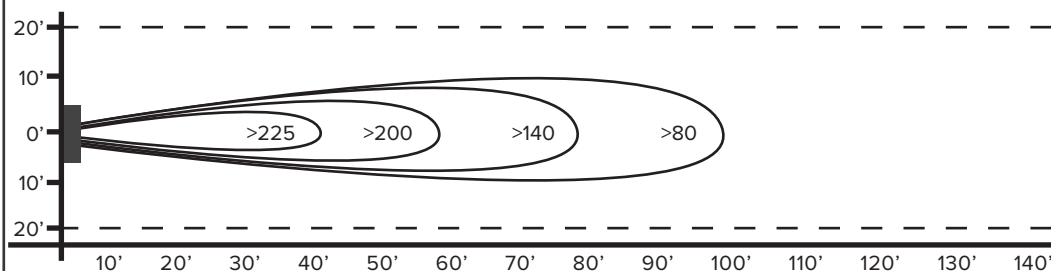

Above velocities shown in feet/minute.

AIR FLOW PATTERN

18"

STAINLESS STEEL

HIGH VELOCITY FAN



STANDARD

YM - YOKE MOUNT

ADDITIONAL MOUNTING OPTIONS:



CW Column-Wall
69 lbs (w/ fan)



PS Portable Stroller
92 lbs (w/ fan)

SHIPPING WEIGHT:

SIZE	CFM	HP	FAN DIMENSIONS			AIR THROW DISTANCE	SHIPPING WEIGHT
			W	D	ID		
18"	3800	1/2	24"	16"	19.125"	80'	56 lbs

FEATURES

Propeller: 17" Diameter, 3 Blade Stainless Steel, 33°
Fan Inlet/Outlet: #304 Polished Stainless Steel Hull
Finger Guards: OSHA Compliant, Stainless Steel Spiral
Power Cord (115V Only): 12' Length
RPM: 1725
Decibels: 71.2 @ 20' - 77.9 @ 3'
Coverage: 2700 ft²

Warranty: 2 Years

MOTOR

VOLTAGE	MOTOR AMPS	RUNNING AMPS
115V/208-230V*	6.0/3.0-2.9	5.9/2.9-2.8
208-230/460V	2.11-1.91/.96	2.0-1.8/.9
277V	1.85	1.75


Enclosure: TEAO Standard

Frame: 56

Ambient Temperature: 104°F

Duty Cycle: Continuous

*standard

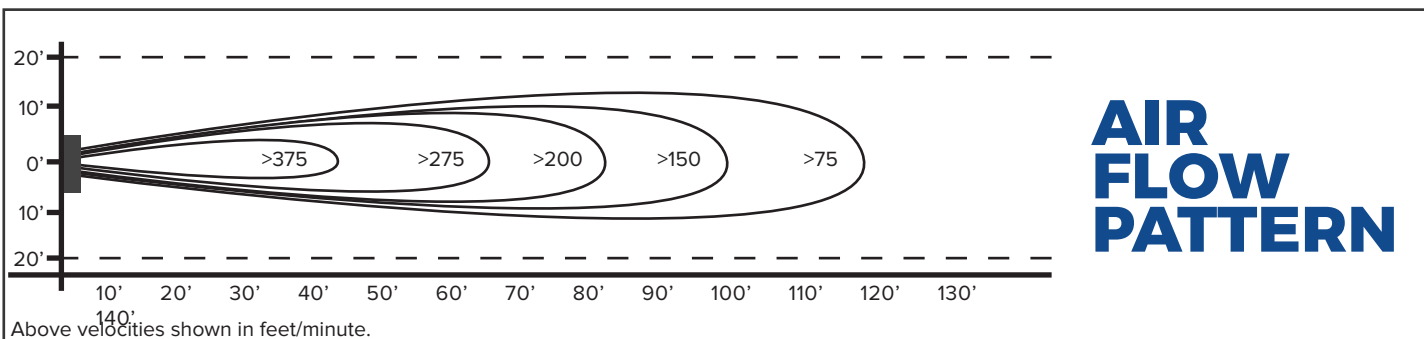

22"

STAINLESS STEEL

HIGH VELOCITY FAN



STANDARD

YM - YOKE MOUNT

ADDITIONAL MOUNTING OPTIONS:



CW Column-Wall
82 lbs (w/ fan)



PS Portable Stroller
105 lbs (w/ fan)

SHIPPING WEIGHT:

SIZE	CFM	HP	FAN DIMENSIONS			AIR THROW DISTANCE	SHIPPING WEIGHT
			W	D	ID		
22"	5570	1/2	29"	16"	22.5"	100'	69 lbs

FEATURES

Propeller: 21" Diameter, 3 Blade Stainless Steel, 19°
Fan Inlet/Outlet: #304 Polished Stainless Steel Hull
Finger Guards: OSHA Compliant, Stainless Steel Spiral
Power Cord (115V Only): 12' Length
RPM: 1725
Decibels: 73.6 @ 20' - 81.2 @ 3'
Coverage: 3600 ft²


Warranty: 2 Years

MOTOR

VOLTAGE	MOTOR AMPS	RUNNING AMPS
115V/208-230V*	6.0/3.0-2.9	5.9/2.9-2.8
208-230/460V	2.4-2.3/1.2	2.3-2.2/1.1
277V	1.85	1.75

Enclosure: TEAO Standard
Frame: 56
Ambient Temperature: 104°F
Duty Cycle: Continuous

*standard

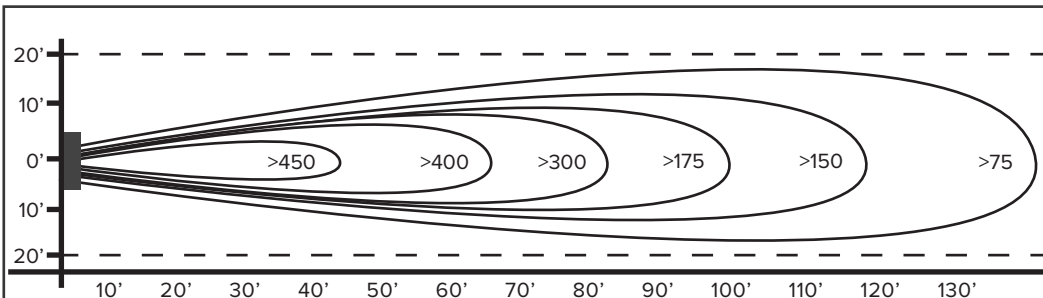


Above velocities shown in feet/minute.

AIR FLOW PATTERN

26"

STAINLESS STEEL

HIGH VELOCITY FAN

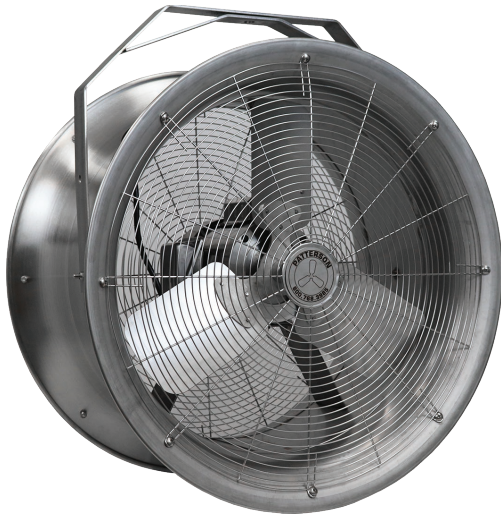STANDARD
YM - YOKE MOUNT

ADDITIONAL MOUNTING OPTIONS:



CW Column-Wall

113 lbs (w/ fan)



PS Portable Stroller

129 lbs (w/ fan)

SHIPPING WEIGHT:

SIZE	CFM	HP	FAN DIMENSIONS			AIR THROW DISTANCE	SHIPPING WEIGHT
			W	D	ID		
26"	7650	1	33"	18.5"	27"	150'	93 lbs

FEATURES


Propeller: 26" Diameter, 3 Blade Stainless Steel, 18°
Fan Inlet/Outlet: #304 Polished Stainless Steel Hull
Finger Guards: OSHA Compliant, Stainless Steel Spiral
Power Cord (115V Only): 12' Length
RPM: 1800*/1200
Decibels: 80.8 @ 20' - 85.2 @ 3' (1800)
 75.7 @ 20' - 81.3 @ 3' (1200)
Coverage: 6100 ft²
Warranty: 2 Years

MOTOR

VOLTAGE	MOTOR AMPS	RUNNING AMPS
115V/208-230V	13.4/6.8-6.7	12.9/6.6-6.5
208-230/460V*	3.6-3.5/1.8	3.4-3.3/1.7
277V	5.6	5.4

Enclosure: TEAO Standard
Frame: 56
Ambient Temperature: 104°F
Duty Cycle: Continuous

*standard

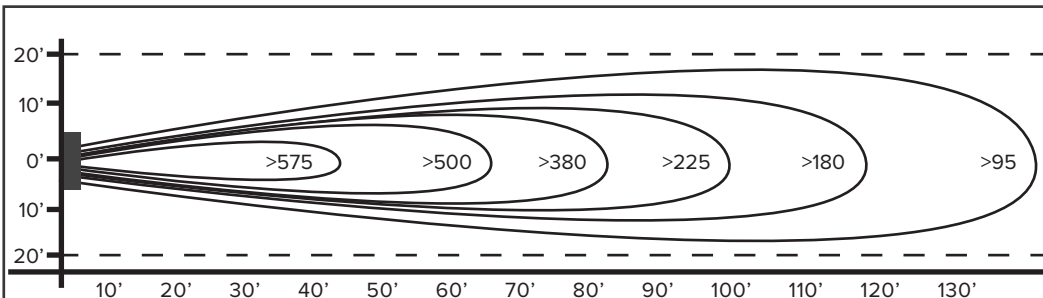

Above velocities shown in feet/minute.

AIR
FLOW
PATTERN

30"

STAINLESS STEEL

HIGH VELOCITY FAN



STANDARD YM - YOKE MOUNT

ADDITIONAL MOUNTING OPTIONS:



CW Column-Wall
145 lbs (w/ fan)



PS Portable Stroller
161 lbs (w/ fan)

SHIPPING WEIGHT:

SIZE	CFM	HP	FAN DIMENSIONS			AIR THROW DISTANCE	SHIPPING WEIGHT
			W	D	ID		
30"	12,000	1	37"	22"	30.875"	200'	99 lbs

FEATURES

Propeller: 30" Diameter, 2 Blade GalvAlum, 15°
Fan Inlet/Outlet: #304 Polished Stainless Steel Hull
Finger Guards: OSHA Compliant, Stainless Steel Spiral
Power Cord (115V Only): 12' Length
RPM: 1800*/1200
Decibels: 82.2 @ 20' - 85.5 @ 3' (1800)
Coverage: 12,000 ft²

Warranty: 2 Years

MOTOR

VOLTAGE	MOTOR AMPS	RUNNING AMPS
115V/208-230V	13.4/6.8-6.7	12.9/6.6-6.5
208-230/460V*	3.6-3.5/1.8	3.4-3.3/1.7
277V	5.6	5.4


Enclosure: TEAO Standard

Frame: 56

Ambient Temperature: 104°F

Duty Cycle: Continuous

*standard

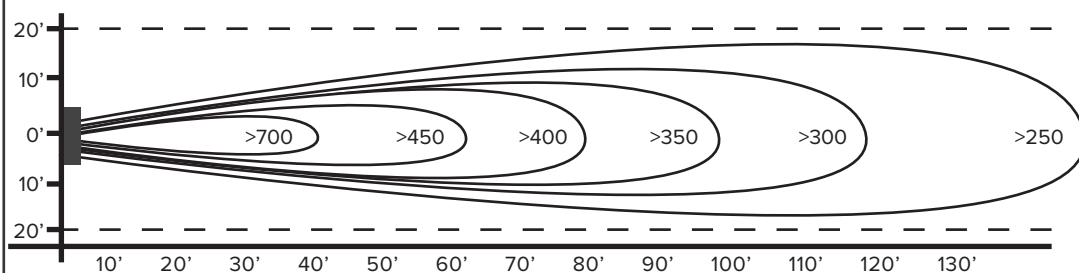

Above velocities shown in feet/minute.

AIR FLOW PATTERN

