

# **WHEELERFIT**

## **Silicone Hoses Catalog**



# SILICONE HOSES THAT WORK AS HARD AS YOU

Our high-performance silicone hoses are built to exceed OE standards, delivering exceptional durability and reliability in the harshest conditions.



## 6-Ply Reinforced Aramid Fabric:

Provides superior strength and durability, ensuring the hose can withstand extreme temperatures and pressures.



## Chamfered Inner Diameter

All silicone hoses (except stick and bulk hoses) inner diameter is chamfered for ease of installation.



### High-Performance Silicone Rubber:

Offers exceptional resistance to heat, cold, and chemicals, maintaining flexibility and performance in harsh environments.



### Broad Temperature Range:

Operates flawlessly from -65°F to 500°F, accommodating a wide range of operating conditions.




### Increased Wall Thickness:

The 0.260" wall thickness, compared to the OEM's 0.190", provides enhanced durability and resistance to wear and tear.

**WHEELERFIT**

**WHEELERFIT**

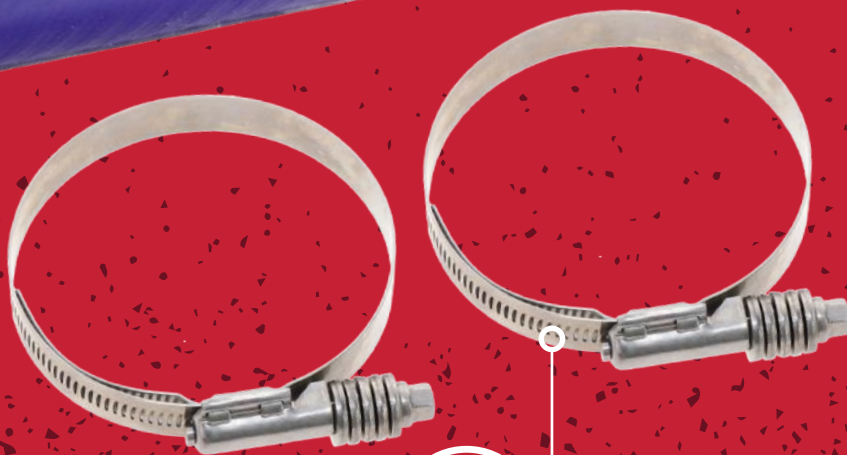

### Constant-Torque Heavy-Duty Clamps:

Secure and reliable clamping ensures a leak-proof and long-lasting connection.



## COOLANT HOSES FOR AUTOCAR APPLICATIONS

### 1105-0024



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** A2040215-002

### 1105-0026



Chamfered inner diameter

Temp range -65° F to 500° F


#### Additional Information

**Hose Dia.** 2 1/4" I.D. & 2-3/4" O.D. / 2 1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** A2040174-002

### 1105-0073



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 1" I.D. & 1-3/8" O.D. / 1" I.D. & 1-3/8" O.D.

**Clamp P/N(s)** 1107-200CT (2ea)

**Reference #** 5258625, 20423-3208

### 1105-0074



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 1" I.D. & 1-3/8" O.D. / 1" I.D. & 1-3/8" O.D.

**Clamp P/N(s)** 1107-200CT (2ea)

**Reference #** 5258626

### 1105-0080



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-3/8" I.D. & 2-7/8" O.D. / 2-1/8" I.D. & 2-5/8" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 3926502

### 1105-0082



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 1-1/4" I.D. & 1-3/4" O.D. / 1-1/4" I.D. & 1-3/4" O.D.

**Clamp P/N(s)** 1107-200CT (2ea)

**Reference #** 3086018

## COOLANT HOSES FOR AUTOCAR APPLICATIONS

### 1105-0111



Chamfered inner diameter Temp range -65° F to 500° F

#### Additional Information

|                     |                                                                           |
|---------------------|---------------------------------------------------------------------------|
| <b>Hose Dia.</b>    | 3" I.D. & 3-1/2" O.D. / 2-1/4" I.D. & 2-3/4" O.D. / 1" I.D. & 1-1/2" O.D. |
| <b>Clamp P/N(s)</b> | 1107-200CT (1ea), 1107-300CT (1ea) & 1107-400CT (1ea)                     |
| <b>Reference #</b>  | A2040189-001                                                              |

### 1105-0112



Chamfered inner diameter Temp range -65° F to 500° F

#### Additional Information

|                     |                                                       |
|---------------------|-------------------------------------------------------|
| <b>Hose Dia.</b>    | 2-3/8" I.D. & 2-7/8" O.D. / 1-7/8" I.D. & 2-3/8" O.D. |
| <b>Clamp P/N(s)</b> | 1107-250CT (1ea) & 1107-300CT (1ea)                   |
| <b>Reference #</b>  | 3924701                                               |

### 1105-0116



Chamfered inner diameter Temp range -65° F to 500° F

#### Additional Information

|                     |                                               |
|---------------------|-----------------------------------------------|
| <b>Hose Dia.</b>    | 3" I.D. & 3-1/2" O.D. / 3" I.D. & 3-1/2" O.D. |
| <b>Clamp P/N(s)</b> | 1107-400CT (2ea)                              |
| <b>Reference #</b>  | 3081842                                       |

### 1105-0122



Chamfered inner diameter Temp range -65° F to 500° F

#### Additional Information

|                     |                                                       |
|---------------------|-------------------------------------------------------|
| <b>Hose Dia.</b>    | 2-1/4" I.D. & 2-3/4" O.D. / 2-1/4" I.D. & 2-3/4" O.D. |
| <b>Clamp P/N(s)</b> | 1107-300CT (2ea)                                      |
| <b>Reference #</b>  | 20423-0001                                            |

### 1105-0123



Chamfered inner diameter Temp range -65° F to 500° F

#### Additional Information

|                     |                                               |
|---------------------|-----------------------------------------------|
| <b>Hose Dia.</b>    | 3" I.D. & 3-1/2" O.D. / 3" I.D. & 3-1/2" O.D. |
| <b>Clamp P/N(s)</b> | 1107-400CT (2ea)                              |
| <b>Reference #</b>  | 20423-0010                                    |

### 1105-0130




Chamfered inner diameter Temp range -65° F to 500° F

#### Additional Information

|                     |                                                   |
|---------------------|---------------------------------------------------|
| <b>Hose Dia.</b>    | 2-1/2" I.D. & 3" O.D. / 2-1/4" I.D. & 2-3/4" O.D. |
| <b>Clamp P/N(s)</b> | 1107-300CT (1ea) & 1107-350CT (1ea)               |
| <b>Reference #</b>  | A2040172-001                                      |

## COOLANT HOSES FOR AUTOCAR APPLICATIONS

### 1105-0131

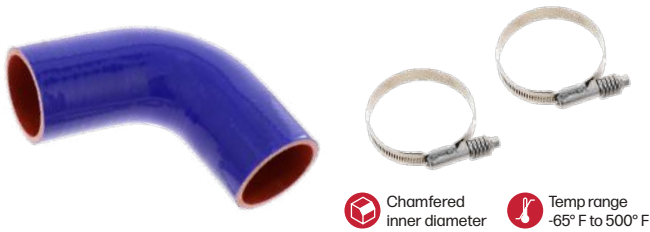

Chamfered  
inner diameter



Temp range  
-65° F to 500° F

#### Additional Information

**Hose Dia.** 2-3/4" I.D. & 3-1/4" O.D. / 2-3/4" I.D. & 3-1/4" O.D.

**Clamp P/N(s)** 1107-350CT (2ea)

**Reference #** A2040183-001

### 1105-0137



Chamfered  
inner diameter



Temp range  
-65° F to 500° F

#### Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 20423-0048

### 1105-0142



Chamfered  
inner diameter



Temp range  
-65° F to 500° F

#### Additional Information

**Hose Dia.** 2-1/2" I.D. & 3" O.D. / 2-1/2" I.D. & 3" O.D.

**Clamp P/N(s)** 1107-350CT (1ea) & 1107-400CT (1ea)

**Reference #** 20422-0010

### 1105-0172



Chamfered  
inner diameter



Temp range  
-65° F to 500° F

#### Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** A2040215-003

## COOLANT HOSES FOR MACK APPLICATIONS

### 1105-0001



Chamfered  
inner diameter



Temp range  
-65° F to 500° F

#### Additional Information

**Hose Dia.** 2-3/8" I.D. & 2-7/8" O.D. / 2" I.D. & 2-1/2" O.D.

**Clamp P/N(s)** 1107-250CT (1ea) & 1107-300CT (1ea)

**Reference #** 23092728

### 1105-0002



Chamfered  
inner diameter



Temp range  
-65° F to 500° F

#### Additional Information

**Hose Dia.** 2-3/8" I.D. & 2-7/8" O.D. / 2" I.D. & 2-1/2" O.D.

**Clamp P/N(s)** 1107-250CT (1ea) & 1107-300CT (1ea)

**Reference #** 23091779

## COOLANT HOSES FOR MACK APPLICATIONS

## 1105-0003

Chamfered  
inner diameterTemp range  
-65° F to 500° F

## Additional Information

**Hose Dia.** 2-5/16" I.D. & 2-13/16" O.D. / 2" I.D. & 2-1/2" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 23092708

## 1105-0004

Chamfered  
inner diameterTemp range  
-65° F to 500° F

## Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2" I.D. & 2-1/2" O.D.

**Clamp P/N(s)** 1107-250CT (1ea) & 1107-300CT (1ea)

**Reference #** 22891976

## 1105-0005

Chamfered  
inner diameterTemp range  
-65° F to 500° F

## Additional Information

**Hose Dia.** 2-3/8" I.D. & 2-7/8" O.D. / 2" I.D. & 2-1/2" O.D.

**Clamp P/N(s)** 1107-250CT (1ea) & 1107-300CT (1ea)

**Reference #** 22882161

## 1105-0006

Chamfered  
inner diameterTemp range  
-65° F to 500° F

## Additional Information

**Hose Dia.** 2-3/8" I.D. & 2-7/8" O.D. / 2-3/8" I.D. & 2-7/8" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 22891994

## 1105-0007

Chamfered  
inner diameterTemp range  
-65° F to 500° F

## Additional Information

**Hose Dia.** 2-3/8" I.D. & 2-7/8" O.D. / 2" I.D. & 2-1/2" O.D.

**Clamp P/N(s)** 1107-250CT (1ea) & 1107-350CT (1ea)

**Reference #** 23092712

## 1105-0008

Chamfered  
inner diameterTemp range  
-65° F to 500° F

## Additional Information

**Hose Dia.** 2" I.D. & 2-1/2" O.D. / 2" I.D. & 2-1/2" O.D.

**Clamp P/N(s)** 1107-250CT (2ea)

**Reference #** 23092698

## COOLANT HOSES FOR MACK APPLICATIONS

### 1105-0031



#### Additional Information

**Hose Dia.** 1-7/8" I.D. & 2-3/8" O.D. / 1-7/8" I.D. & 2-3/8" O.D.

**Clamp P/N(s)** 1107-250CT (2ea)

**Reference #** 22927017

### 1105-0049



#### Additional Information

**Hose Dia.** 2-1/2" I.D. & 2-7/8" O.D. / 2-1/2" I.D. & 2-7/8" O.D. / 1-5/8" I.D. & 2-1/16" O.D.

**Clamp P/N(s)** 1107-250CT (2ea) & 1107-300CT (1ea)

**Reference #** 21037646

### 1105-0081



#### Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 1-7/8" I.D. & 2-3/8" O.D.

**Clamp P/N(s)** 1107-250CT (1ea) & 1107-300CT (1ea)

**Reference #** 22891552

### 1105-0084



#### Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2" I.D. & 2-1/2" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 23092692

### 1105-0087



#### Additional Information

**Hose Dia.** 2-1/2" I.D. & 2-15/16" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 22891914

### 1105-0088



#### Additional Information

**Hose Dia.** 2-3/8" I.D. & 2-13/16" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 22891918



## COOLANT HOSES FOR MACK APPLICATIONS

### 1105-0089



Chamfered  
inner diameter



Temp range  
-65° F to 500° F




#### Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 1-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 22891972

### 1105-0090



Chamfered  
inner diameter



Temp range  
-65° F to 500° F



#### Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2" I.D. & 2-1/2" O.D.

**Clamp P/N(s)** 1107-250CT (1ea), & 1107-300CT (1ea)

**Reference #** 23092706

### 1105-0091



Chamfered  
inner diameter



Temp range  
-65° F to 500° F




#### Additional Information

**Hose Dia.** 2-1/2" I.D. & 2-15/16" O.D. / 2-1/2" I.D. & 2-15/16" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 11MF3722M, 20774755

### 1105-0092



Chamfered  
inner diameter



Temp range  
-65° F to 500° F




#### Additional Information

**Hose Dia.** 2" I.D. & 2-7/16" O.D. / 2" I.D. & 2-7/16" O.D.

**Clamp P/N(s)** 1107-250CT (2ea)

**Reference #** 11MF3574M22, 25002928, 11MF3592M22, 25157594

### 1105-0093



Chamfered  
inner diameter



Temp range  
-65° F to 500° F





#### Additional Information

**Hose Dia.** 1-1/2" I.D. & 2-1/16" O.D. / 2-5/8" I.D. & 3-1/8" O.D.  
/ 2-5/8" I.D. & 3-1/8" O.D.

**Clamp P/N(s)** 1107-250CT (1ea) & 1107-350CT (2ea)

**Reference #** 744GB53, 25501933

### 1105-0095



Chamfered  
inner diameter



#### Additional Information

**Hose Dia.** 2-1/2" I.D. & 3" O.D. / 2-1/2" I.D. & 3" O.D.

**Clamp P/N(s)** 1107-350CT (2ea)

**Reference #** 22891938

## COOLANT HOSES FOR MACK APPLICATIONS

### 1105-0097



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 1-7/8" I.D. & 2-3/8" O.D. / 1-7/8" I.D. & 2-3/8" O.D.

**Clamp P/N(s)** 1107-250CT (2ea)

**Reference #** 22883190

### 1105-0098



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 1-7/16" I.D. & 1-15/16" O.D. / 1-7/16" I.D. & 1-15/16" O.D.

**Clamp P/N(s)** 1107-250CT (2ea)

**Reference #** 22891936

### 1105-0099



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 1-7/16" I.D. & 1-15/16" O.D. / 1-7/16" I.D. & 1-15/16" O.D.

**Clamp P/N(s)** 1107-250CT (2ea)

**Reference #** 22891952

### 1105-0100



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 1-7/16" I.D. & 1-15/16" O.D. / 1-7/16" I.D. & 1-15/16" O.D.

**Clamp P/N(s)** 1107-250CT (2ea)

**Reference #** 22891964

### 1105-0113



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-3/8" I.D. & 2-7/8" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 21558449

### 1105-0114



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information


**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2" I.D. & 2-1/2" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 22883161

## COOLANT HOSES FOR MACK APPLICATIONS

### 1105-0115



Chamfered  
inner diameter



Temp range  
-65° F to 500° F



#### Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2" I.D. & 2-1/2" O.D.


**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 22891924

### 1105-0117



Chamfered  
inner diameter



Temp range  
-65° F to 500° F



#### Additional Information

**Hose Dia.** 1-7/16" I.D. & 1-15/16" O.D. / 1-7/16" I.D. & 1-15/16" O.D.

**Clamp P/N(s)** 1107-250CT (2ea)

**Reference #** 22891962

### 1105-0118



Chamfered  
inner diameter



Temp range  
-65° F to 500° F




#### Additional Information

**Hose Dia.** 1-7/16" I.D. & 1-15/16" O.D. / 1-7/16" I.D. & 1-15/16" O.D.


**Clamp P/N(s)** 1107-250CT (2ea)

**Reference #** 22891966

### 1105-0119



Chamfered  
inner diameter



Temp range  
-65° F to 500° F



#### Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 22891472

### 1105-0120



Chamfered  
inner diameter



Temp range  
-65° F to 500° F



#### Additional Information

**Hose Dia.** 2-1/2" I.D. & 3" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (1ea) & 1107-350CT (1ea)

**Reference #** 22018486

### 1105-0121



Chamfered  
inner diameter



Temp range  
-65° F to 500° F



#### Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 1-7/8" I.D. & 2-3/8" O.D.

**Clamp P/N(s)** 1107-250CT (1ea) & 1107-300CT (1ea)

**Reference #** 22891538

## COOLANT HOSES FOR MACK APPLICATIONS

### 1105-0127



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-3/8" I.D. & 2-7/8" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 22891916

### 1105-0128



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 22891910

### 1105-0129



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-3/8" I.D. & 2-7/8" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 22892008

### 1105-0132



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-3/8" I.D. & 2-7/8" O.D. / 2-1/8" I.D. & 2-5/8" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 21811514

### 1105-0133



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-1/8" I.D. & 2-5/8" O.D. / 1-7/8" I.D. & 2-3/8" O.D.

**Clamp P/N(s)** 1107-250CT (1ea) & 1107-300CT (1ea)

**Reference #** 23278165

### 1105-0134



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2" I.D. & 2-1/2" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 23091914



## COOLANT HOSES FOR MACK APPLICATIONS

## 1105-0135



## Additional Information

**Hose Dia.** 2-1/2" I.D. & 3" O.D. / 2-1/2" I.D. & 3" O.D.

**Clamp P/N(s)** 1107-350CT (2ea)

**Reference #** 21627621

## 1105-0136



## Additional Information

**Hose Dia.** 2-1/2" I.D. & 3" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (1ea) & 1107-350CT (1ea)

**Reference #** 22906820

## 1105-0147



## Additional Information

**Hose Dia.** 2" I.D. & 2-1/2" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-250CT (1ea) & 1107-300CT (1ea)

**Reference #** 22891996

## 1105-0148




## Additional Information

**Hose Dia.** 1-1/2" I.D. & 2" O.D. / 1-1/2" I.D. & 2" O.D.

**Clamp P/N(s)** 1107-250CT (2ea)

**Reference #** 20938279

## 1105-0150

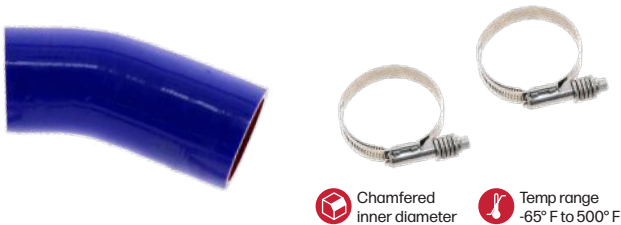

## Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 21064147

## 1105-0151



## Additional Information


**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2-1/2" I.D. & 3" O.D.

**Clamp P/N(s)** 1107-300CT (1ea) & 1107-350CT (1ea)

**Reference #** 22891904

## COOLANT HOSES FOR MACK APPLICATIONS

### 1105-0152



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 1-1/2" I.D. & 2" O.D. / 1-1/2" I.D. & 2" O.D.

**Clamp P/N(s)** 1107-250CT (2ea)

**Reference #** 22891900

### 1105-0153



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 1" I.D. & 1-1/2" O.D. / 1" I.D. & 1-1/2" O.D.

**Clamp P/N(s)** 1107-200CT (2ea)

**Reference #** 22868676

### 1105-0154



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-1/2" I.D. & 3" O.D. / 2-1/2" I.D. & 3" O.D.

**Clamp P/N(s)** 1107-350CT (2ea)

**Reference #** 20828539

### 1105-0155



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-1/2" I.D. & 3" O.D. / 2-1/2" I.D. & 3" O.D.

**Clamp P/N(s)** 1107-350CT (2ea)

**Reference #** 25195052

### 1105-0156



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2" I.D. & 2-1/2" O.D. / 2-3/8" I.D. & 2-7/8" O.D.

**Clamp P/N(s)** 1107-250CT (1ea) & 1107-300CT (1ea)

**Reference #** 22892913

### 1105-0157



Chamfered inner diameter

Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-1/2" I.D. & 3" O.D. / 2-1/2" I.D. & 3" O.D.

**Clamp P/N(s)** 1107-350CT (2ea)

**Reference #** 25162440

## COOLANT HOSES FOR MACK APPLICATIONS

### 1105-0158



Chamfered inner diameter Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 11/16" I.D. & 1-3/16" O.D. / 11/16" I.D. & 1-3/16" O.D.

**Clamp P/N(s)** 1107-9412CT (2ea)

**Reference #** 82745186

### 1105-0160



Chamfered inner diameter Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 1-1/2" I.D. & 2" O.D. / 1-1/2" I.D. & 2" O.D.

**Clamp P/N(s)** 1107-250CT (2ea)

**Reference #** 22891894

### 1105-0163



Chamfered inner diameter Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-1/4" I.D. & 2-3/4" O.D. / 2-1/4" I.D. & 2-3/4" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 21000705

### 1105-0169



Chamfered inner diameter Temp range -65° F to 500° F

#### Additional Information

**Hose Dia.** 2-1/2" I.D. & 3" O.D. / 2-1/2" I.D. & 3" O.D.

**Clamp P/N(s)** 1107-350CT (2ea)

**Reference #** 25176140

### 1105-0186



Chamfered inner diameter Temp range -65° F to 500° F


#### Additional Information

**Hose Dia.** 2-3/8" I.D. & 2-7/8" O.D. / 2-1/4" I.D. & 2-13/16" O.D.

**Clamp P/N(s)** 1107-300CT (2ea)

**Reference #** 23278115

### 1105-0187

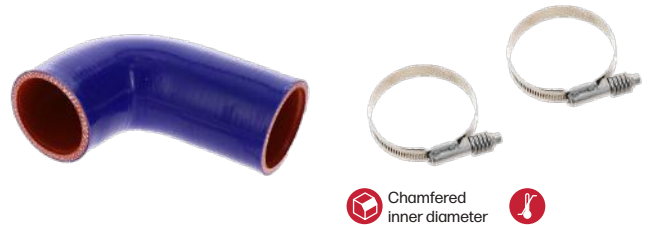

Chamfered inner diameter Temp range -65° F to 500° F

#### Additional Information


**Hose Dia.** 2-9/16" I.D. & 3-1/16" O.D. / 2-9/16" I.D. & 3-1/16" O.D.

**Clamp P/N(s)** 1107-350CT (2ea)

**Reference #** 22891974

## COOLANT HOSES KITS FOR MACK APPLICATIONS

### 1 105-0009




#### Additional Information

**Hose P/N(s)** 1105-0001, 1105-0003, 1105-0005, 1105-0006

**Clamp P/N(s)** 1107-250CT (2ea), 1107-300CT & (6ea)

### 1 105-0010





#### Additional Information

**Hose P/N(s)** 1105-0002, 1105-0004, 1105-0007, 1105-0008

**Clamp P/N(s)** 1107-250CT (5ea), 1107-300CT & (2ea), 1107-350CT (1ea)

### 1 105-0029





#### Additional Information

**Hose P/N(s)** 1105-0002, 1105-0004, 1105-0005, 1105-0006

**Clamp P/N(s)** 1107-250CT (3ea), 1107-300CT & (5ea)

### 1 105-0032



#### Additional Information

**Hose P/N(s)** 1105-0001, 1105-0003, 1105-0004, 1105-0005, 1105-0006, 1105-0008

**Clamp P/N(s)** 1107-250CT (5ea), & 1107-300CT (7ea)

## COOLANT HOSES FOR PETERBILT APPLICATIONS

## 1105-0078

Chamfered  
inner diameterTemp range  
-65° F to 500° F

## Additional Information

**Hose Dia.** 2-1/2" I.D. & 2-15/16" O.D. / 2-1/2" I.D. & 2-15/16" O.D.**Clamp P/N(s)** 1107-300CT (2ea)**Reference #** F50-1548

## 1105-0149

Chamfered  
inner diameterTemp range  
-65° F to 500° F

## Additional Information

**Hose Dia.** 2-1/2" I.D. & 3" O.D. / 2-1/2" I.D. & 3" O.D.**Clamp P/N(s)** 1107-350CT (2ea)**Reference #** N/A

## 1105-0159

Chamfered  
inner diameterTemp range  
-65° F to 500° F

## Additional Information

**Hose Dia.** 2-1/2" I.D. & 3" O.D. / 2-1/2" I.D. & 3" O.D.**Clamp P/N(s)** 1107-350CT (2ea)**Reference #** F50-6392

## 1105-0188

Chamfered  
inner diameterTemp range  
-65° F to 500° F

## Additional Information

**Hose Dia.** 1" I.D. & 1-7/16" O.D. / 1" I.D. & 1-7/16" O.D.**Clamp P/N(s)** 1107-200CT (2ea)**Reference #** F50-1050-0700

## 1105-0189

Chamfered  
inner diameterTemp range  
-65° F to 500° F

## Additional Information

**Hose Dia.** 2-1/2" I.D. & 3" O.D. / 2-1/2" I.D. & 3" O.D.**Clamp P/N(s)** 1107-350CT (2ea)**Reference #** F50-6230-001


## 1105-0190

Chamfered  
inner diameterTemp range  
-65° F to 500° F

## Additional Information

**Hose Dia.** 2-1/2" I.D. & 3-1/16" O.D. / 2-1/2" I.D. & 3-1/16" O.D.**Clamp P/N(s)** 1107-350CT (2ea)**Reference #** F50-6427

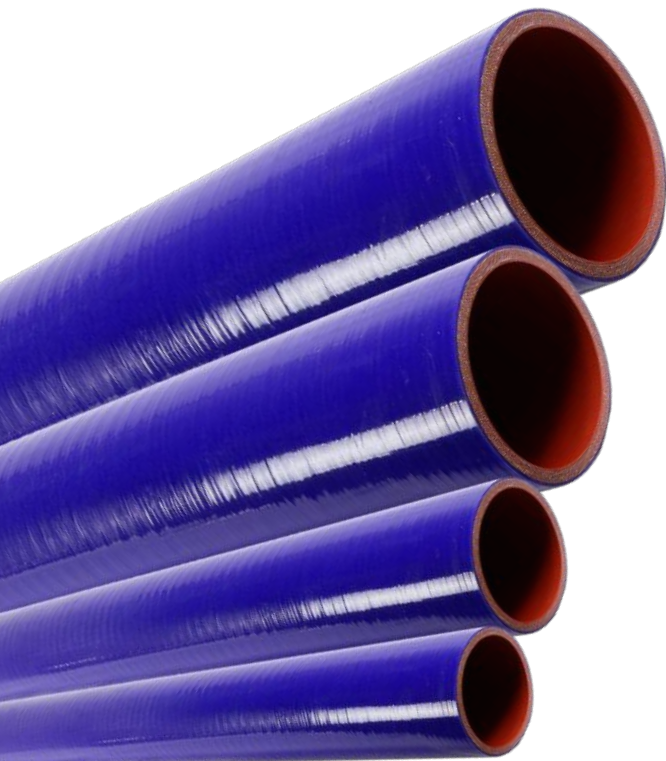

**STICK COOLANT HOSES**


- Can be cut to custom lengths
- 10 Constant-Torque Heavy-Duty clamps included

| Hose P/N(s) | Hose Dia.                | Length | PLY #       | Clamp P/N(s)      |
|-------------|--------------------------|--------|-------------|-------------------|
| 1105-0055   | 1" I.D. & 1-7/16" O.D    | 36     | 5-PLY NOMEX | 1107-200CT (10ea) |
| 1105-0056   | 1-1/4" I.D. & 1-3/4" O.D | 36     | 5-PLY NOMEX | 1107-200CT (10ea) |
| 1105-0057   | 1-3/8" I.D. & 1-7/8" O.D | 36     | 5-PLY NOMEX | 1107-200CT (10ea) |
| 1105-0058   | 1-1/2" I.D. & 2" O.D     | 36     | 5-PLY NOMEX | 1107-250CT (10ea) |
| 1105-0059   | 1-5/8" I.D. & 2" O.D     | 36     | 5-PLY NOMEX | 1107-250CT (10ea) |
| 1105-0060   | 1-3/4" I.D. & 2-1/4" O.D | 36     | 5-PLY NOMEX | 1107-250CT (10ea) |
| 1105-0061   | 1-7/8" I.D. & 2-3/8" O.D | 36     | 5-PLY NOMEX | 1107-250CT (10ea) |
| 1105-0012   | 2" I.D. & 2-1/2" O.D     | 36     | 4-PLY NOMEX | 1107-250CT (10ea) |
| 1105-0062   | 2-1/4" I.D. & 2-3/4" O.D | 36     | 5-PLY NOMEX | 1107-300CT (10ea) |
| 1105-0013   | 2-3/8" I.D. & 2-7/8" O.D | 36     | 5-PLY NOMEX | 1107-300CT (10ea) |
| 1105-0030   | 2-1/2" I.D. & 3" O.D.    | 36     | 5-PLY NOMEX | 1107-350CT (10ea) |
| 1105-0063   | 2-5/8" I.D. & 3-1/8" O.D | 36     | 6-PLY NOMEX | 1107-350CT (10ea) |
| 1105-0064   | 2-3/4" I.D. & 3-1/4" O.D | 36     | 5-PLY NOMEX | 1107-350CT (10ea) |
| 1105-0065   | 2-7/8" I.D. & 3-1/8" O.D | 36     | 5-PLY NOMEX | 1107-350CT (10ea) |
| 1105-0066   | 3" I.D. & 3-1/2" O.D     | 36     | 5-PLY NOMEX | 1107-400CT (10ea) |

**Bulk Hoses**


- Can be cut to custom lengths
- 1-PLY Nomex Construction

| Hose P/N(s) | Hose Dia. | Length | Thickness |
|-------------|-----------|--------|-----------|
| 1105-0167   | 1/4"      | 25'    | 5 mm      |
| 1105-0180   | 1/4"      | 100'   | 5 mm      |
| 1105-0067   | 3/8"      | 25'    | 5 mm      |
| 1105-0181   | 3/8"      | 100'   | 5 mm      |
| 1105-0126   | 1/2"      | 25'    | 5 mm      |
| 1105-0182   | 1/2"      | 100'   | 5 mm      |
| 1105-0096   | 5/8"      | 25'    | 5 mm      |
| 1105-0184   | 5/8"      | 100'   | 5 mm      |
| 1105-0025   | 3/4"      | 25'    | 5 mm      |
| 1105-0183   | 3/4"      | 100'   | 5 mm      |
| 1105-0047   | 1"        | 25'    | 5 mm      |
| 1105-0185   | 1"        | 100'   | 5 mm      |

## Individual Hose Clamps

## 1107-9412CT



## Additional Information

|                    |                                 |
|--------------------|---------------------------------|
| <b>Clamp Range</b> | 17 mm - 32 mm / 11/16" - 1-1/4" |
| <b>SAE Size</b>    | 12                              |

## 1107-200CT



## Additional Information

|                    |                                 |
|--------------------|---------------------------------|
| <b>Clamp Range</b> | 32 mm - 54 mm / 1-1/4" - 2-1/8" |
| <b>SAE Size</b>    | 121                             |

## 1107-250CT



## Additional Information

|                    |                                 |
|--------------------|---------------------------------|
| <b>Clamp Range</b> | 45 mm - 67 mm / 1-3/4" - 2-5/8" |
| <b>SAE Size</b>    | 262                             |

## 1107-300CT



## Additional Information

|                    |                                 |
|--------------------|---------------------------------|
| <b>Clamp Range</b> | 57 mm - 79 mm / 2-1/4" - 3-1/8" |
| <b>SAE Size</b>    | 312                             |

## 1107-350CT



## Additional Information

|                    |                                 |
|--------------------|---------------------------------|
| <b>Clamp Range</b> | 70 mm - 92 mm / 2-3/4" - 3-5/8" |
| <b>SAE Size</b>    | 362                             |

## 1107-400CT



## Additional Information

|                    |                                  |
|--------------------|----------------------------------|
| <b>Clamp Range</b> | 83 mm - 105 mm - 3-1/4" - 4-1/8" |
| <b>SAE Size</b>    | 412                              |



## **Pennsylvania**

866.439.2329

[info@wheelerfleet.com](mailto:info@wheelerfleet.com)

**[wheelerfleet.com](http://wheelerfleet.com)**

## **Texas**

800.786.2035

[customercare@wheelerfleet.com](mailto:customercare@wheelerfleet.com)