

2024

ILTI LUCE

ILTI LUCE

INDOOR

LINEAR


PENDANT

ZIRKOL




p.14

ZIRKOL CUSTOM




p.60

SLACKLINE



p.70

MINIFLUX LINEA



p.74


WALL CEILING

ZIRKOL CEILING




p.24

ZIRKOL CIRCLE WALL



p.26

ZIRKOL LINEAR CEILING



p.54

ZIRKOL LINEAR WALL



p.55

MINIFLUX LINEA WALL



p.77

CEILING RECESSED

SLACKLINE



p.72



FLOOR

GAMMA






p.68

SPOTLIGHT

CEILING	ELBA CEILING	CAPRI CEILING	FLEX	SALINA CEILING	
					
	p.82	p.84	p.102	p.107	
RECESSED	ALICUDI	SALINA	LIPARI	LUX INDOOR	PATTERN
					
	p.105	p.106	p.108	p.110	p.112
	CUCÙ	POP UP	HEY!		
					
	p.116	p.117	p.118		
FLOOR / TABLE	PLINT				
					
	p.100				

TRACK


TRACK 48V	GRAVITY SPOT	GRAVITY UGR	GRAVITY DASH	GRAVITY TUBE	GRAVITY SPHERE
					
	p.92	p.93	p.93	p.94	p.94
TRACK 230V	ZIRKOL TRACK	ELBA	CAPRI	CAPRI PRO	FANTE
					
	p.58	p.82	p.83	p.85	p.81

OUTDOOR

LINEAR

WALL CEILING RECESSED

MINIFLUX



p.119

RIGA



p.125

WALKLINE FAÇADE



p.130

SLACKLINE IP67



p.131

FLOOR RECESSED

WALKLINE



p.129

GROUND

MINIFLUX GARDEN



p.124

SPOTLIGHT

RECESSED	LUX RECESSED	LUX CEILING		
				
	p.136	p.139		
GROUND	LUX GARDEN			
				
	p.145			
CEILING	LUX SURFACE			
				
	p.143			
FLOOR	LUX SPOT			
				
	p.134			
WALL	LUX W-S	LUX W-D	LUX WALKWAY	WALKBY
				
	p.143	p.144	p.146	p.147



ZIRKOL



reddot winner 2020
lighting design

ZIRKOL

Shapes

dimensions in cm	85	100	150	200	
------------------	----	-----	-----	-----	--

ZIRKOL **CIRCLE**
p.14-26 / 34-37



ZIRKOL **GAP**
p.27-29





ZIRKOL **ROUND**
p.30-32 / 38-39



ZIRKOL **SIDE**
p.33



	300	500
--	-----	-----

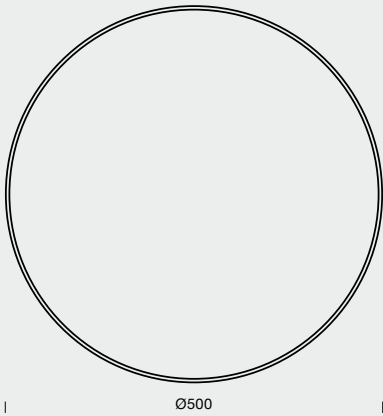


dimensions in cm	100	150	200	250	
------------------	-----	-----	-----	-----	--


ZIRKOL **SQUARE-S**
p.40-41




ZIRKOL **SQUARE-Q**
p.42-46

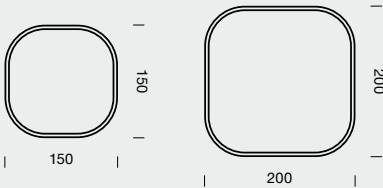

ZIRKOL **OVAL**
p.47-51


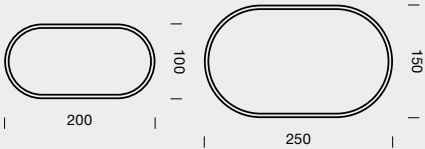


ZIRKOL **LINEAR**
p.52-59



ZIRKOL


	300	350	400
--	-----	-----	-----

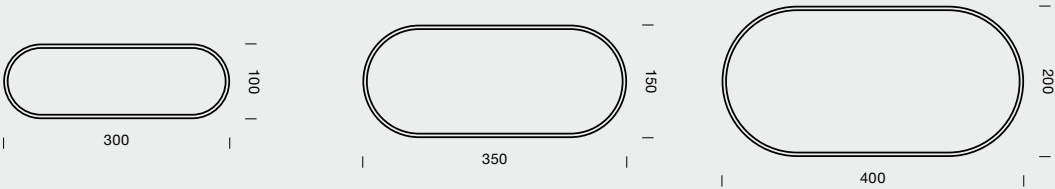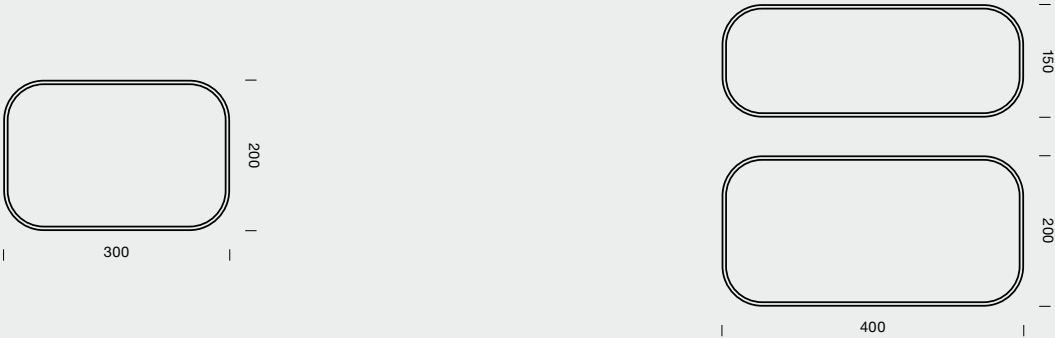


ZIRKOL TECHNICAL INFO

Standard


EMISSION




Diffused Downlight



Diffused Downlight + Uplight




UGR




UGR + Uplight


CCT



2700K




3000K



4000K


CONTROL SYSTEMS



ON/OFF




TRIAC



1-10V




CASAMBI



DALI

Custom Features

LIGHT CONFIGURATIONS



Tunable white




RGB



RGBW

SEPARATE LIGHT CONTROL

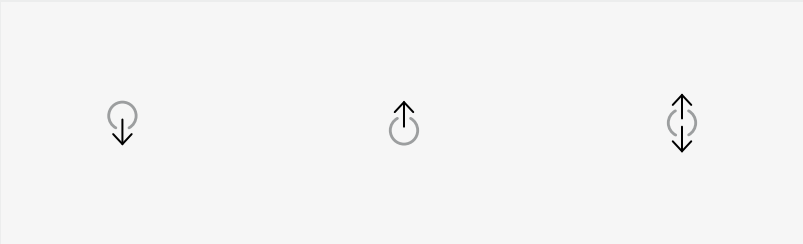


Direct


Indirect

Direct-Indirect


CONTROL SYSTEMS




DMX/RDM



EMERGENCY KIT




remote driver installation



downlight/up-downlight

- power input
- metal cable



aluminium structure profile

ZIRKOL HOME - CIRCLE 0,85m | TRIAC

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	35W	LED strip	24V	2000lm	90	TRIAC	BZRC2708G15DBO	white	○	1.009,00
2700K	35W	LED strip	24V	2000lm	90	TRIAC	BZRC2708G15DNE	black	●	1.009,00
2700K	35W	LED strip	24V	2000lm	90	TRIAC	BZRC2708G15DOR	gold	●	1.113,00
3000K	35W	LED strip	24V	2200lm	90	TRIAC	BZRC2708G15WBO	white	○	1.009,00
3000K	35W	LED strip	24V	2200lm	90	TRIAC	BZRC2708G15WNE	black	●	1.009,00
3000K	35W	LED strip	24V	2200lm	90	TRIAC	BZRC2708G15WOR	gold	●	1.113,00
4000K	35W	LED strip	24V	2360lm	90	TRIAC	BZRC2708G15NBO	white	○	1.009,00
4000K	35W	LED strip	24V	2360lm	90	TRIAC	BZRC2708G15NNE	black	●	1.009,00
4000K	35W	LED strip	24V	2360lm	90	TRIAC	BZRC2708G15NOR	gold	●	1.113,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	round canopy with 1 x driver 75W (110/240V) 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included									
customizations	optional accessories on p.67 custom features on p.13									

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	70W	LED strip	24V	4000lm	90	TRIAC	BZRC2808G15DBO	white	○	1.228,00
2700K	70W	LED strip	24V	4000lm	90	TRIAC	BZRC2808G15DNE	black	●	1.228,00
2700K	70W	LED strip	24V	4000lm	90	TRIAC	BZRC2808G15DOR	gold	●	1.425,00
3000K	70W	LED strip	24V	4400lm	90	TRIAC	BZRC2808G15WBO	white	○	1.228,00
3000K	70W	LED strip	24V	4400lm	90	TRIAC	BZRC2808G15WNE	black	●	1.228,00
3000K	70W	LED strip	24V	4400lm	90	TRIAC	BZRC2808G15WOR	gold	●	1.425,00
4000K	70W	LED strip	24V	4720lm	90	TRIAC	BZRC2808G15NBO	white	○	1.228,00
4000K	70W	LED strip	24V	4720lm	90	TRIAC	BZRC2808G15NNE	black	●	1.228,00
4000K	70W	LED strip	24V	4720lm	90	TRIAC	BZRC2808G15NOR	gold	●	1.425,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	round canopy with 1 x driver 75W (110/240V) 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included									
customizations	optional accessories on p.67 custom features on p.13									

CE UK CA IP40

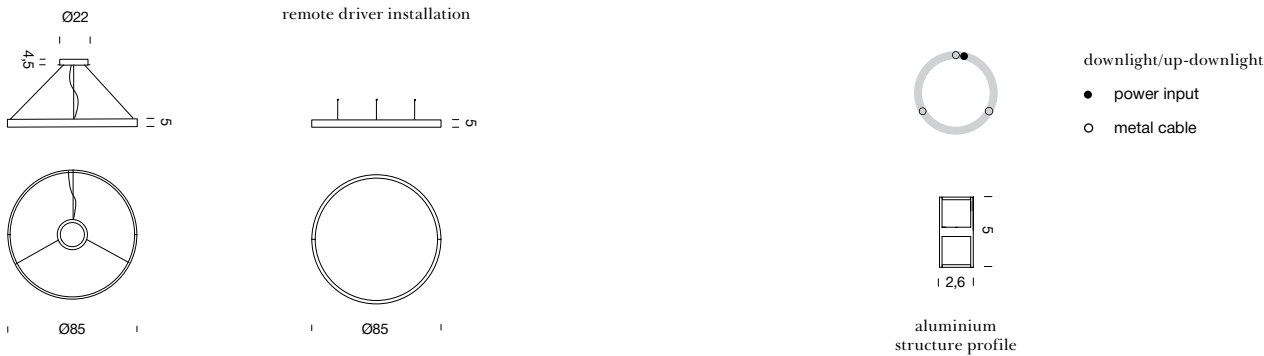

ZIRKOL HOME - CIRCLE 0,85m | CASAMBI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	35W	LED strip	24V	2000lm	90	CASAMBI	BZRC3308G15DBO	white	1.436,00
2700K	35W	LED strip	24V	2000lm	90	CASAMBI	BZRC3308G15DNE	black	1.436,00
2700K	35W	LED strip	24V	2000lm	90	CASAMBI	BZRC3308G15DOR	gold	1.602,00
3000K	35W	LED strip	24V	2200lm	90	CASAMBI	BZRC3308G15WBO	white	1.436,00
3000K	35W	LED strip	24V	2200lm	90	CASAMBI	BZRC3308G15WNE	black	1.436,00
3000K	35W	LED strip	24V	2200lm	90	CASAMBI	BZRC3308G15WOR	gold	1.602,00
4000K	35W	LED strip	24V	2360lm	90	CASAMBI	BZRC3308G15NBO	white	1.436,00
4000K	35W	LED strip	24V	2360lm	90	CASAMBI	BZRC3308G15NNE	black	1.436,00
4000K	35W	LED strip	24V	2360lm	90	CASAMBI	BZRC3308G15NOR	gold	1.602,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer CASAMBI 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.67 custom features on p.13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	70W	LED strip	24V	4000lm	90	CASAMBI	BZRC3408G15DBO	white	1.581,00
2700K	70W	LED strip	24V	4000lm	90	CASAMBI	BZRC3408G15DNE	black	1.581,00
2700K	70W	LED strip	24V	4000lm	90	CASAMBI	BZRC3408G15DOR	gold	1.748,00
3000K	70W	LED strip	24V	4400lm	90	CASAMBI	BZRC3408G15WBO	white	1.581,00
3000K	70W	LED strip	24V	4400lm	90	CASAMBI	BZRC3408G15WNE	black	1.581,00
3000K	70W	LED strip	24V	4400lm	90	CASAMBI	BZRC3408G15WOR	gold	1.748,00
4000K	70W	LED strip	24V	4720lm	90	CASAMBI	BZRC3408G15NBO	white	1.581,00
4000K	70W	LED strip	24V	4720lm	90	CASAMBI	BZRC3408G15NNE	black	1.581,00
4000K	70W	LED strip	24V	4720lm	90	CASAMBI	BZRC3408G15NOR	gold	1.748,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer CASAMBI 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.67 custom features on p.13								

CE UK CA IP40

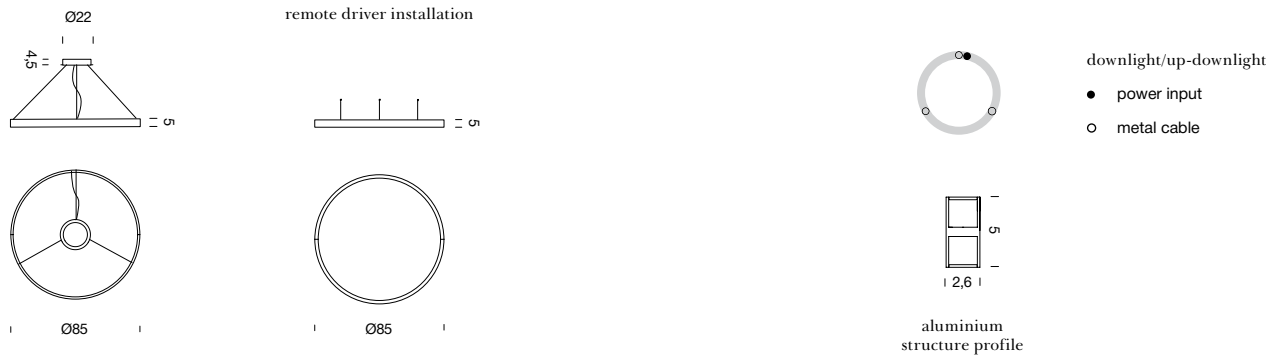

ZIRKOL HOME - CIRCLE 0,85m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	35W	LED strip	24V	2000lm	90	DALI	BZRC1608G15DBO	white ○	1.020,00
2700K	35W	LED strip	24V	2000lm	90	DALI	BZRC1608G15DNE	black ●	1.020,00
2700K	35W	LED strip	24V	2000lm	90	DALI	BZRC1608G15DOR	gold ●	1.124,00
3000K	35W	LED strip	24V	2200lm	90	DALI	BZRC1608G15WBO	white ○	1.020,00
3000K	35W	LED strip	24V	2200lm	90	DALI	BZRC1608G15WNE	black ●	1.020,00
3000K	35W	LED strip	24V	2200lm	90	DALI	BZRC1608G15WOR	gold ●	1.124,00
4000K	35W	LED strip	24V	2360lm	90	DALI	BZRC1608G15NBO	white ○	1.020,00
4000K	35W	LED strip	24V	2360lm	90	DALI	BZRC1608G15NNE	black ●	1.020,00
4000K	35W	LED strip	24V	2360lm	90	DALI	BZRC1608G15NOR	gold ●	1.124,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.67 custom features on p.13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	70W	LED strip	24V	4000lm	90	DALI	BZRC1708G15DBO	white ○	1.243,00
2700K	70W	LED strip	24V	4000lm	90	DALI	BZRC1708G15DNE	black ●	1.243,00
2700K	70W	LED strip	24V	4000lm	90	DALI	BZRC1708G15DOR	gold ●	1.436,00
3000K	70W	LED strip	24V	4400lm	90	DALI	BZRC1708G15WBO	white ○	1.243,00
3000K	70W	LED strip	24V	4400lm	90	DALI	BZRC1708G15WNE	black ●	1.243,00
3000K	70W	LED strip	24V	4400lm	90	DALI	BZRC1708G15WOR	gold ●	1.436,00
4000K	70W	LED strip	24V	4720lm	90	DALI	BZRC1708G15NBO	white ○	1.243,00
4000K	70W	LED strip	24V	4720lm	90	DALI	BZRC1708G15NNE	black ●	1.243,00
4000K	70W	LED strip	24V	4720lm	90	DALI	BZRC1708G15NOR	gold ●	1.436,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.67 custom features on p.13								

CE UK CA IP40

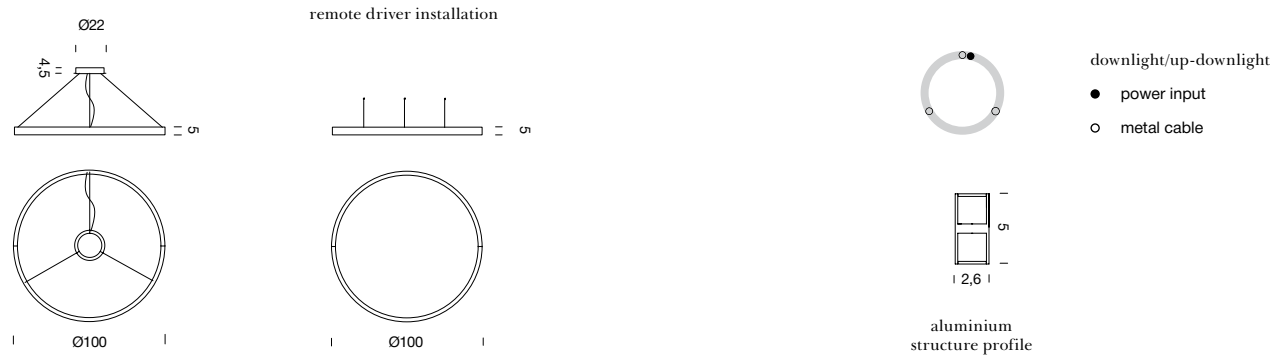

ZIRKOL HOME - CIRCLE 1m | TRIAC

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	45W	LED strip	24V	2616lm	90	TRIAC	BZRC2710G15DBO	white	1.113,00
2700K	45W	LED strip	24V	2616lm	90	TRIAC	BZRC2710G15DNE	black	1.113,00
2700K	45W	LED strip	24V	2616lm	90	TRIAC	BZRC2710G15DOR	gold	1.228,00
3000K	45W	LED strip	24V	2769lm	90	TRIAC	BZRC2710G15WBO	white	1.113,00
3000K	45W	LED strip	24V	2769lm	90	TRIAC	BZRC2710G15WNE	black	1.113,00
3000K	45W	LED strip	24V	2769lm	90	TRIAC	BZRC2710G15WOR	gold	1.228,00
4000K	45W	LED strip	24V	3077lm	90	TRIAC	BZRC2710G15NBO	white	1.113,00
4000K	45W	LED strip	24V	3077lm	90	TRIAC	BZRC2710G15NNE	black	1.113,00
4000K	45W	LED strip	24V	3077lm	90	TRIAC	BZRC2710G15NOR	gold	1.228,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.67 custom features on p.13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	90W	LED strip	24V	5231lm	90	TRIAC	BZRC2810G15DBO	white	1.332,00
2700K	90W	LED strip	24V	5231lm	90	TRIAC	BZRC2810G15DNE	black	1.332,00
2700K	90W	LED strip	24V	5231lm	90	TRIAC	BZRC2810G15DOR	gold	1.508,00
3000K	90W	LED strip	24V	5539lm	90	TRIAC	BZRC2810G15WBO	white	1.332,00
3000K	90W	LED strip	24V	5539lm	90	TRIAC	BZRC2810G15WNE	black	1.332,00
3000K	90W	LED strip	24V	5539lm	90	TRIAC	BZRC2810G15WOR	gold	1.508,00
4000K	90W	LED strip	24V	6154lm	90	TRIAC	BZRC2810G15NBO	white	1.332,00
4000K	90W	LED strip	24V	6154lm	90	TRIAC	BZRC2810G15NNE	black	1.332,00
4000K	90W	LED strip	24V	6154lm	90	TRIAC	BZRC2810G15NOR	gold	1.508,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 96W (110/240V) 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.67 custom features on p.13								

CE UK CA IP40

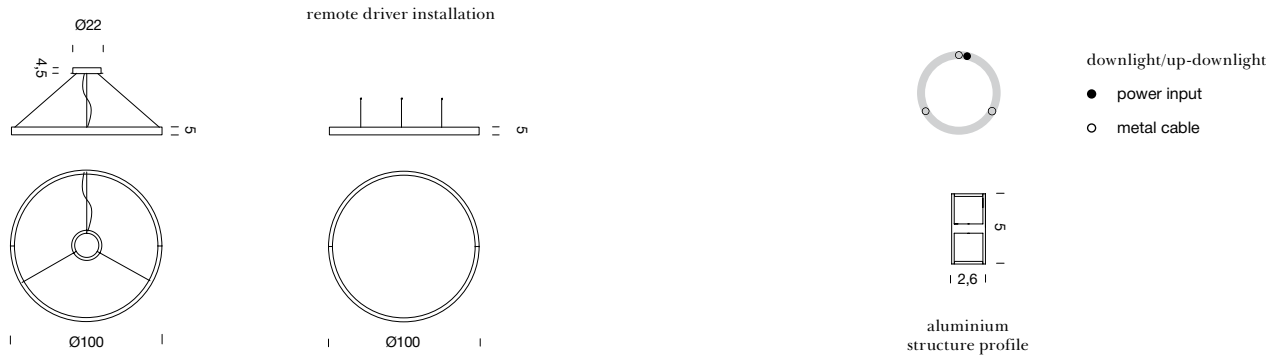

ZIRKOL HOME - CIRCLE 1m | CASAMBI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	45W	LED strip	24V	2616lm	90	CASAMBI	BZRC3310G15DBO	white	1.467,00
2700K	45W	LED strip	24V	2616lm	90	CASAMBI	BZRC3310G15DNE	black	1.467,00
2700K	45W	LED strip	24V	2616lm	90	CASAMBI	BZRC3310G15DOR	gold	1.633,00
3000K	45W	LED strip	24V	2769lm	90	CASAMBI	BZRC3310G15WBO	white	1.467,00
3000K	45W	LED strip	24V	2769lm	90	CASAMBI	BZRC3310G15WNE	black	1.467,00
3000K	45W	LED strip	24V	2769lm	90	CASAMBI	BZRC3310G15WOR	gold	1.633,00
4000K	45W	LED strip	24V	3077lm	90	CASAMBI	BZRC3310G15NBO	white	1.467,00
4000K	45W	LED strip	24V	3077lm	90	CASAMBI	BZRC3310G15NNE	black	1.467,00
4000K	45W	LED strip	24V	3077lm	90	CASAMBI	BZRC3310G15NOR	gold	1.633,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer CASAMBI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.67 custom features on p.13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	90W	LED strip	24V	5231lm	90	CASAMBI	BZRC3410G15DBO	white	1.638,00
2700K	90W	LED strip	24V	5231lm	90	CASAMBI	BZRC3410G15DNE	black	1.638,00
2700K	90W	LED strip	24V	5231lm	90	CASAMBI	BZRC3410G15DOR	gold	1.810,00
3000K	90W	LED strip	24V	5539lm	90	CASAMBI	BZRC3410G15WBO	white	1.638,00
3000K	90W	LED strip	24V	5539lm	90	CASAMBI	BZRC3410G15WNE	black	1.638,00
3000K	90W	LED strip	24V	5539lm	90	CASAMBI	BZRC3410G15WOR	gold	1.810,00
4000K	90W	LED strip	24V	6154lm	90	CASAMBI	BZRC3410G15NBO	white	1.638,00
4000K	90W	LED strip	24V	6154lm	90	CASAMBI	BZRC3410G15NNE	black	1.638,00
4000K	90W	LED strip	24V	6154lm	90	CASAMBI	BZRC3410G15NOR	gold	1.810,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 100W (110-240V) 1 x dimmer CASAMBI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.67 custom features on p.13								

CE UK CA IP40

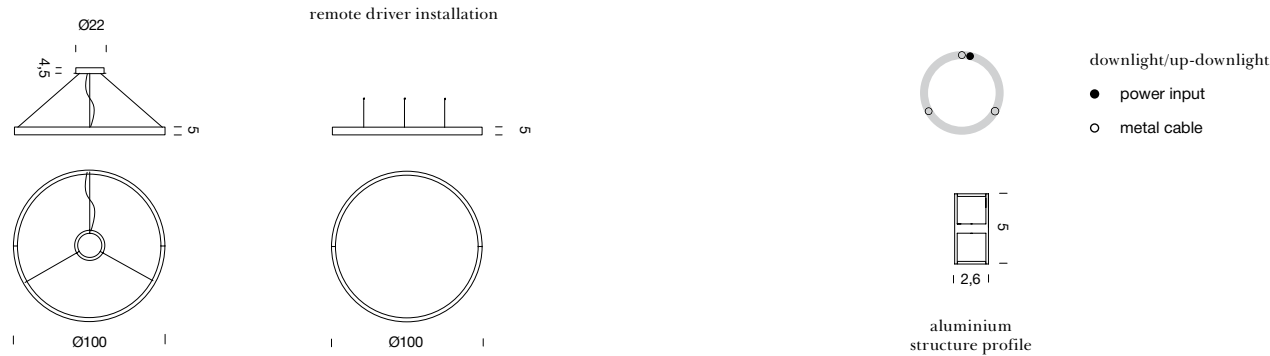

ZIRKOL HOME - CIRCLE 1m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRC1610G15DBO	white	○	1124,00
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRC1610G15DNE	black	●	1124,00
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRC1610G15DOR	gold	●	1238,00
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRC1610G15WBO	white	○	1124,00
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRC1610G15WNE	black	●	1124,00
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRC1610G15WOR	gold	●	1238,00
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRC1610G15NBO	white	○	1124,00
4000K	45W	LED strip	24V	3077lm	90	DALIX	BZRC1610G15NNE	black	●	1124,00
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRC1610G15NOR	gold	●	1238,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	optional accessories on p.67 custom features on p.13									

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	90W	LED strip	24V	5231lm	90	DALI	BZRC1710G15DBO	white	○	1.347,00
2700K	90W	LED strip	24V	5231lm	90	DALI	BZRC1710G15DNE	black	●	1.347,00
2700K	90W	LED strip	24V	5231lm	90	DALI	BZRC1710G15DOR	gold	●	1.519,00
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRC1710G15WBO	white	○	1.347,00
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRC1710G15WNE	black	●	1.347,00
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRC1710G15WOR	gold	●	1.519,00
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRC1710G15NBO	white	○	1.347,00
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRC1710G15NNE	black	●	1.347,00
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRC1710G15NOR	gold	●	1.519,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	round canopy with 1 x driver 100W (110-240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	optional accessories on p.67 custom features on p.13									

CE UK CA IP40

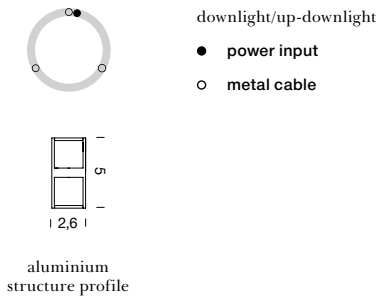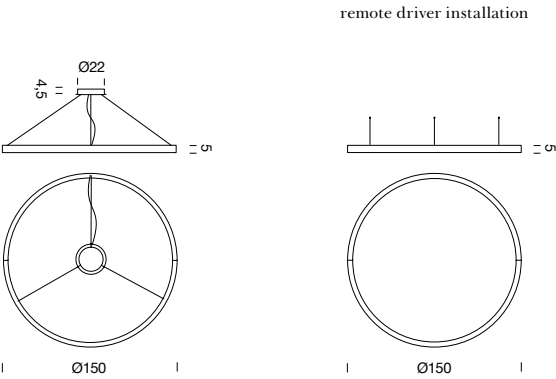

ZIRKOL HOME - CIRCLE 1,5m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRC1615G15DBO	white ○	1.436,00
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRC1615G15DNE	black ●	1.436,00
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRC1615G15DOR	gold ●	1.581,00
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRC1615G15WBO	white ○	1.436,00
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRC1615G15WNE	black ●	1.436,00
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRC1615G15WOR	gold ●	1.581,00
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRC1615G15NBO	white ○	1.436,00
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRC1615G15NNE	black ●	1.436,00
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRC1615G15NOR	gold ●	1.581,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/24V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.67 custom features on p.13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	136W	LED strip	24V	7847lm	90	DALI	BZRC1715G15DBO	white ○	1.742,00
2700K	136W	LED strip	24V	7847lm	90	DALI	BZRC1715G15DNE	black ●	1.742,00
2700K	136W	LED strip	24V	7847lm	90	DALI	BZRC1715G15DOR	gold ●	1.914,00
3000K	136W	LED strip	24V	8308lm	90	DALI	BZRC1715G15WBO	white ○	1.742,00
3000K	136W	LED strip	24V	8308lm	90	DALI	BZRC1715G15WNE	black ●	1.742,00
3000K	136W	LED strip	24V	8308lm	90	DALI	BZRC1715G15WOR	gold ●	1.914,00
4000K	136W	LED strip	24V	9232lm	90	DALI	BZRC1715G15NBO	white ○	1.742,00
4000K	136W	LED strip	24V	9232lm	90	DALI	BZRC1715G15NNE	black ●	1.742,00
4000K	136W	LED strip	24V	9232lm	90	DALI	BZRC1715G15NOR	gold ●	1.914,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.67 custom features on p.13								

CE UK CA IP40

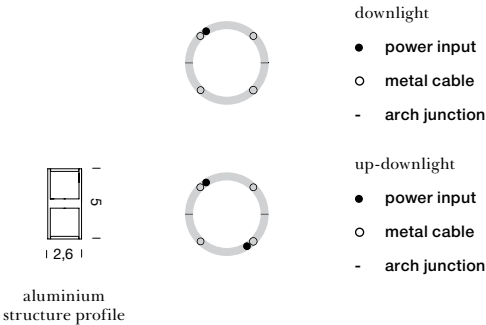

ZIRKOL CIRCLE 2m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	90W	LED strip	24V	5260lm	90	DALI	BZRC1620G15DBO	white	○	2.132,00
2700K	90W	LED strip	24V	5260lm	90	DALI	BZRC1620G15DNE	black	●	2.132,00
2700K	90W	LED strip	24V	5260lm	90	DALI	BZRC1620G15DOR	gold	●	2.351,00
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRC1620G15WBO	white	○	2.132,00
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRC1620G15WNE	black	●	2.132,00
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRC1620G15WOR	gold	●	2.351,00
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRC1620G15NBO	white	○	2.132,00
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRC1620G15NNE	black	●	2.132,00
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRC1620G15NOR	gold	●	2.351,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces									
included	1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (ceiling attachment included)									
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)									
customizations	find customizable features on p.13									

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	180W	LED strip	24V	10500lm	90	DALI	BZRC1720G15DBO	white	○	2.975,00
2700K	180W	LED strip	24V	10500lm	90	DALI	BZRC1720G15DNE	black	●	2.975,00
2700K	180W	LED strip	24V	10500lm	90	DALI	BZRC1720G15DOR	gold	●	3.318,00
3000K	180W	LED strip	24V	11078lm	90	DALI	BZRC1720G15WBO	white	○	2.975,00
3000K	180W	LED strip	24V	11078lm	90	DALI	BZRC1720G15WNE	black	●	2.975,00
3000K	180W	LED strip	24V	11078lm	90	DALI	BZRC1720G15WOR	gold	●	3.318,00
4000K	180W	LED strip	24V	12309lm	90	DALI	BZRC1720G15NBO	white	○	2.975,00
4000K	180W	LED strip	24V	12309lm	90	DALI	BZRC1720G15NNE	black	●	2.975,00
4000K	180W	LED strip	24V	12309lm	90	DALI	BZRC1720G15NOR	gold	●	3.318,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces									
included	1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (ceiling attachment included)									
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)									
customizations	find customizable features on p.13									

CE UK CA IP40

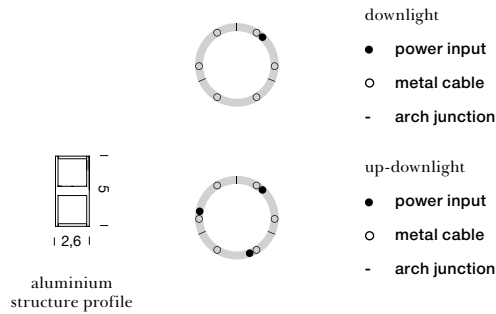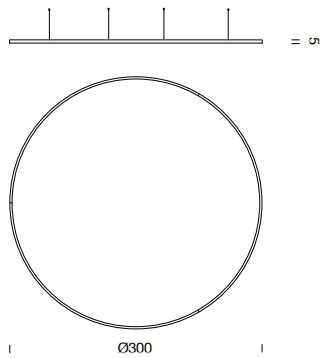

ZIRKOL CIRCLE 3m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	134W	LED strip	24V	7820lm	90	DALI	BZRC1630G15DBO	white	○	3.256,00
2700K	134W	LED strip	24V	7820lm	90	DALI	BZRC1630G15DNE	black	●	3.256,00
2700K	134W	LED strip	24V	7820lm	90	DALI	BZRC1630G15DOR	gold	●	3.588,00
3000K	134W	LED strip	24V	8238lm	90	DALI	BZRC1630G15WBO	white	○	3.256,00
3000K	134W	LED strip	24V	8238lm	90	DALI	BZRC1630G15WNE	black	●	3.256,00
3000K	134W	LED strip	24V	8238lm	90	DALI	BZRC1630G15WOR	gold	●	3.588,00
4000K	134W	LED strip	24V	9153lm	90	DALI	BZRC1630G15NBO	white	○	3.256,00
4000K	134W	LED strip	24V	9153lm	90	DALI	BZRC1630G15NNE	black	●	3.256,00
4000K	134W	LED strip	24V	9153lm	90	DALI	BZRC1630G15NOR	gold	●	3.588,00

note remote driver | RAL 9005 black | RAL 9016 white | shipped in 3 pieces

included 1 x driver 150W (220/240V) | 1 x dimmer DALI | 1 x electrical cable 5m | 6 x adjustable metal cable length 3m (ceiling attachment included)

optional accessory driver box | ceiling plate for remote driver (more specification on p.66-67)

customizations find customizable features on p.13

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	268W	LED strip	24V	15640lm	90	DALI	BZRC1730G15DBO	white	○	4.722,00
2700K	268W	LED strip	24V	15640lm	90	DALI	BZRC1730G15DNE	black	●	4.722,00
2700K	268W	LED strip	24V	15640lm	90	DALI	BZRC1730G15DOR	gold	●	5.232,00
3000K	268W	LED strip	24V	16476lm	90	DALI	BZRC1730G15WBO	white	○	4.722,00
3000K	268W	LED strip	24V	16476lm	90	DALI	BZRC1730G15WNE	black	●	4.722,00
3000K	268W	LED strip	24V	16476lm	90	DALI	BZRC1730G15WOR	gold	●	5.232,00
4000K	268W	LED strip	24V	18306lm	90	DALI	BZRC1730G15NBO	white	○	4.722,00
4000K	268W	LED strip	24V	18306lm	90	DALI	BZRC1730G15NNE	black	●	4.722,00
4000K	268W	LED strip	24V	18306lm	90	DALI	BZRC1730G15NOR	gold	●	5.232,00


note remote driver | RAL 9005 black | RAL 9016 white | shipped in 3 pieces

included 3 x drivers 100 (110/240V) | 3 x dimmer DALI | 3 x electrical cable 5m | 6 x adjustable metal cable length 3m (ceiling attachment included)

optional accessory driver box | ceiling plate for remote driver (more specification on p.66-67)

customizations find customizable features on p.13

CE UK CA IP40

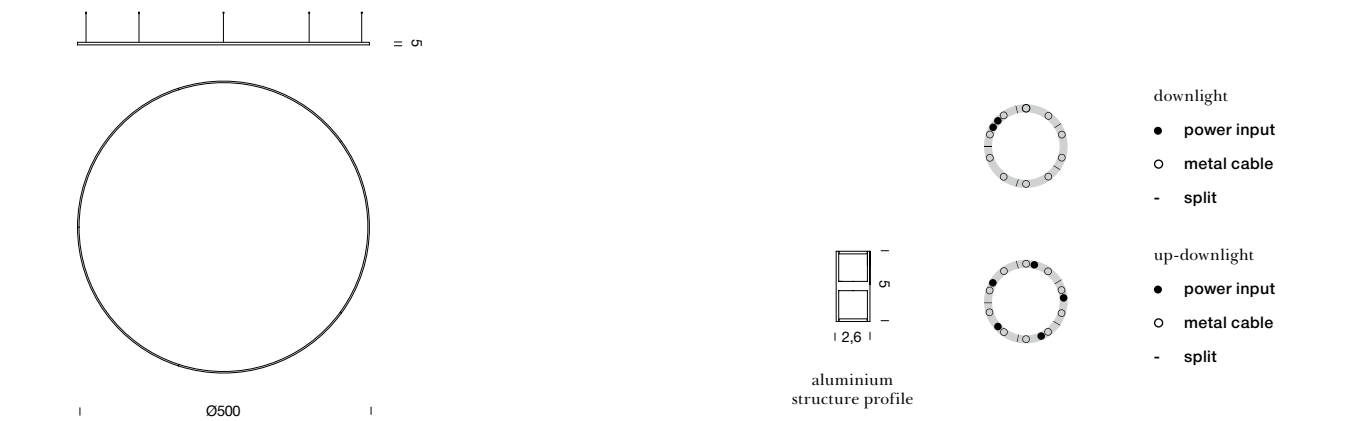

ZIRKOL CIRCLE 5m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	226W	LED strip	24V	13100lm	90	DALI	BZRC1650G15DBO	white ○	7.301,00
2700K	226W	LED strip	24V	13100lm	90	DALI	BZRC1650G15DNE	black ●	7.301,00
2700K	226W	LED strip	24V	13100lm	90	DALI	BZRC1650G15DOR	gold ●	8.164,00
3000K	226W	LED strip	24V	13847lm	90	DALI	BZRC1650G15WBO	white ○	7.301,00
3000K	226W	LED strip	24V	13847lm	90	DALI	BZRC1650G15WNE	black ●	7.301,00
3000K	226W	LED strip	24V	13847lm	90	DALI	BZRC1650G15WOR	gold ●	8.164,00
4000K	226W	LED strip	24V	15386lm	90	DALI	BZRC1650G15NBO	white ○	7.301,00
4000K	226W	LED strip	24V	15386lm	90	DALI	BZRC1650G15NNE	black ●	7.301,00
4000K	226W	LED strip	24V	15386lm	90	DALI	BZRC1650G15NOR	gold ●	8.164,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 5 pieces								
included	1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 10 x adjustable metal cable length 3m (ceiling attachment included)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	452W	LED strip	24V	26100lm	90	DALI	BZRC1750G15DBO	white ○	8.820,00
2700K	452W	LED strip	24V	26100lm	90	DALI	BZRC1750G15DNE	black ●	8.820,00
2700K	452W	LED strip	24V	26100lm	90	DALI	BZRC1750G15DOR	gold ●	9.672,00
3000K	452W	LED strip	24V	27695lm	90	DALI	BZRC1750G15WBO	white ○	8.820,00
3000K	452W	LED strip	24V	27695lm	90	DALI	BZRC1750G15WNE	black ●	8.820,00
3000K	452W	LED strip	24V	27695lm	90	DALI	BZRC1750G15WOR	gold ●	9.672,00
4000K	452W	LED strip	24V	30772lm	90	DALI	BZRC1750G15NBO	white ○	8.820,00
4000K	452W	LED strip	24V	30772lm	90	DALI	BZRC1750G15NNE	black ●	8.820,00
4000K	452W	LED strip	24V	30772lm	90	DALI	BZRC1750G15NOR	gold ●	9.672,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 5 pieces								
included	5 x driver 100W (110/240V) 5 x dimmer DALI 5 x electrical cable 5m 10 x adjustable metal cable 3m (ceiling attachment included)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

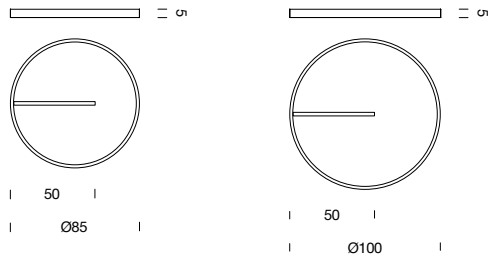

ZIRKOL CEILING 0,85m | DALI



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	35W	LED strip	24V	2000lm	90	DALI	BZRCD408G15DBO	white	○	1.103,00
2700K	35W	LED strip	24V	2000lm	90	DALI	BZRCD408G15DNE	black	●	1.103,00
2700K	35W	LED strip	24V	2000lm	90	DALI	BZRCD408G15DOR	gold	●	1.212,00
3000K	35W	LED strip	24V	2200lm	90	DALI	BZRCD408G15WBO	white	○	1.103,00
3000K	35W	LED strip	24V	2200lm	90	DALI	BZRCD408G15WNE	black	●	1.103,00
3000K	35W	LED strip	24V	2200lm	90	DALI	BZRCD408G15WOR	gold	●	1.212,00
4000K	35W	LED strip	24V	2360lm	90	DALI	BZRCD408G15NBO	white	○	1.103,00
4000K	35W	LED strip	24V	2360lm	90	DALI	BZRCD408G15NNE	black	●	1.103,00
4000K	35W	LED strip	24V	2360lm	90	DALI	BZRCD408G15NOR	gold	●	1.212,00
note		RAL 9005 black RAL 9016 white shipped assembled								
integrated driver		driver box with 1 x driver Superslim 60W Dalı2/Push Dalı (220/240V)								
customizations		lumen output, finish								

CE UK CA IP40

ZIRKOL CEILING 1m | DALI

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRCD410G15DBO	white	○	1.404,00
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRCD410G15DNE	black	●	1.404,00
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRCD410G15DOR	gold	●	1.545,00
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRCD410G15WBO	white	○	1.404,00
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRCD410G15WNE	black	●	1.404,00
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRCD410G15WOR	gold	●	1.545,00
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRCD410G15NBO	white	○	1.404,00
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRCD410G15NNE	black	●	1.404,00
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRCD410G15NOR	gold	●	1.545,00
note		RAL 9005 black RAL 9016 white shipped assembled								
integrated driver		driver box with 1 x driver Superslim 60W Dalı2/Push Dalı (220/240V)								
customizations		lumen output, finish								


CE UK CA IP40



ZIRKOL CEILING 1,5m | DALI

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro	
2700K	60W	LED strip	24V	3923lm	90	DALI	BZRCD415G15DBO	white	○	1.774,00
2700K	60W	LED strip	24V	3923lm	90	DALI	BZRCD415G15DNE	black	●	1.774,00
2700K	60W	LED strip	24V	3923lm	90	DALI	BZRCD415G15DOR	gold	●	1.945,00
3000K	60W	LED strip	24V	4154lm	90	DALI	BZRCD415G15WBO	white	○	1.774,00
3000K	60W	LED strip	24V	4154lm	90	DALI	BZRCD415G15WNE	black	●	1.774,00
3000K	60W	LED strip	24V	4154lm	90	DALI	BZRCD415G15WOR	gold	●	1.945,00
4000K	60W	LED strip	24V	4616lm	90	DALI	BZRCD415G15NBO	white	○	1.774,00
4000K	60W	LED strip	24V	4616lm	90	DALI	BZRCD415G15NNE	black	●	1.774,00
4000K	60W	LED strip	24V	4616lm	90	DALI	BZRCD415G15NOR	gold	●	1.945,00
note	RAL 9005 black RAL 9016 white shipped assembled									
integrated driver	driver box with 1 x driver Superslim 60W Dalı2/Push Dalı (220/240V)									
customizations	lumen output, finish									

CE UK CA IP40

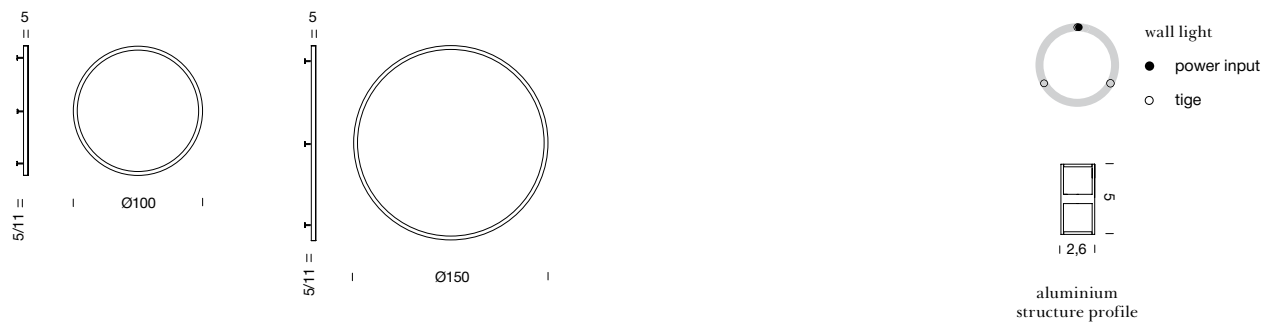

ZIRKOL CIRCLE WALL 1m | DALI

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRC4210G15DNE	black ●	1.347,00
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRC4210G15WNE	black ●	1.347,00
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRC4210G15NNE	black ●	1.347,00
note		remote driver RAL 9005 black shipped assembled indirect light emission							
included		1 x driver 60W (220/240V) 1 x dimmer DALI 3 x tige 5 cm 3 x tige 11 cm 1 x electrical cable 50cm							
customizations		external electrical cable optional accessories on p. 67 custom features on p.13							

CE UK CA IP40

ZIRKOL CIRCLE WALL 1,5m | DALI

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRC4215G15DNE	black ●	1.675,00
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRC4215G15WNE	black ●	1.675,00
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRC4215G15NNE	black ●	1.675,00
note		remote driver RAL 9005 black shipped assembled indirect light emission							
included		1 x driver 75W (110/240V) 1 x dimmer DALI 3 x tige 5 cm 3 x tige 11 cm 1 x electrical cable 50cm							
customizations		external electrical cable optional accessories on p.67 custom features on p.13							

CE UK CA IP40



ZIRKOL GAP 0,85m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	26W	LED strip	24V	1500lm	90	DALI	BZRG1608G15DNE	white	○	1.072,00
2700K	26W	LED strip	24V	1500lm	90	DALI	BZRG1608G15DBO	black	●	1.072,00
2700K	26W	LED strip	24V	1500lm	90	DALI	BZRG1608G15DOR	gold	●	1.181,00
3000K	26W	LED strip	24V	1650lm	90	DALI	BZRG1608G15WNE	white	○	1.072,00
3000K	26W	LED strip	24V	1650lm	90	DALI	BZRG1608G15WBO	black	●	1.072,00
3000K	26W	LED strip	24V	1650lm	90	DALI	BZRG1608G15WOR	gold	●	1.181,00
4000K	26W	LED strip	24V	1770lm	90	DALI	BZRG1608G15NNE	white	○	1.072,00
4000K	26W	LED strip	24V	1770lm	90	DALI	BZRG1608G15NBO	black	●	1.072,00
4000K	26W	LED strip	24V	1770lm	90	DALI	BZRG1608G15NOR	gold	●	1.181,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	45W	LED strip	24V	3000lm	90	DALI	BZRG1708G15DBO	white	○	1.306,00
2700K	45W	LED strip	24V	3000lm	90	DALI	BZRG1708G15DNE	black	●	1.306,00
2700K	45W	LED strip	24V	3000lm	90	DALI	BZRG1708G15DOR	gold	●	1.508,00
3000K	45W	LED strip	24V	3300lm	90	DALI	BZRG1708G15WBO	white	○	1.306,00
3000K	45W	LED strip	24V	3300lm	90	DALI	BZRG1708G15WNE	black	●	1.306,00
3000K	45W	LED strip	24V	3300lm	90	DALI	BZRG1708G15WOR	gold	●	1.508,00
4000K	45W	LED strip	24V	3540m	90	DALI	BZRG1708G15NBO	white	○	1.306,00
4000K	45W	LED strip	24V	3540m	90	DALI	BZRG1708G15NNE	black	●	1.306,00
4000K	45W	LED strip	24V	3540m	90	DALI	BZRG1708G15NOR	gold	●	1.508,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40

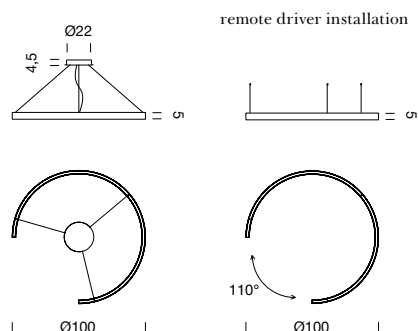


remote driver installation



downlight/up-downlight

- power input
- metal cable

aluminium
structure profile

ZIRKOL GAP 1m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	26W	LED strip	24V	1962lm	90	DALI	BZRG1610G15DBO	white	○	1.181,00
2700K	26W	LED strip	24V	1962lm	90	DALI	BZRG1610G15DNE	black	●	1.181,00
2700K	26W	LED strip	24V	1962lm	90	DALI	BZRG1610G15DOR	gold	●	1.300,00
3000K	26W	LED strip	24V	2077lm	90	DALI	BZRG1610G15WBO	white	○	1.181,00
3000K	26W	LED strip	24V	2077lm	90	DALI	BZRG1610G15WNE	black	●	1.181,00
3000K	26W	LED strip	24V	2077lm	90	DALI	BZRG1610G15WOR	gold	●	1.300,00
4000K	26W	LED strip	24V	2308lm	90	DALI	BZRG1610G15NBO	white	○	1.181,00
4000K	26W	LED strip	24V	2308lm	90	DALI	BZRG1610G15NNE	black	●	1.181,00
4000K	26W	LED strip	24V	2308lm	90	DALI	BZRG1610G15NOR	gold	●	1.300,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40


UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRG1710G15DBO	white	○	1.415,00
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRG1710G15DNE	black	●	1.415,00
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRG1710G15DOR	gold	●	1.597,00
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRG1710G15WBO	white	○	1.415,00
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRG1710G15WNE	black	●	1.415,00
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRG1710G15WOR	gold	●	1.597,00
4000K	68W	LED strip	24V	4615lm	90	DALI	BZRG1710G15NBO	white	○	1.415,00
4000K	68W	LED strip	24V	4615lm	90	DALI	BZRG1710G15NNE	black	●	1.415,00
4000K	68W	LED strip	24V	4615lm	90	DALI	BZRG1710G15NOR	gold	●	1.597,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40

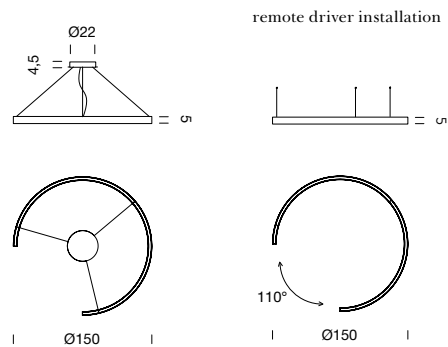

remote driver installation



ZIRKOL GAP 1,5m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	50W	LED strip	24V	2942lm	90	DALI	BZRG1615G15DBO	white	1.508,00
2700K	50W	LED strip	24V	2942lm	90	DALI	BZRG1615G15DNE	black	1.508,00
2700K	50W	LED strip	24V	2942lm	90	DALI	BZRG1615G15DOR	gold	1.659,00
3000K	50W	LED strip	24V	3115lm	90	DALI	BZRG1615G15WBO	white	1.508,00
3000K	50W	LED strip	24V	3115lm	90	DALI	BZRG1615G15WNE	black	1.508,00
3000K	50W	LED strip	24V	3115lm	90	DALI	BZRG1615G15WOR	gold	1.659,00
4000K	50W	LED strip	24V	3462lm	90	DALI	BZRG1615G15NBO	white	1.508,00
4000K	50W	LED strip	24V	3462lm	90	DALI	BZRG1615G15NNE	black	1.508,00
4000K	50W	LED strip	24V	3462lm	90	DALI	BZRG1615G15NOR	gold	1.659,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	100W	LED strip	24V	5885lm	90	DALI	BZRG1715G15DBO	white	1.831,00
2700K	100W	LED strip	24V	5885lm	90	DALI	BZRG1715G15DNE	black	1.831,00
2700K	100W	LED strip	24V	5885lm	90	DALI	BZRG1715G15DOR	gold	2.008,00
3000K	100W	LED strip	24V	6231lm	90	DALI	BZRG1715G15WBO	white	1.831,00
3000K	100W	LED strip	24V	6231lm	90	DALI	BZRG1715G15WNE	black	1.831,00
3000K	100W	LED strip	24V	6231lm	90	DALI	BZRG1715G15WOR	gold	2.008,00
4000K	100W	LED strip	24V	6924lm	90	DALI	BZRG1715G15NBO	white	1.831,00
4000K	100W	LED strip	24V	6924lm	90	DALI	BZRG1715G15NNE	black	1.831,00
4000K	100W	LED strip	24V	6924lm	90	DALI	BZRG1715G15NOR	gold	2.008,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13								

CE UK CA IP40



ZIRKOL ROUND 1m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	22,5W	LED strip	24V	1308lm	90	DALI	BZRR1610G15DBO	white	○	635,00
2700K	22,5W	LED strip	24V	1308lm	90	DALI	BZRR1610G15DNE	black	●	635,00
2700K	22,5W	LED strip	24V	1308lm	90	DALI	BZRR1610G15DOR	gold	●	702,00
3000K	22,5W	LED strip	24V	1384lm	90	DALI	BZRR1610G15WBO	white	○	635,00
3000K	22,5W	LED strip	24V	1384lm	90	DALI	BZRR1610G15WNE	black	●	635,00
3000K	22,5W	LED strip	24V	1384lm	90	DALI	BZRR1610G15WOR	gold	●	702,00
4000K	22,5W	LED strip	24V	1538lm	90	DALI	BZRR1610G15NBO	white	○	635,00
4000K	22,5W	LED strip	24V	1538lm	90	DALI	BZRR1610G15NNE	black	●	635,00
4000K	22,5W	LED strip	24V	1538lm	90	DALI	BZRR1610G15NOR	gold	●	702,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	45W	LED strip	24V	2615lm	90	DALI	BZRR1710G15DBO	white	○	791,00
2700K	45W	LED strip	24V	2615lm	90	DALI	BZRR1710G15DNE	black	●	791,00
2700K	45W	LED strip	24V	2615lm	90	DALI	BZRR1710G15DOR	gold	●	874,00
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRR1710G15WBO	white	○	791,00
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRR1710G15WNE	black	●	791,00
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRR1710G15WOR	gold	●	874,00
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRR1710G15NBO	white	○	791,00
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRR1710G15NNE	black	●	791,00
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRR1710G15NOR	gold	●	874,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40



ZIRKOL ROUND 1,5m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	34W	LED strip	24V	1961lm	90	DALI	BZRR1615G15DBO	white	○	874,00
2700K	34W	LED strip	24V	1961lm	90	DALI	BZRR1615G15DNE	black	●	874,00
2700K	34W	LED strip	24V	1961lm	90	DALI	BZRR1615G15DOR	gold	●	968,00
3000K	34W	LED strip	24V	2077lm	90	DALI	BZRR1615G15WBO	white	○	874,00
3000K	34W	LED strip	24V	2077lm	90	DALI	BZRR1615G15WNE	black	●	874,00
3000K	34W	LED strip	24V	2077lm	90	DALI	BZRR1615G15WOR	gold	●	968,00
4000K	34W	LED strip	24V	23068lm	90	DALI	BZRR1615G15NBO	white	○	874,00
4000K	34W	LED strip	24V	23068lm	90	DALI	BZRR1615G15NNE	black	●	874,00
4000K	34W	LED strip	24V	23068lm	90	DALI	BZRR1615G15NOR	gold	●	968,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRR1715G15DBO	white	○	1.061,00
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRR1715G15DNE	black	●	1.061,00
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRR1715G15DOR	gold	●	1.170,00
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRR1715G15WBO	white	○	1.061,00
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRR1715G15WNE	black	●	1.061,00
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRR1715G15WOR	gold	●	1.170,00
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRR1715G15NBO	white	○	1.061,00
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRR1715G15NNE	black	●	1.061,00
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRR1715G15NOR	gold	●	1.170,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	remote driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40



ZIRKOL ROUND 2m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	45W	LED strip	24V	2630lm	90	DALI	BZRR1620G15DBO	white	○	1.207,00
2700K	45W	LED strip	24V	2630lm	90	DALI	BZRR1620G15DNE	black	●	1.207,00
2700K	45W	LED strip	24V	2630lm	90	DALI	BZRR1620G15DOR	gold	●	1.332,00
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRR1620G15WBO	white	○	1.207,00
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRR1620G15WNE	black	●	1.207,00
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRR1620G15WOR	gold	●	1.332,00
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRR1620G15NBO	white	○	1.207,00
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRR1620G15NNE	black	●	1.207,00
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRR1620G15NOR	gold	●	1.332,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	90W	LED strip	24V	5250lm	90	DALI	BZRR1720G15DBO	white	○	1.493,00
2700K	90W	LED strip	24V	5250lm	90	DALI	BZRR1720G15DNE	black	●	1.493,00
2700K	90W	LED strip	24V	5250lm	90	DALI	BZRR1720G15DOR	gold	●	1.779,00
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRR1720G15WBO	white	○	1.493,00
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRR1720G15WNE	black	●	1.493,00
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRR1720G15WOR	gold	●	1.779,00
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRR1720G15NBO	white	○	1.493,00
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRR1720G15NNE	black	●	1.493,00
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRR1720G15NOR	gold	●	1.779,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	remote driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40

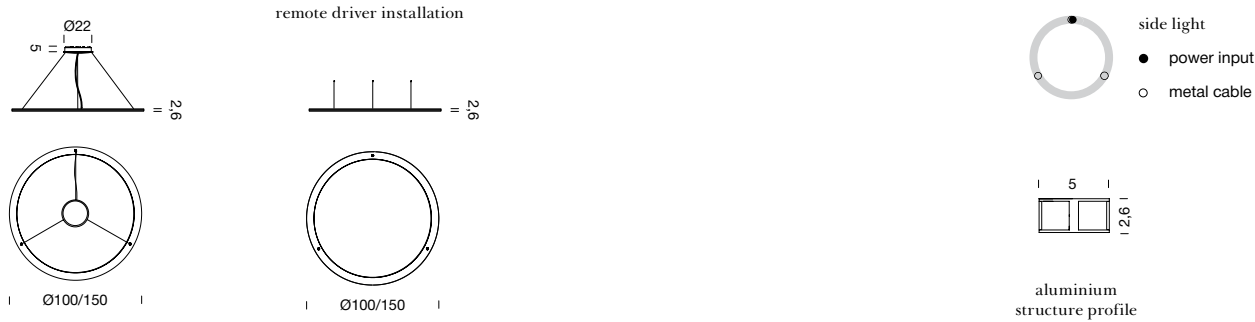

ZIRKOL SIDE 1m | DALI

INSIDE-OUTSIDE LIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	90W	LED strip	24V	5231lm	90	DALI	BZRS1710G15DBO	white ○	1.720,00
2700K	90W	LED strip	24V	5231lm	90	DALI	BZRS1710G15DNE	black ●	1.720,00
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRS1710G15WBO	white ○	1.720,00
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRS1710G15WNE	black ●	1.720,00
4000K	90W	LED strip	24V	56154m	90	DALI	BZRS1710G15NBO	white ○	1.720,00
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRS1710G15NNE	black ●	1.720,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m)								
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13								



CE UK CA IP40

ZIRKOL SIDE 1,5m | DALI

INSIDE-OUTSIDE LIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	136W	LED strip	24V	7847lm	90	DALI	BZRS1715G15DBO	white ○	2.185,00
2700K	136W	LED strip	24V	7847lm	90	DALI	BZRS1715G15DNE	black ●	2.185,00
3000K	136W	LED strip	24V	8308lm	90	DALI	BZRS1715G15WBO	white ○	2.185,00
3000K	136W	LED strip	24V	8308lm	90	DALI	BZRS1715G15WNE	black ●	2.185,00
4000K	136W	LED strip	24V	9232lm	90	DALI	BZRS1715G15NBO	white ○	2.185,00
4000K	136W	LED strip	24V	9232lm	90	DALI	BZRS1715G15NNE	black ●	2.185,00
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m)								
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13								

CE UK CA IP40

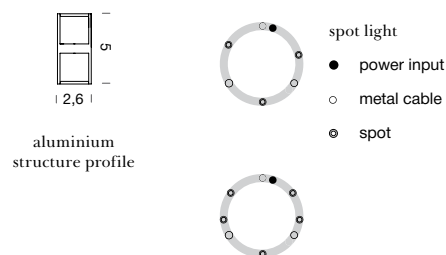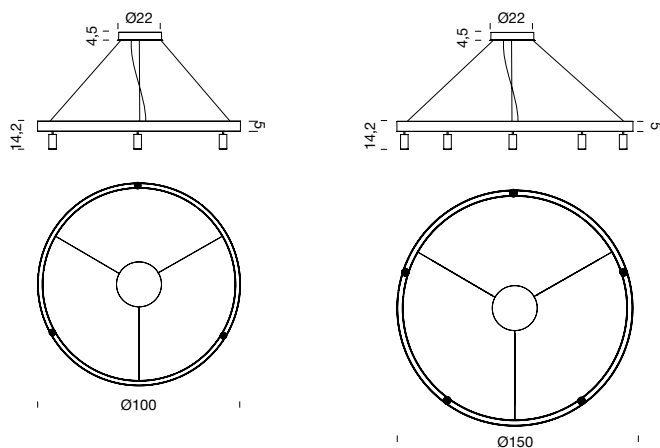

ZIRKOL SPOT 1m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	60W	LED strip	24V	3955lm	90	DALI	BZRCF610G15DBO	white	1.685,00
2700K	60W	LED strip	24V	3955lm	90	DALI	BZRCF610G15DNE	black	1.685,00
2700K	60W	LED strip	24V	3955lm	90	DALI	BZRCF610G15DOR	gold	1.820,00
3000K	60W	LED strip	24V	4393lm	90	DALI	BZRCF610G15WBO	white	1.685,00
3000K	60W	LED strip	24V	4393lm	90	DALI	BZRCF610G15WNE	black	1.685,00
3000K	60W	LED strip	24V	4393lm	90	DALI	BZRCF610G15WOR	gold	1.820,00
note	RAL 9005 black RAL 9016 white shipped assembled *396lm for a single spot spots diameter 3,7cm / spot power consumption 5W								
included	round canopy with 1 x driver 75W (110/24V) 1 x dimmer DALI 1 x electrical cable 4m 3x adjustable spots up to 90° black/white/gold 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13								


CE UK CA IP40

ZIRKOL SPOT 1,5m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	93W	LED strip	24V	5515lm	90	DALI	BZRCF615G15DBO	white	2.070,00
2700K	93W	LED strip	24V	5515lm	90	DALI	BZRCF615G15DNE	black	2.070,00
2700K	93W	LED strip	24V	5515lm	90	DALI	BZRCF615G15DOR	gold	2.288,00
3000K	93W	LED strip	24V	6130lm	90	DALI	BZRCF615G15WBO	white	2.070,00
3000K	93W	LED strip	24V	6130lm	90	DALI	BZRCF615G15WNE	black	2.070,00
3000K	93W	LED strip	24V	6130lm	90	DALI	BZRCF615G15WOR	gold	2.288,00
note	RAL 9005 black RAL 9016 white shipped assembled *396lm for a single spot spots diameter 3,7cm / spot power consumption 5W								
included	round canopy with 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3x adjustable spots up to 90° black/white/gold 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13								

CE UK CA IP40

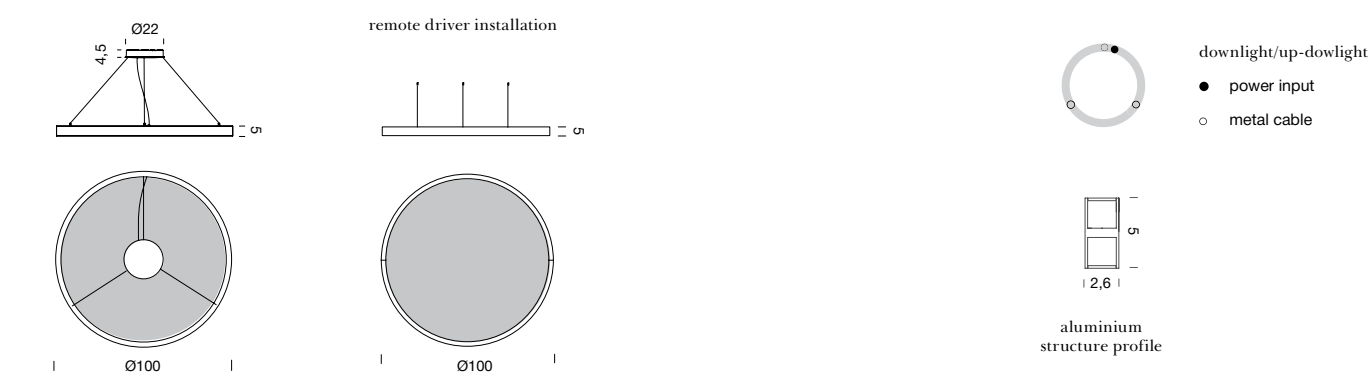

ZIRKOL ACOUSTIC 1m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	panel	code	finish	Euro
2700K	45W	LED strip	24V	2616lm	90	DALI	grey	BZAC1610G15DBG	white	1748,00
2700K	45W	LED strip	24V	2616lm	90	DALI	grey	BZAC1610G15DNG	black	1748,00
3000K	45W	LED strip	24V	2769lm	90	DALI	grey	BZAC1610G15WBG	white	1748,00
3000K	45W	LED strip	24V	2769lm	90	DALI	grey	BZAC1610G15WNG	black	1748,00
4000K	45W	LED strip	24V	3077lm	90	DALI	grey	BZAC1610G15NNG	white	1748,00
4000K	45W	LED strip	24V	3077lm	90	DALI	grey	BZAC1610G15NNG	black	1748,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	round canopy with 1 x driver 75W (110/24V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included Grey sound-absorbing panel 100% polyester FR									
customizations	blue navy or deep green panels available on demand, external electrical cable optional accessories on p. 67 custom features on p. 13									



CE UK CA IP40

ZIRKOL ACOUSTIC 1m | DALI


UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	panel	code	finish	Euro
2700K	90W	LED strip	24V	5231lm	90	DALI	grey	BZAC1710G15DBG	white	1924,00
2700K	90W	LED strip	24V	5231lm	90	DALI	grey	BZAC1710G15DNG	black	1924,00
3000K	90W	LED strip	24V	5539lm	90	DALI	grey	BZAC1710G15WBG	white	1924,00
3000K	90W	LED strip	24V	5539lm	90	DALI	grey	BZAC1710G15WNG	black	1924,00
4000K	90W	LED strip	24V	6154lm	90	DALI	grey	BZAC1710G15NNG	white	1924,00
4000K	90W	LED strip	24V	6154lm	90	DALI	grey	BZAC1710G15NNG	black	1924,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	round canopy with 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included Grey sound-absorbing panel 100% polyester FR									
customizations	blue navy or deep green panels available on demand, external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40



downlight
● power input
○ metal cable



aluminium
structure profile

ZIRKOL CIRCLE UGR 1M | DALI

DOWNLIGHT											
CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish		Euro
2700K	59W	flex LED strip 30°	24VDC	3505lm	30°	90	DALI	BZRC1610I42DNE	black	●	2.184,00
3000K	59W	flex LED strip 30°	24VDC	3894lm	30°	90	DALI	BZRC1610I42WNE	black	●	2.184,00
4000K	59W	flex LED strip 30°	24VDC	4327lm	30°	90	DALI	BZRC1610I42NNE	black	●	2.184,00
note		RAL 9005 black shipped assembled									
included		1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations		external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40 UGR<19

UP-DOWNLIGHT											
CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish		Euro
2700K	104W	flex LED strip 30°+ LED strip	24VDC	5646lm	30°+ diffused	90	DALI	BZRC1710I42DNE	black	●	2.444,00
3000K	104W	flex LED strip 30°+ LED strip	24VDC	6274lm	30°+ diffused	90	DALI	BZRC1710I42WNE	black	●	2.444,00
4000K	104W	flex LED strip 30°+ LED strip	24VDC	6971lm	30°+ diffused	90	DALI	BZRC1710I42NNE	black	●	2.444,00
note		RAL 9005 black shipped assembled									
included		1 x driver 150W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations		external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40 UGR<19



ZIRKOL CIRCLE UGR 1,2M | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish	Euro
2700K	70W	flex LED strip 30°	24VDC	4130lm	30°	90	DALI	BZRC1612I42DNE	black	2.756,00
3000K	70W	flex LED strip 30°	24VDC	4620lm	30°	90	DALI	BZRC1612I42WNE	black	2.756,00
4000K	70W	flex LED strip 30°	24VDC	5110lm	30°	90	DALI	BZRC1612I42NNE	black	2.756,00
note		RAL 9005 black shipped assembled								
included		1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations		external electrical cable optional accessories on p. 67 custom features on p. 13								

CE UK CA IP40 UGR<19

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish	Euro
2700K	124W	flex LED strip 30°+ LED strip	24VDC	6696lm	30°+ diffused	90	DALI	BZRC1712I42DNE	black	3.068,00
3000K	124W	flex LED strip 30°+ LED strip	24VDC	7440lm	30°+ diffused	90	DALI	BZRC1712I42WNE	black	3.068,00
4000K	124W	flex LED strip 30°+ LED strip	24VDC	8308lm	30°+ diffused	90	DALI	BZRC1712I42NNE	black	3.068,00
note		RAL 9005 black shipped assembled								
included		1 x driver 150W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations		external electrical cable optional accessories on p. 67 custom features on p. 13								

CE UK CA IP40 UGR<19



ZIRKOL ROUND UGR 1M | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish	Euro
2700K	29,5W	flex LED strip 30°	24VDC	1753lm	30°	90	DALI	BZRR1610I42DNE	black ●	1.196,00
3000K	29,5W	flex LED strip 30°	24VDC	1947lm	30°	90	DALI	BZRR1610I42WNE	black ●	1.196,00
4000K	29,5W	flex LED strip 30°	24VDC	2163lm	30°	90	DALI	BZRR1610I42NNE	black ●	1.196,00
note		RAL 9005 black shipped assembled								
included		1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations		external electrical cable optional accessories on p. 67 custom features on p. 13								

CE UK CA IP40 UGR<19

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish	Euro
2700K	52W	flex LED strip 30°+ LED strip	24VDC	2823lm	30°+ diffused	90	DALI	BZRR1710I42DNE	black ●	1.300,00
3000K	52W	flex LED strip 30°+ LED strip	24VDC	3137lm	30°+ diffused	90	DALI	BZRR1710I42WNE	black ●	1.300,00
4000K	52W	flex LED strip 30°+ LED strip	24VDC	3486lm	30°+ diffused	90	DALI	BZRR1710I42NNE	black ●	1.300,00
note		RAL 9005 black shipped assembled								
included		1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations		external electrical cable optional accessories on p. 67 custom features on p. 13								

CE UK CA IP40 UGR<19



ZIRKOL ROUND UGR 1,2M | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish	Euro	
2700K	35W	flex LED strip 30°	24VDC	2565lm	30°	90	DALI	BZRR1612I42DNE	black	●	1.508,00
3000K	35W	flex LED strip 30°	24VDC	2310lm	30°	90	DALI	BZRR1612I42WNE	black	●	1.508,00
4000K	35W	flex LED strip 30°	24VDC	2555lm	30°	90	DALI	BZRR1612I42NNE	black	●	1.508,00
note		RAL 9005 black shipped assembled									
included		1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations		external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40 UGR<19

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish	Euro	
2700K	62W	flex LED strip 30°+ LED strip	24VDC	3348lm	30°+ diffused	90	DALI	BZRR1712I42DNE	black	●	1.644,00
3000K	62W	flex LED strip 30°+ LED strip	24VDC	3720lm	30°+ diffused	90	DALI	BZRR1712I42WNE	black	●	1.644,00
4000K	62W	flex LED strip 30°+ LED strip	24VDC	4154lm	30°+ diffused	90	DALI	BZRR1712I42NNE	black	●	1.644,00
note		RAL 9005 black shipped assembled									
included		1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations		external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40 UGR<19



downlight/up-downlight

- power input
- metal cable



aluminium
structure profile

ZIRKOL SQUARE S 1m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	58W	LED strip	24V	3330lm	90	DALI	BZRA1610G15DBO	white	○	1.092,00
2700K	58W	LED strip	24V	3330lm	90	DALI	BZRA1610G15DNE	black	●	1.092,00
2700K	58W	LED strip	24V	3330lm	90	DALI	BZRA1610G15DOR	gold	●	1.207,00
3000K	58W	LED strip	24V	3525lm	90	DALI	BZRA1610G15WBO	white	○	1.092,00
3000K	58W	LED strip	24V	3525lm	90	DALI	BZRA1610G15WNE	black	●	1.092,00
3000K	58W	LED strip	24V	3525lm	90	DALI	BZRA1610G15WOR	gold	●	1.207,00
4000K	58W	LED strip	24V	3920lm	90	DALI	BZRA1610G15NBO	white	○	1.092,00
4000K	58W	LED strip	24V	3920lm	90	DALI	BZRA1610G15NNE	black	●	1.092,00
4000K	58W	LED strip	24V	3920lm	90	DALI	BZRA1610G15NOR	gold	●	1.207,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	116W	LED strip	24V	6660lm	90	DALI	BZRA1710G15DBO	white	○	1.300,00
2700K	116W	LED strip	24V	6660lm	90	DALI	BZRA1710G15DNE	black	●	1.300,00
2700K	116W	LED strip	24V	6660lm	90	DALI	BZRA1710G15DOR	gold	●	1.436,00
3000K	116W	LED strip	24V	7050lm	90	DALI	BZRA1710G15WBO	white	○	1.300,00
3000K	116W	LED strip	24V	7050lm	90	DALI	BZRA1710G15WNE	black	●	1.300,00
3000K	116W	LED strip	24V	7050lm	90	DALI	BZRA1710G15WOR	gold	●	1.436,00
4000K	116W	LED strip	24V	7840lm	90	DALI	BZRA1710G15NBO	white	○	1.300,00
4000K	116W	LED strip	24V	7840lm	90	DALI	BZRA1710G15NNE	black	●	1.300,00
4000K	116W	LED strip	24V	7840lm	90	DALI	BZRA1710G15NOR	gold	●	1.436,00
note	RAL 9005 black RAL 9016 white shipped assembled									
included	remote driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p. 67 custom features on p. 13									

CE UK CA IP40

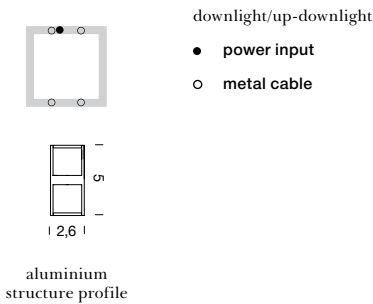

ZIRKOL SQUARE S 1,5m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	87W	LED strip	24V	5000lm	90	DALI	BZRA1615G15DBO	white	○	1.456,00
2700K	87W	LED strip	24V	5000lm	90	DALI	BZRA1615G15DNE	black	●	1.456,00
2700K	87W	LED strip	24V	5000lm	90	DALI	BZRA1615G15DOR	gold	●	1.612,00
3000K	87W	LED strip	24V	5290lm	90	DALI	BZRA1615G15WBO	white	○	1.456,00
3000K	87W	LED strip	24V	5290lm	90	DALI	BZRA1615G15WNE	black	●	1.456,00
3000K	87W	LED strip	24V	5290lm	90	DALI	BZRA1615G15WOR	gold	●	1.612,00
4000K	87W	LED strip	24V	5880lm	90	DALI	BZRA1615G15NBO	white	○	1.456,00
4000K	87W	LED strip	24V	5880lm	90	DALI	BZRA1615G15NNE	black	●	1.456,00
4000K	87W	LED strip	24V	5880lm	90	DALI	BZRA1615G15NOR	gold	●	1.612,00
note		RAL 9005 black RAL 9016 white shipped assembled								
included		remote driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations		external electrical cable optional accessories on p. 67 custom features on p. 13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	174W	LED strip	24V	10000lm	90	DALI	BZRA1715G15DBO	white	○	1.789,00
2700K	174W	LED strip	24V	10000lm	90	DALI	BZRA1715G15DNE	black	●	1.789,00
2700K	174W	LED strip	24V	10000lm	90	DALI	BZRA1715G15DOR	gold	●	1.971,00
3000K	174W	LED strip	24V	10480lm	90	DALI	BZRA1715G15WBO	white	○	1.789,00
3000K	174W	LED strip	24V	10480lm	90	DALI	BZRA1715G15WNE	black	●	1.789,00
3000K	174W	LED strip	24V	10480lm	90	DALI	BZRA1715G15WOR	gold	●	1.971,00
4000K	174W	LED strip	24V	11760lm	90	DALI	BZRA1715G15NBO	white	○	1.789,00
4000K	174W	LED strip	24V	11760lm	90	DALI	BZRA1715G15NNE	black	●	1.789,00
4000K	174W	LED strip	24V	11760lm	90	DALI	BZRA1715G15NOR	gold	●	1.971,00
note		RAL 9005 black RAL 9016 white shipped assembled								
included		remote driver 250W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations		external electrical cable optional accessories on p. 67 custom features on p. 13								

CE UK CA IP40



downlight/up-downlight

- power input
- metal cable
- split

ZIRKOL SQUARE Q 1,5 x 1,5m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	77W	LED strip	24V	4432lm	90	DALI	BZRQ1606G15DBO	white ○	2.585,00
2700K	77W	LED strip	24V	4432lm	90	DALI	BZRQ1606G15DNE	black ●	2.585,00
2700K	77W	LED strip	24V	4432lm	90	DALI	BZRQ1606G15DOR	gold ●	2.871,00
3000K	77W	LED strip	24V	4692lm	90	DALI	BZRQ1606G15WBO	white ○	2.585,00
3000K	77W	LED strip	24V	4692lm	90	DALI	BZRQ1606G15WNE	black ●	2.585,00
3000K	77W	LED strip	24V	4692lm	90	DALI	BZRQ1606G15WOR	gold ●	2.871,00
4000K	77W	LED strip	24V	5214lm	90	DALI	BZRQ1606G15NBO	white ○	2.585,00
4000K	77W	LED strip	24V	5214lm	90	DALI	BZRQ1606G15NNE	black ●	2.585,00
4000K	77W	LED strip	24V	5214lm	90	DALI	BZRQ1606G15NOR	gold ●	2.871,00
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	154W	LED strip	24V	8863lm	90	DALI	BZRQ1712G15DBO	white ○	3.204,00
2700K	154W	LED strip	24V	8863lm	90	DALI	BZRQ1712G15DNE	black ●	3.204,00
2700K	154W	LED strip	24V	8863lm	90	DALI	BZRQ1712G15DOR	gold ●	3.536,00
3000K	154W	LED strip	24V	9384lm	90	DALI	BZRQ1712G15WBO	white ○	3.204,00
3000K	154W	LED strip	24V	9384lm	90	DALI	BZRQ1712G15WNE	black ●	3.204,00
3000K	154W	LED strip	24V	9384lm	90	DALI	BZRQ1712G15WOR	gold ●	3.536,00
4000K	154W	LED strip	24V	10427lm	90	DALI	BZRQ1712G15NBO	white ○	3.204,00
4000K	154W	LED strip	24V	10427lm	90	DALI	BZRQ1712G15NNE	black ●	3.204,00
4000K	154W	LED strip	24V	10427lm	90	DALI	BZRQ1712G15NOR	gold ●	3.536,00
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 250W (220/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

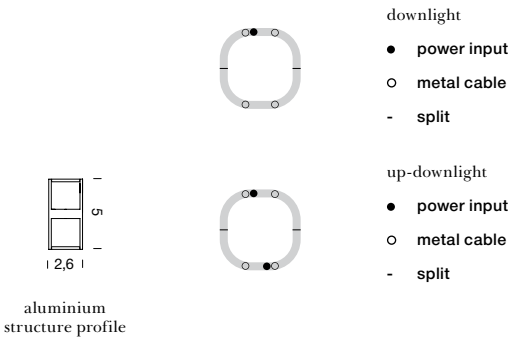

- downlight
- power input
 - metal cable
 - split
- up-downlight
- power input
 - metal cable
 - split

ZIRKOL SQUARE Q 2 x 2m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	105W	LED strip	24V	6098lm	90	DALI	BZRQ1608G15DBO	white ○	2.808,00
2700K	105W	LED strip	24V	6098lm	90	DALI	BZRQ1608G15DNE	black ●	2.808,00
2700K	105W	LED strip	24V	6098lm	90	DALI	BZRQ1608G15DOR	gold ●	3.089,00
3000K	105W	LED strip	24V	6456lm	90	DALI	BZRQ1608G15WBO	white ○	2.808,00
3000K	105W	LED strip	24V	6456lm	90	DALI	BZRQ1608G15WNE	black ●	2.808,00
3000K	105W	LED strip	24V	6456lm	90	DALI	BZRQ1608G15WOR	gold ●	3.089,00
4000K	105W	LED strip	24V	7174lm	90	DALI	BZRQ1608G15NBO	white ○	2.808,00
4000K	105W	LED strip	24V	7174lm	90	DALI	BZRQ1608G15NNE	black ●	2.808,00
4000K	105W	LED strip	24V	7174lm	90	DALI	BZRQ1608G15NOR	gold ●	3.089,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces								
included	1 x driver 150W (220/240V) 1 x dimmer DAL 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	211W	LED strip	24V	12195lm	90	DALI	BZRQ1716G15DBO	white ○	3.744,00
2700K	211W	LED strip	24V	12195lm	90	DALI	BZRQ1716G15DNE	black ●	3.744,00
2700K	211W	LED strip	24V	12195lm	90	DALI	BZRQ1716G15DOR	gold ●	4.140,00
3000K	211W	LED strip	24V	12912lm	90	DALI	BZRQ1716G15WBO	white ○	3.744,00
3000K	211W	LED strip	24V	12912lm	90	DALI	BZRQ1716G15WNE	black ●	3.744,00
3000K	211W	LED strip	24V	12912lm	90	DALI	BZRQ1716G15WOR	gold ●	4.140,00
4000K	211W	LED strip	24V	14347lm	90	DALI	BZRQ1716G15NBO	white ○	3.744,00
4000K	211W	LED strip	24V	14347lm	90	DALI	BZRQ1716G15NNE	black ●	3.744,00
4000K	211W	LED strip	24V	14347lm	90	DALI	BZRQ1716G15NOR	gold ●	4.140,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces								
included	1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40



aluminium
structure profile

downlight/up-downlight

- power input
- metal cable
- split

ZIRKOL SQUARE Q 3 x 2m | DALI

DOWNLIGHT




CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	134W	LED strip	24V	7764lm	90	DALI	BZRQ1610G15DBO	white ○	3.370,00
2700K	134W	LED strip	24V	7764lm	90	DALI	BZRQ1610G15DNE	black ●	3.370,00
2700K	134W	LED strip	24V	7764lm	90	DALI	BZRQ1610G15DOR	gold ●	3.708,00
3000K	134W	LED strip	24V	8220lm	90	DALI	BZRQ1610G15WBO	white ○	3.370,00
3000K	134W	LED strip	24V	8220lm	90	DALI	BZRQ1610G15WNE	black ●	3.370,00
3000K	134W	LED strip	24V	8220lm	90	DALI	BZRQ1610G15WOR	gold ●	3.708,00
4000K	134W	LED strip	24V	9134lm	90	DALI	BZRQ1610G15NBO	white ○	3.370,00
4000K	134W	LED strip	24V	9134lm	90	DALI	BZRQ1610G15NNE	black ●	3.370,00
4000K	134W	LED strip	24V	9134lm	90	DALI	BZRQ1610G15NOR	gold ●	3.708,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces								
included	1 x driver 150W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	268W	LED strip	24V	15527lm	90	DALI	BZRQ1720G15DBO	white ○	4.550,00
2700K	268W	LED strip	24V	15527lm	90	DALI	BZRQ1720G15DNE	black ●	4.550,00
2700K	268W	LED strip	24V	15527lm	90	DALI	BZRQ1720G15DOR	gold ●	4.992,00
3000K	268W	LED strip	24V	16440lm	90	DALI	BZRQ1720G15WBO	white ○	4.550,00
3000K	268W	LED strip	24V	16440lm	90	DALI	BZRQ1720G15WNE	black ●	4.550,00
3000K	268W	LED strip	24V	16440lm	90	DALI	BZRQ1720G15WOR	gold ●	4.992,00
4000K	268W	LED strip	24V	18267lm	90	DALI	BZRQ1720G15NBO	white ○	4.550,00
4000K	268W	LED strip	24V	18267lm	90	DALI	BZRQ1720G15NNE	black ●	4.550,00
4000K	268W	LED strip	24V	18267lm	90	DALI	BZRQ1720G15NOR	gold ●	4.992,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces								
included	2 x drivers 150W (220/240V) 2 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

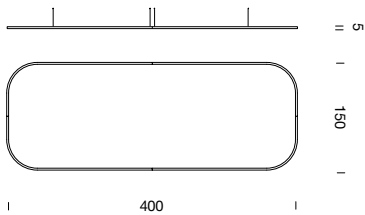

aluminium
structure profile

downlight/up-downlight

- power input
- metal cable
- split

ZIRKOL SQUARE Q 4 x 1,5m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	149W	LED strip	24V	8597lm	90	DALI	BZRQ1611G15DBO	white ○	3.594,00
2700K	149W	LED strip	24V	8597lm	90	DALI	BZRQ1611G15DNE	black ●	3.594,00
2700K	149W	LED strip	24V	8597lm	90	DALI	BZRQ1611G15DOR	gold ●	4.004,00
3000K	149W	LED strip	24V	9102lm	90	DALI	BZRQ1611G15WBO	white ○	3.594,00
3000K	149W	LED strip	24V	9102lm	90	DALI	BZRQ1611G15WNE	black ●	3.594,00
3000K	149W	LED strip	24V	9102lm	90	DALI	BZRQ1611G15WOR	gold ●	4.004,00
4000K	149W	LED strip	24V	10114lm	90	DALI	BZRQ1611G15NBO	white ○	3.594,00
4000K	149W	LED strip	24V	10114lm	90	DALI	BZRQ1611G15NNE	black ●	3.594,00
4000K	149W	LED strip	24V	10114lm	90	DALI	BZRQ1611G15NOR	gold ●	4.004,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x driver 100W (110/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40


UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	297W	LED strip	24V	17193lm	90	DALI	BZRQ1722G15DBO	white ○	4.774,00
2700K	297W	LED strip	24V	17193lm	90	DALI	BZRQ1722G15DNE	black ●	4.774,00
2700K	297W	LED strip	24V	17193lm	90	DALI	BZRQ1722G15DOR	gold ●	5.252,00
3000K	297W	LED strip	24V	18204lm	90	DALI	BZRQ1722G15WBO	white ○	4.774,00
3000K	297W	LED strip	24V	18204lm	90	DALI	BZRQ1722G15WNE	black ●	4.774,00
3000K	297W	LED strip	24V	18204lm	90	DALI	BZRQ1722G15WOR	gold ●	5.252,00
4000K	297W	LED strip	24V	20227lm	90	DALI	BZRQ1722G15NBO	white ○	4.774,00
4000K	297W	LED strip	24V	20227lm	90	DALI	BZRQ1722G15NNE	black ●	4.774,00
4000K	297W	LED strip	24V	20227lm	90	DALI	BZRQ1722G15NOR	gold ●	5.252,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x drivers 150W (220/240V) 2 x dimmer DALI 4 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

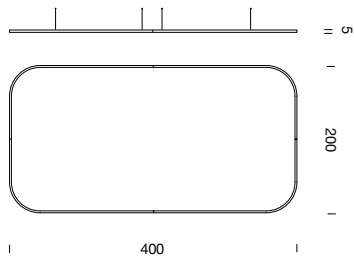

- power input
- metal cable
- split



aluminium
structure profile

ZIRKOL SQUARE Q 4 x 2m | DALI

DOWNLIGHT




CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	163W	LED strip	24V	9430lm	90	DALI	BZRQ1612G15DBO	white	○	3.932,00
2700K	163W	LED strip	24V	9430lm	90	DALI	BZRQ1612G15DNE	black	●	3.932,00
2700K	163W	LED strip	24V	9430lm	90	DALI	BZRQ1612G15DOR	gold	●	4.327,00
3000K	163W	LED strip	24V	9984lm	90	DALI	BZRQ1612G15WBO	white	○	3.932,00
3000K	163W	LED strip	24V	9984lm	90	DALI	BZRQ1612G15WNE	black	●	3.932,00
3000K	163W	LED strip	24V	9984lm	90	DALI	BZRQ1612G15WOR	gold	●	4.327,00
4000K	163W	LED strip	24V	11094lm	90	DALI	BZRQ1612G15NBO	white	○	3.932,00
4000K	163W	LED strip	24V	11094lm	90	DALI	BZRQ1612G15NNE	black	●	3.932,00
4000K	163W	LED strip	24V	11094lm	90	DALI	BZRQ1612G15NOR	gold	●	4.327,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces									
included	2 x driver 100W (110/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)									
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)									
customizations	find customizable features on p.13									

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	326W	LED strip	24V	18859lm	90	DALI	BZRQ1724G15DBO	white	○	5.336,00
2700K	326W	LED strip	24V	18859lm	90	DALI	BZRQ1724G15DNE	black	●	5.336,00
2700K	326W	LED strip	24V	18859lm	90	DALI	BZRQ1724G15DOR	gold	●	5.954,00
3000K	326W	LED strip	24V	19968lm	90	DALI	BZRQ1724G15WBO	white	○	5.336,00
3000K	326W	LED strip	24V	19968lm	90	DALI	BZRQ1724G15WNE	black	●	5.336,00
3000K	326W	LED strip	24V	19968lm	90	DALI	BZRQ1724G15WOR	gold	●	5.954,00
4000K	326W	LED strip	24V	22187lm	90	DALI	BZRQ1724G15NBO	white	○	5.336,00
4000K	326W	LED strip	24V	22187lm	90	DALI	BZRQ1724G15NNE	black	●	5.336,00
4000K	326W	LED strip	24V	22187lm	90	DALI	BZRQ1724G15NOR	gold	●	5.954,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces									
included	2 x driver 250W (220/240V) 2 x dimmer DALI 4 x electrical cable length 5m 6 x adjustable metal cable length 3m (including ceiling attachment)									
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)									
customizations	find customizable features on p.13									

CE UK CA IP40



downlight
● power input
○ metal cable

up-downlight
● power input
○ metal cable

ZIRKOL OVAL 2 x 1m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	74W	LED strip	24V	4282lm	90	DALI	BZRO16A20G15DBO	white ○	1.898,00
2700K	74W	LED strip	24V	4282lm	90	DALI	BZRO16A20G15DNE	black ●	1.898,00
2700K	74W	LED strip	24V	4282lm	90	DALI	BZRO16A20G15DOR	gold ●	2.101,00
3000K	74W	LED strip	24V	4533lm	90	DALI	BZRO16A20G15WBO	white ○	1.898,00
3000K	74W	LED strip	24V	4533lm	90	DALI	BZRO16A20G15WNE	black ●	1.898,00
3000K	74W	LED strip	24V	4533lm	90	DALI	BZRO16A20G15WOR	gold ●	2.101,00
4000K	74W	LED strip	24V	5037lm	90	DALI	BZRO16A20G15NBO	white ○	1.898,00
4000K	74W	LED strip	24V	5037lm	90	DALI	BZRO16A20G15NNE	black ●	1.898,00
4000K	74W	LED strip	24V	5037lm	90	DALI	BZRO16A20G15NOR	gold ●	2.101,00
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	148W	LED strip	24V	8563lm	90	DALI	BZRO17A20G15DBO	white ○	2.470,00
2700K	148W	LED strip	24V	8563lm	90	DALI	BZRO17A20G15DNE	black ●	2.470,00
2700K	148W	LED strip	24V	8563lm	90	DALI	BZRO17A20G15DOR	gold ●	2.694,00
3000K	148W	LED strip	24V	9067lm	90	DALI	BZRO17A20G15WBO	white ○	2.470,00
3000K	148W	LED strip	24V	9067lm	90	DALI	BZRO17A20G15WNE	black ●	2.470,00
3000K	148W	LED strip	24V	9067lm	90	DALI	BZRO17A20G15WOR	gold ●	2.694,00
4000K	148W	LED strip	24V	10074lm	90	DALI	BZRO17A20G15NBO	white ○	2.470,00
4000K	148W	LED strip	24V	10074lm	90	DALI	BZRO17A20G15NNE	black ●	2.470,00
4000K	148W	LED strip	24V	10074lm	90	DALI	BZRO17A20G15NOR	gold ●	2.694,00
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 150W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

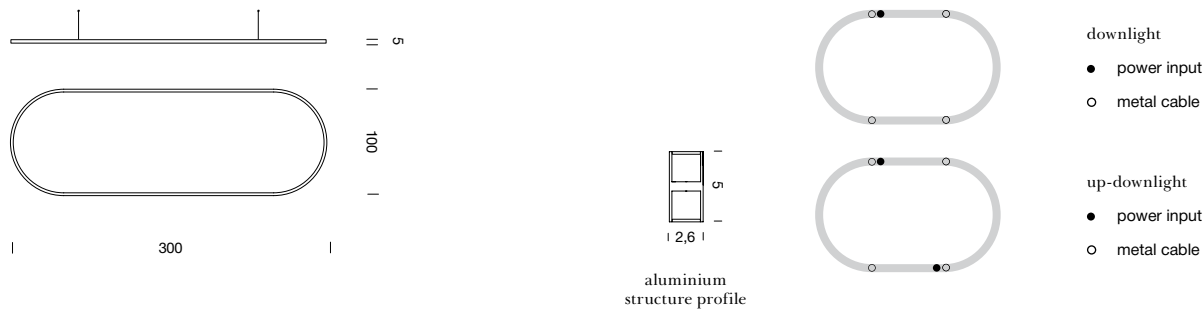

ZIRKOL OVAL 3 x 1m | DALI

DOWNLIGHT




CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	103W	LED strip	24V	5948lm	90	DALI	BZRO16A30G15DBO	white	○	2.190,00
2700K	103W	LED strip	24V	5948lm	90	DALI	BZRO16A30G15DNE	black	●	2.190,00
2700K	103W	LED strip	24V	5948lm	90	DALI	BZRO16A30G15DOR	gold	●	2.444,00
3000K	103W	LED strip	24V	6297lm	90	DALI	BZRO16A30G15WBO	white	○	2.190,00
3000K	103W	LED strip	24V	6297lm	90	DALI	BZRO16A30G15WNE	black	●	2.190,00
3000K	103W	LED strip	24V	6297lm	90	DALI	BZRO16A30G15WOR	gold	●	2.444,00
4000K	103W	LED strip	24V	6997lm	90	DALI	BZRO16A30G15NBO	white	○	2.190,00
4000K	103W	LED strip	24V	6997lm	90	DALI	BZRO16A30G15NNE	black	●	2.190,00
4000K	103W	LED strip	24V	6997lm	90	DALI	BZRO16A30G15NOR	gold	●	2.444,00
note	remote driver RAL 9005 black RAL 9016 white shipped assembled									
included	1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)									
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)									
customizations	find customizable features on p.13									

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	206W	LED strip	24V	11895lm	90	DALI	BZRO17A30G15DBO	white	○	3.089,00
2700K	206W	LED strip	24V	11895lm	90	DALI	BZRO17A30G15DNE	black	●	3.089,00
2700K	206W	LED strip	24V	11895lm	90	DALI	BZRO17A30G15DOR	gold	●	3.427,00
3000K	206W	LED strip	24V	12595lm	90	DALI	BZRO17A30G15WBO	white	○	3.089,00
3000K	206W	LED strip	24V	12595lm	90	DALI	BZRO17A30G15WNE	black	●	3.089,00
3000K	206W	LED strip	24V	12595lm	90	DALI	BZRO17A30G15WOR	gold	●	3.427,00
4000K	206W	LED strip	24V	13994lm	90	DALI	BZRO17A30G15NBO	white	○	3.089,00
4000K	206W	LED strip	24V	13994lm	90	DALI	BZRO17A30G15NNE	black	●	3.089,00
4000K	206W	LED strip	24V	13994lm	90	DALI	BZRO17A30G15NOR	gold	●	3.427,00
note	remote driver RAL 9005 black RAL 9016 white shipped assembled									
included	1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)									
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)									
customizations	find customizable features on p.13									

CE UK CA IP40



- downlight
- power input
 - metal cable
 - split
- up-downlight
- power input
 - metal cable
 - split

ZIRKOL OVAL 2,5 x 1,5m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	97W	LED strip	24V	5589lm	90	DALI	BZRO16B25G15DBO	white ○	2.247,00
2700K	97W	LED strip	24V	5589lm	90	DALI	BZRO16B25G15DNE	black ●	2.247,00
2700K	97W	LED strip	24V	5589lm	90	DALI	BZRO16B25G15DOR	gold ●	2.470,00
3000K	97W	LED strip	24V	5918lm	90	DALI	BZRO16B25G15WBO	white ○	2.247,00
3000K	97W	LED strip	24V	5918lm	90	DALI	BZRO16B25G15WNE	black ●	2.247,00
3000K	97W	LED strip	24V	5918lm	90	DALI	BZRO16B25G15WOR	gold ●	2.470,00
4000K	97W	LED strip	24V	6576lm	90	DALI	BZRO16B25G15NBO	white ○	2.247,00
4000K	97W	LED strip	24V	6576lm	90	DALI	BZRO16B25G15NNE	black ●	2.247,00
4000K	97W	LED strip	24V	6576lm	90	DALI	BZRO16B25G15NOR	gold ●	2.470,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	193W	LED strip	24V	11179lm	90	DALI	BZRO17B25G15DBO	white ○	3.146,00
2700K	193W	LED strip	24V	11179lm	90	DALI	BZRO17B25G15DNE	black ●	3.146,00
2700K	193W	LED strip	24V	11179lm	90	DALI	BZRO17B25G15DOR	gold ●	3.484,00
3000K	193W	LED strip	24V	11836lm	90	DALI	BZRO17B25G15WBO	white ○	3.146,00
3000K	193W	LED strip	24V	11836lm	90	DALI	BZRO17B25G15WNE	black ●	3.146,00
3000K	193W	LED strip	24V	11836lm	90	DALI	BZRO17B25G15WOR	gold ●	3.484,00
4000K	193W	LED strip	24V	13152lm	90	DALI	BZRO17B25G15NBO	white ○	3.146,00
4000K	193W	LED strip	24V	13152lm	90	DALI	BZRO17B25G15NNE	black ●	3.146,00
4000K	193W	LED strip	24V	13152lm	90	DALI	BZRO17B25G15NOR	gold ●	3.484,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x driver 100W (110/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

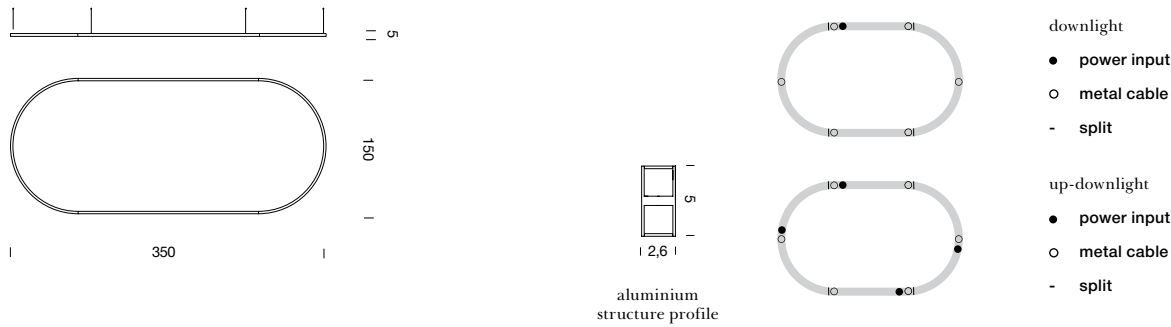

ZIRKOL OVAL 3,5 x 1,5m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	125W	LED strip	24V	7255lm	90	DALI	BZRO16B35G15DBO	white ○	2.642,00
2700K	125W	LED strip	24V	7255lm	90	DALI	BZRO16B35G15DNE	black ●	2.642,00
2700K	125W	LED strip	24V	7255lm	90	DALI	BZRO16B35G15DOR	gold ●	2.923,00
3000K	125W	LED strip	24V	7682lm	90	DALI	BZRO16B35G15WBO	white ○	2.642,00
3000K	125W	LED strip	24V	7682lm	90	DALI	BZRO16B35G15WNE	black ●	2.642,00
3000K	125W	LED strip	24V	7682lm	90	DALI	BZRO16B35G15WOR	gold ●	2.923,00
4000K	125W	LED strip	24V	8536lm	90	DALI	BZRO16B35G15NBO	white ○	2.642,00
4000K	125W	LED strip	24V	8536lm	90	DALI	BZRO16B35G15NNE	black ●	2.642,00
4000K	125W	LED strip	24V	8536lm	90	DALI	BZRO16B35G15NOR	gold ●	2.923,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	251W	LED strip	24V	14511lm	90	DALI	BZRO17B35G15DBO	white ○	3.484,00
2700K	251W	LED strip	24V	14511lm	90	DALI	BZRO17B35G15DNE	black ●	3.484,00
2700K	251W	LED strip	24V	14511lm	90	DALI	BZRO17B35G15DOR	gold ●	3.828,00
3000K	251W	LED strip	24V	15364lm	90	DALI	BZRO17B35G15WBO	white ○	3.484,00
3000K	251W	LED strip	24V	15364lm	90	DALI	BZRO17B35G15WNE	black ●	3.484,00
3000K	251W	LED strip	24V	15364lm	90	DALI	BZRO17B35G15WOR	gold ●	3.828,00
4000K	251W	LED strip	24V	17072lm	90	DALI	BZRO17B35G15NBO	white ○	3.484,00
4000K	251W	LED strip	24V	17072lm	90	DALI	BZRO17B35G15NNE	black ●	3.484,00
4000K	251W	LED strip	24V	17072lm	90	DALI	BZRO17B35G15NOR	gold ●	3.828,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x drivers 150W (220/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

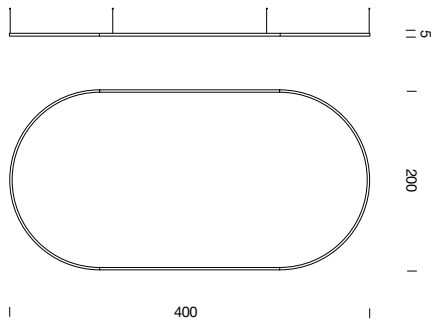

downlight/up-downlight

- power input
- metal cable
- split

ZIRKOL OVAL 4 x 2m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	148W	LED strip	24V	8536lm	90	DALI	BZRO16C40G15DBO	white ○	3.276,00
2700K	148W	LED strip	24V	8536lm	90	DALI	BZRO16C40G15DNE	black ●	3.276,00
2700K	148W	LED strip	24V	8536lm	90	DALI	BZRO16C40G15DOR	gold ●	3.630,00
3000K	148W	LED strip	24V	9067lm	90	DALI	BZRO16C40G15WBO	white ○	3.276,00
3000K	148W	LED strip	24V	9067lm	90	DALI	BZRO16C40G15WNE	black ●	3.276,00
3000K	148W	LED strip	24V	9067lm	90	DALI	BZRO16C40G15WOR	gold ●	3.630,00
4000K	148W	LED strip	24V	10074lm	90	DALI	BZRO16C40G15NBO	white ○	3.276,00
4000K	148W	LED strip	24V	10074lm	90	DALI	BZRO16C40G15NNE	black ●	3.276,00
4000K	148W	LED strip	24V	10074lm	90	DALI	BZRO16C40G15NOR	gold ●	3.630,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x driver 100W (110/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
2700K	296W	LED strip	24V	17126lm	90	DALI	BZRO17C40G15DBO	white ○	4.493,00
2700K	296W	LED strip	24V	17126lm	90	DALI	BZRO17C40G15DNE	black ●	4.493,00
2700K	296W	LED strip	24V	17126lm	90	DALI	BZRO17C40G15DOR	gold ●	4.946,00
3000K	296W	LED strip	24V	18134lm	90	DALI	BZRO17C40G15WBO	white ○	4.493,00
3000K	296W	LED strip	24V	18134lm	90	DALI	BZRO17C40G15WNE	black ●	4.493,00
3000K	296W	LED strip	24V	18134lm	90	DALI	BZRO17C40G15WOR	gold ●	4.946,00
4000K	296W	LED strip	24V	20149lm	90	DALI	BZRO17C40G15NBO	white ○	4.493,00
4000K	296W	LED strip	24V	20149lm	90	DALI	BZRO17C40G15NNE	black ●	4.493,00
4000K	296W	LED strip	24V	20149lm	90	DALI	BZRO17C40G15NOR	gold ●	4.946,00
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x drivers 150W (220/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)								
customizations	find customizable features on p.13								

CE UK CA IP40

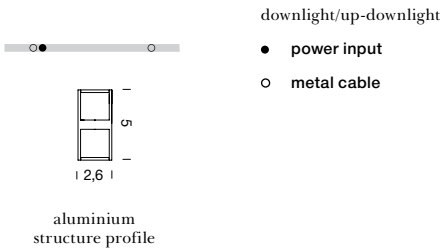

ZIRKOL LINEAR 1m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	14,5W	LED strip	24V	833lm	90	DALI	BZRL1610G15DBO	white	○	489,00
2700K	14,5W	LED strip	24V	833lm	90	DALI	BZRL1610G15DNE	black	●	489,00
2700K	14,5W	LED strip	24V	833lm	90	DALI	BZRL1610G15DOR	gold	●	541,00
3000K	14,5W	LED strip	24V	882lm	90	DALI	BZRL1610G15WBO	white	○	489,00
3000K	14,5W	LED strip	24V	882lm	90	DALI	BZRL1610G15WNE	black	●	489,00
3000K	14,5W	LED strip	24V	882lm	90	DALI	BZRL1610G15WOR	gold	●	541,00
4000K	14,5W	LED strip	24V	980lm	90	DALI	BZRL1610G15NBO	white	○	489,00
4000K	14,5W	LED strip	24V	980lm	90	DALI	BZRL1610G15NNE	black	●	489,00
4000K	14,5W	LED strip	24V	980lm	90	DALI	BZRL1610G15NOR	gold	●	541,00
note	remote driver RAL 9005 black RAL 9016 white shipped assembled									
included	1 x driver 20W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 x adjustable metal cable length 3m (including ceiling attachment)									
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)									
customizations	find customizable features on p.13									

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	29W	LED strip	24V	1666lm	90	DALI	BZRL1710G15DBO	white	○	552,00
2700K	29W	LED strip	24V	1666lm	90	DALI	BZRL1710G15DNE	black	●	552,00
2700K	29W	LED strip	24V	1666lm	90	DALI	BZRL1710G15DOR	gold	●	609,00
3000K	29W	LED strip	24V	1764lm	90	DALI	BZRL1710G15WBO	white	○	552,00
3000K	29W	LED strip	24V	1764lm	90	DALI	BZRL1710G15WNE	black	●	552,00
3000K	29W	LED strip	24V	1764lm	90	DALI	BZRL1710G15WOR	gold	●	609,00
4000K	29W	LED strip	24V	1960lm	90	DALI	BZRL1710G15NBO	white	○	552,00
4000K	29W	LED strip	24V	1960lm	90	DALI	BZRL1710G15NNE	black	●	552,00
4000K	29W	LED strip	24V	1960lm	90	DALI	BZRL1710G15NOR	gold	●	609,00
note	remote driver RAL 9005 black RAL 9016 white shipped assembled									
included	1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment)									
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)									
customizations	find customizable features on p.13									

CE UK CA IP40



aluminium
structure profile

- downlight/up-downlight
- power input
 - metal cable

ZIRKOL LINEAR 2m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	29W	LED strip	24V	1666lm	90	DALI	BZRL1620G15DBO	white	○	640,00
2700K	29W	LED strip	24V	1666lm	90	DALI	BZRL1620G15DNE	black	●	640,00
2700K	29W	LED strip	24V	1666lm	90	DALI	BZRL1620G15DOR	gold	●	708,00
3000K	29W	LED strip	24V	1764lm	90	DALI	BZRL1620G15WBO	white	○	640,00
3000K	29W	LED strip	24V	1764lm	90	DALI	BZRL1620G15WNE	black	●	640,00
3000K	29W	LED strip	24V	1764lm	90	DALI	BZRL1620G15WOR	gold	●	708,00
4000K	29W	LED strip	24V	1960lm	90	DALI	BZRL1620G15NBO	white	○	640,00
4000K	29W	LED strip	24V	1960lm	90	DALI	BZRL1620G15NNE	black	●	640,00
4000K	29W	LED strip	24V	1960lm	90	DALI	BZRL1620G15NOR	gold	●	708,00
note	remote driver RAL 9005 black RAL 9016 white shipped assembled									
included	1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment)									
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)									
customizations	find customizable features on p.13									

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	58W	LED strip	24V	3332lm	90	DALI	BZRL1720G15DBO	white	○	765,00
2700K	58W	LED strip	24V	3332lm	90	DALI	BZRL1720G15DNE	black	●	765,00
2700K	58W	LED strip	24V	3332lm	90	DALI	BZRL1720G15DOR	gold	●	843,00
3000K	58W	LED strip	24V	3528lm	90	DALI	BZRL1720G15WBO	white	○	765,00
3000K	58W	LED strip	24V	3528lm	90	DALI	BZRL1720G15WNE	black	●	765,00
3000K	58W	LED strip	24V	3528lm	90	DALI	BZRL1720G15WOR	gold	●	843,00
4000K	58W	LED strip	24V	3920lm	90	DALI	BZRL1720G15NBO	white	○	765,00
4000K	58W	LED strip	24V	3920lm	90	DALI	BZRL1720G15NNE	black	●	765,00
4000K	58W	LED strip	24V	3920lm	90	DALI	BZRL1720G15NOR	gold	●	843,00
note	remote driver RAL 9005 black RAL 9016 white shipped assembled									
included	1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment)									
optional accessory	driver box ceiling plate for remote driver (more specification on p.66-67)									
customizations	find customizable features on p.13									

CE UK CA IP40



- downlight/up-downlight
- power input
 - metal cable

aluminium structure profile

ZIRKOL LINEAR CEILING 1m | ON/OFF

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	28W	LED strip	220/240V	1900lm	90	ON/OFF	BZRLU410G15DBO	white	○	505,00
2700K	28W	LED strip	220/240V	1900lm	90	ON/OFF	BZRLU410G15DNE	black	●	505,00
2700K	28W	LED strip	220/240V	1900lm	90	ON/OFF	BZRLU410G15DOR	gold	●	557,00
3000K	28W	LED strip	220/240V	2000lm	90	ON/OFF	BZRLU410G15WBO	white	○	505,00
3000K	28W	LED strip	220/240V	2000lm	90	ON/OFF	BZRLU410G15WNE	black	●	505,00
3000K	28W	LED strip	220/240V	2000lm	90	ON/OFF	BZRLU410G15WOR	gold	●	557,00
4000K	28W	LED strip	220/240V	2100lm	90	ON/OFF	BZRLU410G15NBO	white	○	505,00
4000K	28W	LED strip	220/240V	2100lm	90	ON/OFF	BZRLU410G15NNE	black	●	505,00
4000K	28W	LED strip	220/240V	2100lm	90	ON/OFF	BZRLU410G15NOR	gold	●	557,00
note		integrated driver RAL 9005 black RAL 9016 white								
included		1 x driver Ultraslim 60W (220/240V)								
customizations		length								

CE UK CA IP40

ZIRKOL LINEAR CEILING 2m | ON/OFF

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
2700K	56W	LED strip	220/240V	3800lm	90	ON/OFF	BZRLU420G15DBO	white	○	728,00
2700K	56W	LED strip	220/240V	3800lm	90	ON/OFF	BZRLU420G15DNE	black	●	728,00
2700K	56W	LED strip	220/240V	3800lm	90	ON/OFF	BZRLU420G15DOR	gold	●	806,00
3000K	56W	LED strip	220/240V	4000lm	90	ON/OFF	BZRLU420G15WBO	white	○	728,00
3000K	56W	LED strip	220/240V	4000lm	90	ON/OFF	BZRLU420G15WNE	black	●	728,00
3000K	56W	LED strip	220/240V	4000lm	90	ON/OFF	BZRLU420G15WOR	gold	●	806,00
4000K	56W	LED strip	220/240V	4200lm	90	ON/OFF	BZRLU420G15NBO	white	○	728,00
4000K	56W	LED strip	220/240V	4200lm	90	ON/OFF	BZRLU420G15NNE	black	●	728,00
4000K	56W	LED strip	220/240V	4200lm	90	ON/OFF	BZRLU420G15NOR	gold	●	806,00
note		integrated driver RAL 9005 black RAL 9016 white								
included		1 x driver Ultraslim 60W (220/240V)								
customizations		length								

CE UK CA IP40



ZIRKOL LINEAR WALL 1m | ON/OFF

DIRECT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro	
2700K	14,5W	LED strip	220/240V	833lm	90	ON/OFF	BZRL4010G15DBO	white	○	557,00
2700K	14,5W	LED strip	220/240V	833lm	90	ON/OFF	BZRL4010G15DNE	black	●	557,00
2700K	14,5W	LED strip	220/240V	833lm	90	ON/OFF	BZRL4010G15DOR	gold	●	557,00
3000K	14,5W	LED strip	220/240V	882lm	90	ON/OFF	BZRL4010G15WBO	white	○	557,00
3000K	14,5W	LED strip	220/240V	882lm	90	ON/OFF	BZRL4010G15WNE	black	●	557,00
3000K	14,5W	LED strip	220/240V	882lm	90	ON/OFF	BZRL4010G15WOR	gold	●	557,00
4000K	14,5W	LED strip	220/240V	980lm	90	ON/OFF	BZRL4010G15NBO	white	○	557,00
4000K	14,5W	LED strip	220/240V	980lm	90	ON/OFF	BZRL4010G15NNE	black	●	557,00
4000K	14,5W	LED strip	220/240V	980lm	90	ON/OFF	BZRL4010G15NOR	gold	●	557,00
note		integrated driver RAL 9005 black RAL 9016 white								
included		1 x driver Ultraslim 60W (220/240V)								
customizations		length lumen output								



CE UK CA IP40

ZIRKOL LINEAR WALL 2m | ON/OFF

DIRECT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro	
2700K	29W	LED strip	220/240V	1666lm	90	ON/OFF	BZRL4020G15DBO	white	○	728,00
2700K	29W	LED strip	220/240V	1666lm	90	ON/OFF	BZRL4020G15DNE	black	●	728,00
2700K	29W	LED strip	220/240V	1666lm	90	ON/OFF	BZRL4020G15DOR	gold	●	728,00
3000K	29W	LED strip	220/240V	1764lm	90	ON/OFF	BZRL4020G15WBO	white	○	728,00
3000K	29W	LED strip	220/240V	1764lm	90	ON/OFF	BZRL4020G15WNE	black	●	728,00
3000K	29W	LED strip	220/240V	1764lm	90	ON/OFF	BZRL4020G15WOR	gold	●	728,00
4000K	29W	LED strip	220/240V	1960lm	90	ON/OFF	BZRL4020G15NBO	white	○	728,00
4000K	29W	LED strip	220/240V	1960lm	90	ON/OFF	BZRL4020G15NNE	black	●	728,00
4000K	29W	LED strip	220/240V	1960lm	90	ON/OFF	BZRL4020G15NOR	gold	●	728,00
note		integrated driver RAL 9005 black RAL 9016 white								
included		1 x driver Ultraslim 60W (220/240V)								
customizations		length lumen output								

CE UK CA IP40



aluminium
structure profile

- downlight
- power input
 - metal cable

ZIRKOL LINEAR UGR 1,40m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
3000K	45W	LED strip	24V	3600lm	90	DALI/PUSH	BZRL1614I42WBO	white	○	921,00
3000K	45W	LED strip	24V	3600lm	90	DALI/PUSH	BZRL1614I42WNE	black	●	921,00
4000K	45W	LED strip	24V	3700lm	90	DALI/PUSH	BZRL1614I42NBO	white	○	921,00
4000K	45W	LED strip	24V	3700lm	90	DALI/PUSH	BZRL1614I42NNE	black	●	921,00
note		remote driver RAL 9005 black RAL 9016 white								
included		1 x driver 60W DALI2 (220/240V) 1 driver box (40x5x4,5) 1 electrical cable length 3m 2 x adjustable metal cable length 3m (including ceiling attachments)								
customizations		length white reflectors								

CE UK CA IP40 UGR<19

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
3000K	60W	LED strip	24V	3600+1100lm	90	DALI/PUSH	BZRL1714I49WBO	white	○	988,00
3000K	60W	LED strip	24V	3600+1100lm	90	DALI/PUSH	BZRL1714I49WNE	black	●	988,00
4000K	60W	LED strip	24V	3700+1200lm	90	DALI/PUSH	BZRL1714I49NBO	white	○	988,00
4000K	60W	LED strip	24V	3700+1200lm	90	DALI/PUSH	BZRL1714I49NNE	black	●	988,00
note		remote driver RAL 9005 black RAL 9016 white								
included		1 x driver 60W DALI2 (220/240V) 1 driver box (40x5x4,5) 1 electrical cable length 3m 2 x adjustable metal cable length 3m (including ceiling attachments)								
customizations		length white reflectors								

CE UK CA IP40 UGR<19





- downlight/up-downlight
- power input
 - metal cable

aluminium
structure profile

ZIRKOL LINEAR CEILING UGR 1,46m | ON/OFF

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro	
3000K	40W	LED strip	220/240V	3600lm	90	ON/OFF	BZRLU414I42WBO	white	○	812,00
3000K	40W	LED strip	220/240V	3600lm	90	ON/OFF	BZRLU414I42WNE	black	●	812,00
4000K	40W	LED strip	220/240V	3700lm	90	ON/OFF	BZRLU414I42NBO	white	○	812,00
4000K	40W	LED strip	220/240V	3700lm	90	ON/OFF	BZRLU414I42NNE	black	●	812,00
note	integrated driver RAL 9005 black RAL 9016 white									
included	1 x driver Ultraslim 60W (220/240V)									
customizations	length white reflectors									

CE UK CA IP40 UGR<19

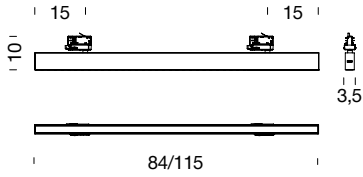

ZIRKOL TRACK UGR 0,84m | ON/OFF

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
3000K	26W	LED strip	220/240V	2160lm	90	ON/OFF	BZRL54084I42WBO	white ○	510,00
3000K	26W	LED strip	220/240V	2160lm	90	ON/OFF	BZRL54084I42WNE	black ●	510,00
4000K	26W	LED strip	220/240V	2220lm	90	ON/OFF	BZRL54084I42NBO	white ○	510,00
4000K	26W	LED strip	220/240V	2220lm	90	ON/OFF	BZRL54084I42NNE	black ●	510,00
note		integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V" p.86							
included		1 x driver Ultraslim 60W (220/240V)							
customizations		length white reflectors							



CE UK CA IP40 UGR<19

ZIRKOL TRACK UGR 1,15m | ON/OFF

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
3000K	35W	LED strip	220/240V	2957lm	90	ON/OFF	BZRL54115I42WBO	white ○	583,00
3000K	35W	LED strip	220/240V	2957lm	90	ON/OFF	BZRL54115I42WNE	black ●	583,00
4000K	35W	LED strip	220/240V	3039lm	90	ON/OFF	BZRL54115I42NBO	white ○	583,00
4000K	35W	LED strip	220/240V	3039lm	90	ON/OFF	BZRL54115I42NNE	black ●	583,00
note		integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V" p.86							
included		1 x driver Ultraslim 60W (220/240V)							
customizations		length white reflectors							

CE UK CA IP40 UGR<19

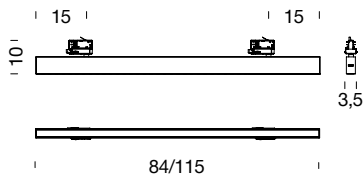

ZIRKOL TRACK OPAL 0,84m | ON/OFF

DOWNLIGHT										
CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
3000K	26W	LED strip	220/240V	1680lm	90	ON/OFF	BZRL54084G15WBO	white	○	448,00
3000K	26W	LED strip	220/240V	1680lm	90	ON/OFF	BZRL54084G15WNE	black	●	448,00
4000K	26W	LED strip	220/240V	1764lm	90	ON/OFF	BZRL54084G15NBO	white	○	448,00
4000K	26W	LED strip	220/240V	1764lm	90	ON/OFF	BZRL54084G15NNE	black	●	448,00
note		integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V" p.86								
included		1 x driver Ultraslim 60W (220/240V)								
customizations		length								

CE UK CA IP40

ZIRKOL TRACK OPAL 1,15m | ON/OFF

DOWNLIGHT										
CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish		Euro
3000K	35W	LED strip	220/240V	2300lm	90	ON/OFF	BZRL54115G15WBO	white	○	531,00
3000K	35W	LED strip	220/240V	2300lm	90	ON/OFF	BZRL54115G15WNE	black	●	531,00
4000K	35W	LED strip	220/240V	2415lm	90	ON/OFF	BZRL54115G15NBO	white	○	531,00
4000K	35W	LED strip	220/240V	2415lm	90	ON/OFF	BZRL54115G15NNE	black	●	531,00
note		integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V" p.86								
included		1 x driver Ultraslim 60W (220/240V)								
customizations		length								


CE UK CA IP40

SHAPE YOUR ZIRKOL CUSTOM

LINEAR



L1



L2

ROUND



D1




D1,5




D2


ANGLE




R0,4




R1,5




R2,5



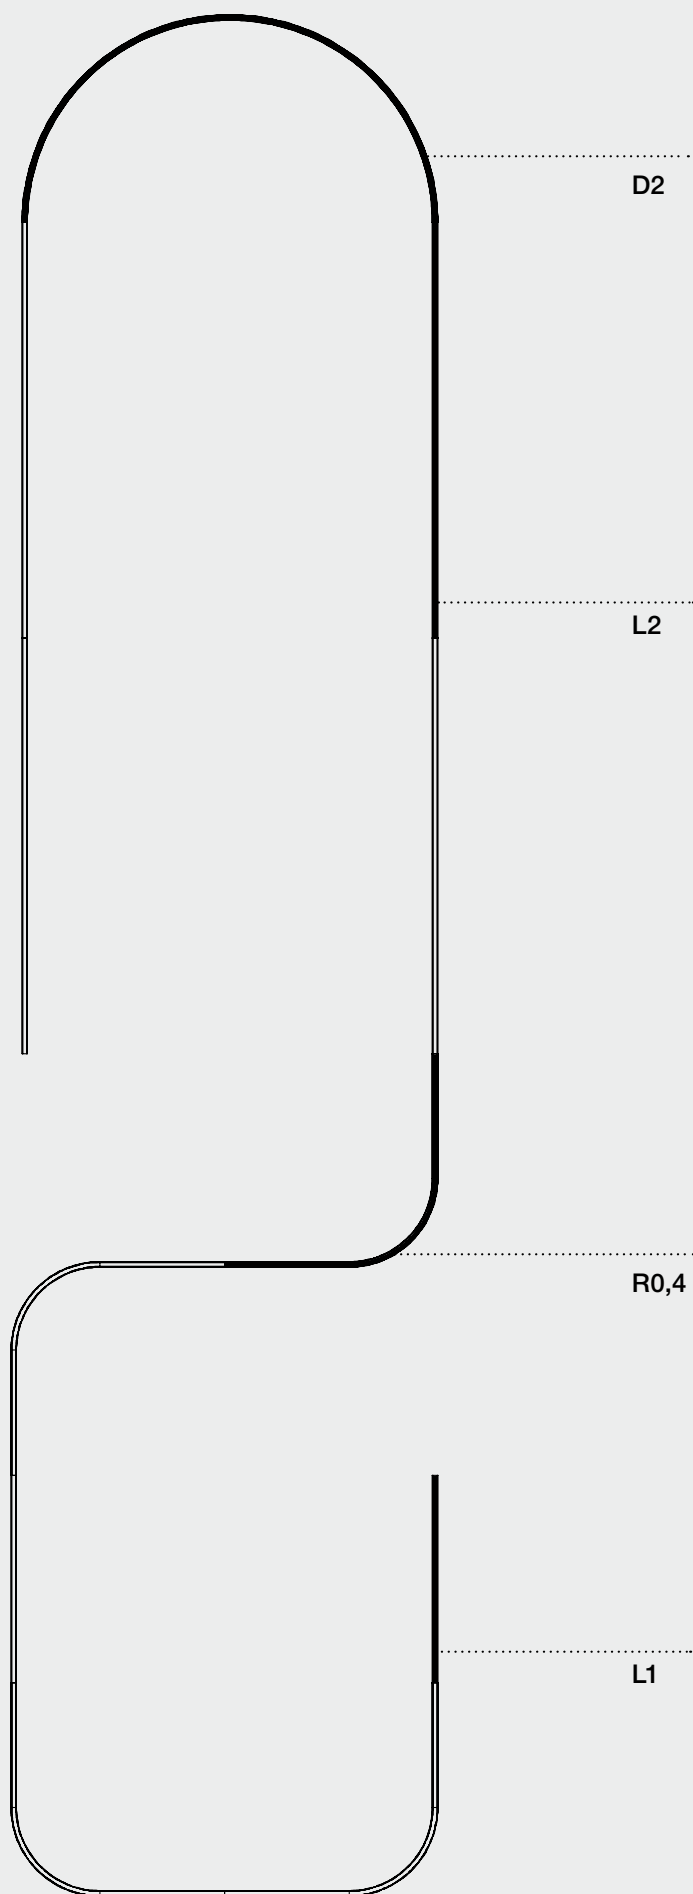

EXAMPLE OF A FEASIBLE CUSTOM ZIRKOL SHAPE

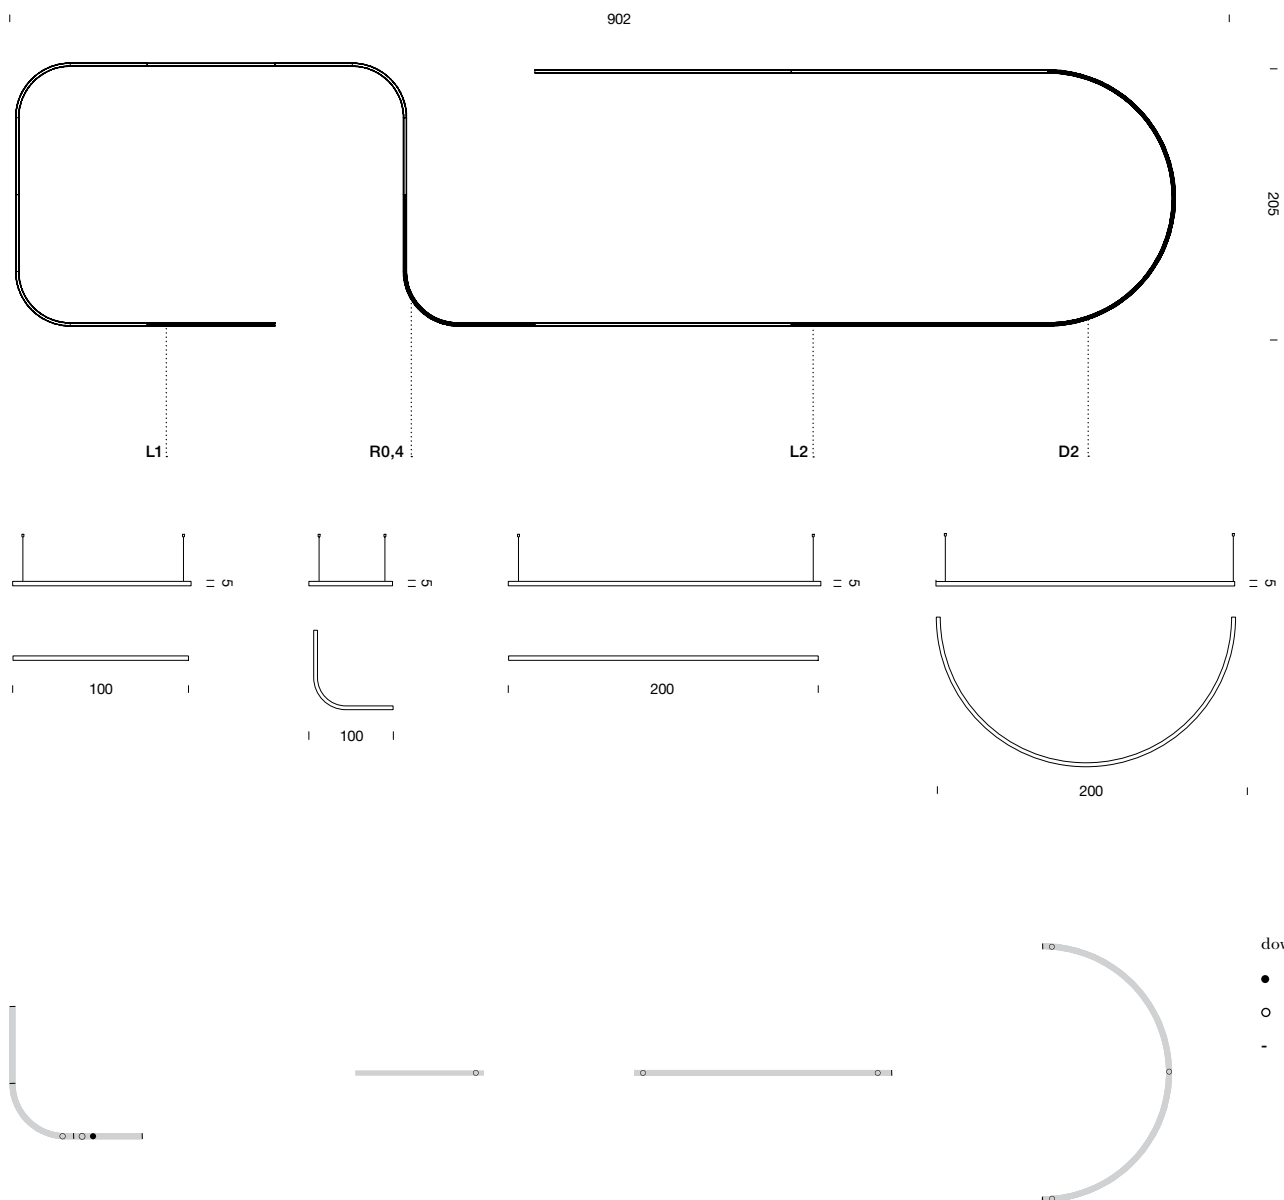

2xL1+4xL2+4xR0,4+D2 | DOWNLIGHT

CCT 4000K | 303W | 20904lm


● structure black

Linear LED | diffused | typ cri 90 | DALI 1-100%

canopy 1 driver - electrical cable length 5m | adjustable metal cable length 3m

| dimmer interface | ceiling attachments

customizations: optional accessories on p. 66-67 and custom features on p. 13

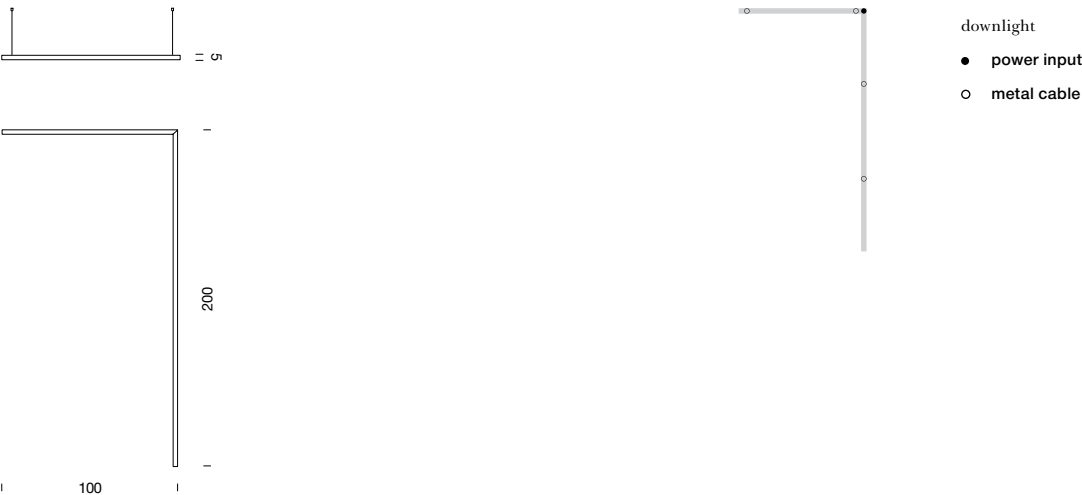


LINEAR ANGLE 90° | DOWNLIGHT

CCT 4000K | 45W | 2700lm

● structure black

Linear LED | diffused | typ cri 90 | DALI 1-100%
1 x ceiling plate for remote driver - 1 x electrical cable length 5m | 4 x adjustable metal
cable length 3m | 1 x driver (remote) | dimmer interface | 4 x ceiling attachment
Shipped assembled

customizations: optional accessories on p. 66-67 and custom features on p. 13

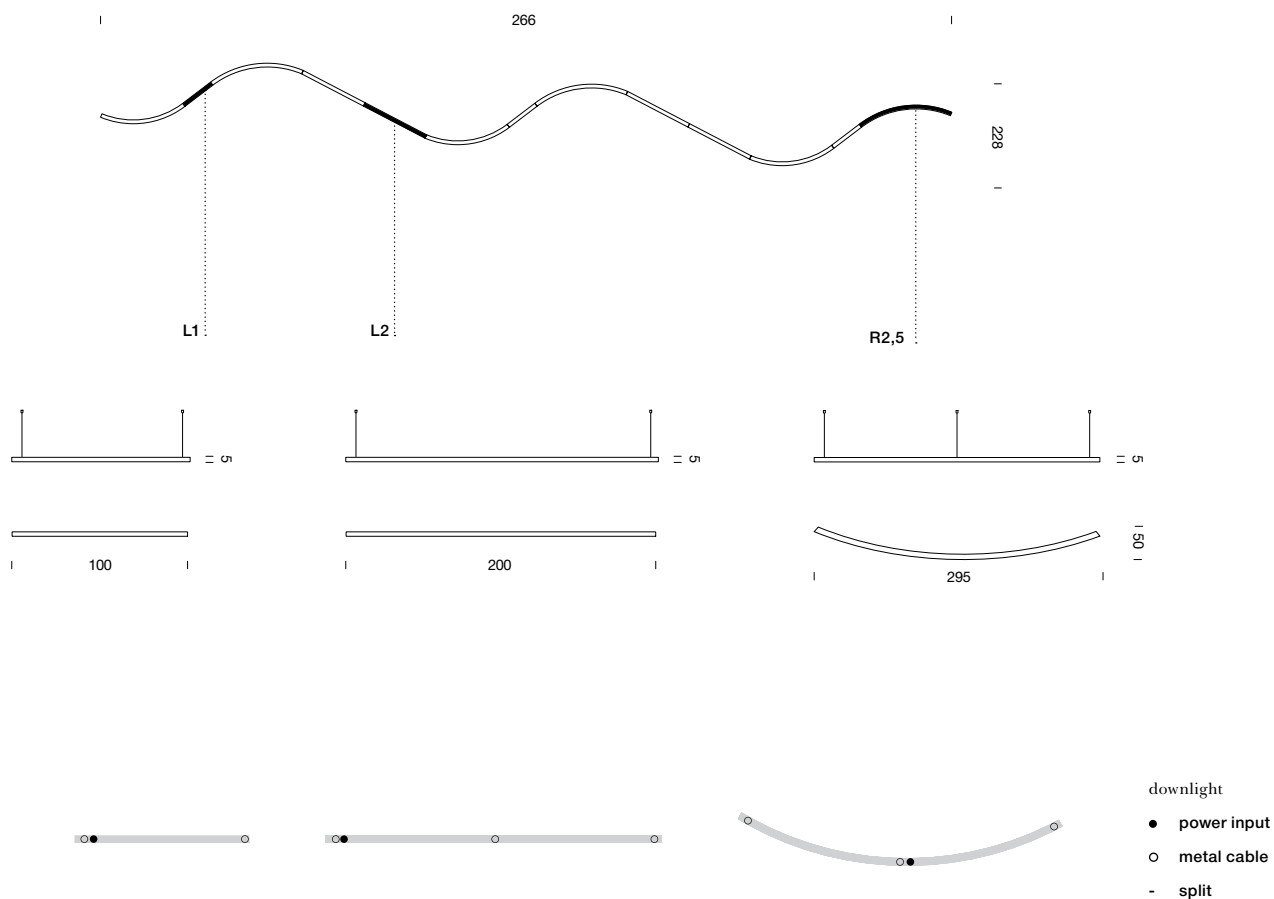

3xL1+4xL2+6xR2,5 | DOWNLIGHT

CCT 3000K | 435W | 26535lm

● structure black

Linear LED | diffused | typ cri 90 | DALI 1-100%

ceiling plate for remote driver - electrical cable length 5m | adjustable metal cable

length 3m | driver (remote) | dimmer interface | ceiling attachment

customizations: optional accessories on p. 66-67 and custom features on p. 13




2xL2+D2 | UP-DOWNLIGHT

CCT 2700K | 210W | 12600lm


● structure gold

Linear LED | diffused | typ cri 90 | DALI 1-100%
1 x canopy 1 driver - electrical cable length 5m | 5 x adjustable metal cable
length 3m | dimmer interface | 5 x ceiling attachment
customizations: optional accessories on p. 66-67 and custom features on p. 13



DRIVER


input voltage	output voltage	max power	switching	IP	dimensions cm	code	Euro
220/240V	24VDC	20W	ON/OFF	20	10,3x3,5x1,6	WPSU20W24V	30,00
220/240V	24VDC	60W	ON/OFF	20	18x5,2x3	WPSU60W24V	58,00
110/240V	24VDC	75W	ON/OFF	67	14x6,3x3,2	WPSU75W24VIP	115,00
110/240V	24VDC	100W	ON/OFF	67	14x6,3x3,2	WPSU100W24VIP	125,00
110/240V	24VDC	150W	ON/OFF	20	17,9x6,2x3	WPSU150W24V	146,00
200/240V	24VDC	250W	ON/OFF	20	19,5x6,7x3,2	WPSU250W24V	203,00
220/240V	24VDC	75W	TRIAC	20	21,2x5,4x3,3	WPST75W24V	172,00
220/240V	24VDC	60W	DALI2	20	36,1x3x2,1	WPSD60W24V	188,00
220/240V	24VDC	150W	DALI2/PUSH	20	35x3x2	WPSD150W24V	188,00
note		more info on p.172					



DIMMER INTERFACE


WIRED

dimensions x,y,z	switching	code	Euro
4,4x5,7x2,5	240W 24V 0-10V 1-10V PUSH DALI*	WDIMDALIHP	110,00
note		*to combine with driver ON/OFF	



WIRELESS

dimensions x,y,z	switching	code	Euro
4,4x5,7x2,5	CASAMBI PUSH*	WBLTSMART	208,00
note		*to combine with driver ON/OFF, on board (HOME version) or external mounting, iOS and Android compatible, set up by customer or by ILTI LUCE on commission	




REMOTE CONTROL KIT

dimensions x,y,z	max power	voltage	switching	code	Euro
1,2x0,5x5	120W	5V - 24V	REMOTE	WDIMKITREM	42,00
note		mono channel dimmer for LED with RF (radio frequency) wireless remote control , to be used as dimming solution in place of specific wiring			



ZIRKOL OPTIONAL ACCESSORIES

CEILING ATTACHMENT





version	finish	code	Euro
1 piece	chrome	BROSMINIST	4,00

CEILING PLATE FOR REMOTE DRIVERS



version	finish	code	Euro
surface application	white	BROSRONDBI	29,00
	black	BROSRONDBNE	29,00
	gold	BROSRONDBOR	39,00
recessed application	white	BROSRNCBI	58,00
	black	BROSRNCNE	58,00
	gold	BROSRNCOR	89,00
note to be used for decentralized solutions or remote mounting driver			





DRIVER BOX

version	finish	code	Euro
1 driver-1 electrical cable	white	BROSPS1BI	115,00
	black	BROSPS1NE	115,00
	gold	BROSPS1OR	146,00
1 driver-2 electrical cables	white	BROSPS2BI	125,00
	black	BROSPS2NE	125,00
	gold	BROSPS2OR	151,00



GAMMA Bernhard Osann

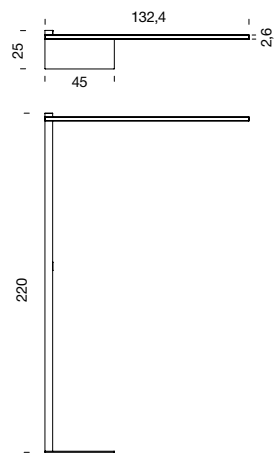


UGR + Uplight

GAMMA
UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	Euro
3000K	55W	LED strip	220/240V	3800lm	90	dimmer on board	MGAM35A149WNE	black	1350,00
4000K	55W	LED strip	220/240V	4000lm	90	dimmer on board	MGAM35A149NNE	black	1350,00
3000K	55W	LED strip	220/240V	3800lm	90	dimm on board + CASAMBI	MGAM3CA149WNE	black	1980,00
4000K	55W	LED strip	220/240V	4000lm	90	dimm on board + CASAMBI	MGAM3CA149NNE	black	1980,00
note		separate control dimmable push botton RAL 9005 black							
included		integrated driver							

CE UK CA IP40 UGR<19

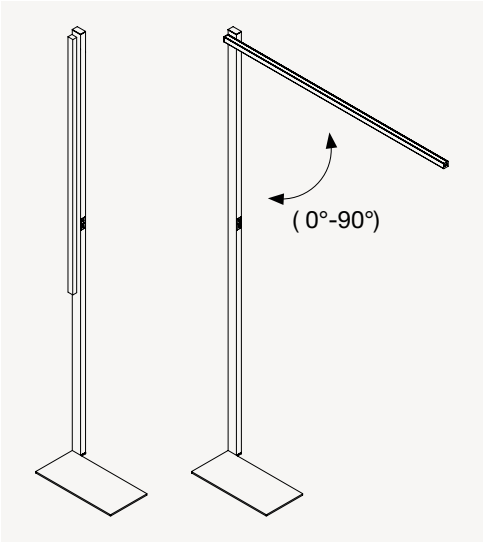


90° opening arm




SLACKLINE


PENDANT



WALL



CEILING



SLACKLINE

REGULAR PENDANT

version	voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
1m	24VDC	15W	LED strip	860lm	diffused	97	acc. to driver	pendant	3000K	grey	BSLA0310G26WAA	193,00
1m	24VDC	15W	LED strip	890lm	diffused	97	acc. to driver	pendant	4000K	grey	BSLA0310G26NAA	193,00
2m	24VDC	30W	LED strip	1720lm	diffused	97	acc. to driver	pendant	3000K	grey	BSLA0320G26WAA	260,00
2m	24VDC	30W	LED strip	1780lm	diffused	94	acc. to driver	pendant	4000K	grey	BSLA0320G26NAA	260,00
3m	24VDC	45W	LED strip	2580lm	diffused	97	acc. to driver	pendant	3000K	grey	BSLA0330G26WAA	302,00
3m	24VDC	45W	LED strip	2670lm	diffused	94	acc. to driver	pendant	4000K	grey	BSLA0330G26NAA	302,00

REGULAR WALL

1m	24VDC	15W	LED strip	860lm	diffused	97	acc. to driver	wall	3000K	grey	BSLA4010G26WAA	188,00
1m	24VDC	15W	LED strip	890lm	diffused	94	acc. to driver	wall	4000K	grey	BSLA4010G26NAA	188,00
2m	24VDC	30W	LED strip	1720lm	diffused	97	acc. to driver	wall	3000K	grey	BSLA4020G26WAA	255,00
2m	24VDC	30W	LED strip	1780lm	diffused	94	acc. to driver	wall	4000K	grey	BSLA4020G26NAA	255,00
3m	24VDC	45W	LED strip	2580lm	diffused	97	acc. to driver	wall	3000K	grey	BSLA4030G26WAA	310,00
3m	24VDC	45W	LED strip	2670lm	diffused	94	acc. to driver	wall	4000K	grey	BSLA4030G26NAA	310,00

REGULAR CEILING


1m	24VDC	15W	LED strip	860lm	diffused	97	acc. to driver	ceiling	3000K	grey	BSLA0410G26WAA	156,00
1m	24VDC	15W	LED strip	890lm	diffused	94	acc. to driver	ceiling	4000K	grey	BSLA0410G26NAA	156,00
2m	24VDC	30W	LED strip	1720lm	diffused	97	acc. to driver	ceiling	3000K	grey	BSLA0420G26WAA	240,00
2m	24VDC	30W	LED strip	1780lm	diffused	94	acc. to driver	ceiling	4000K	grey	BSLA0420G26NAA	240,00
3m	24VDC	45W	LED strip	2580lm	diffused	97	acc. to driver	ceiling	3000K	grey	BSLA0430G26WAA	281,00
3m	24VDC	45W	LED strip	2670lm	diffused	94	acc. to driver	ceiling	4000K	grey	BSLA0430G26NAA	281,00

note driver not included (more specifications on p.73), cable length 0,5m (ceiling, wall), 2m (pendant)


customizations CCT 2700K, body length, black finish

CE UK CA IP40

RECESSED



TRIM RECESSED



SLACKLINE

REGULAR RECESSED

version	voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
1m	24VDC	15W	LED strip	860lm	diffused	97	acc. to driver	recessed	3000K	grey	BSLA2110G26WAA	146,00
1m	24VDC	15W	LED strip	890lm	diffused	94	acc. to driver	recessed	4000K	grey	BSLA2110G26NAA	146,00
2m	24VDC	30W	LED strip	1720lm	diffused	97	acc. to driver	recessed	3000K	grey	BSLA2120G26WAA	234,00
2m	24VDC	30W	LED strip	1780lm	diffused	94	acc. to driver	recessed	4000K	grey	BSLA2120G26NAA	234,00
3m	24VDC	45W	LED strip	2580lm	diffused	97	acc. to driver	recessed	3000K	grey	BSLA2130G26WAA	276,00
3m	24VDC	45W	LED strip	2670lm	diffused	94	acc. to driver	recessed	4000K	grey	BSLA2130G26NAA	276,00

TRIM RECESSED

version	voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
1m	24VDC	15W	LED strip	560lm	diffused	97	acc. to driver	recessed	3000K	grey	BSLA0110G26WAA	140,00
1m	24VDC	15W	LED strip	660lm	diffused	94	acc. to driver	recessed	4000K	grey	BSLA0110G26NAA	140,00
2m	24VDC	30W	LED strip	1120lm	diffused	97	acc. to driver	recessed	3000K	grey	BSLA0120G26WAA	224,00
2m	24VDC	30W	LED strip	1320lm	diffused	94	acc. to driver	recessed	4000K	grey	BSLA0120G26NAA	224,00
3m	24VDC	45W	LED strip	1980lm	diffused	97	acc. to driver	recessed	3000K	grey	BSLA0130G26WAA	297,00
3m	24VDC	45W	LED strip	1680lm	diffused	94	acc. to driver	recessed	4000K	grey	BSLA0130G26NAA	297,00

note	driver not included (more specifications on p.73), cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
customizations	CCT 2700K, body length

CE UK CA IP40



TRIM RECESSED FIX KIT

version	dimensions cm	code	Euro
for slackline trim recessed	2,8x1,2x1,3	BSLACKITSTAF01	16,00
note	suitable for plasterboard, min. thickness 0,3cm / max. thickness 4cm		



SLACKLINE

MICRO

version	voltage/current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
1m	24VDC	15W	LED strip	457lm	diffused	90	acc. to driver	ceiling/wall	3000K	grey	BSLM0410G65WAA	104,00
1m	24VDC	15W	LED strip	540lm	diffused	90	acc. to driver	ceiling/wall	4000K	grey	BSLM0410G65NAA	104,00
2m	24VDC	30W	LED strip	914lm	diffused	90	acc. to driver	ceiling/wall	3000K	grey	BSLM0420G65WAA	162,00
2m	24VDC	30W	LED strip	1080lm	diffused	90	acc. to driver	ceiling/wall	4000K	grey	BSLM0420G65NAA	162,00
3m	24VDC	45W	LED strip	1377lm	diffused	90	acc. to driver	ceiling/wall	3000K	grey	BSLM0430G65NAA	240,00
3m	24VDC	45W	LED strip	1620lm	diffused	90	acc. to driver	ceiling/wall	4000K	grey	BSLM0430G65WAA	240,00
note		driver not included (in the below table), cable length 0,5m										
customizations		CCT 2700K, body length										




SLACKLINE DRIVER

input voltage	output voltage	max power	switching	IP	dimensions cm	code	Euro
220/240V	24VDC	20W	ON/OFF	20	10,3x3,5x1,6	WPSU20W24V	30,00
220/240V	24VDC	60W	ON/OFF	20	18x5,2x3	WPSU60W24V	58,00
220/240V	24VDC	120W	ON/OFF	20	30x4x3	WPSU120W24V	89,00
220/240V	24VDC	150W	ON/OFF	20	17,9x6,2x3	WPSU150W24V	146,00
200/240V	24VDC	250W	ON/OFF	20	19,5x6,7x3,2	WPSU250W24V	203,00
220/240V	24VDC	75W	TRIAC	20	21,2x5,4x3,3	WPST75W24V	172,00
220/240V	24VDC	60W	DALI2/PUSH	20	36,1x3x2,1	WPSD60W24V	188,00
220/240V	24VDC	150W	DALI2/PUSH	20	35x3x2	WPSD150W24V	188,00

DIMMER INTERFACE


WIRED

dimensions x,y,z	switching	code	Euro
4,4x5,7x2,5 240W 24V	0-10V 1-10V PUSH DALI*	WDIMDALIHP	110,00
note *to combine with driver ON/OFF			




WIRELESS

dimensions x,y,z	switching	code	Euro
4,4x5,7x2,5	CASAMBI PUSH*	WBLTSMART	208,00
note *to combine with driver ON/OFF, on board (HOME version) or external mounting, iOS and Android compatible, set up by customer or by ILTI LUCE on commission			



REMOTE CONTROL KIT

dimensions x,y,z	max power	voltage	switching	code	Euro
1,2x0,5x5	120W	5V - 24V	REMOTE	WDIMKITREM	42,00
note mono channel dimmer for LED with RF (radio frequency) wireless remote control , to be used as dimming solution in place of specific wiring					





MINIFLUX LINEA




MINIFLUX LINEA OPAL

DOWNLIGHT

voltage	max power	source	flux	mounting	CRI	switching	CCT	finish	code	Euro
24V	15W	LED strip	860lm	pendant	>97	TRIAC	2700K	black	BMLO2710G26DAN	405,00
24V	15W	LED strip	860lm	pendant	>97	TRIAC	2700K	red	BMLO2710G26DAR	445,00
24V	15W	LED strip	860lm	pendant	>97	TRIAC	2700K	gold	BMLO2710G26DAO	445,00
24V	15W	LED strip	905lm	pendant	>97	TRIAC	3000K	black	BMLO2710G26WAN	405,00
24V	15W	LED strip	905lm	pendant	>97	TRIAC	3000K	red	BMLO2710G26WAR	445,00
24V	15W	LED strip	905lm	pendant	>97	TRIAC	3000K	gold	BMLO2710G26WAO	445,00
24V	15W	LED strip	860lm	pendant	>97	DALI	2700K	black	BMLO1610G26DAN	445,00
24V	15W	LED strip	860lm	pendant	>97	DALI	2700K	red	BMLO1610G26DAR	490,00
24V	15W	LED strip	860lm	pendant	>97	DALI	2700K	gold	BMLO1610G26DAO	490,00
24V	15W	LED strip	905lm	pendant	>97	DALI	3000K	black	BMLO1610G26WAN	445,00
24V	15W	LED strip	905lm	pendant	>97	DALI	3000K	red	BMLO1610G26WAR	490,00
24V	15W	LED strip	905lm	pendant	>97	DALI	3000K	gold	BMLO1610G26WAO	490,00
note	driver included canopy RAL 9005 black for black finish canopy RAL 9016 white for red/gold finish									
included	canopy with 1 x driver 1 x electrical cable 3m 2 x adjustable metal cables 2m									
customizations	tube length									

CE UK CA IP40

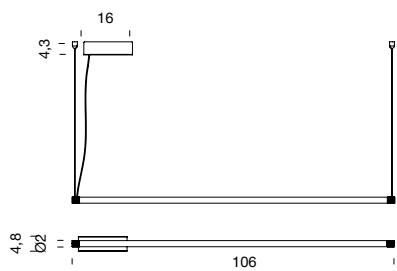

MINIFLUX LINEA TRANSPARENT

DOWNLIGHT

voltage	max power	source	flux	mounting	CRI	switching	CCT	finish	code	Euro
24V	15W	LED strip	852lm	pendant	>97	TRIAC	2700K	black	BMLT2710G26DAN	430,00
24V	15W	LED strip	852lm	pendant	>97	TRIAC	2700K	white	BMLT2710G26DBO	430,00
24V	15W	LED strip	852lm	pendant	>97	TRIAC	2700K	gold	BMLT2710G26DAO	475,00
24V	15W	LED strip	897lm	pendant	>97	TRIAC	3000K	black	BMLT2710G26WAN	430,00
24V	15W	LED strip	897lm	pendant	>97	TRIAC	3000K	white	BMLT2710G26WBO	430,00
24V	15W	LED strip	897lm	pendant	>97	TRIAC	3000K	gold	BMLT2710G26WAO	475,00
24V	15W	LED strip	852lm	pendant	>97	DALI	2700K	black	BMLT1610G26DAN	475,00
24V	15W	LED strip	852lm	pendant	>97	DALI	2700K	white	BMLT1610G26DBO	475,00
24V	15W	LED strip	852lm	pendant	>97	DALI	2700K	gold	BMLT1610G26DAO	530,00
24V	15W	LED strip	897lm	pendant	>97	DALI	3000K	black	BMLT1610G26WAN	475,00
24V	15W	LED strip	897lm	pendant	>97	DALI	3000K	white	BMLT1610G26WBO	475,00
24V	15W	LED strip	897lm	pendant	>97	DALI	3000K	gold	BMLT1610G26WAO	530,00
note	driver included canopy RAL 9005 black for black finish canopy RAL 9016 white for white/gold finish									
included	canopy with 1 x driver 1 x electrical cable 3m 2 x adjustable metal cables 2m									
customizations	tube length									

CE UK CA IP40



MINIFLUX LINEA WALL 8°

voltage	max power	source	flux	mounting	CRI	switching	CCT	finish	code	Euro
24V	12W	LED strip	681lm	wall	>97	push-button	2700K	black	BMLA3908026DAN	475,00
24V	12W	LED strip	717lm	wall	>97	push-button	3000K	black	BMLA3908026WAN	475,00
note		driver included RAL 9005 black								
included		wall support with integrated driver and dimmable push botton								
customizations		tube length external electrical cable								



CE UK CA IP40




MINIFLUX LINEA WALL

voltage	max power	source	flux	mounting	CRI	switching	CCT	finish	code	Euro
24V	12W	LED strip	681lm	wall	>97	push-button	2700K	black	BMLW3908026DAN	475,00
24V	12W	LED strip	717lm	wall	>97	push-button	3000K	black	BMLW3908026WAN	475,00
note		driver included RAL 9005 black								
included		wall support with integrated driver and dimmable push botton								
customizations		tube length external electrical cable								

CE UK CA IP40



direct light emission
for Miniflux linea opal
standard application



indirect light emission for
Miniflux linea transparent
standard application

MINIFLUX LINEA WALL - C

OPAL DIRECT

voltage	max power	source	flux	mounting	CRI	switching	CCT	finish	code	Euro
24V	15W	LED strip	860lm	wall	>97	according to driver	2700K	black	BMLC4010G26DAN	271,00
24V	15W	LED strip	860lm	wall	>97	according to driver	2700K	red	BMLC4010G26DAR	302,00
24V	15W	LED strip	860lm	wall	>97	according to driver	2700K	gold	BMLC4010G26DAO	302,00
24V	15W	LED strip	905lm	wall	>97	according to driver	3000K	black	BMLC4010G26WAN	271,00
24V	15W	LED strip	905lm	wall	>97	according to driver	3000K	red	BMLC4010G26WAR	302,00
24V	15W	LED strip	905lm	wall	>97	according to driver	3000K	gold	BMLC4010G26WAO	302,00
note	driver not included , more specification on next page									
included	2 x clip included									
customizations	tube length Indirect light emission external electrical cable									

CE UK CA IP40

TRANSPARENT INDIRECT

voltage	max power	source	flux	mounting	CRI	switching	CCT	finish	code	Euro
24V	15W	LED strip	852lm	pendant	>97	according to driver	2700K	black	BMLC4210026DAN	323,00
24V	15W	LED strip	852lm	pendant	>97	according to driver	2700K	white	BMLC4210026DBO	323,00
24V	15W	LED strip	852lm	pendant	>97	according to driver	2700K	gold	BMLC4210026DAO	396,00
24V	15W	LED strip	897lm	pendant	>97	according to driver	3000K	black	BMLC4210026WAN	323,00
24V	15W	LED strip	897lm	pendant	>97	according to driver	3000K	white	BMLC4210026WBO	323,00
24V	15W	LED strip	897lm	pendant	>97	according to driver	3000K	gold	BMLC4210026WAO	396,00
note	driver not included, more specification on next page									
included	2 x clip included									
customizations	tube length direct light emission external electrical cable									

CE UK CA IP40

MINIFLUX LINEA WALL-C DRIVER

input voltage	output voltage	max power	switching	IP	dimensions cm	new code	Euro
220/240V	24VDC	20W	ON/OFF	20	13x3,5x1,6	WPSU20W24V	30,00
220/240V	24VDC	60W	ON/OFF	20	18x5,2x3	WPSU60W24V	58,00
220/240V	24VDC	120W	ON/OFF	20	30x4x3	WPSU120W24V	89,00
220/240V	24VDC	150W	ON/OFF	20	17,9x6,2x3	WPSU150W24V	146,00
180/240V	24VDC	30W	TRIAC	20	10,7x4x2,2	WPST30W24V	58,00
220/240V	24VDC	75W	TRIAC	20	21,2x5,4x3,3	WPST75W24V	172,00
100/240V	24VDC	30W	DALI	20	10,7x4x2,2	WPSD30W24V	115,00
220/240V	24VDC	60W	DALI2/PUSH	20	36,1x3x2,1	WPSD60W24V	188,00
220/240V	24VDC	150W	DALI2/PUSH	20	35x3x3	WPSD150W24V	188,00

DIMMER INTERFACE

WIRED




dimensions x,y,z	switching	code	Euro
4,4x5,7x2,5	240W 24V 0-10V 1-10V PUSH DALI*	WDIMDALIHP	110,00
note *to combine with driver ON/OFF			

WIRELESS

dimensions x,y,z	switching	code	Euro
4,4x5,7x2,5	CASAMBI PUSH*	WBLTSMART	208,00
note *to combine with driver ON/OFF, on board (HOME version) or external mounting, iOS and Android compatible, set up by customer or by ILTI LUCE on commission			


REMOTE CONTROL KIT

dimensions x,y,z	max power	voltage	switching	code	Euro
1,2x0,5x5	120W	5V - 24V	REMOTE	WDIMKITREM	42,00
note mono channel dimmer for LED with RF (radio frequency) wireless remote control , to be used as dimming solution in place of specific wiring					






FANTE ELBA CAPRI

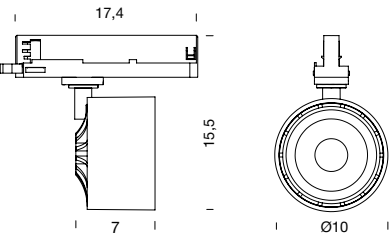

FANTE

voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
220/240V	20W	1x COB	2350lm	36°	90	ON/OFF	track	2700K	white	MFAN5401757DBO	156,00
220/240V	20W	1x COB	2350lm	36°	90	ON/OFF	track	2700K	black	MFAN5401757DNE	156,00
220/240V	20W	1x COB	2450lm	36°	90	ON/OFF	track	3000K	white	MFAN5401757WBO	156,00
220/240V	20W	1x COB	2450lm	36°	90	ON/OFF	track	3000K	black	MFAN5401757WNE	156,00
220/240V	28W	1x COB	3265lm	36°	90	ON/OFF	track	2700K	white	MFAN5401756DBO	198,00
220/240V	28W	1x COB	3265lm	36°	90	ON/OFF	track	2700K	black	MFAN5401756DNE	198,00
220/240V	28W	1x COB	3340lm	36°	90	ON/OFF	track	3000K	white	MFAN5401756WBO	198,00
220/240V	28W	1x COB	3340lm	36°	90	ON/OFF	track	3000K	black	MFAN5401756WNE	198,00
220/240V	28W	1x COB	3265lm	36°	90	dimmable DALI	track	2700K	white	MFAN5701756DBO	307,00
220/240V	28W	1x COB	3265lm	36°	90	dimmable DALI	track	2700K	black	MFAN5701756DNE	307,00
220/240V	28W	1x COB	3340lm	36°	90	dimmable DALI	track	3000K	white	MFAN5701756WBO	307,00
220/240V	28W	1x COB	3340lm	36°	90	dimmable DALI	track	3000K	black	MFAN5701756WNE	307,00
note driver on board, beam 15° on demand, rotating body, orientable spot 90°, compatible with TRACK 3C/DALI p.88											


CE UK CA IP20



ELBA

current	max power	source	flux (55°)	optic	CRI	switching	mounting	CCT	finish	code	Euro
220/240V	13W	1x COB	830lm	15°/55°	90	dimmable TRIAC	track	2700K	white	ELB LW2 81	208,00
220/240V	13W	1x COB	830lm	15°/55°	90	dimmable TRIAC	track	2700K	black	ELB LN2 81	208,00
220/240V	13W	1x COB	900lm	15°/55°	90	dimmable TRIAC	track	3000K	white	ELB LW3 81	208,00
220/240V	13W	1x COB	900lm	15°/55°	90	dimmable TRIAC	track	3000K	black	ELB LN3 81	208,00
100/240V	13W	1x COB	830lm	15°/55°	90	dimmable 0-10V	track	2700K	white	ELB LW2 82	245,00
100/240V	13W	1x COB	830lm	15°/55°	90	dimmable 0-10V	track	2700K	black	ELB LN2 82	245,00
100/240V	13W	1x COB	900lm	15°/55°	90	dimmable 0-10V	track	3000K	white	ELB LW3 82	245,00
100/240V	13W	1x COB	900lm	15°/55°	90	dimmable 0-10V	track	3000K	black	ELB LN3 82	245,00
note driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V p.88											


CE UK CA IP20



ELBA CEILING

voltage	max power	source	flux (55°)	optic	CRI	switching	mounting	CCT	finish	code	Euro
100/240V	13W	1x COB	830lm	15°/55°	90	dimmable TRIAC	ceiling	2700K	white	ELB LW2 41	219,00
100/240V	13W	1x COB	830lm	15°/55°	90	dimmable TRIAC	ceiling	2700K	black	ELB LN2 41	219,00
100/240V	13W	1x COB	900lm	15°/55°	90	dimmable TRIAC	ceiling	3000K	white	ELB LW3 41	219,00
100/240V	13W	1x COB	900lm	15°/55°	90	dimmable TRIAC	ceiling	3000K	black	ELB LN3 41	219,00
100/240V	13W	1x COB	830lm	15°/55°	90	dimmable 0-10V	ceiling	2700K	white	ELB LW2 42	260,00
100/240V	13W	1x COB	830lm	15°/55°	90	dimmable 0-10V	ceiling	2700K	black	ELB LN2 42	260,00
100/240V	13W	1x COB	900lm	15°/55°	90	dimmable 0-10V	ceiling	3000K	white	ELB LW3 42	260,00
100/240V	13W	1x COB	900lm	15°/55°	90	dimmable 0-10V	ceiling	3000K	black	ELB LN3 42	260,00
note driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°											


CE UK CA IP20



CAPRI

voltage	max power	source	flux (55°)	optic	CRI	switching	mounting	CCT	finish	code	Euro
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable triac	track	2700K	white	CAP LW2 81	260,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable triac	track	2700K	black	CAP LN2 81	260,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable triac	track	3000K	white	CAP LW3 81	260,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable triac	track	3000K	black	CAP LN3 81	260,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable 0-10V	track	2700K	white	CAP LW2 82	292,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable 0-10V	track	2700K	black	CAP LN2 82	292,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable 0-10V	track	3000K	white	CAP LW3 82	292,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable 0-10V	track	3000K	black	CAP LN3 82	292,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable DALI	track	2700K	white	CAP LW2 83	375,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable DALI	track	2700K	black	CAP LN2 83	375,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable DALI	track	3000K	white	CAP LW3 83	375,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable DALI	track	3000K	black	CAP LN3 83	375,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmer on board	track	2700K	white	CAP LN2 84	333,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmer on board	track	2700K	black	CAP LN 284	333,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmer on board	track	3000K	white	CAP LW 384	333,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmer on board	track	3000K	black	CAP LN 384	333,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable casambi	track	2700K	white	CAP LW2 85	510,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable casambi	track	2700K	black	CAP LN2 85	510,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable casambi	track	3000K	white	CAP LW3 85	510,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable casambi	track	3000K	black	CAP LN3 85	510,00
note driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V p.88											


CE UK CA IP20



CAPRI CEILING

voltage	max power	source	flux (55°)	optic	CRI	switching	mounting	CCT	finish	code	Euro
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable triac	ceiling	2700K	white	CAP LW2 41	281,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable triac	ceiling	2700K	black	CAP LN2 41	281,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable triac	ceiling	3000K	white	CAP LW3 41	281,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable triac	ceiling	3000K	black	CAP LN3 41	281,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable 0-10V	ceiling	2700K	white	CAP LW2 42	318,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable 0-10V	ceiling	2700K	black	CAP LN2 42	318,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable 0-10V	ceiling	3000K	white	CAP LW3 42	318,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable 0-10V	ceiling	3000K	black	CAP LN3 42	318,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable DALI	ceiling	2700K	white	CAP LW2 43	401,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable DALI	ceiling	2700K	black	CAP LN2 43	401,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable DALI	ceiling	3000K	white	CAP LW3 43	401,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable DALI	ceiling	3000K	black	CAP LN3 43	401,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable casambi	ceiling	2700K	white	CAP LW2 45	590,00
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable casambi	ceiling	2700K	black	CAP LN2 45	590,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable casambi	ceiling	3000K	white	CAP LW3 45	590,00
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable casambi	ceiling	3000K	black	CAP LN3 45	590,00
note		driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°									

CE UK CA IP20



CAPRI PRO

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code	Euro
220/240V	23W	1x COB	1490lm	15°/55°	>97	DALI	2700K	white	MCAP5701971DBO	468,00
220/240V	23W	1x COB	1490lm	15°/55°	>97	DALI	2700K	black	MCAP5701971DNE	468,00
220/240V	23W	1x COB	1570lm	15°/55°	>97	DALI	3000K	white	MCAP5701971WBO	468,00
220/240V	23W	1x COB	1570lm	15°/55°	>97	DALI	3000K	black	MCAP5701971WNE	468,00
220/240V	23W	1x COB	1490lm	15°/55°	>97	dimmer on board	2700K	white	MCAP5901971DBO	448,00
220/240V	23W	1x COB	1490lm	15°/55°	>97	dimmer on board	2700K	black	MCAP5901971DNE	448,00
220/240V	23W	1x COB	1570lm	15°/55°	>97	dimmer on board	3000K	white	MCAP5901971WBO	448,00
220/240V	23W	1x COB	1570lm	15°/55°	>97	dimmer on board	3000K	black	MCAP5901971WNE	448,00
note driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V p.88										

CE UK CA IP20

ACCESSORIES
ANTI GLARE EFFECT



snoot filter



barndoor filter




honeycomb filter

ACCESSORIES

version	finish	dimensions cm	code	Euro
snoot	black	Ø7,5x9,2	MCAPSNOOT01	42,00
barndoor	black	8x9,5x9,2	MCAPBD01	58,00
honeycomb	black	Ø6,2x0,3	MCAPHC62	11,00
oval	black	Ø6,2x0,3	MCAPOF62	8,00
sanded glass	black	Ø6,2x0,3	MCAPSG62	8,00

CEILING/PENDANT




100/200/300




3,2

RECESSED



100/200/300



5,6

TRACK 3C-230V

version	voltage	switching	mounting	finish	code	Euro
1m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	ceiling, pendant	white	MTRK0110BI	36,00
1m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	ceiling, pendant	black	MTRK0110NE	36,00
2m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	ceiling, pendant	white	MTRK0120BI	71,00
2m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	ceiling, pendant	black	MTRK0120NE	71,00
3m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	ceiling, pendant	white	MTRK0130BI	104,00
3m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	ceiling, pendant	black	MTRK0130NE	104,00
1m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	recessed	white	MTRK0310BI	39,00
1m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	recessed	black	MTRK0310NE	39,00
2m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	recessed	white	MTRK0320BI	78,00
2m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	recessed	black	MTRK0320NE	78,00
3m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	recessed	white	MTRK0330BI	117,00
3m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	recessed	black	MTRK0330NE	117,00

CE UK IP20

TRACK -230V DALI/1-10V





version	voltage	switching	mounting	finish	code	Euro
1m	230V	DALI / 1-10V	ceiling, pendant	white	MTRK0210BI	47,00
1m	230V	DALI / 1-10V	ceiling, pendant	black	MTRK0210NE	47,00
2m	230V	DALI / 1-10V	ceiling, pendant	white	MTRK0220BI	94,00
2m	230V	DALI / 1-10V	ceiling, pendant	black	MTRK0220NE	94,00
3m	230V	DALI / 1-10V	ceiling, pendant	white	MTRK0230BI	141,00
3m	230V	DALI / 1-10V	ceiling, pendant	black	MTRK0230NE	141,00
1m	230V	DALI / 1-10V	recessed	white	MTRK0410BI	55,00
1m	230V	DALI / 1-10V	recessed	black	MTRK0410NE	55,00
2m	230V	DALI / 1-10V	recessed	white	MTRK0420BI	110,00
2m	230V	DALI / 1-10V	recessed	black	MTRK0420NE	110,00
3m	230V	DALI / 1-10V	recessed	white	MTRK0430BI	164,00
3m	230V	DALI / 1-10V	recessed	black	MTRK0430NE	164,00

CE UK IP20


TRACK 3C-230V ACCESSORY

version	voltage	switching	mounting	finish	code	Euro
Track Start DX	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKADX0BBI	16,00
Track Start DX	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKADX0BNE	16,00
Track Start SX	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKASX0BBI	16,00
Track Start SX	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKASX0BNE	16,00
Straight Coupler	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKJL0BBI	12,00
Straight Coupler	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKJL0BNE	12,00
Flexible Coupler	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKJF0BBI	67,00
Flexible Coupler	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKJF0BNE	67,00
Track End	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKEND00BI	3,00
Track End	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKEND00NE	3,00
Cover plate	230V	ON/OFF / TRIAC /CASAMBI /DOB	recessed	white	MTRKCOVBBI	6,00
Cover plate	230V	ON/OFF / TRIAC /CASAMBI /DOB	recessed	black	MTRKCOVBNE	6,00
Cover plate cross	230V	ON/OFF / TRIAC /CASAMBI /DOB	recessed	white	MTRKCOVXBBI	9,00
Cover plate cross	230V	ON/OFF / TRIAC /CASAMBI /DOB	recessed	black	MTRKCOVXBNE	9,00
Middle feed	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKAC0BBI	36,00
Middle feed	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKAC0BNE	36,00
L feed right	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKLDX0BBI	46,00
L feed right	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKLDX0BNE	46,00
L feed left	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKLSX0BBI	46,00
L feed left	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKLSX0BNE	46,00
T Feed right up	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKTD0BBI	89,00
T Feed right up	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKTD0BNE	89,00
T Feed right down	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKTD0BBI	89,00
T Feed right down	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKTD0BNE	89,00
T Feed left up	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKTS0BBI	89,00
T Feed left up	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKTS0BNE	89,00
T Feed left down	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKTS0BBI	89,00
T Feed left down	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKTS0BNE	89,00
X Feed	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKX0BBI	120,00
X Feed	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKX0BNE	120,00





3PHASE ACCESSORY (ON/OFF-TRIAC)

TRACK START
DX/SXL
FEEDMIDDLE
FEED

T-FEED




X-FEED


COVER PLATES (ONLY FOR
RECESSED TRACK INSTALLATION)TRACK
ENDFLEXIBLE
COUPLERSTRAIGHT
COUPLER

TRACK 3C-230V DALI/1-10V ACCESSORY


version	voltage	switching	mounting	finish	code	Euro
Track Start DX	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKADX0ABI	24,00
Track Start DX	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKADX0ANE	24,00
Track Start SX	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKASX0ABI	24,00
Track Start SX	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKASX0ANE	24,00
Straight Coupler	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKJL0ABI	17,00
Straight Coupler	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKJL0ANE	17,00
Flexible Coupler	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKJF0ABI	90,00
Flexible Coupler	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKJF0ANE	90,00
Track end	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKEND00BI	3,00
Track end	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKEND00NE	3,00
Cover plate	230V	DALI/ 1-10V	recessed	white	MTRKCOVABI	6,00
Cover plate	230V	DALI/ 1-10V	recessed	black	MTRKCOVANE	6,00
Cover plate cross	230V	DALI/ 1-10V	recessed	white	MTRKCOVXABI	9,00
Cover plate cross	230V	DALI/ 1-10V	recessed	black	MTRKCOVXANE	9,00
Middle feed	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKAC0ABI	55,00
Middle feed	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKAC0ANE	55,00
L feed right	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKLDX0ABI	59,00
L feed right	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKLDX0ANE	59,00
L feed left	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKLSX0ABI	59,00
L feed left	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKLSX0ANE	59,00
T Feed right up	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKTD0ABI	120,00
T Feed right up	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKTD0ANE	120,00
T Feed right down	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKTD0ABI	120,00
T Feed right down	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKTD0ANE	120,00
T Feed left up	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKTS0ABI	120,00
T Feed left up	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKTS0ANE	120,00
T Feed left down	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKTS0ABI	120,00
T Feed left down	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKTS0ANE	120,00
X Feed	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKX0ABI	156,00
X Feed	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKX0ANE	156,00

DALI ACCESSORY (DALI/1-10V)


TRACK START
DX/SX




L
FEED




MIDDLE
FEED




T-FEED




X-FEED




COVER PLATES (ONLY FOR
RECESSED TRACK
INSTALLATION)



TRACK
END



FLEXIBLE
COUPLER




STRAIGHT
COUPLER

TRACK 3C-230V DALI/1-10V ACCESSORY

version	voltage	switching	mounting	finish	code	Euro
Clip	230V	ON/OFF / TRIAC/ DALI/ 1-10V	ceiling, pendant	white	MTRKCL00BI	4,00
Clip	230V	ON/OFF / TRIAC/ DALI/ 1-10V	ceiling, pendant	black	MTRKCL00NE	4,00
Steel Clable 1,5m	230V	ON/OFF / TRIAC/ DALI/ 1-10V	pendant	white	MTRKCAB0015BI	18,00
Steel Clable 1,5m	230V	ON/OFF / TRIAC/ DALI/ 1-10V	pendant	black	MTRKCAB0015NE	18,00
Steel Clable 3m	230V	ON/OFF / TRIAC/ DALI/ 1-10V	pendant	white	MTRKCAB0030BI	22,00
Steel Clable 3m	230V	ON/OFF / TRIAC/ DALI/ 1-10V	pendant	black	MTRKCAB0030NE	22,00
Suspension nut M6	230V	ON/OFF / TRIAC/ DALI/ 1-10V	pendant		MTRKNUT	2,00


POLARITY INSTRUCTIONS

ON/OFF-TRIAC EXAMPLE

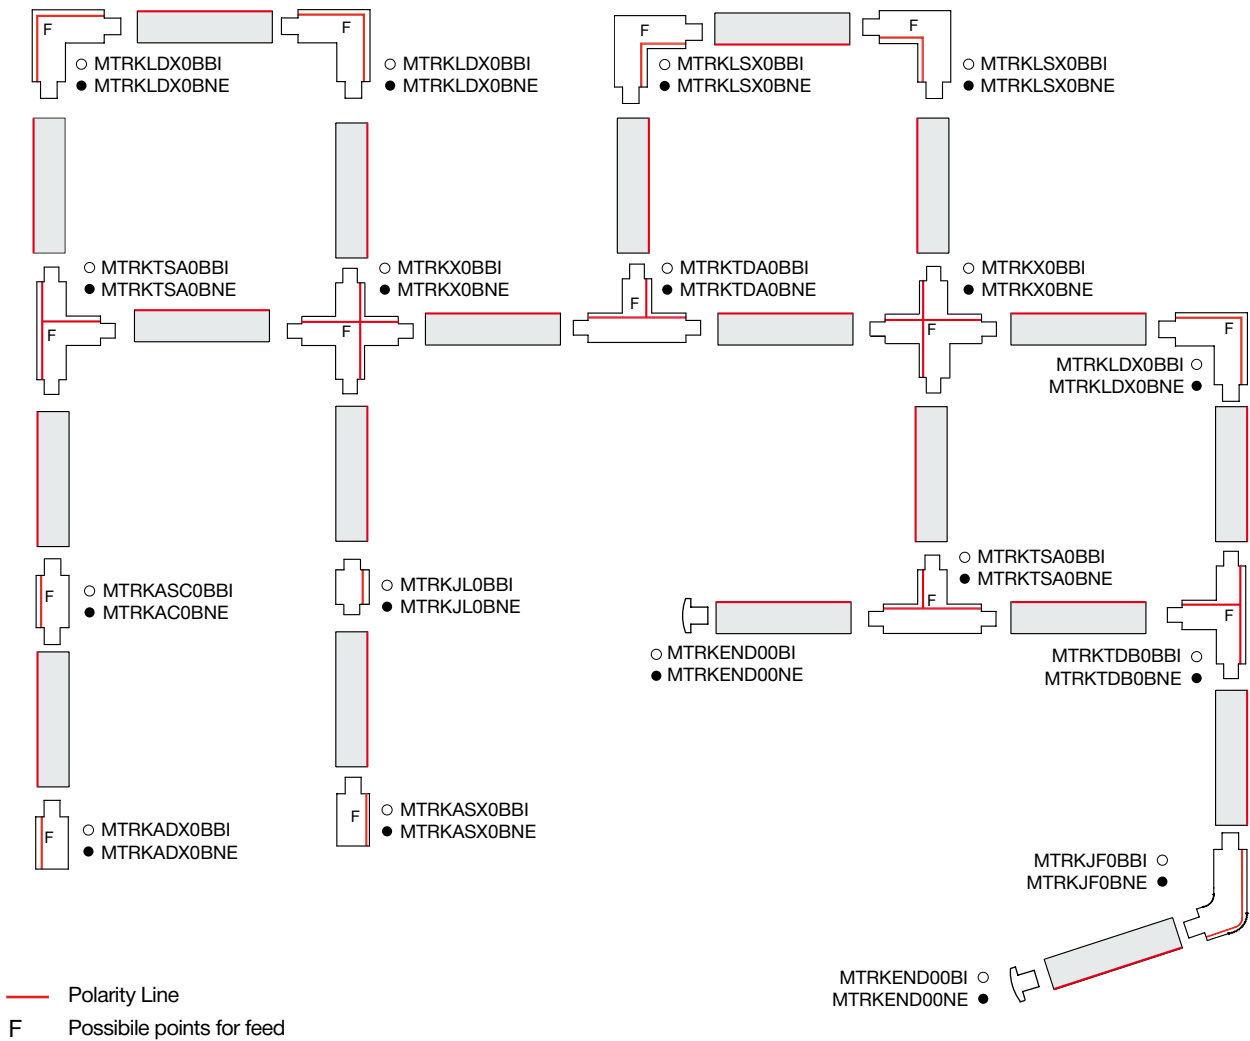




GRAVITY

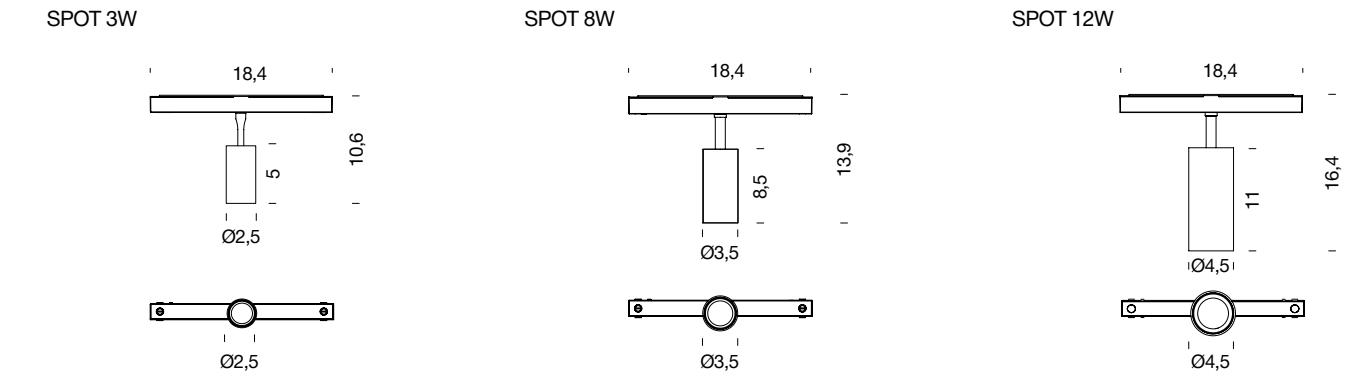

SPOT

3W										
voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code	Euro
48V	3W	1x LED	175lm	38°	90	DALI	2700K	black	MFLE5201746DAN	219,00
48V	3W	1x LED	205lm	38°	90	DALI	3000K	black	MFLE5201746WAN	219,00
8W										
48V	8W	1x LED	500lm	15°	90	DALI	2700K	black	MFLE5201344DAN	260,00
48V	8W	1x LED	630lm	38°	90	DALI	2700K	black	MFLE5201744DAN	260,00
48V	8W	1x LED	520lm	15°	90	DALI	3000K	black	MFLE5201344WAN	260,00
48V	8W	1x LED	665lm	38°	90	DALI	3000K	black	MFLE5201744WAN	260,00
12W										
48V	12W	1x LED	900lm	15°	90	DALI	2700K	black	MFLE5201345DAN	302,00
48V	12W	1x LED	890m	38°	90	DALI	2700K	black	MFLE5201745DAN	302,00
48V	12W	1x LED	965lm	15°	90	DALI	3000K	black	MFLE5201345WAN	302,00
48V	12W	1x LED	930lm	38°	90	DALI	3000K	black	MFLE5201745WAN	302,00
note		driver, track and accessories not included (more info on p.96-97)								

CE UK CA IP20

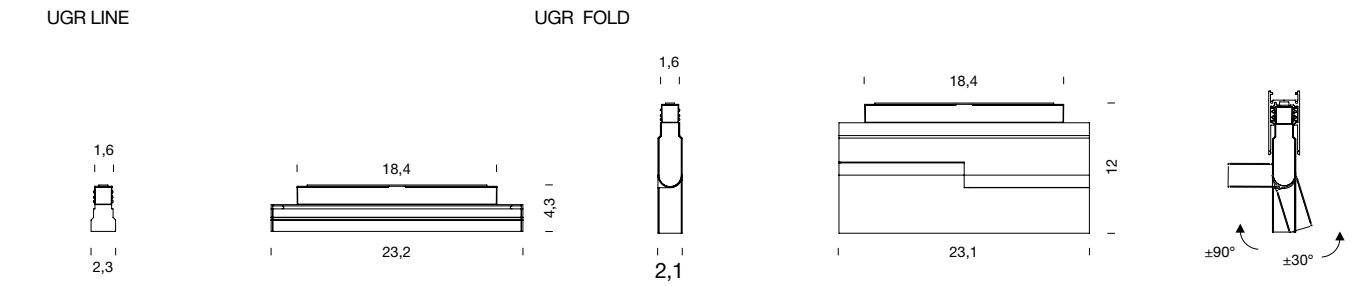

UGR LINE

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code	Euro
48V	15W	12x LED	1135lm	35°	90	DALI	2700K	black	MFLE5302U48DAN	250,00
48V	15W	12x LED	1320lm	35°	90	DALI	3000K	black	MFLE5302U48WAN	250,00
note		driver, track and accessories not included (more info on p.96-97)								

CE UK CA IP20 UGR<19


UGR FOLD

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code	Euro
48V	20W	12x LED	1560lm	36°	90	DALI	2700K	black	MFLE5202T48DAN	302,00
48V	20W	12x LED	1610lm	36°			3000K	black	MFLE5202T48WAN	302,00
note		driver, track and accessories not included (more info on p.96-97)								


customizations asymmetric optic

CE UK CA IP20 UGR<19

DASH 10W

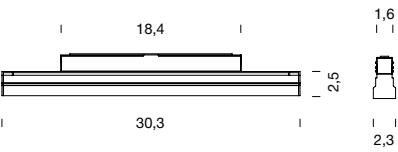

DASH 30W

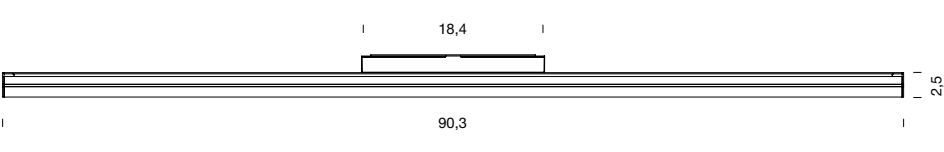

DASH

10W


voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code	Euro
48V	10W	LED strip	510lm	112°	90	DALI	2700K	black	MFLE5303G47DAN	219,00
48V	10W	LED strip	515lm	112°	90	DALI	3000K	black	MFLE5303G47WAN	219,00

30W

48V	30W	LED strip	1435lm	112°	90	DALI	2700K	black	MFLE5309G47DAN	292,00
48V	30W	LED strip	1510lm	112°	90	DALI	3000K	black	MFLE5309G47WAN	292,00

note driver, track and accessories not included (more info on p.96-97)


CE UK CA IP20

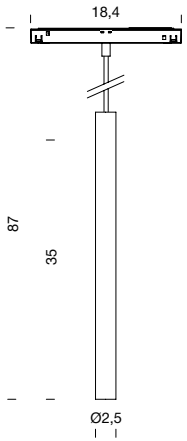

TUBE

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code	Euro
48V	10W	1x LED	468lm	30°	90	DALI	2700K	black	MGRA5601453DAN	333,00
48V	10W	1x LED	520m	112°	90	DALI	3000K	black	MGRA5601453WAN	333,00
note		driver, track and accessories not included (more info on p.96-97)								

CE UK CA IP20

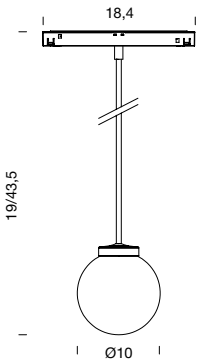

SPHERE


19CM (short rod)

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code	Euro
48V	5W	1x LED	384lm	diffused	90	DALI	2700K	black	MGRA5621G21DAN	365,00
48V	5W	1x LED	427lm	diffused	90	DALI	3000K	black	MGRA5621G21WAN	365,00
note		driver, track and accessories not included (more info on p.96-97)								

43,5CM (long rod)

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code	Euro
48V	5W	1x LED	384lm	diffused	90	DALI	2700K	black	MGRA5641G21DAN	405,00
48V	5W	1x LED	427lm	diffused	90	DALI	3000K	black	MGRA5641G21WAN	405,00
note		driver, track and accessories not included (more info on p.96-97)								

CE UK CA IP20

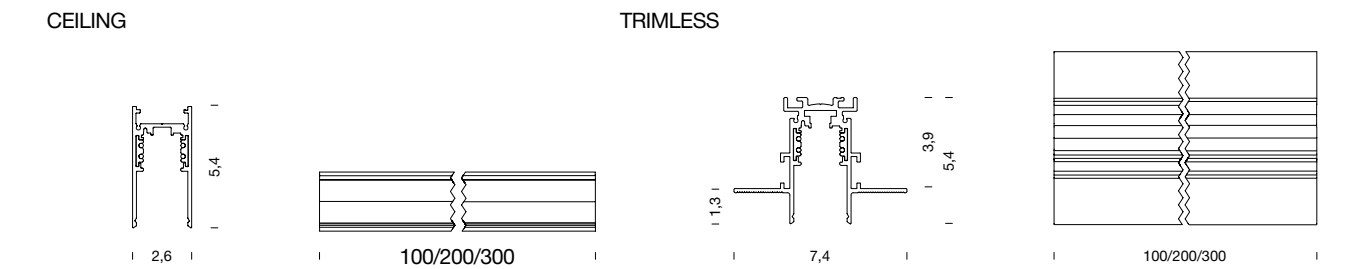

TRACK

version	voltage	mounting	finish	code	Euro
track 1m	48V	ceiling	black	MFLE0210NE	136,00
track 2m	48V	ceiling	black	MFLE0220NE	240,00
track 3m	48V	ceiling	black	MFLE0230NE	338,00
track 1m	48V	trimless	black	MFLE0810NE	136,00
track 2m	48V	trimless	black	MFLE0820NE	240,00
track 3m	48V	trimless	black	MFLE0830NE	338,00
note	pendant version available (more info on p.97)				
customizations	recessed trim version				


ACCESSORIES

version	voltage	mounting	finish	code	Euro
Track feeding	48V	ceiling/trimless	black	MFLEBKALIM	44,00
Track feeding joint	48V	ceiling/trimless	black	MFLEBKGIUNTOAL	24,00
Track flexible joint	48V	ceiling/trimless	black	MFLEJF0NE	78,00
Ceiling track end-cap	/	ceiling/trimless	black	MFLEEND00NE	10,00
Ceiling track end-cap hole	/	ceiling/trimless	black	MFLEEND01NE	15,00
Black cover screen	/	ceiling/trimless	black	MFLECOV0030NE	71,00
Ceiling track 90° corner	/	ceiling	black	MFLE90C00NE	91,00
Suspended Clip Alu	/	pendant/ceiling	black	MFLECL00AL	12,00
Suspension gripper + steel cable	/	pendant	black	MFLESUSP030CR	10,00
Trimless track 90° corner	/	trimless	black	MFLE90T00NE	91,00
Trimless track wall corner internal	/	trimless	black	MFLE90T01NE	91,00
Trimless track wall corner external	/	trimless	black	MFLE90T02NE	91,00
Trimless track mechanical joint	/	trimless	black	MFLEMJT00NE	10,00
Trimless track template	/	trimless	black	MFLE00TEMP	15,00


REMOTE DRIVER

version	voltage	max power	IP	switching	code	dimensions cm	Euro
48V	IN 100/305VAC - OUT 48VDC	240W	67	ON/OFF	WPSU240W48VIP	22x6,5x3,5	260,00

TRACK INTEGRATED DRIVER




load	voltage	max power	IP	switching	code	dimensions cm	Euro
48V	IN 220/240VAC - OUT 48VDC	250W	20	ON/OFF	MFLEALIM250/48	40x4,2x2,2	365,00




DRIVER BOX

load	finish	code	dimensions cm	Euro
1 driver-1 electrical cable	black	BROSPS1NE	31x8x6	115,00


COMPATIBLE WITH CEILING AND TRIMLESS TRACK





TRACK FEEDING




TRACK FEEDING JOINT

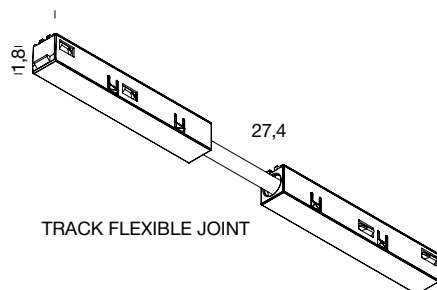


TRACK FLEXIBLE JOINT

CEILING
TRACK
END-CAPCEILING TRACK
END-CAP HOLE






COMPATIBLE WITH CEILING TRACK



CEILING TRACK 90° CORNER


SUSPENDED CLIP/
MECHANICAL JOINT
ALUMINUMSUSPENSION GRIPPER +
STEEL CABLEBLACK COVER
SCREEN


COMPATIBLE WITH TRIMLESS TRACK

TRIMLESS TRACK
90° CORNERTRIMLESS TRACK
WALL
CORNER INTERNALTRIMLESS TRACK
WALL
CORNER EXTERNALTRIMLESS TRACK
MECHANICAL JOINTBLACK COVER
SCREEN

GRAVITY


Technical installation scheme

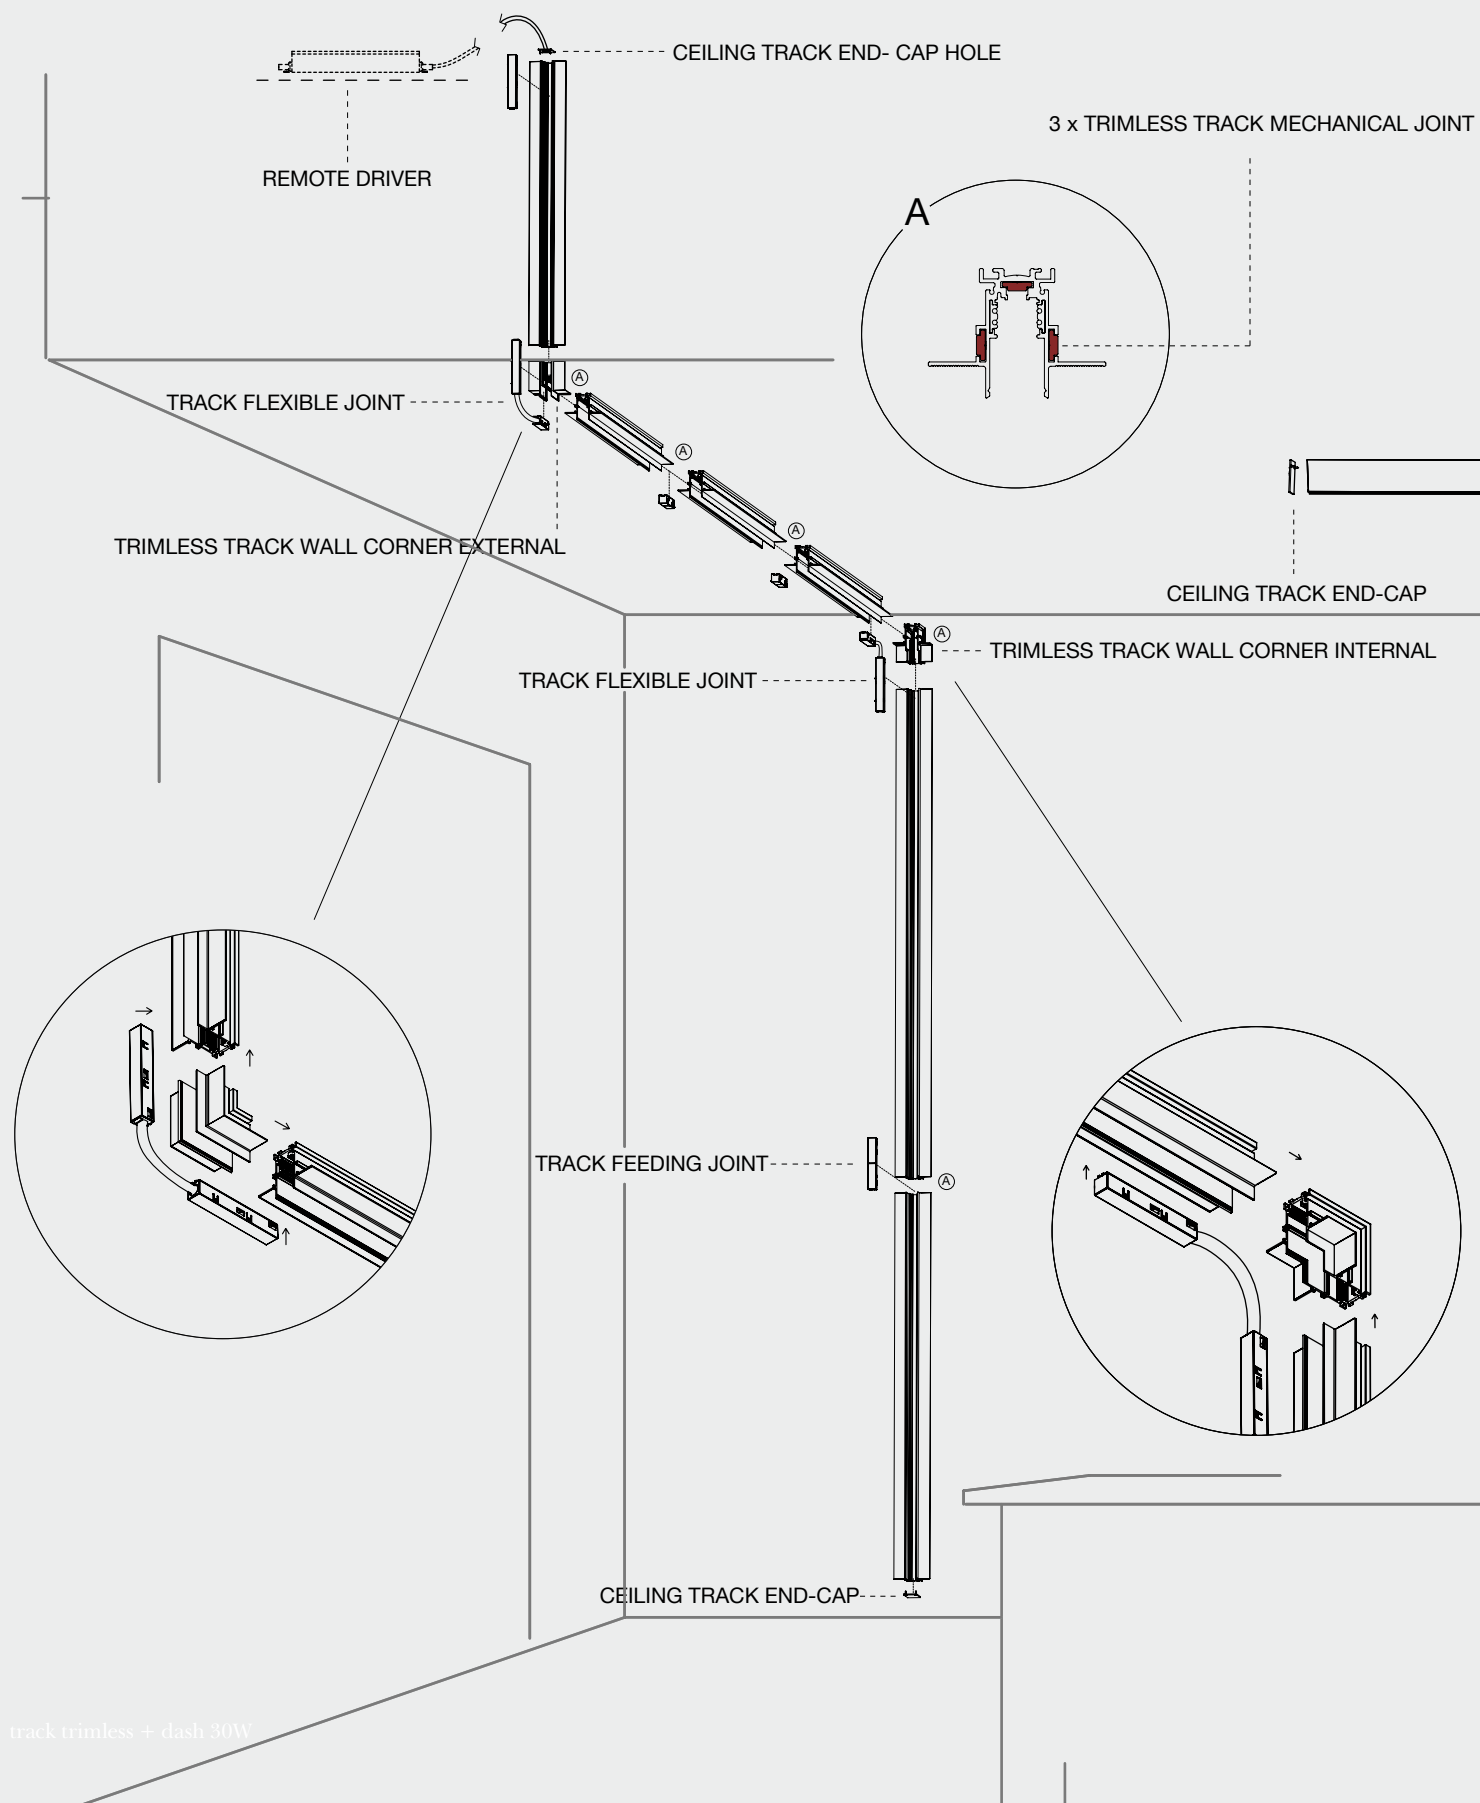

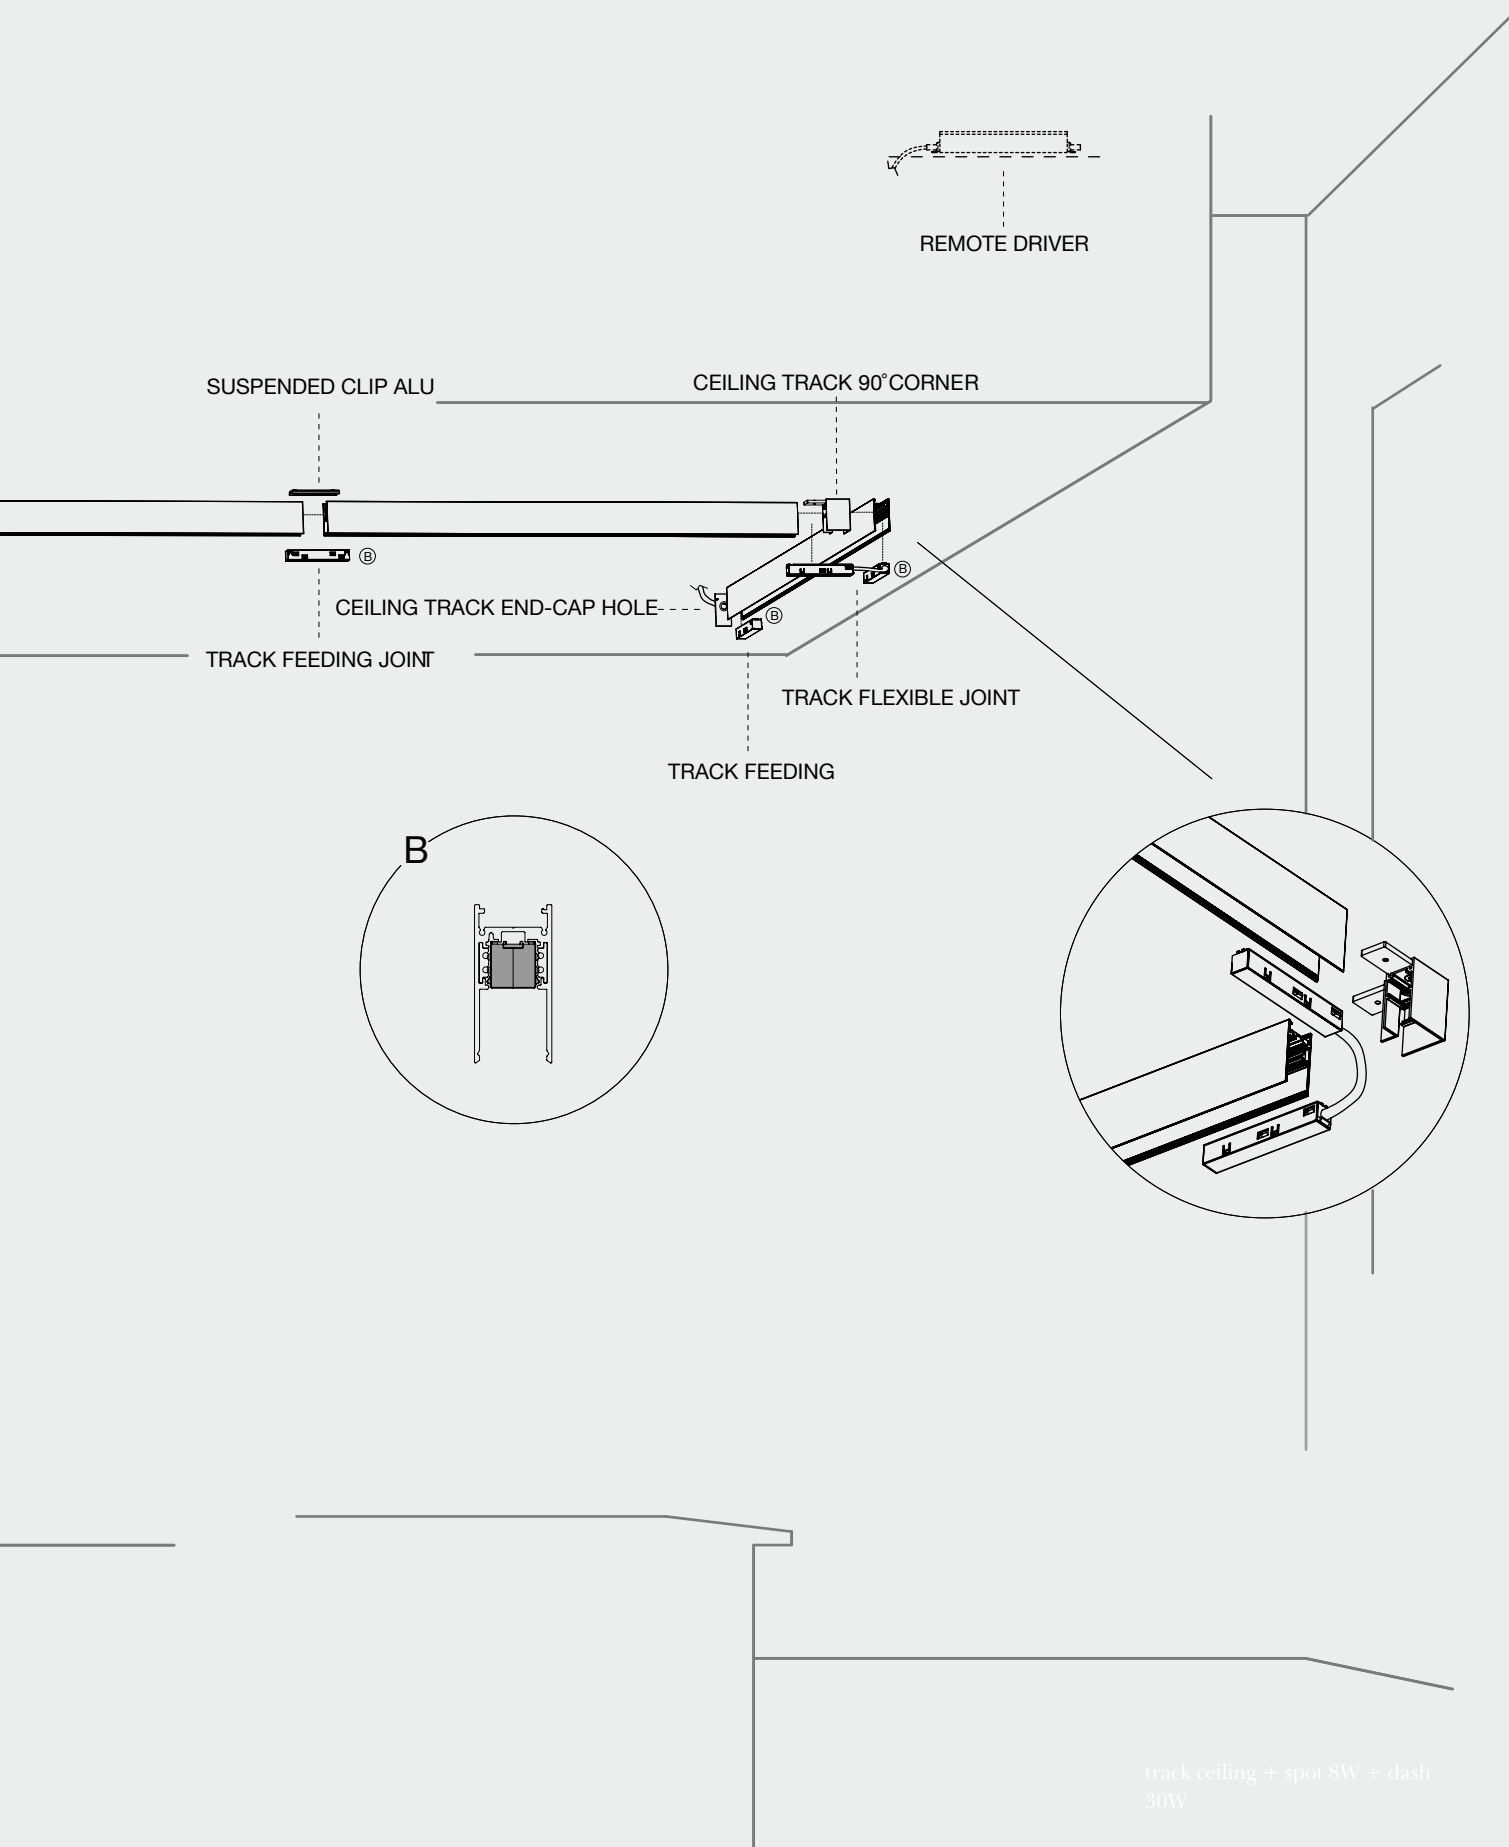




PLINT Massimo Colagrande

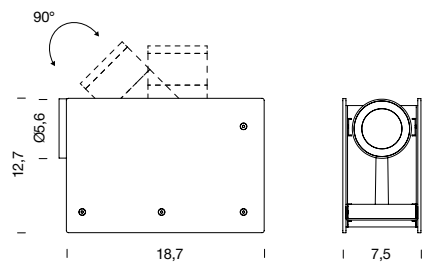

PLINT

voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
220/240V	13W	1x LED	900lm	direct adjustable 15°-55°	90	push dimm. on board	floor/table	2700K	black	PLT LN2 11	383,00
220/240V	13W	1x LED	900lm	direct adjustable 15°-55°	90	push dimm. on board	floor/table	3000K	black	PLT LN3 11	383,00
220/240V	13W	1x LED	900lm	direct adjustable 15°-55°	90	push dimm. on board	floor/table	4000K	black	PLT LN4 11	383,00
note driver integrated, adjustable beam 15°-55°, orientable spot 90°, cable length 3m											

CE UK CA IP20




PLINT BATTERY MINI

voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
5V	2,4W	1xLED	185lm	14°	90	on board	table	3000K	black	PLM BNN 11	310,00
5V	2,4W	1xLED	185lm	14°	90	on board	table	3000K	white	PLM BWN 11	310,00
5V	2,4W	1xLED	185lm	14°	90	on board	table	3000K	gold	PLM BON 11	310,00
5V	2,4W	1xLED	185lm	14°	90	on board	table	3000K	grey	PLM BDN 11	310,00
note cable included (USB-C), rechargeable, 5 hours battery life, 4,5 hours charge time (light off)											

CE UK CA IP20



FLEX SPOT



FLEX CEILING

FIXED OPTIC

current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	3000K	black	BFLE0401F21WAN	191,00
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	3000K	black	BFLE0401421WAN	191,00
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	4000K	black	BFLE0401F21NAN	191,00
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	4000K	black	BFLE0401421NAN	191,00
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	3000K	gold	BFLE0401F21WAO	206,00
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	3000K	gold	BFLE0401421WAO	206,00
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	4000K	gold	BFLE0401F21NAO	206,00
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	4000K	gold	BFLE0401421NAO	206,00
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	3000K	grey	BFLE0401F21WAA	191,00
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	3000K	grey	BFLE0401421WAA	191,00
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	4000K	grey	BFLE0401F21NAA	191,00
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	4000K	grey	BFLE0401421NAA	191,00
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	3000K	bronze grey	BFLE0401F21WAB	206,00
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	3000K	bronze grey	BFLE0401421WAB	206,00
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	4000K	bronze grey	BFLE0401F21NAB	206,00
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	4000K	bronze grey	BFLE0401421NAB	206,00

ZOOM OPTIC

350mA	4,2W	76lm (45°)	15°-45°	90	according to driver	wall-ceiling	3000K	black	BFLE0401921WAN	245,00
350mA	4,2W	80lm (45°)	15°-45°	90	according to driver	wall-ceiling	4000K	black	BFLE0401921NAN	245,00

note driver not included (in the below table), orientable spot $\pm 42^\circ$, orientable spot on ball joint 360° , series connection


customizations	CCT 2700K
----------------	-----------




FLEX CEILING DRIVER

load	input voltage	range current	max power	Setting	switching	IP	dimensions cm	code	Euro
for 1 to 2 spots	220/240V	350mA	12W	No	ON/OFF	20	9,8x3,9x2,2	WPSUND12350	30,00
for 1 to 3 spots	220/240V	350mA	17W	No	ON/OFF	20	12,2x3,8x2,4	WPSUND17350	47,00
for 1 to 2 spots	220-240V	350mA*	10W	Yes	TRIAC	20	11x3x2,2	WPSTST120-350	37,00
for 1 spot	220-240V	350mA*	10W	Yes	TRIAC	20	11x3x2,2	WPSTST350-700	32,00
for 1 spots	220-240V	350mA*	10W	Yes	1-10V	20	11x3x2,2	WPS1ST350-700	37,00
for 1 to 2 spots	220-240V	350mA*	10W	Yes	1-10V	20	11x3x2,2	WPS1ST120-350	52,00
for 1 to 3 spots	110-240V	350mA*	17W	Yes	DALI	20	12x5,2x2,2	WPSDST250-700	104,00
for 1 to 3 spots	220-240V	350mA*	18W	Yes	CASAMBI	20	9,7x4,3x3	WPSCST150-700	312,00

note	series connection, * to be setted
------	-----------------------------------

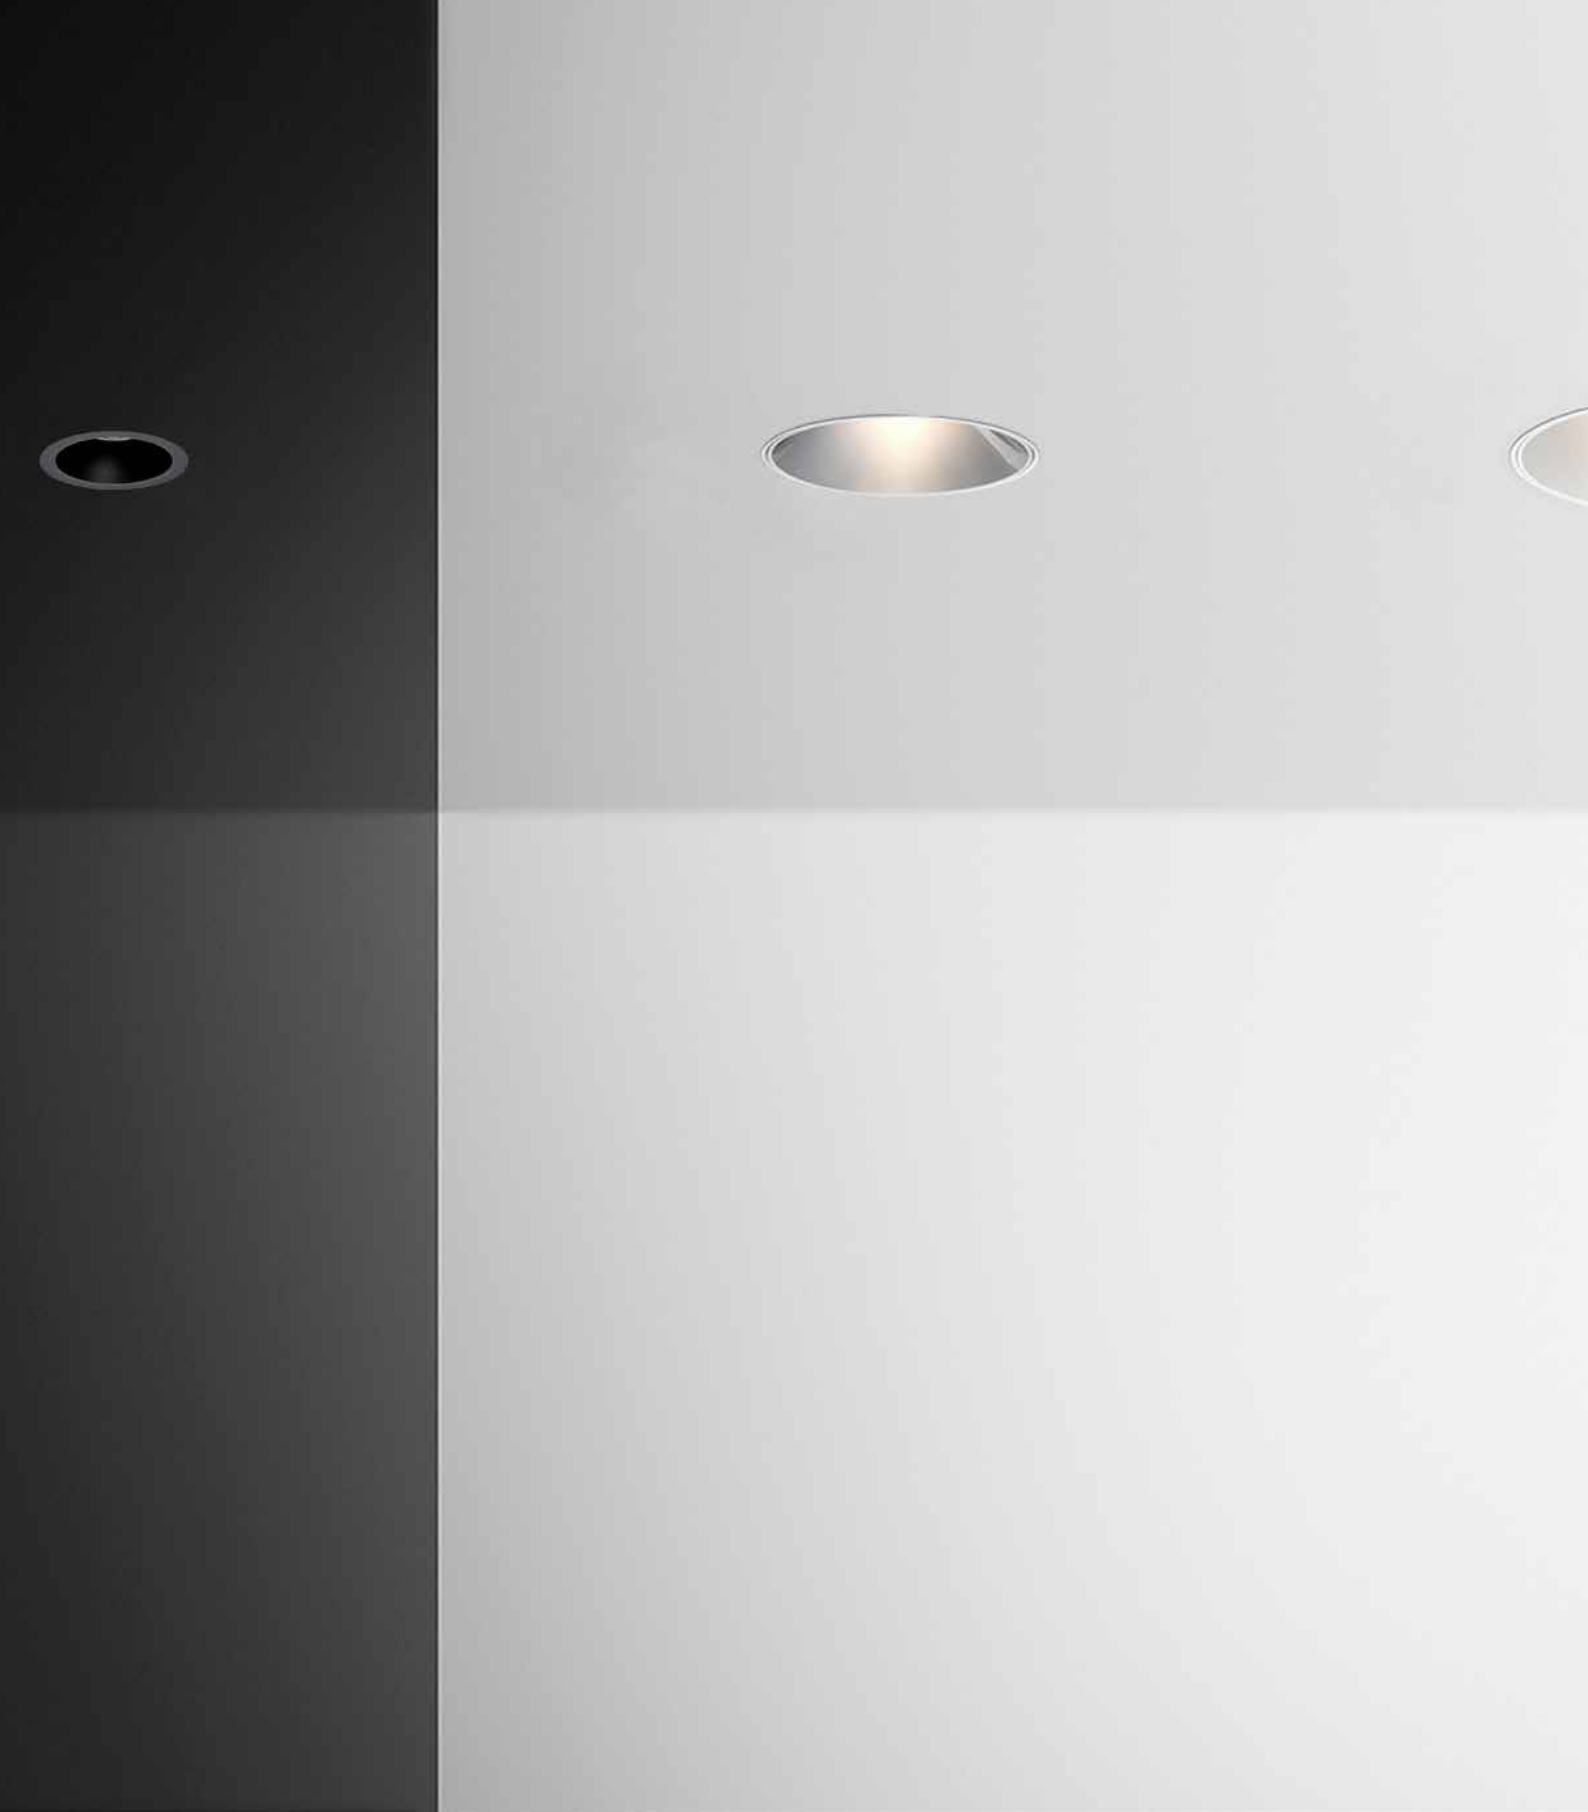

ALICUDI SALINA LIPARI




ALICUDI

[illegible]

CE UK CA  IP20

ALICUDI DRIVER

[illegible]




SALINA CEILING

voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
220/250V	12W	1x COB	640lm	15°	90	ON/OFF	ceiling	2700K	white	SAL LW2 41	198,00
220/250V	12W	1x COB	640lm	15°	90	ON/OFF	ceiling	2700K	black	SAL LN2 41	198,00
220/250V	12W	1x COB	740lm	15°	90	ON/OFF	ceiling	3000K	white	SAL LW3 41	198,00
220/250V	12W	1x COB	740lm	15°	90	ON/OFF	ceiling	3000K	black	SAL LN3 41	198,00
220/250V	12W	1x COB	670lm	35°	90	ON/OFF	ceiling	2700K	white	SAL LW2 43	198,00
220/250V	12W	1x COB	670lm	35°	90	ON/OFF	ceiling	2700K	black	SAL LN2 43	198,00
220/250V	12W	1x COB	770lm	35°	90	ON/OFF	ceiling	3000K	white	SAL LW3 43	198,00
220/250V	12W	1x COB	770lm	35°	90	ON/OFF	ceiling	3000K	black	SAL LN3 43	198,00

note ring not included (more specifications in the table below), anti light loss system

CE UK CA IP20

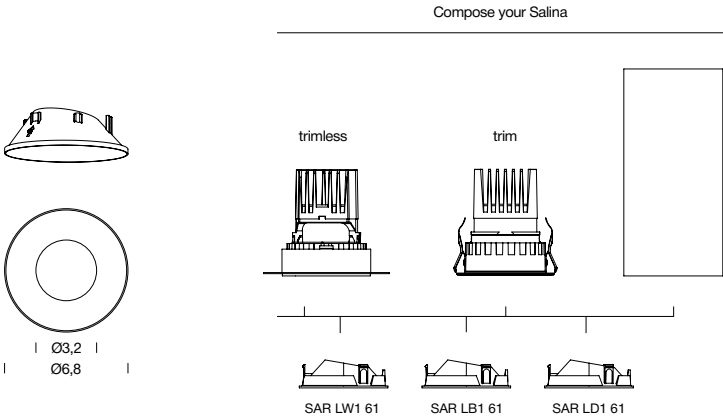


SALINA/SALINA CEILING RING


finish	dimension cm	code	Euro
white matte	Ø 6,8	SAR LW1 61	6,00
black matte	Ø 6,8	SAR LB1 61	6,00
silver glossy	Ø 6,8	SAR LD1 61	6,00

note mechanical fixing

TRIMLESS

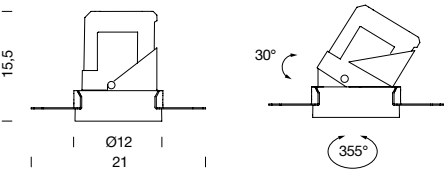



TRIM



LIPARI

current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
600mA	22W	1x COB	1400lm	15°	90	according to driver	recessed trimless	2700K	white	LIP LW2 61	188,00
600mA	22W	1x COB	1400lm	15°	90	according to driver	recessed trimless	3000K	white	LIP LW3 61	188,00
600mA	22W	1x COB	1400lm	35°	90	according to driver	recessed trimless	2700K	white	LIP LW2 63	188,00
600mA	22W	1x COB	1400lm	35°	90	according to driver	recessed trimless	3000K	white	LIP LW3 63	188,00
600mA	22W	1x COB	1400lm	15°	90	according to driver	recessed trim	2700K	white	LIT LW2 61	188,00
600mA	22W	1x COB	1400lm	15°	90	according to driver	recessed trim	2700K	black	LIT LN2 61	188,00
600mA	22W	1x COB	1400lm	15°	90	according to driver	recessed trim	3000K	white	LIT LW3 61	188,00
600mA	22W	1x COB	1400lm	15°	90	according to driver	recessed trim	3000K	black	LIT LN3 61	188,00
600mA	22W	1x COB	1400lm	35°	90	according to driver	recessed trim	2700K	white	LIT LW2 63	188,00
600mA	22W	1x COB	1400lm	35°	90	according to driver	recessed trim	2700K	black	LIT LN2 63	188,00
600mA	22W	1x COB	1400lm	35°	90	according to driver	recessed trim	3000K	white	LIT LW3 63	188,00
600mA	22W	1x COB	1400lm	35°	90	according to driver	recessed trim	3000K	black	LIT LN3 63	188,00
note		driver and ring not included (more specifications on next page), orientable spot, anti light loss system, trimless recessed hole Ø 130mm, depth 200mm, trim recessed hole Ø 125mm, depth 200mm, cable length 0,4m									

CE UK CA IP20

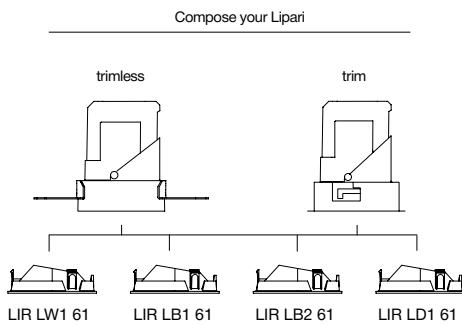


LIPARI RING


finish	dimension cm	code	Euro
white matte	Ø11.8	LIR LW1 61	6,00
black matte	Ø11.8	LIR LB1 61	6,00
black glossy	Ø11.8	LIR LB2 61	6,00
silver glossy	Ø11.8	LIR LD1 61	6,00
note	magnetic fixing		

LIPARI DRIVER


[illegible]

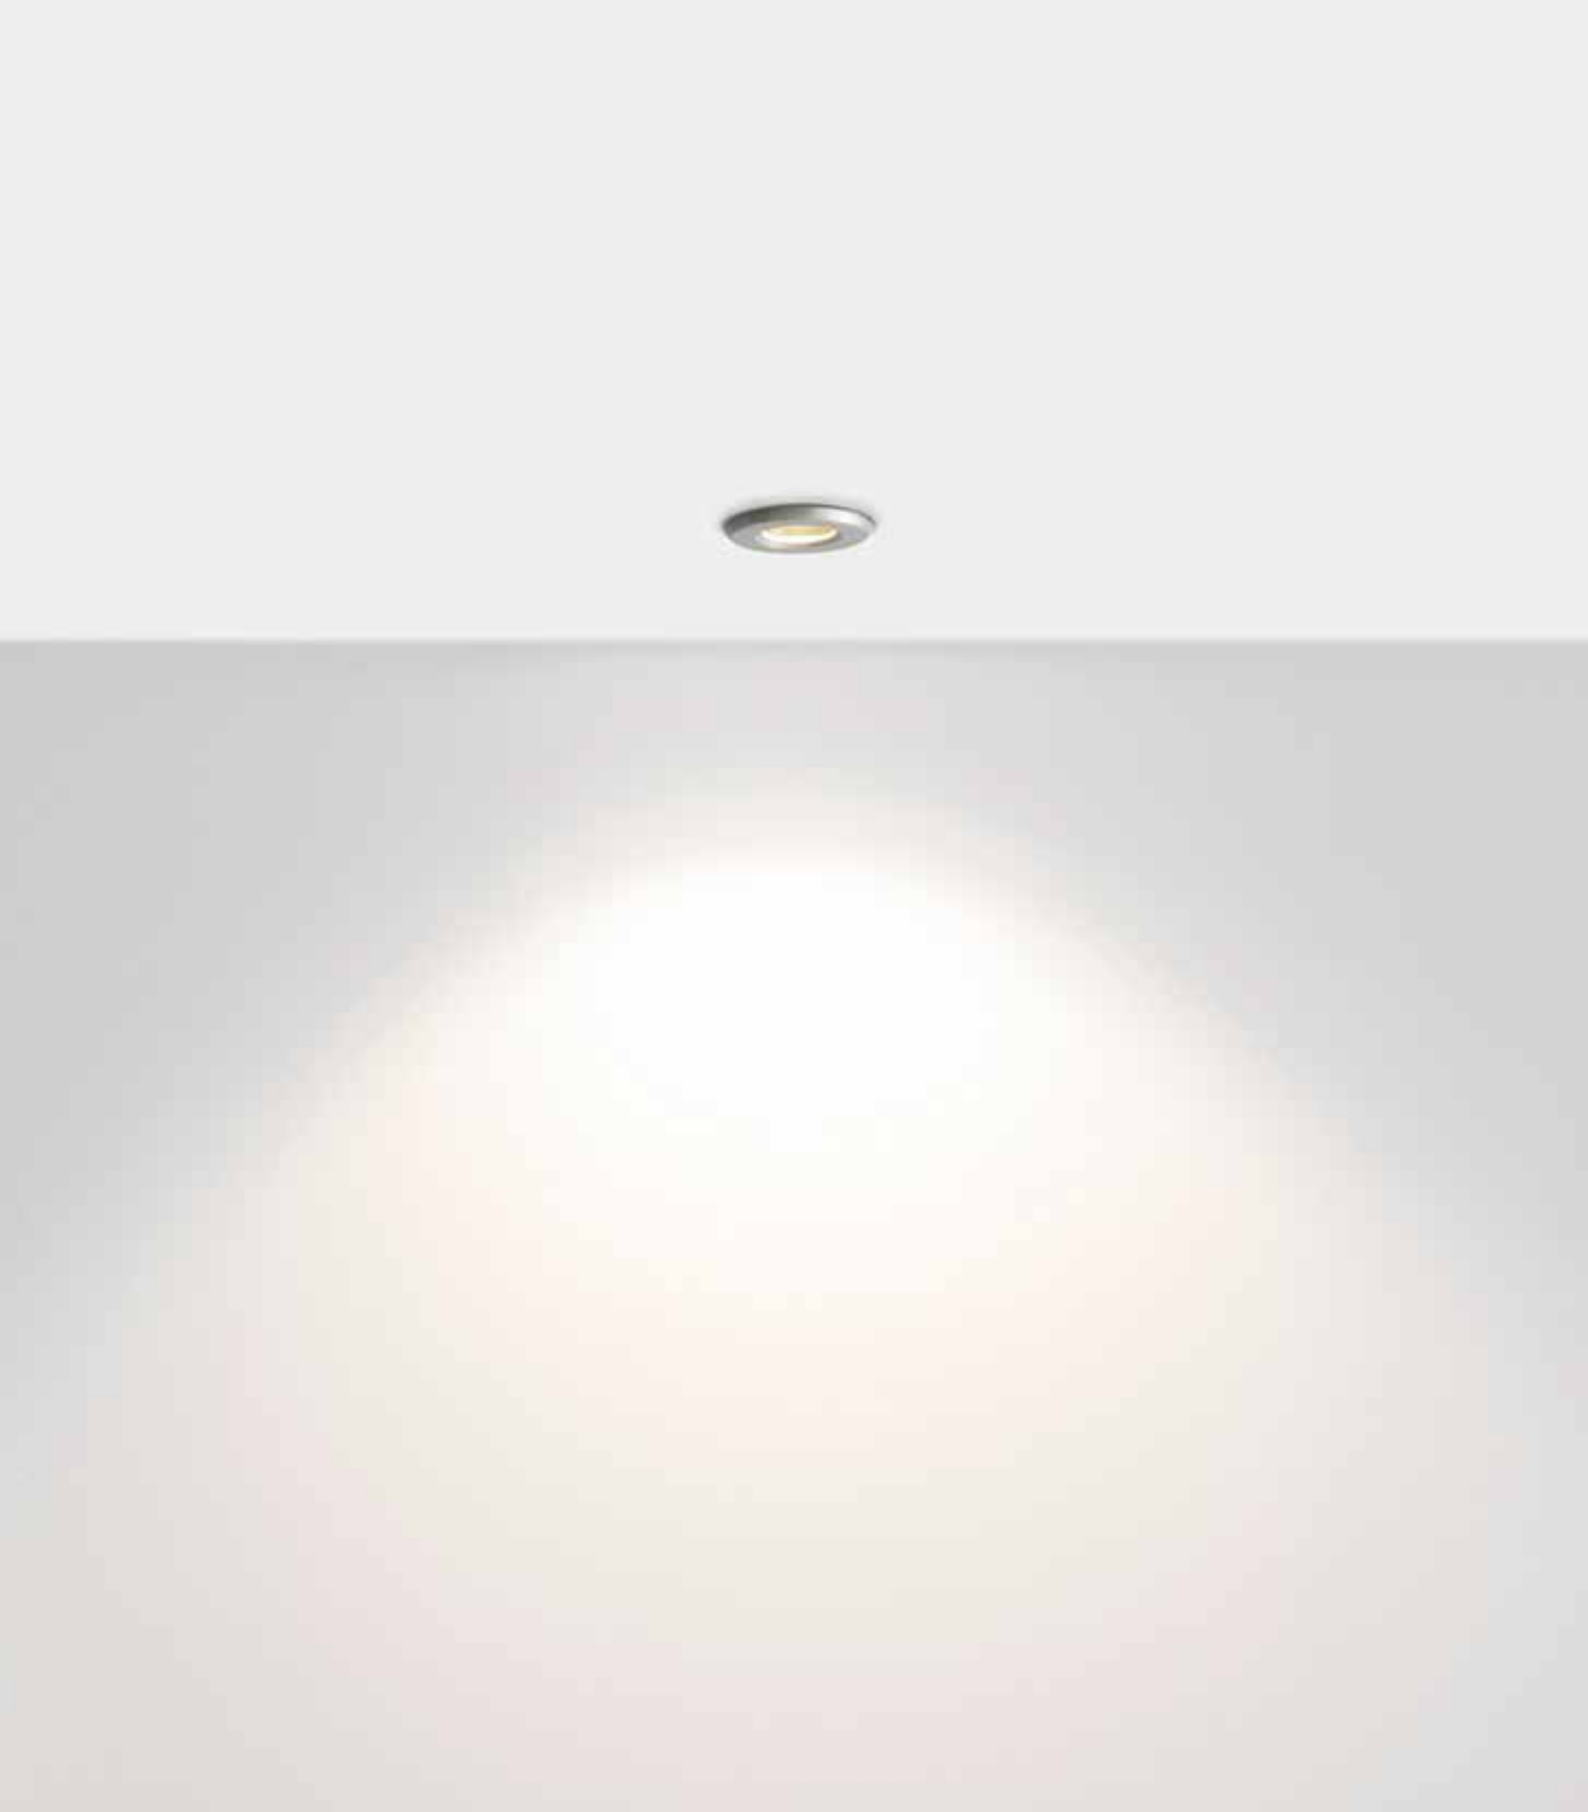

LUX INDOOR



2.8



Ø1,9

LUX INDOOR

[illegible]


CE UK CA  IP40

LUX INDOOR DRIVER

[illegible]



PATTERN

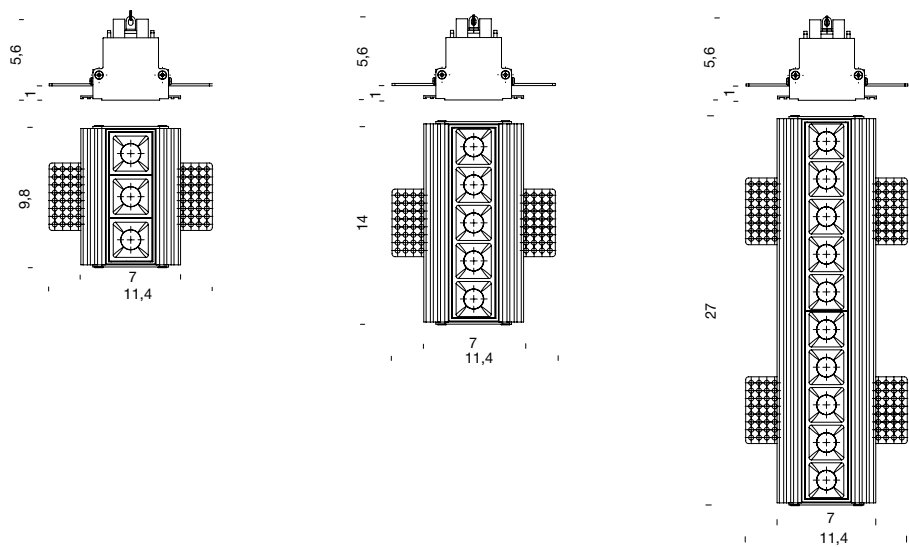

PATTERN 6W

current	max power	source	flux	optic	mounting	CRI	switching	CCT	finish	code	Euro
700mA	6W	3x LED	441lm	36°	recessed	90	according to driver	2700K	black	MPAT2103U67DNE	156,00
700mA	6W	3x LED	490lm	36°	recessed	90	according to driver	3000K	black	MPAT2103U67WNE	156,00
note		RAL 9005 black , driver not included									

CE UK CA IP20 UGR<19

PATTERN 10W


current	max power	source	flux	optic	mounting	CRI	switching	CCT	finish	code	Euro
700mA	10W	5x LED	660lm	36°	recessed	90	according to driver	2700K	black	MPAT2105U67DNE	224,00
700mA	10W	5x LED	736lm	36°	recessed	90	according to driver	3000K	black	MPAT2105U67WNE	224,00
note		RAL 9005 black , driver not included									

CE UK CA IP20 UGR<19

PATTERN 20W

current	max power	source	flux	optic	mounting	CRI	switching	CCT	finish	code	Euro
600mA	20W	10x LED	1444lm	36°	recessed	90	according to driver	2700K	black	MPAT2110U67DNE	307,00
600mA	20W	10x LED	1444lm	36°	recessed	90	according to driver	3000K	black	MPAT2110U67WNE	307,00
note		RAL 9005 black , driver not included									

CE UK CA IP20 UGR<19



PATTERN 10W DRIVER

PATTERN 20W DRIVER

load	input voltage	current	max power	Setting	switching	IP	dimensions cm	code	Euro
for 1 spot	220-240V	600mA	28W	No	ON/OFF	20	9,7x4,3x3	WPSUND28600	47,00
for 1 spot	220-240V	600mA*	25W	Yes	TRIAC	20	11x3x2,2	WPSTST550-900	58,00
for 1 spot	220-240V	600mA*	25W	Yes	1-10V	20	13,9x4,2x3	WPS1ST250-1A	84,00
for 1 spot	110-277V	600mA*	30W	Yes	DALI	20	13,9x4,2x3	WPSDST250-1A	125,00
for 1 spot	220-240V	600mA*	26W	Yes	CASAMBI	20	9,7x4,3x3	WPSCST150-700	312,00
note	*to be settled								



CUCÙ POP-UP HEY!



CE UKCA  IP20



CE UK CA  IP20

load	input voltage	current	max power	Setting	switching	IP	dimensions cm	code	Euro
for 1 cucù	220-240V	150mA*	6,9W	Yes	ON/OFF	20	13,8x3x2,2	WPSUST150-500	37,00
for 1 spot	220-240V	150mA*	6,3W	Yes	TRIAC	20	11x3x2,2	WPSTST120-350	37,00
for 1 spot	220-240V	150mA*	6,3W	Yes	1-10V	20	11x3x2,2	WPS1ST120-350	52,00
for 1 spot	200-240V	150mA*	6,7W	Yes	DALI	20	11x3x2,2	WPSDST120-300	58,00
for 1 spot	200-240V	150mA*	7,8W	Yes	CASAMBI	20	9,7x4,3x3	WPSCST150-700	312,00
note	*to be setted								




CE UK CA IP20

load	input voltage	current	max power	Setting	switching	IP	dimensions cm	code	Euro
for 1 spot	220-240V	250mA	10W	No	ON/OFF	20	8,8x3,9x2,2	WPSUND10250	34,00
for 1 spot	220-240V	250mA*	10W	Yes	TRIAC	20	11x3x2,2	WPSTST120-350	37,00
for 1 spot	220-240V	270mA*	10W	Yes	1-10V	20	11x3x2,2	WPS1ST120-350	52,00
for 1 spot	200-240V	270mA*	10W	Yes	DALI	20	11x3x2,2	WPSDST120-300	58,00
for 1 spot	220-240V	250mA*	13W	Yes	CASAMBI	20	9,7x4,3x3	WPSCST150-700	312,00
note	*to be settled								




MINIFLUX

MINIFLUX TRANSPARENT Ø16
MINIFLUX TRANSPARENT ASY Ø16



MINIFLUX TRANSPARENT Ø20



MINIFLUX TRANSPARENT

MINIFLUX TRANSPARENT Ø16

version	voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
1m Ø16	24V DC	14,5W	LED strip	1500lm	120°	90	acc. to driver	ceiling/wall	2700K	transparent	BBOK0910041DPC	151,00
1m Ø16	24V DC	14,5W	LED strip	1600lm	120°	90	acc. to driver	ceiling/wall	3000K	transparent	BBOK0910041WPC	151,00
1m Ø16	24V DC	14,5W	LED strip	1880lm	120°	90	acc. to driver	ceiling/wall	4000K	transparent	BBOK0910041NPC	151,00
1m Ø16	24V DC	14,5W	LED strip	1360lm	asymmetric	90	acc. to driver	ceiling/wall	2700K	transparent	BBOK0910241DPC	151,00
1m Ø16	24V DC	14,5W	LED strip	1430lm	asymmetric	90	acc. to driver	ceiling/wall	3000K	transparent	BBOK0910241WPC	151,00
1m Ø16	24V DC	14,5W	LED strip	1660lm	asymmetric	90	acc. to driver	ceiling/wall	4000K	transparent	BBOK0910241NPC	151,00
2m Ø16	24V DC	29W	LED strip	3000lm	120°	90	acc. to driver	ceiling/wall	2700K	transparent	BBOK0920041DPC	188,00
2m Ø16	24V DC	29W	LED strip	3200lm	120°	90	acc. to driver	ceiling/wall	3000K	transparent	BBOK0920041WPC	188,00
2m Ø16	24V DC	29W	LED strip	3760lm	120°	90	acc. to driver	ceiling/wall	4000K	transparent	BBOK0920041NPC	188,00
2m Ø16	24V DC	29W	LED strip	2720lm	asymmetric	90	acc. to driver	ceiling/wall	2700K	transparent	BBOK0920241DPC	188,00
2m Ø16	24V DC	29W	LED strip	2860lm	asymmetric	90	acc. to driver	ceiling/wall	3000K	transparent	BBOK0920241WPC	188,00
2m Ø16	24V DC	29W	LED strip	3320lm	asymmetric	90	acc. to driver	ceiling/wall	4000K	transparent	BBOK0920241NPC	188,00
3m Ø16	24V DC	42W	LED strip	4500lm	120°	90	acc. to driver	ceiling/wall	2700K	transparent	BBOK0930041DPC	234,00
3m Ø16	24V DC	42W	LED strip	4800lm	120°	90	acc. to driver	ceiling/wall	3000K	transparent	BBOK0930041WPC	234,00
3m Ø16	24V DC	42W	LED strip	5640lm	120°	90	acc. to driver	ceiling/wall	4000K	transparent	BBOK0930041NPC	234,00
3m Ø16	24V DC	42W	LED strip	4080lm	asymmetric	90	acc. to driver	ceiling/wall	2700K	transparent	BBOK0930241DPC	234,00
3m Ø16	24V DC	42W	LED strip	4290lm	asymmetric	90	acc. to driver	ceiling/wall	3000K	transparent	BBOK0930241WPC	234,00
3m Ø16	24V DC	42W	LED strip	4980	asymmetric	90	acc. to driver	ceiling/wall	4000K	transparent	BBOK0930241NPC	234,00

MINIFLUX TRANSPARENT Ø20


1m Ø20	24V DC	20W	LED strip	2600lm	120°	80	acc. to driver	ceiling/wall	3000K	transparent	BBOK0910015WPC	167,00
1m Ø20	24V DC	20W	LED strip	2890lm	120°	80	acc. to driver	ceiling/wall	4000K	transparent	BBOK0910015NPC	167,00
2m Ø20	24V DC	40W	LED strip	5200lm	120°	80	acc. to driver	ceiling/wall	3000K	transparent	BBOK0920015WPC	219,00
2m Ø20	24V DC	40W	LED strip	5780lm	120°	80	acc. to driver	ceiling/wall	4000K	transparent	BBOK0920015NPC	219,00
3m Ø20	24V DC	60W	LED strip	7800lm	120°	80	acc. to driver	ceiling/wall	3000K	transparent	BBOK0930015WPC	276,00
3m Ø20	24V DC	60W	LED strip	8670lm	120°	80	acc. to driver	ceiling/wall	4000K	transparent	BBOK0930015NPC	276,00

note clip included, driver and other accessory not included (more specifications on p.127), cable length 2m

customizations CCT 2700K, tube length



MINIFLUX OPAL Ø20



MINIFLUX OPAL

version	voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
1m Ø20	24V DC	15W	LED strip	905lm	diffuse orientable	97	acc. to driver	ceiling/wall	3000K	opal white	BBOK0910G26WPO	172,00
1m Ø20	24V DC	15W	LED strip	1005lm	diffuse orientable	94	acc. to driver	ceiling/wall	4000K	opal white	BBOK0910G26NPO	172,00
2m Ø20	24V DC	30W	LED strip	1800lm	diffuse orientable	97	acc. to driver	ceiling/wall	3000K	opal white	BBOK0920G26WPO	286,00
2m Ø20	24V DC	30W	LED strip	2000lm	diffuse orientable	94	acc. to driver	ceiling/wall	4000K	opal white	BBOK0920G26NPO	286,00
3m Ø20	24V DC	45W	LED strip	2700lm	diffuse orientable	97	acc. to driver	ceiling/wall	3000K	opal white	BBOK0930G26WPO	328,00
3m Ø20	24V DC	45W	LED strip	3000lm	diffuse orientable	94	acc. to driver	ceiling/wall	4000K	opal white	BBOK0930G26NPO	328,00
note		clip included, driver and other accessory not included (more specifications on p.127), cable length 2m										
customizations		CCT 2700K, tube length										

CE UK CA IP65



MINIFLUX TRANSPARENT

MINIFLUX TRANSPARENT Ø16 RGB

version	voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
1m Ø16 RGB	24V DC	15W	LED strip	/	120°	90	acc. to driver	ceiling/wall	RGB	transparent	BBOK09100665PC	141,00
2m Ø16 RGB	24V DC	30W	LED strip	/	120°	90	acc. to driver	ceiling/wall	RGB	transparent	BBOK09200665PC	234,00
3m Ø16 RGB	24V DC	45W	LED strip	/	120°	90	acc. to driver	ceiling/wall	RGB	transparent	BBOK09300665PC	281,00

MINIFLUX TRANSPARENT Ø20 RGBW

1m Ø20 RGBW	24V DC	15W	LED strip	/	120°	90	acc. to driver	ceiling/wall	RGB+2400K	transparent	BBOK09100728PC	151,00
2m Ø20 RGBW	24V DC	30W	LED strip	/	120°	90	acc. to driver	ceiling/wall	RGB+2400K	transparent	BBOK09200728PC	260,00
3m Ø20 RGBW	24V DC	45W	LED strip	/	120°	90	acc. to driver	ceiling/wall	RGB+2400K	transparent	BBOK09300728PC	323,00

note clip included, driver and other accessory not included (more specifications on p.127), cable length 2m

customizations tube length

CE UK CA IP65

MINIFLUX DRIVER

input voltage	output voltage	max power	switching	IP	dimensions cm	code	Euro
220/240V	24VDC	20W	ON/OFF	20	10,3x3,5x1,6	WPSU20W24V	30,00
110/240V	24VDC	25W	ON/OFF	67	14,8x4x3,2	WPSU25W24VIP	86,00
220/240V	24VDC	60W	ON/OFF	20	18x5,2x3	WPSU60W24V	58,00
90/305V	24VDC	60W	ON/OFF	67	16,3x4,3x3,2	WPSU60W24VIP	110,00
110/240V	24VDC	75W	ON/OFF	67	14x6,3x3,2	WPSU75W24VIP	115,00
110/240V	24VDC	100W	ON/OFF	67	14x6,3x3,2	WPSU100W24VIP	125,00
220/240V	24VDC	120W	ON/OFF	20	30x4x3	WPSU120W24V	89,00
110/240V	24VDC	150W	ON/OFF	67	18x6,3x3,5	WPSU150W24VIP	136,00
220/240V	24VDC	150W	ON/OFF	20	17,9x6,2x3	WPSU150W24V	146,00
110/240V	24VDC	240W	ON/OFF	67	24,4x7,1x3,8	WPSU240W24VIP	260,00
200/240V	24VDC	250W	ON/OFF	20	19,5x6,7x3,2	WPSU250W24V	203,00
220/240V	24VDC	75W	TRIAC	20	21,2x5,4x3,3	WPST75W24V	172,00
220/240V	24VDC	60W	DALI2/PUSH	20	36,1x3x2,1	WPSD60W24V	188,00
110/240V	24VDC	120W	DALI2	67	19,1x6,3x3,8	WPSD120W24VIP	229,00
220/240V	24VDC	150W	DALI2/PUSH	20	35x3x2	WPSD150W24V	188,00

DIMMER INTERFACE

WIRED

dimensions x,y,z	switching	code	Euro
4,4x5,7x2,5	240W 24V 0-10V 1-10V PUSH DALI*	WDIMDALIHP	110,00
note *to combine with driver ON/OFF			

WIRELESS






dimensions x,y,z	switching	code	Euro
4,4x5,7x2,5	CASAMBI PUSH*	WBLTSMART	208,00
note *to combine with driver ON/OFF, on board (HOME version) or external mounting, iOS and Android compatible, set up by customer or by ILTI LUCE on commission			

REMOTE CONTROL KIT

dimensions x,y,z	max power	voltage	switching	code	Euro
1,2x0,5x5	120W	5V - 24V	REMOTE	WDIMKITREM	42,00
note mono channel dimmer for LED with RF (radio frequency) wireless remote control , to be used as dimming solution in place of specific wiring					


DIMMER INTERFACE LED STRIP RGB/RGBW

load	dimensions x,y,z	max power	voltage	switching	code	Euro
max 15m	8,7x5,3x2,7	240W	24V	CASAMBI	WSLAVECASCV4CH	474,00
max 15m	8,7x5,3x2,7	240W	24V	DALI	WSLAVEDALICV4CH	156,00
max 15m	8,7x5,3x2,7	240W	24V	DMX	WSLAVEDMXCV4CH	156,00
note *to combine with driver ON/OFF						



CONNECTORS KIT IP68

version	dimensions cm	code	Euro
max power 10A (2 poles)	Ø1,4x9	MRIGALIMIP68	24,00

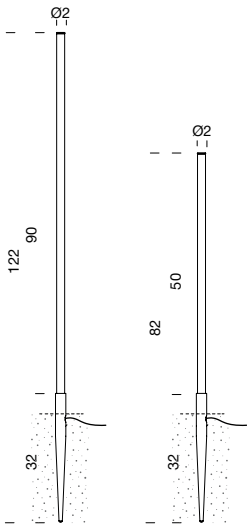

MINIFLUX GARDEN

TRANSPARENT 1,22m

version	voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
1,22m	24V	14W	LED strip	830lm	120°	90	acc. to driver	ground	2700K	black	BMGT30122G26DAN	385,00
1,22m	24V	14W	LED strip	923lm	120°	90	acc. to driver	ground	3000K	black	BMGT30122G26WAN	385,00
1,22m	24V	14W	LED strip	1025lm	120°	90	acc. to driver	ground	4000K	black	BMGT30122G26NAN	385,00


TRANSPARENT 0,82M

version	voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
0,82m	24V	8W	LED strip	461lm	120°	90	acc. to driver	ground	2700K	black	BMGT30082G26DAN	344,00
0,82m	24V	8W	LED strip	512lm	120°	90	acc. to driver	ground	3000K	black	BMGT30082G26WAN	344,00
0,82m	24V	8W	LED strip	560lm	120°	90	acc. to driver	ground	4000K	black	BMGT30082G26NAN	344,00

note driver and other accessory not included, cable length 2m | optional drivers and dimmer interfaces on p.123

customizations tube length

CE UK CA IP67




ACCESSORIES

version	dimensions cm	code	Euro
base for vertical installation	Ø7,5x0,4	BMFGBASEV	37,00
base for 20° inclined installation	Ø7,5x0,4	BMFGBASEI	37,00



RIGA


TRANSPARENT



BRACKETS (included)




OPAL




TRANSPARENT BRACKETS (included)



RIGA OPAL FRONT LIGHT



RIGA OPAL SIDE LIGHT




RIGA

RIGA TRANSPARENT

version	voltage/ current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
1m	24VDC	9,6W	flex LED strip	1400lm	direct 120°	85	acc.to driver	ceiling/wall	2700K	white	MRIG0910035DRE	197,00
2m	24VDC	19,2W	flex LED strip	2800lm	direct 120°	85	acc.to driver	ceiling/wall	2700K	white	MRIG0920035DRE	292,00
3m	24VDC	28,8W	flex LED strip	4200lm	direct 120°	85	acc.to driver	ceiling/wall	2700K	white	MRIG0930035DRE	401,00
4m	24VDC	38,4W	flex LED strip	5600lm	direct 120°	85	acc.to driver	ceiling/wall	2700K	white	MRIG0940035DRE	484,00
5m	24VDC	48W	flex LED strip	7000lm	direct 120°	85	acc.to driver	ceiling/wall	2700K	white	MRIG0950035DRE	593,00
1m	24VDC	14W	flex LED strip	500lm	direct 120°		acc.to driver	ceiling/wall	RGB	white	MRIG09100665RE	197,00
2m	24VDC	29W	flex LED strip	1000lm	direct 120°		acc.to driver	ceiling/wall	RGB	white	MRIG09200665RE	297,00
3m	24VDC	43W	flex LED strip	1500lm	direct 120°		acc.to driver	ceiling/wall	RGB	white	MRIG09300665RE	411,00
4m	24VDC	57W	flex LED strip	2000lm	direct 120°		acc.to driver	ceiling/wall	RGB	white	MRIG09400665RE	510,00
5m	24VDC	72W	flex LED strip	2500lm	direct 120°		acc.to driver	ceiling/wall	RGB	white	MRIG09500665RE	526,00
RIGA OPAL												
1m- front light	24VDC	9,6W	flex LED strip	510lm	diffused	85	acc.to driver	ceiling/wall	3000K	white	MRIG0910G35WFL	197,00
1m- side light	24VDC	9,6W	flex LED strip	510lm	diffused	85	acc.to driver	ceiling/wall	3000K	white	MRIG0910G35WSL	197,00
1m- front light	24VDC	9,6W	flex LED strip	600lm	diffused	85	acc.to driver	ceiling/wall	4000K	white	MRIG0910G35NFL	197,00
1m- side light	24VDC	9,6W	flex LED strip	600lm	diffused	85	acc.to driver	ceiling/wall	4000K	white	MRIG0910G35NSL	197,00
2m- front light	24VDC	19,2W	flex LED strip	1020lm	diffused	85	acc.to driver	ceiling/wall	3000K	white	MRIG0920G35WFL	292,00
2m- side light	24VDC	19,2W	flex LED strip	1020lm	diffused	85	acc.to driver	ceiling/wall	3000K	white	MRIG0920G35WSL	292,00
2m- frontlight	24VDC	19,2W	flex LED strip	1200lm	diffused	85	acc.to driver	ceiling/wall	4000K	white	MRIG0920G35NFL	292,00
2m- side light	24VDC	19,2W	flex LED strip	1200lm	diffused	85	acc.to driver	ceiling/wall	4000K	white	MRIG0920G35NSL	292,00
3m- front light	24VDC	28,8W	flex LED strip	1530lm	diffused	85	acc.to driver	ceiling/wall	3000K	white	MRIG0930G35WFL	406,00
3m- side light	24VDC	28,8W	flex LED strip	1530lm	diffused	85	acc.to driver	ceiling/wall	3000K	white	MRIG0930G35WSL	406,00
3m- front light	24VDC	28,8W	flex LED strip	1800lm	diffused	85	acc.to driver	ceiling/wall	4000K	white	MRIG0930G35NFL	406,00
3m- side light	24VDC	28,8W	flex LED strip	1800lm	diffused	85	acc.to driver	ceiling/wall	4000K	white	MRIG0930G35NSL	406,00
4m- front light	24VDC	38,4W	flex LED strip	2040lm	diffused	85	acc.to driver	ceiling/wall	3000K	white	MRIG0940G35WFL	489,00
4m- side light	24VDC	38,4W	flex LED strip	2040lm	diffused	85	acc.to driver	ceiling/wall	3000K	white	MRIG0940G35WSL	489,00
4m- front light	24VDC	38,4W	flex LED strip	2400lm	diffused	85	acc.to driver	ceiling/wall	4000K	white	MRIG0940G35NFL	489,00
4m- side light	24VDC	38,4W	flex LED strip	2400lm	diffused	85	acc.to driver	ceiling/wall	4000K	white	MRIG0940G35NSL	489,00
5m- front light	24VDC	48W	flex LED strip	2550lm	diffused	85	acc.to driver	ceiling/wall	3000K	white	MRIG0950G35WFL	604,00
5m- side light	24VDC	48W	flex LED strip	2550lm	diffused	85	acc.to driver	ceiling/wall	3000K	white	MRIG0950G35WSL	604,00
5m- front light	24VDC	48W	flex LED strip	3000lm	diffused	85	acc.to driver	ceiling/wall	4000K	white	MRIG0950G35NFL	604,00
5m- side light	24VDC	48W	flex LED strip	3000lm	diffused	85	acc.to driver	ceiling/wall	4000K	white	MRIG0950G35NSL	604,00
note	driver not included (more specifications on p.127), cable length 2m											
customizations	body length, CCT 2700K											


RIGA DRIVER

input voltage	output voltage	max power	switching	IP	dimensions cm	code	Euro
220/240V	24VDC	20W	ON/OFF	20	13x3,5x1,6	WPSU20W24V	30,00
220/240V	24VDC	25W	ON/OFF	67	14,8x4x3,2	WPSU25W24VIP	86,00
220/240V	24VDC	60W	ON/OFF	20	18x5,2x3	WPSU60W24V	58,00
90/305V	24VDC	60W	ON/OFF	67	17,2x5,3x3,7	WPSU60W24VIP	110,00
110/240V	24VDC	75W	ON/OFF	67	14x6,3x3,2	WPSU75W24VIP	115,00
110/240V	24VDC	100W	ON/OFF	67	14x6,3x3,2	WPSU100W24VIP	125,00
220/240V	24VDC	120W	ON/OFF	20	30x4x3	WPSU120W24V	89,00
220/240V	24VDC	150W	ON/OFF	67	18x6,3x3,5	WPSU150W24VIP	136,00
220/240V	24VDC	150W	ON/OFF	20	17,9x6,2x3	WPSU150W24V	146,00
100/305V	48VDC	240W	ON/OFF	67	22x6,5x3,5	WPSU240W48VIP	260,00
220/240V	24VDC	240W	ON/OFF	67	24,4x7,1x3,8	WPSU240W24VIP	260,00
220/240V	24VDC	250W	ON/OFF	20	19,5x6,7x3,2	WPSU250W24V	203,00
180/240V	24VDC	30W	TRIAC	20	10,7x4x2,2	WPST30W24V	58,00
220/240V	24VDC	75W	TRIAC	20	21,2x5,4x3,3	WPST75W24V	172,00
100/240V	24VDC	30W	DALI	20	10,7x4x2,2	WPSD30W24V	115,00
220/240V	24VDC	60W	DALI2/PUSH	20	36,1x3x2,1	WPSD60W24V	188,00
110/240V	24VDC	120W	DALI2	67	19,1x6,3x3,8	WPSD120W24VIP	229,00
220/240V	24VDC	150W	DALI2/PUSH	20	35x3x3	WPSD150W24V	188,00




CONNECTORS KIT IP68

version	dimensions cm	code	Euro
max power 10A (2 poles)	Ø1,4x9	MRIGALIMIP68	24,00

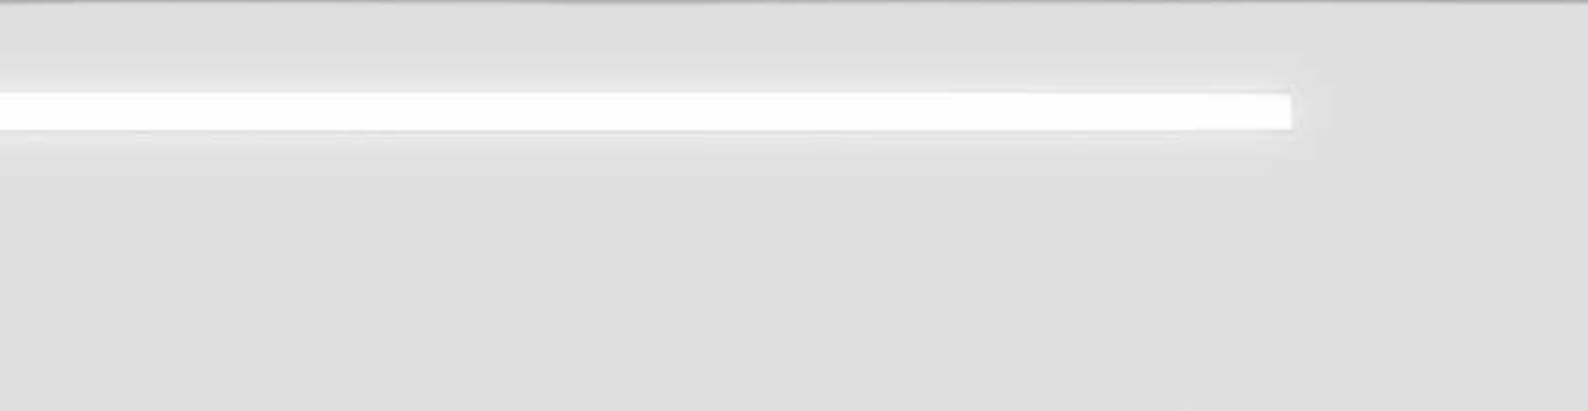

WALKLINE

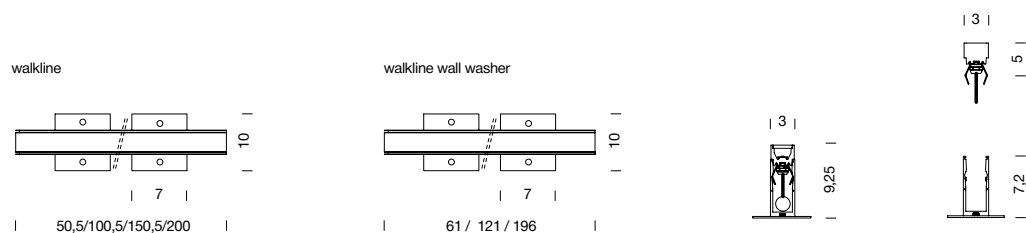

WALKLINE


version	voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
0,5m	24VDC	7,5W	LED strip	325lm	diffused	90	according to driver	floor recessed	4000K	grey	BWLK0205G26NAA	396,00
0,5m	24VDC	7,5W	LED strip	325lm	diffused	90	according to driver	floor recessed	6000K	grey	BWLK0205G260AA	396,00
1m	24VDC	15W	LED strip	650lm	diffused	90	according to driver	floor recessed	4000K	grey	BWLK0210G26NAA	557,00
1m	24VDC	15W	LED strip	650lm	diffused	90	according to driver	floor recessed	6000K	grey	BWLK0210G260AA	557,00
1,5m	24VDC	22,5W	LED strip	975lm	diffused	90	according to driver	floor recessed	4000K	grey	BWLK0215G26NAA	754,00
1,5m	24VDC	22,5W	LED strip	975lm	diffused	90	according to driver	floor recessed	6000K	grey	BWLK0215G260AA	754,00
2m	24VDC	30W	LED strip	1300lm	diffused	90	according to driver	floor recessed	4000K	grey	BWLK0220G26NAA	1.035,00
2m	24VDC	30W	LED strip	1300lm	diffused	90	according to driver	floor recessed	6000K	grey	BWLK0220G260AA	1.035,00
note		driver not included (more specifications on next page), 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load										
customizations		body length, CCT 2700K										

CE UK CA IP67 IK10

WALKLINE WALL WASHER

version	voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
0,6m	24VDC	12W	LED strip	1030lm	asymmetric 45°	90	according to driver	floor recessed	3000K	grey	BWLK0206W52WAA	437,00
0,6m	24VDC	12W	LED strip	1144lm	asymmetric 45°	90	according to driver	floor recessed	4000K	grey	BWLK0206W52NAA	437,00
1,2m	24VDC	24W	LED strip	2060lm	asymmetric 45°	90	according to driver	floor recessed	3000K	grey	BWLK0209W52WAA	583,00
1,2m	24VDC	24W	LED strip	2288lm	asymmetric 45°	90	according to driver	floor recessed	4000K	grey	BWLK0209W52NAA	583,00
2m	24VDC	40W	LED strip	3433lm	asymmetric 45°	90	according to driver	floor recessed	3000K	grey	BWLK0220W52WAA	1.092,00
2m	24VDC	40W	LED strip	3815lm	asymmetric 45°	90	according to driver	floor recessed	4000K	grey	BWLK0220W52NAA	1.092,00
note		driver not included (more specifications on next page), cable length 1m, certified 500kg static load, 3500kg dynamic load										
customizations		body length										

CE UK CA IP67 IK10




WALKLINE FAÇADE

version	voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
0,6m	24VDC	11W	LED strip	1030lm	wall washer 30°	90	according to driversurface		3000K	grey	BWLFS806452WAA	410,00
0,6m	24VDC	11W	LED strip	1144lm	wall washer 30°	90	according to driversurface		4000K	grey	BWLFS806452NAA	410,00
0,9m	24VDC	16W	LED strip	2060lm	wall washer 30°	90	according to driversurface		3000K	grey	BWLFS809452WAA	530,00
0,9m	24VDC	16W	LED strip	2228lm	wall washer 30°	90	according to driversurface		4000K	grey	BWLFS809452NAA	530,00
1,2m	24VDC	22W	LED strip	3433lm	wall washer 30°	90	according to driversurface		3000K	grey	BWLFS812452WAA	650,00
1,2m	24VDC	22W	LED strip	3815lm	wall washer 30°	90	according to driversurface		4000K	grey	BWLFS812452NAA	650,00
note		driver not included, cable length 1m										
customizations		body length, CCT 2700K										

CE UK  IP67 IK10


WALKLINE DRIVER

input voltage	output voltage	max power	switching	IP	dimensions cm	code	Euro
220/240V	24VDC	20W	ON/OFF	20	10,3x3,5x1,6	WPSU20W24V	30,00
110/240V	24VDC	25W	ON/OFF	67	14,8x4x3,2	WPSU25W24VIP	86,00
220/240V	24VDC	60W	ON/OFF	20	18x5,2x3	WPSU60W24V	58,00
90/305V	24VDC	60W	ON/OFF	67	16,3X4,3X3,2	WPSU60W24VIP	110,00
110/240V	24VDC	75W	ON/OFF	67	14x6,3x3,2	WPSU75W24VIP	115,00
110/240V	24VDC	100W	ON/OFF	67	14x6,3x3,2	WPSU100W24VIP	125,00
220/240V	24VDC	120W	ON/OFF	20	30x4x3	WPSU120W24V	89,00
110/240V	24VDC	150W	ON/OFF	67	18x6,3x3,5	WPSU150W24VIP	136,00
220/240V	24VDC	150W	ON/OFF	20	17,9x6,2x3	WPSU150W24V	146,00
110/240V	24VDC	240W	ON/OFF	67	24,4x7,1x3,8	WPSU240W24VIP	260,00
200/240V	24VDC	250W	ON/OFF	20	19,5x6,7x3,2	WPSU250W24V	203,00
220/240V	24VDC	75W	TRIAC	20	21,2x5,4x3,3	WPST75W24V	172,00
220/240V	24VDC	60W	DALI2/PUSH	20	36,1x3x2,1	WPSD60W24V	188,00
110/240V	24VDC	120W	DALI2	67	19,1x6,3x3,8	WPSD120W24VIP	229,00
220/240V	24VDC	150W	DALI2/PUSH	20	35x3x3	WPSD150W24V	188,00




CONNECTORS KIT IP68

version	dimensions cm	code	Euro
max power 10A (2 poles)	Ø1,4x9	MRIGALIMIP68	24,00

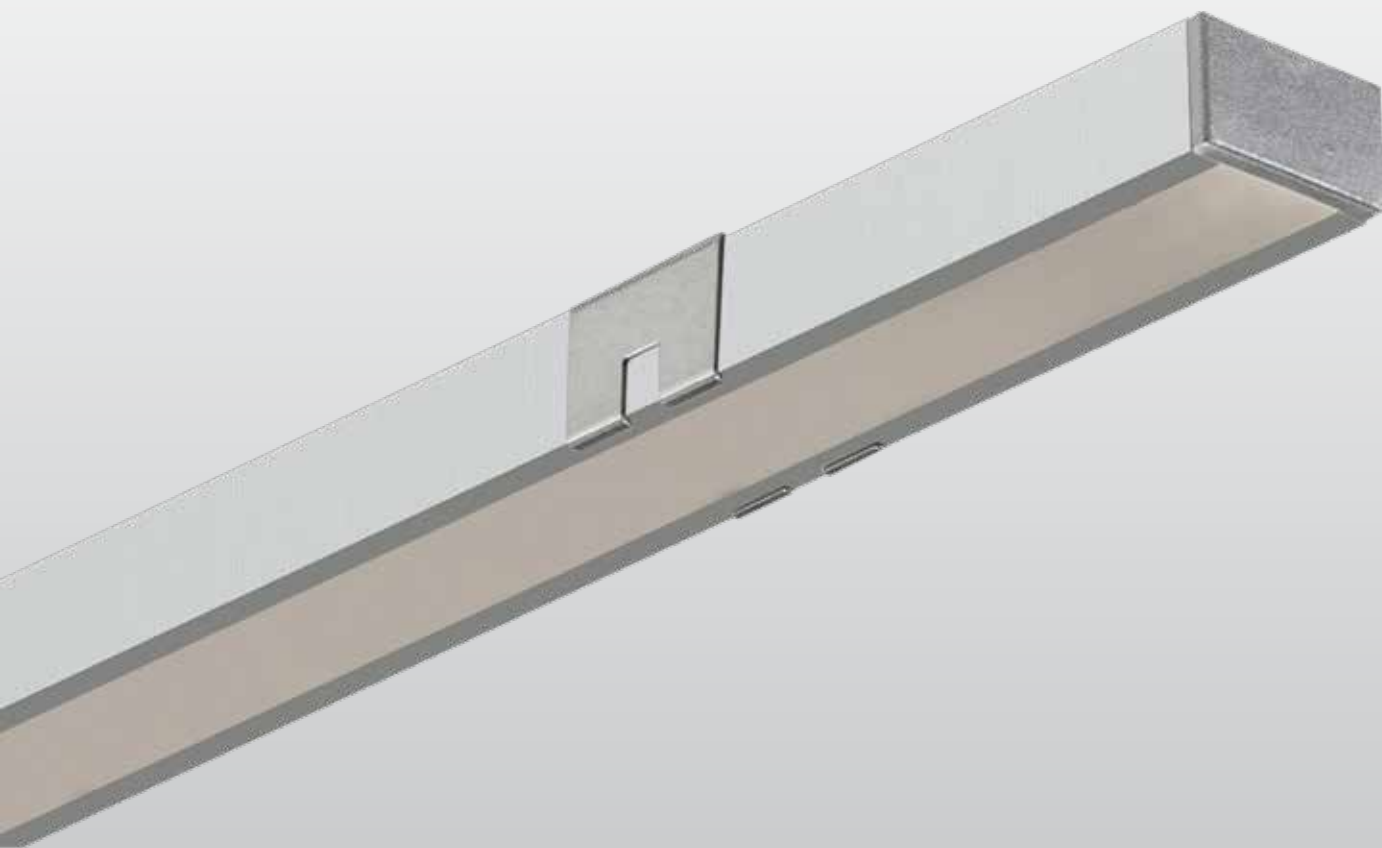

SLACKLINE IP67

CEILING




SLACKLINE IP67

version	voltage/current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
1m	24VDC	15W	LED strip	457lm	diffused	90	acc. to driver	surface	3000K	grey	BSLAS810G26WAA	292,00
1m	24VDC	15W	LED strip	540lm	diffused	90	acc. to driver	surface	4000K	grey	BSLAS810G26NAA	292,00
2m	24VDC	30W	LED strip	914lm	diffused	90	acc. to driver	surface	3000K	grey	BSLAS820G26WAA	468,00
2m	24VDC	30W	LED strip	1080lm	diffused	90	acc. to driver	surface	4000K	grey	BSLAS820G26NAA	468,00
note		driver not included (more specifications in the table below), cable length 0,5m										
customizations		CCT 2700K, body length										

CE UK CA IP67


SLACKLINE IP67 DRIVER

input voltage	output voltage	max power	switching	IP	dimensions cm	code	Euro
110/240V	24VDC	25W	ON/OFF	67	14,8x4x3,2	WPSU25W24VIP	86,00
90/305V	24VDC	60W	ON/OFF	67	16,3x4,3x3,2	WPSU60W24VIP	110,00
110/240V	24VDC	75W	ON/OFF	67	14x6,3x3,2	WPSU75W24VIP	115,00
110/240V	24VDC	100W	ON/OFF	67	14x6,3x3,2	WPSU100W24VIP	125,00
110/240V	24VDC	120W	DALI2	67	19,1x6,3x3,8	WPSD120W24VIP	229,00
110/240V	24VDC	150W	ON/OFF	67	18x6,3x3,5	WPSU150W24VIP	136,00
200/240V	24VDC	240W	ON/OFF	67	24,4x7,1x3,8	WPSU240W24VIP	260,00




CONNECTORS KIT IP68

version	dimensions cm	code	Euro
max power 10A (2 poles)	Ø1,4x9	MRIGALIMIP68	24,00

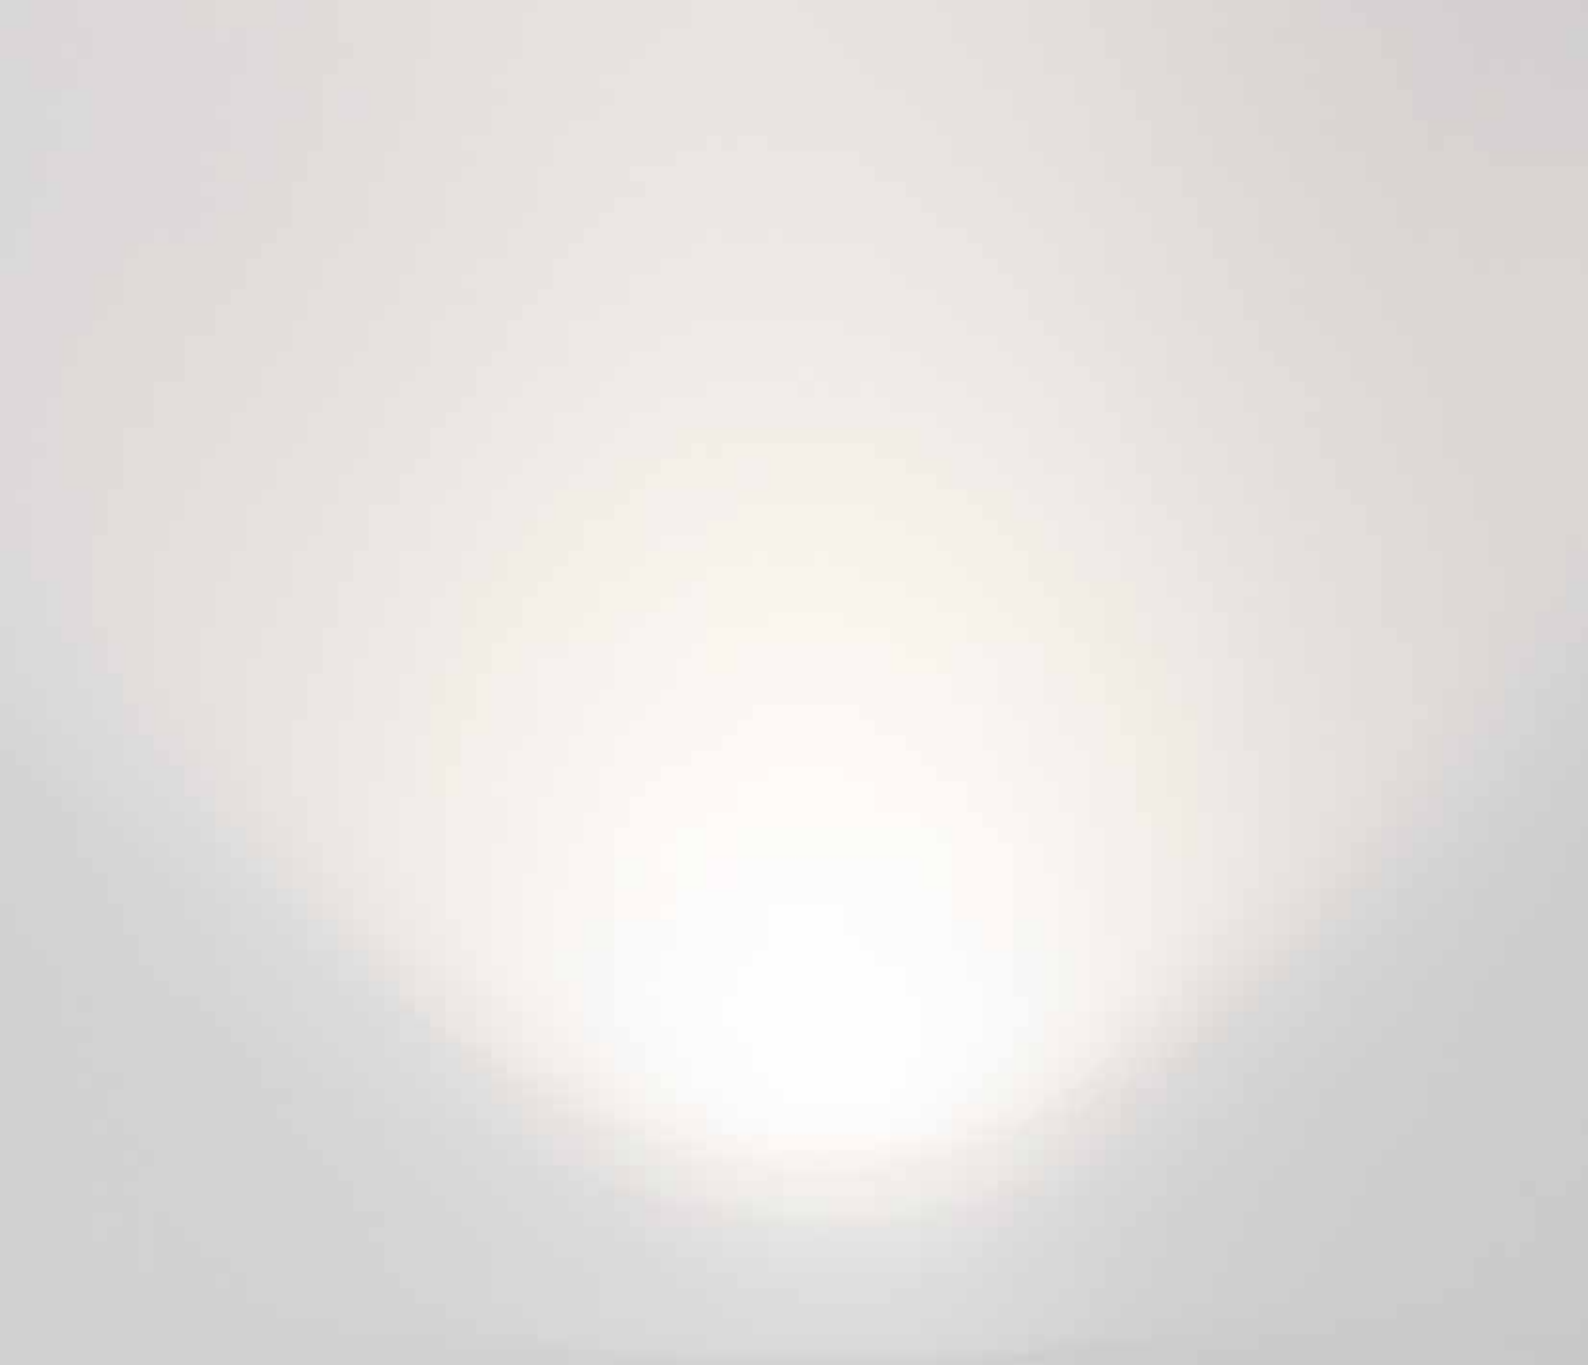

LUX




LUX SPOT 4,2W

current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
350mA	4,2W	1x LED	366lm	17°	90	according to driver	floor	3000K	grey	BLUS1801N21WAA	234,00
350mA	4,2W	1x LED	372lm	46°	90	according to driver	floor	3000K	grey	BLUS1801F21WAA	234,00
350mA	4,2W	1x LED	366lm	17°	90	according to driver	floor	4000K	grey	BLUS1801N21NAA	234,00
350mA	4,2W	1x LED	372lm	46°	90	according to driver	floor	4000K	grey	BLUS1801F21NAA	234,00
350mA	4,2W	1x LED	366lm	17°	90	according to driver	floor	3000K	black	BLUS1801N21WAN	234,00
350mA	4,2W	1x LED	372lm	46°	90	according to driver	floor	3000K	black	BLUS1801F21WAN	234,00
350mA	4,2W	1x LED	366lm	17°	90	according to driver	floor	4000K	black	BLUS1801N21NAN	234,00
350mA	4,2W	1x LED	372lm	46°	90	according to driver	floor	4000K	black	BLUS1801F21NAN	234,00
note cable length 2m, peg BLUXSPEG not included, driver not included, Series connection, CRI > 90											
customizations CCT 2700K											

CE UK CA IP67

LUX SPOT 4,2W DRIVER


load	input voltage	range current	max power	Setting	switching	IP	dimensions cm	code	Euro
for 1 to 2 spots	220-240V	350mA	12W	No	ON/OFF	20	9,8x3,9x2,2	WPSUND12350	30,00
for 1 to 3 spots	220-240V	350mA	17W	No	ON/OFF	20	12,2x3,8x2,4	WPSUND17350	47,00
for 1 to 3 spots	220-240V	350mA	16W	No	ON/OFF	67	14x3x2,2	WPSUND16350IP	52,00
for 1 to 2 spots	220-240V	350mA*	10W	Yes	TRIAC	20	11x3x2,2	WPSTST120-350	37,00
for 1 to 2 spots	220-240V	350mA*	10W	Yes	1-10V	20	11x3x2,2	WPS1ST120-350	52,00
for 1 to 3 spots	110/240V	350mA*	17W	Yes	DALI	20	12x5,2x2,2	WPSDST250-700	104,00
for 1 to 4 spots	220-240V	350mA*	18W	Yes	CASAMBI	20	9,7x4,3x3	WPSCST150-700	312,00
note for outdoor installation IP connection system not included, series connection, *to be setted									



ACCESSORIES

version	finish	dimensions cm	code	Euro
PEG for 1 spot	black	19x3x2	BLUXSPEG	47,00






ACCESSORIES

version	finish	dimensions cm	code	Euro
PEG for 1 spot	black	19x3x2	BLUXSPEG	47,00
honeycomb filter	black	Ø6,6	BLUXHC66	16,00
note	the filter has to be ordered together with spot			

note the filter has to be ordered together with spot


[illegible]

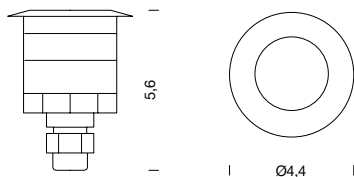

LUX RECESSED IP68

current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
350mA	1,2W	1x LED	73lm	11°	90	according to driver	recessed	3000K	grey	BLUX0201F17WCS	151,00
350mA	1,2W	1x LED	68lm	25°	90	according to driver	recessed	3000K	grey	BLUX0201417WCS	151,00
350mA	1,2W	1x LED	50lm	80°	90	according to driver	recessed	3000K	grey	BLUX0201617WCS	151,00
350mA	1,2W	1x LED	100lm	11°	75	according to driver	recessed	5000K	grey	BLUX0201F170CS	151,00
350mA	1,2W	1x LED	75lm	25°	75	according to driver	recessed	5000K	grey	BLUX02014170CS	151,00
350mA	1,2W	1x LED	55lm	80°	75	according to driver	recessed	5000K	grey	BLUX02016170CS	151,00
note driver not included, recessed box BLUXCASSA1 not included (more specifications in the below table), cable length 1m, series connection.											
customizations		CCT 2700K, 4000K									

CE UK CA IP68




LUX RECESSED NANO IP68

current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
350mA	1,2W	1x LED	44lm	60°	90	according to driver	recessed	3000K	grey	BLUX0501017WCS	118,00
350mA	1,2W	1x LED	44lm	60°	90	according to driver	recessed	4000K	grey	BLUX0501017NCS	118,00
350mA	1,2W	1x LED	44lm	60°	90	according to driver	recessed	5000K	grey	BLUX05010170CS	118,00
note driver not included, recessed box BLUXCASSA5 not included (more specifications in the below table), cable length 1m, series connection.											
customizations		CCT 2700K									

CE UK CA IP68


LUX RECESSED IP68 DRIVER

load	input voltage	range current	max power	Setting	switching	IP	dimensions cm	code	Euro
for 1 to 2 spots	220/240V	350mA	3W	No	ON/OFF	65	3,7X2,3X2,1	WPSUND03350IP	23,00
for 1 to 3 spots	200/240V	350mA	4W	No	ON/OFF	66	5,2x2,6x2,1	WPSUND04350IP	30,00
for 3 to 8 spots	220/240V	350mA	12W	No	ON/OFF	20	9,8x3,9x2,2	WPSUND12350	30,00
for 3 to 13 spots	220-240V	350mA	16W	No	ON/OFF	67	14x3x2,2	WPSUND16350IP	52,00
for 1 to 5 spots	220-240V	350mA*	7W	Yes	TRIAC	20	11x3x2,2	WPSTST350-700	32,00
for 1 to 5 spots	220-240V	350mA*	7W	Yes	1-10V	20	11x3x2,2	WPS1ST350-700	37,00
for 4 to 13 spots	110-240V	350mA*	17W	Yes	DALI	20	12x5,2x2,2	WPSDST250-700	104,00
for 4 to 14 spots	220-240V	350mA*	18W	Yes	CASAMBI	20	9,7x4,3x3	WPSCST150-700	312,00
note series connection, *to be setted									



ACCESSORIES

version	spot	finish	dimensions cm	code	Euro
RECESSED BOX for 1 spot	lux recessed IP68	ABS	Ø4x9	BLUXCASSA1	7,00
RECESSED BOX for 1 spot	lux recessed IP68 SMALL	ABS	Ø2,4x4,5	BLUXCASSA5	7,00
note installation BOX not IP rated					

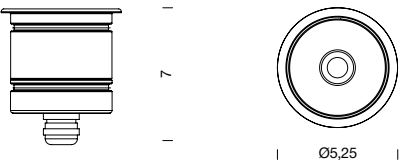


LUX RECESSED 4,2W

current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
350mA	4,2W	1x LED	366lm	17°	90	according to driver	recessed	3000K	grey	BLUR1901N21WAA	203,00
350mA	4,2W	1x LED	372lm	46°	90	according to driver	recessed	3000K	grey	BLUR1901F21WAA	203,00
350mA	4,2W	1x LED	366lm	17°	90	according to driver	recessed	4000K	grey	BLUR1901N21NAA	203,00
350mA	4,2W	1x LED	372lm	46°	90	according to driver	recessed	4000K	grey	BLUR1901F21NAA	203,00
350mA	4,2W	1x LED	366lm	17°	90	according to driver	recessed	3000K	black	BLUR1901N21WAN	203,00
350mA	4,2W	1x LED	372lm	46°	90	according to driver	recessed	3000K	black	BLUR1901F21WAN	203,00
350mA	4,2W	1x LED	366lm	17°	90	according to driver	recessed	4000K	black	BLUR1901N21NAN	203,00
350mA	4,2W	1x LED	372lm	46°	90	according to driver	recessed	4000K	black	BLUR1901F21NAN	203,00
note	cable 1m, recessed box LUXCASSA4 not included, driver not included, series connection										
customizations	CCT 2700K										

CE UK CA IP67


LUX RECESSED 4,2W DRIVER

load	input voltage	range current	max power	Setting	switching	IP	dimensions cm	code	Euro
for 1 to 2 spots	220-240V	350mA	12W	No	ON/OFF	20	9,8x3,9x2,2	WPSUND12350	30,00
for 1 to 3 spots	220-240V	350mA	17W	No	ON/OFF	20	12,2x3,8x2,4	WPSUND17350	47,00
for 1 to 3 spots	220-240V	350mA	16W	No	ON/OFF	67	14x3x2,2	WPSUND16350IP	52,00
for 1 to 2 spots	220-240V	350mA*	10W	Yes	TRIAC	20	11x3x2,2	WPSTST120-350	37,00
for 1 to 2 spots	220-240V	350mA*	10W	Yes	1-10V	20	11x3x2,2	WPS1ST120-350	52,00
for 1 to 3 spots	110-240V	350mA*	17W	Yes	DALI	20	12x5,2x2,2	WPSDST250-700	104,00
for 1 to 4 spots	220-240V	350mA*	18W	Yes	CASAMBI	20	9,7x4,3x3	WPSCST150-700	312,00
note	for outdoor installation IP connection system not included, series connection, *to be settet								



ACCESSORIES

version	finish	dimensions cm	code	Euro
RECESSED BOX for 1 spot	ABS	Ø6,2x10	BLUXCASSA4	7,00
note	installation BOX not IP rated			




LUX CEILING TRIM 1,2W

[illegible]

CE UK CA IP65

LUX CEILING TRIM 1,2W DRIVER

[illegible]

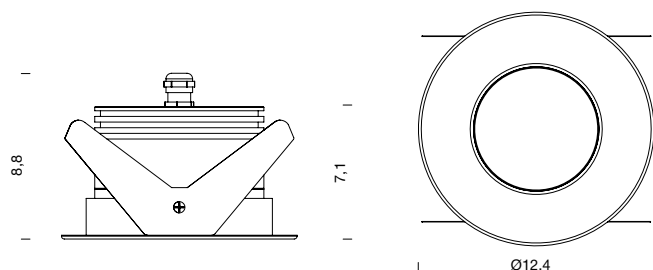


LUX CEILING TRIM 12W

[illegible]

CE UK CA IP65

LUX CEILING TRIM 12W DRIVER


[illegible]



LUX SURFACE 13,5W

voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
220/240V	13,5W	1x COB	1040lm	14°	90	ON/OFF	ceiling surface	2700K	grey	BLUC0901N43DAA	437,00
220/240V	13,5W	1x COB	900lm	53°	90	ON/OFF	ceiling surface	2700K	grey	BLUC0901H43DAA	437,00
220/240V	13,5W	1x COB	1100lm	14°	90	ON/OFF	ceiling surface	3000K	grey	BLUC0901N43WAA	437,00
220/240V	13,5W	1x COB	950lm	53°	90	ON/OFF	ceiling surface	3000K	grey	BLUC0901H43WAA	437,00
220/240V	13,5W	1x COB	1200lm	14°	90	ON/OFF	ceiling surface	4000K	grey	BLUC0901N43NAA	437,00
220/240V	13,5W	1x COB	1050lm	53°	90	ON/OFF	ceiling surface	4000K	grey	BLUC0901H43NAA	437,00
220/240V	13,5W	1x COB	1040lm	14°	90	ON/OFF	ceiling surface	2700K	black	BLUC0901N43DAN	437,00
220/240V	13,5W	1x COB	900lm	53°	90	ON/OFF	ceiling surface	2700K	black	BLUC0901H43DAN	437,00
220/240V	13,5W	1x COB	1100lm	14°	90	ON/OFF	ceiling surface	3000K	black	BLUC0901N43WAN	437,00
220/240V	13,5W	1x COB	950lm	53°	90	ON/OFF	ceiling surface	3000K	black	BLUC0901H43WAN	437,00
220/240V	13,5W	1x COB	1200lm	14°	90	ON/OFF	ceiling surface	4000K	black	BLUC0901N43NAN	437,00
220/240V	13,5W	1x COB	1050lm	53°	90	ON/OFF	ceiling surface	4000K	black	BLUC0901H43NAN	437,00
note		Integrated driver, CRI > 90									


CE UK CA IP65

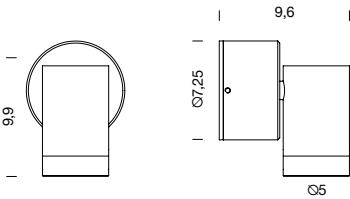

LUX W-S (SINGLE)

voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
220/240V	4,2W	1x LED	366lm	17°	90	ON/OFF	wall	3000K	grey	BLUW4101N21WAA	333,00
220/240V	4,2W	1x LED	372lm	46°	90	ON/OFF	wall	3000K	grey	BLUW4101F21WAA	333,00
220/240V	4,2W	1x LED	366lm	17°	90	ON/OFF	wall	4000K	grey	BLUW4101N21NAA	333,00
220/240V	4,2W	1x LED	372lm	46°	90	ON/OFF	wall	4000K	grey	BLUW4101F21NAA	333,00
220/240V	4,2W	1x LED	366lm	17°	90	ON/OFF	wall	3000K	black	BLUW4101N21WAN	333,00
220/240V	4,2W	1x LED	372lm	46°	90	ON/OFF	wall	3000K	black	BLUW4101F21WAN	333,00
220/240V	4,2W	1x LED	366lm	17°	90	ON/OFF	wall	4000K	black	BLUW4101N21NAN	333,00
220/240V	4,2W	1x LED	372lm	46°	90	ON/OFF	wall	4000K	black	BLUW4101F21NAN	333,00
note	integrated driver										
Customization	CCT 2700K										

CE UK CA IP65




LUX GARDEN

[illegible]

CE UK CA IP67

LUX GARDEN DRIVER

[illegible]




LUX WALKWAY

current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
350mA	1,2W	1x LED	10lm	asymmetric	90	according to driver	recessed	3000K	grey	BLUX0201217WCS	136,00
350mA	1,2W	1x LED	12lm	asymmetric	75	according to driver	recessed	5000K	grey	BLUX02012170CS	136,00
note driver not included (more specifications in the below table), cable length 1m, series connection											
customizations CCT 2700K											

CE UKCA IP65


LUX WALKWAY DRIVER

load	input voltage	range current	max power	Setting	switching	IP	dimensions cm	code	Euro
for 1 to 2 spots	220/240V	350mA	3W	No	ON/OFF	65	3,7X2,3X2,1	WPSUND03350IP	23,00
for 1 to 3 spots	200/240V	350mA	4W	No	ON/OFF	66	5,2x2,6x2,1	WPSUND04350IP	30,00
for 3 to 8 spots	220/240V	350mA	12W	No	ON/OFF	20	9,8x3,9x2,2	WPSUND12350	30,00
for 3 to 13 spots	220-240V	350mA	16W	No	ON/OFF	67	14x3x2,2	WPSUND16350IP	52,00
for 1 to 5 spots	220-240V	350mA*	7W	Yes	TRIAC	20	11x3x2,2	WPSTST350-700	32,00
for 1 to 5 spots	220-240V	350mA*	7W	Yes	1-10V	20	11x3x2,2	WPS1ST350-700	37,00
for 4 to 13 spots	110-240V	350mA*	17W	Yes	DALI	20	12x5,2x2,2	WPSDST250-700	104,00
for 4 to 14 spots	220-240V	350mA*	18W	Yes	CASAMBI	20	9,7x4,3x3	WPSCST150-700	312,00
note series connection, *to be settled									



ACCESSORIES


version	finish	dimensions cm	code	Euro
RECESSED BOX for 1 spot	ABS	Ø4x9	BLUXCASSA1	7,00
note installation BOX not IP rated				



WALKBY

voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
100/240V	4W	LED	180lm	direct asymmetric	> 80	ON/OFF	wall	3000K	dark grey	MWBY4101038WGA	203,00
note		recessed box included, driver included									


CE UK CA IP65

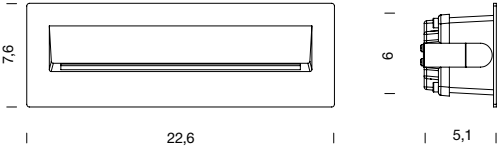

WALKBY PLUS

voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code	Euro
220/240V	8W	LED	330lm	direct asymmetric	> 80	ON/OFF	wall	3000K	dark grey	MWBY41P1038WGA	245,00
note		recessed box included, driver included									

CE UK CA IP65

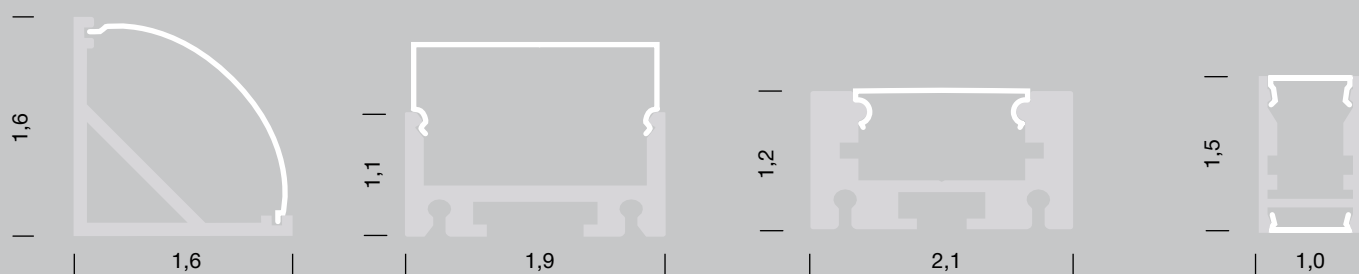

P23


P24

P04


P25




PROFILES AND LED STRIPS




P22





P13

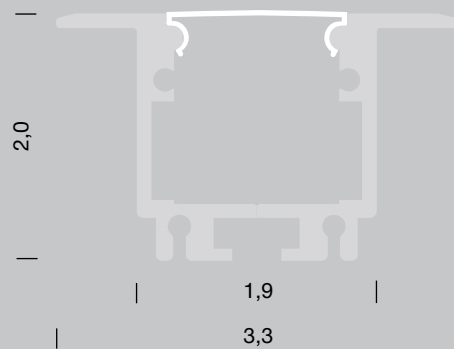



P05

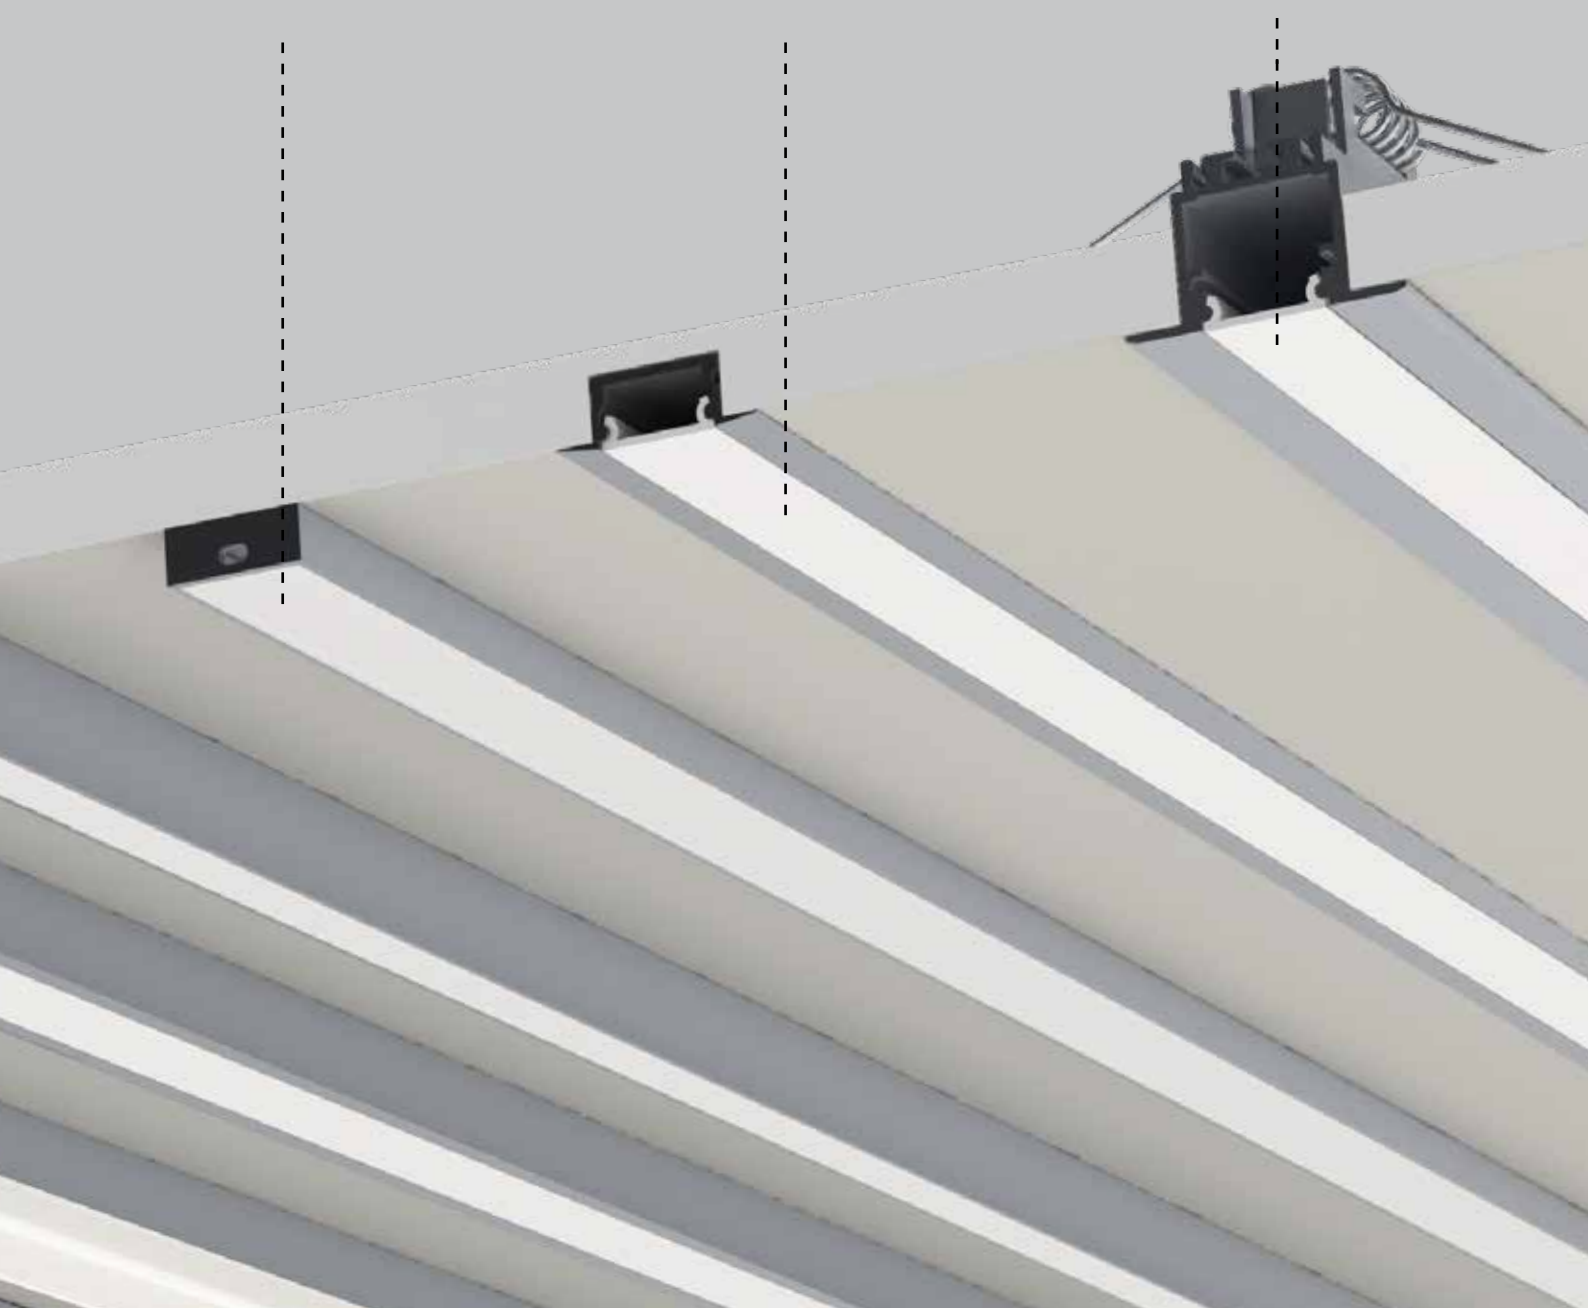

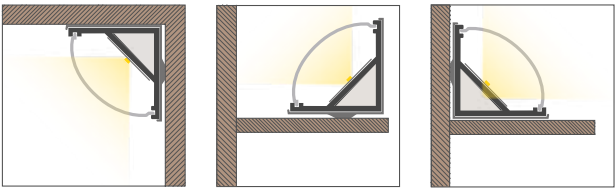


P23

length	screen	finish	code	Euro
1m	opal	grey	BP23AAOP1M	29,00
2m	opal	grey	BP23AAOP2M	55,00
note	aluminum profile with opal screen included - black finish on demand			





BP23ENDCAPS
End caps



BP23CLIP
Clip

Accessories


version	profile	mounting	finish	code	Euro
End cap couple	P23	ceiling/wall	grey	BP23ENDCAPS	7,50
Clip P23	P23	wall	grey	BP23CLIP	5,20
note	Two fixing clip required per meter				

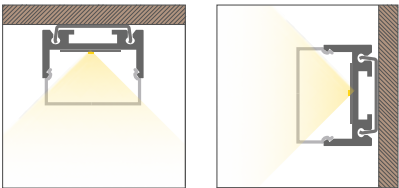


*Installation is recommended in wooden plasterboard surfaces

P24

length	screen	finish	code	Euro
1m	opal	grey	BP24AOP1M	36,00
2m	opal	grey	BP24AOP2M	73,00
3m	opal	grey	BP24AOP3M	102,00
note	aluminum profile with opal screen included - black finish on demand			





BP24ENDCAPS
End caps



BP24CLIP
Fixing clip

Accessories


version	profile	mounting	finish	code	Euro
End caps couple	P24	ceiling/wall	grey	BP24ENDCAPS	11,00
Clip P24	P24	ceiling/wall	grey	BP24CLIP	4,00
note	Two fixing clip required per meter				

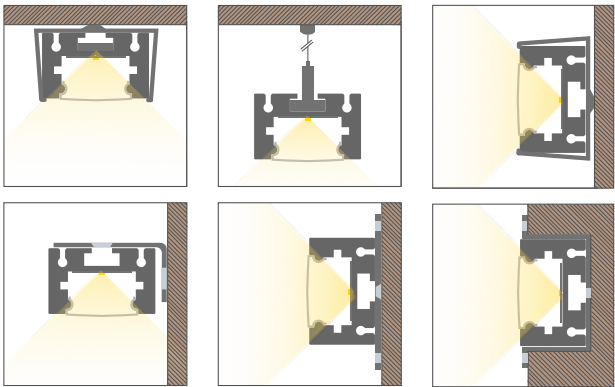

*It is possible a recessed installation only in wooden/plasterboard surfaces

P04


length	screen	finish	code	Euro
1m	opal	grey	BP04AAOP1M	29,00
2m	opal	grey	BP04AAOP2M	65,00
3m	opal	grey	BP04AAOP3M	87,00
note	aluminum profile with opal screen included - black finish on demand			

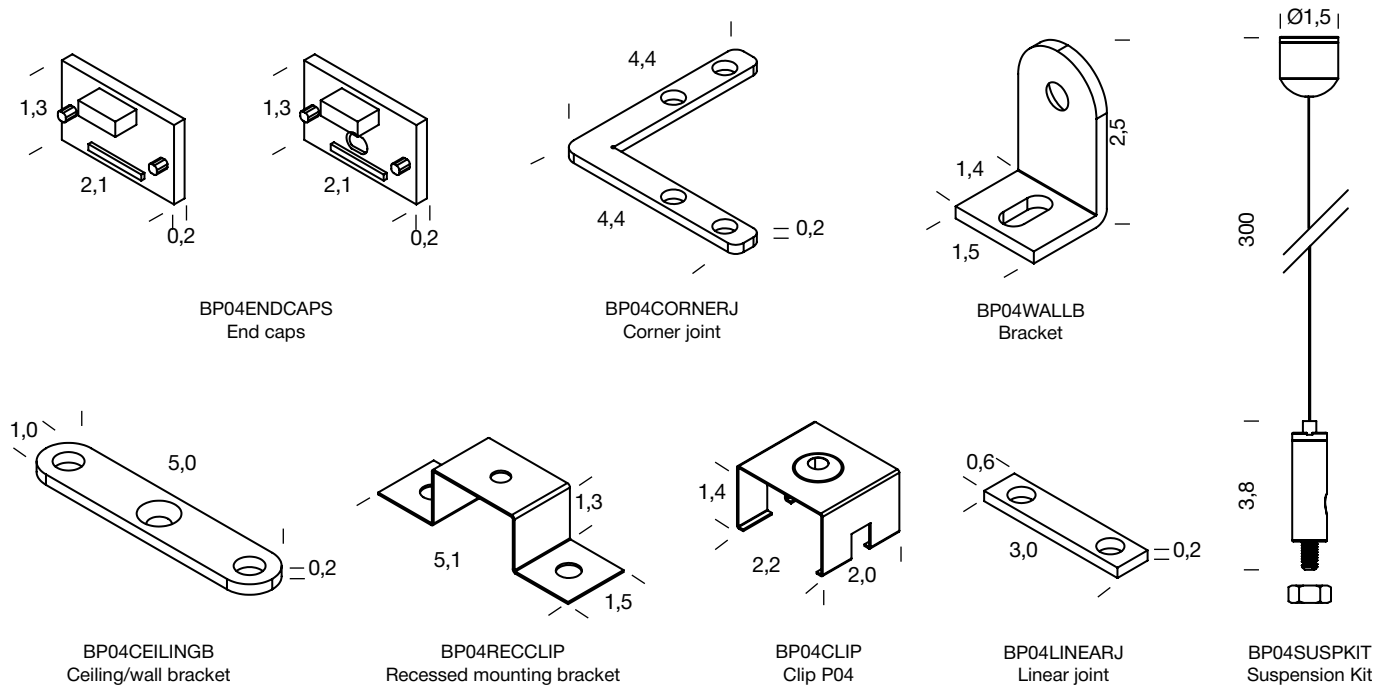




Accessories

version	profile	mounting	finish	code	Euro
End caps couple	P04	ceiling/wall	grey	BP04ENDCAPS	7,50
Corner joint	P04	all	grey	BP04CORNERJ	18,00
Linear joint	P04	all	grey	BP04LINEARJ	6,50
Bracket	P04	wall	grey	BP04WALLB	7,50
Ceiling/wall bracket	P04	ceiling/wall	grey	BP04CEILINGB	5,00
Recessed mounting bracket	P04	recessed	grey	BP04RECCLIP	7,50
Clip P04	P04	ceiling/wall	grey	BP04CLIP	2,00
Suspension Kit	P04	suspended	grey	BP04SUSPKIT	24,00
note	Two fixing clip required per meter				

ACCESSORIES PROFILES

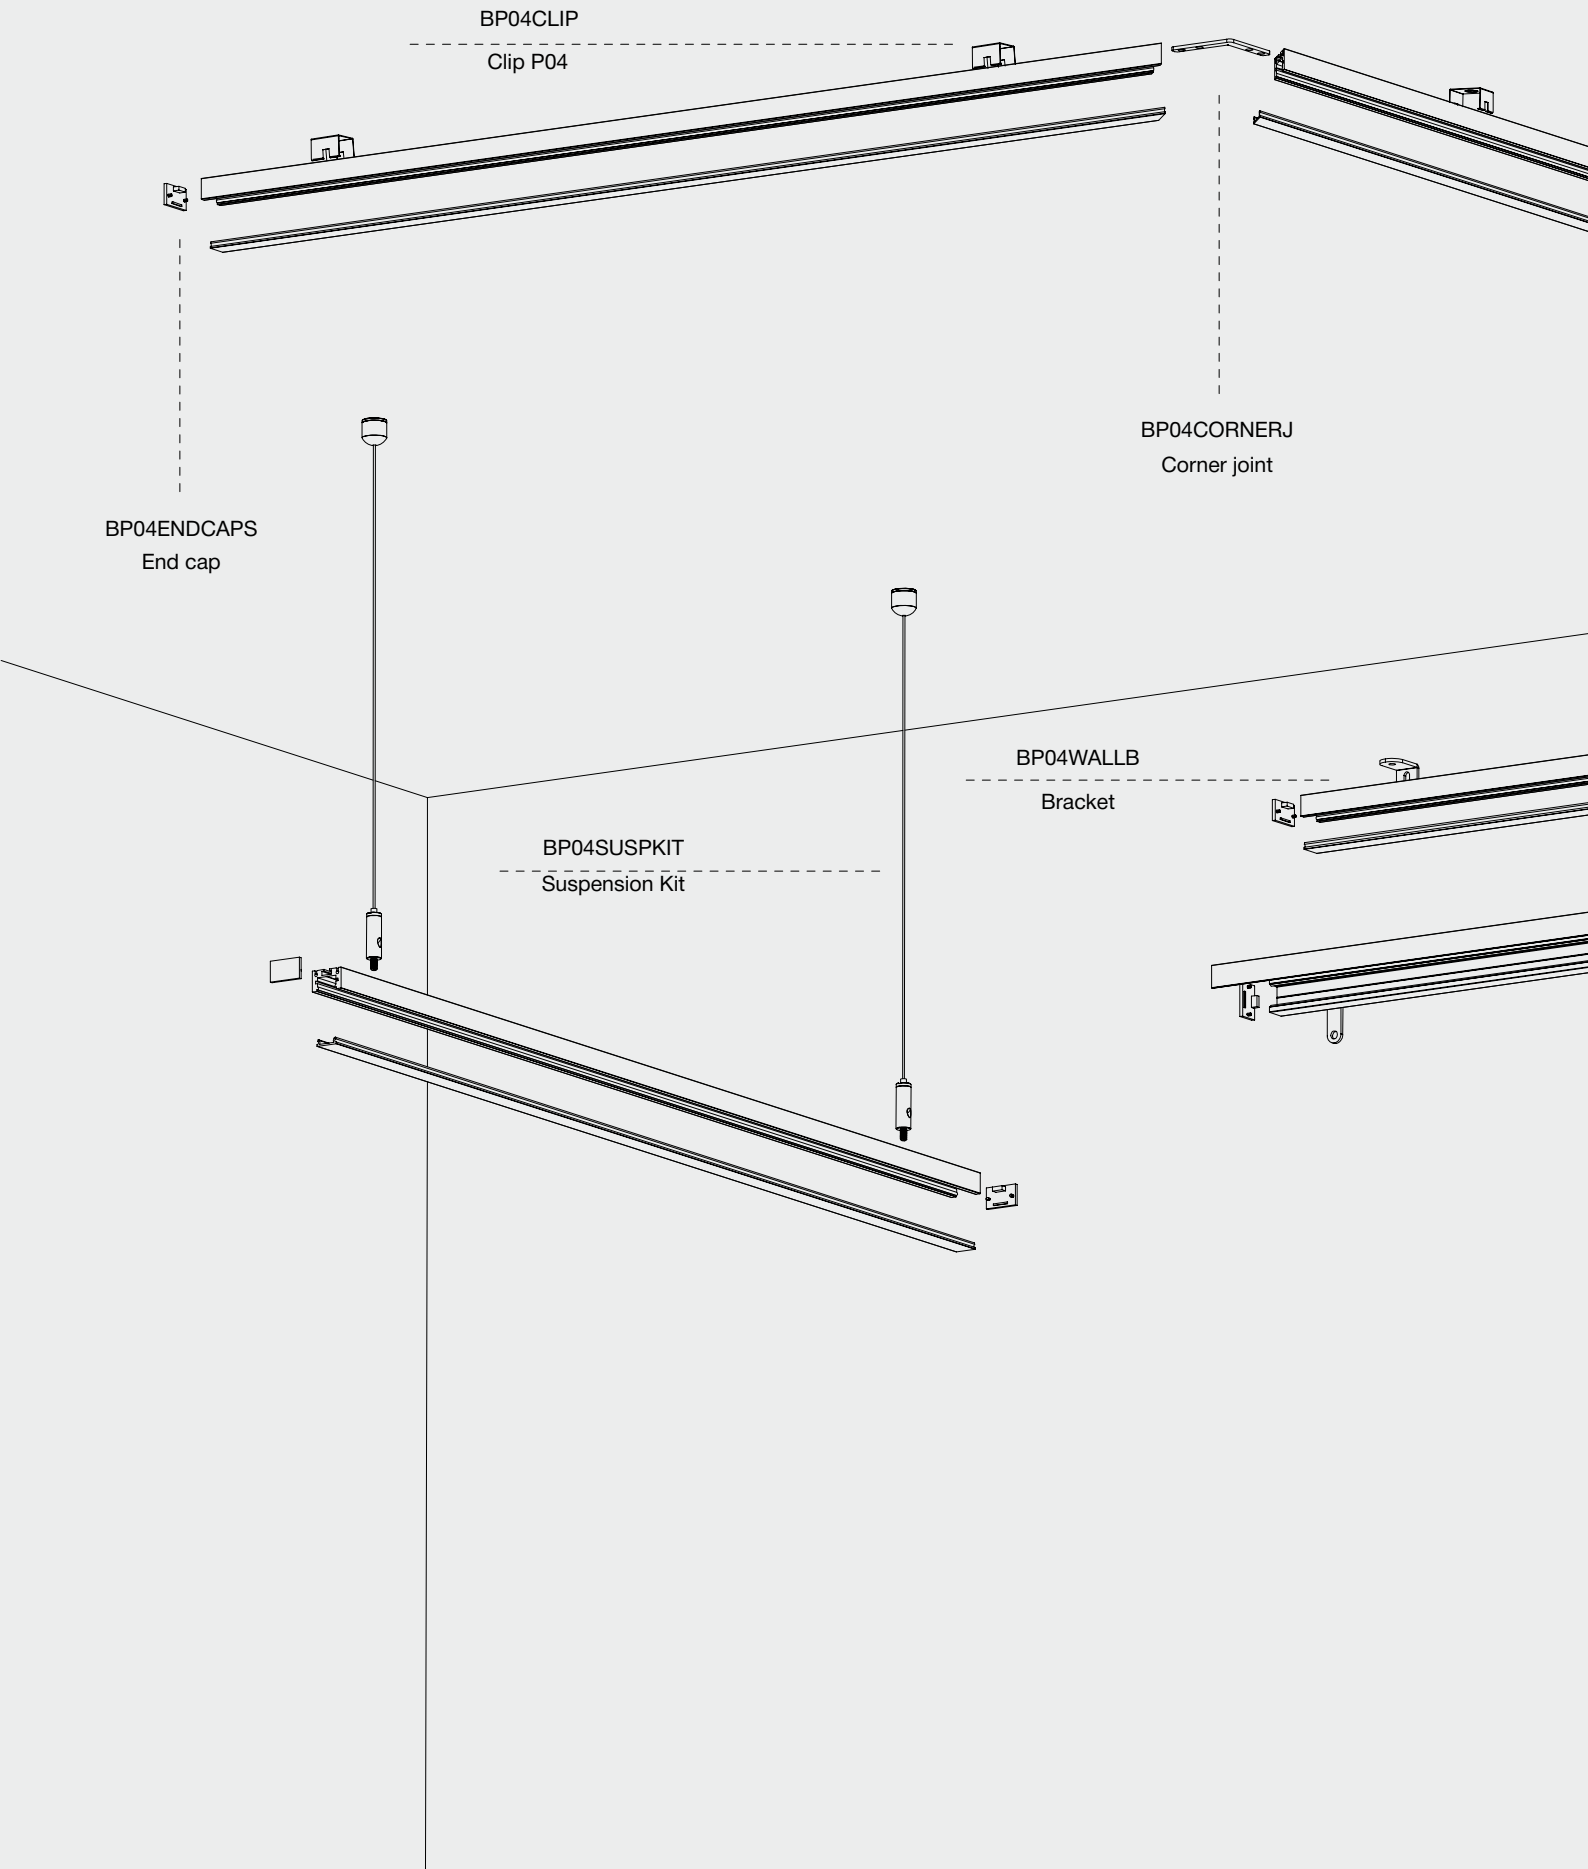

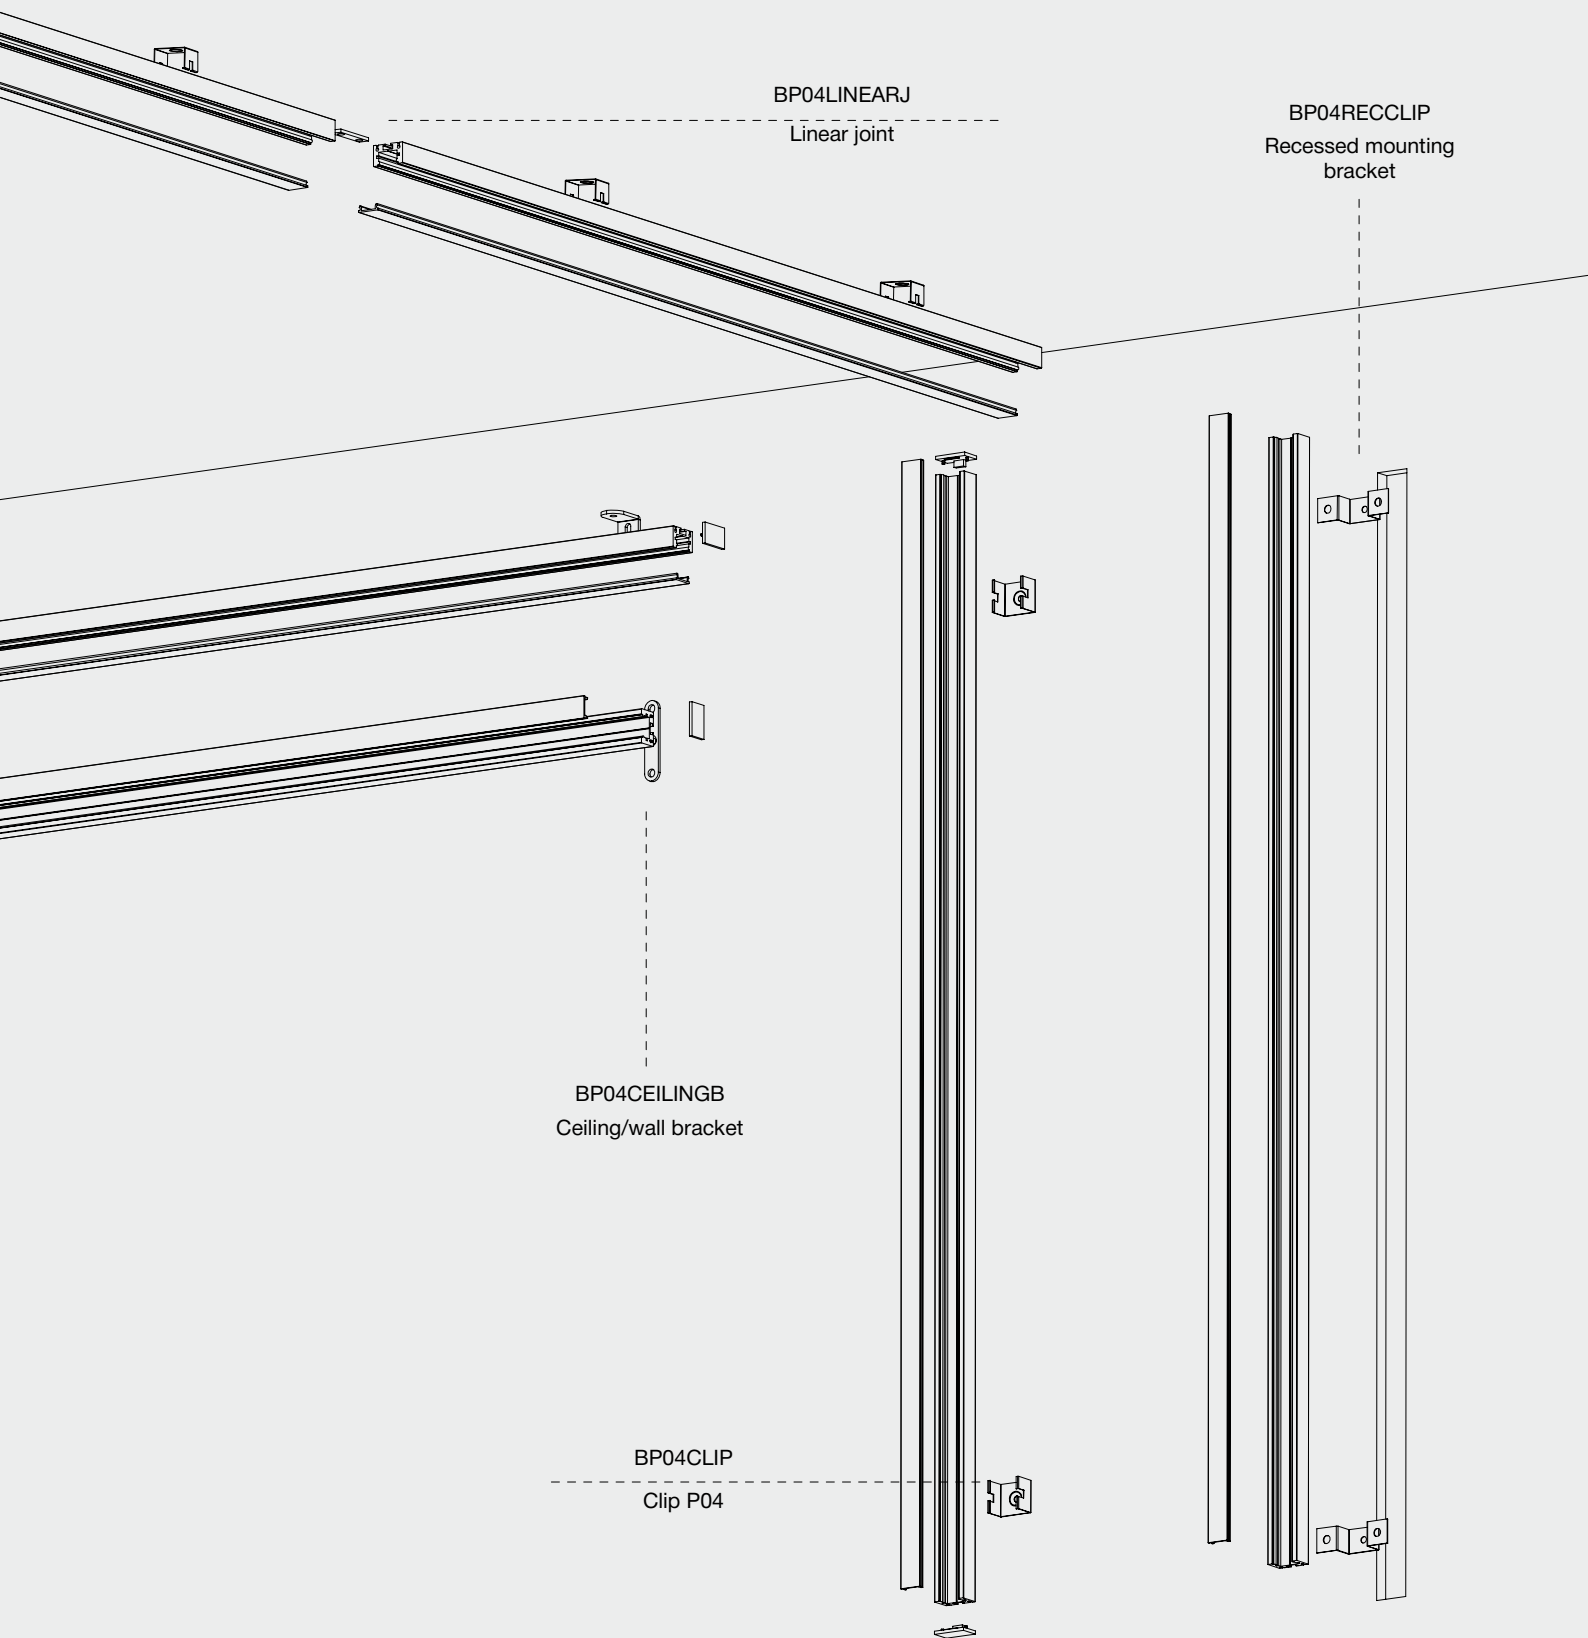


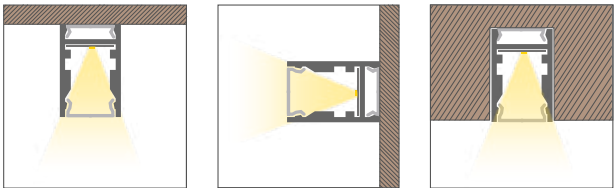

*A recessed installation is recommended in wooden surfaces

P25


length	screen	finish	code	Euro
1m	opal	grey	BP25AAOP1M	36,50
2m	opal	grey	BP25AAOP2M	73,00
3m	opal	grey	BP25AAOP3M	110,00
note	aluminum profile with opal screen included -plastic profile for installation included- black finish on demand			

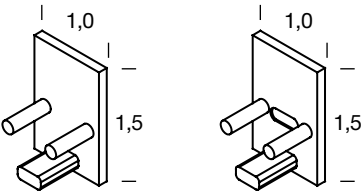

BP25ENDCAPS
End caps

Accessories


version	profile	mounting	finish	code	Euro
End caps couple	P25	ceiling/wall	grey	BP25ENDCAPS	11,50
note	Two fixing clip required per meter				

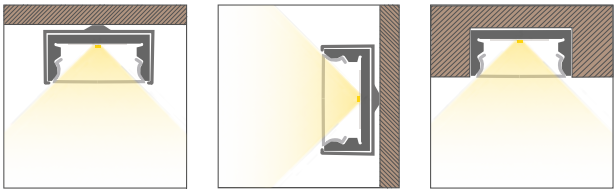


*A recessed installation is recommended in wooden surfaces

P22

length	screen	finish	code	Euro
1m	opal	grey	BP22AAOP1M	23,00
2m	opal	grey	BP22AAOP2M	45,50
3m	opal	grey	BP22AAOP3M	60,50
note	aluminum profile with opal screen included - black finish on demand			

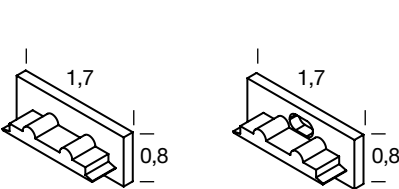



BP22ENDCAPS
End caps



BP22CLIP
Fixing clip

Accessories


version	profile	mounting	finish	code	Euro
End caps couple	P22	ceiling/wall	grey	BP22ENDCAPS	6,50
Fixing clip	P22	ceiling/wall	grey	BP22CLIP	3,50
note	Two fixing clip required per meter				




*A recessed installation is recommended in wooden/plasterboard surfaces

P13

length	screen	finish	code	Euro
1m	opal	grey	BP13AAOP1M	26,00
2m	opal	grey	BP13AAOP2M	51,00
3m	opal	grey	BP13AAOP3M	73,00
note	aluminum profile with opal screen included - black finish on demand			





BP13ENDCAPS
End caps



BP13CLIP
Fixing clip

Accessories


version	profile	mounting	finish	code	Euro
End caps couple	P13	recessed	grey	BP13ENDCAPS	15,60
Fixing clip	P13	recessed	grey	BP13CLIP	7,50
note	Two fixing clip required per meter				

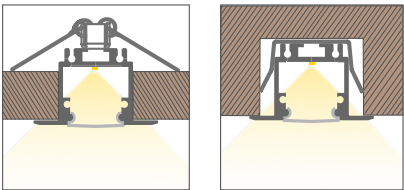


*A recessed installation is recommended in wooden/plasterboard surfaces

P05


length	screen	finish	code	Euro
1m	opal	grey	BP05AAOP1M	29,00
2m	opal	grey	BP05AAOP2M	58,00
3m	opal	grey	BP05AAOP3M	85,00
note	aluminum profile with opal screen included - black finish on demand			

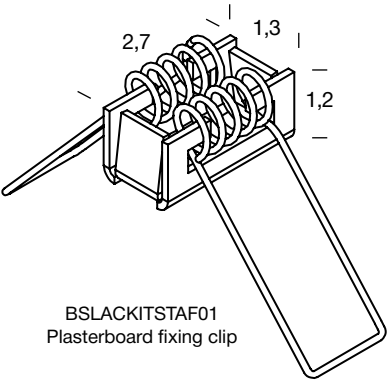

BSLACKITSTAF01
Plasterboard fixing clip



BP05CLIP-PLC
Wooden fixing clip



BP04LINEARJ
Linear joint

Accessories

version	ceiling thickness	profile	mounting	finish	code	Euro
Plasterboard fixing clip	min 0,3/max 4	P05	recessed	grey	BSLACKITSTAF01	16,00
Wooden fixing clip	min 3	P05	recessed	grey	BP05CLIP-PLC	3,50
Linear joint		P04	all	grey	BP04LINEARJ	6,50
note	Two fixing clip required per meter					


N25

lumen/m
1200-1550lm

power/m
9,6W

Q.ty LED/m
128

dimensions
500x1x0,2




N19

lumen/m
1850-2000lm

power/m
14,5W

Q.ty LED/m
160

dimensions
600x0,5x0,2




N24

lumen/m
2064-2368lm

power/m
14,5W

Q.ty LED/m
160

dimensions
1000x1x0,2




N24HF

lumen/m
3400-4300lm

power/m
23W

Q.ty LED/m
160

dimensions
1000x1x0,2



N17 lumen/m 1590-1900lm power/m 15W Q.ty LED/m 240 dimensions 600x1x0,2	N10 lumen/m 3090-3260lm power/m 19,2W Q.ty LED/m 112 dimensions 1000x1x0,2	N21 lumen/m 570lm power/m 14,4W Q.ty LED/m 120 dimensions 500x1x0,2	N22 lumen/m 700lm power/m 15W Q.ty LED/m 192 dimensions 500x1,2x0,2
---	--	---	---

N19

TECHNICAL INFORMATION

IP	IP20
Tension	24V
Power consumption	14,4W/m
Dimesnions	600x0,5x0,2
Q.ty LED/m	160
Sectionable every...	5
Luminous flux/m	>1850lm
CRI	90
Lifetime	>L ₇₀ B ₅₀ >50000hrs
Working temp.	-10 +35°C
note	Warranty: 3 years


Color temperature

	2700K
	3000K
	4000K

Code	Description	CRI	CCT	power/m	lumen/m	energy eff. class	Euro
1-WKL-6022-0-00	LED strip 960 LED 86W IP20	90	2700K	14,4W	1800lm		218,00
1-WKL-6023-0-00	LED strip 960 LED 86W IP20	90	3000K	14,4W	1850lm		218,00
1-WKL-6024-0-00	LED strip 960 LED 86W IP20	90	4000K	14,4W	2000lm		218,00
note	3M VHB tape included						



DIMENSIONS

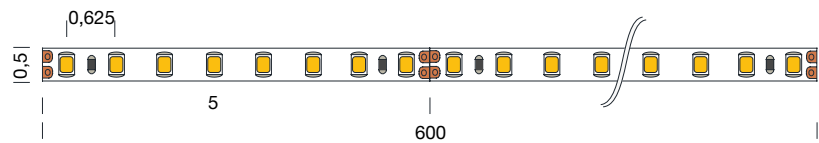

Compatible aluminum profiles



P25

*to verify the compatibility of the profiles with various models of LED strips, please consult p.169
*do not connect more than 5m of strip, be careful of the voltage drop.

N24/N24HF

TECHNICAL INFORMATIONS

IP	IP20	IP20
Tension	24V	24V
Power consumption	14,5W/m	23W/m
Dimesnions	1000x1x0,2	1000x1x2
Q.ty LED/m	160	160
Sectionable every...	0,5	0,5
Luminous flux/m	>2064lm	>3400lm
CRI	90	>80
R9 index	>65 (CRI90)	
Lifetime	>L ₇₀ B ₅₀ >50000hrs	>L ₇₀ B ₅₀ >50000hrs
Working temp.	-10 +35°C	-10 +35°C
note	Warranty: 3 years	Warranty: 3 years

Color temperature

2200K

2700K

3000K

3500K (on demand)

4000K

5000K (on demand)

Code	Description	CRI	CCT	power/m	lumen/m	energy eff. class	Euro
1-WKL-3020-1-00	LED strip 1600 LED 145W IP20	90	2700K	14,5W	2064lm	E	499,00
1-WKL-3021-1-00	LED strip 1600 LED 145W IP20	90	3000K	14,5W	2224lm	E	499,00
1-WKL-3022-1-00	LED strip 1600 LED 145W IP20	90	4000K	14,5W	2368lm	D	499,00
1-WKL-3025-0-00	LED strip 1600 LED 230W IP20	>80	2700K	23W	3400lm	D	575,00
1-WKL-3026-0-00	LED strip 1600 LED 230W IP20	>80	3000K	23W	3650lm	D	575,00
1-WKL-3027-0-00	LED strip 1600 LED 230W IP20	>80	4000K	23W	4300lm	C	575,00
note	3M VHB tape included						

CE

UKCA

RoHS


UL LISTED

Indoor

DC 24

Dimm

DIMENSIONS

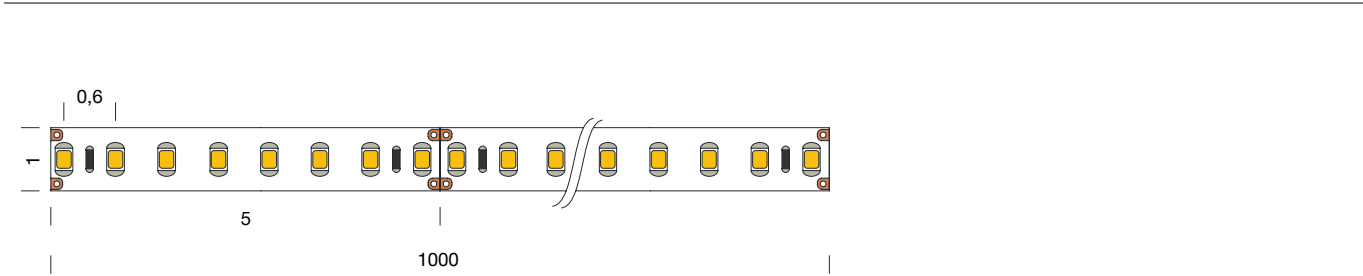

Compatible aluminum profiles



*to verify the compatibility of the profiles with various models of LED strips, please consult p.169
*do not connect more than 5m of strip, be careful of the voltage drop.

N17

TECHNICAL INFORMATION

IP	IP20
Tension	24V
Power consumption	15W/m
Dimesnions	600x0,5x0,2
Q.ty LED/m	240
Sectionable every...	3,3
Luminous flux/m	>1590lm
CRI	>95
R9 index	>83
Lifetime	>L ₇₀ B ₅₀ >50000hrs
Working temp.	-10 +35°C
note	Warranty: 3 years


Color temperature

	2700K
	3000K
	4000K

Code	Description	CRI	CCT	power/m	lumen/m	energy eff. class	Euro
1-WKL-4500-0-00	LED strip 1440 LED 90W IP20	>97	2700K	15W	1590lm		237,00
1-WKL-4501-0-00	LED strip 1440 LED 90W IP20	>97	3000K	15W	1770lm		237,00
1-WKL-4502-0-00	LED strip 1440 LED 90W IP20	>97	4000K	15W	1905lm		237,00
note	3M VHB tape included						



DIMENSIONS

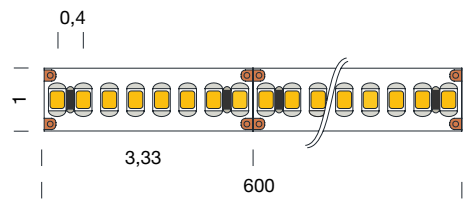

Compatible aluminum profiles



*to verify the compatibility of the profiles with various models of LED strips, please consult p.169
*do not connect more than 5m of strip, be careful of the voltage drop.

N21

TECHNICAL INFORMATION

IP	IP20
Tension	24V
Power consumption	14,4W/m
Dimesnions	500x1x0,2
Q.ty LED/m	120
Sectionable every...	5
Luminous flux/m	570lm
CRI	/
Lifetime	>L ₇₀ B ₅₀ >50000hrs
Working temp.	-10 +35°C
note	Warranty: 3 years

Color temperature




RGB

Code	Description	CRI	CCT	power/m	lumen/m	energy eff. class	Euro
1-WKL-4510-0-00	RGB	/	/	14,4W	570lm	/	239,00
note	3M VHB tape included						



DIMENSIONS

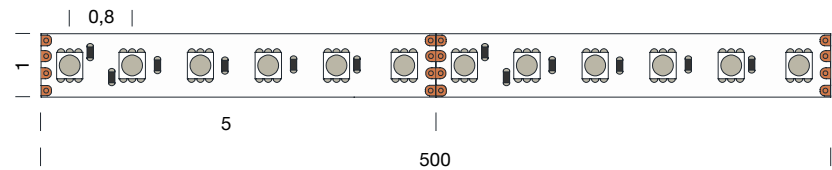

Compatible aluminum profiles




P23



P24



P04



P05



P22



P13

*to verify the compatibility of the profiles with various models of LED strips, please consult p.169
*do not connect more than 5m of strip, be careful of the voltage drop.

all dimensions are in cm

N22

TECHNICAL INFORMATION

IP	IP20
Tension	24V
Power consumption	15W/m
Dimesnions	500x1,2x0,2
Q.ty LED/m	192
Sectionable every...	6,25
Luminous flux/m	700lm
CRI	90
Lifetime	>L ₇₀ B ₅₀ >50000hrs
Working temp.	-10 +35°C
note	Warranty: 3 years


Color temperature

2400K + RGB

Code	Description	CRI	CCT	power/m	lumen/m	energy eff. class	Euro
1-WKL-4511-0-00	RGB-white	90	2400K	15W	700lm	G	281,00
note	3M VHB tape included						



DIMENSIONS



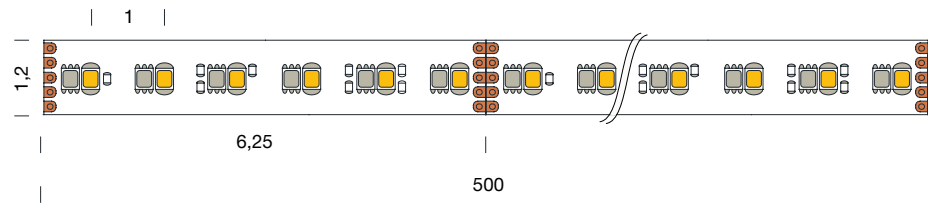


Compatible aluminum profiles





*to verify the compatibility of the profiles with various models of LED strips, please consult p.169
*do not connect more than 5m of strip, be careful of the voltage drop.


COMPATIBLE ALUMINUM PROFILES

								
		P23	P24	P04	P25	P22	P13	P05
	N25							
	N19							
	N24/HF							
	N17							
	N10							
	N21							
	N22							

-  LED Dot Free effect/ ideal for direct light solutions or continuous lines
-  Slightly visible LED Dot / ideal for indirect light solutions
-  Not compatible/ not recommended

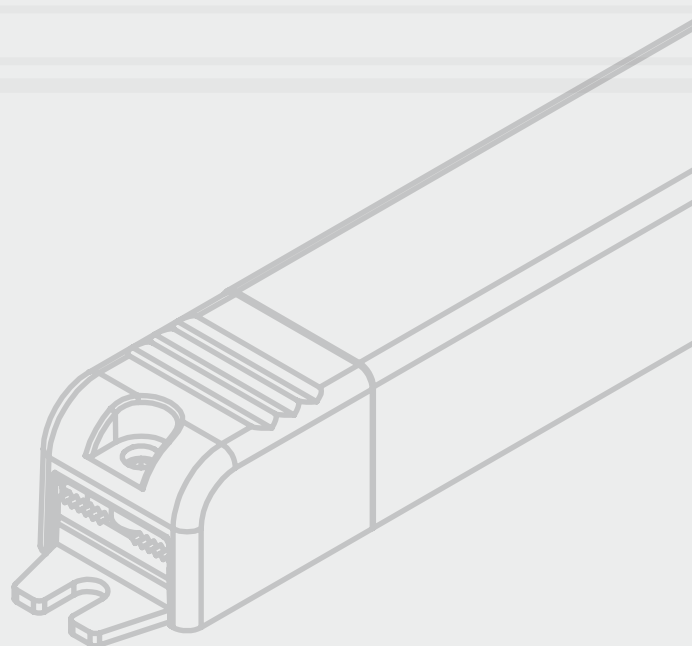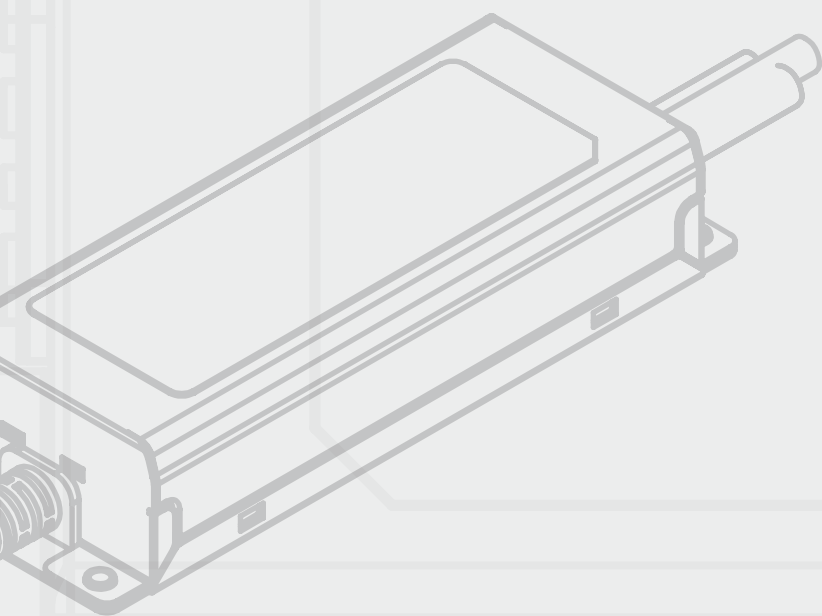

DRIVERS AND CONTROLS

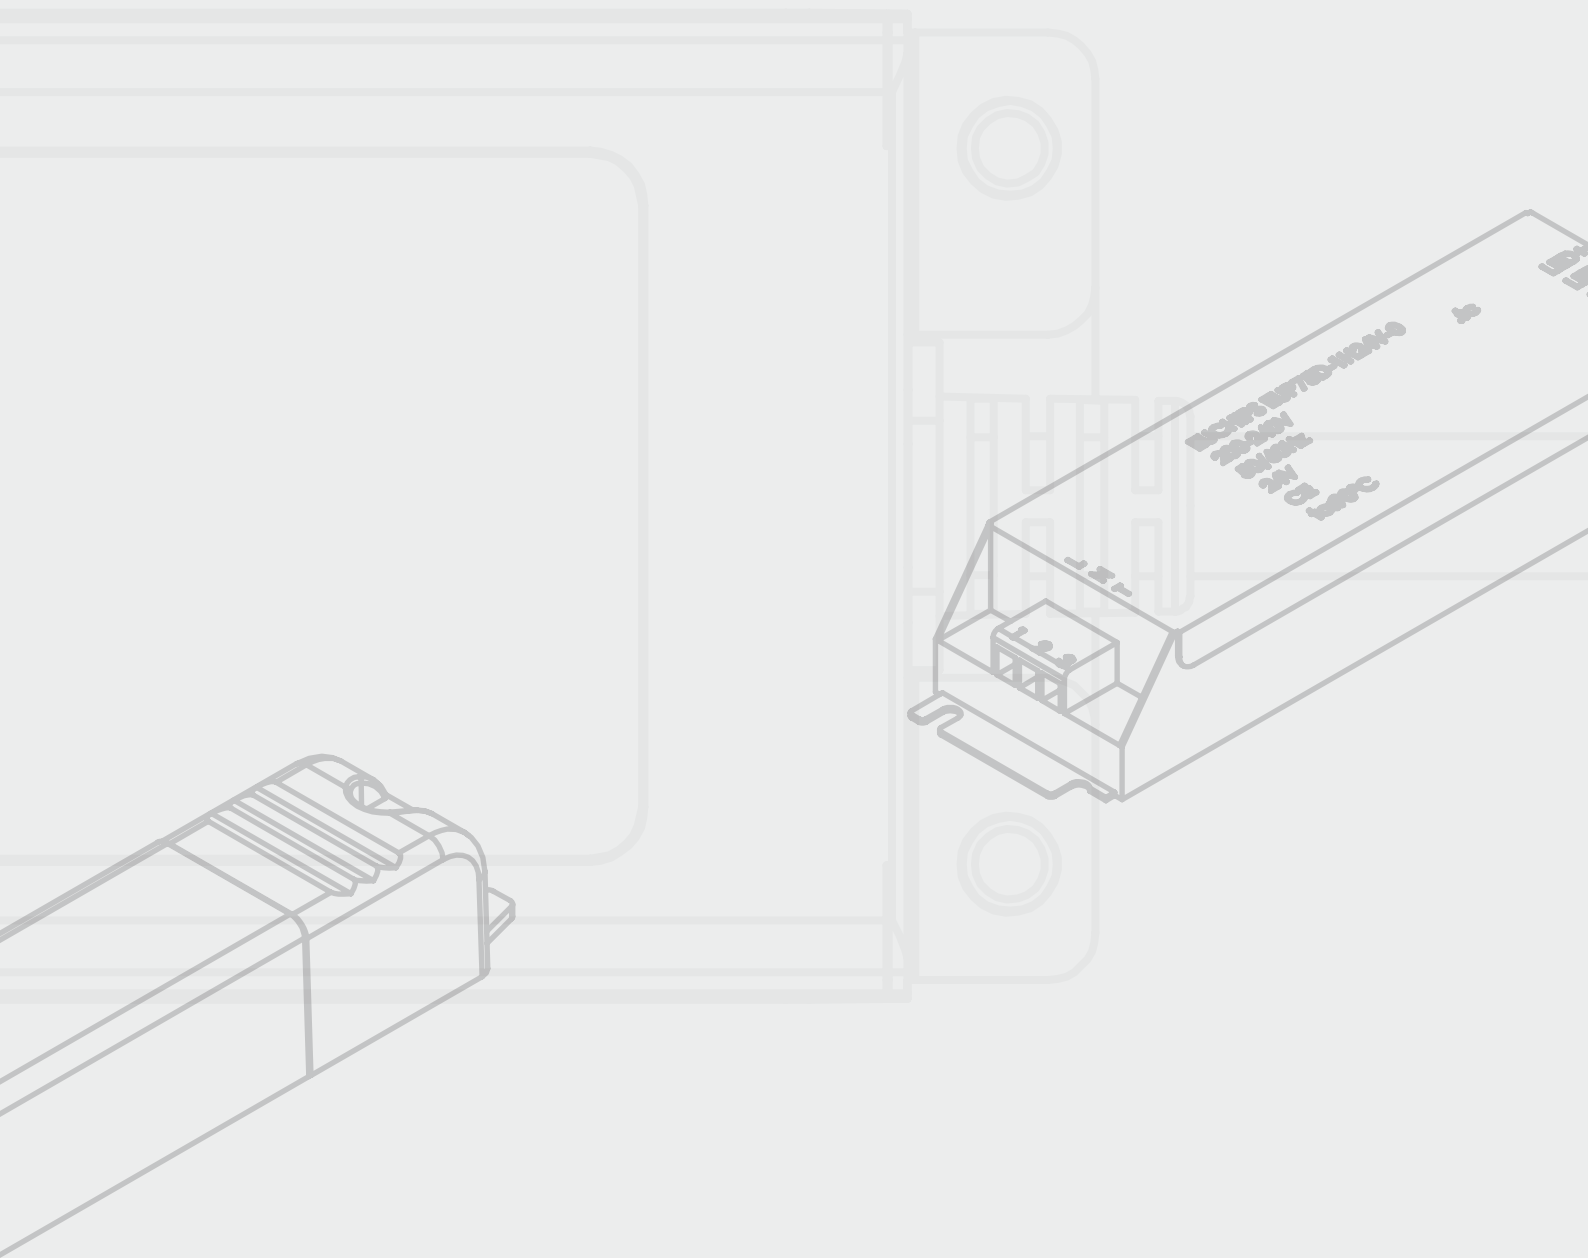

CONSTANT CURRENT DRIVER

input voltage	range current	max power	Setting	switching	IP	dimensions cm	code	Euro
220/240V	350mA	3W	No	ON/OFF	65	3,7x2,3x2,1	WPSUND03350IP	23,00
110/240V	350mA	4W	No	ON/OFF	66	5,2x2,6x2,1	WPSUND04350IP	30,00
220/240V	350mA	12W	No	ON/OFF	20	9,8x3,9x2,2	WPSUND12350	30,00
220-240V	350mA	16W	No	ON/OFF	67	14x3x2,2	WPSUND16350IP	52,00
220/240V	350mA	17W	No	ON/OFF	20	12,2x3,8x2,4	WPSUND17350	47,00
220-240V	600mA	28W	No	ON/OFF	20	9,7x4,3x3	WPSUND28600	47,00
220-240V	700mA	3W	No	ON/OFF	20	2,85x4,34x2,1	WPSUND03700	21,00
200-240V	700mA	12W	No	ON/OFF	20	12,7x5x1,1	WPSUND12700	51,00
200-240V	150-500mA	22W	Yes	ON/OFF	20	13,8x3x2,21	WPSUST150-500	37,00
220-240V	120-350mA	10W	Yes	TRIAC	20	11x3x2,2	WPSTST120-350	37,00
220-240V	350-700mA	10W	Yes	TRIAC	20	11x3x2,2	WPSTST350-700	32,00
220-240V	500-900mA	30W	No	TRIAC	20	18,5x4,3x2,9	WPSTST550-900	58,00
220-240V	350-700mA	10W	Yes	1-10V	20	11x3x2,2	WPS1ST350-700	37,00
220-240V	120-350mA	10W	Yes	1-10V	20	11x3x2,2	WPS1ST120-350	52,00
110-277V	250mA - 1A	35W	Yes	1-10V	20	13,9x4,2x3	WPS1ST250-1A	84,00
110-240V	250-700mA	20W	Yes	DALI	20	12x5,2x2,2	WPSDST250-700	104,00
200-240V	120-300mA	10W	Yes	DALI	20	11x3x2,2	WPSDST120-300	58,00
110-277V	250mA - 1A	35W	Yes	DALI	20	13,9x4,2x3	WPSDST250-1A	125,00
220-240V	150-700mA	26W	Yes	CASAMBI	20	9,7x4,3x3	WPSCST150-700	312,00

CONSTANT VOLTAGE DRIVER

input voltage	output voltage	max power	switching	IP	dimensions cm	code	Euro
220/240V	24VDC	20W	ON/OFF	20	10,3x3,5x1,6	WPSU20W24V	30,00
110/240V	24VDC	25W	ON/OFF	67	14,8x4x3,2	WPSU25W24VIP	86,00
220/240V	24VDC	60W	ON/OFF	20	18x5,2x3	WPSU60W24V	58,00
90/305V	24VDC	60W	ON/OFF	67	16,3x4,3x3,2	WPSU60W24VIP	110,00
110/240V	24VDC	75W	ON/OFF	67	14x6,3x3,2	WPSU75W24VIP	115,00
110/240V	24VDC	100W	ON/OFF	67	14x6,3x3,2	WPSU100W24VIP	125,00
220/240V	24VDC	120W	ON/OFF	20	30x4x3	WPSU120W24V	89,00
110/240V	24VDC	150W	ON/OFF	67	18x6,3x3,5	WPSU150W24VIP	136,00
220/240V	24VDC	150W	ON/OFF	20	17,9x6,2x3	WPSU150W24V	146,00
100/305V	48VDC	240W	ON/OFF	67	22x6,5x3,5	WPSU240W48VIP	260,00
110/240V	24VDC	240W	ON/OFF	67	24,4x7,1x3,8	WPSU240W24VIP	260,00
200/240V	24VDC	250W	ON/OFF	20	19,5x6,7x3,2	WPSU250W24V	203,00
180/240V	24VDC	30W	TRIAC	20	10,7x4x2,2	WPST30W24V	58,00
220/240V	24VDC	75W	TRIAC	20	21,2x5,4x3,3	WPST75W24V	172,00
100/240V	24VDC	30W	DALI	20	10,7x4x2,2	WPSD30W24V	115,00
220/240V	24VDC	60W	DALI2/PUSH	20	36,1x3x2,1	WPSD60W24V	188,00
110/240V	24VDC	120W	DALI2	67	19,1x6,3x3,8	WPSD120W24VIP	229,00
220/240V	24VDC	150W	DALI2/PUSH	20	35x3x2	WPSD150W24V	188,00


Maximum cable length for every cable section

power	voltage	Ø0,5mm	Ø1mm	Ø1,5mm	Ø2,5mm
10W	24V	30m	45m	70m	110m
20W	24V	15m	20m	30m	55m
50W	24V	6m	10m	15m	22m
100W	24V	3m	5m	7m	11m

DIMMER INTERFACE**WIRED**


Euro

dimensions x,y,z	max power	voltage	switching	code	
4,4x5,7x2,5	240W	24V	0-10V 1-10V PUSH DALI	WDIMDALIHP	110,00
note	*to combine with driver ON/OFF				

**WIRELESS**

Euro

dimensions x,y,z	max power	voltage	switching	code	
4,4x5,7x2,5	240W	24V	CASAMBI PUSH	WBLTSMART	208,00
note	on board (HOME version) or external mounting, iOS and Android compatible, set up by customer or by ILTI LUCE on commission, *to combine with driver ON/OFF				

**REMOTE CONTROL KIT**


Euro

dimensions x,y,z	max power	voltage	switching	code	
1,2x0,5x5	120W	5V - 24V	REMOTE	WDIMKITREM	42,00
note	mono channel dimmer for LED with RF (radio frequency) wireless remote control , to be used as dimming solution in place of specific wiring				

**DIMMER INTERFACE LED STRIP RGB/RGBW**

Euro

dimensions x,y,z	max power	voltage	switching	code	
8,7x5,3x2,7	240W	24V	CASAMBI	WSLAVECASCV4CH	474,00
8,7x5,3x2,7	240W	24V	DALI	WSLAVEDALICV4CH	156,00
8,7x5,3x2,7	240W	24V	DMX	WSLAVEDMXCV4CH	156,00



ART DIRECTION AND GRAPHIC DESIGN

Guillaume Bloget and ILTI Luce

PHOTOS

Alberto Strada
Marcello Perego
Enrico Muraro

LOCATION

Musée départemental de la Préhistoire, Nemours (France)
Private Residence, Milan (Italy)
The cultural and sports center Wangari Maathai, Paris (France)
Borgonuovo19, Milan (Italy)

EDITION
May 2024

GENERAL INFORMATION

IT

Obiettivo di ILTI LUCE è quello di proporre soluzioni tecnologiche all'avanguardia, anche tramite un continuo e costante processo di aggiornamento. Per definizione la tecnologia è mutevole ed in costante evoluzione. Sugeriamo, per assicurare la consultazione delle informazioni più recenti sui prodotti, di verificare quelle disponibili sul nostro website www.iltiluce.com. Questo documento è stato redatto a Marzo 2024. Sostituisce ed aggiorna qualsiasi altra pubblicazione in relazione ai prodotti elencati.

A causa di naturali limiti tecnici di riproduzione e stampa, il colore dei modelli a catalogo è puramente indicativo e non può costituire motivo di rivalsa.

Ove non espressamente scritto, le lampadine non sono incluse nella vendita.

EN

ILTI LUCE's goal is to propose cutting-edge technological solutions, also through a constant updating process.

By definition, technology is changing and continuously evolving. To ensure the consultation of the latest product data, we recommend referring to the information available on our website www.iltiluce.com. This document was drafted in March 2024. It replaces and updates any other publication in relation to the listed products. Due to natural technical limitations of reproduction and printing, the colour of the models in the catalogue is purely indicative and cannot constitute grounds for recourse.

Unless expressly stated, light bulbs are not included in the sale.

DE

Das Ziel von ILTI LUCE ist die Entwicklung von technologischen Lösungen auf dem neuesten Stand, auch durch einen ständigen Aktualisierungsprozess. Die Technik entwickelt sich ständig weiter. Um die aktuellsten Produktunterlagen einzusehen, empfehlen wir, sich auf die Informationen auf unserer Website www.iltiluce.com zu beziehen. Dieses Dokument wurde im März 2024 verfasst. Es ersetzt und aktualisiert alle anderen Veröffentlichungen in Bezug auf die aufgeführten Produkte.

Aufgrund der technischen Grenzen der Reproduktion und des Drucks sind die Farben der im Katalog abgebildeten Modelle rein indikativ und können nicht als Reklamationsgrund dienen. Sofern nicht ausdrücklich angegeben, sind die Glühbirnen nicht im Verkauf enthalten.

FR

L'objectif de ILTI LUCE est de proposer des solutions technologiques

de pointe, également à travers un processus de mise à jour constante. Par définition, la technologie évolue et change continuellement. Pour garantir la consultation des dernières données produits, nous vous recommandons de vous référer aux informations disponibles sur notre site www.iltiluce.com.

Ce document a été établi en Mars 2024. Il remplace et met à jour toute autre publication relative aux produits cités.

En raison des limites techniques naturelles de reproduction et d'impression, la couleur des modèles du catalogue est purement indicative et ne peut constituer un motif de réclamation. Sauf mention expresse, les ampoules ne sont pas comprises dans la vente.

IT

L'elenco aggiornato dei prodotti con marchio UL ed ETL e le relative informazioni tecniche sono disponibili sul sito website:

nemolighting.com/usa/

EN

The updated list of UL and ETL marked products and relevant technical information are available on the website:

nemolighting.com/usa/

DE

Die aktualisierte Liste der UL- und ETL-zertifizierten Produkte und die entsprechenden technischen Informationen finden Sie auf der Website: nemolighting.com/usa/

FR

La liste actualisée des produits marqués UL et ETL et les informations techniques correspondantes sont disponibles sur le site web : nemolighting.com/usa/



Photometric data and more information available on our website:

www.iltiluce.com



Scan the code for Terms & Conditions

ILTI LUCE

ILTI LUCE

Strada Borgata Paradiso, 20
10036 Settimo Torinese - ITALY
Tel. +39 011 765 73 01
info@iltiluce.com

www.iltiluce.com

Part of

NEMO Group

NEMO SHOWROOM MONFORTE

Corso Monforte 19/A,
20122 Milan
Tel +39 02 970 703 40
monforte@nemolighting.com

NEMO GALERIE PARIS

44, Rue du Bac
75007 Paris
Tel +33 (0) 1 486 318 42
rueubac@nemolighting.fr

NEMO USA

625 Jersey Avenue, Unit 7
New Brunswick, NJ 08901
Tel +1 800 734 5858
usa@nemolighting.com
nemolighting.com/usa/

NEMO COPENHAGEN

Store Kongensgade 118
1264 København
Denmark

