

PBV® 53/63

FORGED 3-PIECE THREADED & SOCKETWELD BALL VALVES

 +1 281 637 2000

 f-e-t.com/PBV

 ForumVS.PBV@f-e-t.com



MANUFACTURER OF QUALITY VALVE PRODUCTS AROUND THE GLOBE

Forum Energy Technologies (FET) is committed to improving our clients' operational and financial performance by supplying the most comprehensive range of valve products in the industry through our family of trusted valve brands.

ABOUT FET

Engineering Expertise

FET uses the latest state-of-the-art engineering software to provide custom design services for any application. Finite element analysis is just one of many Design Verification Tools FET uses to design valves to specific customer requirements.

CAD & CNC Capabilities

With FET's fast and efficient workflow, CAD drawings are releasable to the network for manufacturing and purchasing. Computer-generated machine programs can be quickly changed for weld overlays or other processes, resulting in faster deliveries.

Accurate Inventories

Daily cycle counting and order picking using barcode and automated part delivery systems results in more accurate inventories and faster product delivery.

Quality Control

All FET Companies manufacture quality products designed and tested to meet the standards of Qualifying Authorities worldwide. Advanced engineering and our Quality Management System ensure that our valve products continue to exceed your expectations for performance.

Customer Service

FET staffs its Customer Service Department with trained representatives ready to help you with ordering information, technical specifications, and logistics.

Contents

Product Range, Maximum Pressure, & ASME Class Ratings.....	3	Multi-Port Features, Dimensions, Port Configurations, Parts & Engineering Data:	
How to Order, Seat Features, & Applications	4	3-Way Multi-Port Series 5338/6338	12-13
Topworks Data & Torque Charts for Actuated Valves	5	4-Way Multi-Port Series 5339/6339	14-15
Features, Dimensions, Parts, & Engineering Data:			
Master Star Series 5333/6333	6-7		
Super Star Series 5331/6331	8-9		
Mega Star Series 6336	10-11		

Due to upgrades in industry standards, material innovations, and FET/PBV's constant commitment to product advancement, data presented in this brochure are subject to change. Please contact your PBV sales representative for updated and current drawings and material compliance. This information is available on our website and www.f-e-t.com.

Note: Data contained in this document is for informational purposes and shall not be used for design purposes.



Product Range, Size/Model Overview

Size (in.)		Forged Firesafe 3-Piece Models			Forged Multi-Port Models		
Reduced Port	Full Port	Master Star	Super Star	Mega Star	3-Way	4-Way T or L Port	4-Way X Port
—	1/4	No. 33 5333/6333 No. 31 5331/6331 Socketweld Available with Extended Ends Only	No. 36 6336 Full Port Only	No. 38 5338/6338	No. 39 5339/6339	No. 39 5339/6339	
1/2	3/8						
3/4	1/2						
1	3/4						
1 1/4	1						
1 1/2	1 1/4						
2	1 1/2						
2 1/2	2						
3	2 1/2						
4	3						

Maximum Pressure (WOG/CWP) Standard P Seat Materials

Size (in.)		No. 33	No. 31		No. 36	No. 38	No. 39	
Reduced Port	Full Port	M Seat	M Seat	D Seat	D Seat	M Seat	T or L Port	X Port
—	1/4	2000	2200	3000	6000	1500	1500	1200
1/2	3/8	2000	2200	3000	6000	1500	1500	1200
3/4	1/2	2000	2200	3000	6000	1500	1500	1200
1	3/4	2000	2200	3000	6000	1000	1000	1000
1 1/4	1	2000	2200	3000	6000	1000	1000	1000
1 1/2	1 1/4	2000	2000	3000	4000	800	800	750
2	1 1/2	2000	2000	3000	4000	800	800	750
2 1/2	2	—	1500	1800	4000	600	600	440
3	2 1/2	—	1500	1800	—	400	400	—
4	3	—	1000	1200	—	—	—	—

ASME Class Rating with Standard Seat

Size (in.)		No. 33	No. 31		No. 36	No. 38	No. 39	
Reduced Port	Full Port	M Seat	M Seat	D Seat	D Seat	M Seat	T or L Port	X Port
—	1/4	900	900	900	2500	600	600	300
1/2	3/8	900	900	900	2500	600	600	300
3/4	1/2	900	900	900	2500	600	600	300
1	3/4	900	900	900	2500	300	300	300
1 1/4	1	900	900	900	2500	300	300	300
1 1/2	1 1/4	900	800	900	1500	300	300	300
2	1 1/2	900	800	900	1500	300	300	300
2 1/2	2	—	600	600	1500	150	150	150
3	2 1/2	—	400	400	—	150	150	—
4	3	—	400	400	—	—	—	—

HOW TO ORDER, SEAT FEATURES & APPLICATIONS

Specifying PBV Threaded & Socketweld Valve Figure Numbers

Example: 6" S-6331-38-3600-ML-NE-I-LD This number represents an all Stainless Steel, 316 SS Body and Trim, Full Port, Threaded Socketweld Valve, Super Star Series, Fire Tested, Threaded End Connections, 20% C with 5% Graphite filled PTFE Seats, Graphite Seals, for use in NACE Applications, Lever Operated Tee Handle and ISO Mounting Pad with Locking Device.

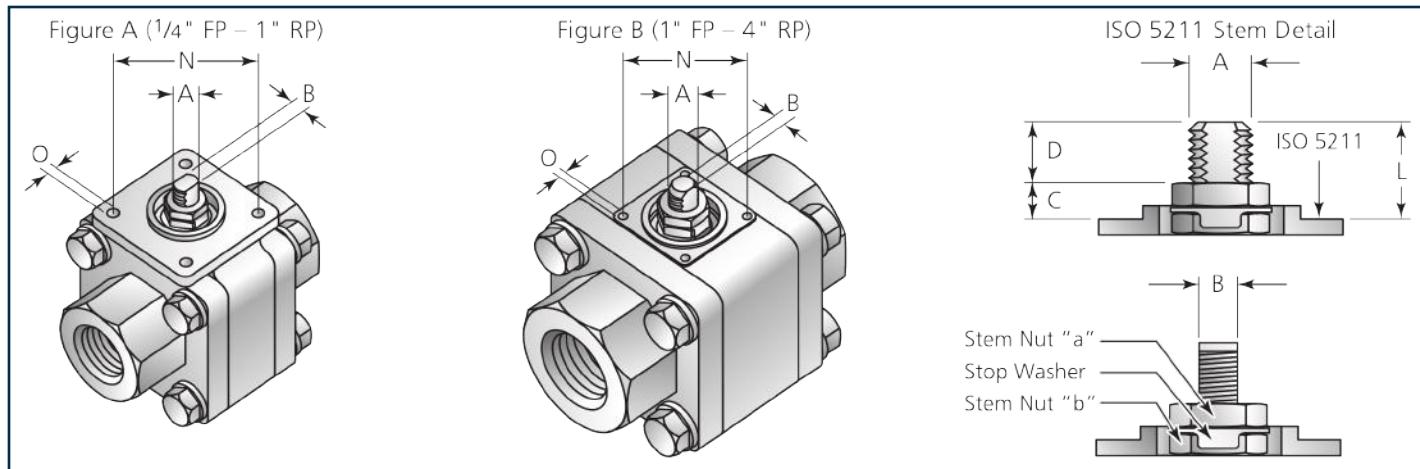
S	-	6	3	31	-	3	8	-	36	00	-	M	L	-	N	E	-	I	-	LD
Mat. Code	Port Config.	Valve Type	Press. Class	Fire Tested		End Conn.	Body Mat.	Trim Mat.	Seat Material	Seal Mat.	NACE Option	Options								
C Carbon Steel S SS	5 Reduced 6 Full	3 Thread and SW Type	31 Super Star	0 Non-FireTested w/NoEmerg. Grease Seals	5 BWE	25 LF2	00 Same as Body	D Devlon®	L Graphite	N NACE	A Actuated									
			33 Master Star	3 Fire Tested w/NoEmerg. Grease Seals	7 Thrd. x SW*	34 304SS	36 316SS	G Glass Filled TFE	M 20% C 5% Graph. Filled TFE	S Non NACE	B Bare Stem									
			36 Mega Star		8 Thrd.'d	36 316SS	70 Monel	E Tee Handle for Insulation												
			38 3-Way Multi Port		9 SW*	F51 Duplex	FS1 Duplex	P PEEK™			I ISO Mounting Pad									
			39 4-Way Multi Port		6 NPL Welded or Integ.	70 Monel®	R Delrin®	Z Special			L Lever									
											LD Locking Device									
											V Oval Handle									

NOTE: *Valve must be dismantled to weld end connections into piping. See IOM.

Seat Features & Applications

Code	Seat Material Description	Temperature Range		Specifications	Notes & Applications			Valve Model
		°C	°F					
D	Nylon Devlon V Polymide- Nylon	-65/+150	-50/+302	High Pressure Med/Low Temp	Hydrocarbons & NACE Applications, Not RECOMMENDED FOR GLYCOL, METHANOL, WATER			Super Star Mega Star
G	RPTFE	-60/+220	-51/+428	Low Pressure High Cycle Life	Higher Pressure Than Virgin PTFE			Master, Super 3 & 4-Way
M	PTFE + 25% Carbographite	-190/+250	-310/+482	Med. Pressure Low/High Temp	Higher Pressure and Temperature Than Virgin PTFE			Master, Super 3 & 4-Way
P	PEEK Polyetherketone	-80/+220	-42/+428	High Pressure High Temp	Hydrocarbons-NACE, Particularly Indicated for Tobacco and Nuclear Environment			Super Star Mega Star
R	Delrin Acetal Resin	-70/+95	-94/+203	High Pressure No Temp	Hydrocarbons-NACE-CO2 Applications NOT RECOMMENDED FOR OXYGEN			Super Star Mega Star

NOTE: M = Master Star S = Super Star

TOPWORKS DATA & TORQUE CHARTS**PBV Master Star & Super Star****Topworks Dimensional Data (in.), Full & Reduced Port • 1/4" - 4"**

	Valve Size (in.).		Dimensions (in.)							ISO 5211
	Full Port	Reduced Port	A	B	C	D	L	N	O	
Figure A	1/4	—	M10 x 1	0.21	0.00	0.19	0.19	1.41	M5 x 8	F03
	3/8	1/2	M10 x 1	0.21	0.00	0.19	0.19	1.41	M5 x 8	F03
	1/2	3/4	M10 x 1	0.21	0.00	0.19	0.19	1.41	M5 x 8	F03
	3/4	1	M12 x 1.25	0.29	0.20	0.35	0.55	1.65	M5 x 8	F04
Figure B	1	1 1/4	M12 x 1.25	0.29	0.39	0.39	0.78	1.65	M5 x 8	F04
	1 1/4	1 1/2	M15 x 1.5	0.35	0.55	0.51	1.06	1.96	M6 x 10	F05
	1 1/2	2	M15 x 1.5	0.35	0.55	0.55	1.10	1.96	M6 x 10	F05
	2	2 1/2	M15 x 1.5	0.35	0.40	0.49	0.89	1.96	M6 x 10	F05
	2 1/2	3	M22 x 1.5	0.62	0.71	0.66	1.37	2.75	M8 x 12	F07
	3	4	M24 x 1.5	0.70	0.88	0.59	1.47	2.75	M8 x 12	F07

Torque Data for Actuated Threaded & Socketweld Ball Valves Break Torques (in./lbs.)**Reduced Port**

Valve Size (in.)	5333 (A) M Seat	5331 (A) M Seat	5338 (A) D Seat	5339 (A) M Seat
1/2	104	104	135	160
3/4	138	138	179	254
1	207	207	269	372
1 1/4	287	287	373	425
1 1/2	346	346	450	532
2	403	403	524	637
2 1/2	—	576	749	956
3	—	863	1122	1169
4	—	1036	1347	—

Full Port

Valve Size (in.)	6333 (A) M Seat	6331 (A) D Seat	6336 (C) D Seat	6338 (A) M Seat	6339 (A) M Seat
1/4	104	104	135	159	160
3/8	104	104	135	159	160
1/2	138	138	179	159	254
3/4	207	207	269	266	372
1	287	287	373	398	425
1 1/4	346	346	450	886	532
1 1/2	406	403	524	886	637
2	—	576	749	1150	956
2 1/2	—	863	1122	—	1169
3	—	1036	1347	—	1169

NOTES:

1. Torques listed are max. 50 bar (725 psig) differential pressure in Clean Service.

Application Factors: Deduct 25% for high lubricity service. • Add 15% for dry gas or demineralized water. • Add 20% for slurry or abrasive service.

2. Torques listed are for Clean Service (liquid or wet gas) up to 64 bar (928 psig) differential pressure, operated at least once a week.

Temperatures of -200°C to +280°C (-40°F to +820°F) • For severe service, increase torques by 50% for M Seats and 15% for D Seats.

3. Torques listed are at 200 bar (2900 psig).

PBV MASTER STAR SERIES 5333/6333

The Master Star Series offers the best possible design for socketweld ends. The swing-out body feature and seat arrangements make welding the ends into line virtually problem-free, when the welder follows recommended welding practices. It is available with integral nipples.

Standard Features

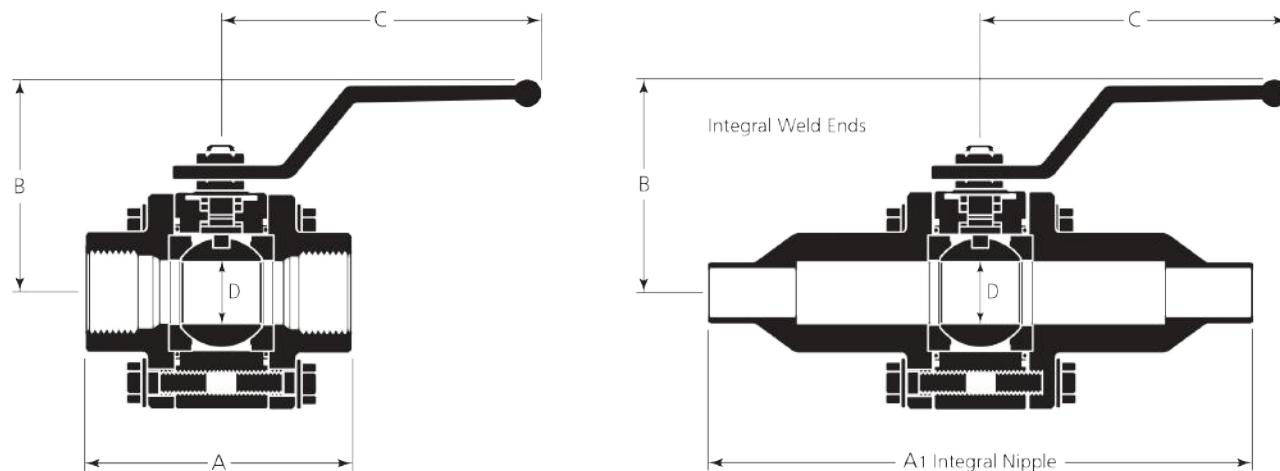
Series 5333: 1/2" - 2", 2000 psi

Series 6333: 1/4" - 1 1/2", 2000 psi

- Three-Piece Bolted Construction
- Carbon Filled PTFE Seats; Grafoil® Packing
- Double Body Seals (Grafoil & PTFE)
- Available in Forged A350 LF2 & F316 Body Materials, 316 Stainless Steel Ball & Stem
- Integral Nipples Available as a Factory Option
- ISO 5211 Mounting Pad



Dimensional Data (in.)



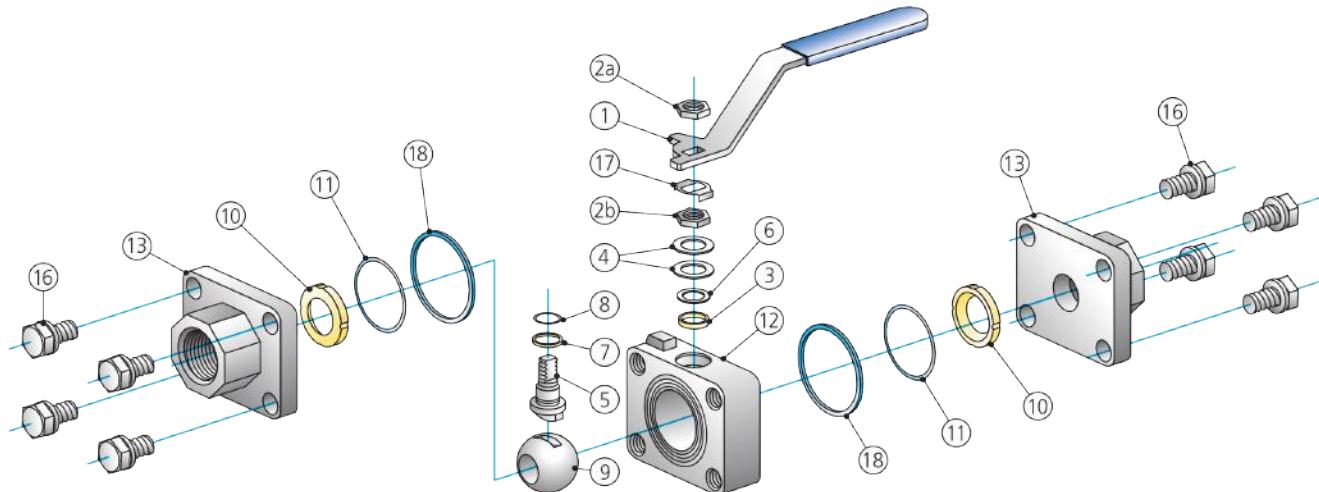
Series 5333, Reduced Port, NPT or SW • 1/2" - 2"

Size (in.)	Dimensions (in.)					Wt. (lbs.)
	A	A1	B	C	D	
1/2	2.9	9.3	2.6	6.0	0.44	2.2
3/4	3.2	9.4	2.7	6.0	0.56	2.6
1	3.9	9.8	3.2	7.5	0.83	4.8
1 1/4	4.3	10.3	3.6	7.5	1.00	6.8
1 1/2	4.7	10.7	4.2	9.0	1.25	9.2
2	5.5	11.0	4.4	9.0	1.50	12.1

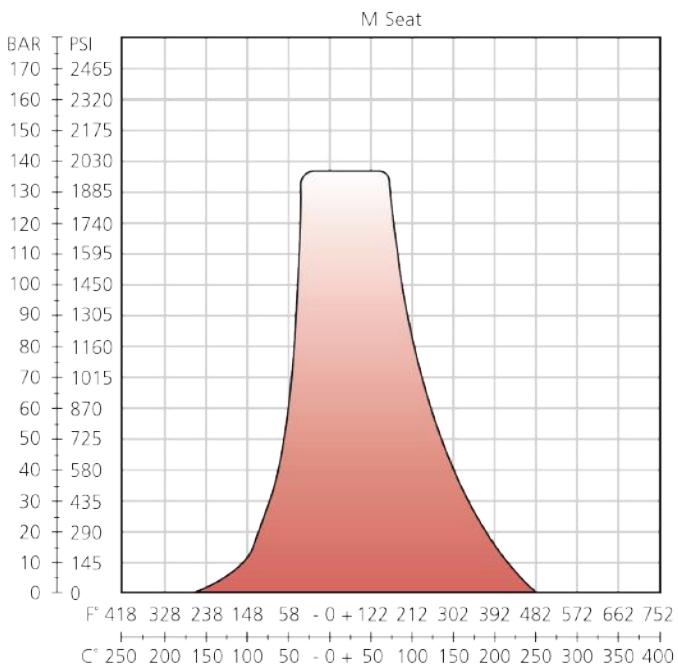
NOTE: Socketweld ends without nipple extensions will result in seat damage during welding for sizes smaller than 2 1/2".

Series 6333, Full Port, NPT or SW • 1/4" - 1 1/2"

Size (in.)	Dimensions (in.)					Wt. (lbs.)
	A	A1	B	C	D	
1/4	2.9	9.3	2.6	6.0	0.44	2.4
3/8	2.9	9.3	2.6	6.0	0.44	2.2
1/2	3.2	9.4	2.7	6.0	0.56	2.8
3/4	3.9	9.8	3.2	7.5	0.83	5.0
1	4.3	10.3	3.6	7.5	1.00	7.0
1 1/4	4.7	10.7	4.2	9.0	1.25	9.5
1 1/2	5.5	11.0	4.4	9.0	1.50	12.8

PBV MASTER STAR SERIES 5333/6333**Parts & Engineering Data****Parts & Materials**

No.	Qty.	Description	Std. Materials, Ser. 5333/6333	
			A350 LF2	F316
1	1	Handle	CS Galvanized Plastic Cover	
2a/2b	2	Nut	CS Zinc Plated	316 SS
3	1	Packing Ring	Graphite	
4	2	Spring Washer	302 SS	
5	1	Antistatic Stem		316 SS
6	1	Gland Follower		316 SS
7	1	Thrust Washer	RPTFE	
8	1	Stem O-Ring	Viton®	
9	1	Ball	316 SS	
10	2	Seats	20% C 5% Graph. Filled TFE	
11	2	Body Seal	TFMC	
12	1	Body	ASTM A350 LF2	ASTM A182 F316
13	2	End Connections	ASTM A350 LF2	ASTM A182 F316L
14	1	Stop Pin	Integral or CS	Integral or SS
16	8	Bolt	ASTM A193 L7M	ASTM A193 B8M
17	1	Stop Washer	316 SS	
18	2	Body Seal	Graphite	

Pressure Temperature**Soft Parts Repair Kit**

No.	Qty.	Part Name	Materials
3	1	Packing Ring	Graphite
7	1	Thrust Washer	RPTFE
8	1	Stem O-Ring	Viton
10	2	Seats	20% C 5% Graph. Filled PTFE
11	2	Body Seals	TFMC
18	2	Body Seals	Graphite

Flow Coefficient (Cv)

Reduced Port, Size (in.)									
—	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
—	8	13	32	48	82	120	275	460	700

Full Port, Size (in.)									
1/4	5/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
8	8	12	30	45	78	115	265	445	680

Flow Data: Flow rates were determined for ball valves in fully open position and a water temperature of 60°F (15°C). Cv value is the full capacity flow rate through the ball valve in gallons/min. of water at 60°F with a pressure of one psi.

PBV SUPER STAR SERIES 5331/6331

Standard Features

Series 5331: 1/2" - 4", 2000 & 3000 psi

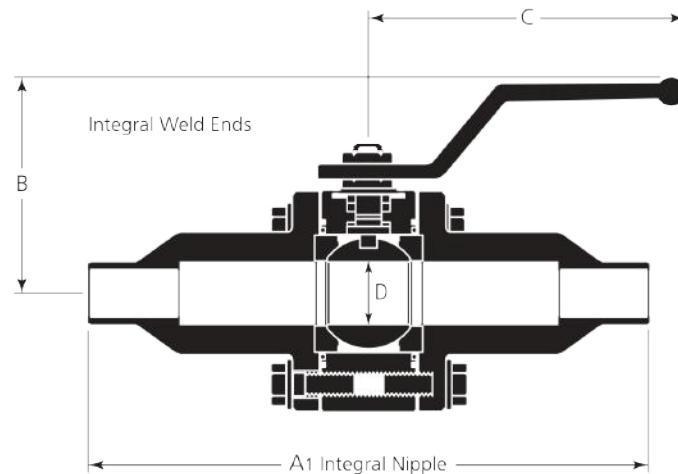
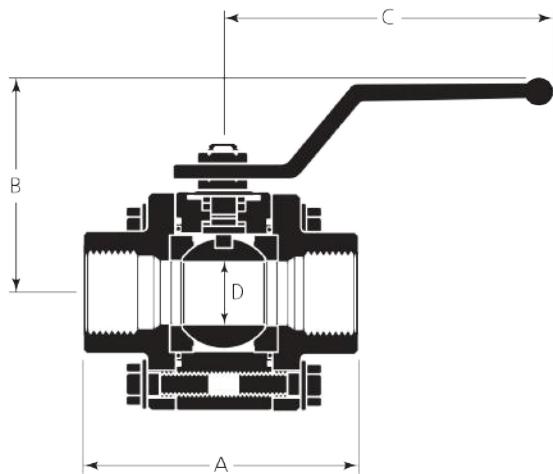
Series 6331: 1/4" - 3", 2000 & 3000 psi

- Encapsulated Seats
- Three-Piece Bolted Construction
- Carbon Filled PTFE Seats; Grafoil Packing
- Double Body Seals (Grafoil & PTFE)
- Available in Forged A350 LF2 & F316 Body Materials, 316 Stainless Steel Ball & Stem
- ISO 5211 Mounting Pad
- Integral Nipples Available for Weld Applications



Integral Locking Device
Padlock shown for illustration only.
Customer to supply own lock.

Dimensional Data (in.)



NOTE: The seat configuration and body construction for weld ends require disassembling the valve or utilizing welding pup extensions or integral hubs.

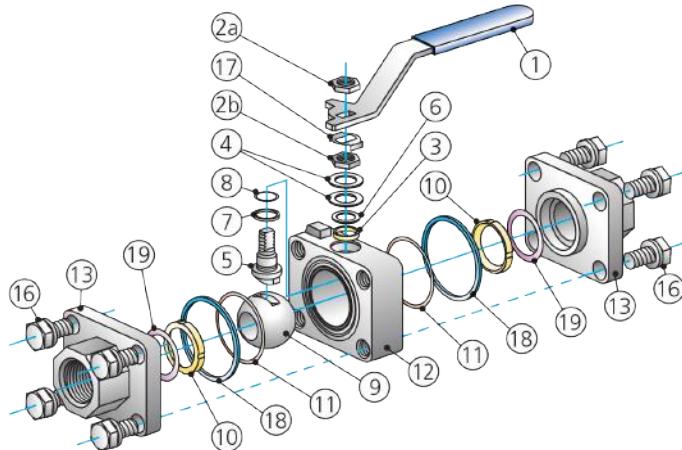
Series 5331, Reduced Port, NPT or SW • 1/2" - 4"

Size (in.)	Dimensions (in.)					Wt. (lbs.)
	A	A1	B	C	D	
1/2	2.95	9.3	2.6	6.0	0.44	2.2
3/4	3.15	9.4	2.7	6.0	0.56	2.6
1	3.95	9.8	3.2	7.5	0.83	4.8
1 1/4	4.25	10.3	3.6	7.5	1.00	6.8
1 1/2	4.75	10.7	4.2	9.0	1.25	9.2
2	5.50	11.0	4.4	9.0	1.50	12.1
2 1/2	5.55	7.5	4.6	9.0	1.93	19.8
3	6.70	8.3	5.4	17.7	2.50	26.4
4	9.00	12.0	5.9	17.7	3.00	35.2

NOTE: Dimensions are available upon request. Socketweld ends without nipple extensions will result in seat damage.

Series 6331, Full Port, NPT or SW • 1/4" - 3"

Size (in.)	Dimensions (in.)					Wt. (lbs.)
	A	A1	B	C	D	
1/4	2.95	9.3	2.6	6.0	0.44	2.4
5/8	2.95	9.3	2.6	6.0	0.44	2.2
1/2	3.15	9.4	2.7	6.0	0.56	2.8
3/4	3.95	9.8	3.2	7.5	0.83	5.0
1	4.35	10.3	3.6	7.5	1.00	7.0
1 1/4	4.75	10.7	4.2	9.0	1.25	9.5
1 1/2	5.50	11.0	4.4	9.0	1.50	12.8
2	5.55	7.5	4.6	9.0	1.93	22.0
2 1/2	6.70	8.3	5.4	17.7	2.50	29.7
3	12.00	12.0	5.9	17.7	3.00	38.5

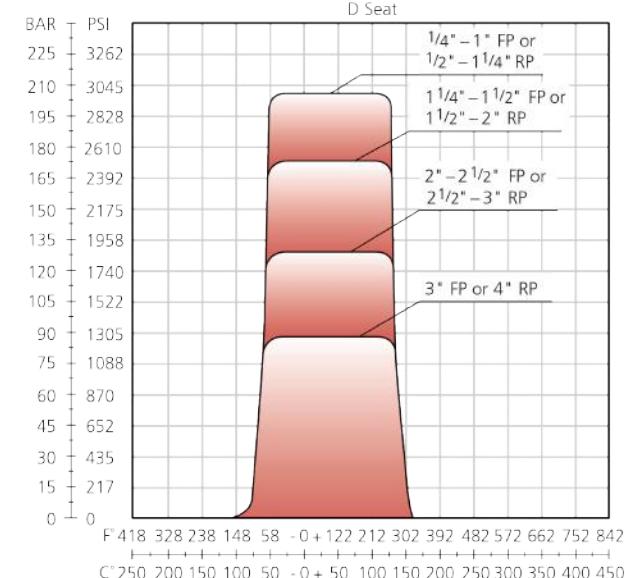
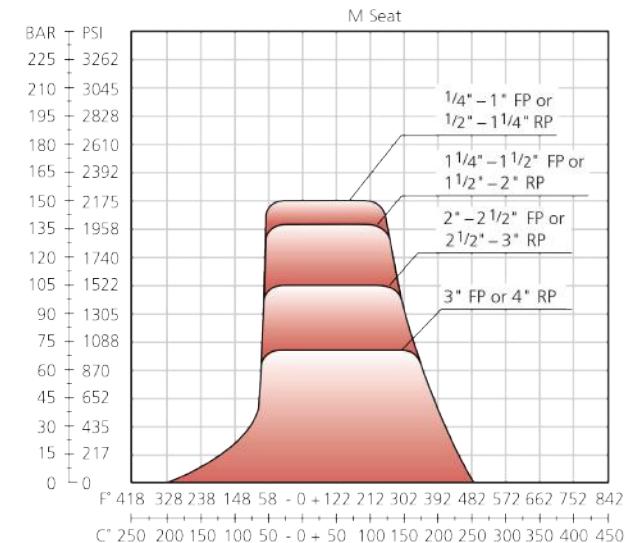
PBV SUPER STAR SERIES 5331/6331**Parts & Engineering Data****Parts & Materials**

No.	Qty.	Description	Std. Materials, Ser. 5331/6331	
			A350 LF2	F316
1	1	Handle	CS Galvanized Plastic Cover	
2a/2b	2	Nut	CS Zinc Plated	316 SS
3	1	Packing Ring	Graphite	
4	2	Spring Washer	302 SS	
5	1	Antistatic Stem	316 SS	
6	1	Gland Follower	316 SS	
7	1	Thrust Washer	20% C 5% Graph. Filled PTFE	
8	1	Stem O-Ring	Viton	
9	1	Ball	316 SS	
10	2	Seats	RPTFE	
11	2	Body Seal	TFMC	
12	1	Body	ASTM A350 LF2	ASTM A182 F316
13	2	End Connections	ASTM A350 LF2	ASTM A182 F316L
14	1	Stop Pin	Integral or CS	Integral or SS
16	8	Bolt	ASTM A193 L7M	ASTM A193 B8M
17	1	Stop Washer	316 SS	
18	2	Body Seal	Graphite	
19	2	Seat Ring	PTFE	

Soft Parts Repair Kits* • M & D Seat

No.	Qty.	Seat Design	Part Name	Material
3	1	M, D	Packing Ring	Graphite
7	1	M, D	Thrust Washer	RPTFE
8	1	M, D	Stem O-Ring	Viton
10	2	M	Seats	20% C 5% Graph. Filled PTFE
10	2	D	Seats	Devlon
18	2	M, D	Body Seals	Carbon Filled PTFE
11	2	M, D	Body Seals	RTFE
18	2	M, D	Body Seals	Graphite

NOTE: *M = Contents of "M" Seat Kit. • D = Contents of "D" Seat Kit.

Pressure Temperature**Flow Coefficient (Cv)**

Reduced Port, Size (in.)									
—	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
—	8	13	32	48	82	120	275	460	700

Full Port, Size (in.)									
1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
8	8	12	30	45	78	115	265	445	680

Flow Data: Flow rates were determined for ball valves in fully open position and a water temperature of 60°F (15°C). Cv value is the full capacity flow rate through the ball valve in gallons/min. of water at 60°F with a pressure of one psi.

PBV MEGA STAR SERIES 6336

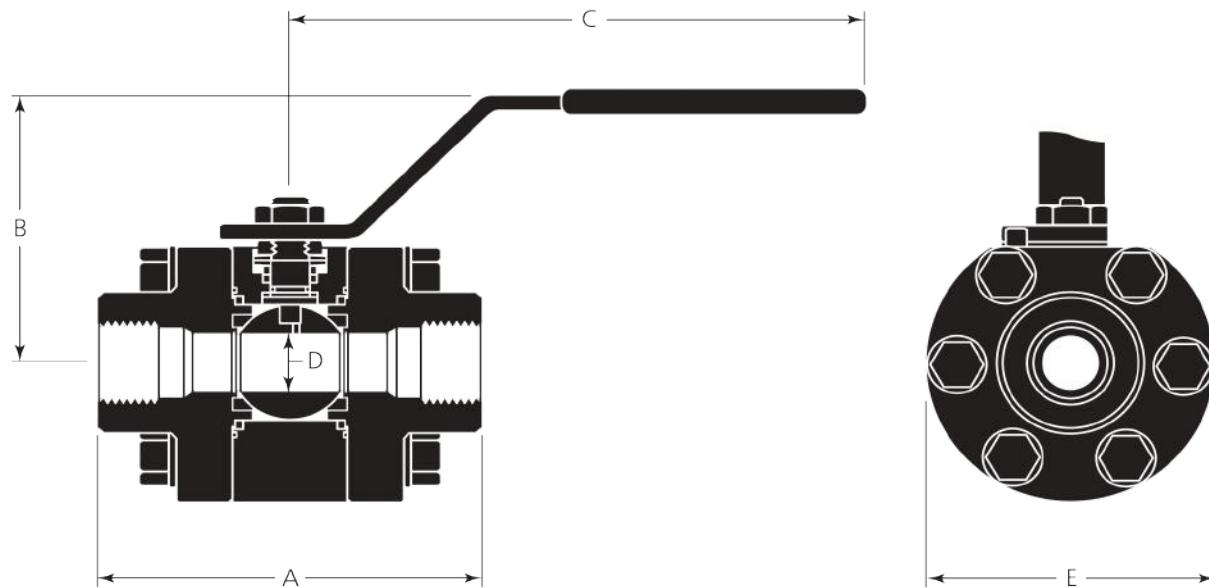
Standard Features

Series 6336: Full Port $\frac{1}{4}$ " - 1", 6000 psi & $1\frac{1}{4}$ " - 2", 4000 psi

- Encapsulated Devlon® Seats
- Three-Piece Bolted Construction
- Grafoil® Packing
- Double Body Seals
- Firesafe to API 607
- NACE MR0175
- Available in Forged A350 LF2 and F316 Body Materials, 316 Stainless Steel Ball & Stem
- Standard ISO 5211 Mounting Pad for Valves 3/4" & Larger

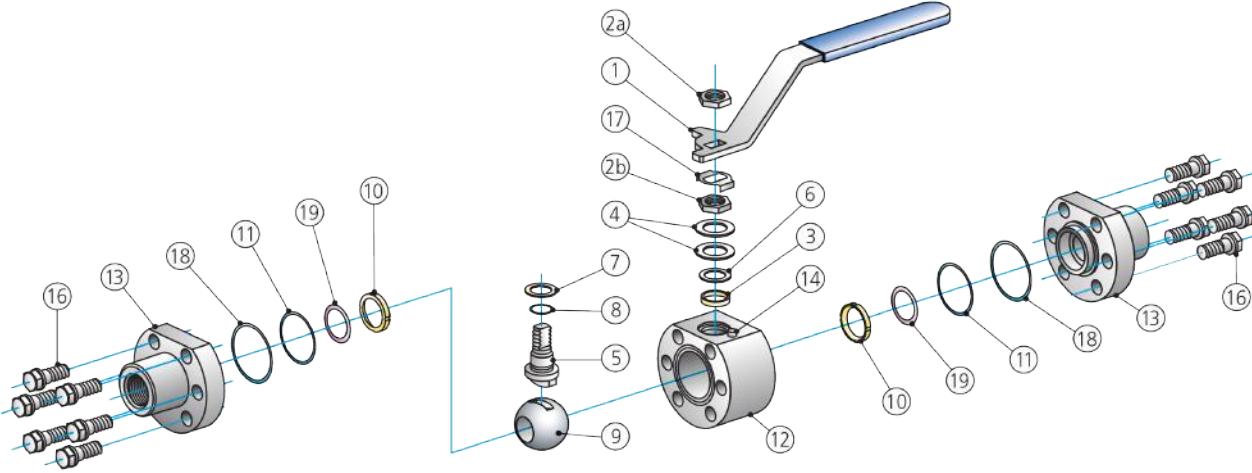


Dimensional Data (in.)

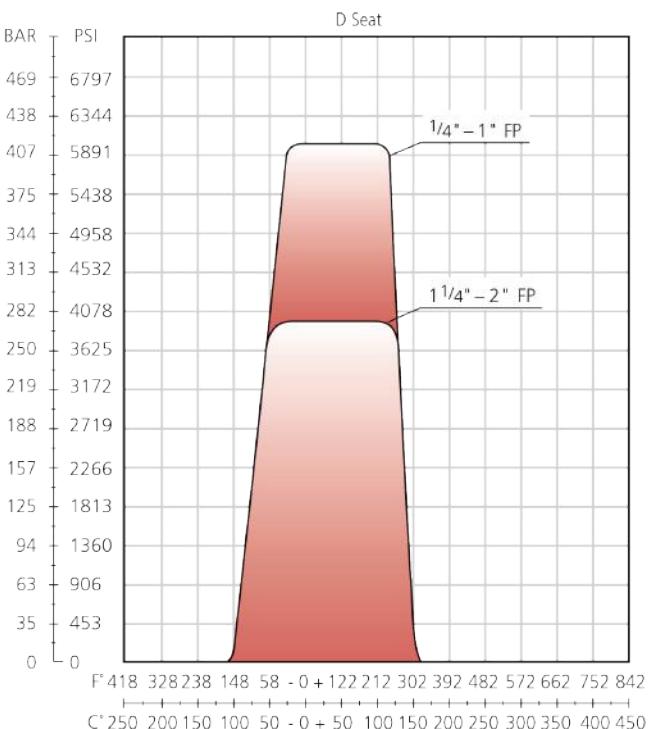


Series 6333, Full Port • $\frac{1}{4}$ " - 2"

Size (in.)	Dimensions (in.)						Weight (lbs.)	
	A (Thrd)	A (SW)	B	C	D	E	Thrd	SW
$\frac{1}{4}$	4.00	8.50	3.35	7.60	0.44	3.15	6.6	8.9
$\frac{3}{8}$	4.00	8.50	3.35	7.60	0.44	3.15	6.6	8.9
$\frac{1}{2}$	4.00	8.50	3.35	7.60	0.44	3.15	6.6	8.9
$\frac{3}{4}$	5.00	9.00	3.75	7.60	0.61	3.85	2.25	14.4
1	5.50	10.00	4.33	8.85	0.83	4.33	14.4	17.8
$1\frac{1}{4}$	6.70	11.00	5.50	13.75	1.34	5.32	30.0	36.5
$1\frac{1}{2}$	6.70	12.00	5.50	13.75	1.34	5.32	30.0	37.8
2	7.85	14.50	5.90	13.75	1.70	5.90	41.0	52.2

PBV SERIES 6336**Parts & Engineering Data****Parts & Materials**

No.	Qty.	Description	Materials, Series 6336	
			A350 LF2	F316
1	1	Handle	CS Galvanized Plastic Cover	
2a/2b	2	Nut	CS Cadmium Plated	316 SS
3	1	Packing Ring	Graphite	
4	2	Spring Washer		Stainless Steel
5	1	Antistatic Stem		316 SS
6	1	Gland Follower		316 SS
7	1	Thrust Washer		RPTFE
8	1	Stem O-Ring		Viton
9	1	Ball		316 SS
10	2	Seats		Devlon V
11	2	Body Seal	Graphite	
12	1	Body	ASTM A350 LF2	ASTM A182 F316
13	2	End Connections	ASTM A350 LF2	ASTM A182 F316L
14	1	Stop Pin	Carbon Steel	304 SS
16	6/8/10	Bolt	ASTM A193 L7M	ASTM A193 B8M
17	1	Stop Washer		Stainless Steel
18	2	Body Seal		Viton
19	2	Seat Ring		PTFE

Pressure Temperature**Soft Parts Repair Kit**

No.	Qty.	Part Name	Materials
3	1	Packing Ring	Graphite
7	1	Thrust Washer	RPTFE
8	1	Stem O-Ring	Viton
10	2	Seats	Devlon V
11	2	Body Seals	Graphite
18	2	Body Seals	Viton®

Flow Coefficient (Cv)

Full Port, Size (in.)							
1/4	5/8	1/2	3/4	1	1 1/4	1 1/2	2
8	8	8	25	34	100	100	100

Flow Data: Flow rates were determined for ball valves in fully open position and a water temperature of 60°F (15°C). Cv value is the full capacity flow rate through the ball valve in gallons/min. of water at 60°F with a pressure of one psi.

PBV MULTI-PORT SERIES 5338/6338 BALL VALVES

Standard Features

Series 5338: Reduced Port $\frac{1}{2}''$ - 3", 1500 psi


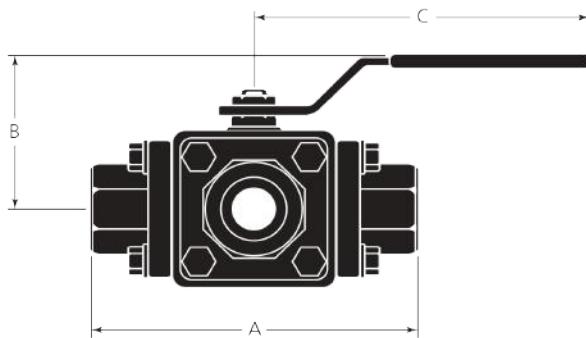
Series 6338: Full Port $\frac{1}{4}''$ - 2 $\frac{1}{2}''$, 1500 psi

- Three-Piece Bolted Construction
- Available in Forged A350 LF2 & F316 Body Materials, 316 Stainless Steel Ball & Stem
- Carbon Filled PTFE Seats
- Double Body Seals
- Grafoil® Packing
- Standard ISO 5211 Mounting Pad
- Available in T & L Port Configurations

Note: Firesafe not Available Due to Design Configuration



Dimensional Data (in.)



Series 5338, Reduced Port • $\frac{1}{2}''$ - 3"

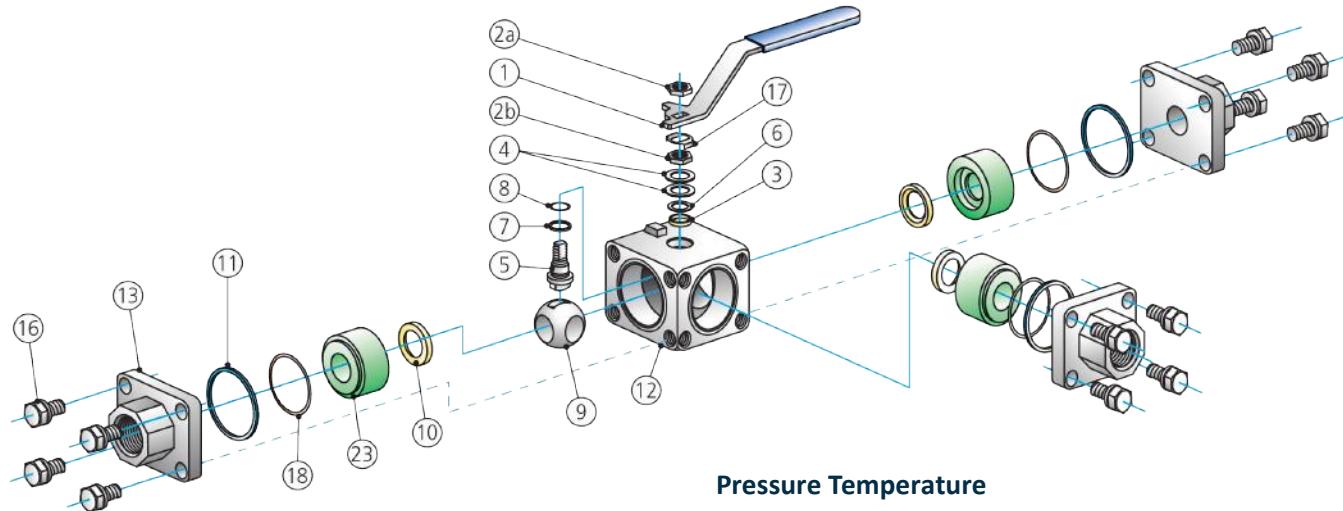
Size (in.)	Dimensions (in.)					Weight (lbs.)
	A (Thrd)	A (SW)	B	C	D	
$\frac{1}{2}$	4.45	4.45	2.75	6.00	0.44	5.0
$\frac{3}{4}$	4.70	4.70	3.00	6.00	0.56	6.6
1	5.90	5.90	3.40	7.60	0.83	11.0
$1\frac{1}{4}$	6.25	6.25	3.85	8.85	1.00	15.4
$1\frac{1}{2}$	7.15	7.15	4.45	8.85	1.25	22.0
2	7.90	7.90	4.65	8.85	1.50	30.0
$2\frac{1}{2}$	10.30	11.90	5.30	16.54	1.93	121.0
3	16.65	16.65	6.50	16.54	.50	143.0

Series 6338, Full Port • $\frac{1}{4}''$ - 2 $\frac{1}{2}''$

Size (in.)	Dimensions (in.)					Weight (lbs.)
	A (Thrd)	A (SW)	B	C	D	
$\frac{1}{4}$	4.45	4.45	2.75	6.00	0.44	5.0
$\frac{3}{8}$	4.45	4.45	2.75	6.00	0.44	5.0
$\frac{1}{2}$	4.70	4.70	3.00	7.60	0.56	6.6
$\frac{3}{4}$	6.00	6.00	3.40	7.60	0.83	11.0
1	6.25	6.25	3.85	8.85	1.00	15.4
$1\frac{1}{4}$	7.20	7.20	4.45	8.85	1.25	22.0
$1\frac{1}{2}$.90	7.90	4.65	8.85	1.50	30.0
2	10.30	11.90	5.30	16.54	1.93	121.0
$2\frac{1}{2}$	16.65	16.65	6.50	16.54	2.50	143.0

Available Port Configurations

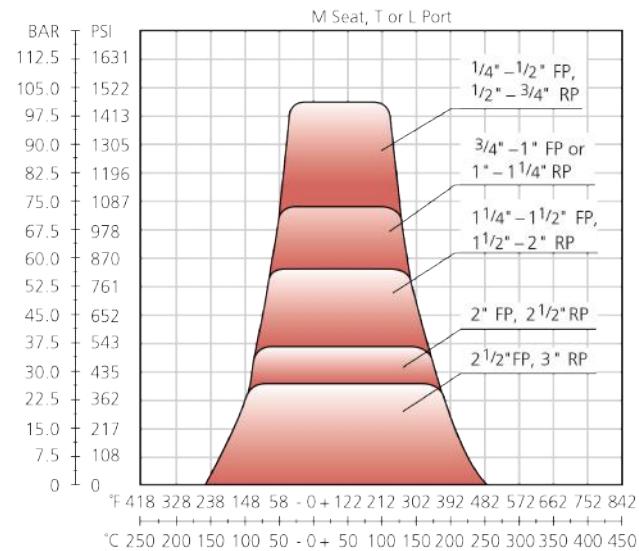
T Port	T5 - 90°	T4 - 90°	T3 - 90°	T6 - 90°	T1 - 180°	T2 - 180°	T9 - 180°	T7 - 180°
Standard T Port								
L Port	L2 - 90°				L1 - 180°		L3 - 180°	
Standard L Port							Vertical L Port	

PBV MULTI-PORT SERIES 5338/6338**Parts & Engineering Data****Parts & Materials**

No.	Qty.	Description	Std. Materials, Ser. 5338/6338	
			A350 LF2/316	F316/F316
1	1	Handle	CS Galvanized Plastic Cover	
2a/b	2	Nut	CS Cadmium Plated	A194 Gr.8
3	1	Packing Ring	Graphite	
4	2	Spring Washer	302 SS	
5	1	Antistatic Stem	316 SS	
6	1	Gland Follower	ASTM A182 F316L	
7	1	Thrust Washer	RPTFE	
8	1	Stem O-Ring	Viton	
9	1	Ball	ASTM A182 F316	
10	4	Seats	RPTFE	
11	3	Body Seal	Graphite	
12	1	Body	ASTM A350 LF2	ASTM A182 F316
13	4	End Connections	ASTM A350 LF2	ASTM A182 F316L
14	1	Stop Pin	Carbon Steel S	Stainless Steel
16	12	Bolt A	STM A193 L7M	ASTM A193 B8M
17	1	Stop Washer	SS ASTM A182 F316	
18	3	Body Seal	TFMC	
23	3	Seat Retainer	ASTM A350 LF2	A182 F316

Soft Parts Repair Kit

No.	Qty.	Part Name	Materials
3	1	Packing Ring	Graphite
7	1	Thrust Washer	RPTFE
8	1	Stem O-Ring	Viton
10	3	Seats	RPTFE
11	3	Body Seals	RTFE
18	3	Body Seals	Graphite

Pressure Temperature**Flow Coefficient (Cv)**

Reduced Port, Size (in.)									
—	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	—
—	5.6	10.5	24	40	60	87.5	175	223	
Full Port, Size (in.)									
—	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	—
—	—	10.5	24	40	60	87.5	175		

Cv Values Apply to the Port Configurations Shown Below

Flow Data: Flow rates were determined for ball valves in fully open position and a water temperature of 60°F (15°C). Cv value is the full capacity flow rate through the ball valve in gallons/min. of water at 60°F with a pressure of one psi. Note: When T Port works like the 2-way valves, use Cv values for PBV 5331/6331 and deduct 50%.

PBV MULTI-PORT SERIES 5339/6339

Standard Features

Series 5339 Reduced Port 1/2" - 3", 1500 psi

Series 6339 Full Port 1/4" - 2 1/2", 1500 psi

- Four-Way Bolted Construction
- Available in Forged A350 LF2 & F316 Body Materials, 316 Stainless Steel Ball & Stem
- Carbon Filled PTFE Seats
- Double Body Seals
- Grafoil Packing
- Standard ISO 5211 Mounting Pad
- NACE MR0175
- Available in T, L or X Port Configurations

Note: Firesafe not Available Due to Design Configuration



Available Port Configurations

T Port T8 180°	L Port L7 180°	X Port X 90°

T & L Port Configurations

Series 5339, Reduced Port • 1/2" - 3"

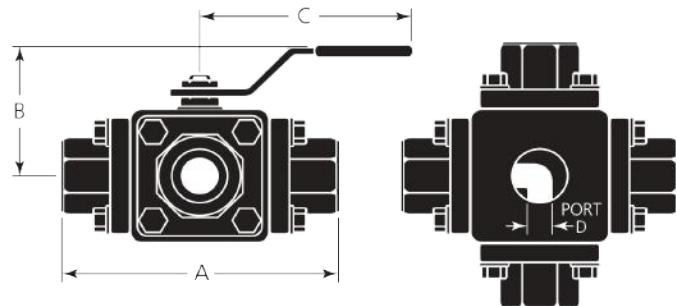
Size (in.)	Dimensions (in.)					Weight (lbs.)
	A (Thrd)	A (SW)	B	C	D	
1/2	4.45	4.45	2.75	6.00	0.44	5.0
3/4	4.70	4.70	2.95	7.60	0.56	6.6
1	5.90	5.90	3.40	7.60	0.83	11.0
1 1/4	6.25	6.25	3.85	8.85	1.00	15.4
1 1/2	7.15	7.15	4.45	8.85	1.25	22.0
2	7.90	7.90	4.65	8.85	1.55	30.0
2 1/2	10.30	11.90	5.30	16.54	1.93	121.3
3	16.65	16.65	6.50	16.54	2.51	143.3

X Port Configurations

Series 5339, Reduced Port • 1/2" - 3"

Size (in.)	Dimensions (in.)					Weight (lbs.)
	A (Thrd)	A (SW)	B	C	D	
1/2	4.70	4.70	2.95	7.60	0.25	7.5
3/4	5.90	5.90	3.40	7.60	0.47	12.0
1	6.25	6.25	3.85	8.85	0.71	17.0
1 1/4	7.20	7.20	4.45	8.85	1.10	23.5
1 1/2	7.90	7.90	4.65	8.85	1.28	32.0
2	10.30	11.90	5.30	16.54	1.34	125.0
2 1/2	16.65	16.65	6.50	16.54	1.65	150.5

Dimensional Data (in.)

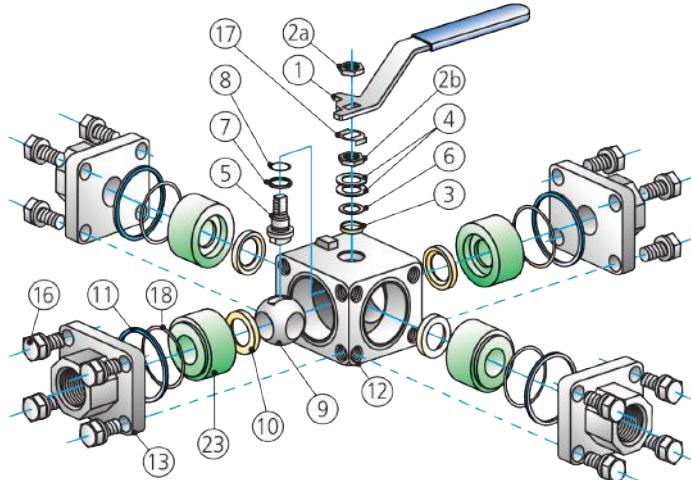


Series 6339, Full Port • 1/4" - 2 1/2"

Size (in.)	Dimensions (in.)					Weight (lbs.)
	A (Thrd)	A (SW)	B	C	D	
1/4	4.45	4.45	2.75	6.00	0.44	5.0
3/8	4.45	4.45	2.75	6.00	0.44	5.0
1/2	4.70	4.70	2.95	7.60	0.56	6.6
3/4	5.90	5.90	3.40	7.60	0.83	11.0
1	6.25	6.25	3.85	8.85	1.00	15.4
1 1/4	7.15	7.15	4.45	8.85	1.25	22.0
1 1/2	7.90	7.90	4.65	8.85	1.50	30.0
2	10.30	11.90	5.30	16.54	1.93	121.3
2 1/2	16.65	16.65	6.50	16.54	2.50	143.3

Series 6339, Full Port • 1/4" - 2 1/2"

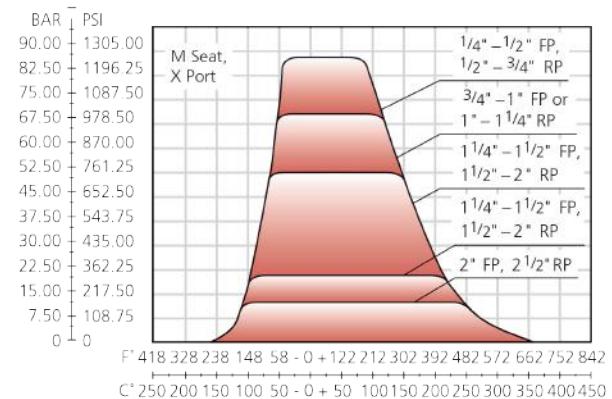
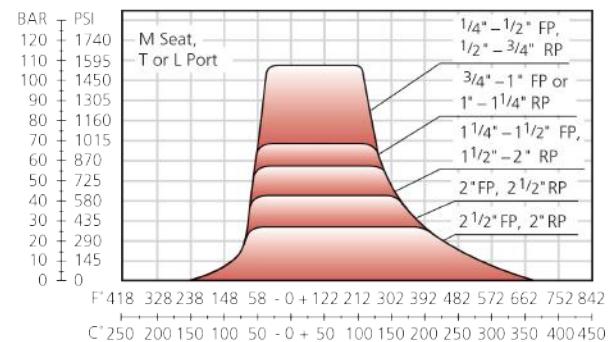
Size (in.)	Dimensions (in.)					Weight (lbs.)
	A (Thrd)	A (SW)	B	C	D	
1/4	4.70	4.70	2.95	7.60	0.25	7.5
3/8	4.70	4.70	2.95	7.60	0.25	7.5
1/2	5.90	5.90	3.40	7.60	0.47	12.0
3/4	6.25	6.25	3.85	8.85	0.71	17.0
1	7.20	7.20	4.45	8.85	0.83	23.5
1 1/4	7.90	7.90	4.65	8.85	1.10	32.0
1 1/2	10.30	11.90	5.30	16.54	1.34	125.0
2	16.65	16.65	6.50	16.54	1.65	150.5

PBV MULTI-PORT SERIES 5339/6339**Parts & Engineering Data****Parts & Materials**

No.	Qty.	Description	Std. Materials, 5339/6339	
			A350 LF2/F316	F316/F316
1	1	Handle	CS Galvanized Plastic Cover	
2a/2b	2	Nut	CS Cadmium Plated	A194 Gr.8
3	1	Packing Ring	Graphite	
4	2	Spring Washer	302 SS	
5	1	Antistatic Stem	316 SS	
6	1	Gland Follower	ASTM A182 F316L	
7	1	Thrust Washer	PTFE + 25% Carbographite	
8	1	Stem O-Ring	Viton	
9	1	Ball	ASTM A182 F316	
10	4	Seats	RPTFE	
11	4	Body Seal	Graphite	
12	1	Body	ASTM A350 LF2	ASTM A182 F316
13	4	End Connections	ASTM A350 LF2	ASTM A182 F316L
14	1	Stop Pin	Carbon Steel	Stainless Steel
16	16	Bolt	ASTM A193 L7M	ASTM A193 B8M
17	1	Stop Washer	SS ASTM A182 F316	
18	4	Body Seal	TFMC	
23	4	Seat Retainer	ASTM A350 LF2	A182 F316

Soft Parts Repair Kit

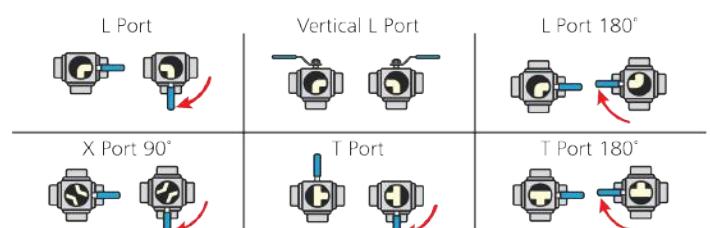
No.	Qty.	Part Name	Materials	
			T or L Port	X Port
3	1	Packing Ring	Graphite	Graphite
7	1	Thrust Washer	RPTFE	RPTFE
8	1	Stem O-Ring	Viton	Viton
10	4	Seats	Devlon V	20% C 5% Gr. Filled PTFE
11	4	Body Seals	RTFE	Graphite
18	4	Body Seals	Graphite	Viton

Pressure Temperature**Flow Coefficient (Cv)**

Reduced Port, Size (in.)								
—	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
—	5.6	10.5	24	40	60	87.5	175	223

Full Port, Size (in.)								
—	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
—	—	10.5	24	40	60	87.5	175	223

X Port, Size (in.)								
1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
2.8	2.8	2.8	9.5	22	36	60	90	164

Cv Values Apply to the Port Configurations Shown Below:

Flow Data: Flow rates were determined for ball valves in fully open position and a water temp. of 60°F (15°C). Cv value is the full capacity flow rate through the ball valve in gal. min. of water at 60°F with a pressure of 1 psi. Note: When T Port works like the 2-way valves, use Cv values for PBV 5331/6331 and deduct 50%.

OUR CORE VALUES

No One Gets Hurt

The safety of our employees and customers is our first priority coupled with a healthy respect for the environment.

Integrity

In everything we do, in every interaction, both internally and externally, we strive to operate with the utmost integrity and mutual respect.

Customer Focused

Our products enhance our customer's performance and we listen to their needs and work with them to solve their challenges.

Good Place To Work

We are committed to creating a workplace that fosters innovation, teamwork and pride. Every team member is integral to our success and is treated equally and fairly.

FORUM ENERGY TECHNOLOGIES

 12735 Dairy Ashford Road
Stafford, TX 77477

 +1 281 637 2000 (General)
 +1 281 637 2097 (Sales)

 f-e-t.com/valve-solutions

 ForumVS.Sales@f-e-t.com

The information provided in this brochure is intended for informational purposes only. While we strive to maintain accuracy, please know that the content may change without prior notification. We do not guarantee the information's completeness, timeliness, or reliability. Any reliance on the content is at your discretion, and we assume no responsibility for errors, omissions, or inaccuracies that may occur.

PBV is a registered trademark of Forum US, Inc. • Monel is a registered trademark of Huntington Alloys Corporation • Devlon is a registered trademark of Devol Engineering Limited • PEEK is a trademark of Victrex USA, Inc. • Delrin is a registered trademark of Delrin USA LLC • Grafoil is a registered trademark of Neograf Solutions, LLC • Viton is a trademark of The Chemours Company FC, LLC