

tala®


**OEM  
PARTNERSHIP  
CATALOG**

2025

# Contents

|                            |    |
|----------------------------|----|
| About                      | 3  |
| The Light Bulb             | 4  |
| Custom Capabilities        | 8  |
| How it works               | 10 |
| Technical Light Bulbs      | 10 |
| Modular Battery Technology | 46 |
| Contact                    | 52 |

## Bulb Legend

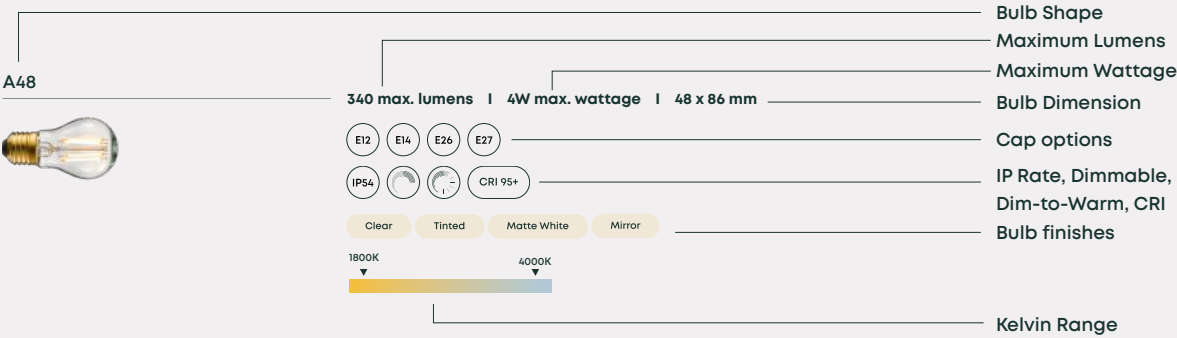



# LIGHT TO LIVE BY

We create high-quality, sustainable LED lights for homes, offices and every space in between. Lights people can be proud to switch on because they look great, lift the soul and are gentle on the planet.



**The light bulb is the protagonist.**



# THE LIGHT BULB

Light is a form of energy. As part of the electromagnetic spectrum, it is a primary tool for perceiving the world and communicating with it.

Lighting design is the art of visual communication. Thoughtful, selective application of light creates a specific scene in which the designer delivers a visual message to the viewer. Every beautiful fixture should have a beautiful light source.

Tala is committed to delivering superior light source technology to explore and compliment a broad range of visual styles.

## Save money and time

Use less energy and spend less time replacing bulbs

## Experience smooth dimming to <5%

We are pursuing perfection in Dim to Warm technology

## Unique shapes and stories

Our most popular bulbs are hand-assembled and use mouth-blown glass

## Achieve true colour representation

We consistently achieve CRI 95

# CUSTOM CAPABILITIES.

## What we offer

- + Fully customised light bulbs, light sources and modular electronics
- + Exclusive access to our Product Development and Engineering teams
- + Quality management and detailed supplier warranty
- + International compliance and testing
- + Tailored demand and logistics planning for efficient operations
- + Complete aftercare and support

## Build your own bulb

We can create a bulb perfectly tailored to your technical specifications and regional requirements:

- + Base shape and dimension
- + Glass finish
- + Filament/smd/cob arrangement
- + Colour temperature and CRI 95+
- + Voltage, wattage and lumens
- + Custom dimming
- + Custom packaging







### Go wireless, go modular

We have created a unique modular wireless solution to create the perfect, easy to assemble and repair, portable lamp.

Benefit from our unique battery technology, superior dimming capabilities and charging solutions. Our modular solution takes your current design wireless with minimal design changes.



@tala

We encourage our customers to share photos of their Tala lights on Instagram.



# HOW IT WORKS.

## 1. Design brief

We set clear objectives and tailor a design and engineering concept to your needs. Our team offers a wide range of lighting solutions, including retrofit bulbs, PCB LED boards, and modular solutions like dimmers, batteries and LED drivers.

## 2. Production

During production we keep our partners engaged at every stage of the process: from the design of your bulb or components right through to the artwork for your packaging.


## 3. Logistics & Shipping

We can customise all parts of the supply chain to suit your program. We can deliver DDP to your warehouse or EXW from our factory, delivering your products safely to you.

## 4. Go to market

We can collaborate on amplifying the message of our partnership boosting awareness of your quality, sustainable components.



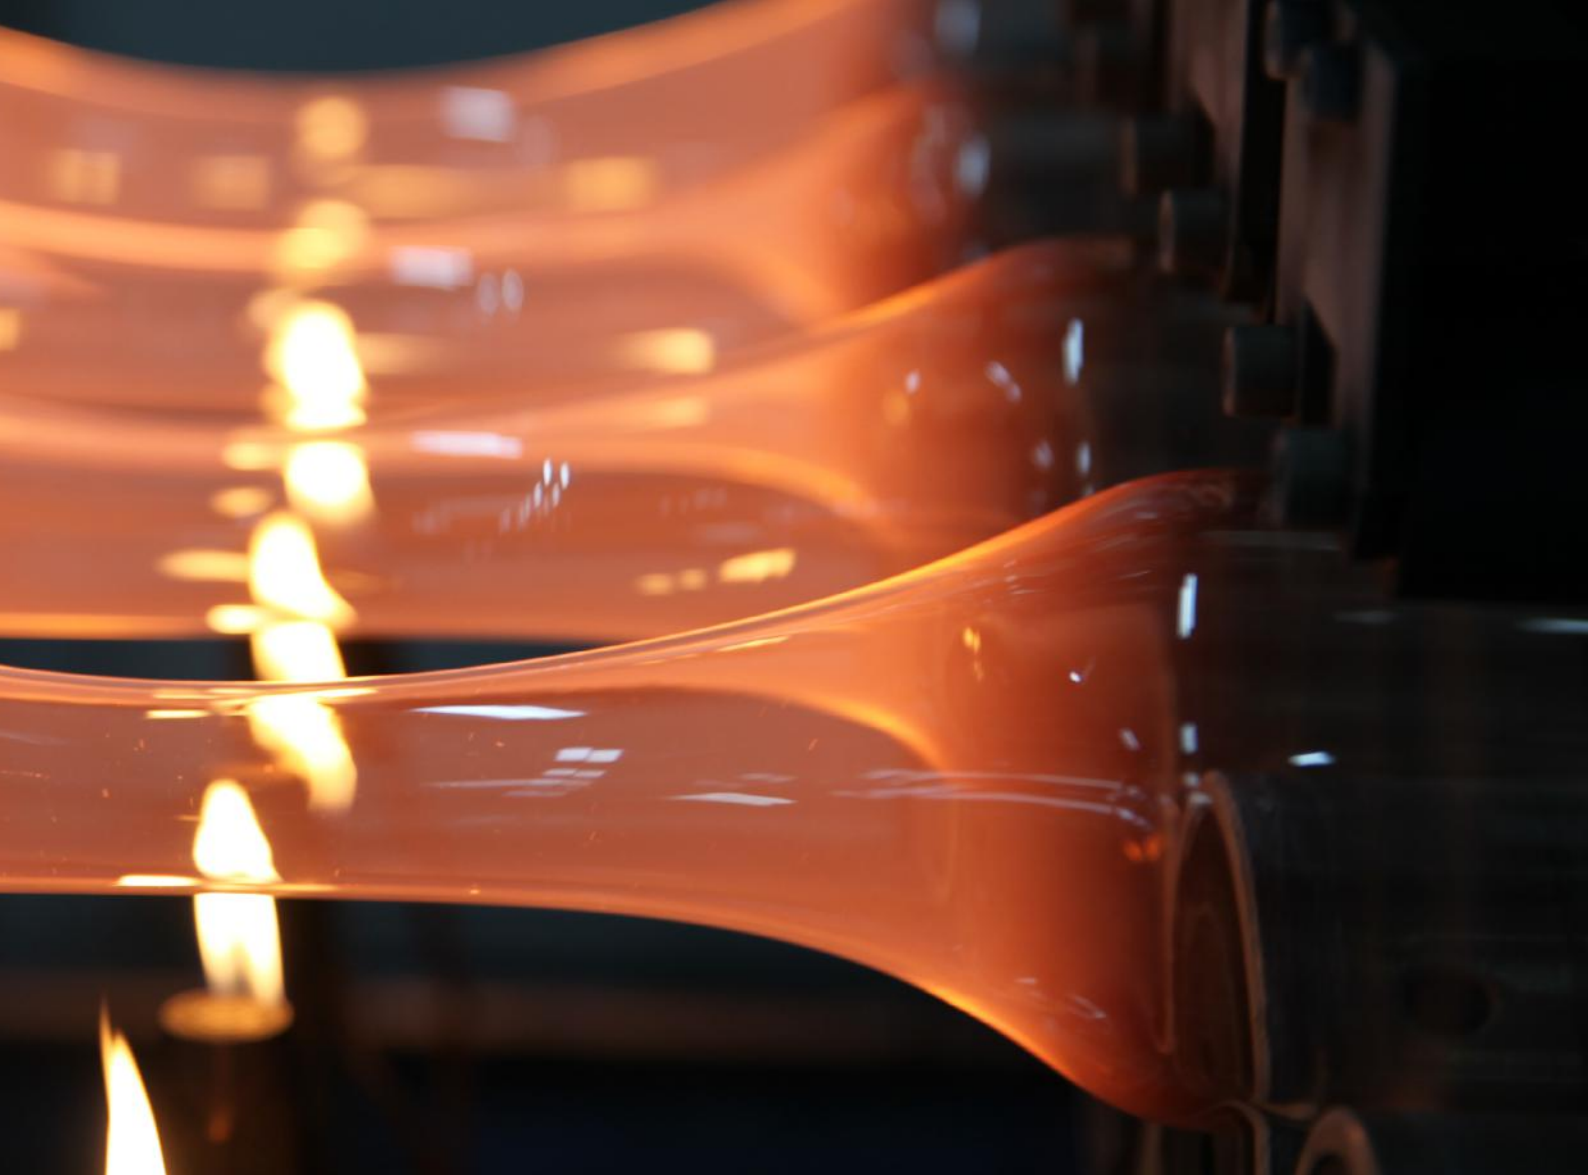

# CERTIFICATIONS


Title 20 and Prop 65 are available upon request.



## A15



**340 max. lumens | 4W max. wattage | 1 7/8 x 3 3/8 in**



## A19



**700 max. lumens | 7W max. wattage | 2 3/8 x 4 3/8 in**



## A24




**700 max. lumens | 7W max. wattage | 3 x 5 1/8 in**



## C6




**170 max. lumens | 2W max. wattage | 6/8 x 2 6/8 in**

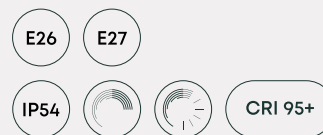

## C6



170 max. lumens | 2W max. wattage | 6/8 x 2 6/8 in



## C7



170 max. lumens | 2W max. wattage | 7/8 x 2 2/8 in



## C11



391 max. lumens | 4.6W max. wattage | 1 3/8 x 3 7/8 in



## C11-F



391 max. lumens | 4.6W max. wattage | 1 3/8 x 3 7/8 in





**THE MUSE - CANDLENUT WHITE**  
FB-MUSE-PBL-CW-01



**VITRA**  
PORCELLAIN III PORC-III-6W-2700K-E27-MP/ PORC-III-6W-2700K-E26-MP-120V





**WORKSTEAD**  
SPHERE | SPHR-G50-4W-2000-2800K-E27-MP/  
SPHR-G50-4W-2000-2800K-E12-MP-120V



## C12



**391 max. lumens** | **4.6W max. wattage** | **1 4/8 x 3 7/8 in**



## G13



**170 max. lumens** | **2W max. wattage** | **1 5/8 x 3 1/8 in**



## G14




**255 max. lumens** | **3W max. wattage** | **1 6/8 x 3 1/8 in**



## G16




**340 max. lumens** | **4W max. wattage** | **2 x 3 2/8 in**



## G25



700 max. lumens | 7W max. wattage | 3 1/8 x 4 5/8 in



## G30




700 max. lumens | 7W max. wattage | 3 6/8 x 5 3/8 in



## G31





700 max. lumens | 7W max. wattage | 3 7/8 x 5 3/8 in

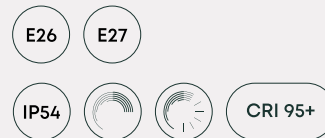

## G39




800 max. lumens | 8W max. wattage | 4 7/8 x 6 7/8 in

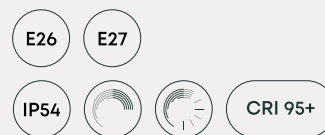

## G47



800 max. lumens | 8W max. wattage | 5 7/8 x 7 4/8 in



## G63



800 max. lumens | 8W max. wattage | 7 7/8 x 9 4/8 in



## G30



700 max. lumens | 7W max. wattage | 3 6/8 x 5 3/8 in



## R38



700 max. lumens | 7W max. wattage | 4 6/8 x 5 3/8 in



## R14



**510 max. lumens | 6W max. wattage | 1 6/8 x 1 6/8 in**



## R25



**600 max. lumens | 6W max. wattage | 3 1/8 x 4 1/8 in**



## R30



**600 max. lumens | 6W max. wattage | 3 6/8 x 5 3/8 in**



## R39



**600 max. lumens | 6W max. wattage | 4 7/8 x 6 7/8 in**







ROSIE LI STUDIO  
PORCELAIN II PORC-II-6W-2700K-E27-MP/ PORC-II-6W-2700K-E26-MP-120V



## T8-21



170 max. lumens | 2W max. wattage | 1 x 2 5/8 in



## T8-27




170 max. lumens | 2W max. wattage | 1 x 3 3/8 in



## T8-30



255 max. lumens | 3W max. wattage | 1 x 3 6/8 in



## T8-85



340 max. lumens | 4W max. wattage | 1 x 10 5/8 in



## T6




170 max. lumens | 2W max. wattage | 6/8 x 3 3/8 in



## T12





425 max. lumens | 5W max. wattage | 1 4/8 x 4 2/8 in



## T14



425 max. lumens | 5W max. wattage | 1 6/8 x 4 2/8 in

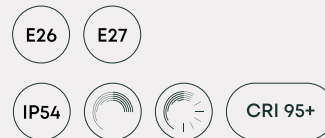

## T9-41



340 max. lumens | 4W max. wattage | 1 1/8 x 5 1/8 in



## T9-58



**340 max. lumens** | **4W max. wattage** | **1 1/8 x 7 2/8 in**



## T9-63




**340 max. lumens** | **4W max. wattage** | **1 1/8 x 7 7/8 in**



## T9-88



**425 max. lumens** | **5W max. wattage** | **1 1/8 x 11 in**



## T9-94



**425 max. lumens** | **5W max. wattage** | **1 1/8 x 11 6/8 in**






## ST9



**425 max. lumens** | **5W max. wattage** | **1 1/8 x 2 5/8 in**



## ST14




**170 max. lumens** | **2W max. wattage** | **1 6/8 x 3 3/8 in**




## ST18



**340 max. lumens** | **4W max. wattage** | **2 2/8 x 5 1/8 in**

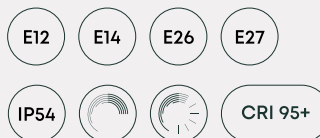

## ST20

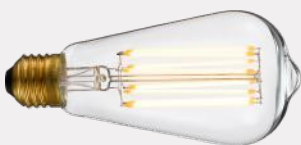

**700 max. lumens** | **7W max. wattage** | **2 4/8 x 5 4/8 in**





LUMINAIRE-AUTHENTIK  
PORCELLAIN RANGE




**APPARATUS**

GAIA 6 WATT GAIA-6W-2200K-E27-T / GAIA-6W-2200K-E26-T-120V

## PS35



**700 max. lumens** | **7W max. wattage** | **4 3/8 x 7 7/8 in**



## PS41





**800 max. lumens** | **8W max. wattage** | **5 1/8 x 9 3/8 in**



## T9-14




**200 max. lumens** | **3.5W max. wattage** | **1 1/8 x 1 6/8 in**

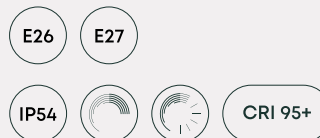

## T8-19



**380 max. lumens** | **4.8W max. wattage** | **1 x 2 3/8 in**

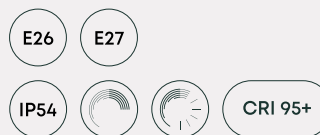

## T8-19



**430 max. lumens** | **4.8W max. wattage** | **1 x 2 3/8 in**



White Full Frost    White Slight Frost    Clear White



## T11-31



**800 max. lumens** | **8W max. wattage** | **1 3/8 x 3 7/8 in**




White Full Frost    White Slight Frost    Clear White



## T9-19



**500 max. lumens** | **4.5W max. wattage** | **1 1/8 x 2 3/8 in**

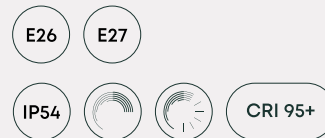


White Full Frost    White Slight Frost    Clear White



## T9-31



**800 max. lumens** | **7.8W max. wattage** | **1 1/8 x 3 7/8 in**

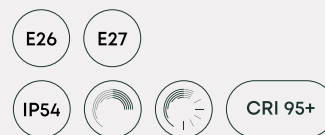


White Full Frost    White Slight Frost    Clear White



## T9-36



**1200 max. lumens | 11.5W max. wattage | 1 1/8 x 4 4/8 in**

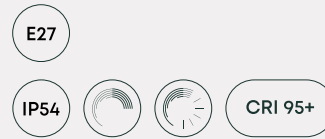

White Full Frost    White Slight Frost    Clear White



## T11-47



**1500 max. lumens | 13.5W max. wattage | 1 3/8 x 5 7/8 in**




White Full Frost    White Slight Frost    Clear White



## T9-31



**800 max. lumens | 8.3W max. wattage | 1 1/8 x 3 7/8 in**

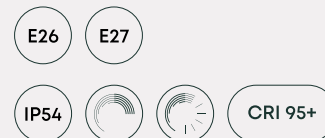


White Full Frost    White Slight Frost    Clear White



## T9-31



**920 max. lumens | 11W max. wattage | 1 1/8 x 3 7/8 in**

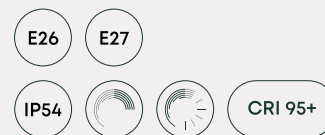

White Full Frost    White Slight Frost    Clear White





G9



**200 max. lumens | 2.5W max. wattage | 5/8 x 1 4/8 in**

G9-12VAC G9-12VDC G9-120V G9-240V

IP54

White Full Frost White Slight Frost Clear White



G9



**280 max. lumens | 4W max. wattage | 6/8 x 1 7/8 in**

G9-12VAC G9-12VDC G9-120V G9-240V

IP54

White Full Frost White Slight Frost Clear White



G9



**360 max. lumens | 5W max. wattage | 6/8 x 2 2/8 in**

G9-12VAC G9-12VDC G9-120V G9-240V

IP54

White Full Frost White Slight Frost Clear White



G9



**230 max. lumens | 2.5W max. wattage | 5/8 x 1 4/8 in**

G9-12VAC G9-12VDC G9-120V G9-240V

IP54

White Full Frost White Slight Frost Clear White



DECORATIVE



SPARK AND BELL  
PORCELLAIN.II PORC-II-6W-2700K-E27-MP / PORC-II-6W-2700K-E26-MP-120V





LINDSEY ADELMAN STUDIO  
GAIA 6 WATT GAIA-6W-2200K-E27-T / GAIA-6W-2200K-E26-T-120V

## G9



**145 max. lumens | 2.5W max. wattage | 5/8 x 1 5/8 in**

G9-12VAC

G9-12VDC

G9-120V

G9-240V

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## G9



**300 max. lumens | 3.3W max. wattage | 5/8 x 1 5/8 in**

G9-12VAC

G9-12VDC

G9-120V

G9-240V

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## G9



**290 max. lumens | 4.5W max. wattage | 6/8 x 2 2/8 in**

G9-12VAC

G9-12VDC

G9-120V

G9-240V

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## G9



**290 max. lumens | 4W max. wattage | 6/8 x 2 2/8 in**

G9-12VAC

G9-12VDC

G9-120V

G9-240V

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## G9



**350 max. lumens | 4.5W max. wattage | 6/8 x 2 2/8 in**

G9-12VAC

G9-12VDC

G9-120V

G9-240V

IP54



CRI 95+

White Full Frost


White Slight Frost

Clear White

1800K



4000K



## G9



**390 max. lumens | 5.2W max. wattage | 6/8 x 2 2/8 in**

G9-12VAC

G9-12VDC

G9-120V

G9-240V

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## G9-COB



**170 max. lumens | 2.5W max. wattage | 5/8 x 1 7/8 in**

G9-12VAC

G9-12VDC

G9-120V

G9-240V

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## G9-COB



**250 max. lumens | 3.3W max. wattage | 6/8 x 2 in**

G9-12VAC

G9-12VDC

G9-120V

G9-240V

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K




4000K



## G9-COB





**300 max. lumens | 3.8W max. wattage | 6/8 x 2 1/8 in**

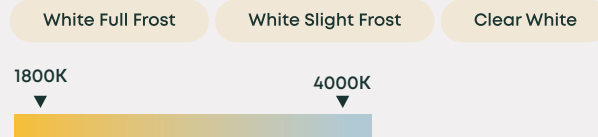

## G9-COB





**250 max. lumens | 3.3W max. wattage | 6/8 x 2 in**

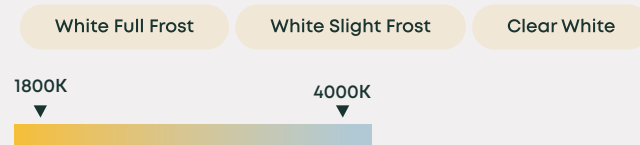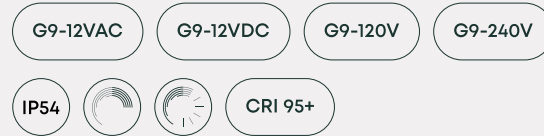

## G9-COB FILM





**240 max. lumens | 3W max. wattage | 5/8 x 1 4/8 in**

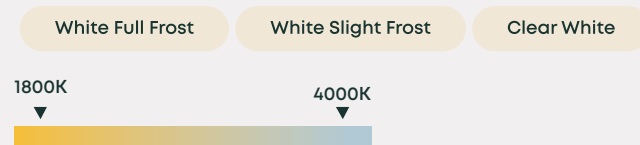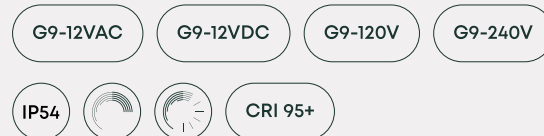

## G9-COB FILM



**260 max. lumens | 4W max. wattage | 5/8 x 1 5/8 in**

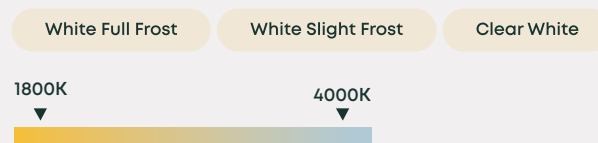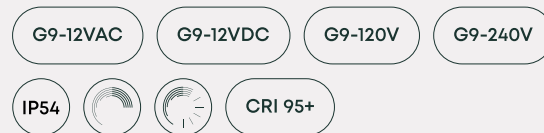



## G9-FILAMENT



**280 max. lumens | 3.5W max. wattage | 6/8 x 2 4/8 in**

1800K ▼ ▼ 4000K

A horizontal bar showing a color gradient from warm yellow (1800K) to cool blue (4000K).

## G9-PAR



**240 max. lumens | 3.2W max. wattage | 1 1/8 x 1 2/8 in**

1800K ▼ ▼ 4000K

A horizontal bar showing a color gradient from warm yellow (1800K) to cool blue (4000K).

## G9-SPOT



**290 max. lumens | 4.2W max. wattage | 6/8 x 1 6/8 in**

1800K ▼ ▼ 4000K

A horizontal bar showing a color gradient from warm yellow (1800K) to cool blue (4000K).

## G9-ENGINE



**680 max. lumens | 7W max. wattage | 1 5/8 x 1 5/8 in**

1800K ▼ ▼ 4000K

A horizontal bar showing a color gradient from warm yellow (1800K) to cool blue (4000K).



**HANDVARK**

SPHERE I SPHR-G50-4W-2000-2800K-E27-MP/  
SPHR-G50-4W-2000-2800K-E12-MP-120V



**VITRA**

PORCELLAIN III PORC-III-6W-2700K-E27-MP/  
PORC-III-6W-2700K-E26-MP-120V



**L'AVIVA HOME**  
SPHERE III SPHR-G100-7W-2000-2800K-E27-MP/  
SPHR-G100-7W-2000-2800K-E26-MP-120V

## G4 | GU4 | GY6.35



**240 max. lumens | 2.9W max. wattage | 5/8 x 1 4/8 in**

G4-12VAC

G4-12VDC

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## G4 | GU4 | GY6.35



**260 max. lumens | 2.9W max. wattage | 5/8 x 1 4/8 in**

G4-12VAC

G4-12VDC

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## G4 | GU4 | GY6.35



**330 max. lumens | 3.8W max. wattage | 5/8 x 1 6/8 in**

G4-12VAC

G4-12VDC

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## G4 | GU4 | GY6.35



**400 max. lumens | 4.5W max. wattage | 6/8 x 1 7/8 in**

G4-12VAC

G4-12VDC

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## G4 | GU4 | GY6.35



**450 max. lumens | 4.5W max. wattage | 7/8 x 2 in**

G4-12VAC

G4-12VDC

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## G4 | GU4 | GY6.35 COB



**280 max. lumens | 3.5W max. wattage | 6/8 x 1 6/8 in**

G4-12VAC

G4-12VDC

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## G4 | GU4 | GY6.35 COB



**350 max. lumens | 4W max. wattage | 6/8 x 1 7/8 in**

G4-12VAC

G4-12VDC

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## G4 | GU4 | GY6.35 | COB-FILM



**280 max. lumens | 4W max. wattage | 5/8 x 1 7/8 in**

G4-12VAC

G4-12VDC

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## **+ Build your own bulb**



**A60-HALF-MIRROR**  
A60-6W-2700K-E27-HM







## MR16-GU5.3



**550 max. lumens** | **6.5W max. wattage** | **1 7/8 x 1 7/8 in**

GU5\_12VAC

IP54



CRI 95+

Clear White

1800K



4000K



## MR16-GU10



**760 max. lumens** | **7.5W max. wattage** | **1 7/8 x 2 in**

GU10-120V

GU10-240V

IP54



CRI 95+

Clear White


1800K



4000K



## DJD-GU10



**550 max. lumens** | **5.5W max. wattage** | **7/8 x 2 in**

GU10-120V

GU10-240V

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## AR70-GU10



**680 max. lumens** | **6.8W max. wattage** | **2 6/8 x 2 4/8 in**

GU10-120V

GU10-240V

IP54



CRI 95+

Clear White

1800K



4000K



## GX53



**550 max. lumens | 6.8W max. wattage | 3 x 12/8 in**

GU24-120V

GU24-240V

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## GU24



**830 max. lumens | 9.9W max. wattage | 3 x 2 2/8 in**

GU24-120V

GU24-240V

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K



4000K



## R7S-78



**530 max. lumens | 6.3W max. wattage | 1 1/8 x 3 1/8 in**

R7S-120V

R7S-240V

IP54



CRI 95+

Clear White

1800K



4000K



## R7S-118



**1400 max. lumens | 13.5W max. wattage | 1 1/8 x 4 5/8 in**

R7S-120V

R7S-240V

IP54



CRI 95+

Clear White

1800K



4000K



## R7S-135



**1600 max. lumens | 14W max. wattage | 1 1/8 x 5 3/8 in**

R7S-120V

R7S-240V

IP54



CRI 95+

Clear White

1800K

4000K



## GY8



**300 max. lumens | 3W max. wattage | 5/8 x 1 4/8 in**

R7S-120V

R7S-240V

IP54



CRI 95+

White Full Frost

White Slight Frost

Clear White

1800K

4000K



## Dimmer I



EU

UK

US

Brass

Graphite

### Power range per gang

|              | EU                                   | UK      | US      |
|--------------|--------------------------------------|---------|---------|
| LED          | 2-100W                               | 2-100W  | 2-200W  |
| Incandescent | 10-200W (1 gang)<br>10-150W (2 gang) | 10-150W | 10-300W |

## Dimmer II



EU

UK

US

Brass

Graphite

### Power range per gang

|              | EU                                   | UK      | US      |
|--------------|--------------------------------------|---------|---------|
| LED          | 2-100W                               | 2-100W  | 2-200W  |
| Incandescent | 10-200W (1 gang)<br>10-150W (2 gang) | 10-150W | 10-300W |



**WORKSTEAD**

PORCELLAIN II PORC-II-6W-2700K-E27-MP/  
PORC-II-6W-2700K-E26-MP-120V



# GO WIRELESS WITH MODULAR BATTERY TECHNOLOGY.

Create the perfect indoor-outdoor portable lamp using our modular developer kit. From al fresco dining to camping outdoors, Tala have created a unique wireless solution, that can elevate your product to become a wireless lamp.

- + Battery life - Up to 60 hours (or more ...)
- + Dimming – An easy to connect dimmer so your current design needs no alterations.
- + Charging – A plug-in USB-C connector positioned to compliment your design. Go wireless with the wireless charging module.
- + Light – Our wireless solutions come with a dim to warm 12v retrofit bulb or an easy to replace Chip On Board solution.
- + Fully bespoke and tailored to your design, this module is easy to assemble at production, and easily replaceable for repairs.









# GO MODULAR

We will ship you a plug and play kit of components to integrate with your new or existing designs.

- + Standard PCBA board
- + Modular Charging (e.g. USB C, Inductive QI)
- + Modular dimming solution
- + Modular battery solution
- + Technical specification (Transportation Mode, Battery Saving Mode, Dimmer Memory, Battery Lifetime Indicator)
- + Add a custom light source (12v bulb or COB)

All our wireless modules are equipped with with trailing-edge dimming systems.





# GO CUSTOM

Work with our engineering team to build a fully customised ready to ship battery solution:

- + Bespoke PCBA board
- + Shape and dimension
- + Integrated Charging (e.g. USB C, Inductive Qi)
- + Integrated Lighting solution (COB)
- + Seamless integration to your current design
- + Integrated replaceable battery solution
- + Technical specification (Transportation Mode, Battery Saving Mode, Dimmer Memory, Battery Lifetime Indicator)

All our wireless modules are equipped with with trailing-edge dimming systems.





# CONTACT

Please contact these people for further questions.



**David De Groot**  
Head of OEM Partnerships  
daviddg@tala.co.uk

Contact



**Matthew McRae**  
Head of Sales, Americas  
matthew@tala.co.uk

Contact





Tala Studios  
25B Vyner Street  
London E2 9DG  
United Kingdom

Tala Europe B.V.  
Bertus Aafjeshove 40  
Nieuwegein 3437 JN  
Netherlands

Tala North America Inc.  
C/O LH Frishkoff & Company  
546 5th Avenue, FL 9  
New York NY 10036  
United States

Company Number: 08362941  
VAT Registration Number: GB182754681  
Tax ID: 82-3934031

Tala Studios  
+44 7700 170343  
hello@tala.co.uk  
tala.co.uk

Tala North America Inc.  
+1 (240) 724-8111  
hello@tala.co.uk  
talalighting.com

Instagram: @tala  
Facebook: talaHQ  
Pinterest: TalaLED



WE ARE A MEMBER OF THE UK LIGHTING  
INDUSTRY ASSOCIATION



tala®

[tala.co.uk](https://tala.co.uk)

Certified  
  
Corporation