

GET THE JOB DONE WITH THE
PRO SERIES
CATALOG



ALLIANCE
OUTDOOR LIGHTING

ALLIANCE
OUTDOOR LIGHTING

PRO SERIES



TABLE OF CONTENTS

Warranty Information	02
Directional Lights	03
Path Lights	05
Hardscape	09
Lamps	11
Transformers	13

**BUILT TO LAST—
AND BACKED BY REAL COVERAGE.**

Our solid brass fixtures come with a **Lifetime Warranty**, so you can install with confidence. LED lamps are covered for **10 years**, and our transformers carry a **2-year warranty**.


We stand behind our products so you can stand behind your work.



**GETS THE
JOB DONE**



DIRECTIONAL LIGHTS

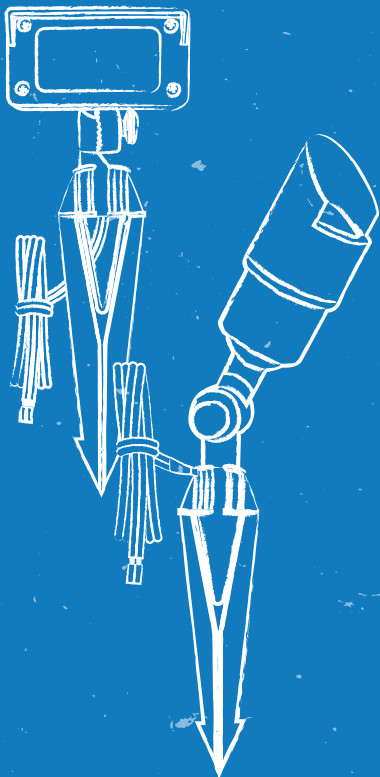

10 units per master pack

Solid cast brass

36" wire lead

16 awg (UL listed), pre-connected to the fixture, pre-stripped for easy wire connection.

Plastic 8" slotted ground stake



BL115

Aged Brass Finish

Uses E-LMR16-LED (see pg. 12)

7.5" Height



BL115-BLK

Premium Black Overcoat

Uses E-LMR16-LED (see pg. 12)

7.5" Height



FL15

Aged Brass Finish

Uses E-LBIPIN-LED-250lm (see pg. 12)

3.5" Height

4" Width



FL15-BLK

Premium Black Overcoat

Uses E-LBIPIN-LED-250lm (see pg. 12)

3.5" Height

4" Width



PATH LIGHTS

10 units per master pack

Solid cast brass

36" wire lead

16 awg (UL listed), pre-connected to the fixture, pre-stripped for easy wire connection.

Plastic 8.5" slotted ground stake



PAL105

Aged Brass Finish

Uses E-LBIPIN-LED-250lm (see pg. 12)

22.5" Height

6.5" Hat Diameter



PAL105-BLK

Premium Black Overcoat

Uses E-LBIPIN-LED-250lm (see pg. 12)

22.5" Height

6.5" Hat Diameter

PATH LIGHTS



PAL705

Aged Brass Finish

Uses E-LBIPIN-LED-250lm (see pg. 12)

21" Height

7.4" Hat Diameter



PAL705-BLK

Premium Black Overcoat

Uses E-LBIPIN-LED-250lm (see pg. 12)

21" Height

7.4" Hat Diameter



PAL555-12

Aged Brass Finish

Uses E-LBIPIN-LED-250lm (see pg. 12)

15" Height

3.5" Hat Diameter



PAL555-12-BLK

Premium Black Overcoat


Uses E-LBIPIN-LED-250lm (see pg. 12)

15" Height

3.5" Hat Diameter



HARDSCAPE

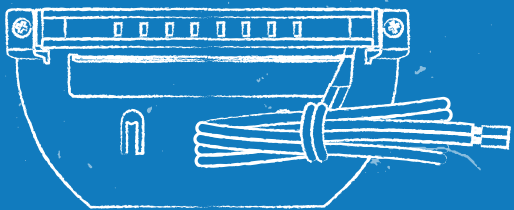

10 units per master pack

Integrated LED module

Solid cast brass

Removable mounting bracket

10' wire lead

16 awg (UL listed), pre-connected to the fixture, pre-stripped for easy wire connection.



SL75-LED

Aged Brass Finish
7" Length
3.5" Bracket Depth
0.75" LED Bar Height
0.75" LED Bar Depth



SL75-LED-BLK

Premium Black overcoat
7" Length
3.5" Bracket Depth
0.75" LED Bar Height
0.75" LED Bar Depth



LAMPS

10 units per master pack

LED

Energy efficient





E-LMR16-LED-4W

Soft White - 2900k

Lift-and-Turn Lens

adjusts beam spread (25°, 40°, 55°)

4 Watts • 250 Lumens



E-LMR16-LED-5W

Soft White - 2900k

Lift-and-turn lens

adjusts beam spread (25°, 40°, 55°)

5.5 Watts • 350 Lumens



E-LMR16-LED-5W-4K

Cool White - 4000k

Lift-and-Turn Lens

adjusts beam spread (25°, 40°, 55°)

5.5 Watts • 350 Lumens



E-LBIPIN-LED-250LM

Soft White -2900k

2.5 Watts • 250 Lumens




TRANSFORMERS

120 volt to 12 and 14 VAC

Built-in photocell and timer

5' grounded power cord

Built-in circuit breaker

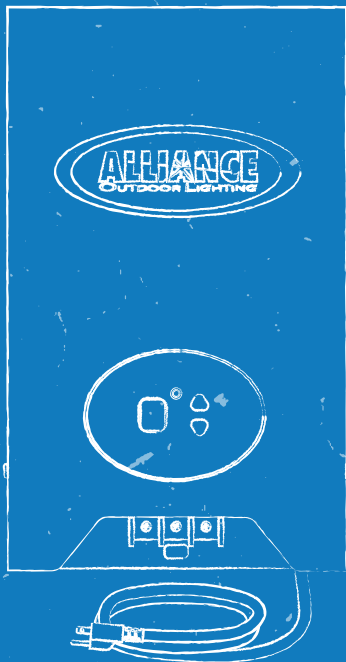



TF150

150 Watt
Plastic Housing
12v Tap



TF200

200 Watt
Digital Control Center
Stainless Steel Housing
12v Tap



TF300

300 Watt
Digital Control Center
Stainless Steel Housing
12v & 15v Tap



A-LOC-50

Waterproof Silicone Filled Caps
Brass Locking Crimps
(crimp locks wires in to prevent pull-out)
Clip Together Grouping
50 Pieces / 25 Sets

ALLIANCE

OUTDOOR LIGHTING



AllianceOutdoorLighting.com



1.888.BT.LIGHT