

MinMoe

Face Recognition Terminals

Touch-free, access is easier than ever

DS-K1T344 Series

4.5-inch
touchscreen



POE
SUPPORT

IP65
RATING




www.hikvision.com
support@hikvision.com






Aluminum alloy & tempered glass design

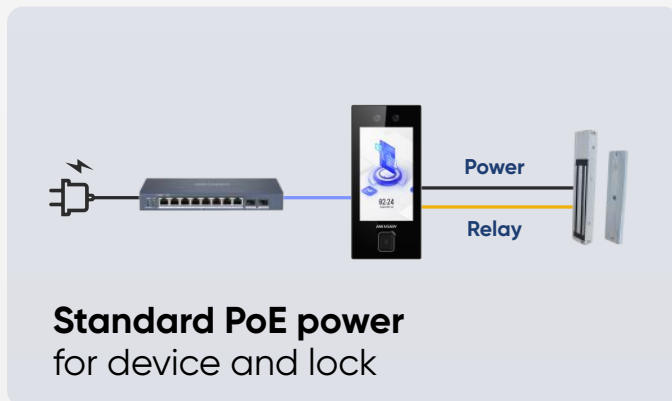

Standard PoE power for device and lock

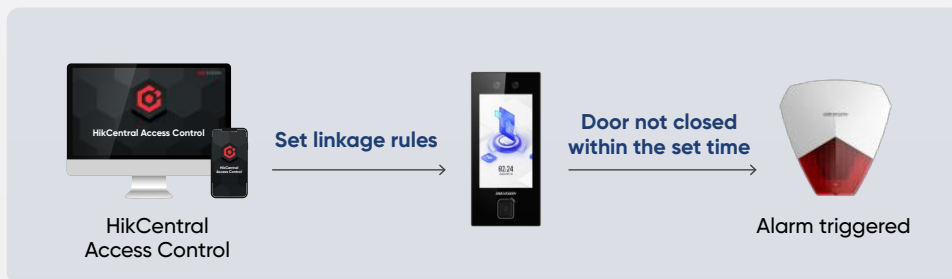

Alarm in/out for flexible linkage



One-press video intercom calling

Easy configuration via multiple methods



GUI



AP mode / Web



Product Showcase

DS-K1T344 Series

User capacity	3,000	Power supply	DC 12V/PoE (IEEE802.3at)
Face capacity	3,000	Communication	RS-485, Wiegand, Ethernet, Wi-Fi (optional)
Card type	M1/EM	Alarm in/out	Support
Card capacity	3,000	Installation	Wall mounting
Fingerprint capacity	3,000 (optional)	Languages	English, Spanish (Latin American version), Arabic, Thai, Indonesian, Russian, Vietnamese, Brazilian Portuguese, Turkish, French
Event capacity	150,000		